

FCC Test Report

Equipment : TransferJet MicroUSB Adapter
Brand Name : TOSHIBA
Model No. : TJM35420MU
FCC ID : CJ6UPA5145TJ
Standard : 47 CFR FCC Part 15.517
Operating Band : 4488 MHz
FCC Classification : UWB
Applicant : TOSHIBA CORPORATION
1-1, Shibaura 1-chome, Minato-ku,
Tokyo, 105-8001, Japan
Manufacturer : GOOD WAY TECHNOLOGY CO.,LTD.
3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist.,
New Taipei City 231, Taiwan, R.O.C

The product sample received on Oct. 03, 2013 and completely tested on Nov. 27, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment	9
1.3	Testing Applied Standards	9
1.4	Testing Location Information	9
1.5	Measurement Uncertainty	10
2	TEST CONFIGURATION OF EUT	11
2.1	The Worst Case Modulation Configuration	11
2.2	Test Channel Frequencies Configuration.....	11
2.3	The Worst Case Power Setting Parameter	11
2.4	The Worst Case Measurement Configuration	11
2.5	Test Setup Diagram	13
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	UWB bandwidth	18
3.3	Peak Emissions within a 50 MHz Bandwidth.....	20
3.4	Radiated Emissions	22
4	TEST EQUIPMENT AND CALIBRATION DATA.....	50
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Mechanism complied	FCC 15.203	Complied
1.1.6	15.517(a)	Operational Restriction	Informed the applicant	15.517(a)	Complied
1.1.7	15.517(f)	Labeling Requirements	Informed the applicant	15.517(a)	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1903870MHz 51.97 (Margin 12.05dB) - QP 43.02 (Margin 11.00dB) - AV	FCC 15.207	Complied
3.2	15.517(b)	UWB Bandwidth	692MHz	≥ 500MHz	Complied
3.3	15.517(e)	Peak Emissions within a 50 MHz Bandwidth	-28.54 dBm/50MHz	≤ 0 dBm/50MHz	Complied
3.4	15.517(c) /15.517(d)	Radiated Emissions	[dBuV]: 14394MHz 65.77 (Margin 8.23dB) - PK 52.62 (Margin 1.38dB) - AV	UWB Emissions: FCC 15.517(c) GPS Emissions: FCC 15.517(d) Digital Emissions: FCC 15.209	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (GHz)	Mode	Ch. Freq. (GHz)	Channel Number	Transmit Chains (N _{TX})	Peak Power (dBm/50MHz) EIRP	Avg Power (dBm/MHz) EIRP
4.2-4.8	TransferJet	4.48	1	1	-28.54	-66.33
Note 1: TransferJet uses Pi/2 shift BPSK + DSSS modulation.						

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PCB	-2.0

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100%	0

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains (Host PC)	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC from system	<input type="checkbox"/> Battery

1.1.6 Operational Restriction

Operation Restriction	Informed the applicant	Not applicable	User Manual Informed	Passed
<input checked="" type="checkbox"/> Indoor UWB devices & Fixed indoor infrastructure				
Must be capable of operation only indoors. The necessity to operate with a fixed indoor infrastructure. [A transmitter that had been connected to the AC power lines and operates solely through the AC mains. Or The device under test operates solely through USB port of a PC. It is not intended to operate from any other power source and be considered sufficient to demonstrate a fixed indoor infrastructure]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Emissions from equipment				
The emissions from equipment operated shall not be intentionally directed outside of the building in which the equipment is located, such as through a window or a doorway, to perform an outside function, such as the detection of persons about to enter a building. [The applicant has been informed of this requirement.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Outdoor mounted antennas				
The use of outdoor mounted antennas, e.g., antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited. [The applicant has been informed without any outdoor mounted antennas.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Field disturbance sensors install				
Field disturbance sensors installed inside of metal or underground storage tanks are considered to operate indoors provided the emissions are directed towards the ground. [Not applicable for this client.]	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> A communications system shall transmit only				
A communications system shall transmit only when the intentional radiator is sending information to an associated receiver. [The applicant has been informed of this requirement and is clearly stated on the user manual.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>



1.1.7 Labeling and Instruction Manual Requirements

UWB systems operating under the provisions of this section shall bear the following or similar statement in a conspicuous location on the device or in the instruction manual supplied with the device.

"This equipment may only be operated indoors. Operation outdoors is in violation of 47 U.S.C. 301 and could subject the operator to serious legal penalties."

In addition to the above requirements, a UWB device subject to certification shall be labeled as followed in a conspicuous location on the device:

"This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

(1) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified directly above this section is required to be affixed only to the main control unit.

(2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

The users' manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	INSPIRON 6400	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 393764

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	21°C / 50%
RF Conducted		TH01-HY	Ian	26.8°C / 61%
Radiated Emission		03CH03-HY	Allen	24°C / 56%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth		±1.42 %
Emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
Emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing		
Mode	Transmit Chains (N_{TX})	Data Rate
TransferJet	1	560Mbps

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Mode	Test Channel Frequencies (MHz)
TransferJet	4488-(F1)




2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter	
Test Software Version	DOS
Mode	Test Frequency (MHz)
	4488
TransferJet	default


2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	USB Power & Radio link


The Worst Case Mode for Following Conformance Tests	
Tests Item	Conducted Emissions, UWB Bandwidth
Test Condition	Conducted measurement at transmit chains
Mode	TransferJet

The Worst Case Mode for Following Conformance Tests			
Tests Item	UWB Bandwidth, Peak Emissions within a 50 MHz Bandwidth, Radiated Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is X. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode below 960MHz	<input checked="" type="checkbox"/> 1. USB Power & Radio link		
Mode	TransferJet		
Orthogonal Planes of EUT	X Plane 	Y Plane 	Z Plane 


2.5 Test Setup Diagram

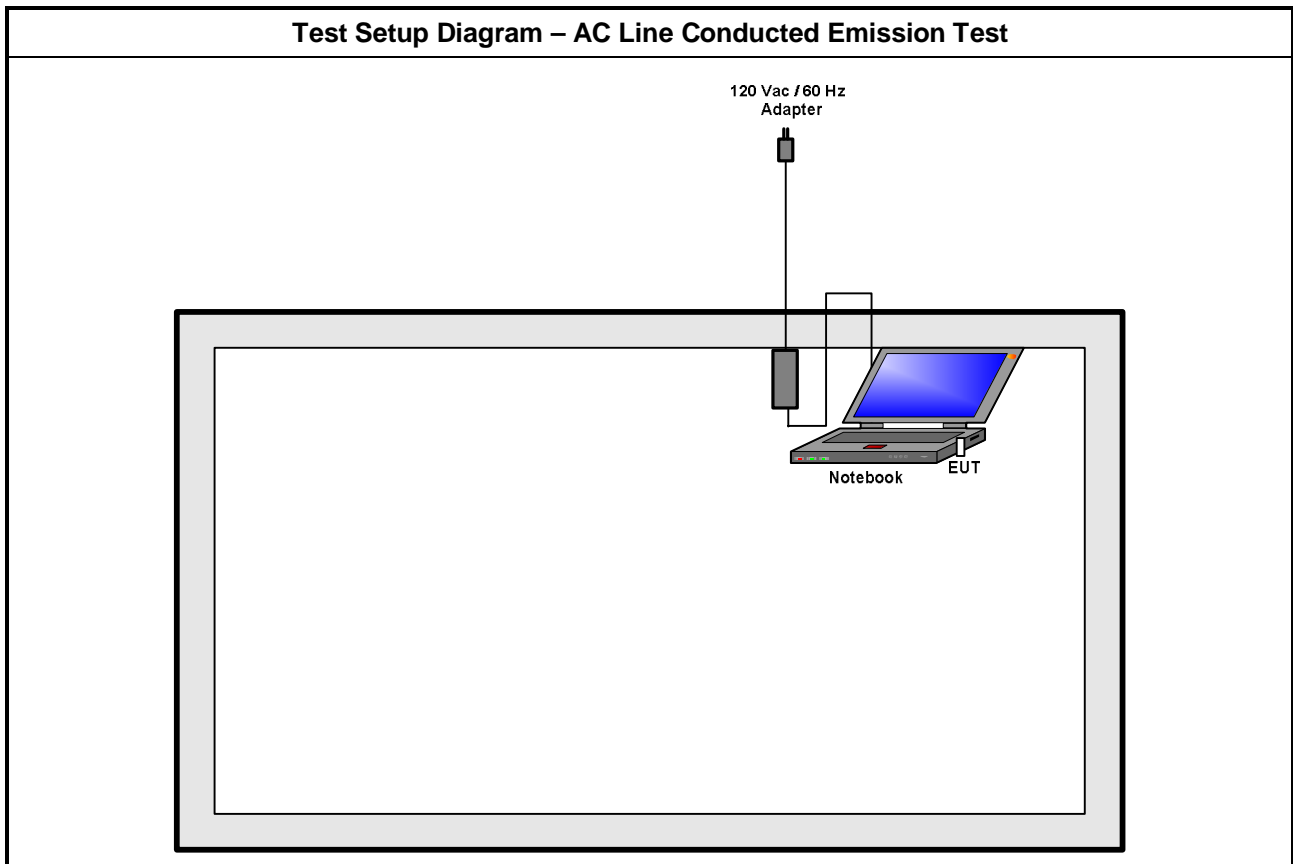

Test Setup Diagram - Radiated Test (30MHz~1GHz)

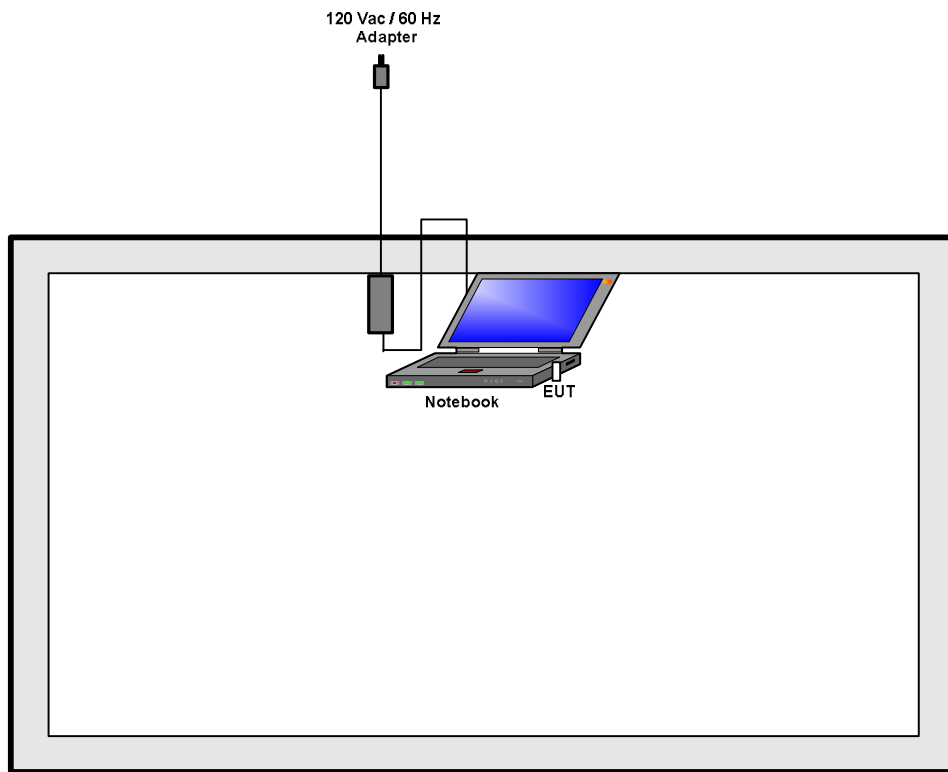

Test Setup Diagram - Radiated Test (3GHz to 5GHz / 1 GHz to 18 GHz)

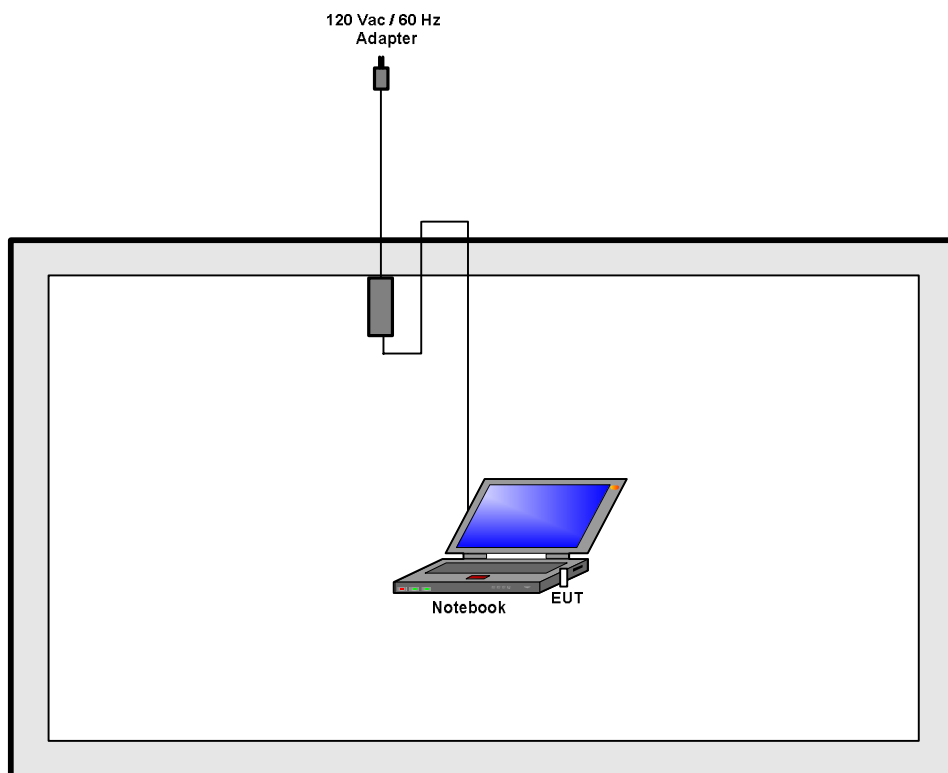

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

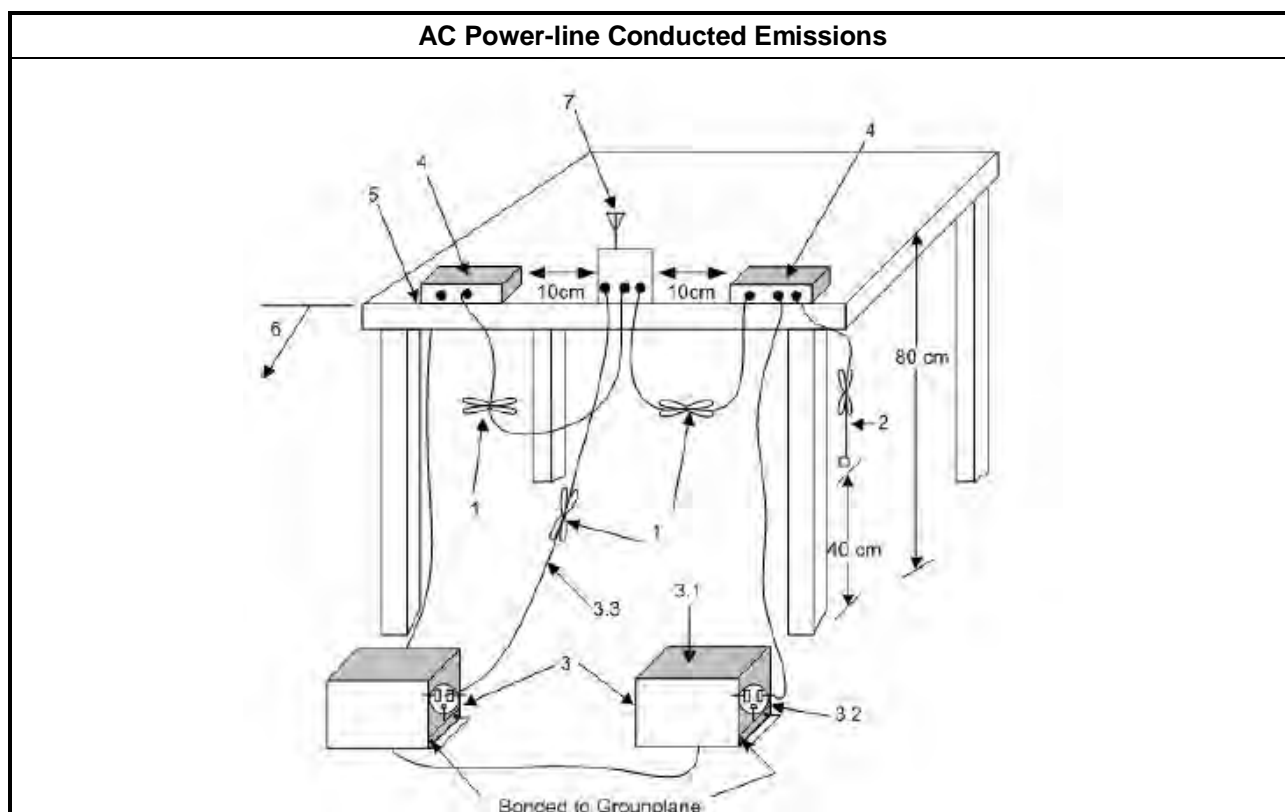


3.1.5 Test Result of AC Power-line Conducted Emissions

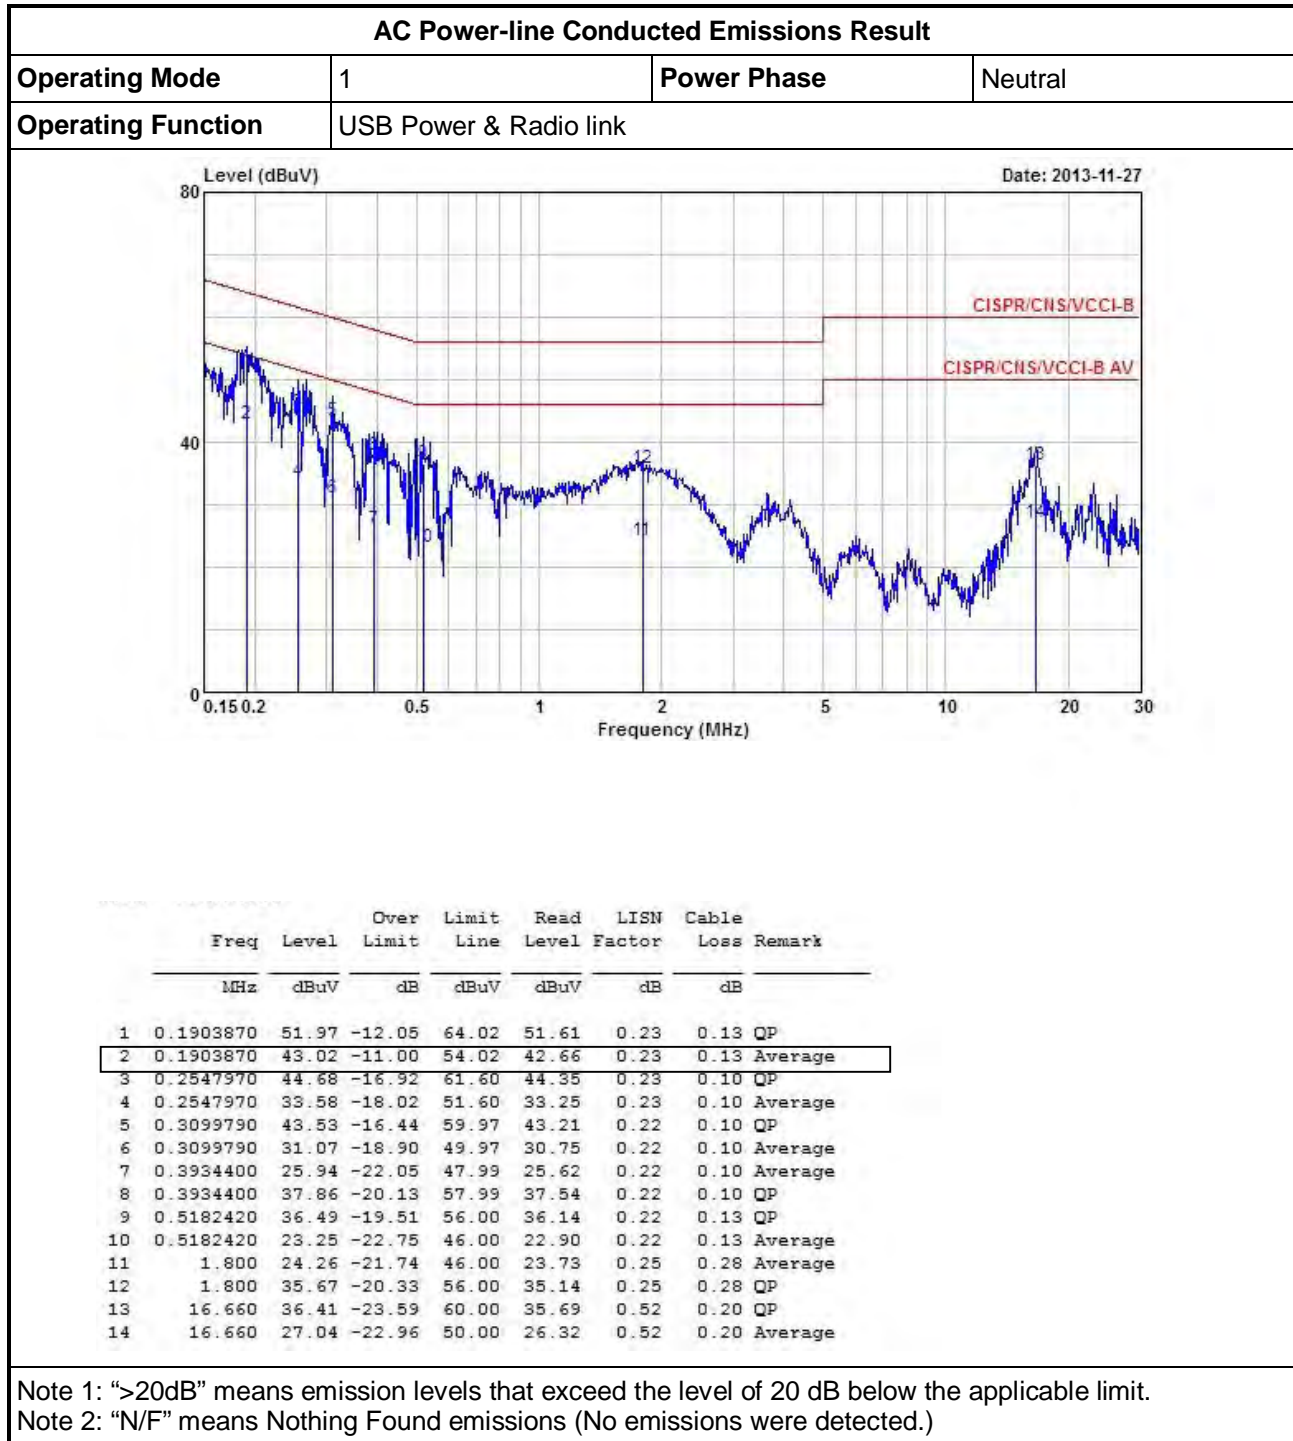

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	USB Power & Radio link		

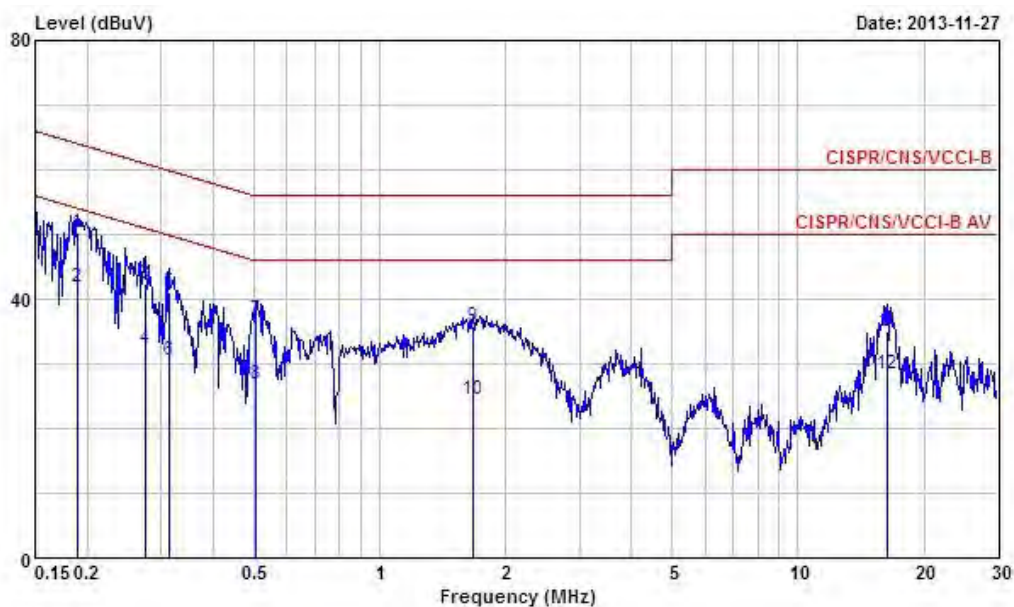

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1893810	50.20	-13.86	64.06	49.96	0.11	0.13	QP
2	0.1893810	41.90	-12.16	54.06	41.66	0.11	0.13	Average
3	0.2744160	42.38	-18.60	60.98	42.17	0.11	0.10	QP
4	0.2744160	32.42	-18.56	50.98	32.21	0.11	0.10	Average
5	0.3132810	41.03	-18.85	59.88	40.83	0.10	0.10	QP
6	0.3132810	30.49	-19.39	49.88	30.29	0.10	0.10	Average
7	0.5073740	36.73	-19.27	56.00	36.50	0.10	0.13	QP
8	0.5073740	26.92	-19.08	46.00	26.69	0.10	0.13	Average
9	1.670	35.75	-20.25	56.00	35.36	0.12	0.27	QP
10	1.670	24.43	-21.57	46.00	24.04	0.12	0.27	Average
11	16.400	35.12	-24.88	60.00	34.63	0.29	0.20	QP
12	16.400	28.46	-21.54	50.00	27.97	0.29	0.20	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 UWB bandwidth

3.2.1 UWB bandwidth Limit

UWB bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	UWB bandwidth ≥ 500 MHz or Fractional bandwidth ≥ 0.2 ; Fractional bandwidth = $2(f_H - f_L) / (f_H + f_L)$



3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	For the UWB bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 and clause 7.10.1 for UWB bandwidth testing.
<input checked="" type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6.4 for UWB bandwidth.

3.2.4 Test Setup

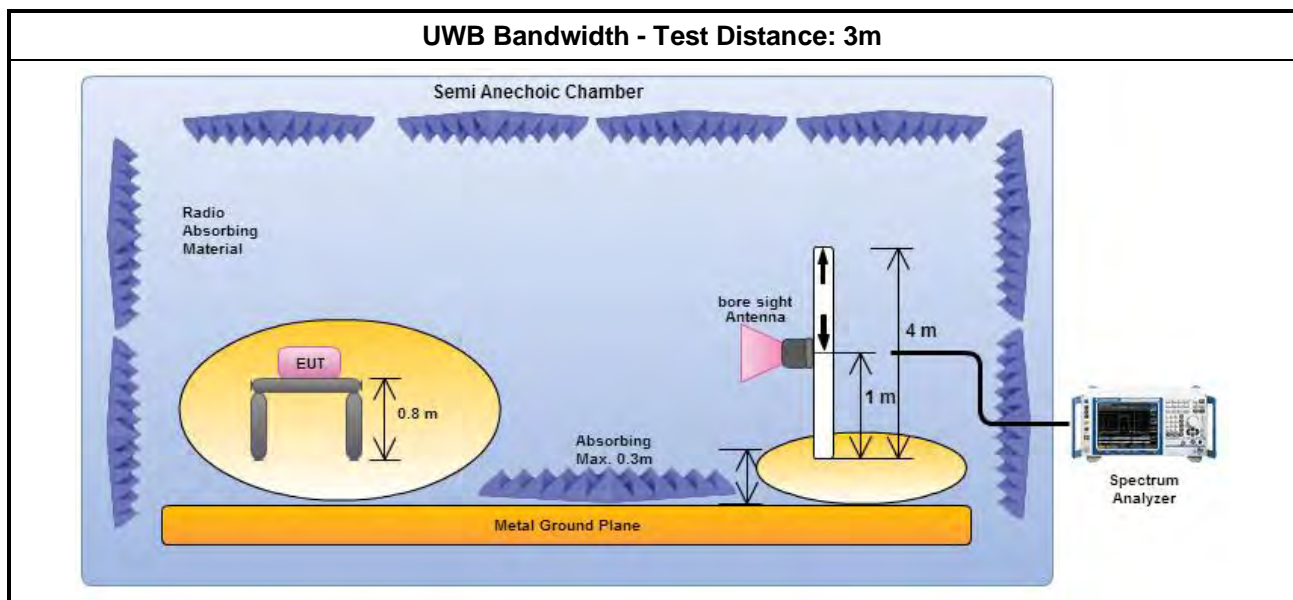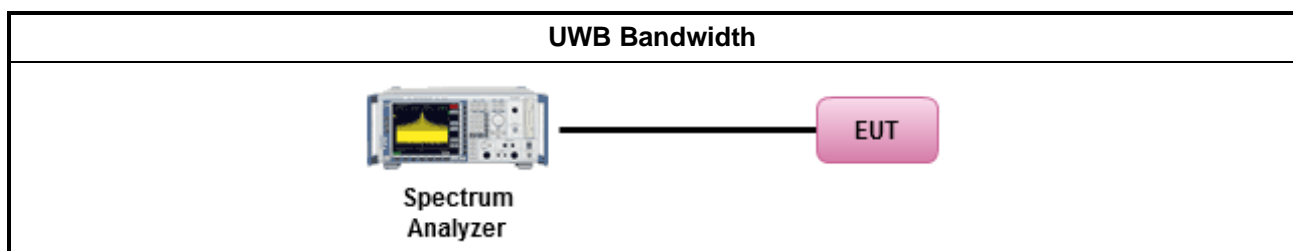

3.2.5 Test Result of UWB Bandwidth

UWB Bandwidth Result				
Condition		UWB Bandwidth (MHz)		
Mode	Freq. (MHz)	F _L	F _H	UWB Bandwidth
TransferJet	4488	4144	4836	692
Limit				500
Result				Complied
Note 1: N _{TX} = Number of Transmit Chains				

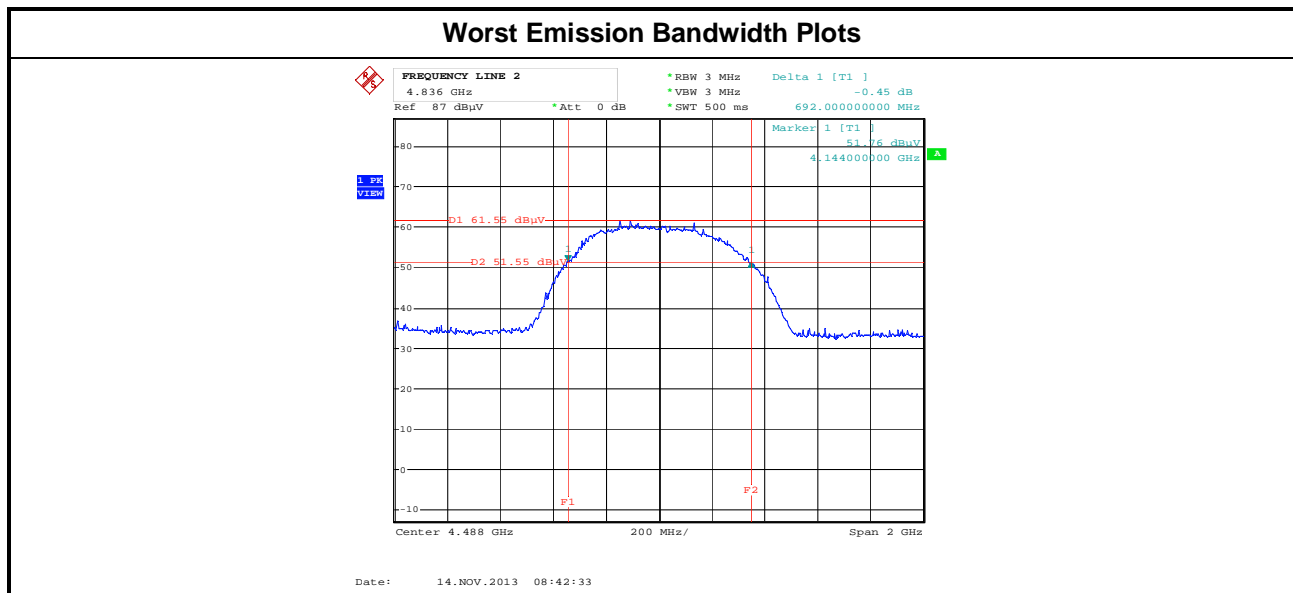

3.3 Peak Emissions within a 50 MHz Bandwidth

3.3.1 Peak Emissions within a 50 MHz Bandwidth Limit

Peak Emissions within a 50 MHz Bandwidth Limit
$P_{\text{eirp}} = 0 \text{ dBm/50MHz}$


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak Emissions within a 50 MHz Bandwidth
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3 for radiated measurement procedure testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.1 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = $20 \log (\text{test distance [3 m]}/\text{specific distance [3 m]}) \text{ (dB)}$
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.3 for peak detector procedure testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.5 for bandwidth conversion of peak power. $\text{EIRP}_{50\text{MHz}} = \text{EIRP}_{3\text{MHz}} - 20 \log(3\text{MHz}/50\text{MHz})$
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as KDB 412172, clause 2.2 following eirp can be used radiated test configuration.
<input checked="" type="checkbox"/>	Refer as KDB 412172, clause 5 following eirp can be directly determined using the field strength.
<input type="checkbox"/>	Refer as KDB 412172, clause 6 following eirp can be used signal/antenna substitution techniques.
<input type="checkbox"/>	Refer as RSS-Gen, clause 4.8 for power measurement.

3.3.4 Test Setup

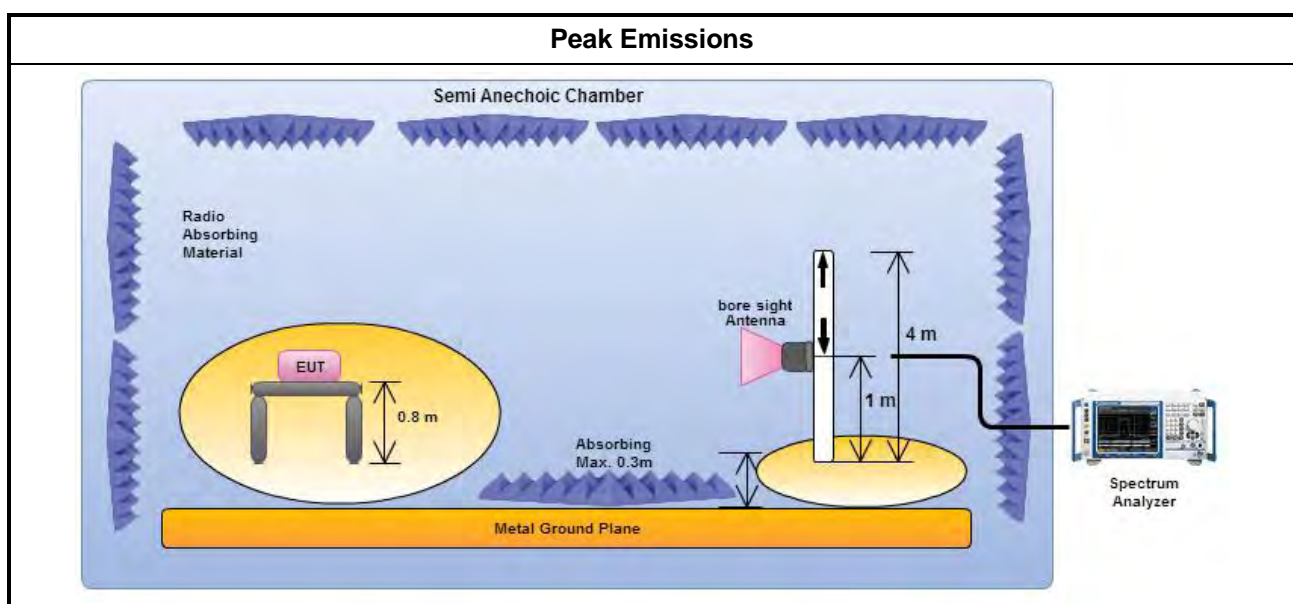

3.3.5 Test Result of Peak Emissions within a 50 MHz Bandwidth

Peak Emissions within a 50 MHz Bandwidth Result								
Mode	Freq. (MHz)	E-Field [dBuV/m]	BWCF [dB]	ERIP _{3MHz} [dBm]	ERIP _{50MHz} [dBm]	EIRP _{50MHz} Limit [dBm]	Margin [dB]	Pol [H/V]
TransferJet	4488	42.22	-24.44	-52.98	-28.54	0	-28.54	H
Note 1: EIRP [dBm] = E-Field [dBuV/m] - 95.2 Note 2: Bandwidth Correction Factor (BWCF) = 20 log (3MHz/50MHz). Note 3: EIRP _{50MHz} = EIRP _{3MHz} - BWCF; EIRP _{3MHz} = EIRP PSD/3MHz; EIRP _{50MHz} = EIRP PSD/50MHz. Note 4: Measurement worst emissions of receive antenna polarization.								

3.4 Radiated Emissions

3.4.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit	
Frequency Range (MHz)	EIRP (dBm)
960-1610	-75.3
1610-1990	-53.3
1990-3100	-51.3
3100-10600	-41.3
10600 above	-51.3

Radiated Emissions in GPS Bands Limit	
Frequency Range (MHz)	EIRP (dBm)
1164-1240	-85.3
1559-1610	-85.3

3.4.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method for Radiated Emissions above 960MHz	
<input checked="" type="checkbox"/>	Radiated Emissions above 960MHz
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3 for radiated measurement procedure testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.1 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = $20 \log(\text{test distance [3 m]}/\text{specific distance [3 m]})$ (dB)
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.3 for rms detector procedure testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.6 for evaluating AVG-PSD (RBW=1MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.10.3.9 for evaluating AVG-PSD in GPS Band (RBW \geq 1kHz).
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as KDB 412172, clause 2.2 following eirp can be used radiated test configuration.
<input checked="" type="checkbox"/>	Refer as KDB 412172, clause 5 following eirp can be directly determined using the field strength.
<input type="checkbox"/>	Refer as KDB 412172, clause 6 following eirp can be used signal/antenna substitution techniques.
<input type="checkbox"/>	Refer as RSS-Gen, clause 4.8 for power measurement.


Test Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20 \log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + $20 \log(\text{duty cycle})$.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz to 18 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 18 GHz and test distance is 1m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.

3.4.4 Test Setup

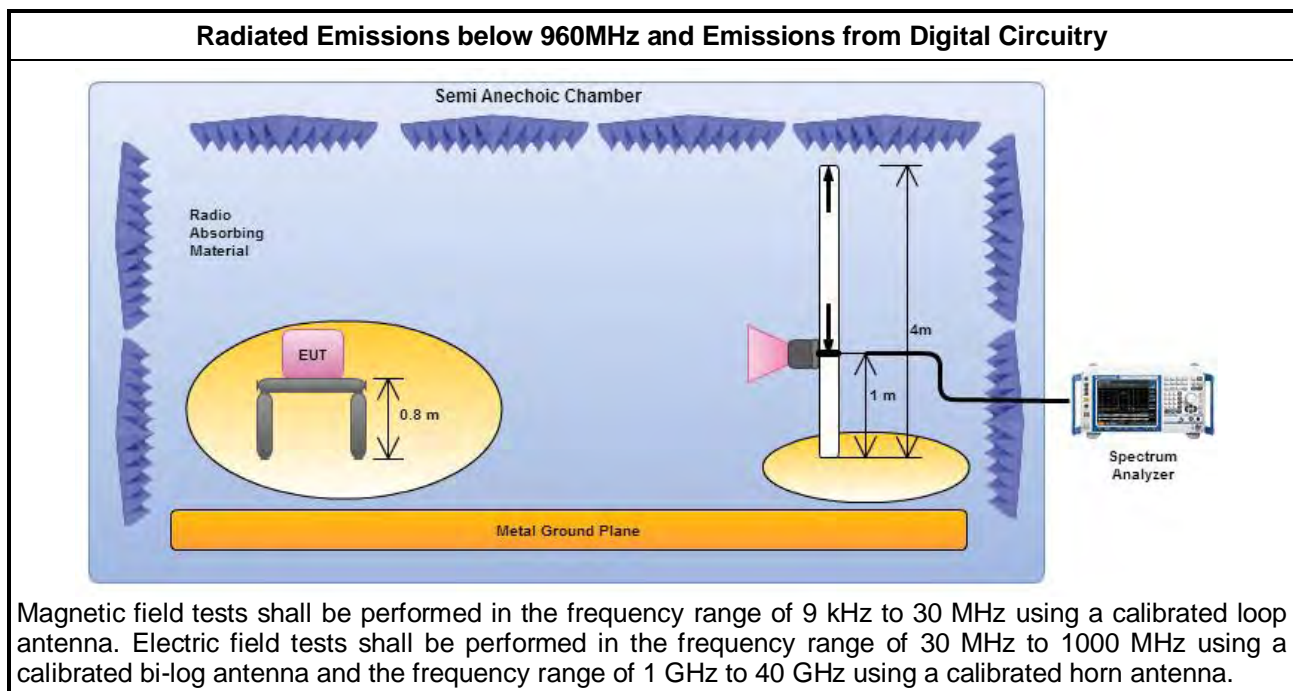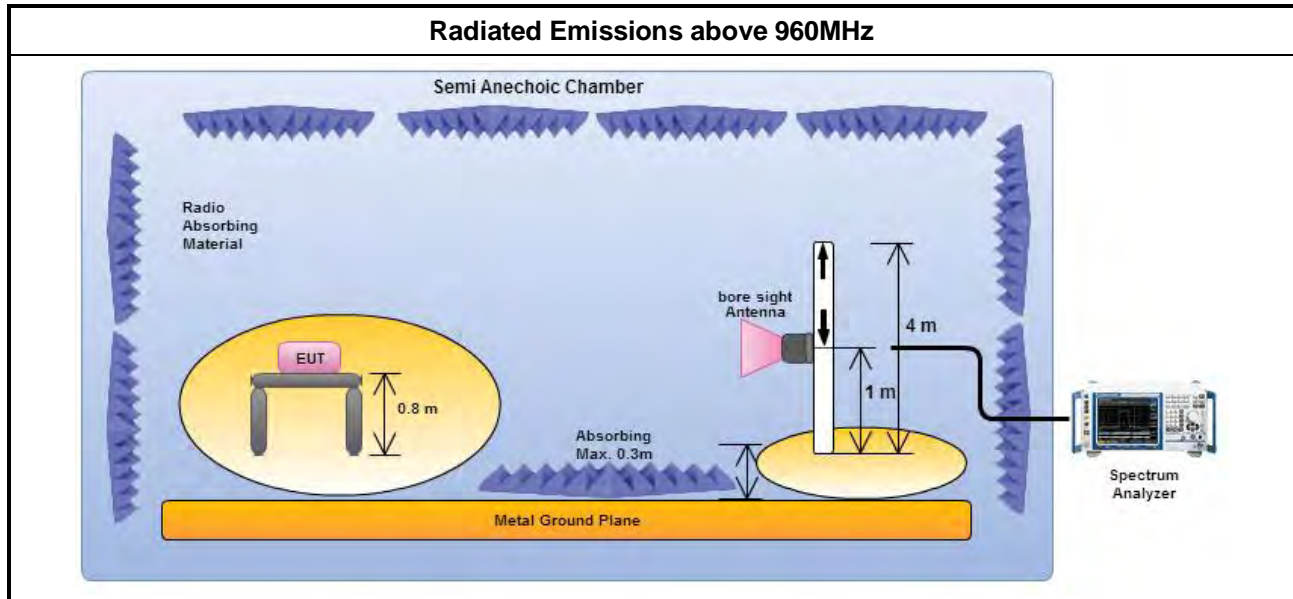


3.4.5 Radiated Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

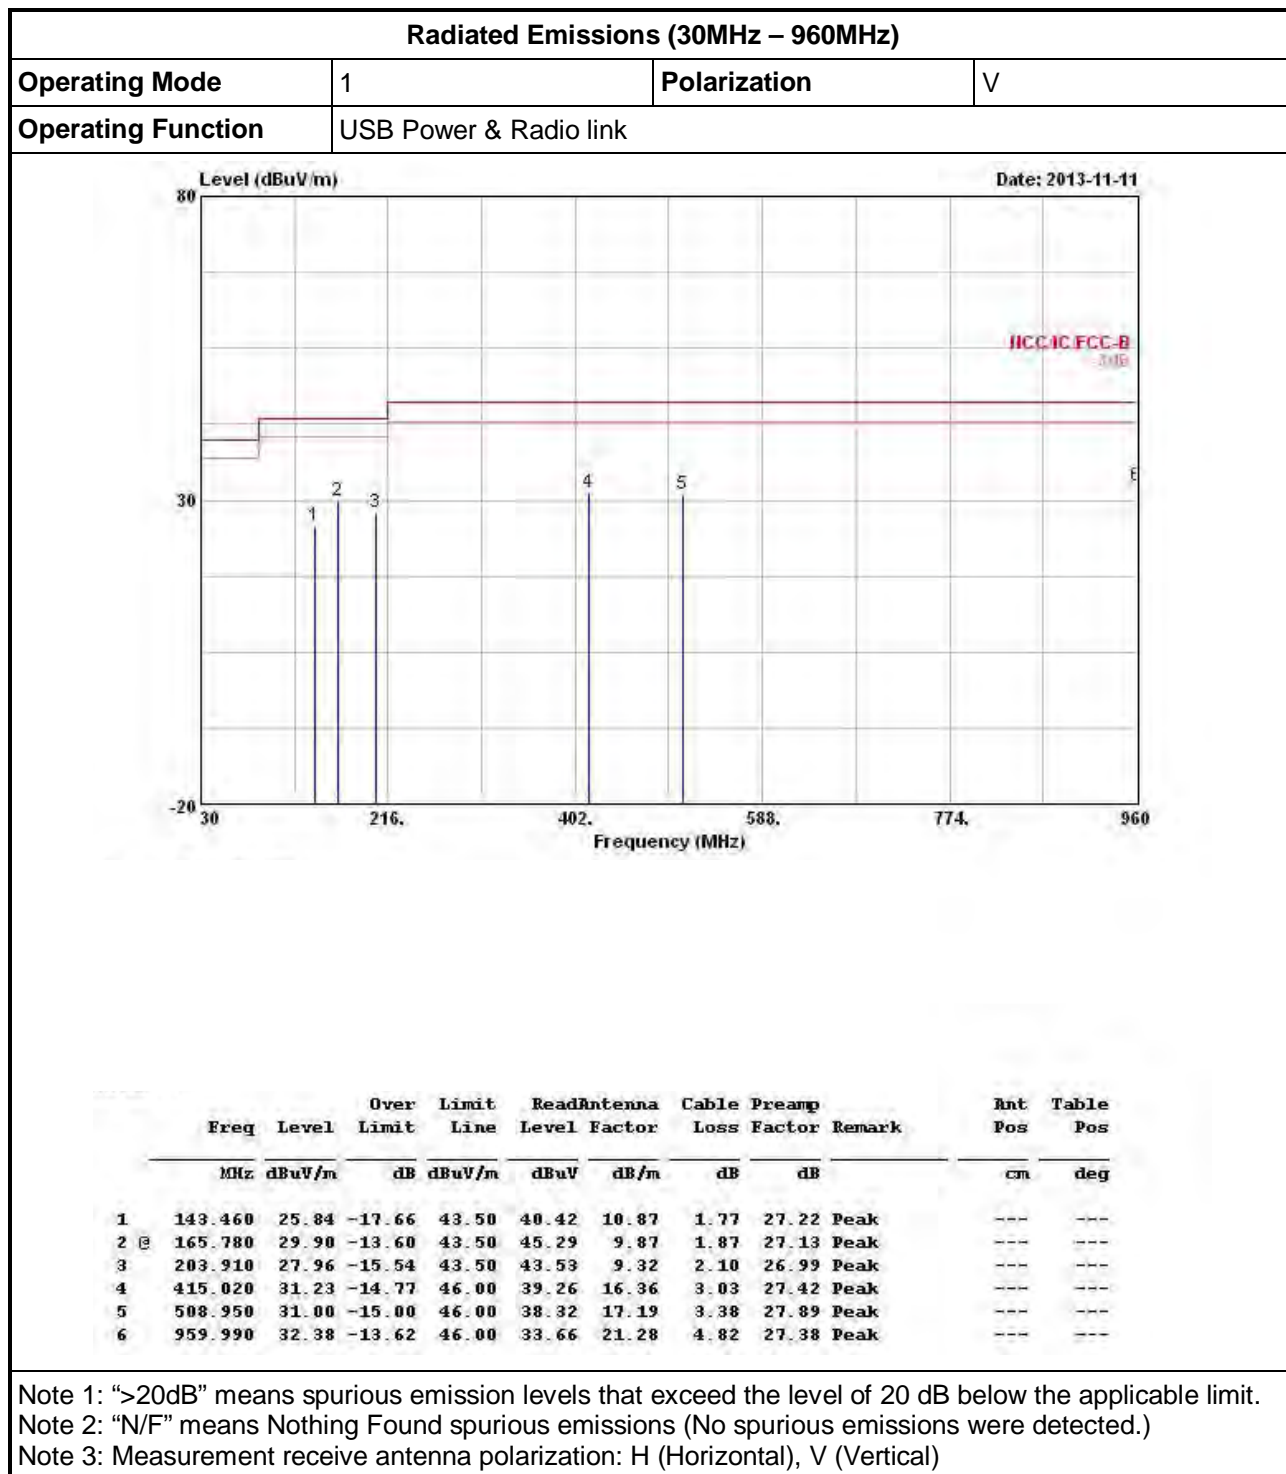3.4.6 Radiated Emissions (30MHz - 960MHz)


Radiated Emissions (30MHz – 960MHz)

Operating Mode	1	Polarization	H
Operating Function	USB Power & Radio link		

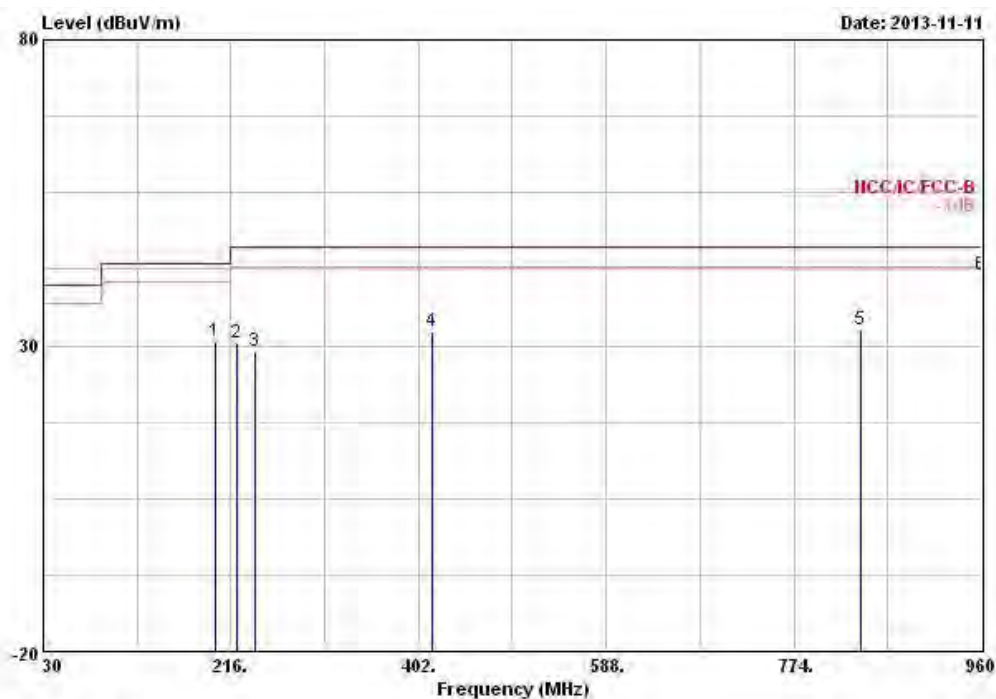


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	200.190	30.69	-12.81	43.50	46.37	9.24	2.08	27.00	Peak	---	---
2	221.580	30.30	-15.70	46.00	45.29	9.76	2.18	26.93	Peak	---	---
3	240.180	29.11	-16.89	46.00	41.88	11.82	2.27	26.86	Peak	---	---
4	415.950	32.40	-13.60	46.00	40.39	16.39	3.04	27.42	Peak	---	---
5	840.030	32.51	-13.49	46.00	35.59	20.20	4.42	27.70	Peak	---	---
6	959.990	41.58	-4.42	46.00	42.86	21.28	4.82	27.38	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.4.7 Radiated Emissions from Digital Circuitry

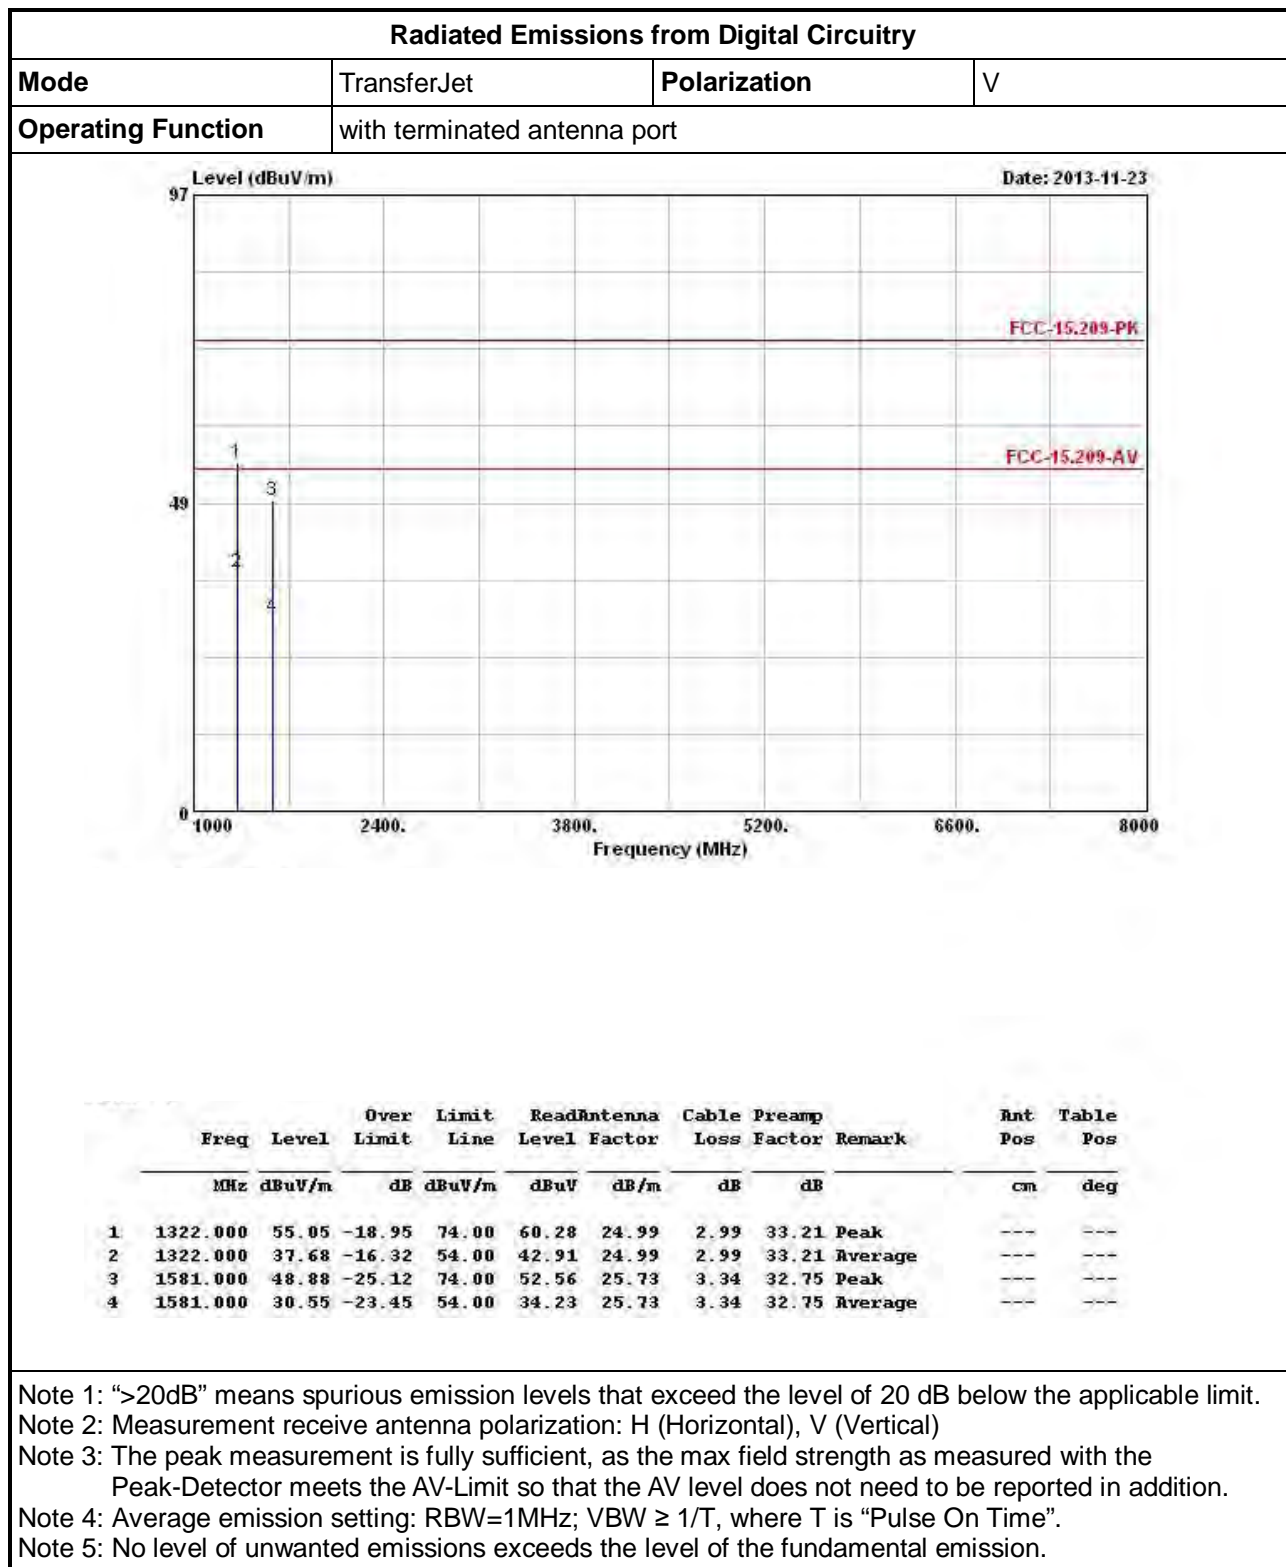

Radiated Emissions from Digital Circuitry

Mode	TransferJet	Polarization	H
Operating Function	with terminated antenna port		

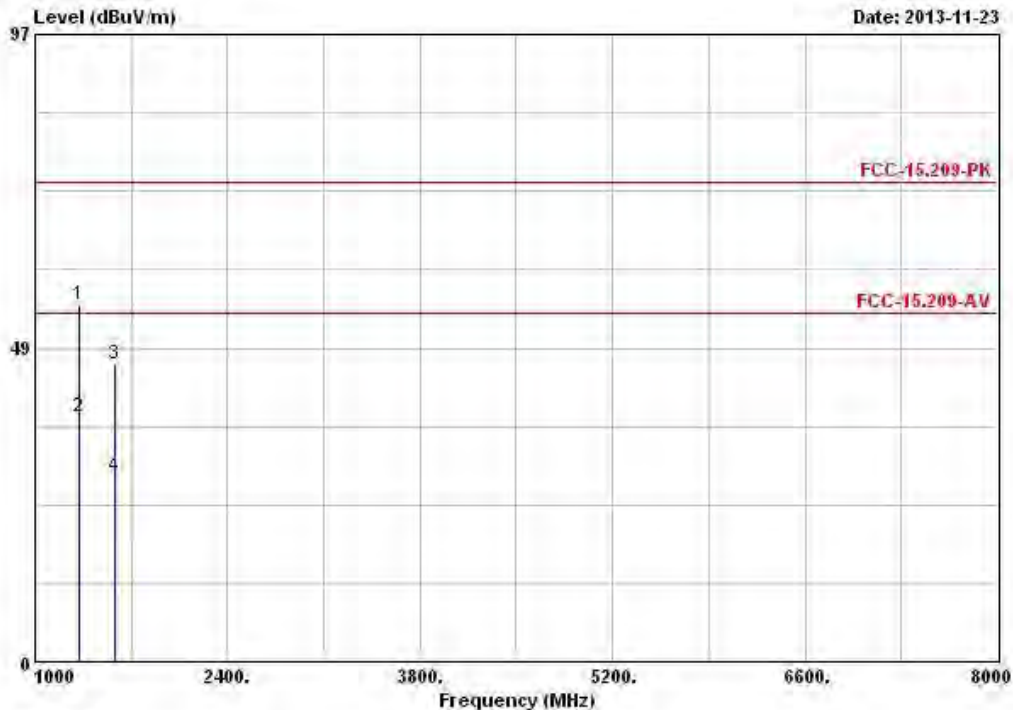

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1322.000	55.26	-18.74	74.00	60.49	24.99	2.99	33.21	Peak	---	---
2	1322.000	37.80	-16.20	54.00	43.03	24.99	2.99	33.21	Average	---	---
3	1581.000	46.11	-27.89	74.00	49.79	25.73	3.34	32.75	Peak	---	---
4	1581.000	28.56	-25.44	54.00	32.24	25.73	3.34	32.75	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: The peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time".

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Radiated Emissions from Digital Circuitry

Mode	TransferJet	Polarization	V
Operating Function	with terminated antenna port		

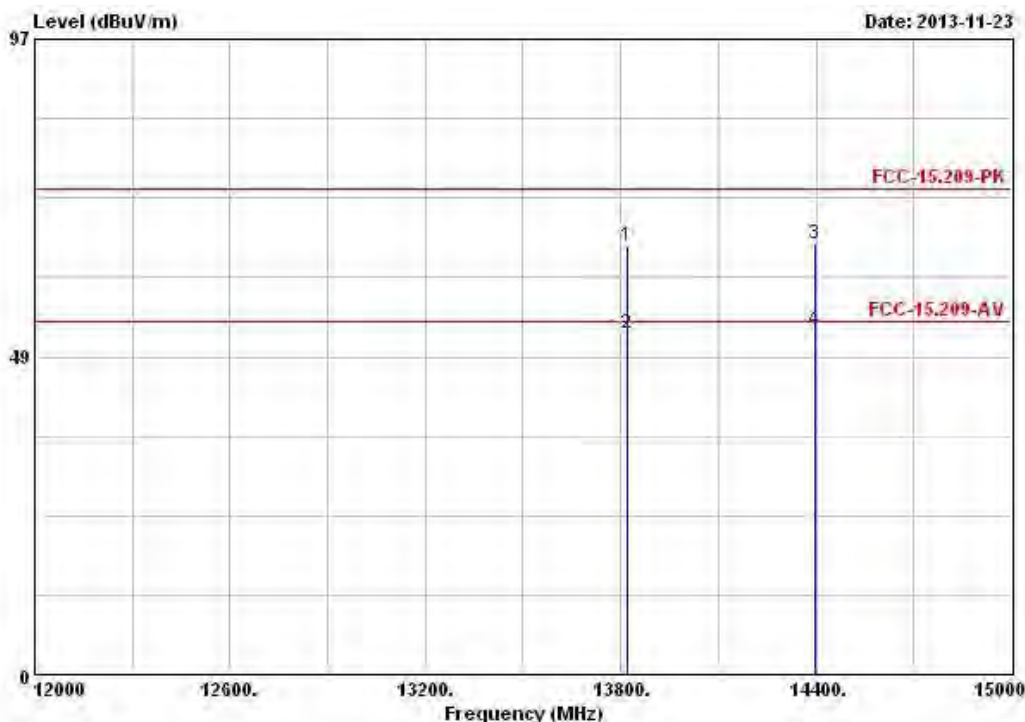

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	13818.000	65.51	-8.49	74.00	44.94	41.10	10.21	30.74	Peak	---	---
2	13818.000	52.14	-1.86	54.00	31.57	41.10	10.21	30.74	Average	---	---
3	14397.000	65.60	-8.40	74.00	44.45	42.29	10.05	31.19	Peak	---	---
4	14397.000	52.55	-1.45	54.00	31.40	42.29	10.05	31.19	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: The peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time".

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Radiated Emissions from Digital Circuitry

Mode	TransferJet	Polarization	H
Operating Function	with terminated antenna port		

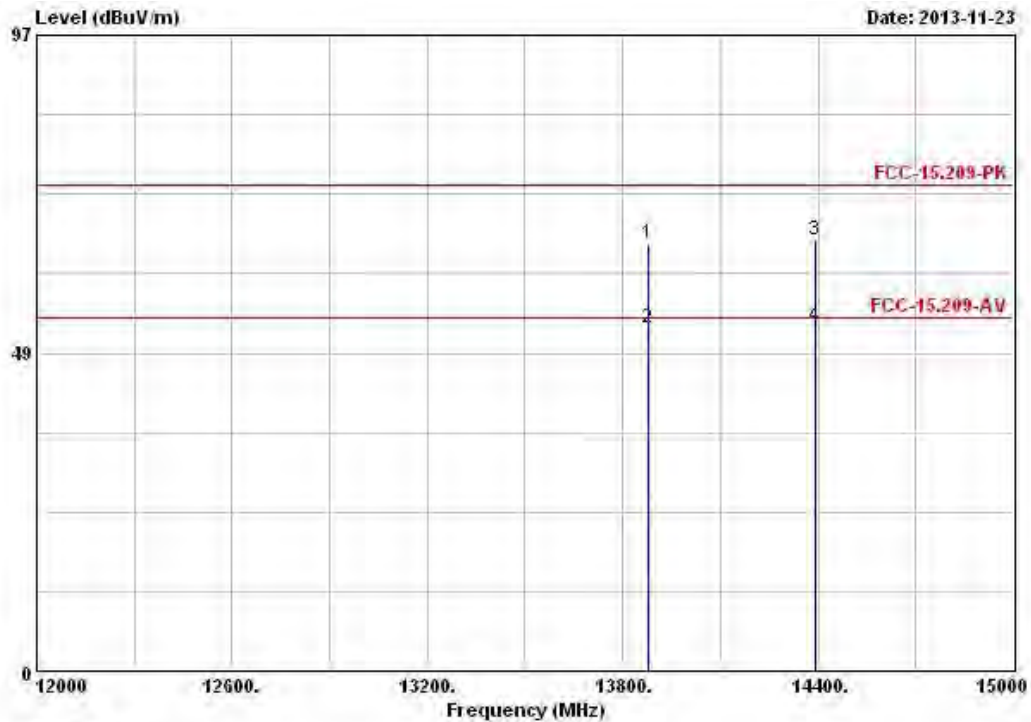

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	13878.000	65.26	-8.74	74.00	44.51	41.24	10.25	30.74	Peak	---	---
2	13878.000	52.19	-1.81	54.00	31.44	41.24	10.25	30.74	Average	---	---
3	14394.000	65.77	-8.23	74.00	44.59	42.29	10.08	31.19	Peak	---	---
4	14394.000	52.62	-1.38	54.00	31.44	42.29	10.08	31.19	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: The peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time".



Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.8 Conducted Emissions from Antenna Port

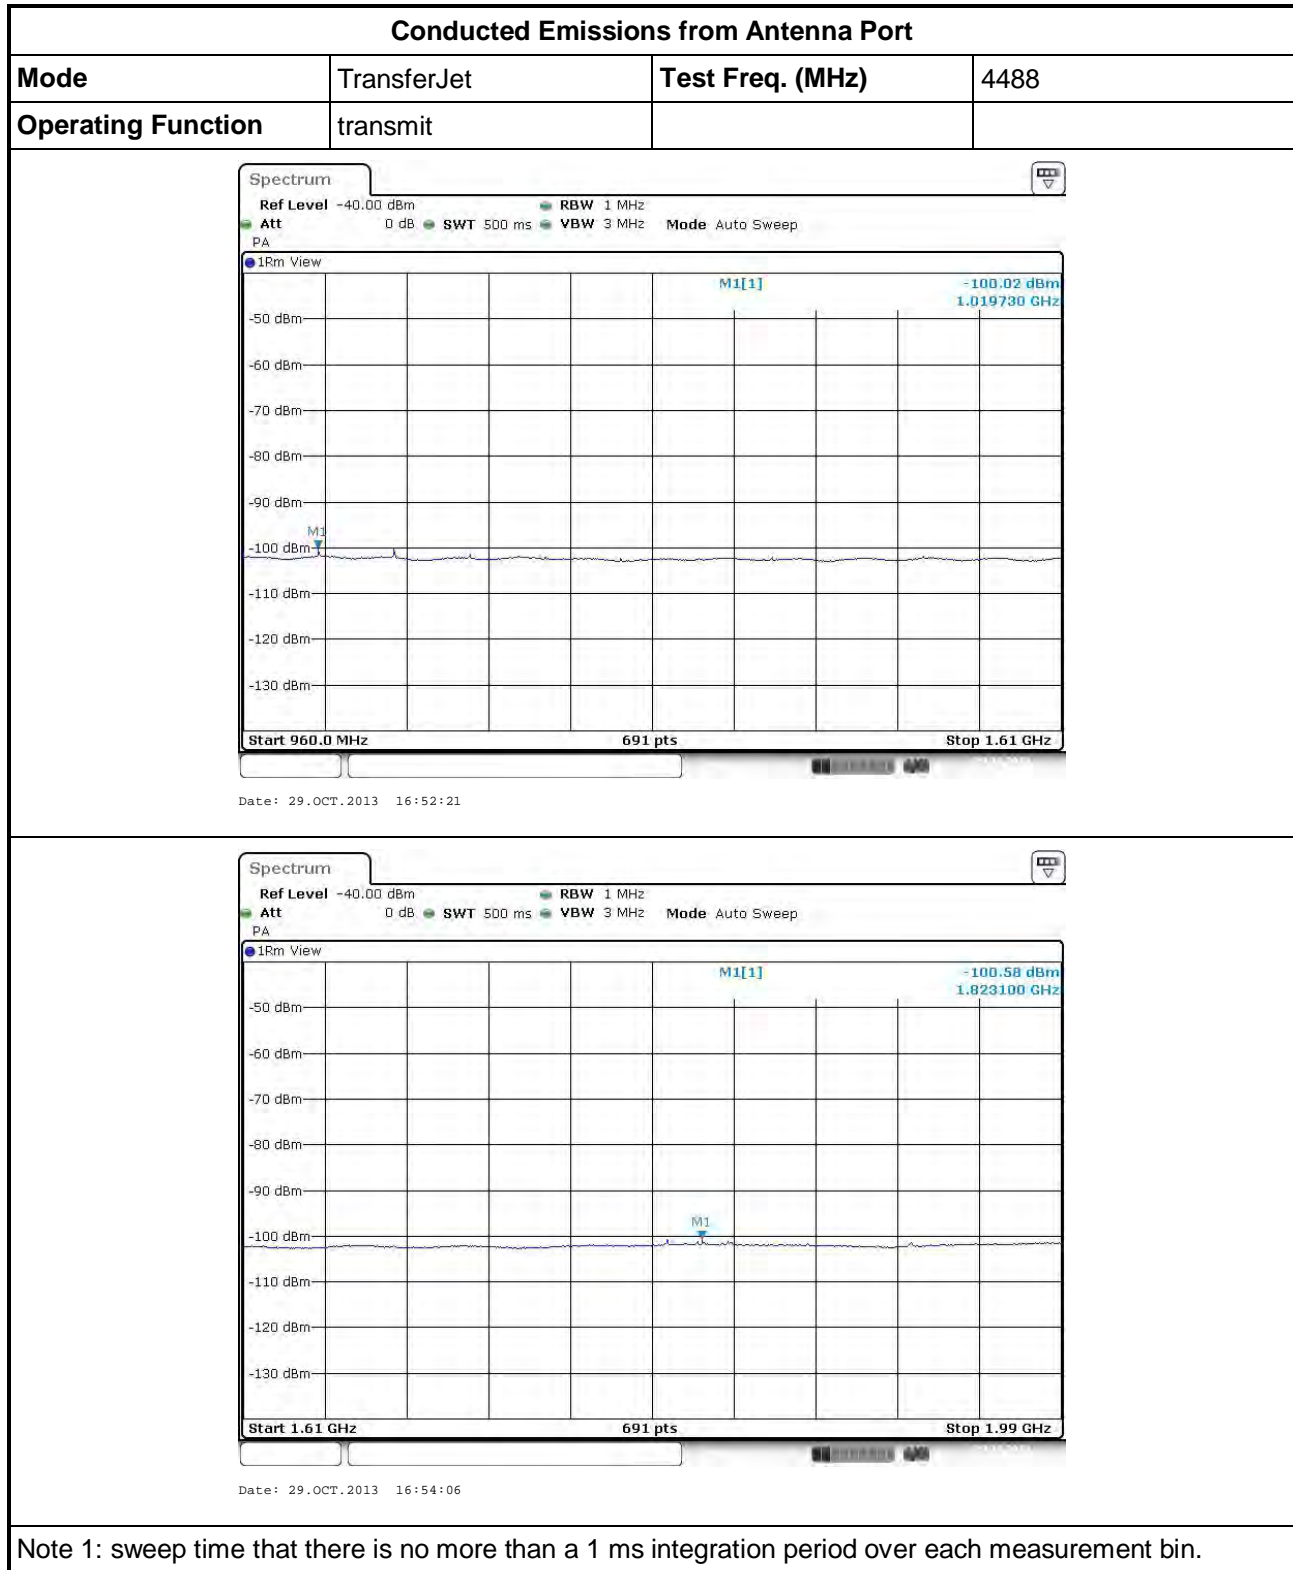

Conducted Emissions from Antenna Port


Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit		

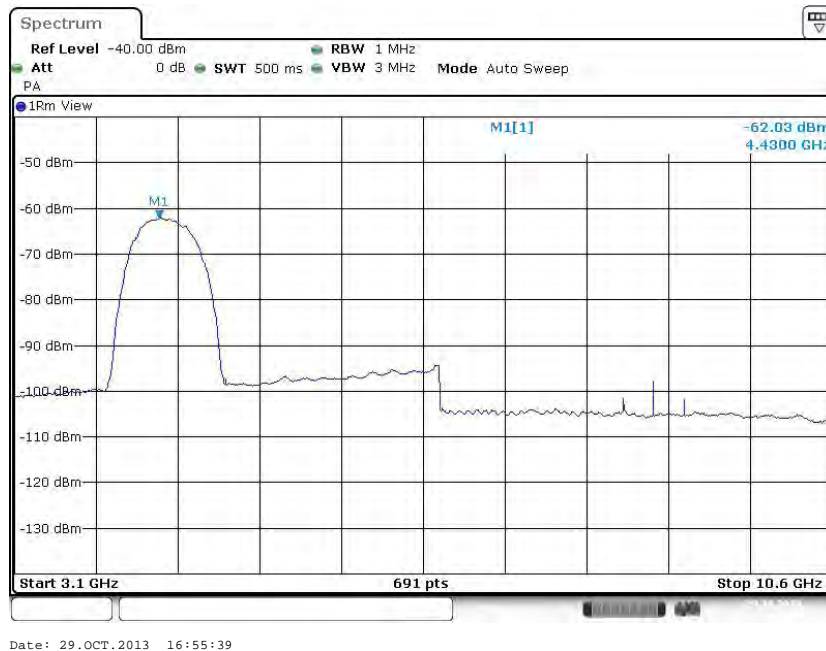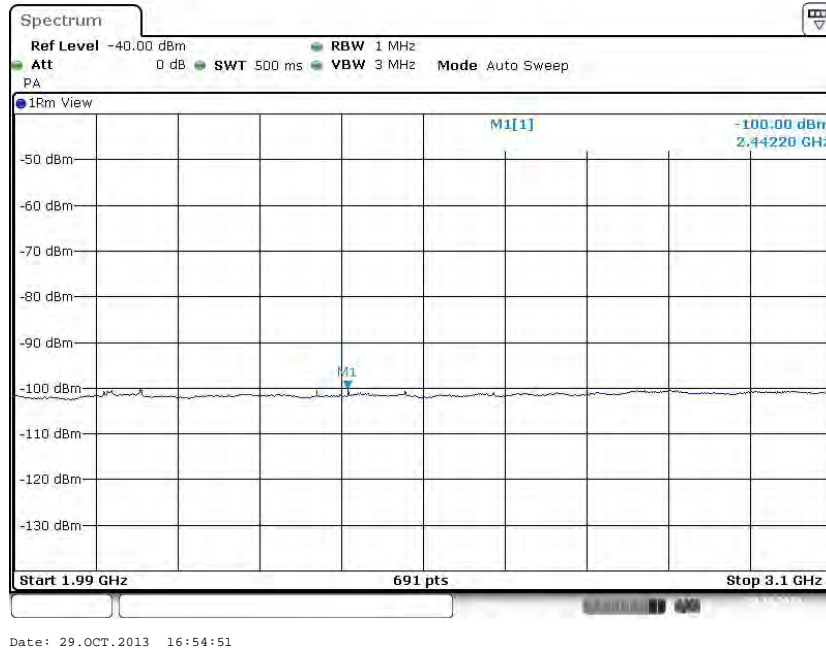

Note 1: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Conducted Emissions from Antenna Port



Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit		

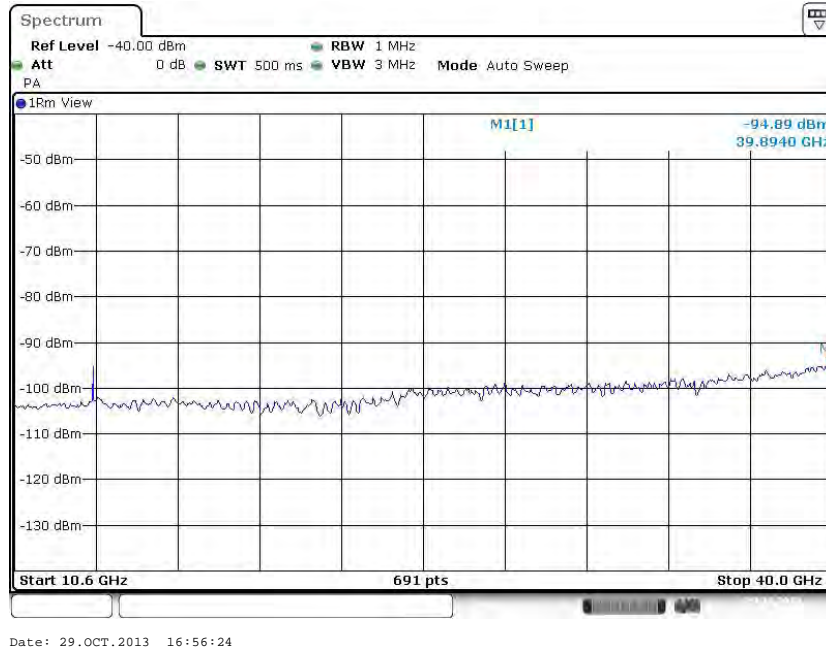


Note 1: sweep time that there is no more than a 1 ms integration period over each measurement bin.


Conducted Emissions from Antenna Port

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit		

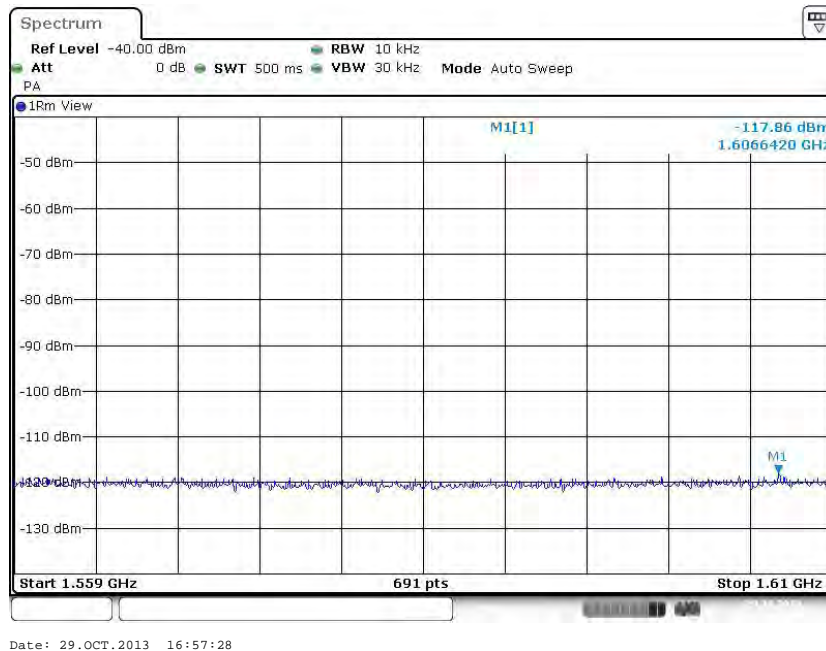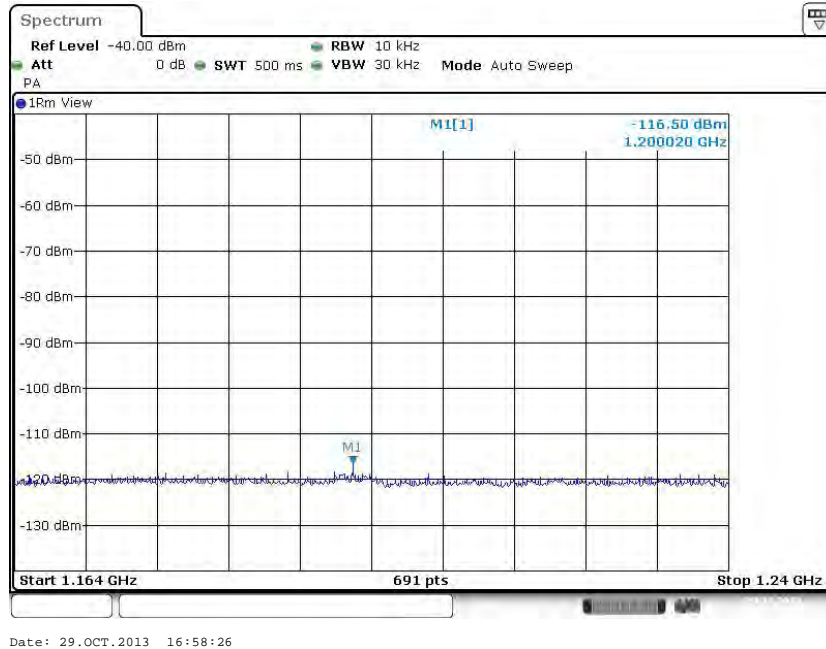


Note 1: sweep time that there is no more than a 1 ms integration period over each measurement bin.

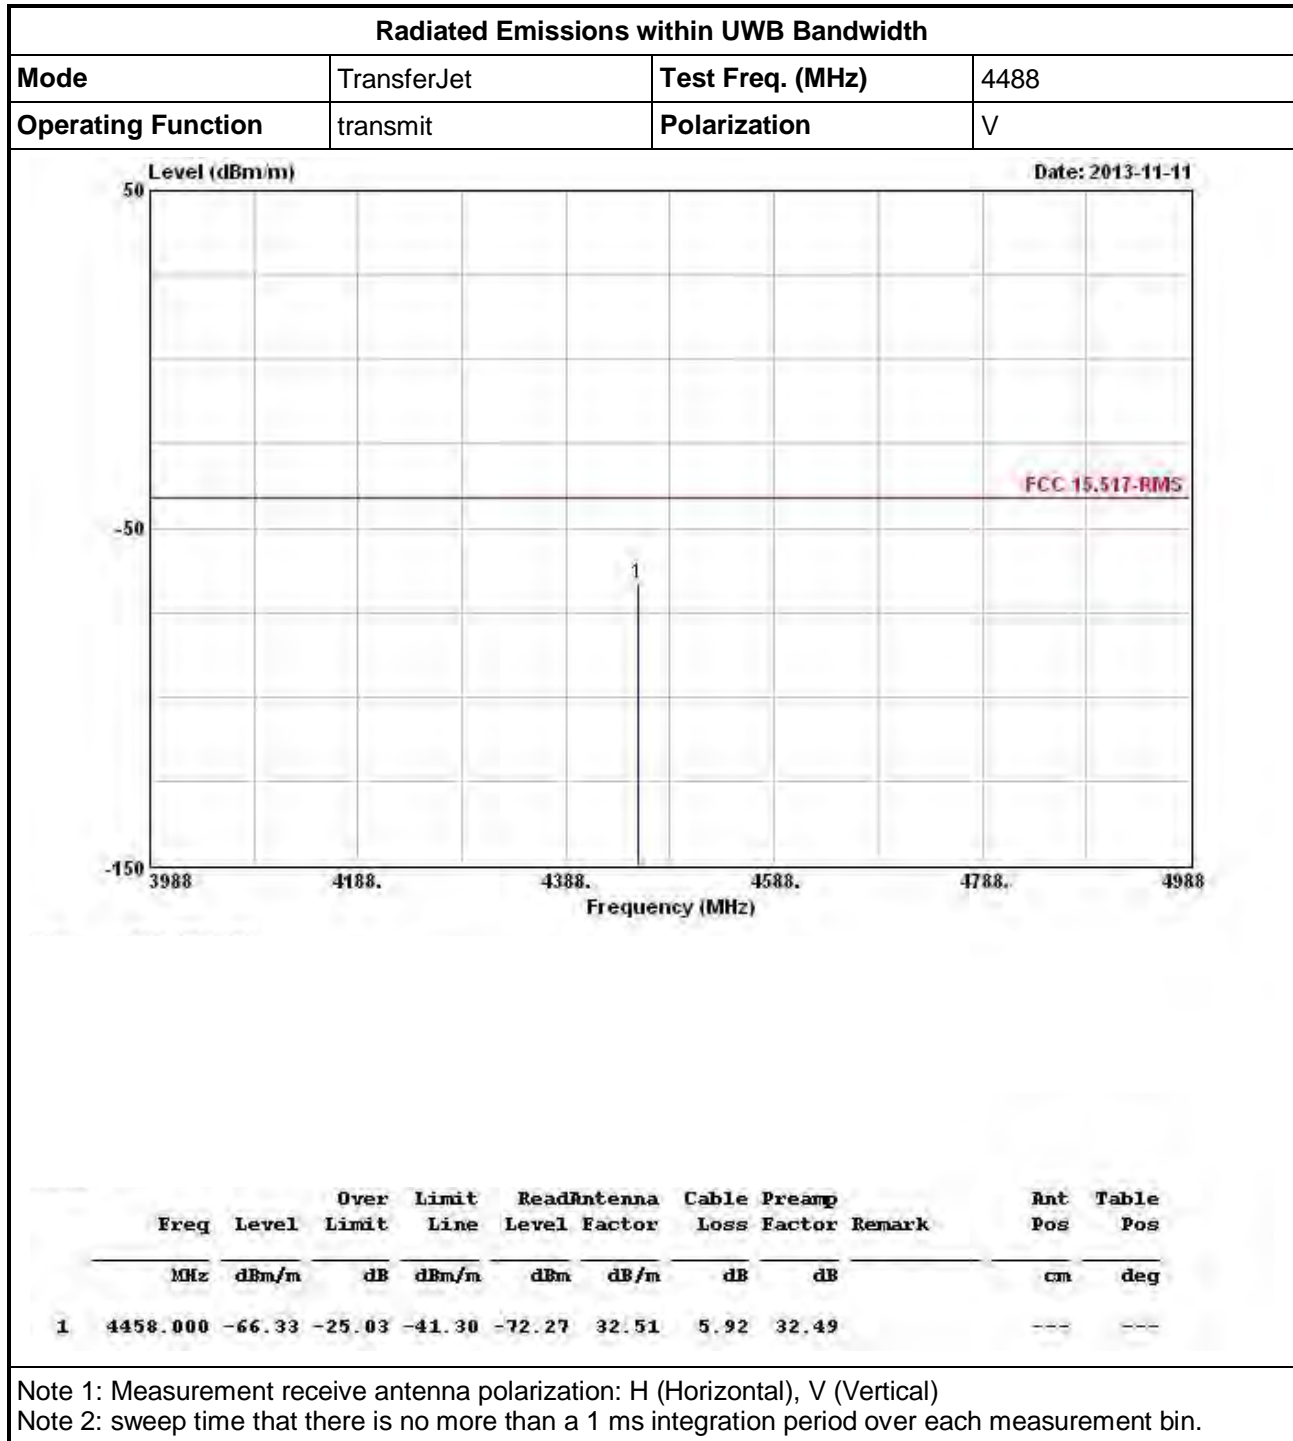3.4.9 Radiated Emissions within UWB Bandwidth

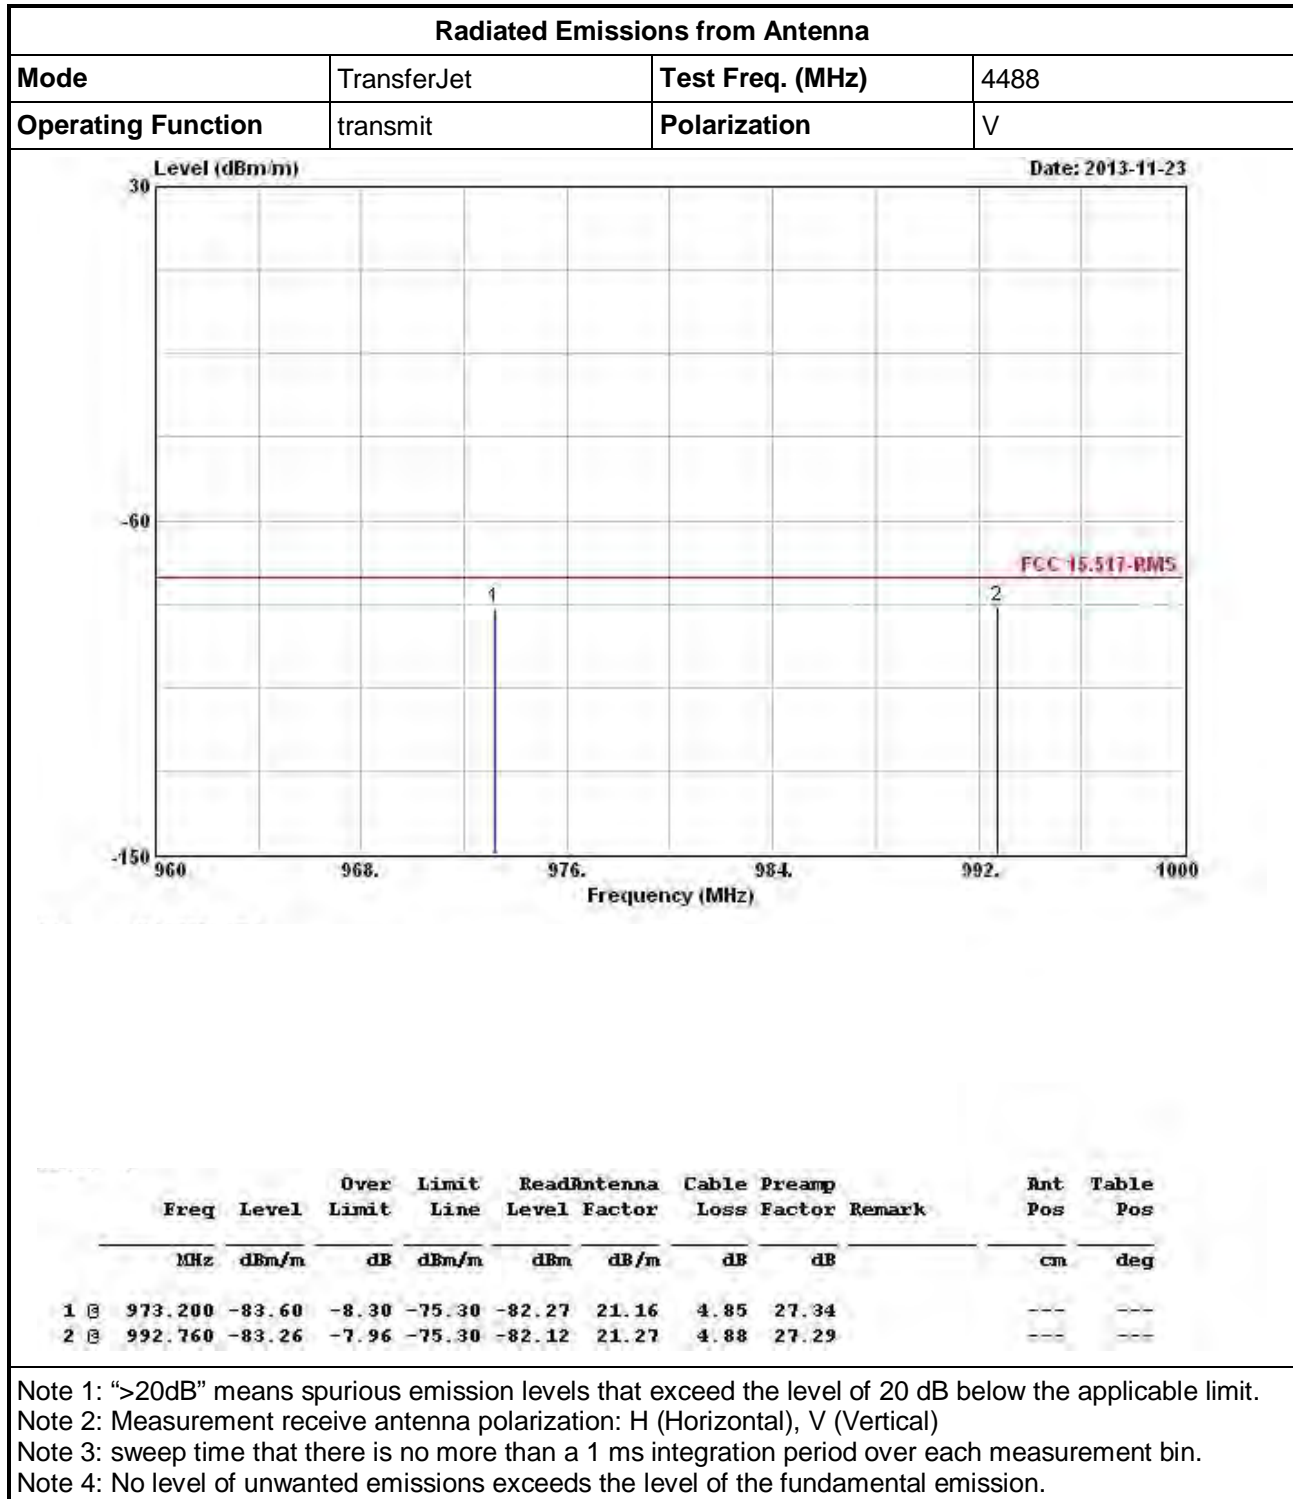
3.4.10 Radiated Emissions from Antenna


Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

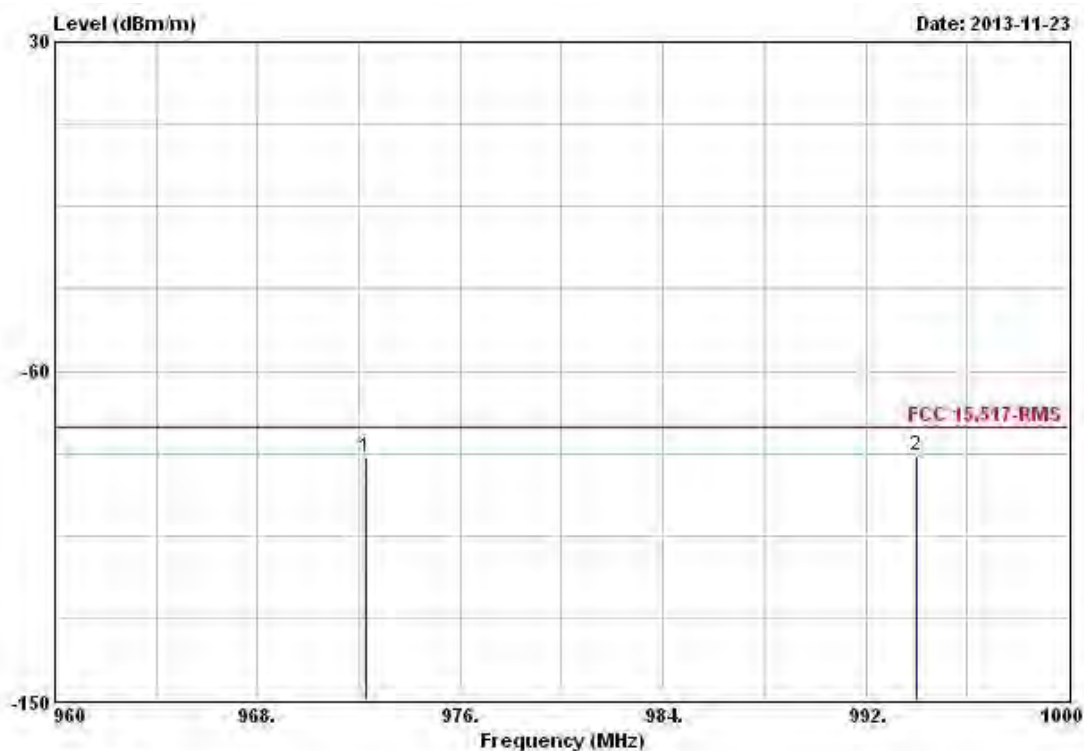

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	972.240	-83.66	-8.36	-75.30	-82.32	21.16	4.85	27.35		---	---
2	994.000	-83.17	-7.87	-75.30	-82.04	21.26	4.89	27.28		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	V

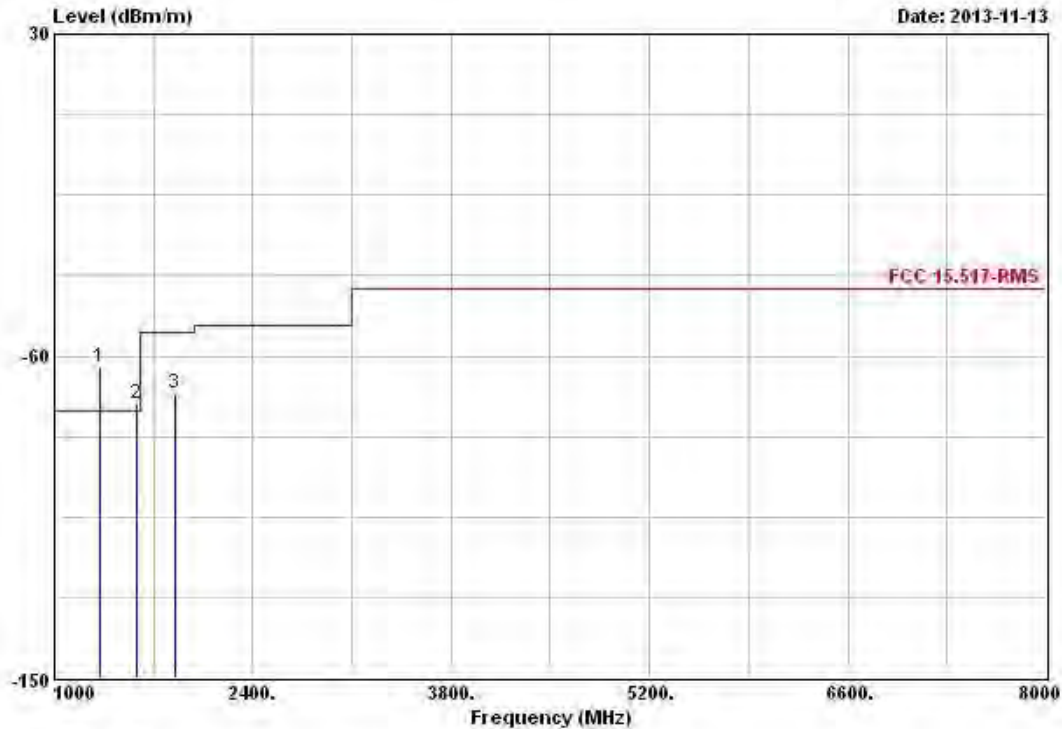


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1 @	1322.000	-63.40	11.90	-75.30	-58.17	24.99	2.99	33.21		---	---
2 @	1581.000	-73.29	2.01	-75.30	-69.61	25.73	3.34	32.75		---	---
3	1854.000	-70.53	-17.23	-53.30	-68.32	26.80	3.56	32.57		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

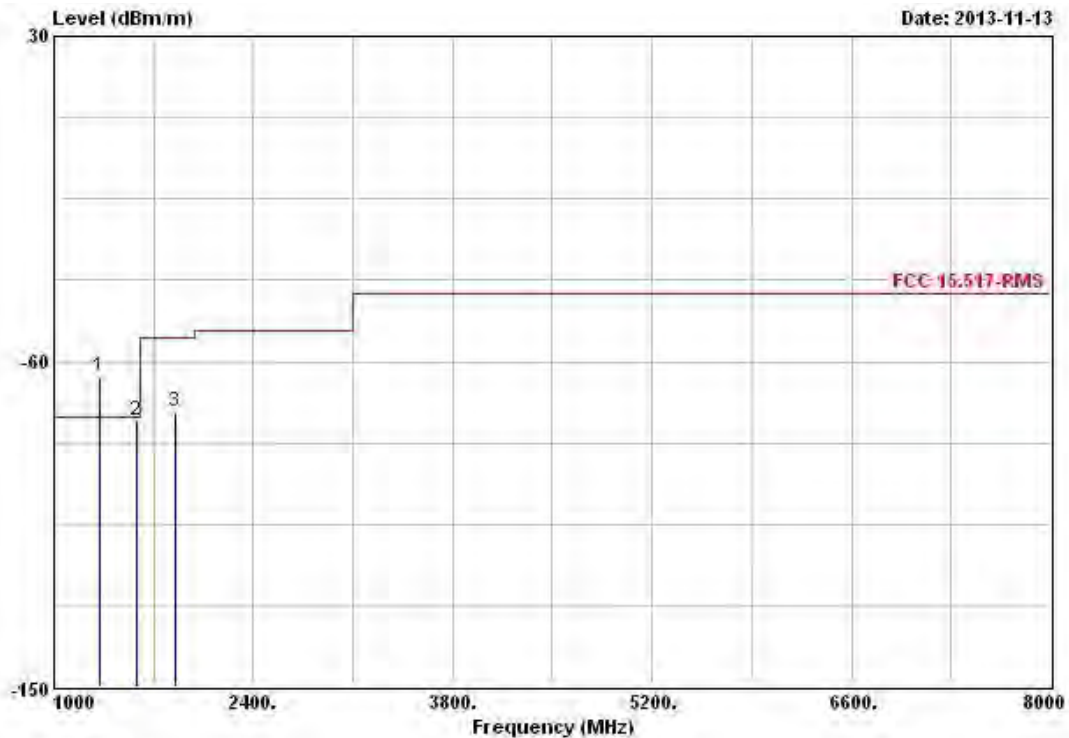


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	1322.000	-64.34	10.96	-75.30	-59.11	24.99	2.99	33.21		---	---
2	1581.000	-76.44	-1.14	-75.30	-72.76	25.73	3.34	32.75		---	---
3	1854.000	-73.70	-20.40	-53.30	-71.49	26.80	3.56	32.57		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	V

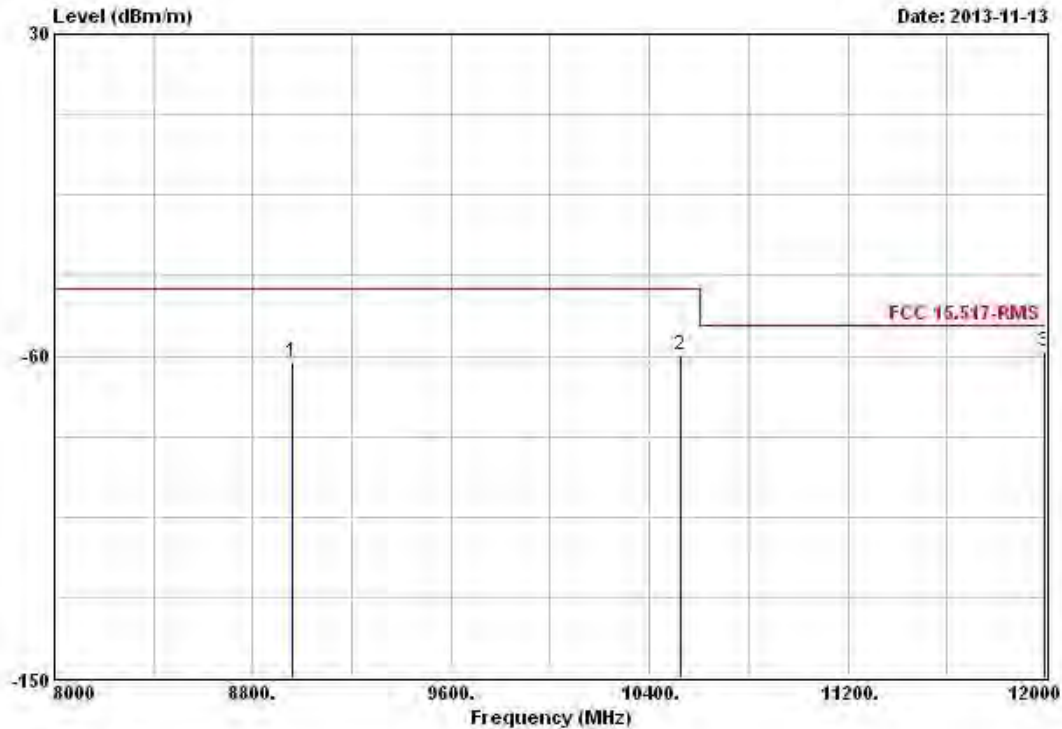


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	8956.000	-61.66	-20.36	-41.30	-75.55	38.10	8.75	32.96		---	---
2	10524.000	-59.62	-18.32	-41.30	-74.86	38.89	9.00	32.65		---	---
3	11992.000	-58.59	-7.29	-51.30	-75.26	39.40	9.66	32.39		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

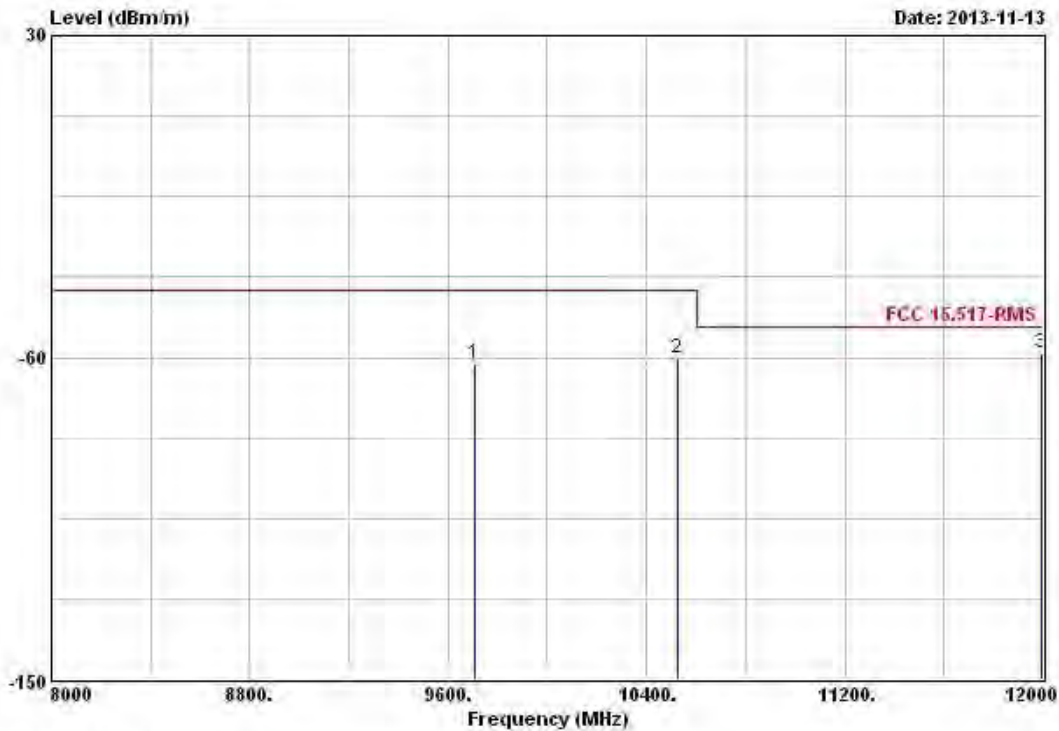


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	9708.000	-61.83	-20.53	-41.30	-75.66	38.46	8.46	33.09		---	---
2	10524.000	-60.06	-18.76	-41.30	-75.30	38.89	9.00	32.65		---	---
3	11992.000	-58.78	-7.48	-51.30	-75.45	39.40	9.66	32.39		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	V

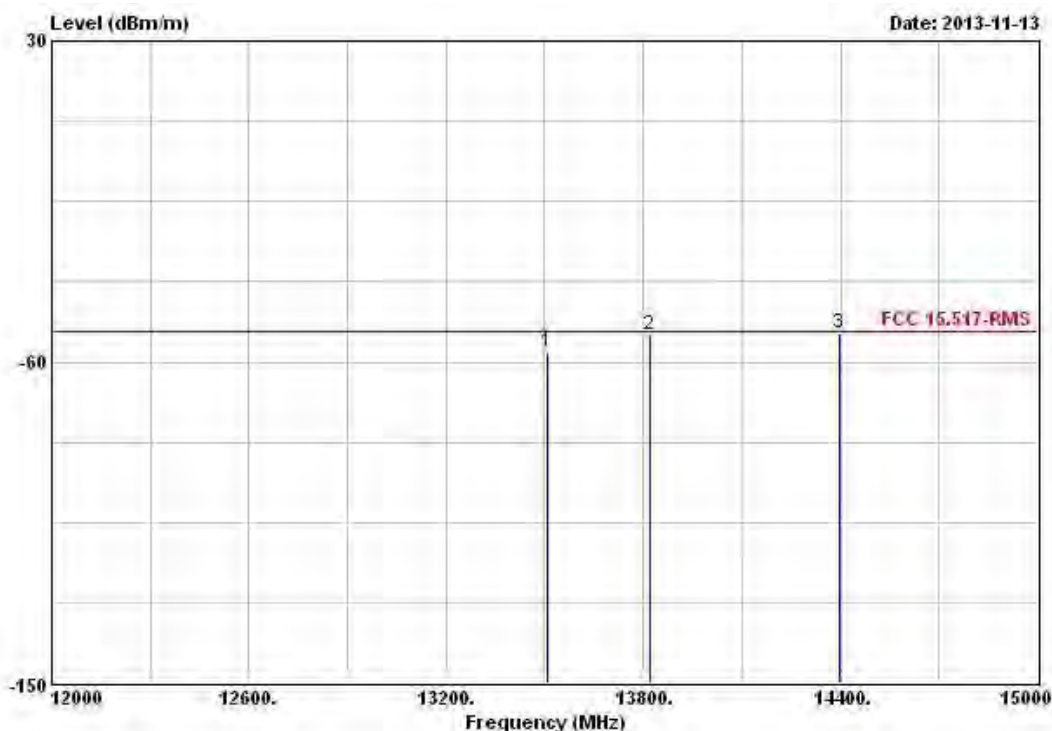

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	13506.000	-57.37	-6.07	-51.30	-77.01	40.44	9.89	30.69		---	---
2	13818.000	-52.37	-1.07	-51.30	-72.94	41.10	10.21	30.74		---	---
3	14397.000	-51.97	-0.67	-51.30	-73.12	42.29	10.05	31.19		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

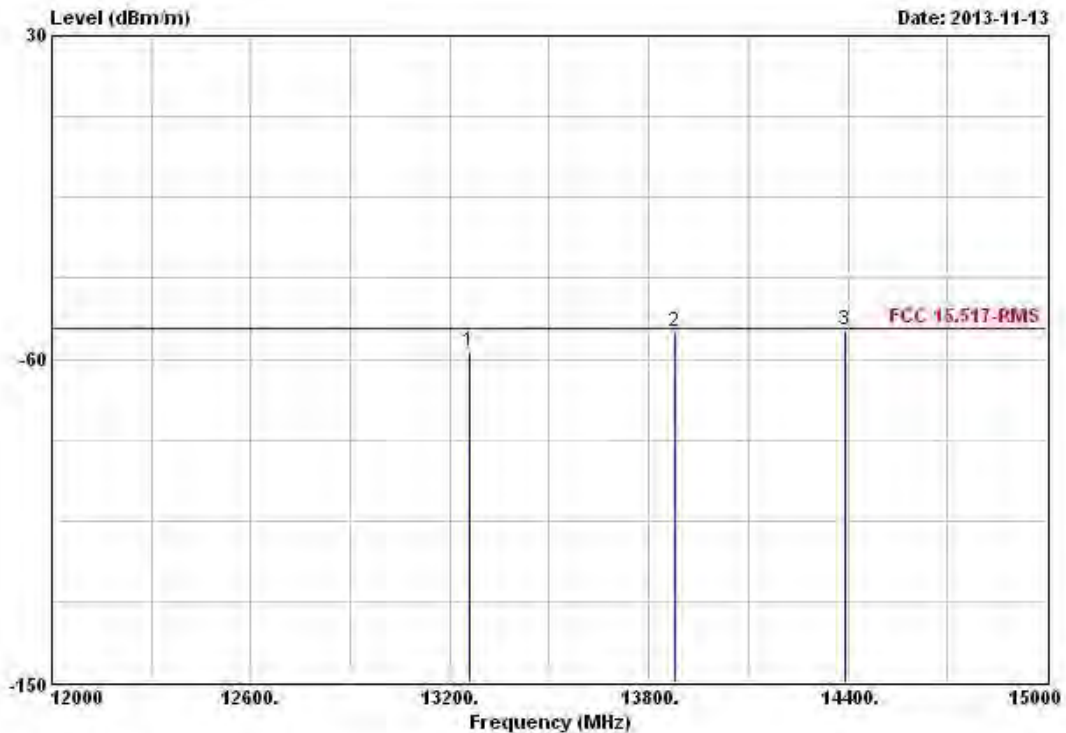


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	13257.000	-57.73	-6.43	-51.30	-76.66	39.92	9.91	30.90		---	---
2	13878.000	-52.41	-1.11	-51.30	-73.16	41.24	10.25	30.74		---	---
3	14394.000	-51.98	-0.68	-51.30	-73.16	42.29	10.08	31.19		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	V

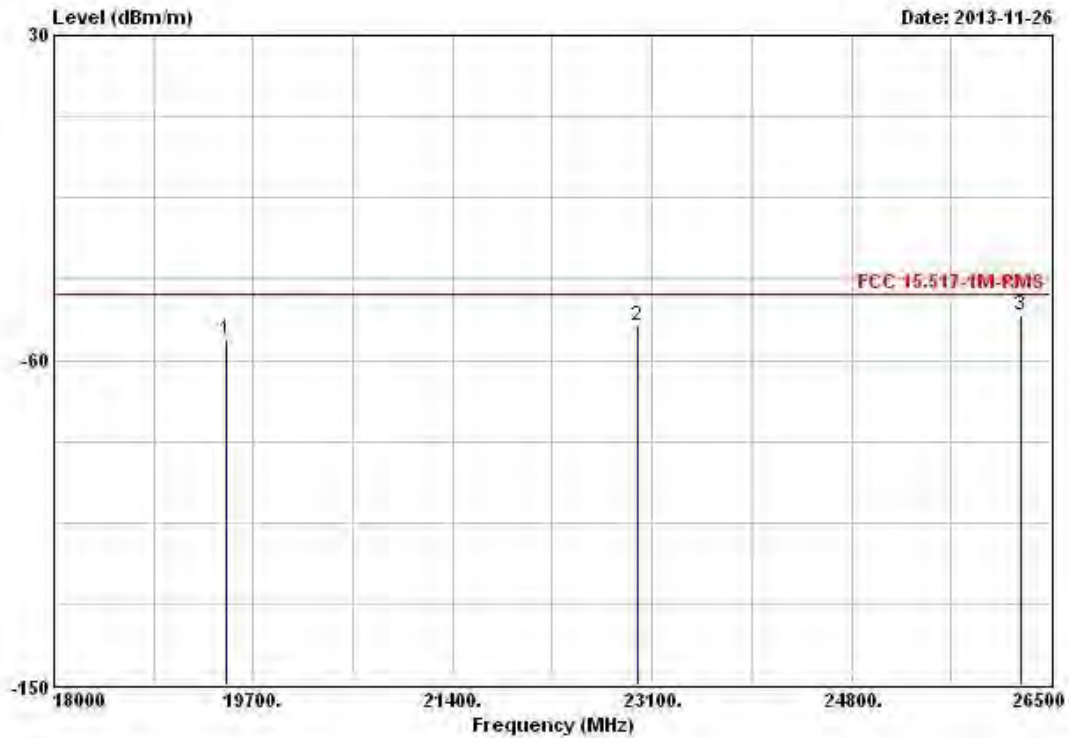


	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	cm	deg
1	19470.500	-54.54	-12.78	-41.76	-72.33	38.10	11.23	31.54	---	---
2	22981.000	-50.47	-8.71	-41.76	-69.82	39.18	11.66	31.49	---	---
3	26245.000	-47.61	-5.85	-41.76	-70.20	39.65	13.25	30.31	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

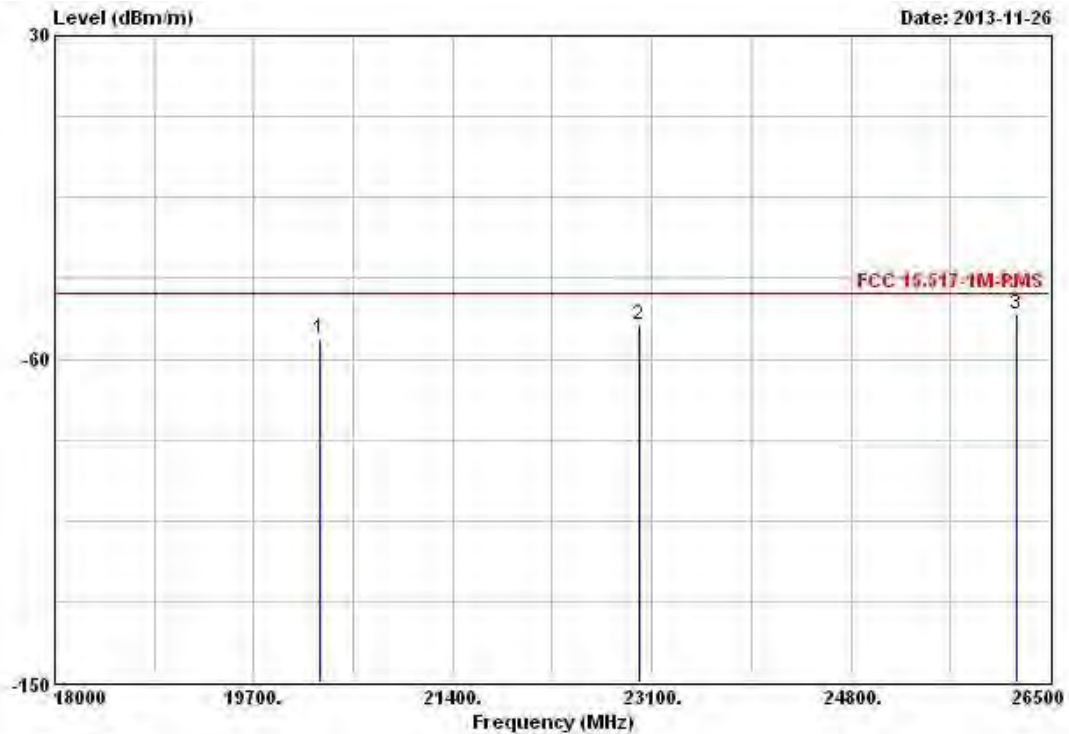


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	20269.500	-54.23	-12.47	-41.76	-70.56	38.30	10.06	32.03		---	---
2	22989.500	-50.36	-8.60	-41.76	-69.73	39.20	11.66	31.49		---	---
3	26211.000	-47.55	-5.79	-41.76	-70.05	39.60	13.29	30.39		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	V

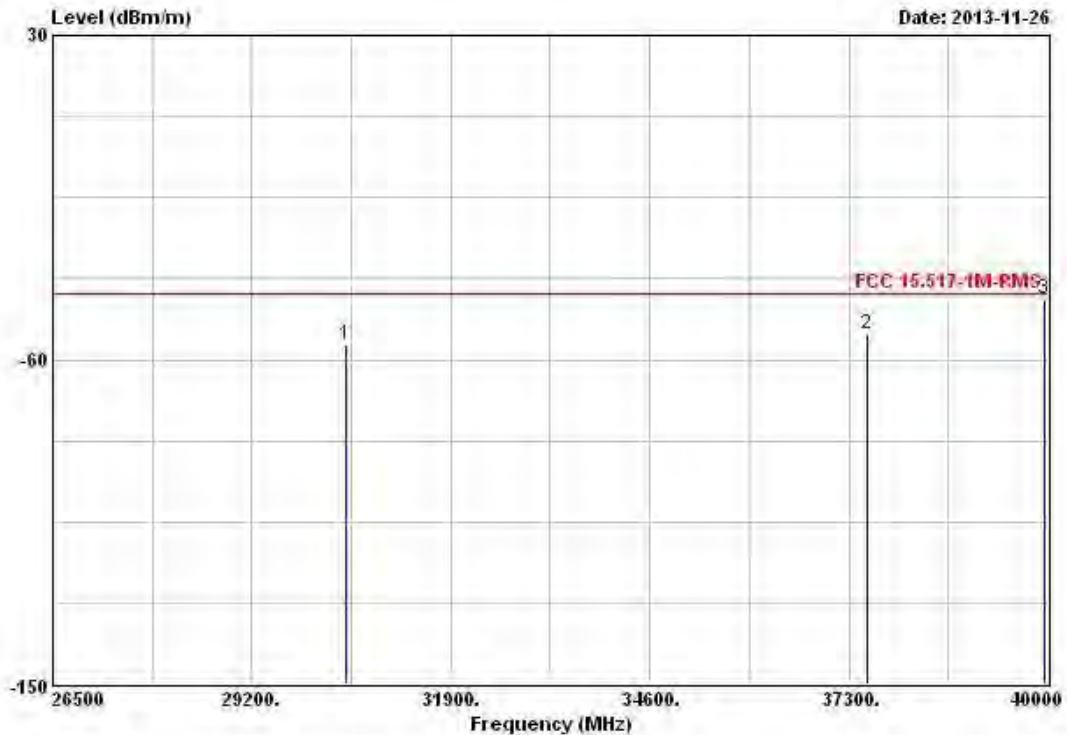


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB	cm	deg
1	30469.000	-55.66	-13.90	-41.76	-58.04	41.27	15.45	54.34	---	---
2	37556.500	-52.83	-11.07	-41.76	-56.56	43.50	14.46	54.23	---	---
3	39946.000	-43.08	-1.32	-41.76	-57.12	47.21	17.39	50.56	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.


Radiated Emissions from Antenna

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

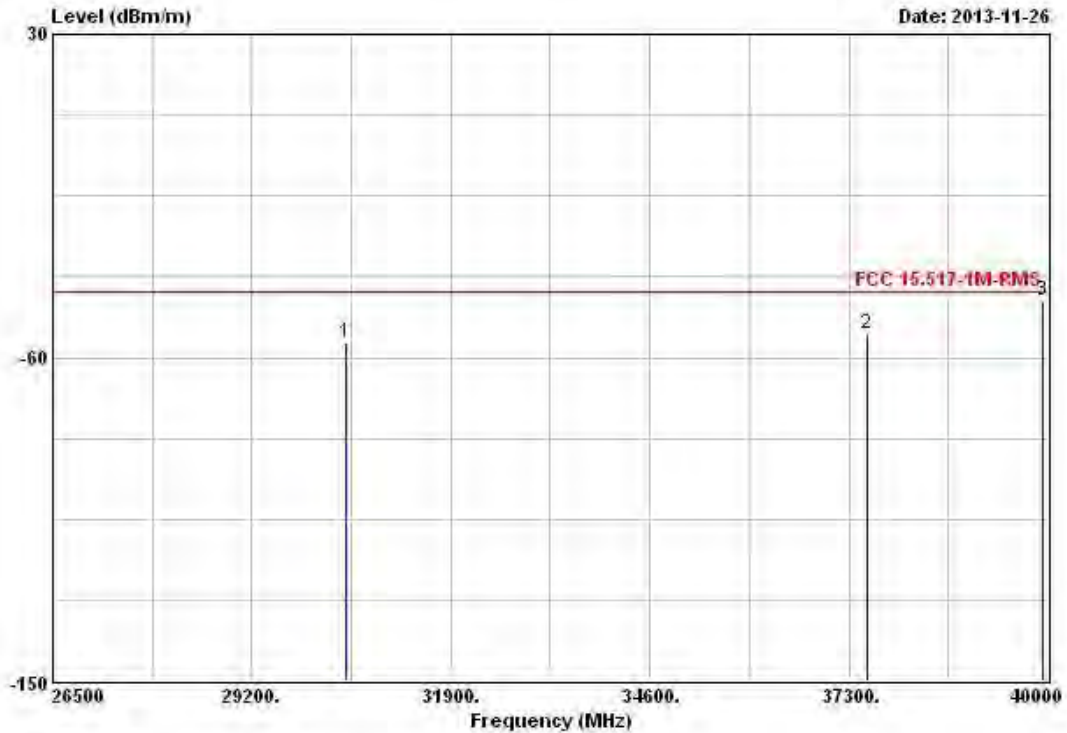


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	30469.000	-55.67	-13.91	-41.76	-58.05	41.27	15.45	54.34		---	---
2	37556.500	-53.20	-11.44	-41.76	-56.93	43.50	14.46	54.23		---	---
3	339919.000	-44.16	-2.40	-41.76	-57.61	47.13	17.18	50.86		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1~3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

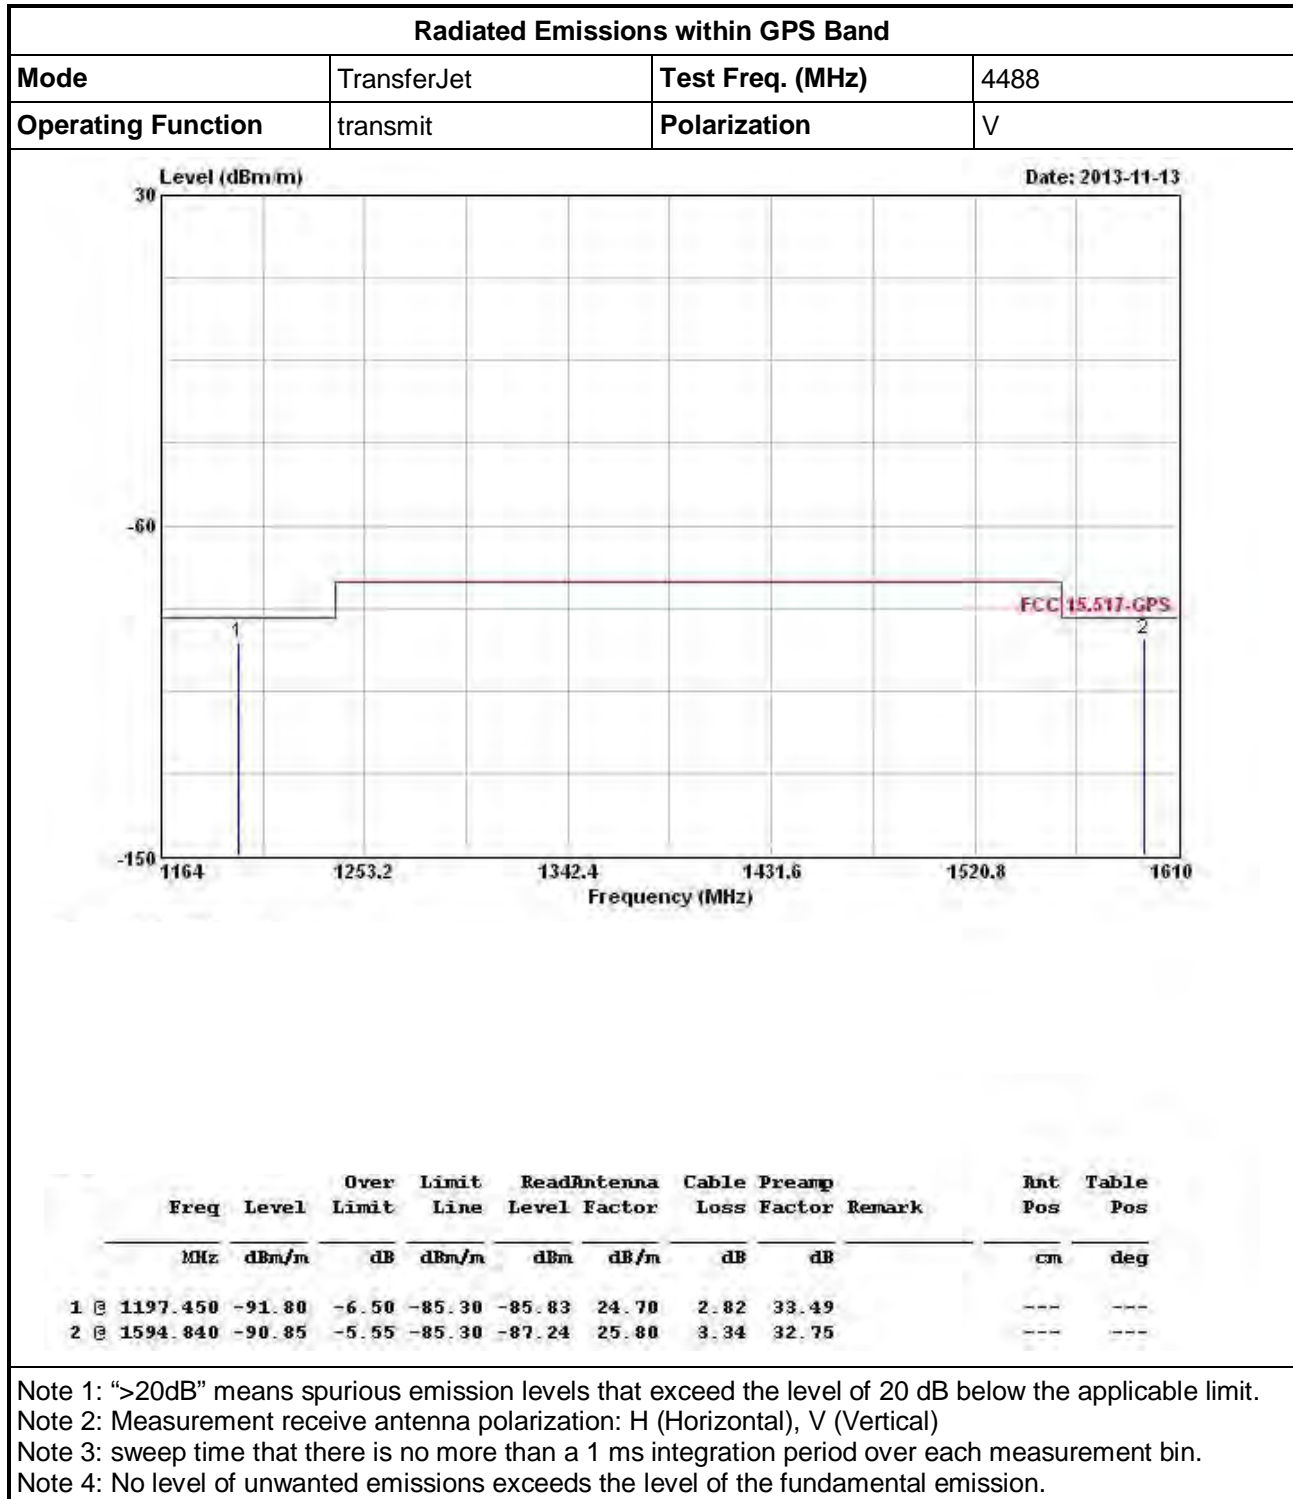3.4.11 Radiated Emissions within GPS Band


Radiated Emissions within GPS Band

Mode	TransferJet	Test Freq. (MHz)	4488
Operating Function	transmit	Polarization	H

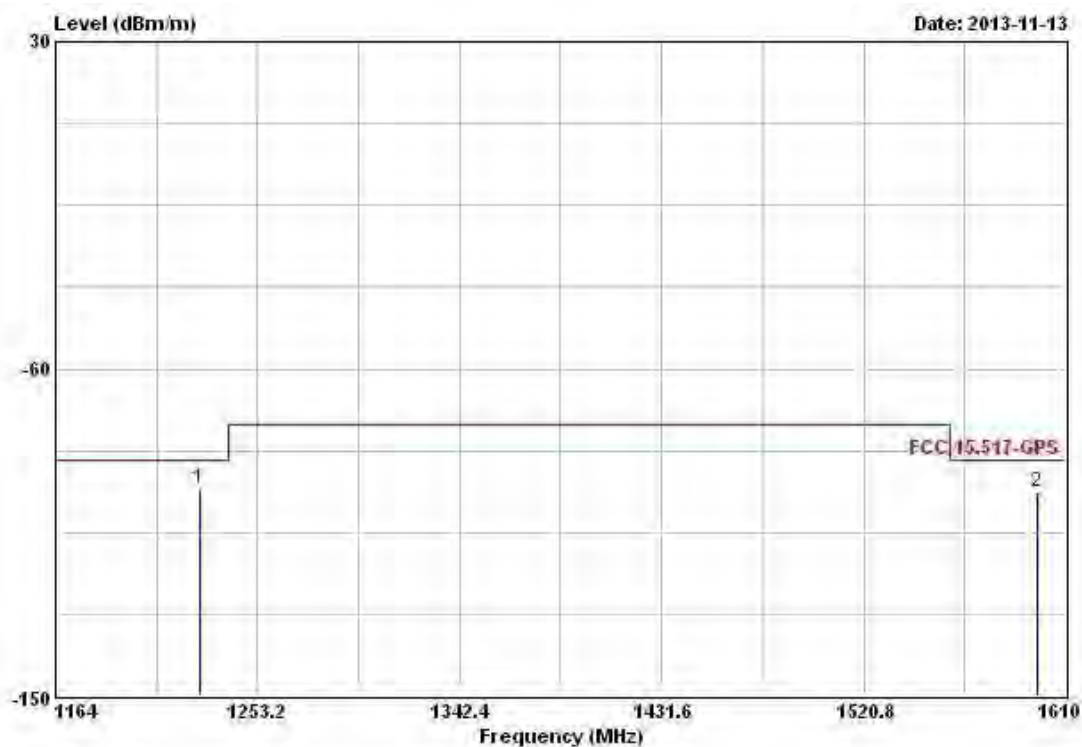

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBm/m	dB	dBm/m	dBm	dB/m	dB	dB		cm	deg
1	1227.780	-92.76	-7.46	-85.30	-86.95	24.74	2.88	33.43		---	---
2	1597.070	-94.12	-8.82	-85.30	-90.51	25.80	3.34	32.75		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: sweep time that there is no more than a 1 ms integration period over each measurement bin.

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH01-HY)
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Dec.04, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 01, 2012	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.



FCC Test Report

Report No. : FR3O0402

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.