


Xlite wireless gamjng mouse

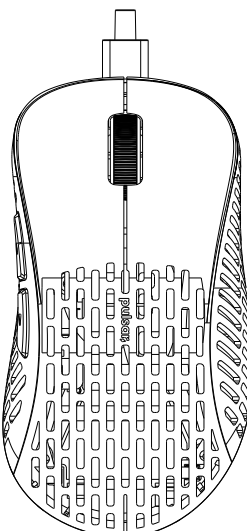

Function layout

1

2

3

4

5

6

7

8

9

10

11

1 Left click

2 Right click

3 Middle click

4 Forward

5 Backward

6 Scroll up

7 Scroll down

8 Power off

9 Power On

10 Wired and charging Type-C

11 Indicator

Instruction

Mouse instruction:

1. Take out the wireless USB Nano receiver from package  
2. Plug the receiver into your computer USB port.  
3. Turn on the mouse power by switching the power switch on the bottom of the mouse  
4. Waiting for computer installation finished

DPI setting and indication:

1. DPI level: 400-800-1600-3200 ,total 4 levels DPI  
2. Hold on button 1+3+4 for 3 secondsto change DPI circularly

3. The indicator color will indicate the DPI level as below:  
400DPI:cyan color breath, 800DPI(default):blue color breath, 1600DPI:purple color breath, 3200DPI:white color breath.

Note:  
1).DPI can be set by software , MAX DPI is 2000dpi  
2).DPI led effects can be set by software and can turn off the DPI led to save power

Polling rate:  
125-250-500-1000Hz can be set by software, default polling rate is 1000Hz

Wired and wireless function:  
1. Wired and wireless mode switch automatically, when you plug the receiver into computer without cable connection, it will work as wireless mode.  
2. If you connect the cable from computer to the mouse, it will switch to wired mode automatically and work as wired mode.

Low power and charging indication  
1. Low power indication: when mouse battery power is low( less than 3.5V), the Red color in the wheel will flash, so you need charge when the Red color flash in the wheel  
2. During charging the yellow color led in the wheel will flash, after the battery charging full, the LED color will become green and charging stop automatically, and wheel led color will back to DPI indication

Pairing  
1. If your mouse lose connection, you can re-pairing it as below process:  
Hold on left click+middle click+right click for 3 seconds until the yellow color flash in the wheel,  
2.release all buttons, put the mouse close to the receiver and re-plug the receiver, the LED will stop flashing after pairing finished.

Note: If you need customize function, pls download the software from website

! CAUTION

1. Keep the battery dry.  
2. Avoid locating the battery terminals near metallic object.  
3. Do not short-circuits and avoid metallic or water come into mouse to cause battery short  
4. Use computer USB and specified cable to charge the mouse

Main Specification

Size:	120x63.5x39mm
Weight:	73g
Switch	Omron 20M(OF)
Sensor	PAW3370
Max DPI	20000
Default DPI:	400-800-1600-3200DPI
IPS	400ips
Acceleration	50g(Max)
Polling rate	125-250-500(default)-1000Hz
Interface	USB 2.0
Battery type	Li-ion Polymer Battery
Battery capacity	300mAh