


9.3.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	6 dB BW CHAIN 0 (MHz)	6 dB BW CHAIN 1 (MHz)	6 dB BW CHAIN 2 (MHz)	Minimum Limit (MHz)
Low	5755	34.232	32.584	31.888	0.5
High	5795	35.056	34.544	33.416	0.5

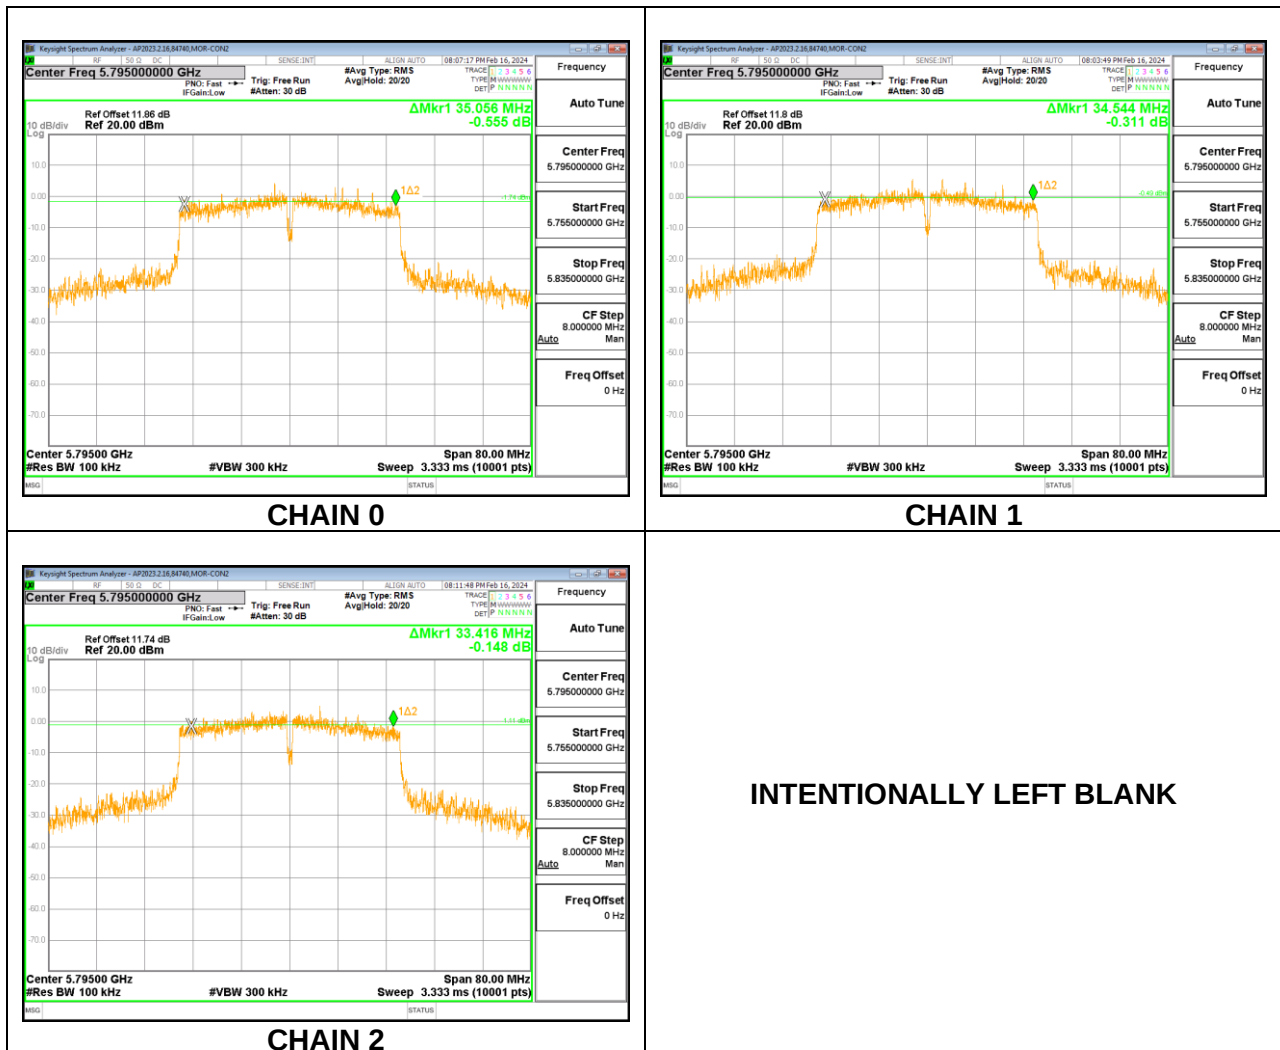

9.3.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	6 dB BW CHAIN 0 (MHz)	6 dB BW CHAIN 1 (MHz)	6 dB BW CHAIN 2 (MHz)	Minimum Limit (MHz)
Mid	5775	75.120	72.576	75.056	0.5

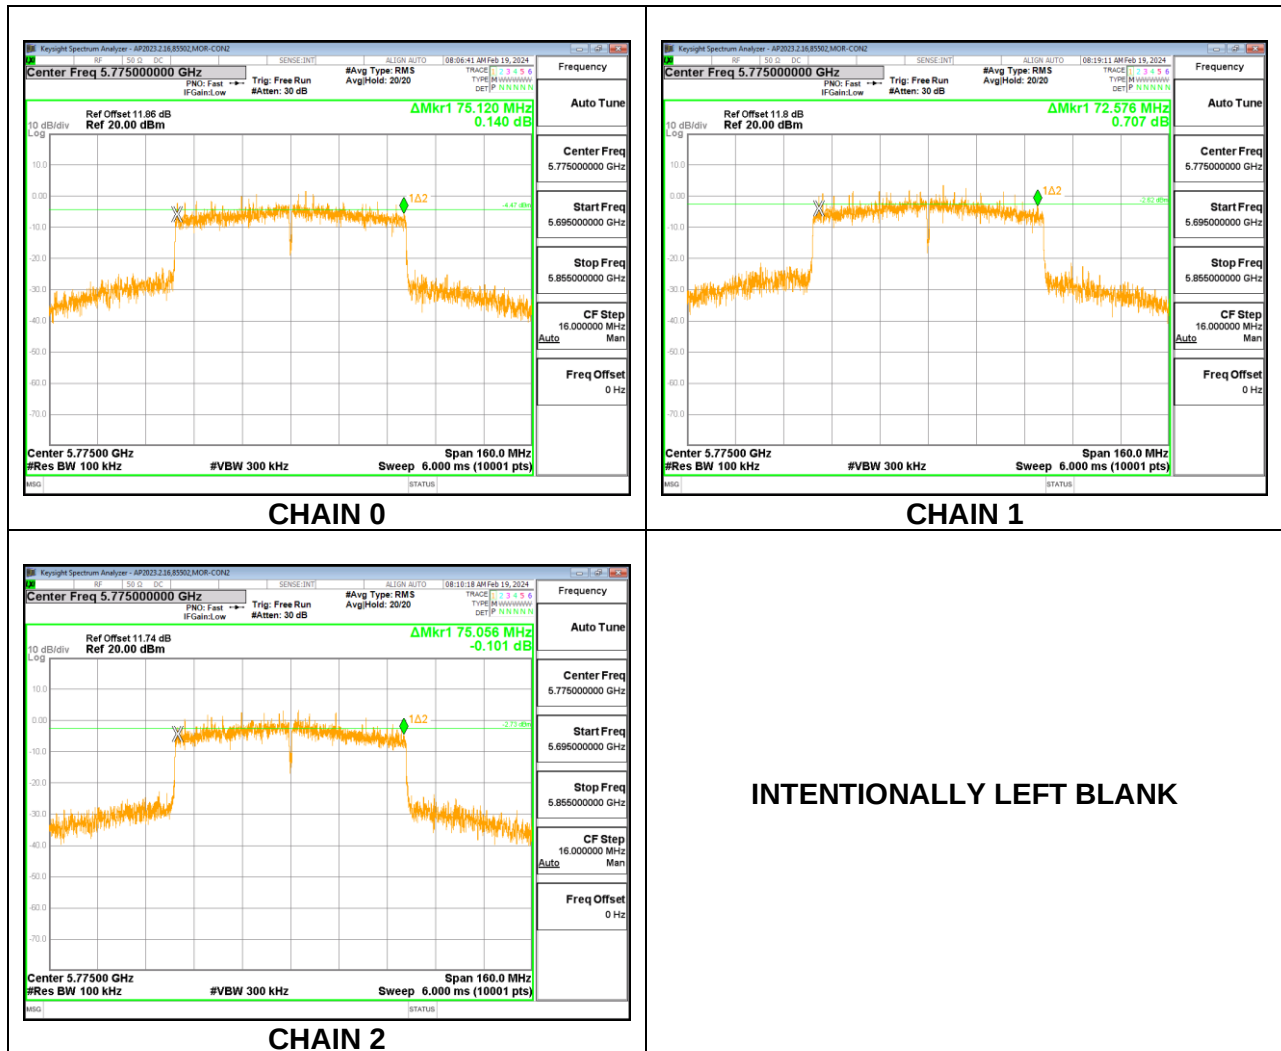

9.3.5. 802.11ax HE20 MODE IN THE 5.8 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU

Channel	Frequency (MHz)	6 dB BW CHAIN 0 (MHz)	6 dB BW CHAIN 1 (MHz)	6 dB BW CHAIN 2 (MHz)	Minimum Limit (MHz)
Low	5745	18.984	18.848	19.076	0.5
Mid	5785	18.768	18.568	18.564	0.5
High	5825	18.668	18.240	18.648	0.5

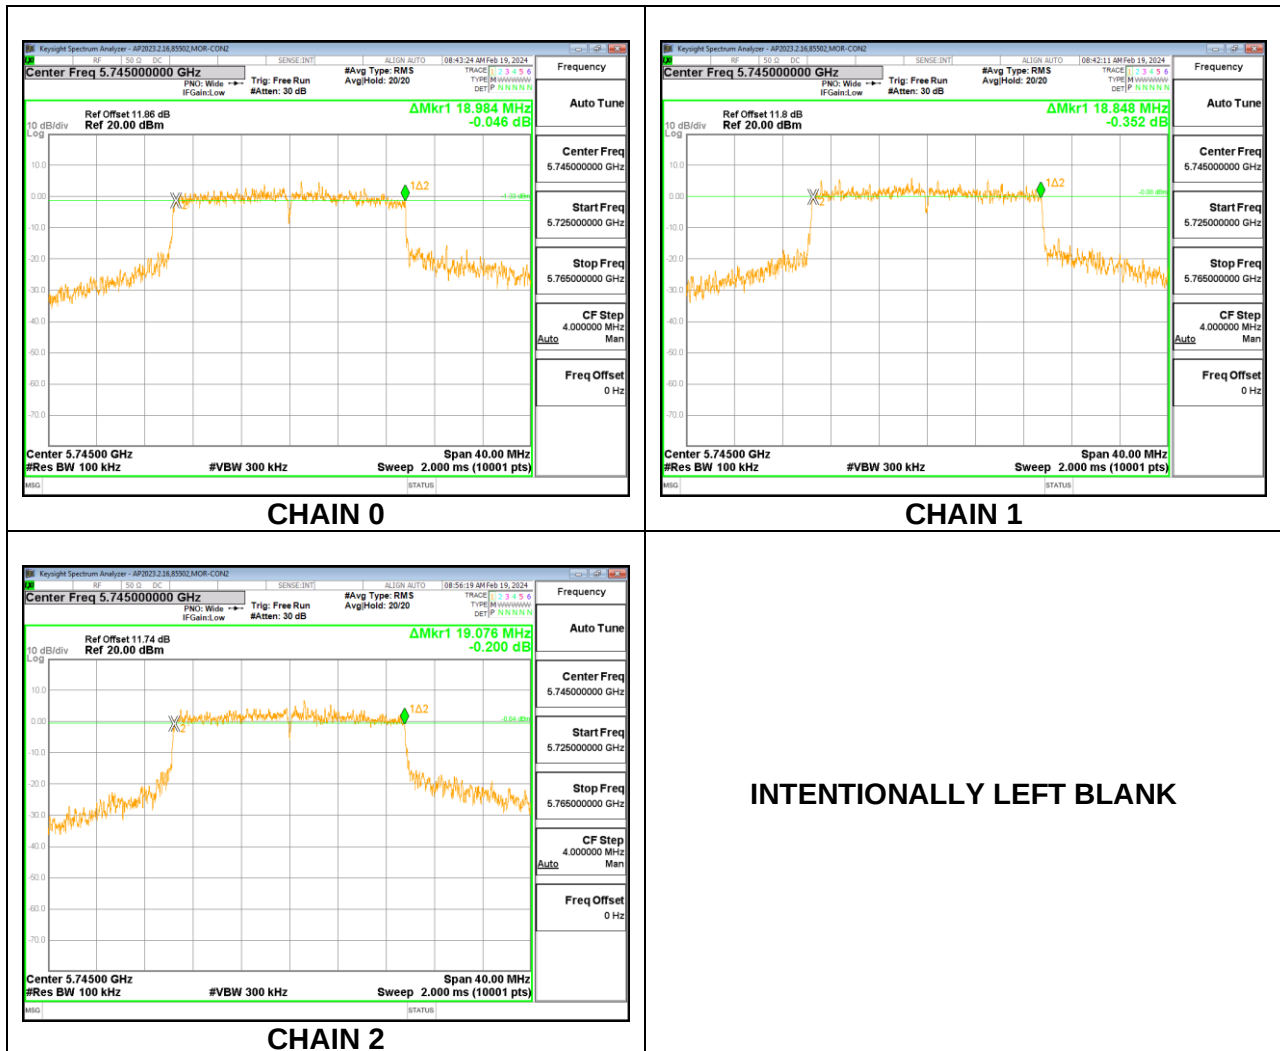

9.3.6. 802.11ax HE40 MODE IN THE 5.8 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU


Channel	Frequency (MHz)	6 dB BW CHAIN 0 (MHz)	6 dB BW CHAIN 1 (MHz)	6 dB BW CHAIN 2 (MHz)	Minimum Limit (MHz)
Low	5755	35.280	35.104	35.064	0.5
High	5795	36.352	36.384	34.432	0.5



9.3.7. 802.11ax HE80 MODE IN THE 5.8 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU

Channel	Frequency (MHz)	6 dB BW CHAIN 0 (MHz)	6 dB BW CHAIN 1 (MHz)	6 dB BW CHAIN 2 (MHz)	Minimum Limit (MHz)
Mid	5775	73.088	73.888	75.856	0.5

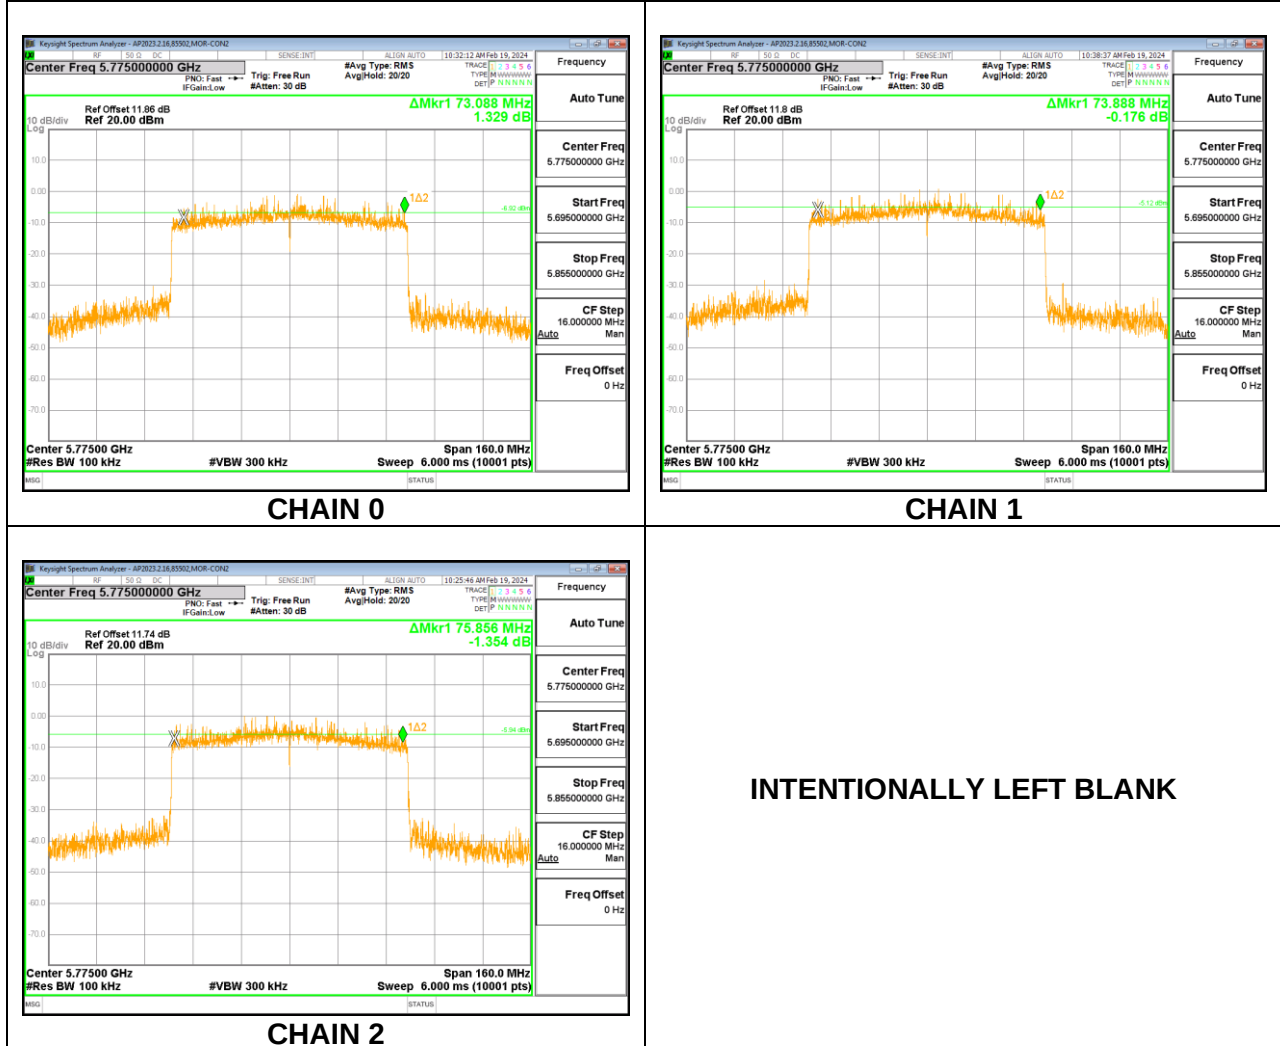

9.4. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

9.4.1. 802.11a MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5180	16.70	16.66	16.65
Mid	5200	16.67	16.70	16.75
High	5240	16.66	16.65	16.58

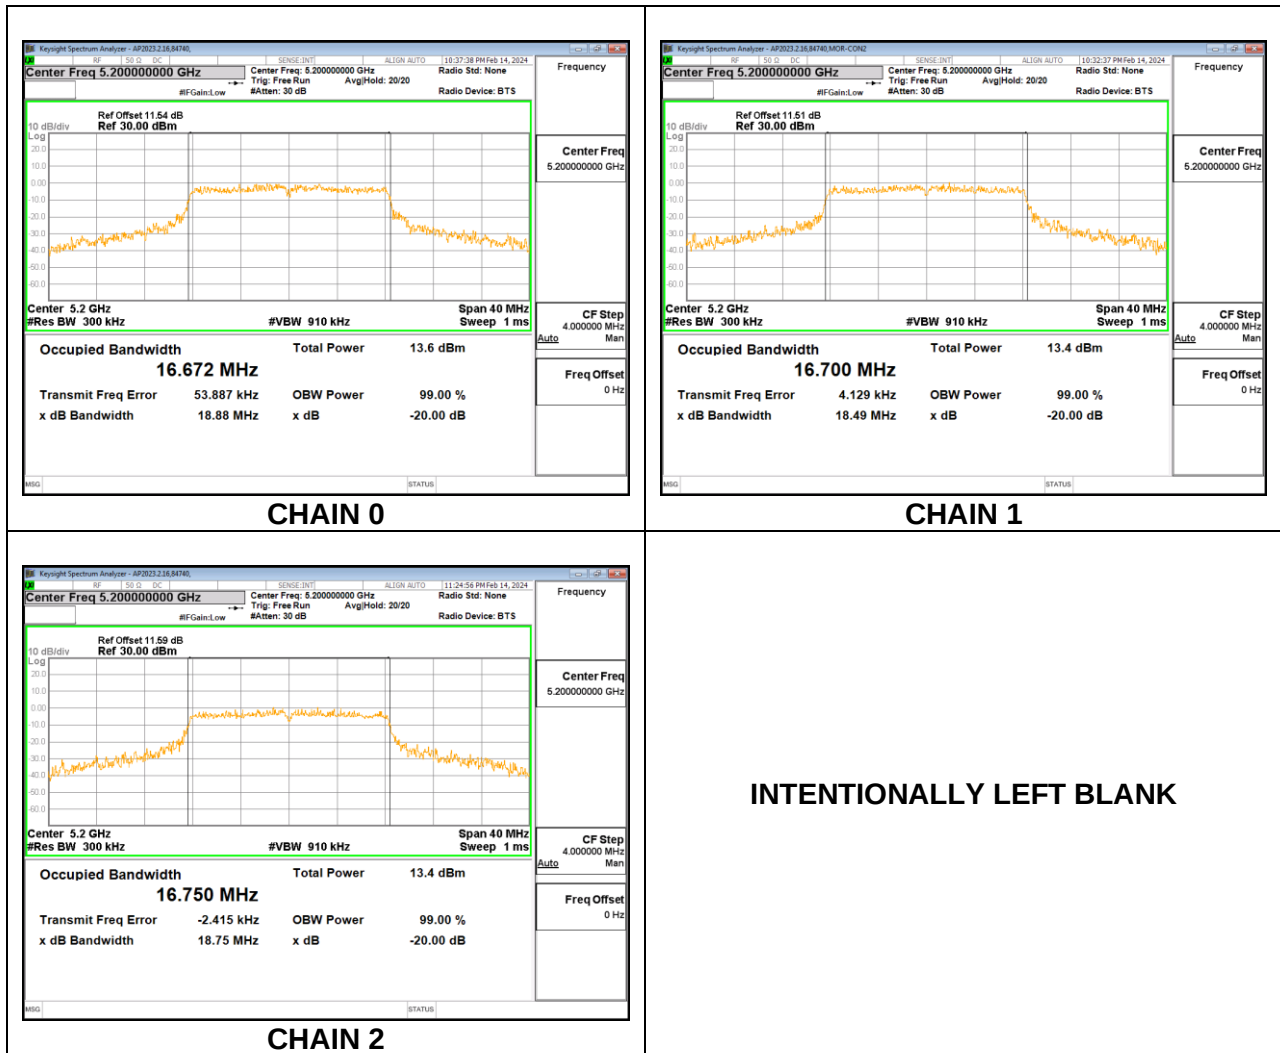

9.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5180	17.92	18.02	17.88
Mid	5200	17.95	17.97	18.00
High	5240	17.83	17.82	17.80

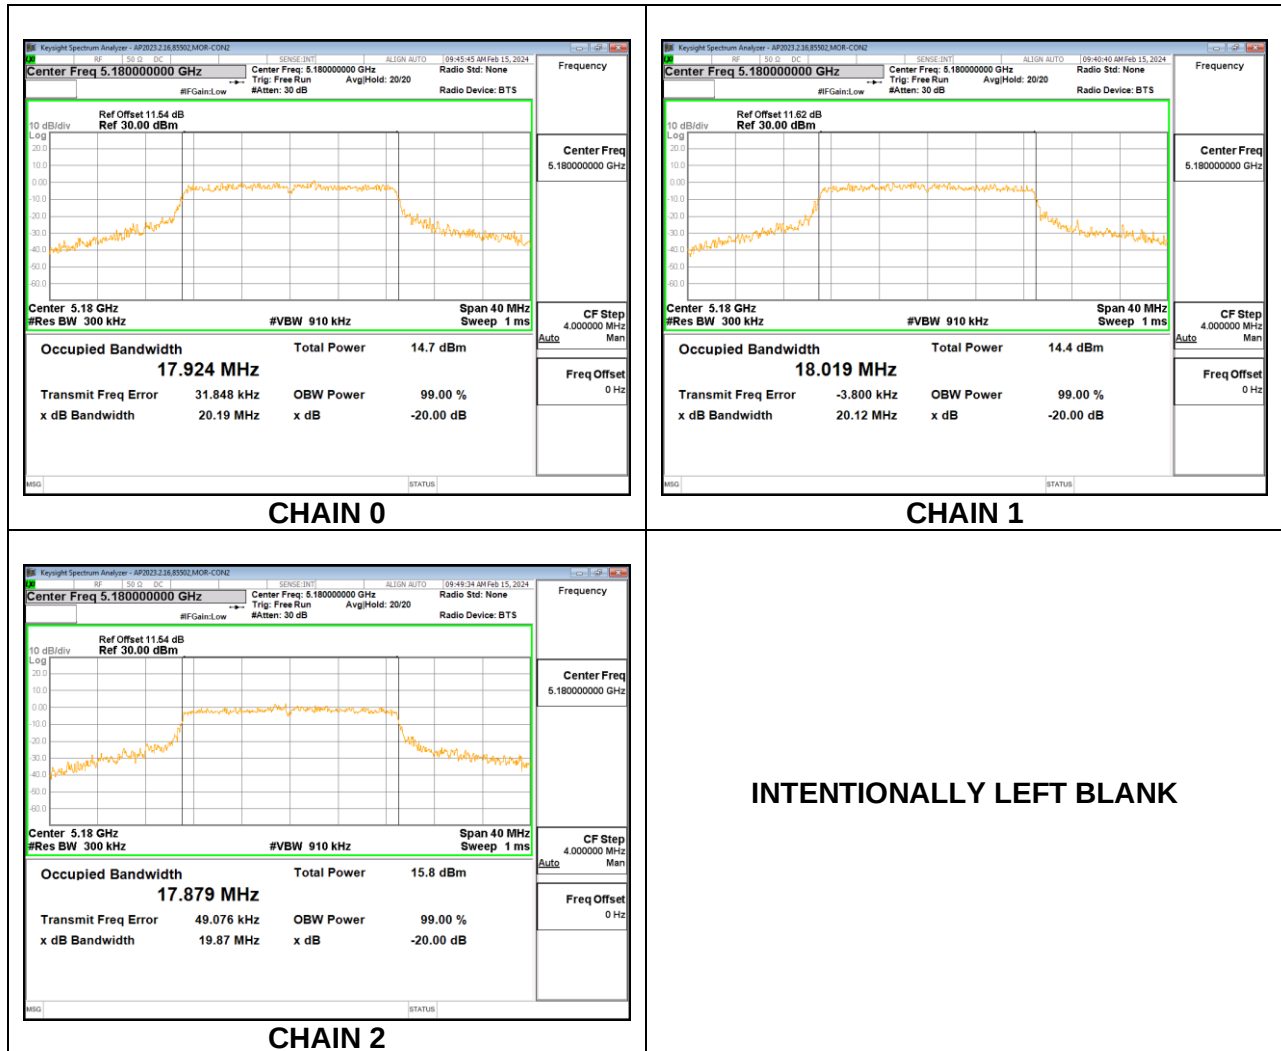

9.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5190	36.13	36.15	36.14
High	5230	36.06	36.06	36.14



9.4.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Mid	5210	75.57	75.21	75.69

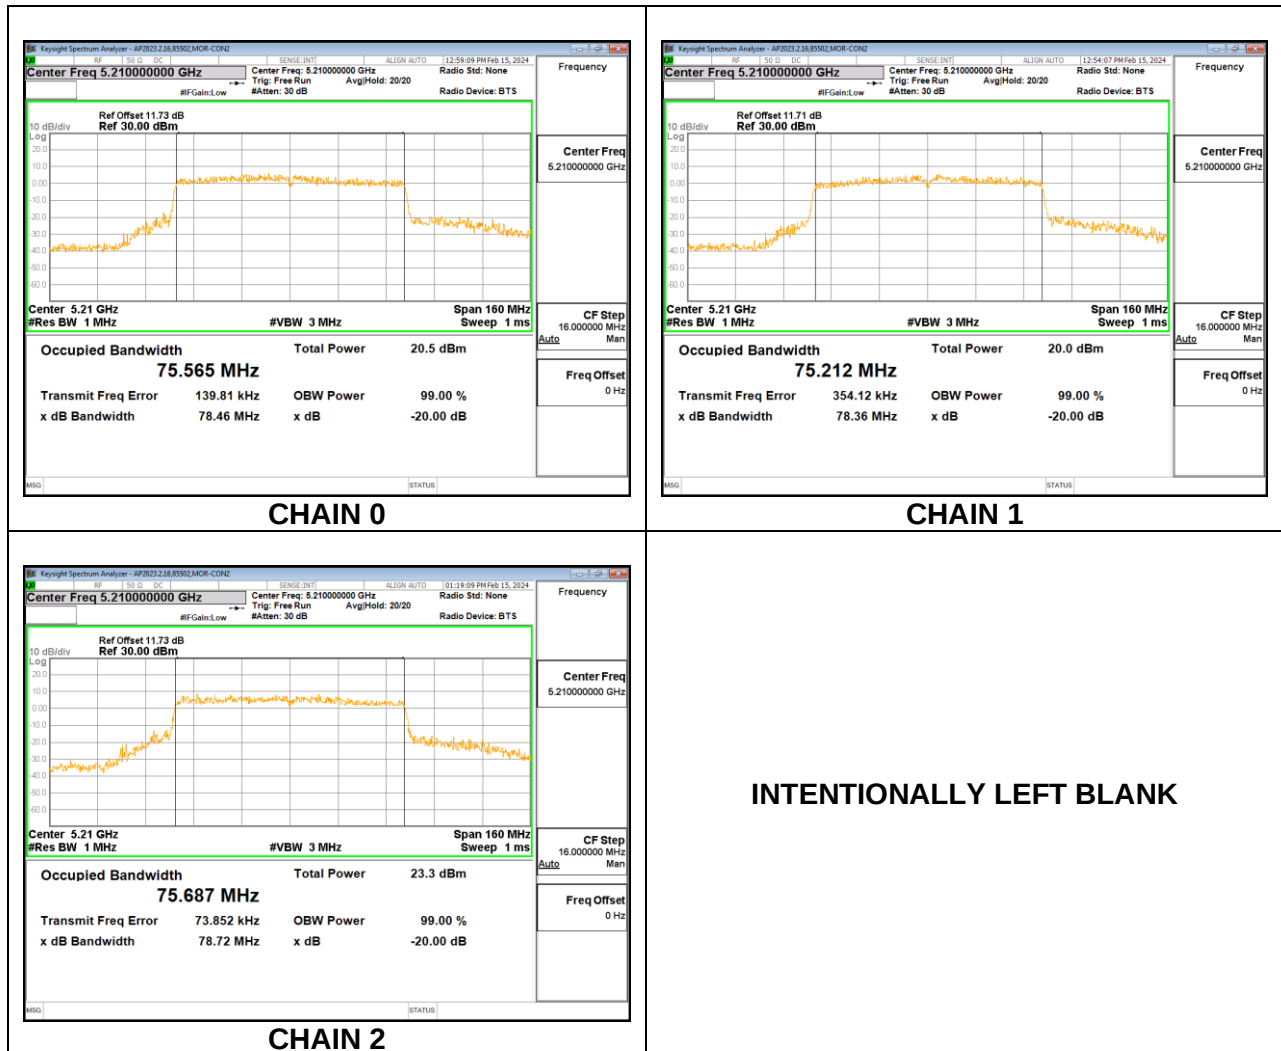

9.4.5. 802.11ax HE20 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5180	19.04	19.11	19.05
Mid	5200	19.04	19.05	18.98
High	5240	18.94	18.92	18.91

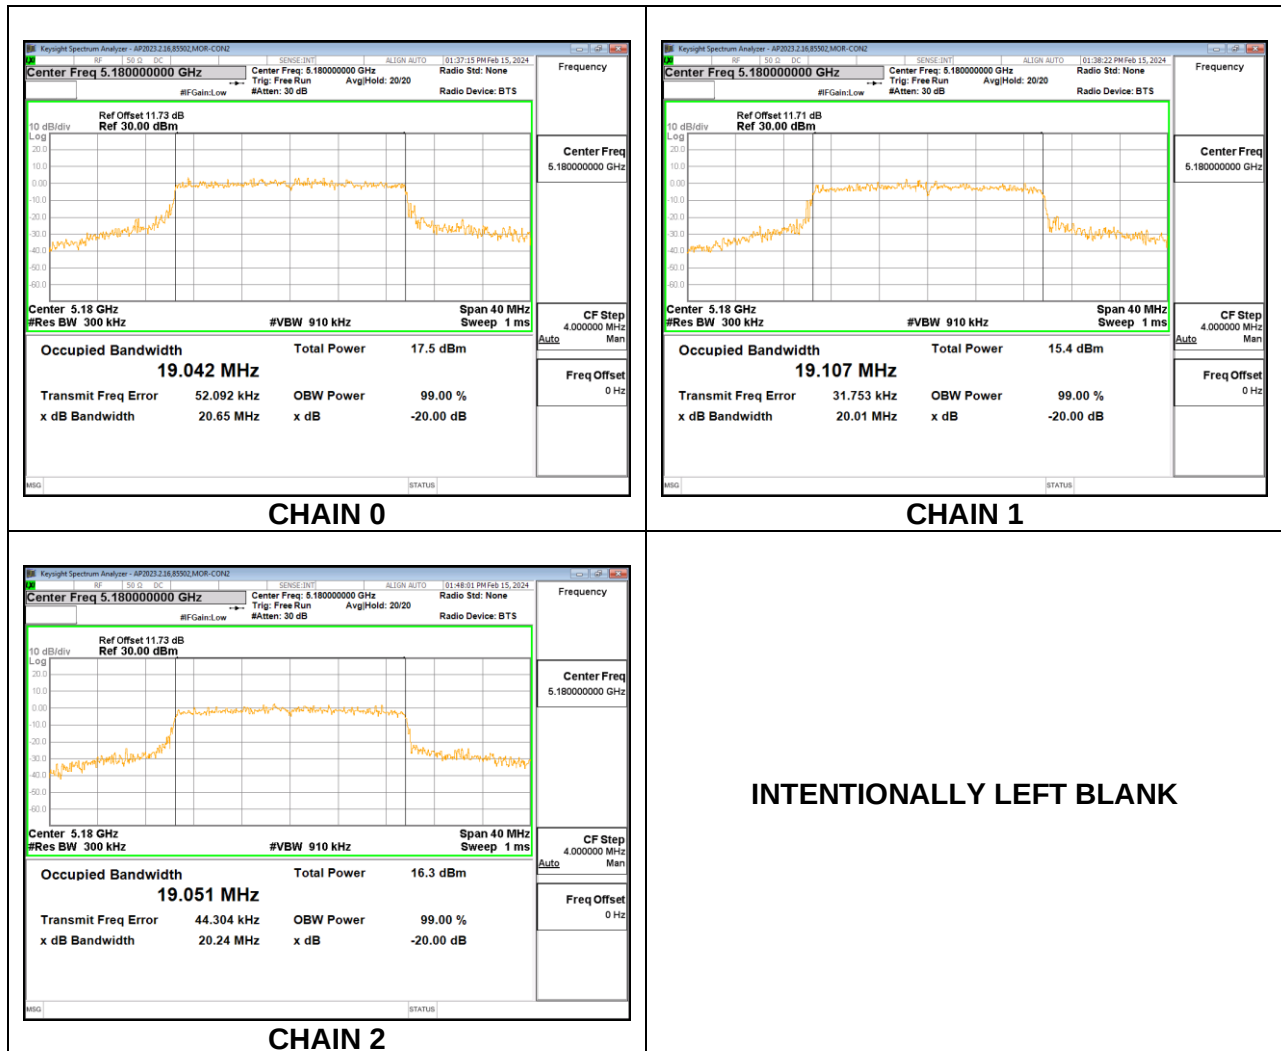

9.4.6. 802.11ax HE40 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5190	37.49	37.64	37.58
High	5230	37.47	37.61	37.36

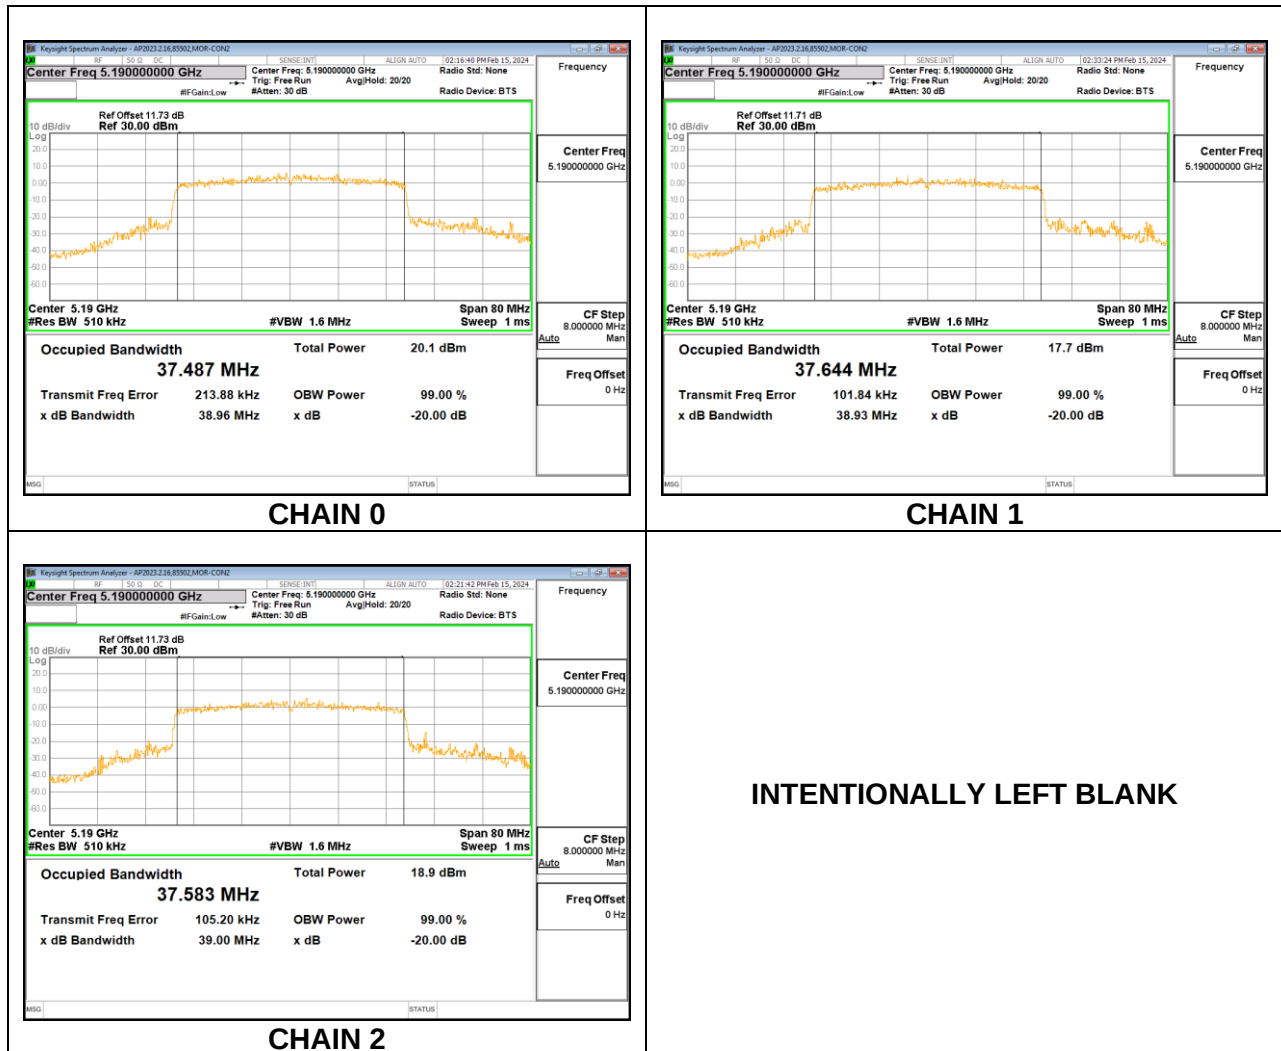

9.4.7. 802.11ax HE80 MODE IN THE 5.2 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Mid	5210	77.09	76.69	77.30

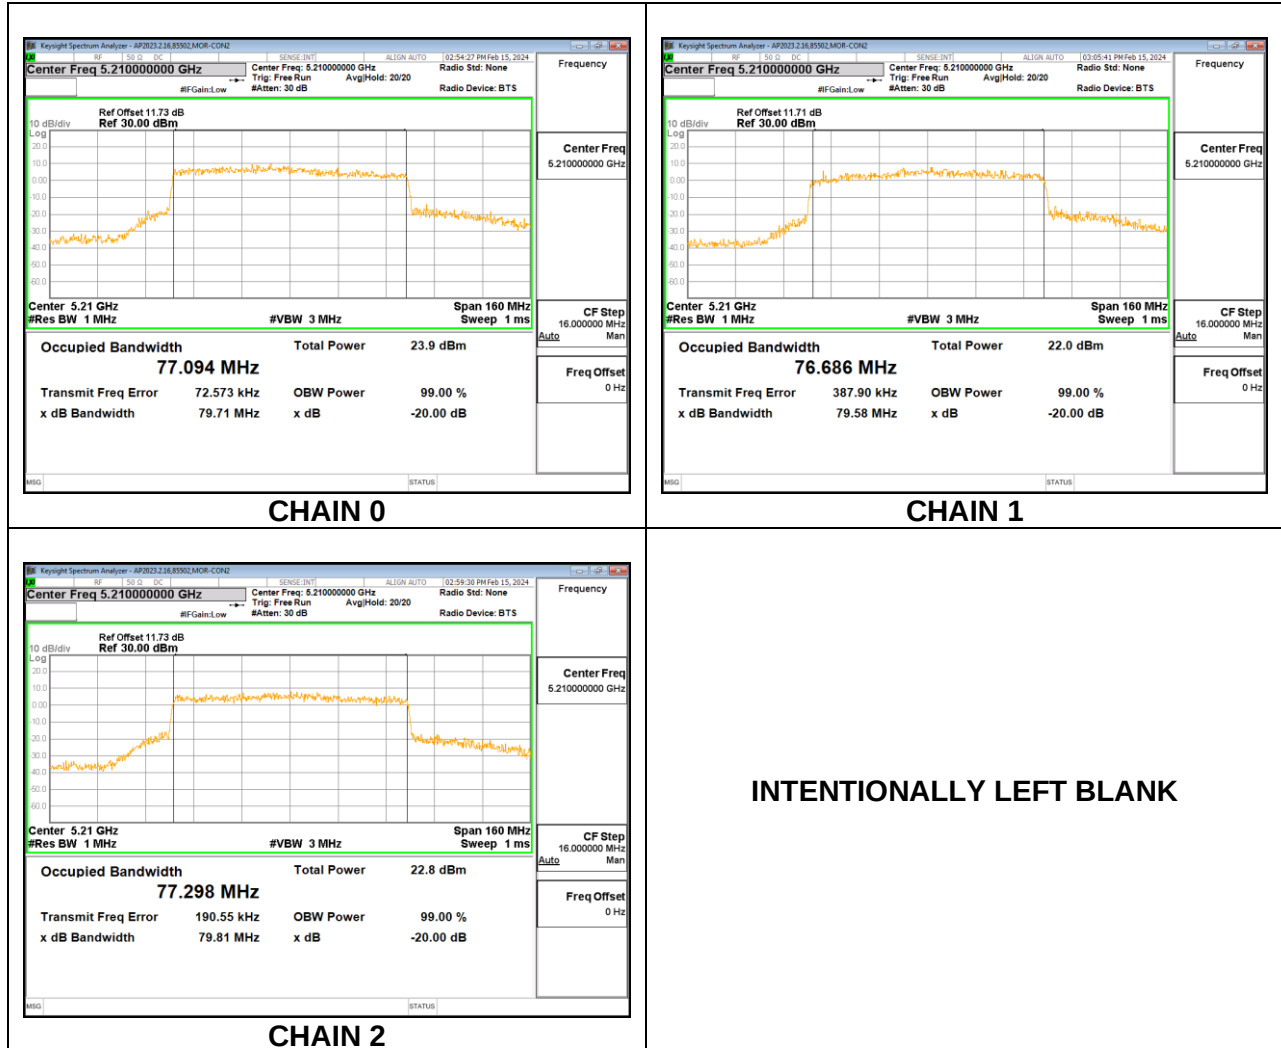

9.4.8. 802.11a MODE IN THE 5.3 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5260	16.55	16.58	16.54
Mid	5300	16.74	16.72	16.72
High	5320	16.67	16.72	16.76

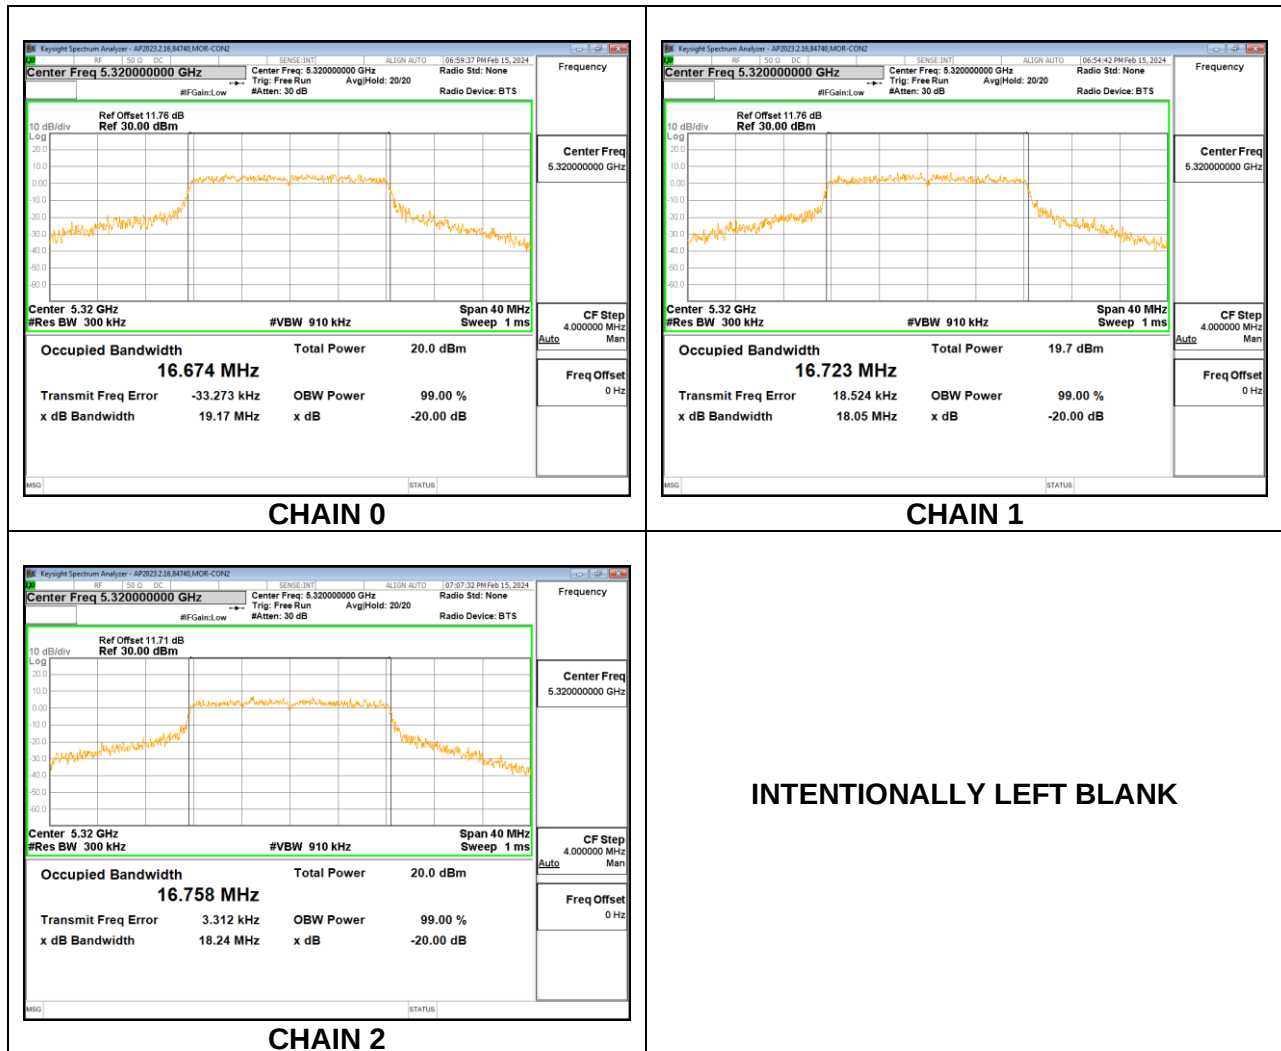

9.4.9. 802.11n HT20 MODE IN THE 5.3 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5260	17.76	17.78	17.71
Mid	5300	17.96	17.91	17.99
High	5320	17.88	17.83	17.94

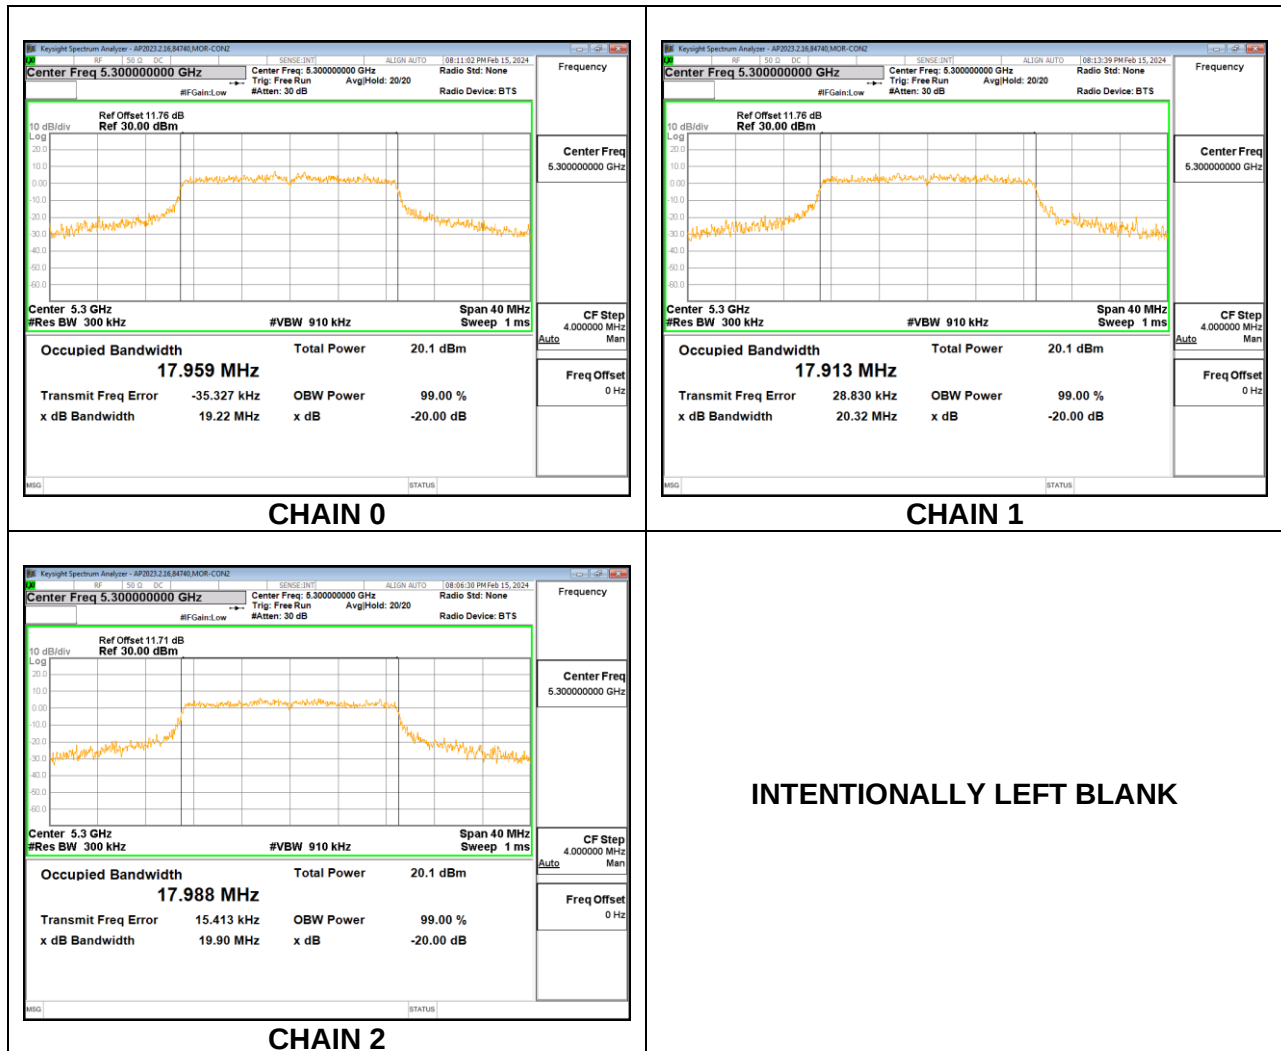

9.4.10. 802.11n HT40 MODE IN THE 5.3 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5270	35.60	36.12	36.12
High	5310	35.92	36.23	36.28

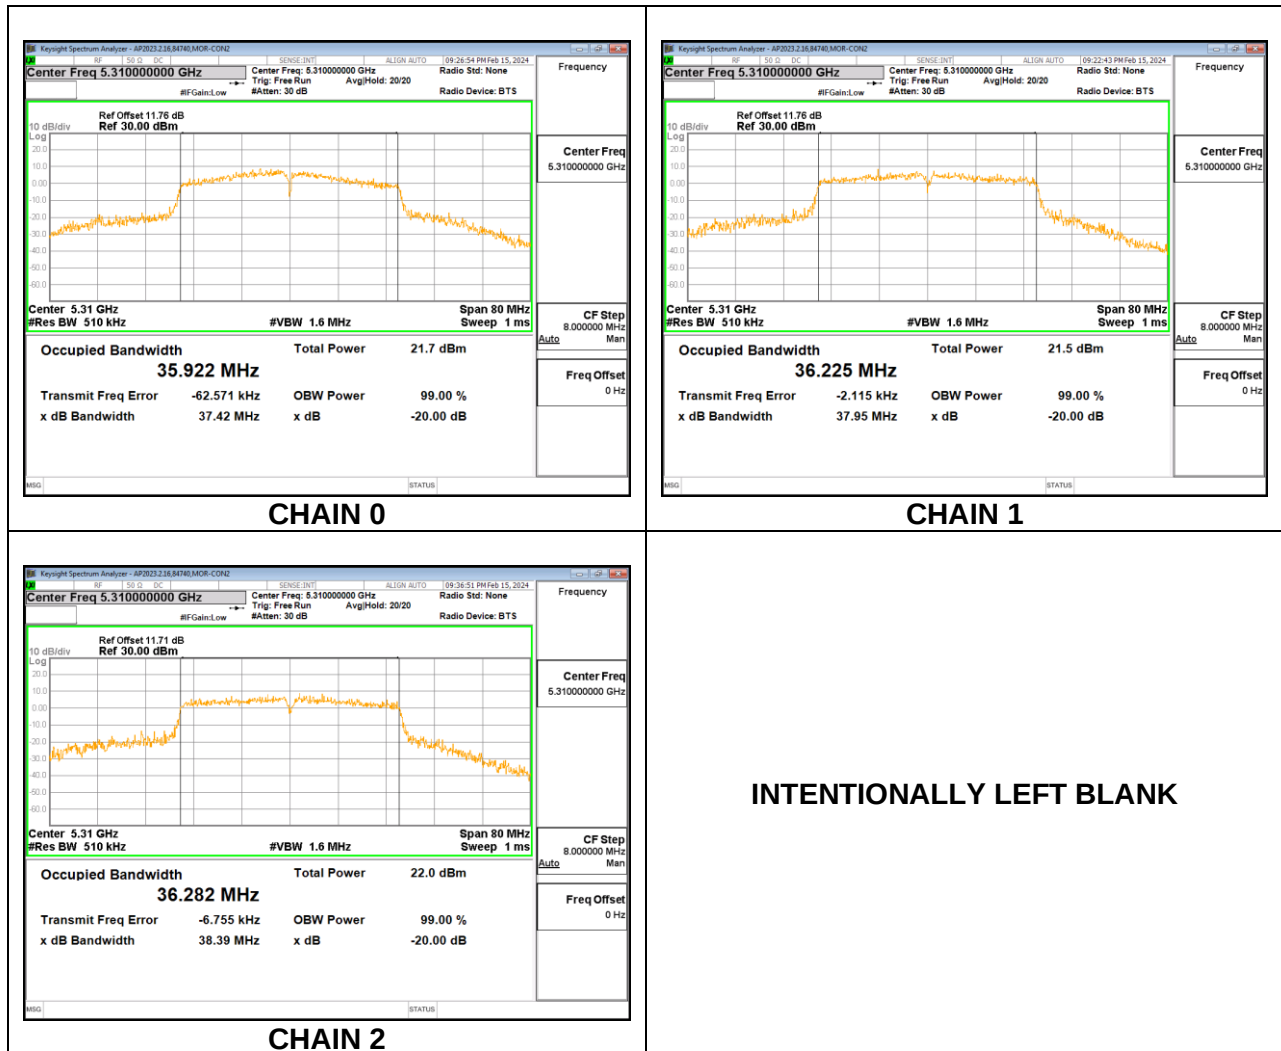

9.4.11. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Mid	5290	75.98	75.64	76.04

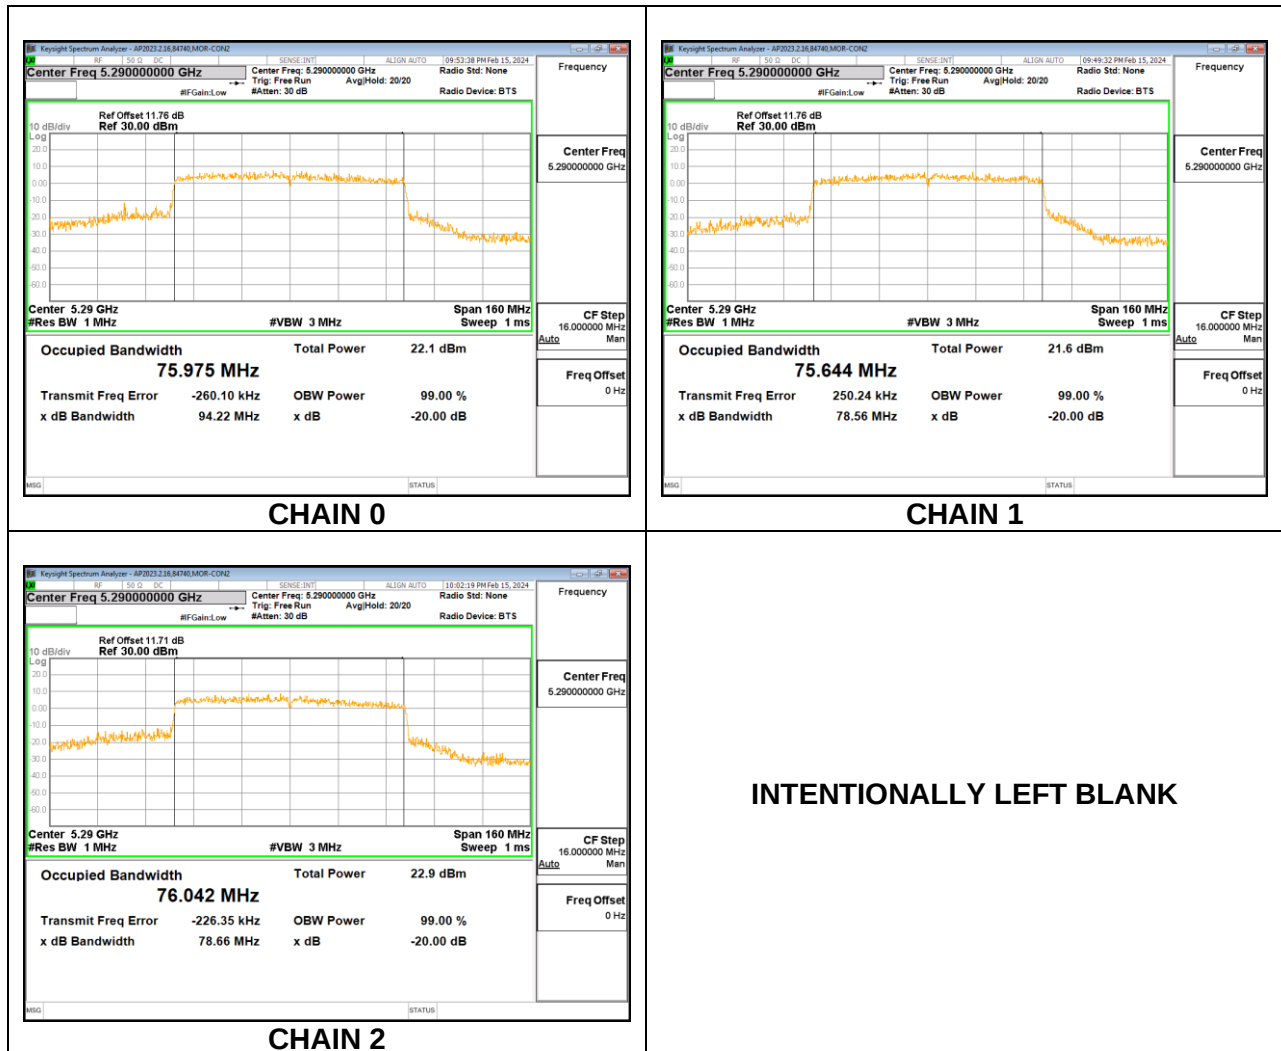

9.4.12. 802.11ax HE20 MODE IN THE 5.3GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD OFDMA MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5260	18.94	18.89	18.96
Mid	5300	19.00	19.08	19.13
High	5320	19.07	19.04	19.05

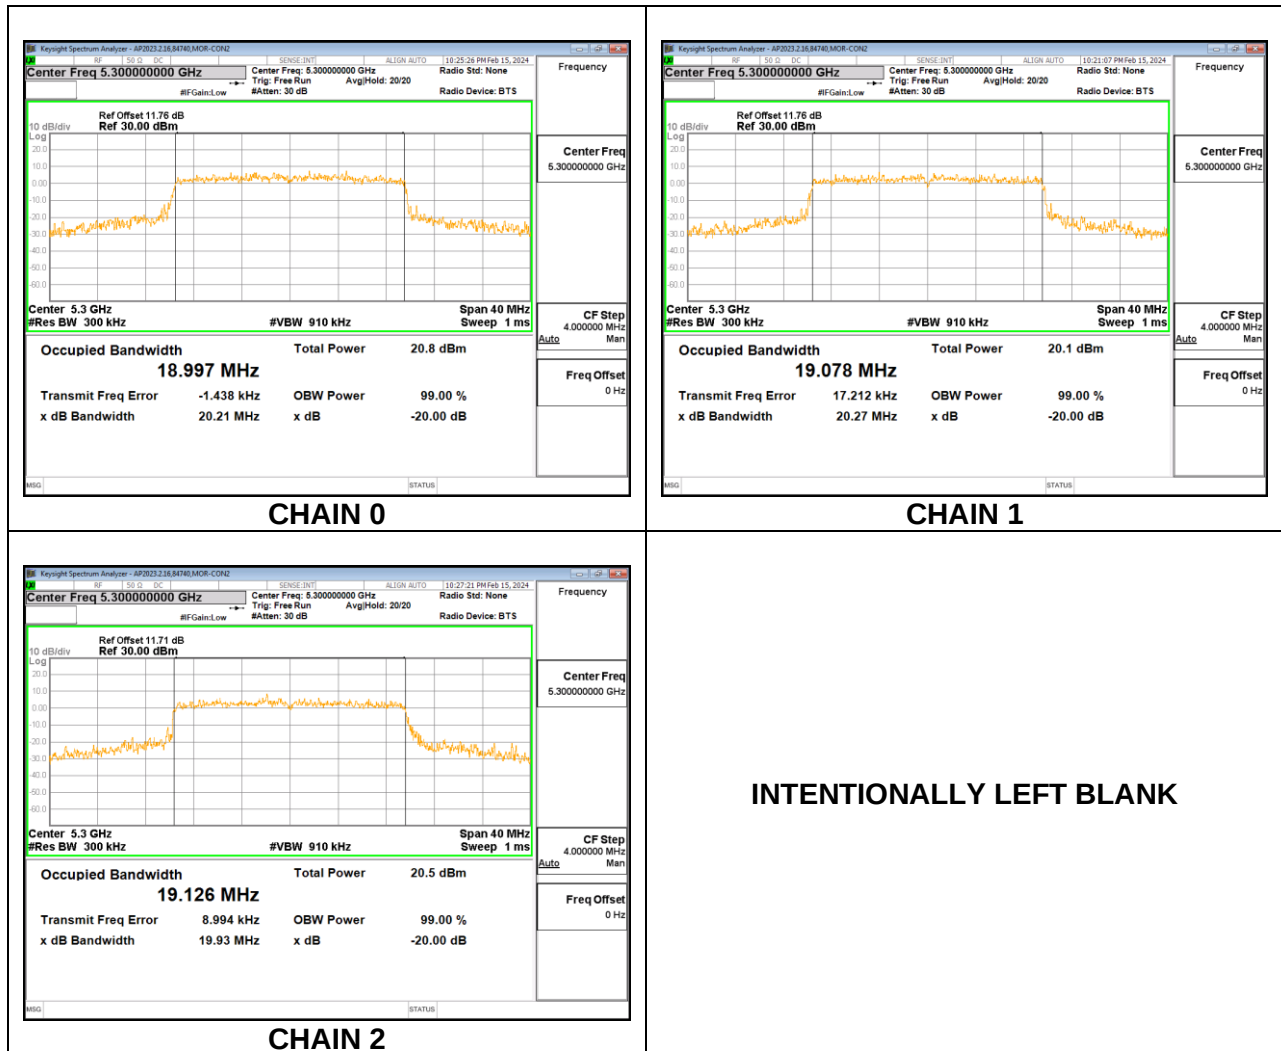

9.4.13. 802.11ax HE40 MODE IN THE 5.3GHz BAND

3TX CHAIN 1 + CHAIN 2 CDD OFDMA MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5270	37.67	37.55	37.63
High	5310	37.72	37.68	37.69

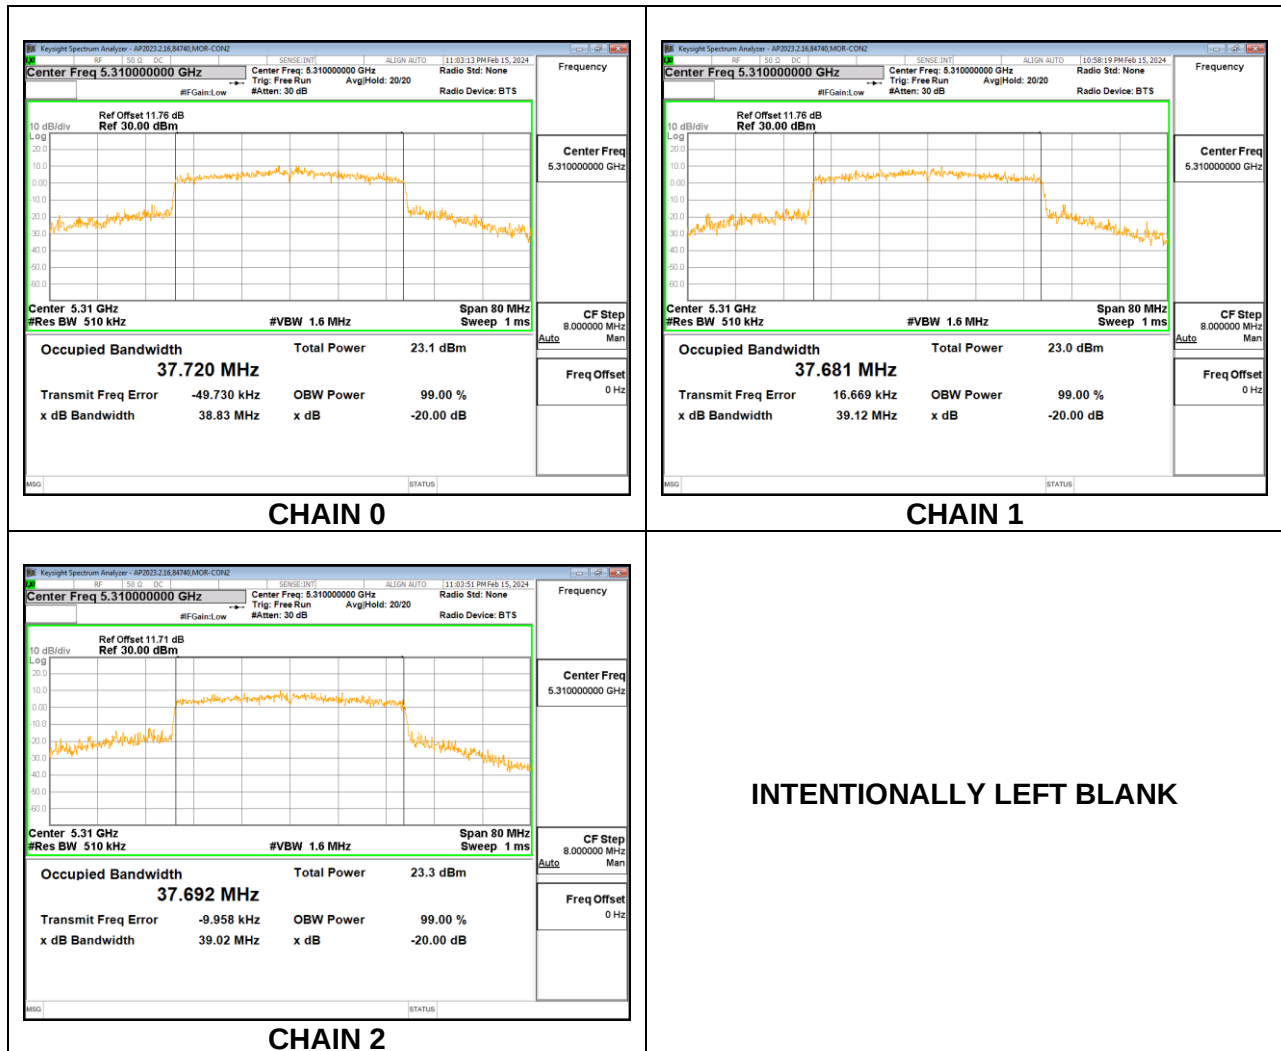

9.4.14. 802.11ax HE80 MODE IN THE 5.3GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD OFDMA MODE: SU


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Mid	5290	77.46	77.32	77.46

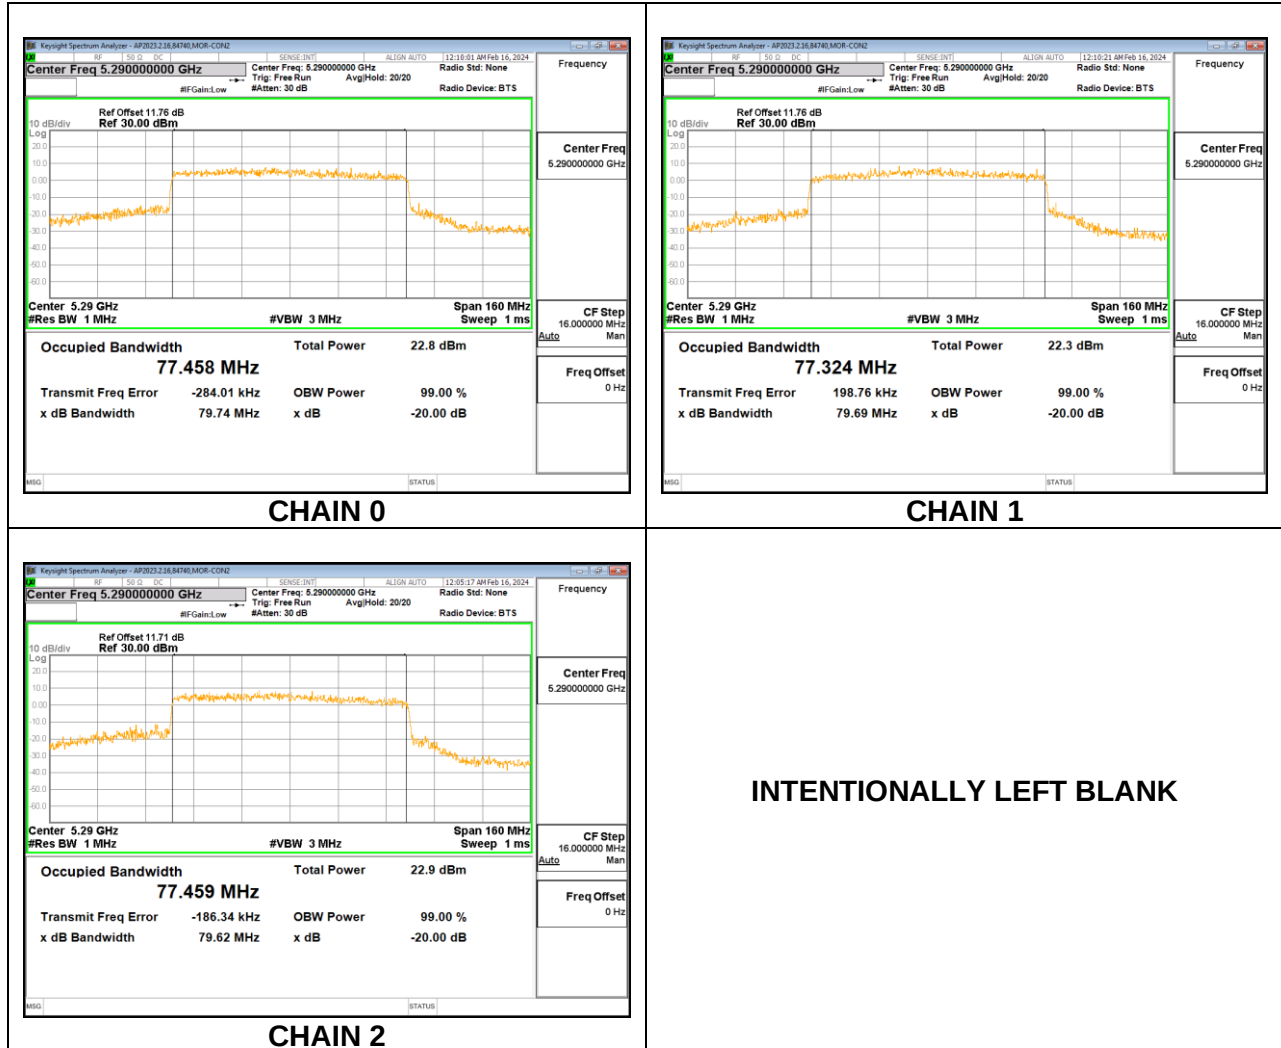

9.4.15. 802.11a MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5500	16.87	16.89	16.85
Mid	5580	16.65	16.66	16.59
High	5700	16.81	16.71	16.76

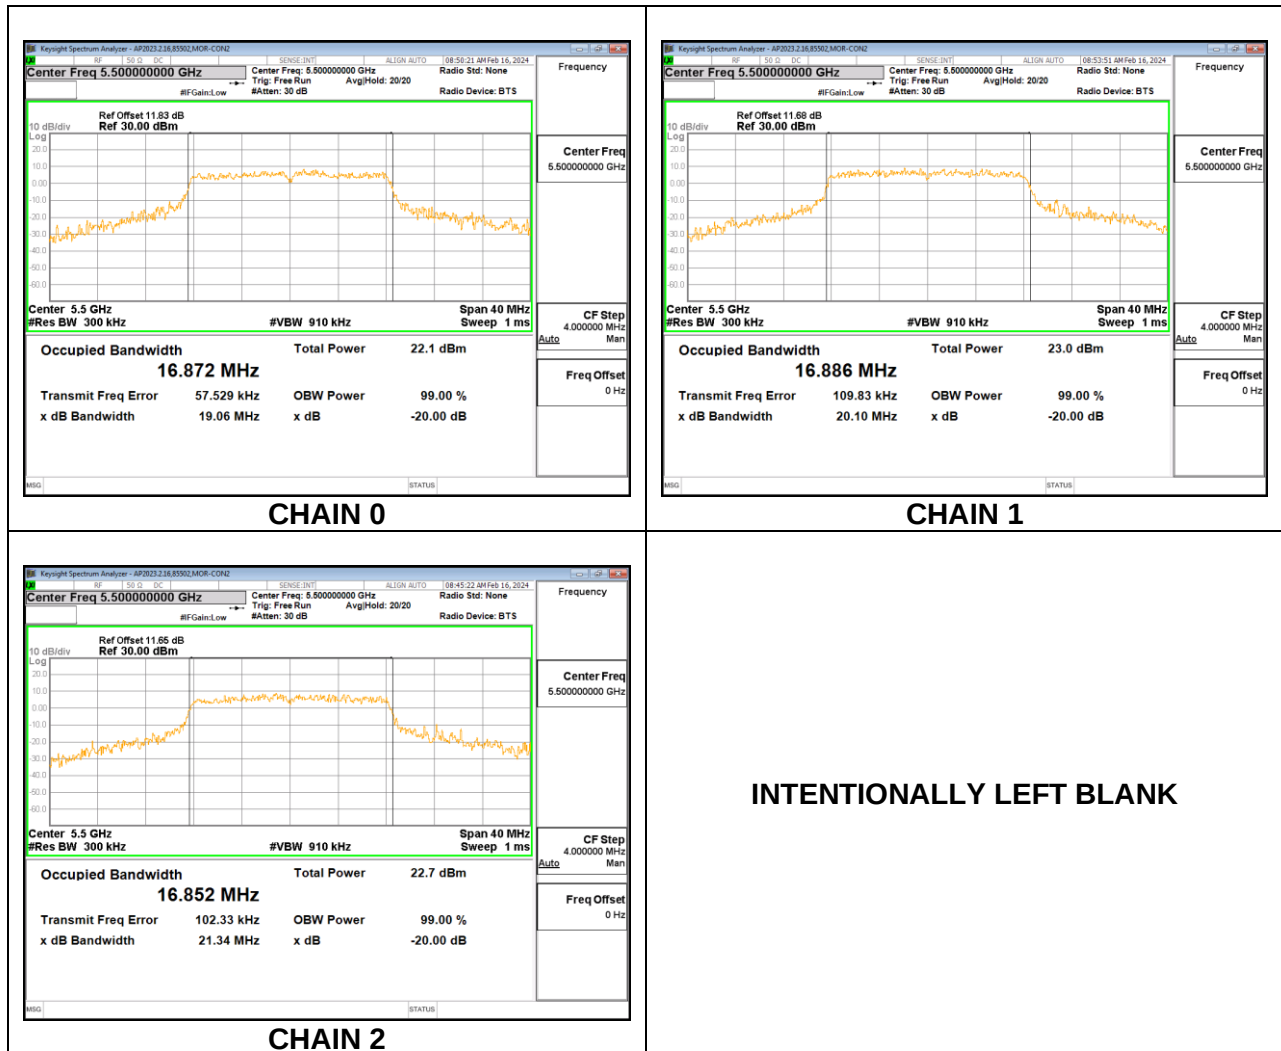

9.4.16. 802.11n HT20 MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5500	18.01	17.89	18.01
Mid	5580	17.87	17.84	17.80
High	5700	18.01	17.91	17.96

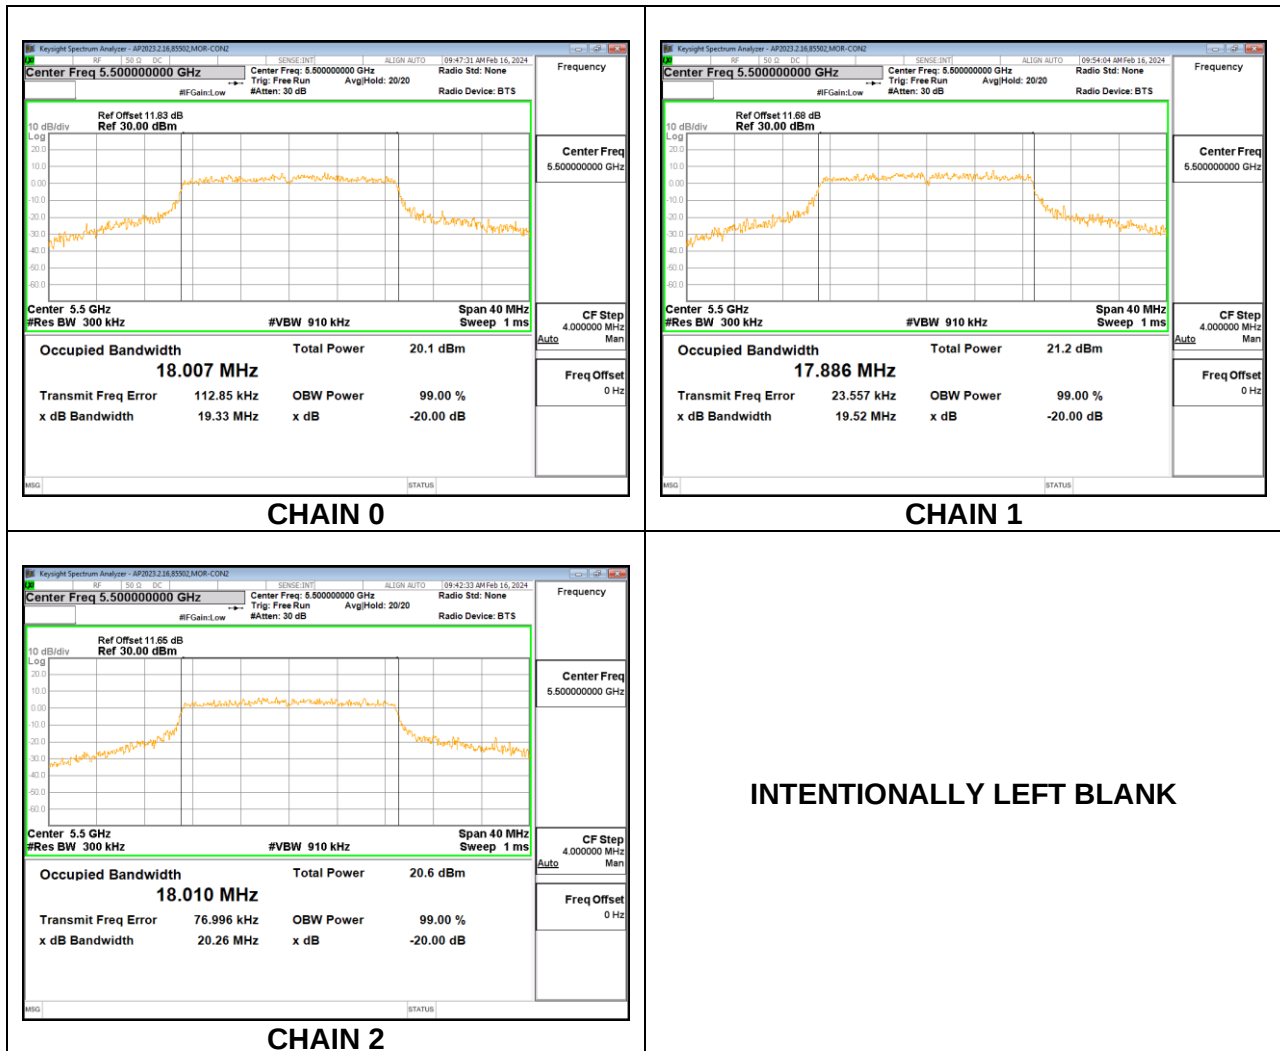

9.4.17. 802.11n HT40 MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5510	36.26	36.37	36.43
Mid	5550	36.79	37.22	36.70
High	5670	36.75	36.52	36.36

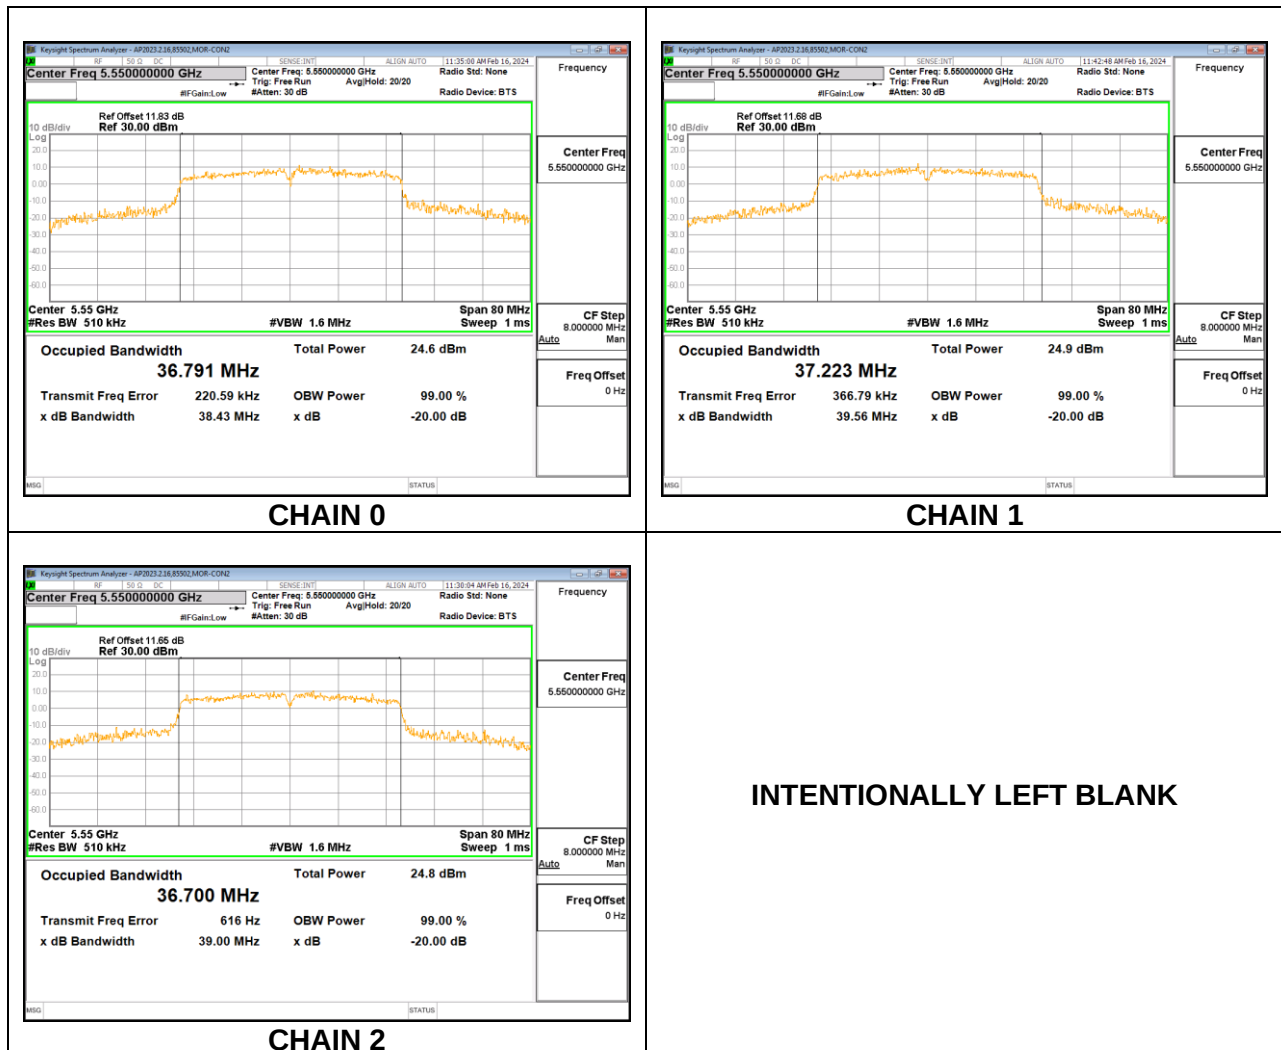

9.4.18. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5530	76.42	76.58	76.48

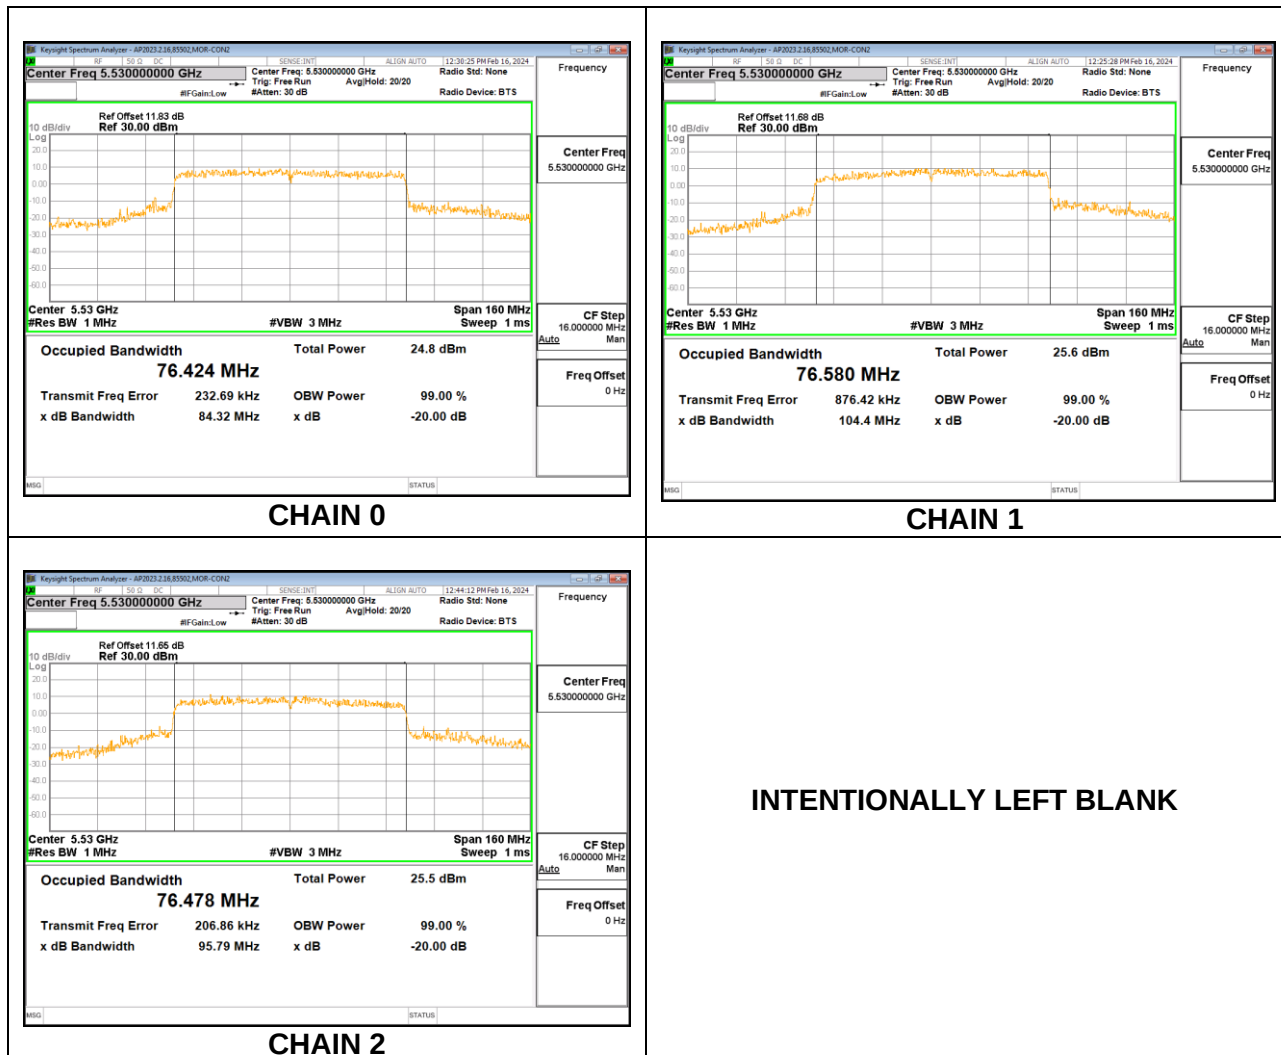

9.4.19. 802.11ax HE20 MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5500	19.09	19.07	19.10
Mid	5580	18.98	19.01	18.97
High	5700	19.01	19.05	19.02



9.4.20. 802.11ax HE40 MODE IN THE 5.6 GHz BAND

3TX CHAIN 0 + CHAIN 1 + CHAIN 2 CDD MODE: SU

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)
Low	5510	37.82	37.69	37.74
Mid	5550	37.63	37.73	37.80
High	5670	37.78	37.64	37.72

