

FCC ID:2AVSB-SL-S2

Product Name:	Wireless Charger				
Product Model No.:	SL-S2				
Test Auxiliary:	Wireless charging				
Transmitting mode:	Keep the EUT in continuously wireless charging mode				
Power supply:	Input: 9 V == 3 A, 5 V == 3 A Phone Wireless Charging Output: 5W/ 7.5W/ 10W/ 15W Earbuds Wireless Charging Output: 5W Watch Wireless Charging Output: 2.5W				













Test Mod	es:
Mode 1	AC Adapter+Wireless charging mode (Qi protocol: Phone: 15W)
Mode 2	AC Adapter+Wireless charging mode (Qi protocol: Phone: 10W)
Mode 3	AC Adapter+Wireless charging mode (Qi protocol: Phone: 5W)
Mode 4	AC Adapter+Wireless charging mode (MPP protocol: Phone: 15W)
Mode 5	AC Adapter+Wireless charging mode (Earphone: Battery Status:≤1%)
Mode 6	AC Adapter+Wireless charging mode (Earphone: Battery Status:50%)
Mode 7	AC Adapter+Wireless charging mode (Earphone: Battery Status: ≥98)
Mode 8	AC Adapter+Wireless charging mode (Watch: Battery Status:≤1%)
Mode 9	AC Adapter+Wireless charging mode (Watch: Battery Status:50%)
Mode 10	AC Adapter+Wireless charging mode (Watch: Battery Status: ≥98)
Mode 11	AC Adapter+Phone coil (MPP protocol:15W) + Earphone (Battery Status:≤1%)
Mode 12	AC Adapter+Phone coil (MPP protocol:15W) + Watch (Battery Status:≤1%)
Mode 13	AC Adapter+Phone coil (MPP protocol:15W) + Earphone (Battery Status:≤1%) +
	iWatch (Battery Status:≤1%)
Mode 14	AC Adapter+Phone coil (Qi protocol:15W) + Earphone (Battery Status:≤1%)
Mode 15	AC Adapter+Phone coil (Qi protocol:15W) + Watch (Battery Status:≤1%)
Mode 16	AC Adapter+Phone coil (Qi protocol:15W) + Earphone (Battery Status:≤1%) +
	iWatch (Battery Status:≤1%)

Note: All full load, half load, and no-load tests have been conducted in each mode, only the worst-case was recorded in the report. Mode 16 full load is the worst mode.

Description Of Support Units:

Auxiliary equipment								
Item	Equipment	Mfr/Brand	Model/Type No.	Wireless charging power parameters	Note			
E-1	Wireless charging load	YBZ	EESON	5 W/ 7.5 W/ 10 W/ 15W	AE			
E-2	Earphone	Apple	A2031	N/A	AE			
E-3	Apple watch	Apple Inc.	ultra 2	N/A	AE			
E-4	AC Adapter	HUAWEI	HW-050450C00	N/A	AE			



1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China











RF Exposure Evaluation

1 Measuring Standard

KDB 680106 D01 Wireless Power Transfer v04

2 Requirements

2 requirements		
Requirements of section 3 of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
(4)24		The device operate in the frequency range
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	Phone charging: 111-205 kHz, 363KHz
		Earphone charging: 111-205 kHz Watch charging: 300-350KHz
RF Exposure compliance may be ensured only for a minimum		The aggregate H-field and E-field strengths anywhere at or beyond
conditions at smaller distances can still be considered unlikely.separation distance that is greater than 20 cm, while use	Yes	20 cm surrounding the device, and 20 cm away from the top
		surface.











Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)	
	(A) Limits for Occ	cupational/Controlled Ex	posures		
0.3-3.0	614	1.63	*(100)	6	
3.0-30	1842/f	4.89/f	*(900/f²)	6	
30-300	61.4	0.163	1.0	6	
300-1500	/	/	f/300	6	
1500-100,000	/	Ī	5	6	
	(B) Limits for Genera	Population/Uncontrolle	ed Exposure		
0.3-1.34	614	1.63	*(100)	30	
1.34-30	824/f	2.19/f	*(180/f ²)	30	
30-300 27.5		0.073	0.2	30	
300-1500	1	1	f/1500	30	
1500-100,000	/	/	1.0	30	

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China










F=frequency in MHz
"=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).



3 Test Setup

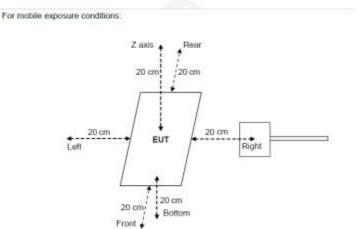

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the F and H field measurements.

5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	E-field	±1.06dB

Decision Rule

- □ Uncertainty is not included
- ☐ Uncertainty is included

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China











6 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	Sep. 29, 2024	Sep. 28, 2025
Magnetic field probe 100cm2	Narda	ELT probe 100cm2	M0675	Sep. 29, 2024	Sep. 28, 2025
Isotropic Electric field probe	Narda	EP-601	611WX70332	Sep. 29, 2024	Sep. 28, 2025

7 Test Result

Frequency		Test	Test	Test	Test	Test	Test	50%Limit	Limit	test	
Range (MHz)	Unit	Positio	Positio	Positio	Positio	Positio	Positio	S	S	result	
rtange (Wir 12)		n A	n B	n C	n D	n E	n F	(A/m)	(A/m)	rooun	
0.111-0.205	A (uT)	0.26	0.31	0.33	0.34	0.29	0.34				
	(A/m)	0.21	0.25	0.26	0.27	0.23	0.27				
0.363	A (uT)	0.34	0.30	0.31	0.31	0.30	0.28				
0.363	(A/m)	0.27	0.24	0.25	0.25	0.24	0.22	0.815	1.62	1.63	PASS
0.111-0.205	A (uT)	0.29	0.33	0.30	0.26	0.30	0.25	0.615	1.03	PASS	
0.111-0.205	(A/m)	0.23	0.26	0.24	0.21	0.24	0.20				
0.300-0.350	A (uT)	0.33	0.28	0.26	0.28	0.26	0.29				
	(A/m)	0.26	0.22	0.21	0.22	0.21	0.23		M		

The device could support transmission with ANT1, ANT2, ANT3 simultaneously.

MPE1/LIMIT+MPE2/LIMIT+MPE3/LIMIT=0.27/0.815 +0.26/0.815 +0.26/0.815=0.9693≤1

Note: Calculation: A/m=uT/1.25























Shenzhen ZKT Technology Co., Ltd.
1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China















Shenzhen ZKT Technology Co., Ltd. 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China













Shenzhen ZKT Technology Co., Ltd. 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China







