SECTION 3 LABELING INFORMATION

FCC ID: KE3TXRF1002

PRODUCT LABELING (MOST DEVICES)

Figure 1. FCC ID Label

FCC ID: KESTXRF1002

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC FIULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS.


(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

Figure 2. Location of Label on EUT

Actu	ıal size	of label is	2.680	by .	1 256	and	will	be	placed
on	BiTTum	HOUSING			of prod	uct.			· = = .

** NOTE: If assembly drawings are available that show the placement of the label on the product, please provide a copy of these to US Tech.

PRINT TIME

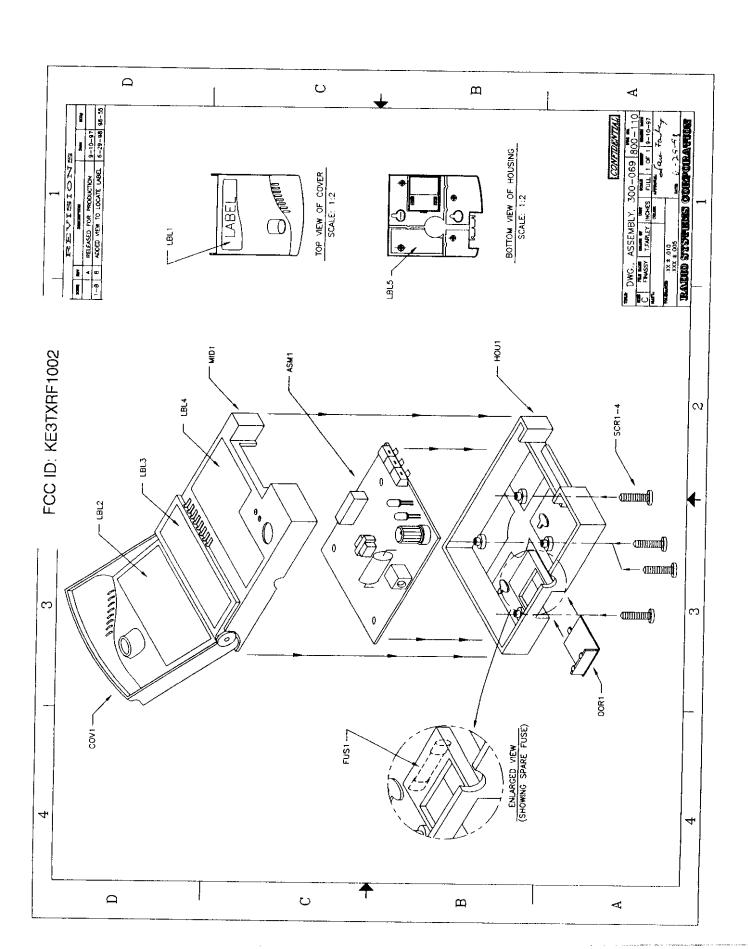

RF-1002 MFG. Date 7/97 S

PET TRAINING SYSTEM CLASSIFIED BY UNDERWRITERS BY AS TO ELECTRIC SHOCK AND FIRE ONLY \$M27 FOR UNSE ONLY WITH THE UNDERROUND FETCE RF-250, PG-250, PQU-250, AND UL 250 RECEIVERS. Caution: To reduce that of electric shock, DO NOT REMOVE OF COVER. Refer to qualified service personnel. Risk of electric shock install Transmitter Indoors. Do Not expose to rain. expose to rain. 110-120V, 60 Hz AC, 10 W Max

110-1200, 80 Hz AC, 10 W with part 15 of the FCC Rules. Operation is subject to the following law conditions: 1 This device must not cause harmful letter ference 2 This device must accept any interference received including interference that may cause

Lever March, de March

special note:

NOTE: A: MFG Date to be printed sequential by month as per placed sample (7/97)

For Example: March 1997 = 3/97 April = 4/97May = 5/97

NOTE B: MFG ID code letter: For example: S= SUGA W= WHITWAYS

NOTE C: Do not print box. For placement

Note D: See technical drawing for technical specifications.

RF-1002 label

Ption: FCC

RSC PART # 400-232

REVISION # A

RSC File Name: 400-232.cdr (core! ver 5.0)

Material: 008 Rigid white vinyl, .001 Polyester overlamination UL recognized

Date: 1/8/98

Drawn By: JN

Eystems Graphics Department

questions regarding artwork please contact: JuliAnne Nicholson

Colors: PMS: Black

17-5404

Systems

rporation