



RF Exposure report



The following samples were submitted and identified on behalf of the client as:

Product Name	Portable Computer
Brand Name	Framework
Model No.	FRANPC0000
Applicant	Framewok Computer Inc
	447 Sutter St, PMB 135, San Francisco, CA, 94108-4618, United States
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID	2AZR6-FRANBBAT10
Date of EUT Receipt	Jul. 15, 2022
Date of Test(s)	Aug. 07, 2022 ~ Aug. 12, 2022
Date of Issue In the configuration tested, the El	Sep. 20, 2022 JT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	PM / Jasper Wang	Approved By / John Yeh
Kuby Ou	Jasper Wang	John Teh
		Date: Sep. 20, 2022

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2207000203EN	00	Initial creation of document	5 - ,		*
TESA2207000203EN	01	Modify applicant's address	Sep. 13, 2022	Ruby Ou	*
TESA2207000203EN	02	Modify gain and co-sar	Sep. 20, 2022	Ruby Ou	
Note:					

1. The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Contents

1	GENERAL INFORMATION	. 5
	1.1 Test Methodology	. 5
	1.2 Description of EUT	. 6
	1.3 Maximum value	
	1.4 Antenna Information	. 7
2	MEASUREMENT SYSTEM	. 8
	2.1 Test Facility	. 8
	2.2 SAR System	. 9
	2.3 PD system	13
3	SAR SYSTEM VERIFICATION	
	3.1 Tissue Simulating Liquid	
	3.2 Tissue Simulant Liquid measurement	15
	3.3 Measurement results of Tissue Simulant Liquid	16
	3.4 The composition of the tissue simulating liquid:	
	3.5 System check	
	3.6 System check results	
4	PD SYSTEM VERIFICATION	
•	4.1 System check	
	4.2 System check result	
5	TEST CONFIGURATIONS	
·	5.1 Test Environment	
	5.2 Test Note	
	5.3 Test position	
	5.4 Test limit	
6	Maximum OUTPUT POWER	
•	6.1 WLAN	
	6.2 WIFI 6E	
	6.3 Bluetooth	
	6.4 BLE	
7	SUMMARY OF RESULTS	
•	7.1 Decision rules	
	7.2 Summary of SAR Results	
	7.3 Summary of PD Results	
	7.4 Reporting statements of conformity	
	7.5 Conclusion	
8	SIMULTANEOUS TRANSMISSION ANALYSIS	47
U	8.1 Simultaneous Transmission Scenarios:	
	8.2 Estimated SAR calculation	
	8.3 SPLSR evaluation and analysis	-
	8.4 Conclusion	
9	INSTRUMENTS LIST	
9 10	UNCERTAINTY BUDGET	52
11	SAR MEASUREMENT results	
12	SAR MEASUREMENT results	
12	SAR SISIEW CHECK LESUIS	00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: TESA2207000203EN Page: 4 of 91



13	pd	system check result	90
14		PÉNDIXES	
		SAR_Appendix A Photographs	
		SAR Appendix B DAE & Probe Cal. Certificate	
		SAR_Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.



GENERAL INFORMATION 1

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards: IEEE/ANSI C95.1-1992 IEEE 1528-2013 KDB447498D01v06 KDB865664D01v01r04 KDB865664D02v01r02 KDB248227D01v02r01 IEC/IEEE 62209-1528:2020 SPEAG DASY6 System Handbook SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz) IEC TR 63170:2018 IEC 62479:2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 **Description of EUT**

Product Name	Portable Computer					
Brand Name	Framework					
Model No.	FRANPC0000					
FCC ID	2AZR6-FRANBBAT10					
Integrated WLAN Module	Brand Name: Intel® Wi-Fi 6E AX211 Model Name: AX211NGW					
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/ HE160 Bluetooth BR/EDR/LE					
	WLAN802.11	Please refer to page 40-44				
Duty Cycle	Bluetooth	77.0%				
	802.11 b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)				
Currented redies (TV	802.11a/n/ac/ax	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)				
Supported radios (TX Frequency Range, MHz)	802.11ax	6.2GHz (5925.0 – 6425.0 MHz) 6.5GHz (6425.0 – 6525.0 MHz) 6.7GHz (6525.0 – 6875.0 MHz) 7.0GHz (6875.0 – 7125.0 MHz)				
	Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```



1.3 Maximum value

Summary of Maximum SAR and Power Density Value								
Mode	Highest SAR 1g Body (W/kg)	Highest APD (W/m^2)	Highest PD (W/m^2)					
Bluetooth(GFSK)	0.04	N/A	N/A					
2.4G WLAN	0.49	N/A	N/A					
5G WLAN	0.97	N/A	N/A					
6G WLAN	0.37	2.58	6.49					

1.4 Antenna Information

Laptop mode_VVLA	N																	
Vendor		AWAN																
Antenna		Main												Aux				
Part Number	AYF6Y-200005(DC33002SE00)								AYF6Y-200005(DC33002SE00)									
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5925~6425	6425~6525	6525~6875	6875~7125	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	2.72	1.31	1.17	1.03	0.88	0.87	0.81	0.92	0.91	1.62	1.67	1.76	0.36	2.30	2.34	0.10	0.08	0.13
Note: A	ote: Antenna information is provided by the applicant.																	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留約天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT SYSTEM 2

2.1 **Test Facility**

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier	
	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road,	SAR 2			
	Neihu District, Taipei City, 11493, Taiwan.	SAR 6	TW0029	TW3702	
	No. 2, Keji 1st Rd., Guishan	SAR 1			
Central RF Lab. (TAF code 3702)	Township, Taoyuan County, 33383, Taiwan	SAR 4	TW0028		
	No.134, Wu Kung Road, New	SAR 3			
	Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	SAR 7	TW0027		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SAR System 2.2

Block Diagram (DASY5)

A block diagram of the SAR measurement System is given in below. This SAR measurement system uses a computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|²)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

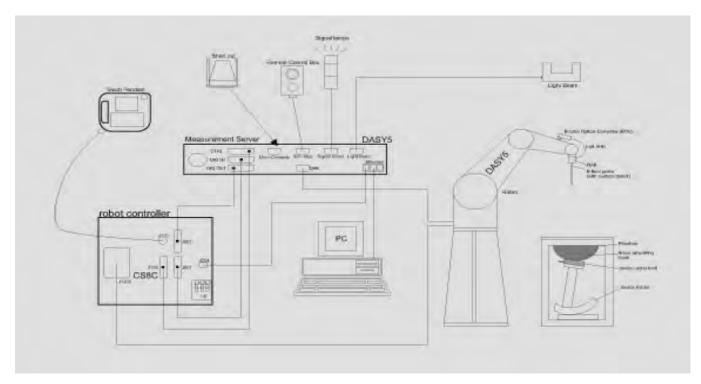

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

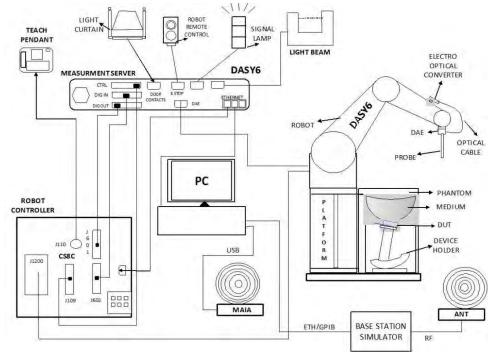

A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).

An isotropic field probe optimized and calibrated for the targeted measurement.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.

The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.

A computer running Windows 10 and the DASY6 software.

Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5250/5600/5750/6500/7000 MHz Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



PHANTOM (ELI)

Model	ELI						
Construction	The ELI phantom is used for compliance testing of handheld and body- mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.						
Shell Thickness	2 ± 0.2 mm						
Filling Volume	Approx. 30 liters						
Dimensions	Major axis: 600 mm Minor axis: 400 mm						

DEVICE HOLDER (ELI)

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	Device Holder
--------------	---	---------------

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488



PD system 2.3

Block Diagram (DASY6)

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

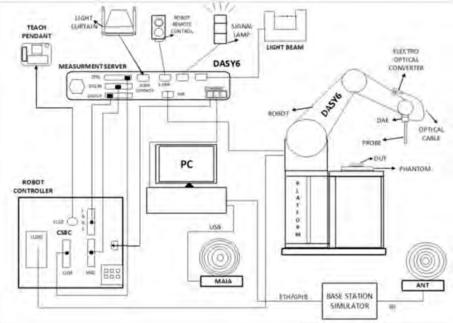

EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



	Two dipoles optimally arranged to obtain pseudo- vector information.Minimum 3 measurements/ point, 120° rotated around probe axis. Sensors (0.8mm length) printed on glass substrate protected by high density foam.Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.
Frequency Range	750 MHz – 110 GHz
Dynamic Range	< 20 V/m – 10,000 V/m with PRE-10 (min <
	50 V/m - 3000 V/m)
Position Precision	< 0.2 mm (DASY6)
Dimensions	Overall length: 337 mm (tip: 20 mm)
	Tip diameter: encapsulation 8 mm
	(internal sensor < 1mm)
	Distance from probe tip to dipole centers:
	< 2 mm. Sensor displacement to probe's
	calibration point: < 0.3 mm
Applications	E-field measurements of 5G devices and
	other mm-wave transmitters operating
	above 10GHz in < 2 mm distance from
	device (free-space).Power density, H-field
	and far-field analysis using total field
	reconstruction (cDASY6 5G module
sensor 1,5mm calibrated device	required)
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing for the evaluation of the antenna side of the device and the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40mm thick Rohacell plate used as a test bed, which has a loss tangent (tan δ) \leq 0.05 and a relative permittivity (ϵr) \leq 1.2. High-performance RF absorbers are placed below the foam.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SAR SYSTEM VERIFICATION 3

3.1 **Tissue Simulating Liquid**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

Tissue Simulant Liquid measurement 3.2

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



3.3 Measurement results of Tissue Simulant Liquid

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		2402	39.282	1.757	39.174	1.791	-0.28%	1.91%
		2412	39.265	1.766	39.157	1.800	-0.28%	1.91%
		2437	39.222	1.788	39.112	1.821	-0.28%	1.82%
	Aug, 07. 2022	2441	39.215	1.792	39.105	1.825	-0.28%	1.84%
		2450	39.200	1.800	39.089	1.833	-0.28%	1.83%
		2462	39.184	1.813	39.074	1.843	-0.28%	1.67%
		2480	39.160	1.832	39.051	1.860	-0.28%	1.53%
		5190	36.010	4.650	35.886	4.659	-0.34%	0.20%
		5210	35.990	4.670	35.863	4.679	-0.35%	0.19%
		5230	35.970	4.690	35.840	4.700	-0.36%	0.21%
		5250	35.950	4.710	35.818	4.720	-0.37%	0.21%
		5270	35.930	4.730	35.795	4.741	-0.38%	0.23%
		5290	35.910	4.750	35.772	4.762	-0.38%	0.25%
		5310	35.890	4.770	35.749	4.782	-0.39%	0.25%
	Aug, 08. 2022	5530	35.605	4.997	35.772	5.010	0.47%	0.27%
		5600	35.500	5.070	35.418	5.081	-0.23%	0.22%
Head		5610	35.490	5.080	35.406	5.091	-0.24%	0.22%
		5670	35.430	5.140	35.338	5.153	-0.26%	0.25%
		5690	35.410	5.160	35.315	5.173	-0.27%	0.25%
		5710	35.390	5.180	35.292	5.194	-0.28%	0.27%
		5750	35.350	5.220	35.246	5.235	-0.29%	0.29%
		5755	35.345	5.225	35.240	5.240	-0.30%	0.29%
		5775	35.325	5.245	35.218	5.261	-0.30%	0.31%
		5795	35.305	5.265	35.195	5.281	-0.31%	0.30%
		6025	35.070	5.510	34.930	5.519	-0.40%	0.17%
		6185	34.878	5.698	34.738	5.686	-0.40%	-0.22%
		6345	34.686	5.887	34.546	5.854	-0.40%	-0.56%
	Aug, 09. 2022	6500	34.500	6.070	34.360	6.017	-0.41%	-0.87%
		6505	34.494	6.076	34.354	6.023	-0.41%	-0.87%
		6665	34.302	6.261	34.162	6.193	-0.41%	-1.09%
		6825	34.110	6.447	33.970	6.364	-0.41%	-1.29%
	Aug, 10. 2022	6985	33.918	6.633	33.778	6.536	-0.41%	-1.46%
	Aug, 10. 2022	7000	33.900	6.650	33.760	6.552	-0.41%	-1.47%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



3.4 The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:


Broad-band head tissue simulating	SPEAG Product	Frequency range (MHz)	Main Ingredients
liquids	HBBL600- 10000V6	600 - 10000	Water, Oil

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values.

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

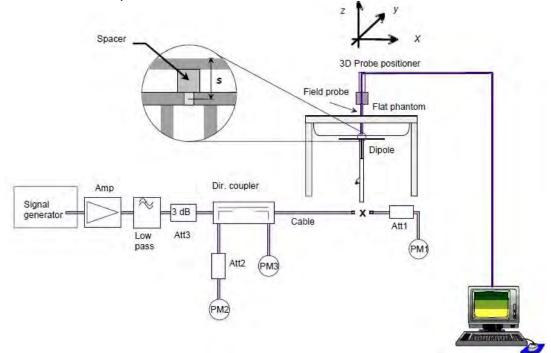

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



System check results 3.6

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.8	12.6	50.4	-4.55	± 10%	Aug.07,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81	8.12	81.2	0.25	± 10%	Aug.08,2022
D5GHzV2	1023	5600	84.4	8.04	80.4	-4.74	± 10%	Aug.08,2022
D5GHzV2	1023	5750	81	8.1	81	0.00	± 10%	Aug.08,2022

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	291	29.8	298	2.41	± 10%	Aug.09,2022
D7GHzV2	1007	7000	275	27.2	272	-1.09	± 10%	Aug.10,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```




PD SYSTEM VERIFICATION 4

4.1 System check

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

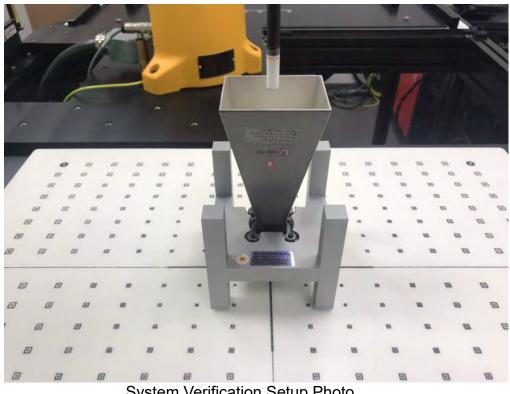

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



4.2 System check result

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (MHz)	PD Verification Source (MHz)	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured 4cm^2 (W/m^2)	Target 4cm^2 (W/m^2)	Deviation (dB)	Date
10000	10000	9579	558	10	86.1	48.4	51.7	-0.29	Aug.11,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



TEST CONFIGURATIONS 5

5.1 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

5.2 **Test Note**

• General: Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).

General: The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

General: During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.

General: According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is \leq 100 MHz.

General: According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~ 10% from the 1-g SAR limit).

• WLAN 2.4GHz: 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

 WLAN 2.4GHz: 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

• WLAN 5GHz: Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is \leq 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

 WLAN 5GHz: Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.

 WLAN 6GHz: Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209- 1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.

• WLAN 6GHz: Per equipment manufacturer guidance, power density was measured at d=2mm with the grid step (0.0625λ) for determining compliance at d=2mm.

• WLAN 6GHz: According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.

 WLAN 6GHz: Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



5.3 **Test position**

SAR test position (0mm)

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Test limit 5.4

§ 2.1093(d)(1)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in § 1.1310 as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in § 1.1310(a) through (c) of this chapter shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure. Radiofrequency radiation exposure limits.

§ 1.1310(a)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

§ 1.1310(b)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits. § 1.1310(c)

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatialaverage SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5, copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in Section 4.1 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



	100			
Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
	(i) Limits for Oc	cupational/Controlled Ex	posure	
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500- 100,000			5	<6
	(ii) Limits for Genera	I Population/Uncontrolle	d Exposure	
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500- 100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density. Table 1 to § 1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



MAXIMUM OUTPUT POWER 6

6.1 **WLAN**

		1	Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.00	19.96
	802.11b	6	2437	1Mbps	20.00	19.99
		11	2462		20.00	19.94
	802.11g	1	2412		18.75	18.65
		6	2437	6Mbps	20.00	19.71
		11	2462		18.75	18.29
	802.11n20-HT0	1	2412	MCS0	18.75	18.07
		6	2437		20.00	19.72
2.45GHz		11	2462		18.75	18.12
2.400112		1	2412		18.75	17.54
	802.11ax20-HE0	6	2437	MCS0	20.00	19.80
		11	2462		18.75	17.49
		3	2422		16.50	16.23
	802.11n40-HT0	6	2437	MCS0	17.46	17.18
		9	2452		17.00	15.92
		3	2422		16.50	16.04
	802.11ax40-HE0	6	2437	MCS0	16.79	16.74
		9	2452		17.00	15.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```



Report No.: TESA2207000203EN Page: 28 of 91

			Vlain			
		 	viain			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		18.00	17.82
	000 11-	40	5200	CMbas	18.00	17.71
	802.11a	44	5220	6Mbps	18.00	17.83
		48	5240		18.00	17.74
	802.11n20-HT0	36	5180		18.00	17.62
		40	5200	MCS0	18.00	17.78
		44	5220		18.00	17.76
		48	5240		18.00	17.83
		36	5180		18.00	17.88
5.15-5.25 GHz	802.11ax20-HE0	40	5200	MCS0	18.00	17.77
5.15-5.25 GHZ	002.11ax20-ne0	44	5220	IVICSU	18.00	17.87
		48	5240		18.00	17.88
	802.11n40-HT0	38	5190	MCS0	17.75	17.25
	002.11140-010	46	5230	10030	18.00	17.85
	802.11ax40-HE0	38	5190	MCS0	17.75	17.25
		46	5230	IVICSU	18.00	17.79
	802.11ac80-VHT0	42	5210	MCS0	18.00	16.87
	802.11ax80-HE0	42	5210	MCS0	18.00	17.29
	802.11ac160-VHT0	50	5250	MCS0	15.25	14.78
	802.11ax160-HE0	50	5250	MCS0	15.25	14.66

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		18.00	17.72
	802.11a	56	5280	6Mbps	18.00	17.79
	002.11a	60	5300	equivio	18.00	17.70
		64	5320		18.00	17.72
	802.11n20-HT0	52	5260	MCS0	18.00	17.75
		56	5280		18.00	17.86
		60	5300		18.00	17.77
		64	5320		18.00	17.71
5.25-5.35 GHz		52	5260		18.00	17.82
5.25-5.55 GHZ	802.11ax20-HE0	56	5280	MCSO	18.00	17.74
	002.11ax20-ne0	60	5300	IVICSU	18.00	17.75
		64	5320		18.00	17.75
	802.11n40-HT0	54	5270	MCSO	18.00	17.96
	002.11140-010	62	5310	Data Rate Power + Max. Tolerance (dBm) 6Mbps 18.00 18.00 18.00 18.00 18.00 MCS0 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00 18.00	16.44	
	802.11ax40-HE0	54	5270	MCSO	18.00	17.88
	002.11aX40-DEU	62	5310	10030	17.00	16.69
	802.11ac80-VHT0	58	5290	MCS0	17.75	17.46
	802.11ax80-HE0	58	5290	MCS0	17.75	17.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: TESA2207000203EN Page: 29 of 91

			Vlain			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		18.00	17.79
	000.44-	120	5600	Ch lleve e	18.00	17.85
	802.11a	140	5700	6Mbps	18.00	17.80
		144	5720	1	18.00	17.78
		100	5500		18.00	17.71
	802.11n20-HT0	120	5600		18.00	17.74
		140	5700	MCS0	18.00	17.79
		144	5720		18.00	17.69
		100	5500	MCS0	18.00	17.79
		120	5600		18.00	17.70
	802.11ax20-HE0	140	5700		18.00	17.75
		144	5720		18.00	17.71
		102	5510		18.00	17.81
5 0011		118	5590		18.00	17.81
5.6GHz	802.11n40-HT0	134	5670	MCS0	18.00	17.78
		142	5710		18.00	17.69
		102	5510		18.00	17.81
		118	5590	1000	18.00	17.85
	802.11ax40-HE0	134	5670	MCS0	18.00	17.68
		142	5710		18.00	17.74
		106	5530		18.00	17.99
	802.11ac80-VHT0	122	5610	MCS0	18.00	17.96
		138	5690	1	18.00	17.98
		106	5530		18.00	17.80
	802.11ax80-HE0	122	5610	MCS0	18.00	17.84
		138	5690	1	18.00	17.78
	802.11ac160-VHT0	114	5570	MCS0	15.50	15.35
	802.11ax160-HE0	114	5570	MCS0	15.50	15.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TESA2207000203EN Page: 30 of 91

			Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		18.00	17.84
	802.11a	157	5785	6Mbps	18.00	17.82
		165	5825		18.00	17.84
	802.11n20-HT0	149	5745	MCS0	18.00	17.77
		157	5785		18.00	17.72
		165	5825		18.00	17.79
		149	5745		18.00	17.84
5.8GHz	802.11ax20-HE0	157	5785	MCS0	18.00	17.68
		165	5825		18.00	17.67
	802.11n40-HT0	151	5755	MCS0	18.00	17.66
	002.11140-1110	159	5795	10030	18.00	17.72
	802.11ax40-HE0	151	5755	MCS0	18.00	17.76
		159	5795	IVIC SU	18.00	17.68
	802.11ac80-VHT0	155	5775	MCS0	18.00	17.98
	802.11ax80-HE0	155	5775	MCS0	18.00	17.76

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.00	19.97
	802.11b	6	2437	1Mbps	20.00	19.98
		11	2462		20.00	19.99
	802.11g	1	2412		19.50	19.13
		6	2437	6Mbps	20.00	19.84
		11	2462		18.75	18.60
	802.11n20-HT0	1	2412	MCS0	19.50	18.06
		6	2437		20.00	19.89
2.45GHz		11	2462		18.75	17.65
2.400112		1	2412		17.90	17.47
	802.11ax20-HE0	6	2437	MCS0	20.00	19.77
		11	2462		18.75	17.40
		3	2422		16.25	16.00
	802.11n40-HT0	6	2437	MCS0	17.36	17.07
		9	2452		16.00	15.76
		3	2422		16.25	15.96
	802.11ax40-HE0	6	2437	MCS0	16.74	16.66
		9	2452		16.00	15.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: TESA2207000203EN Page: 31 of 91

			A			
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		18.00	17.64
	802.11a	40	5200	<u>CMbas</u>	18.00	17.75
	802.11a	44	5220	6Mbps	18.00	17.73
		48	5240		18.00	17.81
	802.11n20-HT0	36	5180		18.00	17.65
		40	5200	MCS0	18.00	17.64
		44	5220		18.00	17.71
		48	5240		18.00	17.75
		36	5180	MCS0	18.00	17.62
5.15-5.25 GHz	802.11ax20-HE0	40	5200		18.00	17.77
5.15-5.25 GHZ	002.11ax20-ne0	44	5220	IVICSU	18.00	17.70
		48	5240		18.00	17.77
	802.11n40-HT0	38	5190	MCS0	18.00	17.71
	002.11140-010	46	5230	10030	18.00	17.77
	802.11ax40-HE0	38	5190	MCS0	18.00	17.67
		46	5230	10030	18.00	17.79
	802.11ac80-VHT0	42	5210	MCS0	18.00	17.97
	802.11ax80-HE0	42	5210	MCS0	18.00	17.75
	802.11ac160-VHT0	50	5250	MCS0	16.00	15.73
	802.11ax160-HE0	50	5250	MCS0	16.00	15.67

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		18.00	17.70
	802.11a	56	5280	6Mbps	18.00	17.78
	002.11a	60	5300	equivio	18.00	17.82
		64	5320		18.00	17.81
	802.11n20-HT0	52	5260	MCS0	18.00	17.87
		56	5280		18.00	17.81
		60	5300		18.00	17.74
		64	5320		18.00	17.82
5.25-5.35 GHz		52	5260		18.00	17.82
5.25-5.55 GHZ	802.11ax20-HE0	56	5280	MCS0	18.00	17.86
	002.118X20-HEU	60	5300	IVICSU	18.00	17.72
		64	5320		18.00	17.71
	802.11n40-HT0	54	5270	MCS0	18.00	17.77
	002.11140-010	62	5310	10030	18.00	17.88
	802.11ax40-HE0	54	5270	MCS0	18.00	17.73
	002.11ax40-nE0	62	5310	IVICSU	18.00	17.69
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.81
	802.11ax80-HE0	58	5290	MCS0	18.00	17.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: TESA2207000203EN Page: 32 of 91

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		18.00	17.83
	000 11-	120	5600	GMbaa	18.00	17.67
	802.11a	140	5700	6Mbps	18.00	17.83
		144	5720		18.00	17.66
		100	5500		18.00	17.68
		120	5600		18.00	17.79
	802.11n20-HT0	140	5700	MCS0	18.00	17.67
		144	5720		18.00	17.78
	802.11ax20-HE0	100	5500		18.00	17.83
		120	5600	MOOO	18.00	17.65
		140	5700	MCS0	18.00	17.69
		144	5720		18.00	17.75
		102	5510	1000	18.00	17.77
		118	5590		18.00	17.82
5.6GHz	802.11n40-HT0	134	5670	MCS0	18.00	17.77
		142	5710		18.00	17.72
		102	5510		18.00	17.80
		118	5590	MOGO	18.00	17.83
	802.11ax40-HE0	134	5670	MCS0	18.00	17.76
		142	5710		18.00	17.70
		106	5530		18.00	17.84
	802.11ac80-VHT0	122	5610	MCS0	18.00	17.91
		138	5690]	18.00	17.96
		106	5530		18.00	17.74
	802.11ax80-HE0	122	5610	MCS0	18.00	17.80
		138	5690	1	18.00	17.79
	802.11ac160-VHT0	114	5570	MCS0	16.25	15.85
	802.11ax160-HE0	114	5570	MCS0	16.25	15.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Report No.: TESA2207000203EN Page: 33 of 91

			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		18.00	17.80
	802.11a	157	5785	6Mbps	18.00	17.82
		165	5825		18.00	17.78
	802.11n20-HT0	149	5745	MCS0	18.00	17.65
		157	5785		18.00	17.68
		165	5825		18.00	17.81
		149	5745		18.00	17.69
5.8GHz	802.11ax20-HE0	157	5785	MCS0	18.00	17.77
		165	5825		18.00	17.80
	802.11n40-HT0	151	5755	MCS0	18.00	17.70
	002.11140-010	159	5795	10030	18.00	17.76
	802.11ax40-HE0	151	5755	MCS0	18.00	17.67
		159	5795	10030	18.00	17.76
	802.11ac80-VHT0	155	5775	MCS0	18.00	17.99
	802.11ax80-HE0	155	5775	MCS0	18.00	17.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		4.63	4.16
	802.11ax20-HE0	45	6175	MCS0	4.57	4.12
		93	6415		4.57	4.47
		3	5965	MCS0	8.03	7.92
	802.11ax40-HE0	43	6165		7.71	7.62
U-NII-5		91	6405		7.88	7.66
6.2GHz		7	5985		10.25	10.03
	802.11ax80-HE0	39	6145	MCS0	10.33	9.90
		87	6385		9.97	9.85
		15	6025		13.00	12.73
	802.11ax160-HE0	47	6185	MCS0	13.00	12.99
		79	6345		13.00	12.45

Main

	IVIali I								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		97	6435		4.95	4.91			
	802.11ax20-HE0	105	6475	MCS0	4.70	4.66			
		113	6515		4.71	4.67			
U-NII-6	802.11ax40-HE0	99	6445	MCS0	8.05	7.60			
6.5GHz	002.118X40-DEU	107	6485	IVIC SU	7.96	7.69			
		103	6465	MCSO	10.50	10.26			
	802.11ax80-HE0	119	6545	MCS0	10.43	10.28			
	802.11ax160-HE0	111	6505	MCS0	13.00	12.90			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No.: TESA2207000203EN Page: 35 of 91

	Main								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		117	6535		4.64	4.26			
	802.11ax20-HE0	149	6695	MCS0	4.45	4.03			
		181	6855		5.08	5.02			
		115	6525		7.92	7.83			
U-NII-7	802.11ax40-HE0	147	6685	MCS0	7.78	7.74			
6.7GHz		179	6845		7.64	7.36			
0.7 GHZ		135	6625		9.86	9.67			
	802.11ax80-HE0	151	6705	MCS0	10.00	9.87			
		167	6785		10.02	9.89			
	802.11ax160-HE0	143	6665	MCS0	13.00	12.60			
	002.11ax100-HEU	175	6825	10030	13.00	12.98			

	Main									
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		185	6875		5.06	4.89				
	802.11ax20-HE0	209	6995	MCS0	5.08	4.96				
		233	7115		0.77	0.52				
U-NII-8	802.11ax40-HE0	187	6885	MCS0	7.84	7.59				
7.0GHz	002.11aX40-NEU	227	7085	10030	8.16	7.74				
		183	6865		10.17	9.86				
	802.11ax80-HE0	199	6945	MCS0	10.62	10.33				
		215	7025		10.39	10.02				
	802.11ax160-HE0	207	6985	MCS0	13.00	12.80				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

```
www.sgs.com.tw
```



Report No.: TESA2207000203EN Page: 36 of 91

	•		Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		4.61	4.13
	802.11ax20-HE0 802.11ax40-HE0	45	6175	MCS0	4.12	3.96
		93	6415		4.21	4.04
		3	5965	MCS0	7.32	7.26
		43	6165		7.32	7.23
U-NII-5		91	6405		7.64	7.58
6.2GHz		7	5985		10.20	9.99
	802.11ax80-HE0	39	6145	MCS0	10.27	9.87
		87	6385		10.01	9.82
		15	6025		13.00	12.68
	802.11ax160-HE0	47	6185	MCS0	13.00	12.98
		79	6345		13.00	12.76

	Aux								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	802.11ax20-HE0	97	6435	MCS0	4.94	4.86			
		105	6475		5.01	4.67			
		113	6515		4.80	4.48			
U-NII-6	802.11ax40-HE0	99	6445	MCS0	8.00	7.58			
6.5GHz	002. I 18X40-NEU	107	6485	10030	8.06	7.66			
	802.11ax80-HE0	103	6465	MCS0	10.53	10.30			
		119	6545		10.53	10.24			
	802.11ax160-HE0	111	6505	MCS0	13.00	12.90			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Report No.: TESA2207000203EN Page: 37 of 91

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		4.30	4.17
	802.11ax20-HE0	149	6695	MCS0	4.83	4.57
		181	6855		4.13	4.08
		115	6525		8.02	7.98
U-NII-7	802.11ax40-HE0	147	6685	MCS0	7.71	7.66
6.7GHz		179	6845		7.39	7.34
0.7 GHZ		135	6625		10.23	9.86
	802.11ax80-HE0	151	6705	MCS0	10.00	9.88
		167	6785		9.87	9.67
	802.11ax160-HE0	143	6665	MCS0	13.00	12.37
	002.11ax100-HEU	175	6825	10030	13.00	12.93

	Aux														
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)									
		185	6875		4.58	4.48									
	802.11ax20-HE0	209	6995	MCS0	4.54	4.41									
		233	7115		0.46	0.40									
U-NII-8	802.11ax40-HE0	187	6885	MCS0	7.56	7.40									
7.0GHz	002.11ax40-ne0	227	7085	10030	7.71	7.67									
1.000		183	6865		10.06	9.77									
	802.11ax80-HE0	199	6945	MCS0	10.52	10.40									
		215	7025		10.08	10.06									
	802.11ax160-HE0	207	6985	MCS0	13.00	12.81									

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Bluetooth 6.3

			1Mbps		2Mbps		3Mbps		
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
	CH 00	2402		8.51		7.17		7.08	
BR/EDR	CH 39	2441	10.50	8.60	9.50	7.40	9.50	7.36	
	CH 78	2480		8.96		7.61		7.52	

6.4 BLE

Mode	Channel	Frequency	(GFSK
Mode	Channer	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402		7.39
BLE_1M	CH 19	2440	9	7.78
	CH 39	2480		7.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2.4G b duty

SG:

(8.34/8.38=0.995) Scaling Factor=1.005

									Analyzer - Sw		ysight S	
Marker	23456	10:52:32 PM May TRACE 1	ALIGN AUTO e: Log-Pwr	Avg Ty	SENSE:IN			ns	50 Ω 38000	RF 3 Δ 8.	ker	Mar
Select Marker 3	0 ms	DET P	Δ		Free Run n: 30 dB		D: Fast ↔ ain:Low	PN IFG	7 20.00 (B/div	
Norma	3∆4			~~ -	Xa				20.00			10.0 0.00 -10.0
Delta												-20.0 -30.0 -40.0
Fixed▷												-50.0 -60.0 -70.0
Of		Spai .00 ms (100 FUNCTION V4	Sweep 20	INCTION F	lz	3.0 MI Y	VBW	Hz		.4370 3.0 M	BW	Res
Properties≯	=				.10 dB 7 dBm .00 dB 7 dBm	-5.9	0 ms (Δ) 6 ms 0 ms (Δ) 6 ms	10.3 8.38	(Δ) (Δ)	1 t 1 t 1 t 1 t	Δ2 F Δ4 F	1 2 3 4 5 6
More 1 of 2												7 8 9 10 11
	•		STATUS									MSG

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

BT duty

SG:

(2.89/3.75=0.77) Scaling Factor=1.299

								lyzer - Swe			ight S	
Marker	01:02:56 AM May 19, 2022 TRACE 1 2 3 4 5 6	pe: Log-Pwr	A.v.a	SENSE:INT			DC	50 Ω	RF			R
Select Marker	TYPE WWWWWW DET P N N N N N	pe: Log-Pwr	AVg	g: Free Run ten: 30 dB		PNO: Fast IFGain:Low	ns	5000 i	3.750	Δ	er	ark
3	Mkr3 3.750 ms -0.10 dB	Δ					Bm	:0.00 d	of 20	Б	/div	dD
								0.00 0		ĸ	Jaiv	g
Norm).O
Norm												00
			3∆4 _	1∆2			s. <i>11</i>					0.0
				Y			X 2					.0
Delt												
	Sil a Jungahla			- Jillen				http://www.com/	da			.0
Fixed	Astronomical							and and a second				.0
Fixed												- 1
												1.0
	Span 0 Hz						Hz	000 G	20000	.402	er 2	ent
0	0.00 ms (1001 pts)	Sweep 10		1Hz	BW 3.0	VB		2	MHz	3.0 I	BW	!s∣
	FUNCTION VALUE	UNCTION WIDTH	FUNCTION				Х		CL	RC S		
				0.78 dB .86 dBm		2.890 ms 2.090 ms)	t (∆) t		\2 F	
Properties				-0.10 dB	(Δ)	3.750 ms)	t (Δ)	1 1	4	3 4
Troperaes	=			.86 dBm		2.090 ms			t	1 1	F	 ;
												5
Мо												3
1 of))
												í
	•				_							
		STATUS										

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5G n40 duty

SG;

(4.02/4.1=0.98) Scaling Factor=1.02

						- Swept SA	Analyzer -	ctrum /		
Marker	08:58:36 AM May 19, 2022 TRACE 1 2 3 4 5 6	Avg Type: Log-Pwr	SENSE:INT			50 Ω DC		RF	-	R
Select Marker	TYPE WWWWWW DET P N N N N	Avg Type: Log-Pwr	ree Run : 30 dB		PNO: Fast IFGain:Low)0 ms	.1000	Δ4	ker 3 /	lari
3	Mkr3 4.100 ms -1.83 dB _	Δ)0 dBm	f 20.0	Re	3/div	
Norma										. og 1 10.0
										0.00 10.0
Delta	3∆4									20.0 30.0
	m uhmisteridenter	Harlinen with march and a star of the second	performant man hours	w-with the	Metylawin Investigant	where all on the start of the	oper Managerand	hayner haw	we man	40.0
Fixed										50.0 60.0
										70.0
Of	Span 0 Hz 0.00 ms (1001 pts)	Sweep 10	z	W 3.0 F	VB	0 GHz			ter 5.3 BW 3.	
	FUNCTION VALUE	ION FUNCTION WIDTH	FUNC		4.020 ms	Х	(Δ)	t	$\frac{1}{\Delta 2} \frac{1}{2}$	
			dBm	-36	4 190 ms				F 1	2
Properties	E		dBm 33 dB dBm	(Δ)	4.190 ms 4.100 ms 4.190 ms		(Δ)	t t	F 1 ∆4 1 F 1	3 4 5
	E		33 dB	(Δ)	4.100 ms		(Δ)	t	Δ4 1	3 4 5 6 7 8
Properties More 1 of			33 dB	(Δ)	4.100 ms		(Δ)	t	Δ4 1	3 4 5 6 7

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.sgs.com.tw

5G ac80 duty

SG

(4.01/4.1=0.98) Scaling Factor=1.02

ACE 1 2 3 4 5 6 Marker Marker Select Marker 3 -1.20 dB Normal Delta		SENSE:INT Trig: Free Run #Atten: 30 dB	PNO: Fast ↔ IFGain:Low	F 50Ω DC		B/div
Select Marker 3 1.20 dB Normal 3 3 4 0 0 0 0 0 0 0 0 0 0 0 0 0	ΔMkr3 4.100 ms -1.20 dB		PNO: Fast ↔ IFGain:Low			B/div
.100 ms 3' -1.20 dB Norma	-1.20 dB		n	ef 20.00 dBm	Rei	
⊂ 3∆4 — Delta						-
C 3∆4 — Delta						
∑3∆4 Yelwahayouahiliya 						
∑3∆4 Vihethanathitan						
∑3∆4 Vihethanathitan						í 📃
						í
Fixed	an additional to a the second of the second	-	montesites	hand the contraction of the second		
Fixed		Lana La Mana	here discontration and the low have	and a second		
						í 🗌
						í 📃
	Span 0 Hz		: VBW 3	000000 GHz	5.2100 3.0 M	
<u> </u>	Sweep 10.00 ms (1001 pts)					
	CTION FUNCTION WIDTH FUNCTION VALUE	Y F -0.48 dB	X 4.010 ms (Δ)	(Δ)	TRC SCL	
		-39.51 dBm -1.20 dB	4.870 ms 4.100 ms (Δ)	(Δ)	1 t	F Δ4
Properties►		-39.51 dBm	4.870 ms	(Δ)	1 t	F
=	=					
More						
1 of 2						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6G ax160 duty

SG

(2.58/2.65=0.934) Scaling Factor=1.07

									zer - Swept		spectr		
Marker	M Jun 27, 2022		: Log-Pwr	Avg Type	SE:INT	SEN			<u>50 Ω</u> 000 m	RF 2 65	3 ^		<mark>X R</mark> Mar
Select Marker	.650 ms	Mkr3 2.	_			Trig: Free #Atten: 30	Fast ↔ ∷Low	PNO: IFGai					
	1.69 dB							m 👘	0.00 dE	Ref 20	/	B/div	10 d Log
Norma													10.0 0.00
										_			-10.0
Delta			<u>3</u> Δ							-			-20.0
	holashka ghatili			fe ^{t b} irgestations	2	whare an and	(milesia)	a shattan	ly the bear	Newway	i ttinii	well	-30.0 -40.0
			ļ			1				+			-50.0
Fixed▷													-60.0 -70.0
	pan 0 Hz							,	000 GH	5000	6.02	L	
Off	1001 pts)		Sweep 10			3.0 MHz	VBW	-		MHz			
	ON VALUE	FUNCTION	CTION WIDTH	NCTION FUI		Y 3.99	ms (Δ)	× 2.580		SCL t (Δ	TRC 1	MODE ∆2	MKR 1
Properties►					m IB	-40.27 dE 1.69 d -40.27 dE	ms ms(∆)	5.000		t t (Δ t	1 1 1	F ∆4 F	2 3 4 5
													6 7
More 1 of 2													8 9 10
	• •				-								11
													ISG

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF RESULTS 7

7.1 **Decision rules**

Reported measurement data comply with Test Methodology in section 1.1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

7.2 Summary of SAR Results

WL	AN
----	----

VVLAIN												
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	D
wode	Anterina	Position	(mm)	Сп	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	D
WLAN 802.11b	Main	Bottom Surface	0	6	2437	20.00	19.99	1.005	100.23%	0.157	0.158	001
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	D
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11ac(80M) 5.2G	Main	Bottom Surface	0	42	5210	18.00	16.87	1.020	129.72%	0.474	0.627	002
WLAN 802.11ac(80M) 5.2G	Main	Bottom Surface	0	42	5210	17.00	16.98	1.020	100.46%	0.385	0.395	003
Mode	Antenna	Position	Distance (mm)	сн	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.3G	Main	Bottom Surface	0	54	5270	18.00	17.96	1.020	100.93%	0.557	0.573	004
Mode	Antenna	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling		over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	106	5530	18.00	17.99	1.020	100.23%	0.853	0.872	-
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface		138	5690	18.00	17.98	1.020	100.46%	0.948	0.971	005
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	138	5690	18.00	17.98	1.020	100.46%	0.913	0.936	-
Mode	Antenna	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	D
WLAN 802.11ac(80M) 5.8G	Main	Bottom Surface	0	155	5775	18.00	17.98	1.020	100.46%	0.783	0.802	006
WLAN 802.11ac(80NI) 5.8G	Widili	Bottom Sunace	0	155	5//5	10.00	17.90	1.020	100.40%	0.765	0.002	000
Mode	Antenna	Position	Distance (mm)	сн	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg) Reported	D
						. ,	. ,			WedSureu	Reported	
WLAN 802.11b	Aux	Bottom Surface	0	1	2412	20.00	19.97	1.005	100.69%	0.441	0.446	
WLAN 802.11b	Aux	Bottom Surface	0	6	2437	20.00	19.98	1.005	100.46%	0.489	0.494	007
WLAN 802.11b	Aux	Bottom Surface	0	11	2462	20.00	19.99	1.005	100.23%	0.435	0.438	-
Mode	Antenna	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
Bluetooth(GFSK)	Aux	Bottom Surface	0	78	2480	10.50	8.96	1.299	142.56%	0.024	0.044	008
Mode	Antenna	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged S		D
WLAN 802.11ac(80M) 5.2G	Aux	Bottom Surface	0	42	5210	18.00	17.97	1.020	100.69%	0.515	0.529	009
WLAN 802.11ac(80M) 5.2G	Aux	Bottom Surface	0	42	5210	17.00	16.98	1.020	100.46%	0.415	0.425	010
Mode	Antenna	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	D
WLAN 802.11ac(80M) 5.3G	Aux	Bottom Surface	0	58	5290	18.00	17.81	1.020	104.47%	0.513	0.547	011
**Emix 002.11ac(00W) 0.3G	Aux	Dottom Sundce	U	30	5290	10.00	17.01	1.020	104.47.70	0.013	0.047	UTI
		Position	Distance (mm)	сн	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
Mode	Antenna	1 OSMON	(((((((((((((((((((((((((((((((((((((((WedSureu	Reported	
				106	5530	18.00	17.84	1.020	103 75%			012
Mode WLAN 802.11ac(80M) 5.6G Mode	Antenna Aux Antenna	Bottom Surface Position	Distance (mm)	106 CH	5530 Freq. (MHz)	18.00 Max. Rated Avg. Power + Max. Tolerance (dBm)	17.84 Measured Avg. Power (dBm)	1.020 Duty cycle scaling	103.75% Power scaling	0.752	0.796 over 1g (W/kg)	012 ID
WLAN 802.11ac(80M) 5.6G Mode	Aux	Bottom Surface Position	0 Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	0.752 Averaged SAR Measured	0.796 over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.6G	Aux	Bottom Surface	0 Distance		Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	0.752 Averaged SAR	0.796 over 1g (W/kg)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw





WIFI 6E

			Distance		Freq.	Max. Rated Avg.	Measured	Duty cycle	Power	Averaged SAR	Rover 1g (W/kg)		ted APD (4cm^2)	_
Mode	Antenna	Position	(mm)	СН	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	Measured	Reported	D
U-NII-5 6.2GHz802.11ax(160M)	Main	Bottom Surface	0	15	6025	13.00	12.73	1.070	106.41%	0.245	0.279	1.810	2.061	014
U-NII-5 6.2GHz802.11ax(160M)	Main	Bottom Surface	0	47	6185	13.00	12.99	1.070	100.23%	0.233	0.250	1.710	1.834	-
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)		ted APD (4cm ²)	D
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	_
U-NII-6 6.5GHz802.11ax(160M)	Main	Bottom Surface	0	111	6505	13.00	12.90	1.070	102.33%	0.285	0.312	2.010	2.201	015
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	t over 1g (W/kg)		ted APD (4cm ²)	D
induc	7 GROTING	1 000001	(mm)	0.11	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	2
U-NI-7 6.7GHz802.11ax(160M)	Main	Bottom Surface	0	143	6665	13.00	12.60	1.07	109.65%	0.311	0.365	2.180	2.558	-
U-NII-7 6.7GHz802.11ax(160M)	Main	Bottom Surface	Ö	175	6825	13.00	12.98	1.070	100.46%	0.346	0.372	2.400	2.580	016
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	Rover 1g (W/kg)		ted APD (4cm ²)	D
induc	7 GROTING	1 Gallon	(mm)	0.11	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	2
U-NII-8 7.0GHz 802.11ax (160M)	Main	Bottom Surface	0	207	6985	13.00	12.80	1.070	104.71%	0.259	0.290	1.750	1.961	017
Mode		Position	Distance	СН	Freq.	Max. Rated Avg.	Measured	Duty cycle	Power	Averaged SAR	Rover 1g (W/kg)		ted APD (4cm ²)	D
Mode	Antenna	Position	(mm)	СН	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	Measured	Reported	
U-NII-5 6.2GHz802.11ax(160M)	Aux	Bottom Surface	0	15	6025	13.00	12.68	1.070	107.65%	0.274	0.316	1.920	2.211	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Bottom Surface	0	47	6185	13.00	12.98	1.070	100.46%	0.300	0.322	2.130	2.290	018
U-NII-5 6.2GHz802.11ax(160M)	Aux	Bottom Surface	0	79	6345	13.00	12.76	1.070	105.68%	0.272	0.308	1.830	2.069	-
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	Rover 1g (W/kg)		ted APD (4cm ²)	D
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	_
U-NII-6 6.5GHz802.11ax(160M)	Aux	Bottom Surface	0	111	6505	13.00	12.90	1.070	102.33%	0.270	0.296	1.840	2.015	019
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	t over 1g (W/kg)		ted APD (4cm ²)	D
	7 GROTING	1 Gallon	(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	
U-NII-7 6.7GHz802.11ax(160M)	Aux	Bottom Surface	0	175	6825	13.00	12.93	1.070	101.62%	0.270	0.294	1.820	1.979	020
Mode	Antenna	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	Rover 1g (W/kg)		ted APD (4cm ²)	D
	, une ni le	- Conton	(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Measured	Reported	
U-NII-8 7.0GHz 802.11ax (160M)	Aux	Bottom Surface	0	207	6985	13.00	12.81	1.070	104.47%	0.274	0.306	1.860	2.079	021

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling Reported APD = measured APD * Power scaling * Duty cycle scaling

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



					Max. Rated Avg.	Measured					PD res	ult(4cm)		
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Bottom Surface	2	15	6025	13.00	12.73	106.41%	1.07	1.55	3.680	6.495	2.460	4.342	022
U-NII-5	Bottom Surface	2	47	6185	13.00	12.99	100.23%	1.07	1.55	2.740	4.555	1.410	2.344	023
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	13.00	12.90	102.33%	1.07	1.55	2.760	4.684	1.690	2.868	024
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	175	6825	13.00	12.98	100.46%	1.07	1.55	3.360	5.598	1.600	2.666	025
WLAN 6E 802.11ax(160M) U-NII-8	Bottom Surface	2	207	6985	13.00	12.80	104.71%	1.07	1.55	2.910	5.054	1.180	2.049	026
											PD result(4cm)			
					Max Pated Ava	Monsurod					PD res	ult(4cm)		
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	Measured Total psPD (W/m^2)	PD resi Reported Total psPD (W/m^2)	ult(4cm) Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
Mode WLAN 6E	Position Bottom Surface		CH 15		Power + Max.	Avg. Power				Total psPD	Reported Total psPD	Measured Normal psPD	Normal psPD	ID 027
Mode		(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Normal psPD (W/m^2)	
Mode WLAN 6E 802.11ax(160M) U-NII-5 WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	(mm) 2	15	(MHz) 6025	Power + Max. Tolerance (dBm) 13.00	Avg. Power (dBm) 12.68	Scaling 107.65%	scaling 1.07	uncertainty 1.55	Total psPD (W/m^2) 2.620	Reported Total psPD (W/m^2) 4.678	Measured Normal psPD (W/m^2) 1.760	Normal psPD (W/m ²) 3.142	027
Mode WLAN 6E 802.11ax(160M) U-VII-5 WLAN 6E 802.11ax(160M)	Bottom Surface Bottom Surface	(mm) 2 2	15	(MHz) 6025 6185	Power + Max. Tolerance (dBm) 13.00 13.00	Avg. Power (dBm) 12.68 12.98	Scaling 107.65% 100.46%	scaling 1.07 1.07	1.55	Total psPD (W/m^2) 2.620 2.000	Reported Total psPD (W/m^2) 4.678 3.332	Measured Normal psPD (W/m^2) 1.760 1.060	Normal psPD (W/m^2) 3.142 1.766	027 028

7.3 Summary of PD Results

Note:

Reported PD = measured PD * Power scaling * Duty cycle scaling * Uncertainty scaling

7.4 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

7.5 Conclusion

The device is compliant because all the standalone results are less than their corresponding criteria.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SIMULTANEOUS TRANSMISSION ANALYSIS 8

8.1 Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
WLAN 2.4GHz Main + BT Aux	Yes
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 5GHz Main + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 6GHz Main + BT Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux	Yes

Note:

1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.

2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with or less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.2 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR = $\frac{\text{Max.tune up power (mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

8.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be \leq 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


```
www.sqs.com.tw
```



Simultaneous Transmission Combination

			FCC Reported SAR						Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5	Scenario 6	Scenario 7	Scenario 8
	2 3 4 5 7 8 9					2+3	4+5	2+7	4+7	4+5+7	7+8	8+9	7+8+9			
Exposure Pos	ition	2.4GHz WLAN Main	2.4GHz WLAN Aux	5GHz WLAN Main	5GHz WLAN Aux	Bluetooth Aux	6GHz WLAN Main	6GHz WLAN Aux	Summed							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
Bottom Surface	0	0.158	0.494	0.971	0.928	0.044	0.372	0.322	0.652	1.899	0.202	1.015	1.943	0.416	0.694	0.738

	Scenario 4+5:											
Position	Conditions	SAR Value	Co	Coordinates (mm)			Peak Location	SPLSR	Simultaneous Transmission SAR			
Position	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SPLOK	Test			
Bottom	WLAN 5G Main	0.971	108.40	75.00	-177.00	-	-	-	-			
Surface	WLAN 5G Aux	0.928	108.20	-2.40	-177.00	1.899	77.40	0.034	SPLSR ≤ 0.04, Not required			

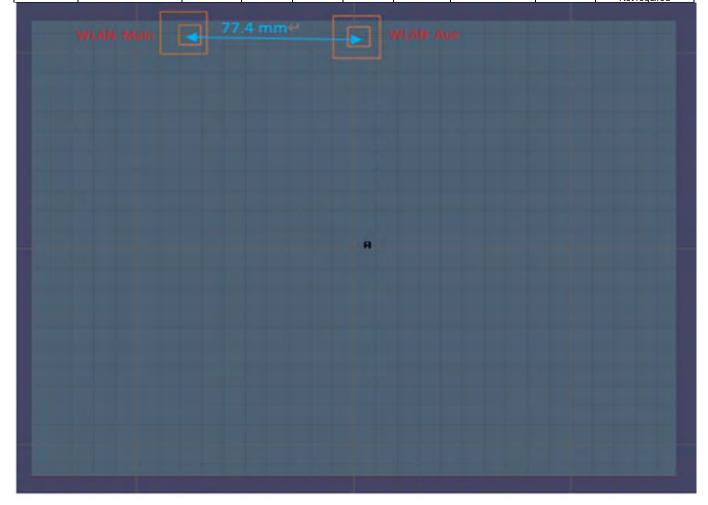

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



	Scenario 5:											
Position	Conditions	SAR Value	Co	Coordinates (mm)			Peak Location	SPLSR	Simultaneous Transmission SAR			
POSITION	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SFESIC	Test			
Bottom	WLAN 5G Main	0.971	108.40	75.00	-177.00	-	-	-	-			
Surface	WLAN5G Aux + BT Aux	0.972	108.20	-2.40	-177.00	1.943	77.40	0.035	SPLSR ≤ 0.04, Not required			

*For peak SAR location of WLAN Aux + BT, using the peak SAR location with smallest separation distance between WLAN Main - WLAN Aux pair and WLAN Main - BT pair to be the worst case condition.

WLAN MAIN	77.4 mm ² 78.6 mm
	я

Conclusion 8.4

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



INSTRUMENTS LIST 9

		SAR Te	st Site: SAR 4		
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	7712	Mar/21/2022	Mar/20/2023
SPEAG	Data acquisition Electronics	DAE4	1719	Mar/25/2022	Mar/24/2023
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023
SPEAG	Software	DASY 8 V16.0.2.83	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023
Agilent	Dual-directional coupler	772D	MY52180142	Nov/02/2021	Nov/01/2022
Agilent	Dual-directional coupler	778D	MY52180302	Oct/29/2021	Oct/28/2022
Agilent	MXG Analog Signal Generator	N5181A	MY50145142	Dec/23/2021	Dec/22/2022
R&S	MXG Analog Signal Generator	SMB100A03	182996	Dec/08/2021	Dec/07/2022
EMCI	Amplifier	ZHL-42	980189	Calibration not required	Calibration not required
EMCI	Amplifier	ZVE-8G	980190	Calibration not required	Calibration not required
R&S	Power Meter	NRX	102191	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	109065	Oct/12/2021	Oct/11/2022
LKM	Digital thermometer	DTM3000	EC14010603	Nov/09/2021	Nov/08/2022
TECPEL	Digital thermometer	DTM-303A	TP190085	Jan/14/2022	Jan/13/2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



SAR Test Site: SAR 6										
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration					
SPEAG	Dosimetric E-Field Probe	EX3DV4	7466	Jan/26/2022	Jan/25/2023					
SPEAG	Data acquisition Electronics	DAE4	558	Nov/23/2021	Nov/22/2022					
SPEAG	E-field Probe for Near Field Application	EUmmWV4	9579	Oct/06/2021	Oct/05/2022					
SPEAG	System Validation Dipole	D6.5GHzV2	1006	Aug/26/2021	Aug/25/2022					
SPEAG	System Validation Dipole	D7GHzV2	1007	Aug/26/2021	Aug/25/2022					
SPEAG	5G Verification Source 10GHz	5G-Veri10	1021	Jan/24/2022	Jan/23/2023					
SPEAG	Software	DASY 6 V16.0.0.116	N/A	Calibration not required	Calibration not required					
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required					
SPEAG	Phantom	mmWave Phantom	N/A	Calibration not required	Calibration not required					
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023					
Agilent	Dual-directional coupler	772D	MY52180142	Nov/02/2021	Nov/01/2022					
Agilent	Dual-directional coupler	778D	MY52180302	Oct/29/2021	Oct/28/2022					
Agilent	MXG Analog Signal Generator	N5181A	MY50145142	Dec/23/2021	Dec/22/2022					
R&S	MXG Analog Signal Generator	SMB100A03	182996	Dec/08/2021	Dec/07/2022					
EMCI	Amplifier	ZHL-42	980189	Calibration not required	Calibration not required					
EMCI	Amplifier	ZVE-8G	980190	Calibration not required	Calibration not required					
R&S	Power Meter	NRX	102191	Jan/22/2022	Jan/21/2023					
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023					
R&S	Power Sensor	NRP18S	109065	Oct/12/2021	Oct/11/2022					
LKM	Digital thermometer	DTM3000	EC14010603	Nov/09/2021	Nov/08/2022					
TECPEL	Digital thermometer	DTM-303A	TP190085	Jan/14/2022	Jan/13/2023					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10 UNCERTAINTY BUDGET

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	c Tolerance/	Probability	Div	Div Value	' ci (1a)	9 ci (10g)	Standard	Standard	vi, or Veff
Source of Oncertainty	Uncertainty	Distributio	Div	Div value	ci (1g)	ci (10g)	uncertainty	uncertainty	VI, OF VEII
Measurement system									
Probe calibration	6.55%	Ν	1	1	1	1	6.55%	6.55%	00
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	00
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	00
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	00
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	00
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Readout Electronics	0.30%	Ν	1	1	1	1	0.30%	0.30%	00
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	00
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	00
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	00
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	00
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	00
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	00
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	00
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	~
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	00
Liquid permittivity (mea.)	0.47%	N	1	1	0.64	0.43	0.30%	0.20%	М
Liquid Conductivity (mea.)	0.31%	N	1	1	0.6	0.49	0.19%	0.15%	М
Combined standard uncertainty		RSS					11.72%	11.71%	
Expant uncertainty (95% confidence interval), K=2							23.44%	23.42%	

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TESA2207000203EN Page: 54 of 91

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty		Probability Distributio	Div	Div Value	ci (1g)	s ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	~
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	~
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	~
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	~
Liquid permittivity (mea.)	0.28%	N	1	1	0.64	0.43	0.18%	0.12%	М
Liquid Conductivity (mea.)	1.91%	N	1	1	0.6	0.49	1.15%	0.94%	М
Combined standard uncertainty		RSS					11.48%	11.45%	
Expant uncertainty (95% confidence interval), K=2							22.95%	22.89%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

```
www.sgs.com.tw
```



DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 6GHz - 10GHz range)

		1401105	Nulla					
а	b	с	d		е	е	f=b * e / d	f=b * e / d
Source of Uncertainty	Uncertainty Value (±%)	Probability Distributioin	Div.	Div. Value	(ci) 1g	(ci) 10g	Std. uncertainty (1g) (±%)	Std. uncertainty (10g) (±%)
Measurement system errors		•						•
Probe calibration	18.6	N	2	2	1	1	9.3	9.3
Probe Calibration Drift	1.7	R	√3	1.732	1	1	1.0	1.0
Probe Linearity	4.7	R	√3	1.732	1	1	2.7	2.7
Broadband Signal	2.8	R	√3	1.732	1	1	1.6	1.6
Probe Isotropy	7.6	R	√3	1.732	1	1	4.4	4.4
Data Acquisition	0.3	N	1	1	1	1	0.3	0.3
RF Ambient	1.8	N	1	1	1	1	1.8	1.8
Probe positioning	0.2	N	1	1	0.67	0.67	0.1	0.1
Data Processing	3.5	N	1	1	1	1	3.5	3.5
Phantom and device errors	+	•					•	
Conductivity (meas.)DAK	2.5	N	1	1	0.78	0.71	2.0	1.8
Conductivity (temp.)BB	2.4	R	√3	1.732	0.78	0.71	1.1	1.0
Phantom Permittivity	14.0	R	√3	1.732	0.5	0.5	4.0	4.0
Distance DUT - TSL	2.0	N	1	1	2	2	4.0	4.0
Device Positioning (±0.5mm)	1.0	N	1	1	1	1	1.0	1.0
Device Holder	3.6	N	1	1	1	1	3.6	3.6
DUT Modulationm	2.4	R	√3	1.732	1	1	1.4	1.4
Time-average SAR	0.0	R	√3	1.732	1	1	0.0	0.0
DUT drift	2.5	N	1	1	1	1	2.5	2.5
Val Antenna Unc.	0.0	N	1	1	1	1	0.0	0.0
Unc. Input Power	0.0	N	1	1	1	1	0.0	0.0
Correction to the SAR results	_							
Deviation to Target	1.90	N	1	1	1	0.84	1.9	1.6
SAR scaling		R	√3	1.732	1	1	0.0	0.0
Combined Std. uncertainty							14.0	13.9
Expanded Std. uncertainty (95% confidence interval), K=2							28.0	27.8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sqs.com.tw



cDASY6 Module mmWave Uncertainty Budget for PD Evaluation Distances to the Antennas $\geq \lambda/5$ In Compliance with IEC/IEEE 63195

а	b	с	d		е	f=b * e / d	g
Source of Uncertainty	Uncertainty Value (+-dB)	Probability Distributioin	Div.	Div. Value	ci	Std. uncertainty (+-dB)	(vi) Veff
Uncertainty terms dependent on th	e measurement	system					
Probe calibration	0.49	N	1	1	1	0.49	æ
Probe correction	0.00	R	√3	1.732	1	0.00	œ
Frequency response (BW≦1GHz)	0.20	R	√3	1.732	1	0.12	æ
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	œ
lsotropy	0.50	R	√3	1.732	1	0.29	œ
Linearity	0.20	R	√3	1.732	1	0.12	œ
Probe scattering	0.00	R	√3	1.732	1	0.00	œ
Probe positioning offset	0.30	R	√3	1.732	1	0.17	œ
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	œ
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	æ
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	00
Field impedance dependance	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	~~~~
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	~~~~
Measurement area truncation	0.00	R	√3	1.732	1	0.00	~~~~
Data acquisition	0.03	N	1	1	1	0.03	œ
Sampling	0.00	R	√3	1	1	0.00	æ
Field reconstruction	2.00	R	√3	1.732	1	1.15	œ
Forward transformation	0.00	R	√3	1.732	1	0.00	œ
Power density scaling	-	R	√3	1.732	1	-	œ
Spatial averaging	0.10	R	√3	1.732	1	0.06	œ
System detection limit	0.04	R	√3	1.732	1	0.02	æ
Uncertainty terms dependent on th	e DUT and envir	onmental facto	ors				
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	œ
Modulation response	0.40	R	√3	1.732	1	0.23	œ
Integration time	0.00	R	√3	1.732	1	0.00	œ
Response time	0.00	R	√3	1.732	1	0.00	œ
Device holder influence	0.10	R	√3	1.732	1	0.06	æ
DUT alignment	0.00	R	√3	1.732	1	0.00	æ
RF ambient conditions	0.04	R	√3	1.732	1	0.02	æ
Ambient reflections	0.04	R	√3	1.732	1	0.02	æ
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	æ
Drift of the DUT	-	R	√3	1.732	1	-	æ
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2						2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



11 SAR MEASUREMENT RESULTS


ID: 001

Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11b_Body_Bottom Surface_CH 6_0mm_Main Ambient temperature: 22.1°C; Liquid temperature: 21.3°C

Exposure Conditions

Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	
Bottom Surface, 0.00	2437.0, 6	8.16	1.821	39.112	
		L			
Phantom Probe, Calibration Date DAE, Calibration Date			ation Date		
EX3DV4 - SN7712, 2022-03-2	21 DAE4 Sn1719, 2022-03-25				
		Area Scan		Zoom Scan	
	96.0 x 144.0 30.0 x 30.0			30.0 x 30.0 x 30.0	
	12.0 x 12.0 5.0 x 5.0			5.0 x 5.0 x 5.0	
	3.0				1.4
ılts					
		Area	Scan	Zoom Scan	
		2022-	08-07	2022-08-07	
	0.142		0.142	0.157	
0.065 Og [W/kg]		0.065	0.067		
	-0.05		0.05		
				51.1	
				6.0	
	Bottom Surface, 0.00 Probe, Calibration Date EX3DV4 - SN7712, 2022-03-2	Channel Number Bottom Surface, 0.00 2437.0, 6 Probe, Calibration Date EX3DV4 - SN7712, 2022-03-21	Channel Number Bottom Surface, 0.00 2437.0, 6 8.16 Probe, Calibration Date DAE, Calibr EX3DV4 - SN7712, 2022-03-21 DAE4 Sn17 Area Scan 96.0 x 144.0 12.0 x 12.0 3.0 Its Area	Channel Number Ottom Bottom Surface, 0.00 2437.0, 6 8.16 1.821 Probe, Calibration Date DAE, Calibration Date EX3DV4 - SN7712, 2022-03-25 Image: Strain Str	

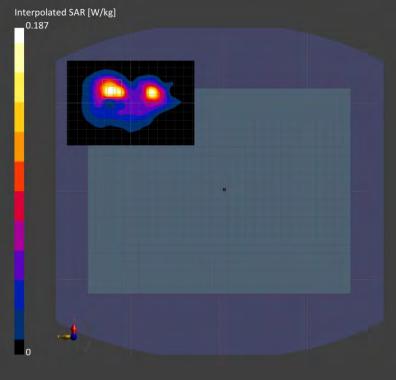

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




ID: 002 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42 0mm Main Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Convers	sion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5210.0, 42	5.94		4.679	35.863
Hardware Setup						
Phantom	Probe, Calibration Date		[DAE, Calibr	ation Date	
ELI	EX3DV4 - SN7712, 2022-03-	21	[DAE4 Sn17	19, 2022-03-25	
Scans Setup						
				Area Scan		Zoom Scan
Grid Extents [mm]			8	0.0 x 140.0		24.0 x 24.0 x 22.0
Grid Steps [mm]				10.0 x 10.0		4.0 x 4.0 x 2.0
Sensor Surface [mm]				3.0		1.4
Measurement Resu	ults					
				Area	Scan	Zoom Scan
Date				2022-	08-08	2022-08-08
psSAR1g [W/kg]					0.450	0.474
psSAR10g [W/kg]					0.151	0.152
Power Drift [dB]					0.04	0.04
M2/M1 [%]						55.7
Dist 3dB Peak [mm]						7.9

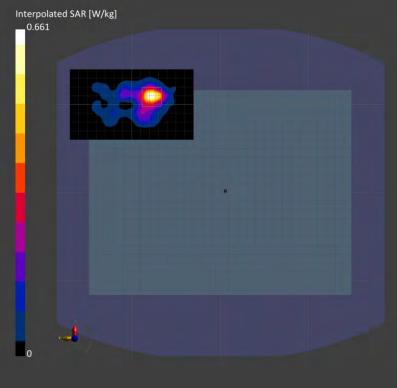

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 003 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42 0mm Main IC Ambient temperature: 22.2°C; Liquid temperature: 21.4°C **Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conve	rsion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5210.0, 42	5.94		4.679	35.863
Hardware Setup	1		1			Ц
Phantom	Probe, Calibration Date			DAE, Calibr	ation Date	
ELI	EX3DV4 - SN7712, 2022-03-	-21		DAE4 Sn17	19, 2022-03-25	
Scans Setup						
				Area Scan		Zoom Scan
Grid Extents [mm]		80.0 x 140.0 24.0		24.0 x 24.0 x 22.0		
Grid Steps [mm]		10.0 x 10.0			4.0 x 4.0 x 2.0	
Sensor Surface [mm]				3.0		1.4
Measurement Resu	ults					
				Area	Scan	Zoom Scan
Date				2022-	08-08	2022-08-08
psSAR1g [W/kg]					0.352	0.385
psSAR10g [W/kg]					0.119	0.123
Power Drift [dB]		0.05		0.04		
M2/M1 [%]						55.8
Dist 3dB Peak [mm]						7.9

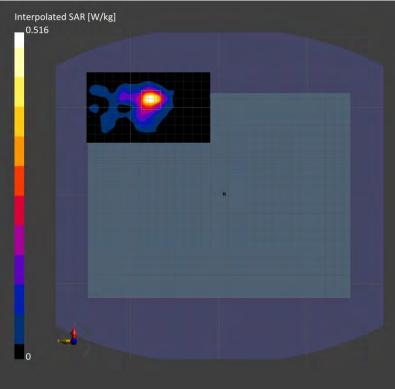

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : TESA2207000203EN


Measurement Report for Framework(NB), WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54 0mm Main

Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5270.0, 54	5.94	4.741	35.795
Hardware Setup			·		
Phantom	Probe, Calibration Date		DAE, Calibra	ation Date	
ELI	EX3DV4 - SN7712, 2022-03-2	21	DAE4 Sn17	19, 2022-03-25	
Scans Setup	·		·		
			Area Scan		Zoom Scan
Grid Extents [mm]		80.0 x 140.0 24.0		24.0 x 24.0 x 22.0	
Grid Steps [mm]		10.0 x 10.0 4.0		4.0 x 4.0 x 2.0	
Sensor Surface [mm]			3.0		1.4
Measurement Resu	ults				
			Area	Scan	Zoom Scan
Date			2022-	08-08	2022-08-08
psSAR1g [W/kg]				0.523	0.557
psSAR10g [W/kg]				0.180	0.191
Power Drift [dB]				0.03	0.03
M2/M1 [%]					56.1
Dist 3dB Peak [mm]					8.6



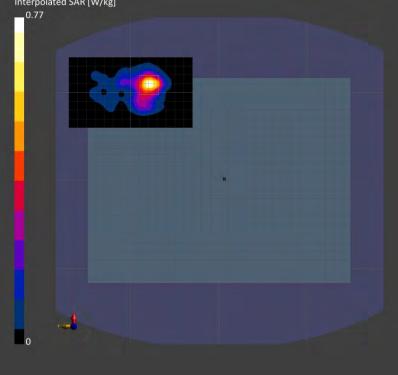

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 005 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 138 0mm Main Ambient temperature: 22.2°C; Liquid temperature: 21.4°C Exposure Conditions

Phantom Section TSI	Position, Test Distance [mm]	Frequency [MHz],	Conversion Easter	TSL Conductivity [S/m]	TSL Permittivity	
		Channel Number	Conversion racio		ISE Fernituvity	
Flat, HSL	Bottom Surface, 0.00	5690.0, 138	5.45	5.173	35.315	
Hardware Setup						
Phantom	Probe, Calibration Date		DAE, Calibr	ation Date		
ELI	EX3DV4 - SN7712, 2022-03-	21	DAE4 Sn17	19, 2022-03-25		
Scans Setup						
			Area Scar		Zoom Scar	
Grid Extents [mm]		80.0 x 140.0		24.0 x 24.0 x 22.		
Grid Steps [mm]		10.0 x 10.0		4.0 x 4.0 x		
Sensor Surface [mm]		3.0			1.4	
Measurement Res	ults					
			Area	Scan	Zoom Scar	
Date			2022-	08-08	2022-08-08	
psSAR1g [W/kg]				0.897	0.948	
psSAR10g [W/kg]				0.308	0.320	
Power Drift [dB]		-0.02		-0.02		
M2/M1 [%]					52.0	
Dist 3dB Peak [mm]					7.4	

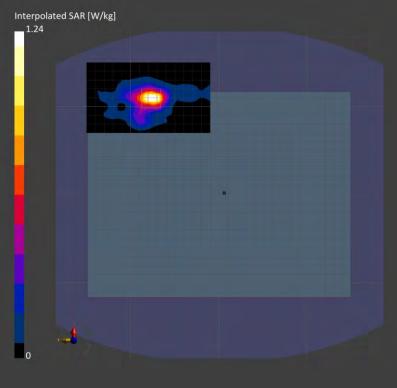

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 006 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.8G_Body_Bottom Surface_CH 155 0mm Main Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5775.0, 155	5.45	5.261	35.218
Hardware Setup					
Phantom	Probe, Calibration Date		DAE, Calibr	ation Date	
ELI	EX3DV4 - SN7712, 2022-03-	-21	DAE4 Sn17	19, 2022-03-25	
Scans Setup					
		Area Scan		Zoom Scan	
Grid Extents [mm]		80.0 x 140.0 24.0 x 24.0 x			24.0 x 24.0 x 22.0
Grid Steps [mm]		10.0 x 10.0 4.0 x 4.			4.0 x 4.0 x 2.0
Sensor Surface [mm]			3.0		1.4
Measurement Res	ults				
			Area	Scan	Zoom Scan
Date			2022-	08-08	2022-08-08
psSAR1g [W/kg]				0.743	0.783
psSAR10g [W/kg]				0.255	0.259
Power Drift [dB]		0.04 0			
M2/M1 [%]					52.0
Dist 3dB Peak [mm]					7.9

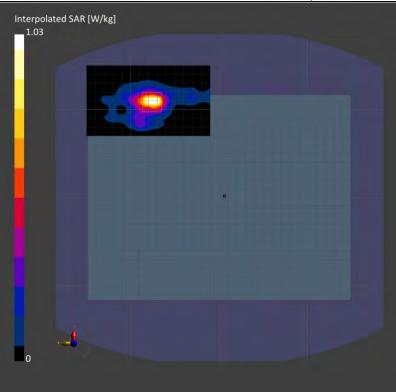

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11b_Body_Bottom Surface_CH 6_0mm_Aux Ambient temperature: 22.1°C; Liquid temperature: 21.3°C Exposure Conditions


Channel Number Channel Number Flat, HSL Bottom Surface, 0.00 2437.0, 6 8.16 1.821 3 Hardware Setup Phantom Probe, Calibration Date DAE, Calibration Date ELI EX3DV4 - SN7712, 2022-03-21 DAE4 Sn1719, 2022-03-25 Scans Setup		
Hardware Setup Phantom Probe, Calibration Date DAE, Calibration Date ELI EX3DV4 - SN7712, 2022-03-21 DAE4 Sn1719, 2022-03-25 Scans Setup Area Scan Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0	TSL Permittivity	
Phantom Probe, Calibration Date DAE, Calibration Date ELI EX3DV4 - SN7712, 2022-03-21 DAE4 Sn1719, 2022-03-25 Scans Setup Area Scan Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0 12.0 x 12.0	39.112	
ELI EX3DV4 - SN7712, 2022-03-21 DAE4 Sn1719, 2022-03-25 Scans Setup Area Scan Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0 3		
Scans Setup Area Scan Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0 3		
Area Scan Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0 3		
Grid Extents [mm] 96.0 x 144.0 3 Grid Steps [mm] 12.0 x 12.0 3		
Grid Steps [mm] 12.0 x 12.0	Zoom Scar	
	30.0 x 30.0 x 30.0	
Sensor Surface [mm] 3.0	5.0 x 5.0 x 5.0	
	1.4	
Measurement Results		
Area Scan	Zoom Scan	
Date 2022-08-07	2022-08-07	
psSAR1g [W/kg] 0.447	0.489	
psSAR10g [W/kg] 0.236	0.235	
Power Drift [dB] 0.02	0.01	
M2/M1 [%]	55.9	
Dist 3dB Peak [mm]	10.0	

Interpolated SAR [W/kg] 0.556

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



TSL Permittivity

39.051



ID: 008

Report No. : TESA2207000203EN

Measurement Report for Framework(NB), Bluetooth(GFSK)_Body_Bottom Surface_CH 78_0mm_Aux
Ambient temperature: 22.1°C; Liquid temperature: 21.3°C
Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conve	ersion Factor	TSL Conductivity [S/m]
Flat, HSL	Bottom Surface, 0.00	2480.0, 78	8.16		1.860
Hardware Setup					
Phantom	Probe, Calibration Date			DAE, Calibra	ation Date
ELI	EX3DV4 - SN7712, 2022-03-2	21		DAE4 Sn17	19, 2022-03-25
<u> </u>					

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Measurement Besults		

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-07	2022-08-07
psSAR1g [W/kg]	0.030	0.024
psSAR10g [W/kg]	0.014	0.009
Power Drift [dB]	0.01	0.02
M2/M1 [%]		58.4
Dist 3dB Peak [mm]		15.0

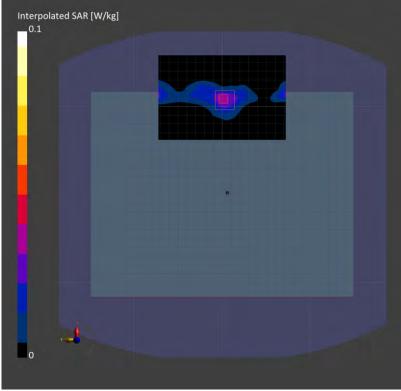

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




ID: 009 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42 0mm Aux Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5210.0, 42	5.94	4.679	35.863
Hardware Setup					
Phantom	Probe, Calibration Date		DAE, Calibra	ation Date	
ELI	EX3DV4 - SN7712, 2022-03-	-21	DAE4 Sn17	19, 2022-03-25	
Scans Setup					
			Area Scan		Zoom Scan
Grid Extents [mm]			80.0 x 140.0		24.0 x 24.0 x 22.0
Grid Steps [mm]			10.0 x 10.0		4.0 x 4.0 x 2.0
Sensor Surface [mm]			3.0		1.4
Measurement Resu	ılts				
			Area	Scan	Zoom Scan
Date			2022-	08-08	2022-08-08
psSAR1g [W/kg]				0.473	0.515
psSAR10g [W/kg]				0.158	0.165
Power Drift [dB]				0.02	0.04
M2/M1 [%]					56.6
Dist 3dB Peak [mm]					7.2

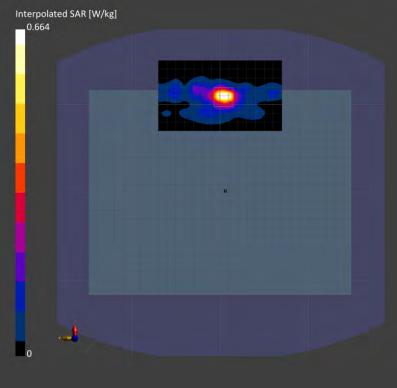

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 010 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.2G_Body_Bottom Surface_CH 42 0mm Aux IC Ambient temperature: 22.2°C; Liquid temperature: 21.4°C **Exposure Conditions**

Position, Test Distance [mm] Phantom Section, TSL Frequency [MHz], Conversion Factor TSL Conductivity [S/m] TSL Permittivity Channel Number Flat. HSL 5.94 4.679 35.863 Bottom Surface, 0.00 5210.0.42 **Hardware Setup** Probe, Calibration Date Phantom DAE, Calibration Date ELI EX3DV4 - SN7712, 2022-03-21 DAE4 Sn1719, 2022-03-25 Scans Setup Area Scan Zoom Scan Grid Extents [mm] 80.0 x 140.0 24.0 x 24.0 x 22.0 Grid Steps [mm] 10.0 x 10.0 4.0 x 4.0 x 2.0 Sensor Surface [mm] 3.0 1.4 **Measurement Results** Area Scan Zoom Scan 2022-08-08 Date 2022-08-08 psSAR1g [W/kg] 0.372 0.415 psSAR10g [W/kg] 0.125 0.132 Power Drift [dB] -0.02 -0.03 M2/M1 [%] 56.5 Dist 3dB Peak [mm] 7.2

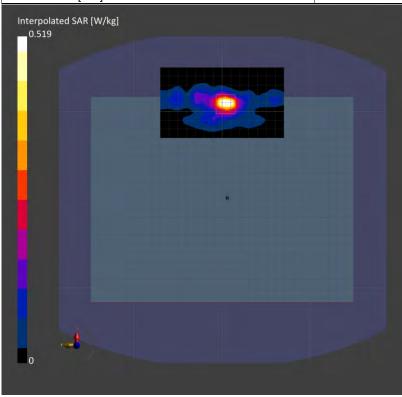

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.3G_Body_Bottom Surface_CH 58 0mm Aux Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	
Flat, HSL	Bottom Surface, 0.00	5290.0, 58	5.94	4.762	35.772	
Hardware Setup						
Phantom Probe, Calibration Date			DAE, Calib	DAE, Calibration Date		
ELI	EX3DV4 - SN7712, 2022-03-2	DAE4 Sn1719, 2022-03-25				
Scans Setup						
			Area Scan		Zoom Scan	
Grid Extents [mm]			80.0 x 140.0 24.0 x 2		24.0 x 24.0 x 22.0	
Grid Steps [mm]			10.0 x 10.0	4.0 x 4.0 x 2		
Sensor Surface [mm]			3.0		1.4	
Measurement Resu	ults					
			Area	Scan	Zoom Scan	
Date			2022-	08-08	2022-08-08	
psSAR1g [W/kg]				0.461		
psSAR10g [W/kg]				0.154	0.162	
Power Drift [dB]				0.02	-0.01	
M2/M1 [%]					56.2	
Dist 3dB Peak [mm]					7.4	

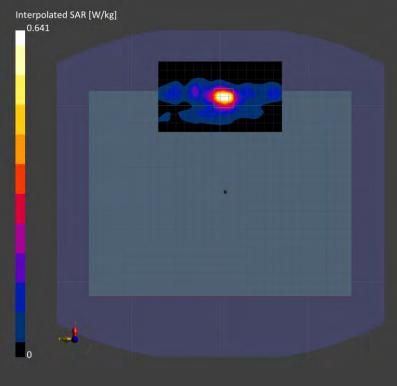

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 106 0mm Aux Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5530.0, 106	5.29	5.01	35.772
Hardware Setup					·
Phantom	Probe, Calibration Date	DAE, Calibration Date			
ELI	EX3DV4 - SN7712, 2022-03-	21 DAE4 Sn1719, 2022-03-25			
Scans Setup			·		
			Area Scan		Zoom Scan
Grid Extents [mm]	rid Extents [mm] 80.0 x 1		80.0 x 140.0		24.0 x 24.0 x 22.0
Grid Steps [mm]		10.0 x 10.0 4.0		4.0 x 4.0 x 2.0	
Sensor Surface [mm]		3.0		1.4	
Measurement Resu	ults				
			Area	Scan	Zoom Scan
Date			2022-	08-08	2022-08-08
psSAR1g [W/kg]	psSAR1g [W/kg]			0.693	
psSAR10g [W/kg]				0.233	
Power Drift [dB]		0.02		0.03	
M2/M1 [%]				54.2	
Dist 3dB Peak [mm]					8.2

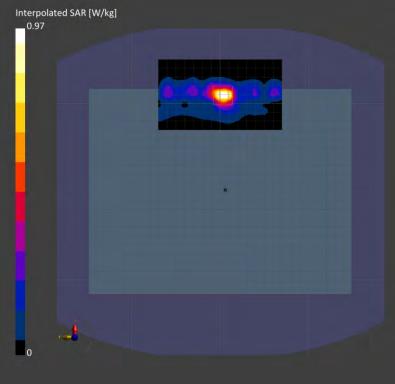

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




ID: 013 Report No. : TESA2207000203EN

Measurement Report for Framework(NB), WLAN 802.11ac(80M) 5.8G_Body_Bottom Surface_CH 155 0mm Aux Ambient temperature: 22.2°C; Liquid temperature: 21.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5775.0, 155	5.45	5.261	35.218
Hardware Setup					
Phantom	Probe, Calibration Date	DAE, Calibration Date			
ELI	EX3DV4 - SN7712, 2022-03	DAE4 Sn1719, 2022-03-25			
Scans Setup			·		
			Area Scan		Zoom Scan
Grid Extents [mm]	Grid Extents [mm] 80.0 x 140.0			24.0 x 24.0 x 22.0	
Grid Steps [mm]		10.0 x 10.0 4.0		4.0 x 4.0 x 2.0	
Sensor Surface [mm]		3.0		1.4	
Measurement Resu	ults				
			Area	Scan	Zoom Scan
Date			2022-	08-08	2022-08-08
psSAR1g [W/kg]				0.828	
psSAR10g [W/kg]				0.283	
Power Drift [dB]		0.03		0.02	
M2/M1 [%]					51.3
Dist 3dB Peak [mm]					8.2

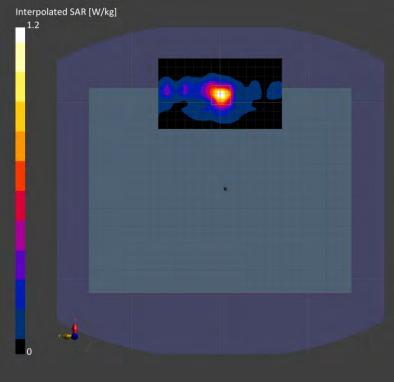

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : TESA2207000203EN


Measurement Report for Framework(NB), U-NII-5 6.2GHz 802.11ax(160M)_Body_Bottom Surface_CH 15 0mm Main Ambient temperature: 22.4°C; Liquid temperature: 21.3°C

Exposure Conditions

=Apoonio oonanao					
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6025.0, 15	5.65	5.519	34.93
Hardware Setup					
Phantom	Probe, Calibration Date	DAE, Calibration Date			
ELI	EX3DV4 - SN7466, 2022-01	1-26 DAE4 Sn558, 2021-11-23			
Scans Setup					
			Area Scan	Zoom	
Grid Extents [mm]	Grid Extents [mm]		85.0 x 136.0	22.0 x 22.0 x 22.	
Grid Steps [mm]		8.5 x 8.5 3.		3.4 x 3.4 x 1.4	
Sensor Surface [mm]		3.0			1.4
Measurement Resi	ults				
				Area Scan	Zoom Scar
Date				2022-08-09	2022-08-09
psSAR1g [W/kg]				0.218	
psSAR8g [W/kg]		0.083		0.09	

psoartog [w/kg]	0.065	0.091
psSAR10g [W/kg]	0.074	0.079
psPDab (4.0cm2, sq) [W/m2]		1.810
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		56.6
Dist 3dB Peak [mm]		7.5

Interpolated SAR [W/kg]

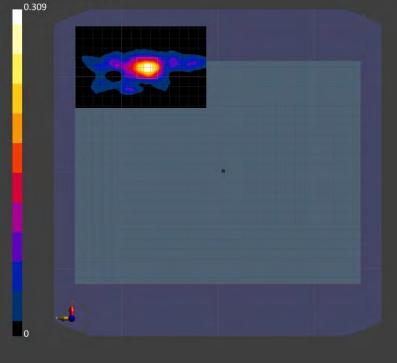

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : TESA2207000203EN


Measurement Report for Framework(NB), U-NII-6 6.5GHz 802.11ax(160M)_Body_Bottom Surface_C	ЭН
111_0mm_Main	
Ambient temperature: 22.4°C; Liquid temperature: 21.3°C	

Exposure Conditions

Exposure Conditio	115					
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	
Flat, HSL	Bottom Surface, 0.00	6505.0, 111	5.65	6.023	34.354	
Hardware Setup						
Phantom	Phantom Probe, Calibration Date DA		DAE, Calibr	ibration Date		
ELI	EX3DV4 - SN7466, 2022-01-	1-26 DAE4 Sn558, 2021-11-23				
Scans Setup			·			
			Area Scan		Zoom Scar	
Grid Extents [mm]			85.0 x 136.0	22.0 x 22.0 x		
Grid Steps [mm]	Grid Steps [mm]		8.5 x 8.5	5 3.4 x 3.4		
Sensor Surface [mm]	ensor Surface [mm]				1.4	
Measurement Resu	ults	·				
				Area Scan	Zoom Scar	
Date				2022-08-09	2022-08-09	
psSAR1g [W/kg]				0.256		

psSAR8g [W/kg]	0.095	0.100
psSAR10g [W/kg]	0.084	0.087
psPDab (4.0cm2, sq) [W/m2]		2.010
Power Drift [dB]	0.01	-0.03
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		7.5

Interpolated SAR [W/kg]

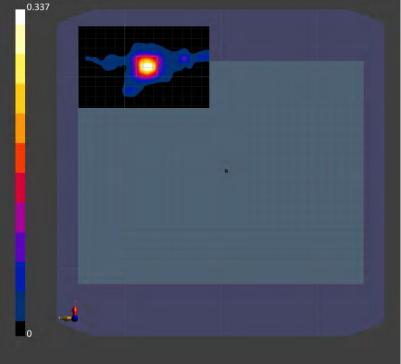

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : TESA2207000203EN

Measurement Report for Framework(NB), U-NII-7 6.7GHz 802.11ax(160M)_Body_Bottom Surface_CH 175 0mm Main Ambient temperature: 22.4°C; Liquid temperature: 21.3°C . sura Conditions

Exposure Conditio	ons					
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conve	rsion Factor	TSL Conductivity [S	/m] TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6825.0, 175	5.65		6.364	33.97
Hardware Setup						
Phantom	Probe, Calibration Date			DAE, Calibr	ation Date	
ELI	EX3DV4 - SN7466, 2022-01-26			DAE4 Sn55	8, 2021-11-23	
Scans Setup						
			Are	ea Scan		Zoom Scan
Grid Extents [mm]			85.0	x 136.0	22.0 x 22.0 x 2	
Grid Steps [mm]		8	3.5 x 8.5 3.4 x 3.4		3.4 x 3.4 x 1.4	
Sensor Surface [mm]			3.0	3.0 1.4		
Measurement Res	ults					
					Area Scan	Zoom Scan
Date					2022-08-09	2022-08-09

Date	2022-08-09	2022-08-09
psSAR1g [W/kg]	0.324	0.346
psSAR8g [W/kg]	0.119	0.120
psSAR10g [W/kg]	0.104	0.104
psPDab (4.0cm2, sq) [W/m2]		2.400
Power Drift [dB]	0.04	0.03
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		7.8

Interpolated SAR [W/kg]

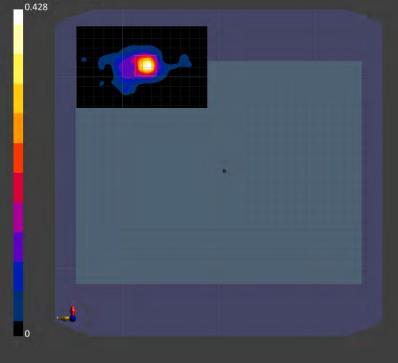

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



ID: 017

Report No. : TESA2207000203EN


Measurement Report for Framework(NB), U-NII-8 7.0GHz 802.11ax(160M)_Body_Bottom Surface_CH
207_0mm_Main
Ambient temperature: 22.3°C; Liquid temperature: 21.2°C
Exposure Conditions

xposure Conditions Phantom Section, TSL Position, Test Distance [mm] Frequency [MHz], Conversion Factor TSL Conductivity [S/m] TSL Permittivity Channel Number Flat. HSL 5.85 33.778 Bottom Surface, 0.00 6985.0. 207 6.536 **Hardware Setup** Phantom Probe, Calibration Date DAE, Calibration Date ELI EX3DV4 - SN7466, 2022-01-26 DAE4 Sn558, 2021-11-23 Scans Setup Area Scan Zoom Scan Grid Extents [mm] 85.0 x 136.0 22.0 x 22.0 x 22.0 Grid Steps [mm] 8.5 x 8.5 3.4 x 3.4 x 1.4 Sensor Surface [mm] 3.0 1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-10	2022-08-10
psSAR1g [W/kg]	0.241	0.259
psSAR8g [W/kg]	0.086	0.088
psSAR10g [W/kg]	0.075	0.075
psPDab (4.0cm2, sq) [W/m2]		1.750
Power Drift [dB]	-0.02	-0.04
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		7.6

Interpolated SAR [W/kg]

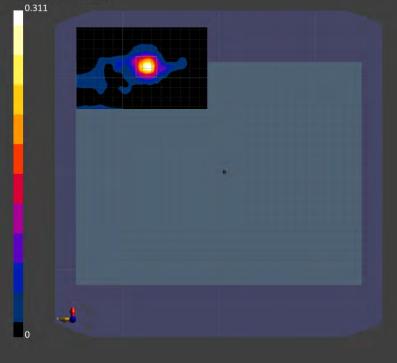

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

0.04

0.05 56.8

7.8



ID: 018

Report No. : TESA2207000203EN Measurement Report for Framework(NB), U-NII-5 6.2GHz 802.11ax(160M)_Body_Bottom Surface_CH 47 0mm Aux


Ambient temperature: 22.4°C; Liquid temperature: 21.3°C

Exposure Conditions

Exposure contaitio					
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6185.0, 47	5.65	5.686	34.738
Hardware Setup					
Phantom	Probe, Calibration Date		DAE, Calibr	ation Date	
ELI	EX3DV4 - SN7466, 2022-01	-26	DAE4 Sn55	8, 2021-11-23	
Scans Setup					
			Area Scan		Zoom Scar
Grid Extents [mm]		85.0 x 136.0 22.0 x 22.0 x 2		22.0 x 22.0 x 22.0	
Grid Steps [mm]		8.5 x 8.5 3.4 x 3.4		3.4 x 3.4 x 1.4	
Sensor Surface [mm]		3.0			1.4
Measurement Resi	ults				
				Area Scan	Zoom Scar
Date				2022-08-09	2022-08-09
psSAR1g [W/kg]			0.260	0.300	
psSAR8g [W/kg]			0.098		0.107
psSAR10g [W/kg]		0.086 0.0			0.093
psPDab (4.0cm2, sq) [W/m2]				2.130	

Power Drift [dB] M2/M1 [%]

Dist 3dB Peak [mm]

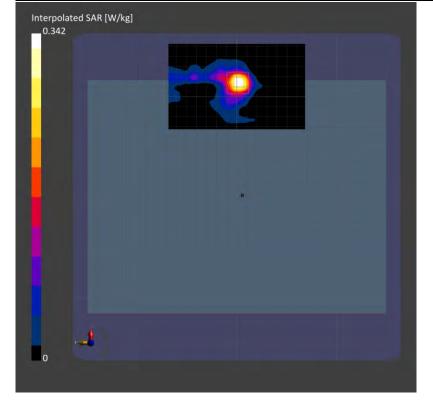

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

55.3

7.2



ID: 019

Report No. : TESA2207000203EN

Measurement Report for Framework(NB), U-NII-6 6.5GHz 802.11ax(160M)_Body_Bottom Surface_CH 111 0mm Aux Ambient temperature: 22.4°C; Liquid temperature: 21.3°C


Exposure Conditions

Exposure Conditio	ons				
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Facto	r TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6505.0, 111	5.65	6.023	34.354
Hardware Setup		·			
Phantom	Probe, Calibration Date		DAE, Calib	ration Date	
ELI	EX3DV4 - SN7466, 2022-01-	-26	DAE4 Sn5	58, 2021-11-23	
Scans Setup					
			Area Scan		Zoom Scar
Grid Extents [mm]		85.0 x 136.0 22.0 x 22		22.0 x 22.0 x 22.0	
Grid Steps [mm]		8.5 x 8.5		3.4 x 3.4 x 1.4	
Sensor Surface [mm]		3.0		1.4	
Measurement Resi	ults				
				Area Scan	Zoom Scar
Date				2022-08-09	2022-08-09
psSAR1g [W/kg]		0.243		0.270	
psSAR8g [W/kg]		0.089		0.092	
psSAR10g [W/kg]		0.077		0.079	
psPDab (4.0cm2, sq) [W/m2]		1.840			
Power Drift [dB]			0.03	0.02	

M2/M1 [%]

Dist 3dB Peak [mm]



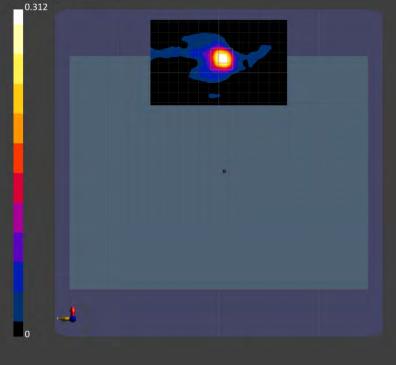

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 020

Report No. : TESA2207000203EN


Measurement Report for Framework(NB), U-NII-7 6.7.0GHz 802.11ax(160M)_Body_Bottom Surface_CH	
175_0mm_Aux	
Ambient temperature: 22.4°C; Liquid temperature: 21.3°C	

Exposure Conditions

Exposure Conditio	115					
Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conver	sion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6825.0, 175	5.65		6.364	33.97
Hardware Setup						
Phantom	Probe, Calibration Date		l	DAE, Calibra	ation Date	
ELI	EX3DV4 - SN7466, 2022-01-	-26	I	DAE4 Sn55	8, 2021-11-23	
Scans Setup						
			Are	a Scan		Zoom Scan
Grid Extents [mm]			85.0 >	x 136.0		22.0 x 22.0 x 22.0
Grid Steps [mm]		8.5 x 8.5			3.4 x 3.4 x 1.4	
Sensor Surface [mm]		3.0			1.4	
Measurement Resu	ults					
					Area Scan	Zoom Scan
Date					2022-08-09	2022-08-09
psSAR1g [W/kg]					0.260	0.270
psSAR8g [W/kg]					0.095	0.094
psSAR10g [W/kg]	psSAR10g [W/kg]				0.083	0.081
psPDab (4.0cm2, sq) [\	V/m2]					1.820
Power Drift [dB]	Power Drift [dB]				0.02	-0.04
M2/M1 [%]						54.3
Dist 3dB Peak [mm]						7.6

Dist 3dB Peak [mm]

Interpolated SAR [W/kg]

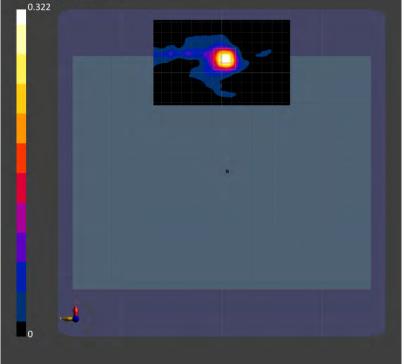

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




ID: 021

Report No. : TESA2207000203EN

Measurement Report for Framework(NB), U-NII-8 7.0GHz 802.11ax(160M)_Body_Bottom Surface_CH 207 0mm Aux Ambient temperature: 22.3°C; Liquid temperature: 21.2°C

Exposure Conditions Frequency [MHz], Conversion Factor TSL Conductivity [S/m] Phantom Section, TSL Position, Test Distance [mm] **TSL** Permittivity Channel Number Flat. HSL 5.85 6.536 33.778 Bottom Surface, 0.00 6985.0. 207 Hardware Setup Phantom Probe, Calibration Date DAE, Calibration Date ELI EX3DV4 - SN7466, 2022-01-26 DAE4 Sn558, 2021-11-23 Scans Setup Area Scan Zoom Scan Grid Extents [mm] 85.0 x 136.0 22.0 x 22.0 x 22.0 Grid Steps [mm] 8.5 x 8.5 3.4 x 3.4 x 1.4 Sensor Surface [mm] 3.0 1.4 **Measurement Results** Area Scan Zoom Scan 2022-08-10 Date 2022-08-10 psSAR1g [W/kg] 0.274 0.254 psSAR8g [W/kg] 0.092 0.093 0.080 0.080 psSAR10g [W/kg] psPDab (4.0cm2, sq) [W/m2] 1.860 0.05 Power Drift [dB] 0.02 53.5 M2/M1 [%] Dist 3dB Peak [mm] 7.3

Interpolated SAR [W/kg]

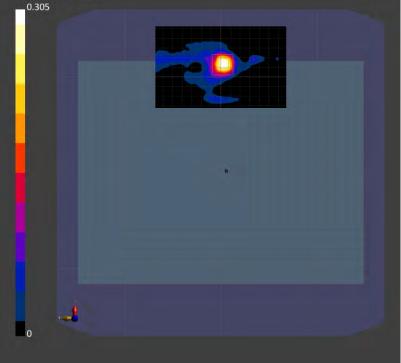

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



ID: 022 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz) Exposure Conditions


Exposure conditions		
Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Bottom Surface, 2.00	1.0
Hardware Setup		
Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10	-06 DAE4 Sn558, 2021-11-23
Scans Setup	·	
Scan Type		5G Scan
Grid Extents [mm]		100.0 x 100.0
Grid Steps [lambda]		0.0625 x 0.0625
Sensor Surface [mm]		2.0
Measurement Results		
Scan Type		5G Scan
Date		2022-08-11
Avg. Area [cm²]		4.00
psPDn+ [W/m²]		2.46
psPDtot+ [W/m ²]		3.68
psPDmod+ [W/m²]		4.23
E _{max} [V/m]		59.2
Power Drift [dB]		-0.01
		•

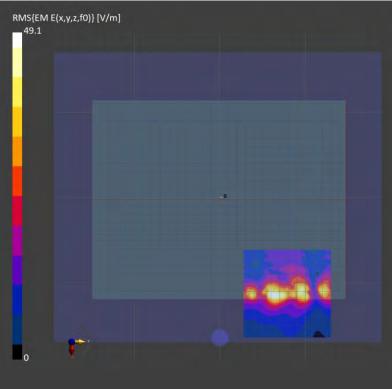

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 023 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 47 (6185.0 MHz) **Exposure Conditions**


Exposure conditions			
Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	
5G, Air	Bottom Surface, 2.00	1.0	
Hardware Setup			
Phantom	Probe, Calibration Date	DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10-06	6 DAE4 Sn558, 2021-11-23	
Scans Setup			
Scan Type		5G Scan	
Grid Extents [mm]		100.0 x 100.0	
Grid Steps [lambda]		0.0625 x 0.0625	
Sensor Surface [mm]		2.0	
Measurement Results			
Scan Type		5G Scan	
Date		2022-08-11	
Avg. Area [cm²]		4.00	
psPDn+ [W/m²]		1.41	
psPDtot+ [W/m ²]		2.74	
psPDmod+ [W/m ²]		3.16	
E _{max} [V/m]		45.5	
Power Drift [dB]		0.06	

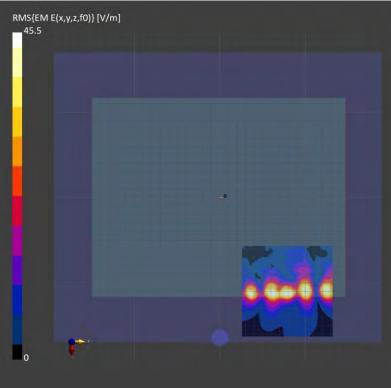

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 024 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-6, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz) Exposure Conditions


Exposure Conditions				
Phantom Section, TSL	Position, Test Distance [mm]		Conversion Factor	
5G, Air	Bottom Surface, 2.00		1.0	
Hardware Setup				
Phantom	Probe, Calibration Date		DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-7	0-06	DAE4 Sn558, 2021-11-23	
Scans Setup	·			
Scan Type			5G Scan	
Grid Extents [mm]			100.0 x 100.0	
Grid Steps [lambda]			0.0625 x 0.0625	
Sensor Surface [mm]			2.0	
Measurement Results				
Scan Type			5G Scan	
Date			2022-08-11	
Avg. Area [cm²]			4.00	
psPDn+ [W/m ²]			1.69	
psPDtot+ [W/m ²]			2.76	
psPDmod+ [W/m ²]			3.27	
E _{max} [V/m]			56.0	
Power Drift [dB]			-0.06	

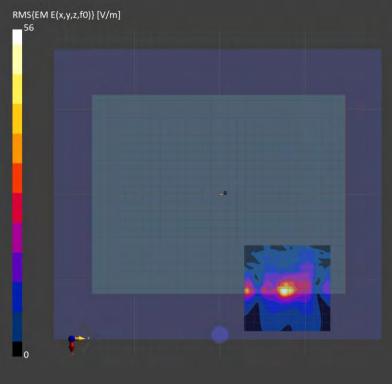

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 025 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz) Exposure Conditions


Exposure Conditions		
Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Bottom Surface, 2.00	1.0
Hardware Setup		
Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10	D-06 DAE4 Sn558, 2021-11-23
Scans Setup	· ·	· ·
Scan Type		5G Sc
Grid Extents [mm]		100.0 x 100
Grid Steps [lambda]		0.0625 x 0.06
Sensor Surface [mm]		2
Measurement Results		
Scan Type		5G Sc
Date		2022-08-
Avg. Area [cm²]		4.
psPDn+ [W/m²]		1.
psPDtot+ [W/m ²]		3.
psPDmod+ [W/m²]		4.
E _{max} [V/m]		53
Power Drift [dB]		-0.

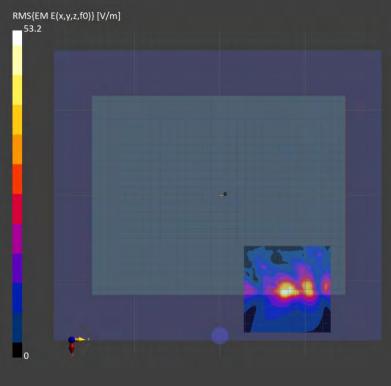

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 026 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz) Exposure Conditions

Exposure Conditions				
Phantom Section, TSL	Position, Test Distance [mm]		Conversion Factor	
5G, Air	Bottom Surface, 2.00		1.0	
Hardware Setup				
Phantom	Probe, Calibration Date		DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021	-10-06	DAE4 Sn558, 2021-11-23	
Scans Setup				
Scan Type			5G Scan	
Grid Extents [mm]			100.0 x 100.0	
Grid Steps [lambda]			0.0625 x 0.0625	
Sensor Surface [mm]			2.0	
Measurement Results				
Scan Type			5G Scan	
Date			2022-08-11	
Avg. Area [cm²]			4.00	
psPDn+ [W/m ²]			1.18	
psPDtot+ [W/m ²]			2.91	
psPDmod+ [W/m²]			3.46	
E _{max} [V/m]			47.7	
Power Drift [dB]			-0.05	

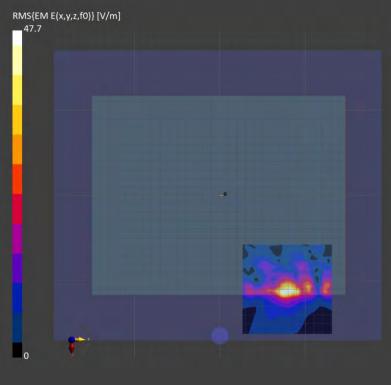

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 027 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz) Exposure Conditions

Exposure Conditions		
Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Bottom Surface, 2.00	1.0
Hardware Setup		
Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10-0	DAE4 Sn558, 2021-11-23
Scans Setup		
Scan Type		5G Scan
Grid Extents [mm]		100.0 x 100.0
Grid Steps [lambda]		0.0625 x 0.0625
Sensor Surface [mm]		2.0
Measurement Results		
Scan Type		5G Scan
Date		2022-08-12
Avg. Area [cm²]		4.00
psPDn+ [W/m²]		1.76
psPDtot+ [W/m ²]		2.62
psPDmod+ [W/m²]		3.63
E _{max} [V/m]		57.3
Power Drift [dB]		0.01

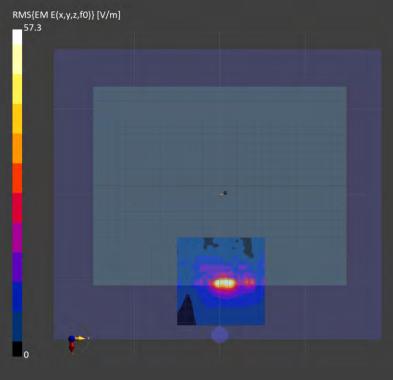

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ID: 028 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 47 (6185.0 MHz) Exposure Conditions


Exposure conditions			
Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	
5G, Air	Bottom Surface, 2.00	1.0	
Hardware Setup			
Phantom	Probe, Calibration Date	DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10	06 DAE4 Sn558, 2021-11-23	
Scans Setup			
Scan Type		5G Scan	
Grid Extents [mm]			
Grid Steps [lambda]	C		
Sensor Surface [mm]		2.0	
Measurement Results			
Scan Type		5G Scan	
Pate		2022-08-12	
Avg. Area [cm²]		4.00	
psPDn+ [W/m ²]		1.06	
psPDtot+ [W/m ²]		2.00	
psPDmod+ [W/m ²]		2.84	
E _{max} [V/m]		57.9	
ower Drift [dB]		0.03	

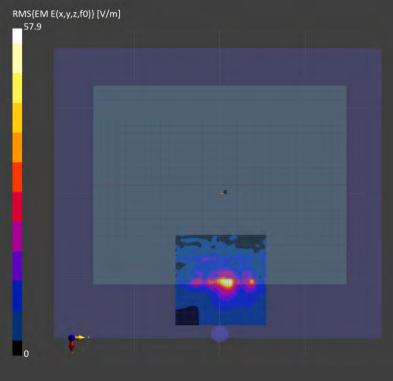

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 029 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-6, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz) Exposure Conditions


Position, Test Distance [mm]	Conversion Factor
Bottom Surface, 2.00	1.0
Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9579_F1-55GHz, 2021-10-06	DAE4 Sn558, 2021-11-23
	5G Scan
1	
0.062	
	2.0
	5G Scan
	4.00
PDn+ [W/m ²]	
PDmod+ [W/m ²]	
	44.5
	-0.03
	Bottom Surface, 2.00 Probe, Calibration Date

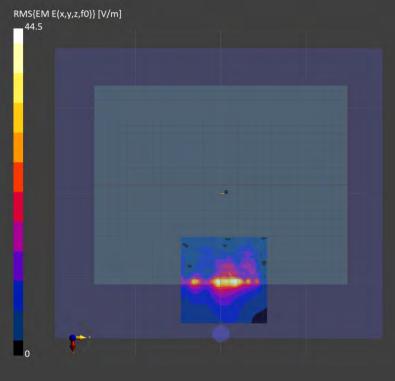

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 030 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-7, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 143 (6665.0 MHz) **Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]		Conversion Factor	
5G, Air	Bottom Surface, 2.00		1.0	
Hardware Setup				
Phantom	Probe, Calibration Date		DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10-06		DAE4 Sn558, 2021-11-23	
Scans Setup				
Scan Type		5G Scan		
Grid Extents [mm]	·		100.0 x 100.0	
Grid Steps [lambda]			0.0625 x 0.0625	
Sensor Surface [mm]			2.0	
Measurement Results				
Scan Type			5G Scan	
Date			2022-08-12	
Avg. Area [cm²]			4.00	
psPDn+ [W/m ²]			0.75	
psPDtot+ [W/m ²]			1.1:	
psPDmod+ [W/m ²]		1.5′		
E _{max} [V/m]	m _{ax} [V/m]		39.4	
Power Drift [dB]			0.03	

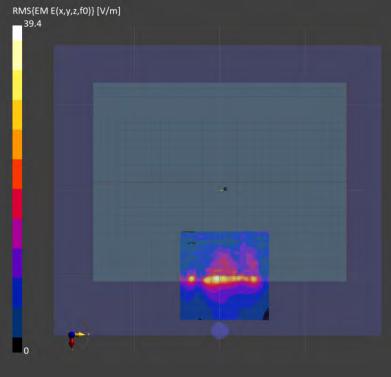

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





ID: 031 Report No. : TESA2207000203EN Measurement Report for Framework, Bottom Surface, U-NII-8, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz) **Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]		Conversion Factor	
5G, Air	Bottom Surface, 2.00		1.0	
Hardware Setup				
Phantom	Probe, Calibration Date		DAE, Calibration Date	
mmWave - 1096	EUmmWV4 - SN9579_F1-55GHz, 2021-10-06		DAE4 Sn558, 2021-11-23	
Scans Setup				
Scan Type			5G Scan	
Grid Extents [mm]			100.0 x 100.0	
Grid Steps [lambda]	0.		0.0625 x 0.0625	
Sensor Surface [mm]			2.0	
Measurement Results				
Scan Type			5G Scan	
Date			2022-08-12	
Avg. Area [cm²]			4.00	
psPDn+ [W/m ²]			1.14	
psPDtot+ [W/m ²]			1.98	
psPDmod+ [W/m ²]			2.30	
E _{max} [V/m]	E _{max} [V/m]		48	
Power Drift [dB]			-0.04	

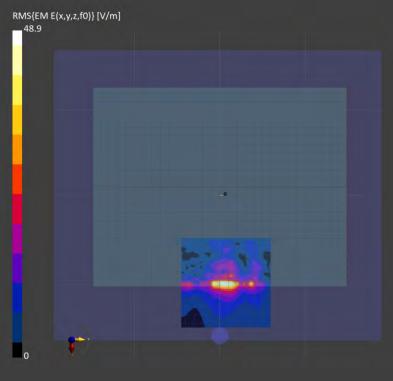

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12 SAR SYSTEM CHECK RESULTS

Report No. : TESA2207000203EN

Measurement Report for Device, FRONT, Validation band,

CW, Channel 6500 (6500.0 MHz), SN:1006

Ambient temperature: 22.4°C; Liquid temperature: 21.3°C


Exposure Conditions

Phantom Sec	tion, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL		FRONT, 5.00	5.65	6.017	34.36
Hardware S	Setup				
Phantom	Probe,	Probe, Calibration Date		AE, Calibration Date	
ELI	EX3DV	EX3DV4 - SN7466, 2022-01-26 DAE4 Sn5		AE4 Sn558, 2021-11-23	
Scans Setu	р				
			Area Sca	an	Zoom Sca

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 51.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-09	2022-08-09
psSAR1g [W/kg]	25.4	29.8
psSAR8g [W/kg]	6.40	6.78
psSAR10g [W/kg]	5.29	5.57
psPDab (4.0cm2, sq) [W/m2]		136
Power Drift [dB]	-0.00	-0.03
M2/M1 [%]		50.2
Dist 3dB Peak [mm]		6.4

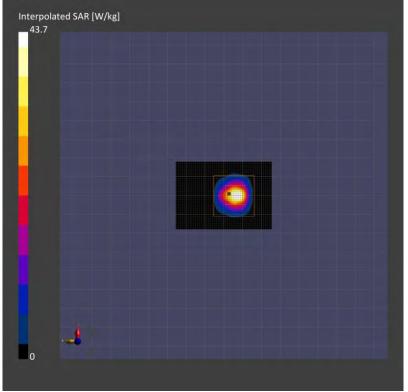

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No. : TESA2207000203EN Measurement Report for Device, FRONT, Validation band, CW, Channel 7000 (7000.0 MHz), SN:1007 Ambient temperature: 22.3°C; Liquid temperature: 21.2°C **Exposure Conditions**

		5.85 ¢		TSL Permittivity 33.76 Zoom Scar 22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.96 4.88 119 -0.03 55.7
Hardware Setup Phantom Probe ELI EX3D Scans Setup Grid Extents [mm] Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR1g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]	e, Calibration Date 0V4 - SN7466, 2022-01-26	DAE DAE Area Scan 36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	Zoom Scar 22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 Zoom Scar 2022-08-10 27.2 5.96 4.86 119 -0.00 58.3
Phantom Probe ELI EX3D Scans Setup EX3D Grid Extents [mm] Grid Steps [mm] Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR8g [W/kg] psSAR10g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]	0V4 - SN7466, 2022-01-26	DAE Area Scan 36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.90 4.88 119 -0.00 58.3
ELI EX3D Scans Setup Grid Extents [mm] Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR8g [W/kg] psSAR8g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]	0V4 - SN7466, 2022-01-26	DAE Area Scan 36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.90 4.88 119 -0.00 58.3
Scans Setup Grid Extents [mm] Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR10g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]	lts	Area Scan 36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.90 4.88 119 -0.00 58.3
Grid Extents [mm] Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR8g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]		36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.90 4.88 119 -0.00 58.3
Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date psSAR1g [W/kg] psSAR8g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]		36.0 x 45.0 8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	22.0 x 22.0 x 22.0 3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.2 5.90 4.88 119 -0.00 58.3
Grid Steps [mm] Sensor Surface [mm] Measurement Resul Date Date DSSAR1g [W/kg] DSSAR8g [W/kg] DSSAR10g [W/kg] DSSPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]		8.5 x 8.5	Area Scan 2022-08-10 23.7 5.76 4.75	3.4 x 3.4 x 1.4 1.4 Zoom Scar 2022-08-10 27.1 5.99 4.88 119 -0.00 58.1
Sensor Surface [mm] Measurement Resul Date Date DSSAR1g [W/kg] DSSAR8g [W/kg] DSSAR10g [W/kg] DSSPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]			Area Scan 2022-08-10 23.7 5.76 4.75	1.4 Zoom Scar 2022-08-10 27.2 5.90 4.80 119 -0.00 58.3
Measurement Resul			Area Scan 2022-08-10 23.7 5.76 4.75	Zoom Scal 2022-08-11 27.1 5.9 4.8 111 -0.0 58.1
Date DesSAR1g [W/kg] DesSAR8g [W/kg] DesSAR10g [W/kg] DesPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]			2022-08-10 23.7 5.76 4.75	2022-08-1 27. 5.9 4.8 11 -0.0 58.
Date psSAR1g [W/kg] psSAR8g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm]			2022-08-10 23.7 5.76 4.75	2022-08-1 27. 5.9 4.8 11 -0.0 58.
osSAR1g [W/kg] osSAR8g [W/kg] osSAR10g [W/kg] osPDab (4.0cm2, sq) [W Power Drift [dB] //2/M1 [%] Dist 3dB Peak [mm]	//m2]		2022-08-10 23.7 5.76 4.75	2022-08-1 27. 5.9 4.8 11 -0.0 58.
osSAR1g [W/kg] osSAR8g [W/kg] osSAR10g [W/kg] osPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]	//m2]		23.7 5.76 4.75	27.3 5.90 4.80 119 -0.03 58.3
psSAR8g [W/kg] psSAR10g [W/kg] psPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]	//m2]		5.76 4.75	5.9 4.8 11 -0.0 58.3
osSAR10g [W/kg] osPDab (4.0cm2, sq) [W Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]	//m2]		4.75	4.8 11 -0.0 58.
osPDab (4.0cm2, sq) [W Power Drift [dB] //2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]	//m2]			11 [,] -0.0 58.
Power Drift [dB] M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]			0.03	-0.0 58.
M2/M1 [%] Dist 3dB Peak [mm] Interpolated SAR [W/kg]				58.
Dist 3dB Peak [mm]				
Interpolated SAR [W/kg]				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13 PD SYSTEM CHECK RESULT


Report No. : TESA2207000203EN

Measurement Report for Device, FRONT, Validation band,

CW, Channel 10000 (10000.0 MHz), SN:1021

Exposure Conditions

Position, Test Distance [mm]	Conversion Factor	
FRONT, 10.00	1.0	
Probe, Calibration Date	DAE, Calibration Date	
EUmmWV4 - SN9579_F1-55GHz, 2021-10-06	DAE4 Sn558, 2021-11-23	
Scan Type		
	120.0 x 120.0	
	5G Scan	
ate		
Avg. Area [cm ²]		
psPDn+ [W/m ²]		
psPDtot+ [W/m ²]		
psPDmod+ [W/m ²]		
E _{max} [V/m]		
Power Drift [dB]		
	FRONT, 10.00 Probe, Calibration Date	

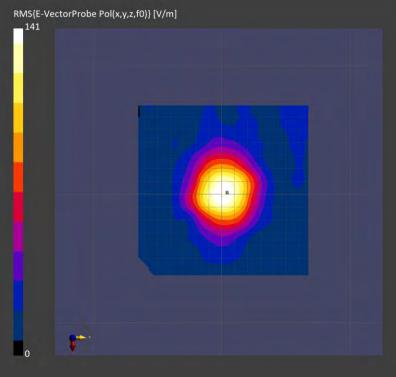

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Refer to separated files for the following appendixes.

- 14.1 SAR_Appendix A Photographs
- 14.2 SAR Appendix B DAE & Probe Cal. Certificate
- SAR Appendix C Phantom Description & Dipole Cal. Certificate 14.3

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.