

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 25028RN03L
FCC ID : 2AFZZRN03L
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information.....	6
4.2 General LTE SAR Test and Reporting Considerations	8
5. Proximity Sensor Triggering Test.....	12
6. RF Exposure Limits.....	14
6.1 Uncontrolled Environment	14
6.2 Controlled Environment.....	14
7. Specific Absorption Rate (SAR)	15
7.1 Introduction	15
7.2 SAR Definition	15
8. System Description and Setup.....	16
8.1 E-Field Probe	17
8.2 Data Acquisition Electronics (DAE)	17
8.3 Phantom.....	18
8.4 Device Holder.....	19
9. Measurement Procedures.....	20
9.1 Spatial Peak SAR Evaluation	20
9.2 Power Reference Measurement.....	21
9.3 Area Scan.....	21
9.4 Zoom Scan.....	22
9.5 Volume Scan Procedures.....	22
9.6 Power Drift Monitoring.....	22
10. Test Equipment List	23
11. System Verification	24
11.1 Tissue Simulating Liquids	24
11.2 Tissue Verification.....	24
11.3 System Performance Check Results	26
12. RF Exposure Positions	28
12.1 Ear and handset reference point	28
12.2 Definition of the cheek position	29
12.3 Definition of the tilt position	30
12.4 Body Worn Accessory	31
12.5 Product Specific 10g SAR Exposure	32
12.6 Wireless Router.....	32
13. Conducted RF Output Power (Unit: dBm)	33
14. Antenna Location	43
15. SAR Test Results	44
15.1 Head SAR	47
15.2 Hotspot SAR	54
15.3 Body Worn Accessory SAR	64
15.4 Product specific 10g SAR.....	69
15.5 Repeated SAR Measurement	70
16. Simultaneous Transmission Analysis	71
16.1 Head Exposure Conditions.....	72
16.2 Hotspot Exposure Conditions.....	73
16.3 Body-Worn Accessory Exposure Conditions	74
17. Uncertainty Assessment.....	75
18. References.....	76
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	



Sporton International Inc. (Kunshan)



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, 25028RN03L**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	0.80	0.47	0.47	1.57
		GSM1900	1.06	1.03	0.70	
	WCDMA	WCDMA II	0.99	1.06	1.05	
		WCDMA IV	0.99	1.01	0.66	
		WCDMA V	0.97	0.60	0.60	
	LTE	LTE Band 2	0.86	0.94	0.91	
		LTE Band 4	0.90	1.09	0.71	
		LTE Band 5	0.86	0.50	0.50	
		LTE Band 7	1.08	1.01	1.01	
		LTE Band 13	0.95	0.32	0.32	
		LTE Band 26	0.95	0.54	0.54	
		LTE Band 66	0.87	0.96	0.59	
		LTE Band 38	1.08	0.97	0.97	
		LTE Band 41	1.03	0.97	0.97	
DTS	WLAN	2.4GHz WLAN	1.03	0.80	0.70	1.57
NII		5GHz WLAN	1.00	0.74	1.05	1.57
DSS	Bluetooth	2.4GHz Bluetooth	0.29	0.10	0.10	1.57
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	2.10			-
Date of Testing:			2024/12/19 ~ 2024/12/25			

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-KS	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Redmi
Model Name	25028RN03L
FCC ID	2AFZZRN03L
IMEI Code	Sample 1: IMEI1: 864596070040946 IMEI2: 864596070040953 Sample 2: IMEI1: 864596070043486 IMEI2: 864596070043494 Sample 3: IMEI1: 864596070042702 IMEI2: 864596070042710 Sample 4: IMEI1: 864596070060969 IMEI2: 864596070060977
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	135100C3Z
SW Version	Android 15
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports	

- VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
 4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
 5. This device supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
 6. The device implements Proximity sensors/receiver detect mechanism reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
 7. For WLAN/BT when transmit simultaneously with each other, or when transmit simultaneous with WWAN/BT, power reduction will be activated to head, Body and hotspot exposure conditions.
 8. There are four samples and the differences are as the following table shows. According to the difference, sample 1 was chosen to perform full test and sample 2/3/4 verified the worst cases.

Sample	Memory	Battery	Screen
Sample 1	6+128G	Battery 1	1st Screen
Sample 2	3+64G	Battery 2	2nd Screen
Sample 3	4+128G	Battery 3	4th Screen
Sample 4	4+64G	Battery 1	3rd Screen

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																												
FCC ID	2AFZZRN03L																																																																											
Equipment Name	Mobile Phone																																																																											
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																											
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																											
uplink modulations used	QPSK / 16QAM / 64QAM																																																																											
LTE Voice / Data requirements	Voice and Data																																																																											
LTE Release Version	R12																																																																											
CA Support	Not Supported																																																																											
LTE MPR permanently built-in by design	<table><tr><th colspan="7">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																												
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																					
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																						
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																					
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																					
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																					
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																					
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																					
256 QAM	≥ 1						≤ 5																																																																					
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																											
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																											
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver detect mechanism, head/body -worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.																																																																											

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900

LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745

LTE Band 5									
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	844

LTE Band 7									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	2560

LTE Band 13				
	Bandwidth 5 MHz		Bandwidth 10 MHz	
	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)
L	23205	779.5	23230	782
M	23230	782		
H	23255	784.5		

LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

LTE Band 38									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	2610

LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Antenna	Default	Receiver On	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 4	Ant 1	25.50	25.50	22.50	25.50
LTE Band 66	Ant 1	25.50	25.50	25.50	25.50

Band	Antenna	Default	Receiver On	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 4	Ant 4	25.00	21.00	25.00	25.00
LTE Band 66	Ant 4	25.00	21.00	24.00	25.00

Band	Antenna	Default	Receiver On	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 5	Ant 1	25.50	25.50	25.50	25.50
LTE Band 26	Ant 1	25.00	25.00	21.50	25.00

Band	Antenna	Default	Receiver On	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 5	Ant 4	25.00	21.00	24.00	25.00
LTE Band 26	Ant 4	24.50	18.50	19.50	23.00


Band	Antenna	Default	Head	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 38	Ant 1	25.00	25.00	23.00	25.00
LTE Band 41	Ant 1	25.00	25.00	23.00	25.00

Band	Antenna	Default	Receiver On	Sensor on	Sensor off
			DSI1	DSI 4	DSI 2
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 38	Ant 4	24.50	20.50	21.50	24.50
LTE Band 41	Ant 4	24.50	20.50	21.50	24.50

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body or finger or hand at the back or bottom or top side of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. The sensors can use to detect the proximity of the user's body or handheld states at the back or bottom or top side of the device use a detection threshold distance. When back/top/bottom sides of body or handheld condition is detected reduced power will be active. The trigger distance shown in the sections below.
4. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

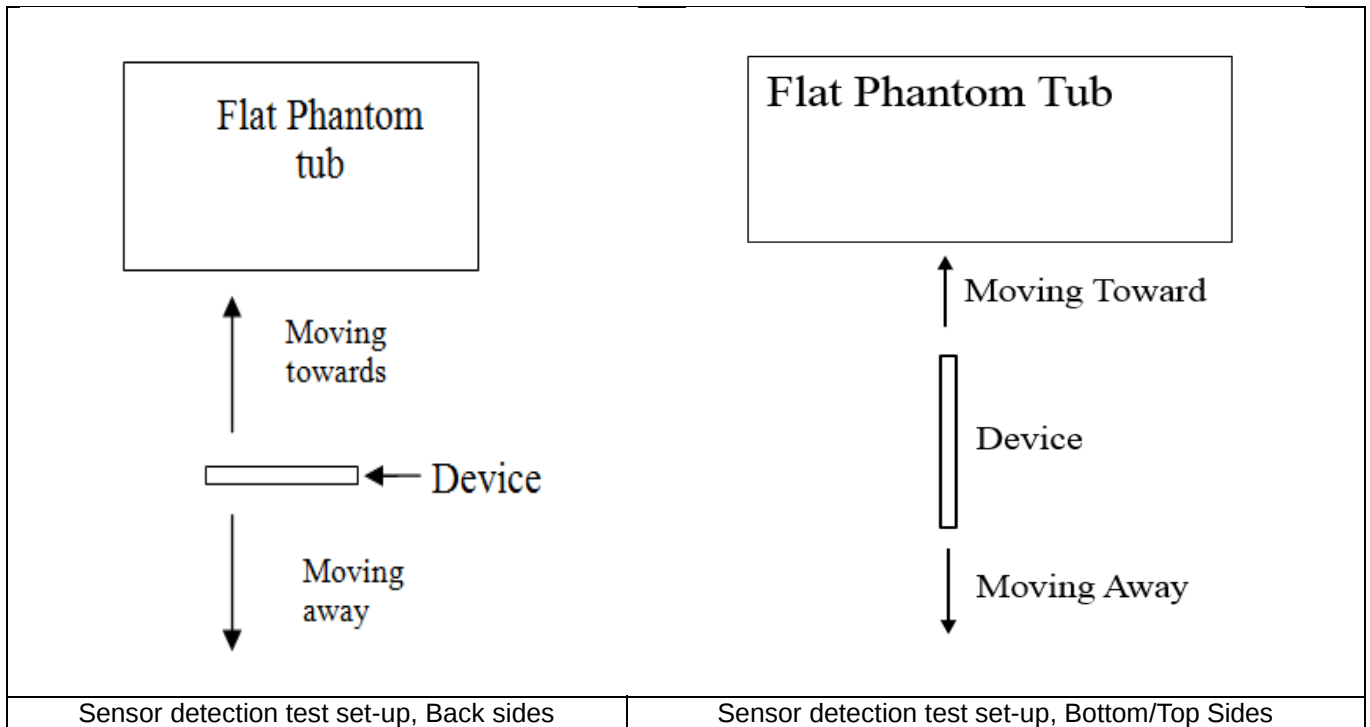

<P-Sensor>

< Sensor for Ant1>

Proximity Sensor Triggering Distance (mm)				
Position	Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16

< Sensor for Ant4>

Proximity Sensor Triggering Distance (mm)				
Position	Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

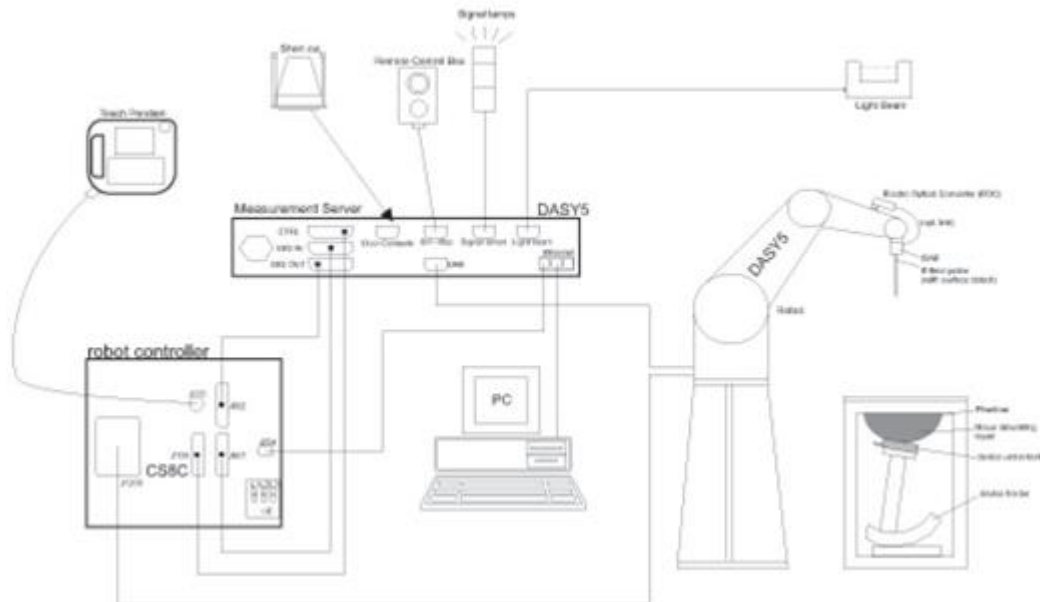

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2025/2/22
SPEAG	835MHz System Validation Kit	D835V2	4d298	2024/1/26	2025/1/25
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2025/2/22
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2022/3/30	2025/3/28
SPEAG	2450MHz System Validation Kit	D2450V2	1095	2024/2/8	2025/2/7
SPEAG	2600MHz System Validation Kit	D2600V2	1112	2023/12/18	2026/12/17
SPEAG	5000MHz System Validation Kit	D5GHZV2	1113	2022/9/23	2025/9/21
SPEAG	Data Acquisition Electronics	DAE4	1338	2024/3/18	2025/3/17
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2024/1/22	2025/1/21
SPEAG	SAM Twin Phantom	SAM Twin	TP-1754	NCR	NCR
Testo	Thermo-Hygrometer	HTC-1	55011	2024/1/4	2025/1/3
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2024/7/4	2025/7/3
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	2024/7/4	2025/7/3
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2024/2/19	2025/2/18
Anritsu	Vector Signal Generator	MG3710A	6201682672	2024/1/2	2025/1/1
Rohde & Schwarz	Power Meter	NRVD	102081	2024/7/4	2025/7/3
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2024/7/4	2025/7/3
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2024/7/4	2025/7/3
R&S	BLUETOOTH TESTER	CBT	101246	2024/7/4	2025/7/3
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2024/10/11	2025/10/10
TES	DIGITAC THERMOMETER	TYPE-K	220305411	2024/1/4	2025/1/3
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

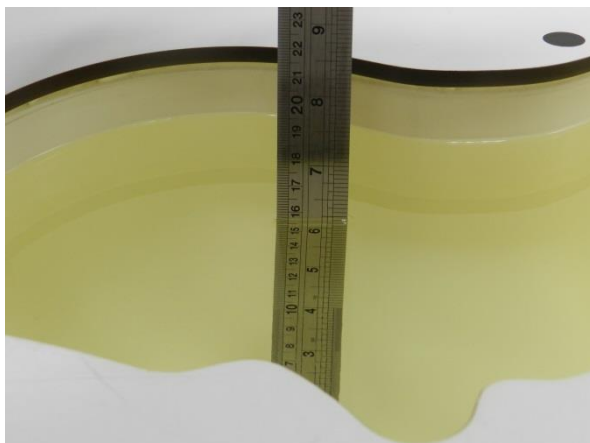


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.6	0.900	41.192	0.89	41.90	1.12	-1.69	±5	2024/12/19
835	Head	22.9	0.902	41.240	0.90	41.50	0.22	-0.63	±5	2024/12/19
1750	Head	22.8	1.409	40.669	1.37	40.10	2.85	1.42	±5	2024/12/20
1900	Head	22.6	1.397	39.035	1.40	40.00	-0.21	-2.41	±5	2024/12/20
2600	Head	22.7	1.926	38.230	1.96	39.00	-1.73	-1.97	±5	2024/12/21
750	Head	22.6	0.888	42.260	0.89	41.90	-0.22	0.86	±5	2024/12/21
835	Head	22.6	0.912	41.936	0.90	41.50	1.33	1.05	±5	2024/12/22
1750	Head	22.7	1.317	40.225	1.37	40.10	-3.87	0.31	±5	2024/12/22
1900	Head	22.8	1.407	40.199	1.40	40.00	0.50	0.50	±5	2024/12/23
2600	Head	22.8	2.030	40.355	1.96	39.00	3.57	3.47	±5	2024/12/23
2450	Head	22.7	1.806	38.608	1.80	39.20	0.33	-1.51	±5	2024/12/24
5250	Head	22.7	4.601	35.852	4.71	35.90	-2.31	-0.13	±5	2024/12/24
5600	Head	22.8	5.004	35.285	5.07	35.50	-1.30	-0.61	±5	2024/12/25
5750	Head	22.8	5.171	35.094	5.22	35.40	-0.94	-0.86	±5	2024/12/25

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/12/19	750	Head	50	1087	3857	1338	0.436	8.58	8.72	1.63
2024/12/19	835	Head	50	4d298	3857	1338	0.461	9.89	9.22	-6.77
2024/12/20	1750	Head	50	1090	3857	1338	1.910	37.00	38.2	3.24
2024/12/20	1900	Head	50	5d118	3857	1338	2.020	39.30	40.4	2.80
2024/12/21	2600	Head	50	1112	3857	1338	2.630	55.10	52.6	-4.54
2024/12/21	750	Head	50	1087	3857	1338	0.419	8.58	8.38	-2.33
2024/12/22	835	Head	50	4d298	3857	1338	0.477	9.89	9.54	-3.54
2024/12/22	1750	Head	50	1090	3857	1338	1.760	37.00	35.2	-4.86
2024/12/23	1900	Head	50	5d118	3857	1338	1.810	39.30	36.2	-7.89
2024/12/23	2600	Head	50	1112	3857	1338	2.690	55.10	53.8	-2.36
2024/12/24	2450	Head	50	1095	3857	1338	2.600	52.60	52	-1.14
2024/12/24	5250	Head	50	1113	3857	1338	3.870	81.50	77.4	-5.03
2024/12/25	5600	Head	50	1113	3857	1338	4.000	82.60	80	-3.15
2024/12/25	5750	Head	50	1113	3857	1338	3.830	80.80	76.6	-5.20

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/12/19	750	Head	50	1087	3857	1338	0.293	5.65	5.86	3.72
2024/12/19	835	Head	50	4d298	3857	1338	0.307	6.45	6.14	-4.81
2024/12/20	1750	Head	50	1090	3857	1338	0.998	19.50	19.96	2.36
2024/12/20	1900	Head	50	5d118	3857	1338	1.070	20.40	21.4	4.90
2024/12/21	2600	Head	50	1112	3857	1338	1.200	24.80	24	-3.23
2024/12/21	750	Head	50	1087	3857	1338	0.295	5.65	5.9	4.42
2024/12/22	835	Head	50	4d298	3857	1338	0.313	6.45	6.26	-2.95
2024/12/22	1750	Head	50	1090	3857	1338	0.975	19.50	19.5	0.00
2024/12/23	1900	Head	50	5d118	3857	1338	0.958	20.40	19.16	-6.08
2024/12/23	2600	Head	50	1112	3857	1338	1.240	24.80	24.8	0.00
2024/12/24	2450	Head	50	1095	3857	1338	1.230	24.70	24.6	-0.40
2024/12/24	5250	Head	50	1113	3857	1338	1.100	23.30	22	-5.58
2024/12/25	5600	Head	50	1113	3857	1338	1.130	23.70	22.6	-4.64
2024/12/25	5750	Head	50	1113	3857	1338	1.150	23.00	23	0.00

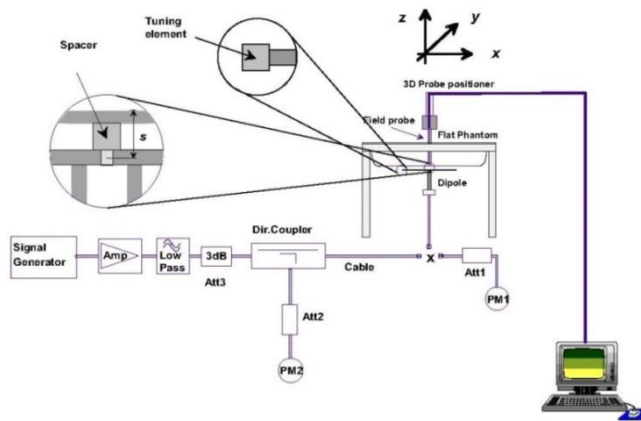


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

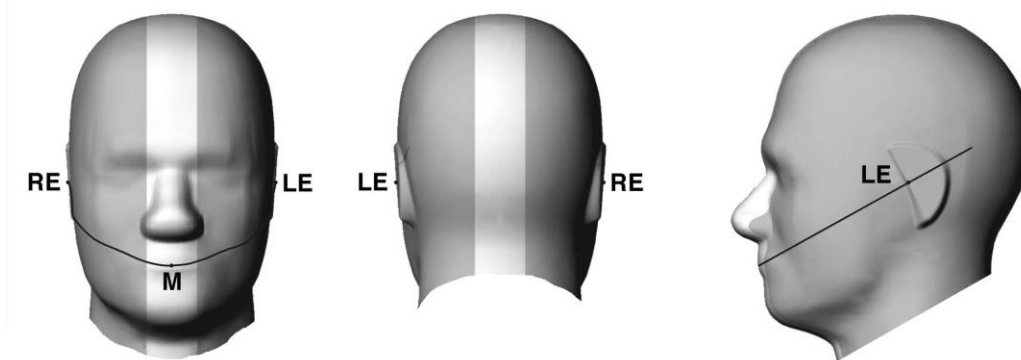


Fig 12.1.1 Front, back, and side views of SAM twin phantom

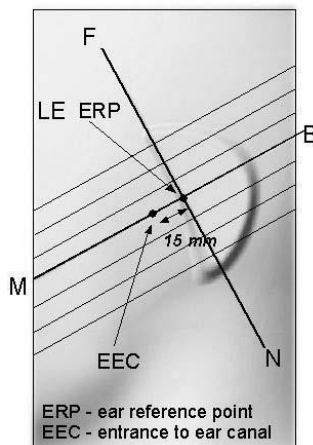


Fig 12.1.2 Close-up side view of phantom showing the ear region.

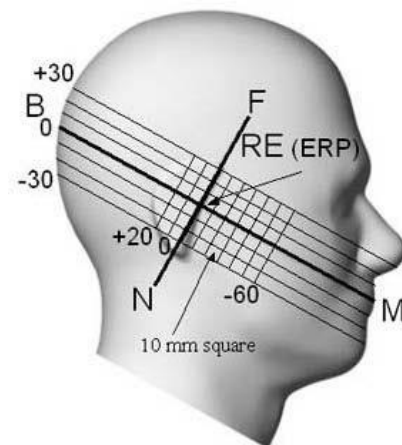


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

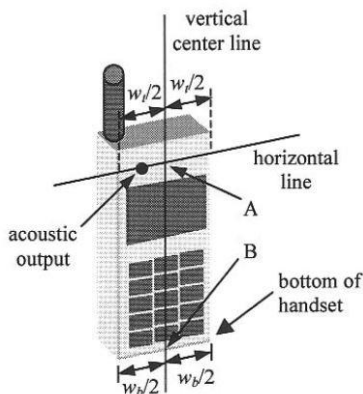


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

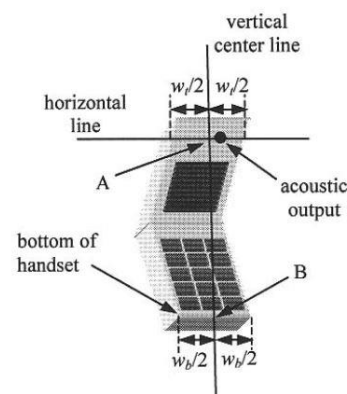


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

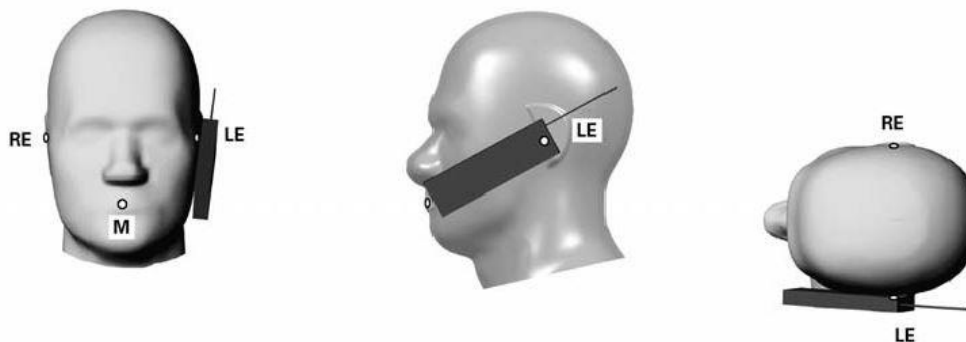


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

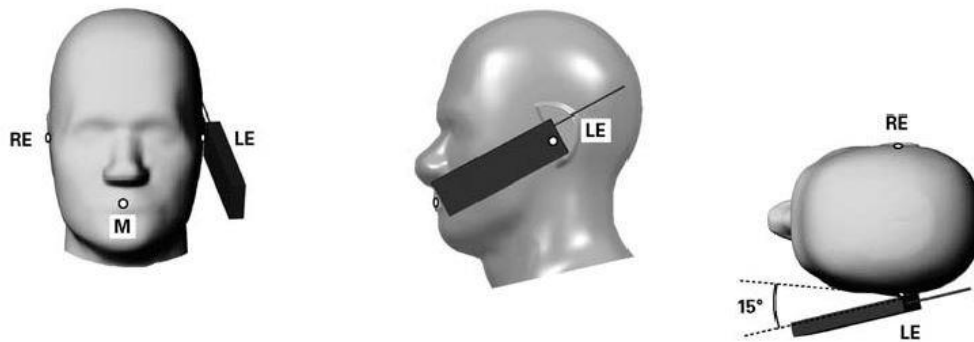


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

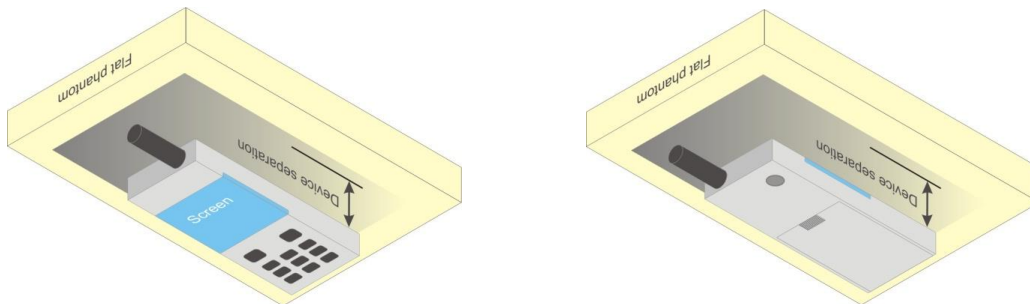


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

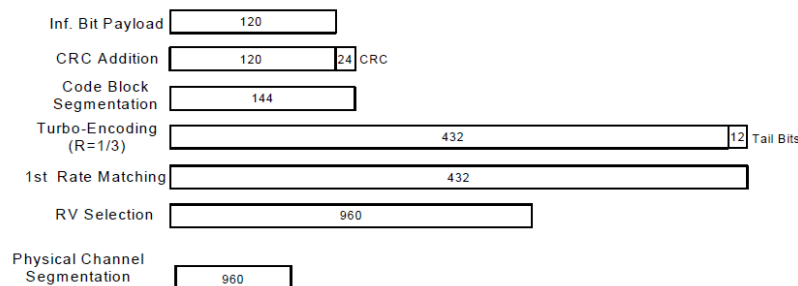


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK) Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

1. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
4. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.


Setup Configuration
<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

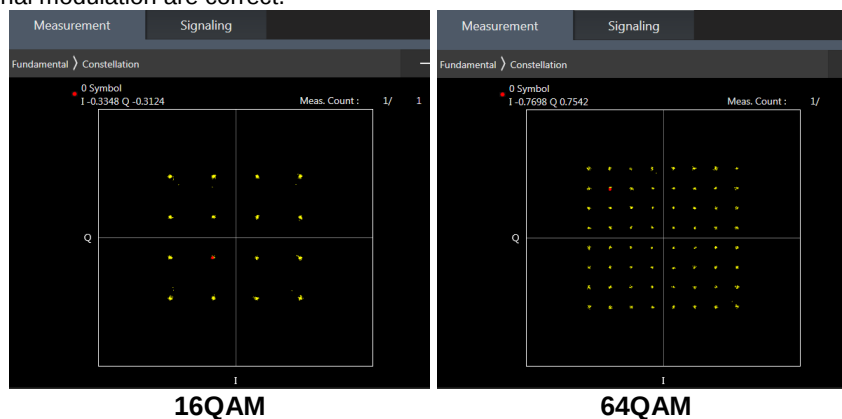

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

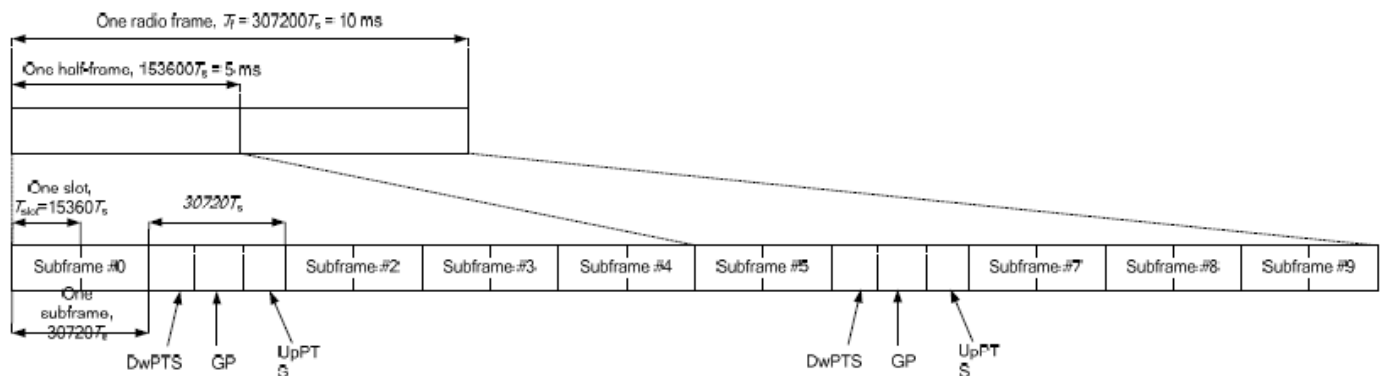


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 77.63% as following figure, for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to 83.3% for Bluetooth reported SAR calculation.

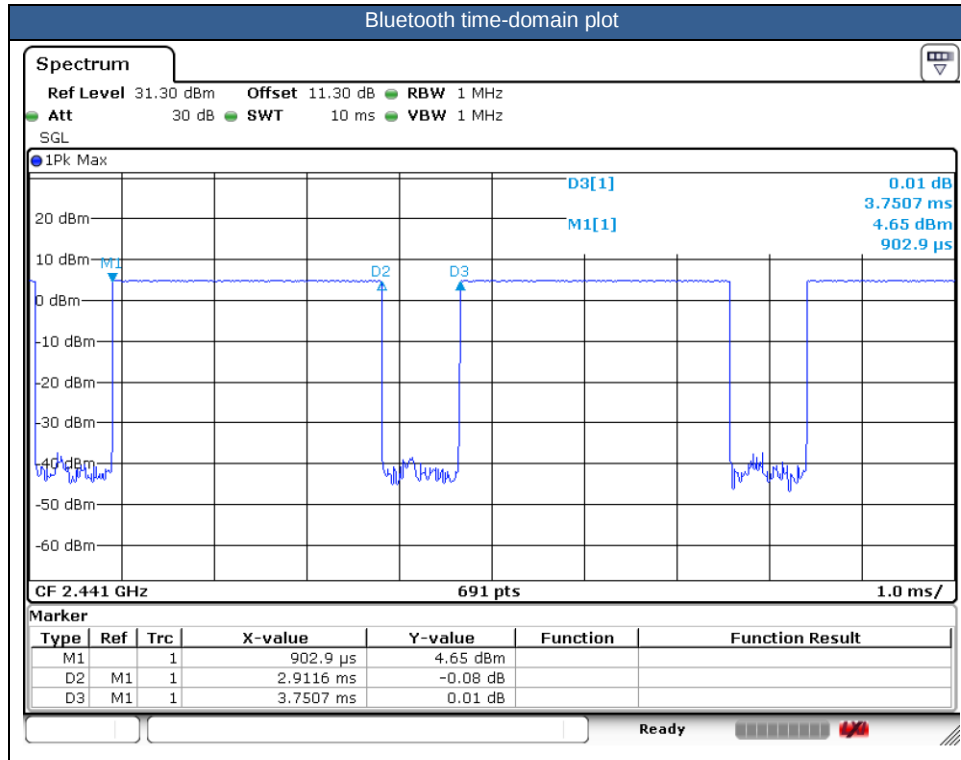



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements Proximity sensors/receiver detect mechanism reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
5. For WLAN/BT when transmit simultaneously with each other, or when transmit simultaneous with WWAN/BT, power reduction will be activated to head, Body and hotspot exposure conditions.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
7. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.
8. For Phablet devices, when hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ .

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

DSI status description:

The device has the following DSI state which used at different exposure condition.

Exposure Condition	DSI	Trigger conditions
Head SAR	DSI 1	Earpiece On
Body worn/Hotspot SAR	DSI 4	Sensor On
Body worn/Hotspot SAR	DSI 2	Sensor Off



15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	23230	782	1	24.27	25.50	1.327	-	-	0.08	0.079	0.105
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 1	23230	782	1	23.31	24.50	1.315	-	-	0.01	0.058	0.076
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	23230	782	1	24.27	25.50	1.327	-	-	0.03	0.041	0.054
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 1	23230	782	1	23.31	24.50	1.315	-	-	-0.08	0.000	0.000
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	23230	782	1	24.27	25.50	1.327	-	-	0.09	0.107	0.142
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	23230	782	2	24.27	25.50	1.327	-	-	0.08	0.102	0.135
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	23230	782	3	24.27	25.50	1.327	-	-	0.01	0.105	0.139
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	23230	782	4	24.27	25.50	1.327	-	-	0.03	0.093	0.123
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 1	23230	782	1	23.31	24.50	1.315	-	-	-0.08	0.100	0.132
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	23230	782	1	24.27	25.50	1.327	-	-	0.1	0.049	0.065
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 1	23230	782	1	23.31	24.50	1.315	-	-	-0.18	0.000	0.000
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	1	22.31	23.00	1.172	-	-	0.1	0.770	0.903
01	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	1	22.18	23.00	1.208	-	-	-0.01	0.787	0.951
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	2	22.18	23.00	1.208	-	-	-0.08	0.780	0.942
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	3	22.18	23.00	1.208	-	-	-0.08	0.714	0.862
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	4	22.18	23.00	1.208	-	-	0.1	0.719	0.868
	LTE Band 13	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	23230	782	1	22.05	23.00	1.245	-	-	0.12	0.761	0.947
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	23230	782	1	22.31	23.00	1.172	-	-	0.08	0.674	0.790
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 4	DSI 1	23230	782	1	22.18	23.00	1.208	-	-	-0.17	0.704	0.850
	LTE Band 13	10M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	23230	782	1	22.05	23.00	1.245	-	-	-0.03	0.642	0.799
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	23230	782	1	22.31	23.00	1.172	-	-	0.14	0.538	0.631
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 4	DSI 1	23230	782	1	22.18	23.00	1.208	-	-	0.11	0.542	0.655
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	23230	782	1	22.31	23.00	1.172	-	-	-0.05	0.518	0.607
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 4	DSI 1	23230	782	1	22.18	23.00	1.208	-	-	0.18	0.524	0.633
850MHz																					
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 1	DSI 1	189	836.4	1	30.49	31.50	1.262	-	-	0.14	0.128	0.162
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Tilted	0mm	Ant 1	DSI 1	189	836.4	1	30.49	31.50	1.262	-	-	-0.17	0.066	0.083
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 1	DSI 1	189	836.4	1	30.49	31.50	1.262	-	-	0.17	0.155	0.196
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Tilted	0mm	Ant 1	DSI 1	189	836.4	1	30.49	31.50	1.262	-	-	-0.05	0.090	0.114
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 4	DSI 1	189	836.4	1	27.92	28.50	1.143	-	-	0.01	0.701	0.801
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 4	DSI 1	128	824.2	1	27.90	28.50	1.148	-	-	0.1	0.580	0.666
02	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 4	DSI 1	251	848.8	1	27.87	28.50	1.156	-	-	-0.07	0.694	0.802
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Tilted	0mm	Ant 4	DSI 1	189	836.4	1	27.92	28.50	1.143	-	-	-0.17	0.592	0.677
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 4	DSI 1	189	836.4	1	27.92	28.50	1.143	-	-	-0.08	0.499	0.570
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Tilted	0mm	Ant 4	DSI 1	189	836.4	1	27.92	28.50	1.143	-	-	0.05	0.471	0.538
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 1	4182	836.4	1	23.92	25.00	1.282	-	-	0.06	0.204	0.262
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 1	4182	836.4	1	23.92	25.00	1.282	-	-	-0.09	0.115	0.147
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	4182	836.4	1	23.92	25.00	1.282	-	-	-0.08	0.224	0.287
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 1	4182	836.4	1	23.92	25.00	1.282	-	-	0.13	0.139	0.178
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	4182	836.4	1	19.62	21.00	1.374	-	-	0.12	0.641	0.881
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	4132	826.4	1	19.53	21.00	1.403	-	-	0.03	0.560	0.786
03	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	4233	846.6	1	19.57	21.00	1.390	-	-	-0.07	0.698	0.970
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	4182	836.4	1	19.62	21.00	1.374	-	-	0.18	0.580	0.797
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	4182	836.4	1	19.62	21.00	1.374	-	-	0.07	0.456	0.627
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	4182	836.4	1	19.62	21.00	1.374	-	-	0.01	0.457	0.628
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	20525	836.5	1	24.31	25.50	1.315	-	-	0.07	0.284	0.374
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 1	20525	836.5	1	23.29	24.50	1.321	-	-	-0.18	0.246	0.325
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	20525	836.5	1	24.31	25.50	1.315	-	-	0.03	0.132	0.174



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 1	20525	836.5	1	23.29	24.50	1.321	-	-	-0.15	0.114	0.151
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	20525	836.5	1	24.31	25.50	1.315	-	-	0.08	0.285	0.375
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	20525	836.5	2	24.31	25.50	1.315	-	-	-0.18	0.247	0.325
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	20525	836.5	3	24.31	25.50	1.315	-	-	0.1	0.235	0.309
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	20525	836.5	4	24.31	25.50	1.315	-	-	0.12	0.254	0.334
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 1	20525	836.5	1	23.29	24.50	1.321	-	-	-0.15	0.253	0.334
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	20525	836.5	1	24.31	25.50	1.315	-	-	0.11	0.174	0.229
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 1	20525	836.5	1	23.29	24.50	1.321	-	-	-0.08	0.152	0.201
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	20525	836.5	1	20.38	21.00	1.153	-	-	-0.17	0.703	0.811
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	20525	836.5	1	20.35	21.00	1.161	-	-	-0.08	0.676	0.785
04	LTE Band 5	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	20525	836.5	1	20.17	21.00	1.211	-	-	0.07	0.710	0.860
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	20525	836.5	1	20.38	21.00	1.153	-	-	-0.04	0.644	0.743
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 4	DSI 1	20525	836.5	1	20.35	21.00	1.161	-	-	-0.08	0.655	0.761
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	20525	836.5	1	20.38	21.00	1.153	-	-	0.18	0.492	0.567
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 4	DSI 1	20525	836.5	1	20.35	21.00	1.161	-	-	-0.04	0.474	0.551
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	20525	836.5	1	20.38	21.00	1.153	-	-	-0.08	0.483	0.557
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 4	DSI 1	20525	836.5	1	20.35	21.00	1.161	-	-	-0.13	0.470	0.546
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	26865	831.5	1	24.57	25.50	1.239	-	-	0.03	0.226	0.280
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 1	DSI 1	26865	831.5	1	23.34	24.50	1.306	-	-	-0.16	0.210	0.274
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	26865	831.5	1	24.57	25.50	1.239	-	-	-0.02	0.099	0.123
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 1	DSI 1	26865	831.5	1	23.34	24.50	1.306	-	-	0.15	0.094	0.123
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	26865	831.5	1	24.57	25.50	1.239	-	-	0.04	0.233	0.289
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 1	DSI 1	26865	831.5	1	23.34	24.50	1.306	-	-	-0.09	0.207	0.270
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	26865	831.5	1	24.57	25.50	1.239	-	-	0.11	0.131	0.162
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 1	DSI 1	26865	831.5	1	23.34	24.50	1.306	-	-	-0.05	0.123	0.161
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	1	20.52	21.50	1.253	-	-	-0.13	0.600	0.752
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	1	20.44	21.50	1.276	-	-	0.06	0.636	0.812
05	LTE Band 26	15M	QPSK	75	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	1	20.28	21.50	1.324	-	-	-0.01	0.716	0.948
	LTE Band 26	15M	QPSK	75	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	2	20.28	21.50	1.324	-	-	0.08	0.708	0.938
	LTE Band 26	15M	QPSK	75	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	3	20.28	21.50	1.324	-	-	-0.17	0.676	0.895
	LTE Band 26	15M	QPSK	75	0	-	Right Cheek	0mm	Ant 4	DSI 1	26865	831.5	4	20.28	21.50	1.324	-	-	-0.03	0.678	0.898
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	26865	831.5	1	20.52	21.50	1.253	-	-	-0.03	0.547	0.685
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 4	DSI 1	26865	831.5	1	20.44	21.50	1.276	-	-	-0.03	0.578	0.738
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	26865	831.5	1	20.52	21.50	1.253	-	-	-0.07	0.406	0.509
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 4	DSI 1	26865	831.5	1	20.44	21.50	1.276	-	-	0.05	0.445	0.568
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	26865	831.5	1	20.52	21.50	1.253	-	-	-0.11	0.405	0.508
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 4	DSI 1	26865	831.5	1	20.44	21.50	1.276	-	-	-0.12	0.429	0.548
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 1	1413	1732.6	1	23.62	25.00	1.374	-	-	0.08	0.069	0.095
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 1	1413	1732.6	1	23.62	25.00	1.374	-	-	0.01	0.062	0.085
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	1413	1732.6	1	23.62	25.00	1.374	-	-	0.03	0.093	0.128
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	1413	1732.6	2	23.62	25.00	1.374	-	-	0.14	0.063	0.087
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	1413	1732.6	3	23.62	25.00	1.374	-	-	0.11	0.092	0.126
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	1413	1732.6	4	23.62	25.00	1.374	-	-	-0.05	0.091	0.125
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 1	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.08	0.056	0.077
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	1413	1732.6	1	19.56	21.00	1.393	-	-	-0.08	0.623	0.868
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	1312	1712.4	1	19.46	21.00	1.426	-	-	0.12	0.535	0.763
06	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	1513	1752.6	1	19.51	21.00	1.409	-	-	-0.02	0.705	0.994
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1413	1732.6	1	19.56	21.00	1.393	-	-	0.1	0.613	0.854
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1312	1712.4	1	19.46	21.00	1.426	-	-	0.03	0.588	0.838
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1513	1752.6	1	19.51	21.00	1.409	-	-	0.05	0.645	0.909
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	1413	1732.6	1	19.56	21.00	1.393	-	-	-0.18	0.361	0.503
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	1413	1732.6	1	19.56	21.00	1.393	-	-	0.1	0.407	0.567
	LTE Band 4	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	20175	1732.5	1	24.25	25.50	1.334	-	-	0.08	0.063	0.084
	LTE Band 4	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.17	0.050	0.067
	LTE Band 4	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.03	0.055	0.073



FCC SAR Test Report

Report No. : FA4D0203

	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 1	9400	1880	1	23.47	25.00	1.422	-	-	0.11	0.061	0.087
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	9400	1880	1	15.58	17.00	1.387	-	-	-0.08	0.571	0.792
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9400	1880	1	15.58	17.00	1.387	-	-	-0.04	0.602	0.835
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9262	1852.4	1	15.47	17.00	1.422	-	-	-0.08	0.517	0.735
10	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9538	1907.6	1	15.43	17.00	1.435	-	-	0.04	0.688	0.988
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	9400	1880	1	15.58	17.00	1.387	-	-	0.17	0.314	0.435
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	9400	1880	1	15.58	17.00	1.387	-	-	0.18	0.403	0.559
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	18900	1880	1	24.20	25.50	1.349	-	-	-0.04	0.250	0.337
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	18900	1880	1	23.11	24.50	1.377	-	-	-0.08	0.208	0.286
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	18900	1880	1	24.20	25.50	1.349	-	-	-0.13	0.186	0.251
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	18900	1880	1	23.11	24.50	1.377	-	-	-0.13	0.143	0.197
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	1	24.20	25.50	1.349	-	-	0.03	0.276	0.372
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	2	24.20	25.50	1.349	-	-	0.17	0.232	0.313
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	3	24.20	25.50	1.349	-	-	-0.05	0.244	0.329
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	4	24.20	25.50	1.349	-	-	0.01	0.256	0.345
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	1	23.11	24.50	1.377	-	-	0.06	0.239	0.329
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	18900	1880	1	24.20	25.50	1.349	-	-	-0.03	0.115	0.155
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	18900	1880	1	23.11	24.50	1.377	-	-	-0.03	0.090	0.124
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	18900	1880	1	15.10	15.50	1.096	-	-	0.08	0.748	0.820
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	18700	1860	1	14.97	15.50	1.130	-	-	-0.07	0.351	0.397
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	19100	1900	1	15.08	15.50	1.102	-	-	0.05	0.570	0.628
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	18900	1880	1	15.03	15.50	1.114	-	-	-0.11	0.653	0.728
	LTE Band 2	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 1	18900	1880	1	14.87	15.50	1.156	-	-	-0.16	0.585	0.676
11	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	1	15.10	15.50	1.096	-	-	-0.03	0.787	0.863
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	2	15.10	15.50	1.096	-	-	0.1	0.609	0.668
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	3	15.10	15.50	1.096	-	-	-0.17	0.673	0.738
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	4	15.10	15.50	1.096	-	-	0.04	0.693	0.760
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18700	1860	1	14.97	15.50	1.130	-	-	-0.02	0.736	0.832
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	19100	1900	1	15.08	15.50	1.102	-	-	0.15	0.757	0.834
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	1	15.03	15.50	1.114	-	-	-0.09	0.662	0.738
	LTE Band 2	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	1	14.87	15.50	1.156	-	-	-0.08	0.675	0.780
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	18900	1880	1	15.10	15.50	1.096	-	-	0.16	0.419	0.459
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	18900	1880	1	15.03	15.50	1.114	-	-	0.05	0.363	0.404
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	18900	1880	1	15.10	15.50	1.096	-	-	0.05	0.481	0.527
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	18900	1880	1	15.03	15.50	1.114	-	-	0.02	0.417	0.465
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	21100	2535	1	23.84	25.00	1.306	-	-	0.02	0.252	0.329
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	21100	2535	1	22.61	24.00	1.377	-	-	0.16	0.238	0.328
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	21100	2535	1	23.84	25.00	1.306	-	-	0.13	0.227	0.297
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	21100	2535	1	22.61	24.00	1.377	-	-	-0.18	0.219	0.302
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	21100	2535	1	23.84	25.00	1.306	-	-	0.02	0.168	0.219
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	21100	2535	1	22.61	24.00	1.377	-	-	0.16	0.152	0.209
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	21100	2535	1	23.84	25.00	1.306	-	-	-0.03	0.108	0.141
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	21100	2535	1	22.61	24.00	1.377	-	-	0.07	0.101	0.139
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	21100	2535	1	17.75	18.50	1.189	-	-	0	0.782	0.929
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	20850	2510	1	17.63	18.50	1.222	-	-	0.08	0.703	0.859
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	21350	2560	1	17.68	18.50	1.208	-	-	-0.17	0.725	0.876
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	21100	2535	1	17.66	18.50	1.213	-	-	0.01	0.642	0.779
	LTE Band 7	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 1	21100	2535	1	17.49	18.50	1.262	-	-	-0.09	0.608	0.767
12	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	1	17.75	18.50	1.189	-	-	0.08	0.908	1.079
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	20850	2510	1	17.63	18.50	1.222	-	-	-0.11	0.868	1.061
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	21350	2560	1	17.68	18.50	1.208	-	-	0.08	0.891	1.076
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	1	17.66	18.50	1.213	-	-	-0.01	0.734	0.891
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	20850	2510	1	17.52	18.50	1.253	-	-	0.01	0.674	0.845
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	21350	2560	1	17.60	18.50	1.230	-	-	-0.16	0.711	0.875
	LTE Band 7	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	1	17.49	18.50	1.262	-	-	0.1	0.663	0.837



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	21100	2535	1	17.75	18.50	1.189	-	-	-0.06	0.285	0.339
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	21100	2535	1	17.66	18.50	1.213	-	-	-0.04	0.241	0.292
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	21100	2535	1	17.75	18.50	1.189	-	-	-0.09	0.386	0.459
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	21100	2535	1	17.66	18.50	1.213	-	-	-0.17	0.312	0.379
	LTE Band 38	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.01	0.342	0.407
	LTE Band 38	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	38000	2595	2	24.27	25.00	1.183	62.9	1.006	-0.01	0.337	0.401
	LTE Band 38	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	38000	2595	3	24.27	25.00	1.183	62.9	1.006	-0.08	0.339	0.403
	LTE Band 38	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	38000	2595	4	24.27	25.00	1.183	62.9	1.006	0.05	0.337	0.401
	LTE Band 38	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.1	0.317	0.405
	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.18	0.252	0.300
	LTE Band 38	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.17	0.243	0.311
	LTE Band 38	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	38000	2595	1	24.27	25.00	1.183	62.9	1.006	-0.04	0.207	0.246
	LTE Band 38	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.05	0.193	0.247
	LTE Band 38	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0	0.153	0.182
	LTE Band 38	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.13	0.135	0.173
	LTE Band 38	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	38000	2595	1	19.79	20.50	1.178	62.9	1.006	-0.01	0.901	1.067
	LTE Band 38	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	38000	2595	1	19.72	20.50	1.197	62.9	1.006	-0.09	0.841	1.012
	LTE Band 38	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 1	38000	2595	1	19.55	20.50	1.245	62.9	1.006	0.03	0.803	1.005
13	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	1	19.79	20.50	1.178	62.9	1.006	0.02	0.913	1.082
	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	2	19.79	20.50	1.178	62.9	1.006	0.06	0.796	0.943
	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	3	19.79	20.50	1.178	62.9	1.006	-0.09	0.804	0.952
	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	4	19.79	20.50	1.178	62.9	1.006	-0.08	0.902	1.069
	LTE Band 38	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	1	19.72	20.50	1.197	62.9	1.006	0.05	0.864	1.040
	LTE Band 38	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	1	19.55	20.50	1.245	62.9	1.006	-0.04	0.817	1.023
	LTE Band 38	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	38000	2595	1	19.79	20.50	1.178	62.9	1.006	0.02	0.290	0.344
	LTE Band 38	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	38000	2595	1	19.72	20.50	1.197	62.9	1.006	-0.13	0.280	0.337
	LTE Band 38	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	38000	2595	1	19.79	20.50	1.178	62.9	1.006	0.17	0.399	0.473
	LTE Band 38	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	38000	2595	1	19.72	20.50	1.197	62.9	1.006	0.06	0.364	0.438
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	40620	2593	1	24.11	25.00	1.227	62.9	1.006	0.08	0.341	0.421
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	40620	2593	1	23.06	24.00	1.242	62.9	1.006	0	0.321	0.401
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	40620	2593	1	24.11	25.00	1.227	62.9	1.006	-0.04	0.257	0.317
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	40620	2593	1	23.06	24.00	1.242	62.9	1.006	-0.15	0.234	0.292
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	40620	2593	1	24.11	25.00	1.227	62.9	1.006	0.11	0.212	0.262
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	40620	2593	1	23.06	24.00	1.242	62.9	1.006	-0.02	0.194	0.242
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	40620	2593	1	24.11	25.00	1.227	62.9	1.006	0.1	0.162	0.200
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	40620	2593	1	23.06	24.00	1.242	62.9	1.006	0.04	0.132	0.165
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	40620	2593	1	19.75	20.50	1.189	62.9	1.006	0.13	0.837	1.001
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	39750	2506	1	19.57	20.50	1.239	62.9	1.006	0.08	0.800	0.997
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	40185	2549.5	1	19.66	20.50	1.213	62.9	1.006	0.01	0.816	0.996
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	41055	2636.5	1	19.63	20.50	1.222	62.9	1.006	0.03	0.808	0.993
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	41490	2680	1	19.65	20.50	1.216	62.9	1.006	-0.08	0.811	0.992
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	40620	2593	1	19.65	20.50	1.216	62.9	1.006	-0.18	0.818	1.001
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	39750	2506	1	19.47	20.50	1.268	62.9	1.006	-0.08	0.776	0.990
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	40185	2549.5	1	19.49	20.50	1.262	62.9	1.006	0.1	0.780	0.990
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	41055	2636.5	1	19.62	20.50	1.225	62.9	1.006	-0.18	0.807	0.994
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	41490	2680	1	19.56	20.50	1.242	62.9	1.006	0.1	0.792	0.989
	LTE Band 41	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 1	40620	2593	1	19.52	20.50	1.253	62.9	1.006	0.12	0.788	0.993
14	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	40620	2593	1	19.75	20.50	1.189	62.9	1.006	0.17	0.861	1.029
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	39750	2506	1	19.57	20.50	1.239	62.9	1.006	0.08	0.820	1.022
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	40185	2549.5	1	19.66	20.50	1.213	62.9	1.006	-0.17	0.838	1.023
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	41055	2636.5	1	19.63	20.50	1.222	62.9	1.006	-0.03	0.817	1.004
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	41490	2680	1	19.65	20.50	1.216	62.9	1.006	0.14	0.825	1.009
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	40620	2593	1	19.65	20.50	1.216	62.9	1.006	-0.11	0.839	1.027
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	39750	2506	1	19.47	20.50	1.268	62.9	1.006	0.11	0.805	1.027
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	40185	2549.5	1	19.49	20.50	1.262	62.9	1.006	-0.05	0.796	1.010
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	41055	2636.5	1	19.62	20.50	1.225	62.9	1.006	0.18	0.826	1.018



FCC SAR Test Report

Report No. : FA4D0203

LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	41490	2680	1	19.56	20.50	1.242	62.9	1.006	0.14	0.810	1.012
LTE Band 41	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	40620	2593	1	19.52	20.50	1.253	62.9	1.006	-0.17	0.803	1.012
LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	40620	2593	1	19.75	20.50	1.189	62.9	1.006	-0.16	0.284	0.340
LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	40620	2593	1	19.65	20.50	1.216	62.9	1.006	-0.15	0.267	0.327
LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	40620	2593	1	19.75	20.50	1.189	62.9	1.006	-0.06	0.369	0.441
LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	40620	2593	1	19.65	20.50	1.216	62.9	1.006	-0.14	0.361	0.442

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	Standalone	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.08	0.212	0.299
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 7	Standalone	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.01	0.254	0.358
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	Standalone	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.03	0.576	0.812
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	Standalone	6	2437	1	17.41	19.00	1.442	98.39	1.016	-0.08	0.690	1.011
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	Standalone	11	2462	1	16.56	18.50	1.563	98.39	1.016	-0.08	0.532	0.845
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.1	0.649	0.914
15	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	6	2437	1	17.41	19.00	1.442	98.39	1.016	0.02	0.703	1.030
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	6	2437	2	17.41	19.00	1.442	98.39	1.016	0.13	0.700	1.026
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	6	2437	3	17.41	19.00	1.442	98.39	1.016	0.12	0.632	0.926
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	6	2437	4	17.41	19.00	1.442	98.39	1.016	0.03	0.701	1.027
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Standalone	11	2462	1	16.56	18.50	1.563	98.39	1.016	-0.18	0.636	1.010
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	Simultaneous	1	2412	1	14.33	16.00	1.469	98.39	1.016	-0.01	0.289	0.431
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	Simultaneous	1	2412	1	14.33	16.00	1.469	98.39	1.016	0.06	0.355	0.530
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.1	0.061	0.093
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.12	0.070	0.107
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.08	0.165	0.252
16	Bluetooth	1Mbps	Left Tilted	0mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	-0.01	0.189	0.288
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 7	Full Power	78	2480	2	10.47	12.00	1.422	77.63	1.073	0.18	0.137	0.209
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 7	Full Power	78	2480	3	10.47	12.00	1.422	77.63	1.073	0.16	0.159	0.243
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 7	Full Power	78	2480	4	10.47	12.00	1.422	77.63	1.073	-0.1	0.170	0.259
5000MHz																	
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.17	0.351	0.565
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.03	0.361	0.581
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	0.14	0.482	0.776
17	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.02	0.517	0.832
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	52	5260	2	17.88	19.50	1.452	90.14	1.109	0.07	0.388	0.625
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	52	5260	3	17.88	19.50	1.452	90.14	1.109	0.18	0.334	0.538
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	52	5260	4	17.88	19.50	1.452	90.14	1.109	-0.1	0.262	0.422
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	56	5280	1	17.83	19.50	1.469	90.14	1.109	0.09	0.502	0.818
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	60	5300	1	17.80	19.50	1.479	90.14	1.109	-0.04	0.491	0.805
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	64	5320	1	17.76	19.50	1.493	90.14	1.109	0.04	0.488	0.808
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Simultaneous	52	5260	1	12.74	14.50	1.499	90.14	1.109	0.08	0.094	0.156
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Simultaneous	52	5260	1	12.74	14.50	1.499	90.14	1.109	0.01	0.098	0.163
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Simultaneous	52	5260	1	12.74	14.50	1.499	90.14	1.109	0.03	0.153	0.254
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Simultaneous	52	5260	1	12.74	14.50	1.499	90.14	1.109	-0.08	0.161	0.268
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Standalone	132	5660	1	17.84	19.00	1.306	90.14	1.109	0.11	0.341	0.494
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Standalone	132	5660	1	17.84	19.00	1.306	90.14	1.109	-0.05	0.417	0.604
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Standalone	132	5660	1	17.84	19.00	1.306	90.14	1.109	0.18	0.388	0.562
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	132	5660	1	17.84	19.00	1.306	90.14	1.109	0.14	0.569	0.824
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	100	5500	1	16.71	18.00	1.346	90.14	1.109	-0.17	0.539	0.804
18	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	116	5580	1	17.11	18.50	1.378	90.14	1.109	-0.05	0.657	1.004
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	116	5580	2	17.11	18.50	1.378	90.14	1.109	0.01	0.642	0.981
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	116	5580	3	17.11	18.50	1.378	90.14	1.109	-0.15	0.378	0.578
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	116	5580	4	17.11	18.50	1.378	90.14	1.109	0.19	0.450	0.688
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	124	5620	1	17.69	19.00	1.352	90.14	1.109	0.17	0.616	0.923



FCC SAR Test Report

Report No. : FA4D0203

	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Standalone	140	5700	1	17.53	19.50	1.574	90.14	1.109	-0.05	0.469	0.819
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Simultaneous	132	5660	1	13.37	15.00	1.455	90.14	1.109	-0.08	0.106	0.171
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Simultaneous	132	5660	1	13.37	15.00	1.455	90.14	1.109	0.1	0.128	0.207
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Simultaneous	132	5660	1	13.37	15.00	1.455	90.14	1.109	-0.18	0.138	0.223
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Simultaneous	132	5660	1	13.37	15.00	1.455	90.14	1.109	0.1	0.155	0.250
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.01	0.260	0.392
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.1	0.333	0.502
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	-0.17	0.341	0.514
19	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.03	0.410	0.617
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	165	5825	2	17.67	19.00	1.358	90.14	1.109	-0.15	0.401	0.604
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	165	5825	3	17.67	19.00	1.358	90.14	1.109	-0.15	0.403	0.607
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Full Power	165	5825	4	17.67	19.00	1.358	90.14	1.109	0.11	0.401	0.604
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 7	Simultaneous	165	5825	1	14.17	15.50	1.358	90.14	1.109	0.12	0.099	0.149
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 7	Simultaneous	165	5825	1	14.17	15.50	1.358	90.14	1.109	0.08	0.118	0.178
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 7	Simultaneous	165	5825	1	14.17	15.50	1.358	90.14	1.109	-0.17	0.142	0.214
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 7	Simultaneous	165	5825	1	14.17	15.50	1.358	90.14	1.109	-0.03	0.152	0.229



15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	0.03	0.099	0.131
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.15	0.075	0.099
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	23230	782	1	24.27	25.50	1.327	-	-	-0.15	0.129	0.171
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	23230	782	1	23.31	24.50	1.315	-	-	0.11	0.096	0.126
	LTE Band 13	10M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	-0.08	0.167	0.222
	LTE Band 13	10M	QPSK	25	0	-	Left Side	10mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.17	0.130	0.171
	LTE Band 13	10M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	-0.08	0.085	0.113
	LTE Band 13	10M	QPSK	25	0	-	Right Side	10mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.04	0.064	0.084
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	23230	782	1	24.27	25.50	1.327	-	-	0.18	0.174	0.231
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	23230	782	2	24.27	25.50	1.327	-	-	-0.08	0.137	0.182
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	23230	782	3	24.27	25.50	1.327	-	-	-0.17	0.155	0.206
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	23230	782	4	24.27	25.50	1.327	-	-	-0.08	0.130	0.173
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 1	DSI 4	23230	782	1	23.31	24.50	1.315	-	-	-0.04	0.122	0.160
	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	-0.08	0.126	0.167
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.13	0.097	0.128
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	-0.13	0.076	0.101
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	15mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	0.06	0.064	0.084
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	-0.08	0.184	0.225
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	0.13	0.179	0.219
20	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	1	24.13	25.00	1.222	-	-	-0.08	0.258	0.315
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	2	24.13	25.00	1.222	-	-	-0.04	0.249	0.304
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	3	24.13	25.00	1.222	-	-	-0.08	0.255	0.312
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	4	24.13	25.00	1.222	-	-	0.17	0.245	0.299
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	23230	782	1	23.12	24.00	1.225	-	-	0.12	0.256	0.314
	LTE Band 13	10M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	0.03	0.163	0.199
	LTE Band 13	10M	QPSK	25	0	-	Left Side	10mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	0.18	0.162	0.198
	LTE Band 13	10M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	0.16	0.133	0.162
	LTE Band 13	10M	QPSK	25	0	-	Right Side	10mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	-0.1	0.131	0.160
	LTE Band 13	10M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	23230	782	1	24.13	25.00	1.222	-	-	0.07	0.197	0.241
	LTE Band 13	10M	QPSK	25	0	-	Top Side	10mm	Ant 4	DSI 4	23230	782	1	23.12	24.00	1.225	-	-	0.18	0.195	0.239
	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	-0.15	0.175	0.214
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	0.19	0.172	0.211
	LTE Band 13	10M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	0.07	0.099	0.121
	LTE Band 13	10M	QPSK	25	0	-	Top Side	15mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	-0.18	0.099	0.121
850MHz																					
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	-0.03	0.155	0.196
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 4	189	836.4	1	30.49	31.50	1.262	-	-	-0.03	0.239	0.302
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	0.08	0.148	0.187
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Side	10mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	-0.07	0.085	0.107
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	10mm	Ant 1	DSI 4	189	836.4	1	30.49	31.50	1.262	-	-	-0.11	0.204	0.257
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	-0.12	0.149	0.188
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	15mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	0.03	0.111	0.140
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.16	0.272	0.334
21	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 4	DSI 4	189	836.4	1	30.61	31.50	1.227	-	-	0.01	0.384	0.471
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.02	0.105	0.129
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Side	10mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	0.15	0.102	0.125
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Top Side	10mm	Ant 4	DSI 4	189	836.4	1	30.61	31.50	1.227	-	-	-0.09	0.309	0.379
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.05	0.195	0.239
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Top Side	15mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.08	0.134	0.164
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.16	0.228	0.292



FCC SAR Test Report

Report No. : FA4D0203

	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	1	23.92	25.00	1.282	-	-	0.05	0.346	0.444
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	2	23.92	25.00	1.282	-	-	0.18	0.342	0.439
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	3	23.92	25.00	1.282	-	-	-0.04	0.341	0.437
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	4	23.92	25.00	1.282	-	-	-0.08	0.340	0.436
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.05	0.209	0.268
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	-0.03	0.136	0.174
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	4182	836.4	1	23.92	25.00	1.282	-	-	0.02	0.254	0.326
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.07	0.233	0.299
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.16	0.130	0.167
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0.13	0.295	0.424
22	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	1	22.63	24.00	1.371	-	-	0.01	0.438	0.600
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	2	22.63	24.00	1.371	-	-	-0.13	0.401	0.550
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	3	22.63	24.00	1.371	-	-	-0.04	0.331	0.454
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	4	22.63	24.00	1.371	-	-	0.06	0.356	0.488
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	-0.18	0.111	0.160
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0.02	0.115	0.165
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	4182	836.4	1	22.63	24.00	1.371	-	-	0.16	0.355	0.487
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0.07	0.221	0.318
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0	0.175	0.252
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	0.01	0.205	0.270
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	-0.01	0.178	0.235
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	1	24.31	25.50	1.315	-	-	-0.06	0.336	0.442
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	1	23.29	24.50	1.321	-	-	-0.04	0.295	0.390
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	-0.09	0.215	0.283
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	-0.17	0.192	0.254
	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	-0.1	0.138	0.182
	LTE Band 5	10M	QPSK	25	0	-	Right Side	10mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	0.18	0.121	0.160
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	20525	836.5	1	24.31	25.50	1.315	-	-	-0.05	0.277	0.364
	LTE Band 5	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 1	DSI 4	20525	836.5	1	23.29	24.50	1.321	-	-	0	0.242	0.320
	LTE Band 5	10M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	-0.13	0.225	0.296
	LTE Band 5	10M	QPSK	25	0	-	Back	15mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	-0.01	0.195	0.258
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	-0.09	0.130	0.171
	LTE Band 5	10M	QPSK	25	0	-	Bottom Side	15mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	0.05	0.115	0.152
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.05	0.315	0.394
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.18	0.263	0.330
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	1	22.92	24.00	1.282	-	-	0.14	0.344	0.441
23	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	1	22.82	24.00	1.312	-	-	0.02	0.384	0.504
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.17	0.108	0.135
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.17	0.091	0.114
	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.05	0.128	0.160
	LTE Band 5	10M	QPSK	25	0	-	Right Side	10mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.01	0.103	0.129
	LTE Band 5	10M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	20525	836.5	1	22.92	24.00	1.282	-	-	0.1	0.298	0.382
	LTE Band 5	10M	QPSK	25	0	-	Top Side	10mm	Ant 4	DSI 4	20525	836.5	1	22.82	24.00	1.312	-	-	-0.17	0.320	0.420
	LTE Band 5	10M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.08	0.222	0.278
	LTE Band 5	10M	QPSK	25	0	-	Back	15mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.05	0.197	0.247
	LTE Band 5	10M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	0.06	0.200	0.250
	LTE Band 5	10M	QPSK	25	0	-	Top Side	15mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	-0.09	0.167	0.210
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	0.02	0.162	0.201
	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.13	0.162	0.212
	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	26865	831.5	1	24.57	25.50	1.239	-	-	0.17	0.257	0.318
	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 1	DSI 4	26865	831.5	1	23.34	24.50	1.306	-	-	0.06	0.237	0.310
	LTE Band 26	15M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	0	0.162	0.201
	LTE Band 26	15M	QPSK	36	0	-	Left Side	10mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.04	0.157	0.205
	LTE Band 26	15M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	-0.15	0.111	0.138
	LTE Band 26	15M	QPSK	36	0	-	Right Side	10mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	0.11	0.117	0.153
	LTE Band 26	15M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	26865	831.5	1	24.57	25.50	1.239	-	-	0.04	0.232	0.287



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	10mm	Ant 1	DSI 4	26865	831.5	1	23.34	24.50	1.306	-	-	0.13	0.217	0.283
	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	-0.18	0.184	0.228
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.11	0.168	0.219
	LTE Band 26	15M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	-0.16	0.105	0.130
	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	15mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.15	0.099	0.129
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	0.08	0.273	0.346
	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	0.01	0.234	0.306
24	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	26865	831.5	1	23.97	25.00	1.268	-	-	-0.03	0.423	0.536
	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 4	DSI 4	26865	831.5	1	22.84	24.00	1.306	-	-	0.03	0.356	0.465
	LTE Band 26	15M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	-0.08	0.095	0.120
	LTE Band 26	15M	QPSK	36	0	-	Left Side	10mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	-0.08	0.087	0.114
	LTE Band 26	15M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	0.1	0.119	0.151
	LTE Band 26	15M	QPSK	36	0	-	Right Side	10mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	-0.18	0.102	0.133
	LTE Band 26	15M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	26865	831.5	1	23.97	25.00	1.268	-	-	0.1	0.371	0.470
	LTE Band 26	15M	QPSK	36	0	-	Top Side	10mm	Ant 4	DSI 4	26865	831.5	1	22.84	24.00	1.306	-	-	0.12	0.318	0.415
	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	-0.08	0.201	0.255
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	-0.03	0.166	0.217
	LTE Band 26	15M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	0.14	0.177	0.224
	LTE Band 26	15M	QPSK	36	0	-	Top Side	15mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	0.11	0.143	0.187
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.06	0.372	0.511
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	1413	1732.6	1	20.58	22.00	1.387	-	-	0.03	0.376	0.521
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.14	0.088	0.121
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.19	0.224	0.308
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	1413	1732.6	1	20.58	22.00	1.387	-	-	0.06	0.618	0.857
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	1312	1712.4	1	20.47	22.00	1.422	-	-	-0.02	0.662	0.942
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	1513	1752.6	1	20.52	22.00	1.406	-	-	0.02	0.541	0.761
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	0.12	0.478	0.657
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.16	0.652	0.896
25	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	1312	1712.4	1	23.47	25.00	1.422	-	-	0.01	0.710	1.010
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	1513	1752.6	1	23.61	25.00	1.377	-	-	0.07	0.567	0.781
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.02	0.260	0.386
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.05	0.240	0.357
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.13	0.079	0.117
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	0.08	0.000	0.000
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	1413	1732.6	1	23.28	25.00	1.486	-	-	0.16	0.324	0.481
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.16	0.113	0.168
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	0.1	0.163	0.242
	LTE Band 4	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.04	0.422	0.563
	LTE Band 4	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.01	0.334	0.447
	LTE Band 4	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20175	1732.5	1	21.20	22.50	1.349	-	-	0	0.432	0.583
	LTE Band 4	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	20175	1732.5	1	21.06	22.50	1.393	-	-	0.06	0.441	0.614
	LTE Band 4	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.06	0.099	0.132
	LTE Band 4	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.15	0.077	0.103
	LTE Band 4	20M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	0.03	0.258	0.344
	LTE Band 4	20M	QPSK	50	0	-	Right Side	10mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.13	0.205	0.275
	LTE Band 4	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	1	21.20	22.50	1.349	-	-	-0.02	0.736	0.993
26	LTE Band 4	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	1	21.06	22.50	1.393	-	-	0.07	0.781	1.088
	LTE Band 4	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	2	21.06	22.50	1.393	-	-	-0.07	0.737	1.027
	LTE Band 4	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	3	21.06	22.50	1.393	-	-	0.05	0.736	1.025
	LTE Band 4	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	4	21.06	22.50	1.393	-	-	-0.11	0.718	1.000
	LTE Band 4	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 1	DSI 4	20175	1732.5	1	20.89	22.50	1.449	-	-	-0.09	0.750	1.087
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.16	0.529	0.705
	LTE Band 4	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	0.11	0.401	0.537
	LTE Band 4	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.04	0.674	0.899
	LTE Band 4	20M	QPSK	50	0	-	Bottom Side	15mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.01	0.519	0.695



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 4	20M	QPSK	100	0	-	Bottom Side	15mm	Ant 1	DSI 2	20175	1732.5	1	23.21	24.50	1.346	-	-	0.03	0.513	0.690
	LTE Band 4	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	0.1	0.297	0.368
	LTE Band 4	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	0.16	0.242	0.304
	LTE Band 4	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.06	0.241	0.299
	LTE Band 4	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	20175	1732.5	1	23.01	24.00	1.256	-	-	0.02	0.219	0.275
	LTE Band 4	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.16	0.072	0.089
	LTE Band 4	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	0.05	0.059	0.074
	LTE Band 4	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.03	0.000	0.000
	LTE Band 4	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	0.17	0.000	0.000
	LTE Band 4	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.03	0.335	0.415
	LTE Band 4	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	20175	1732.5	1	23.01	24.00	1.256	-	-	-0.15	0.277	0.348
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.06	0.114	0.141
	LTE Band 4	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	-0.13	0.097	0.122
	LTE Band 4	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	0.04	0.168	0.208
	LTE Band 4	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	-0.01	0.143	0.180
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	0.19	0.317	0.411
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.14	0.255	0.344
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	132322	1745	1	20.76	22.00	1.330	-	-	0.01	0.320	0.426
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	132322	1745	1	20.64	22.00	1.368	-	-	-0.06	0.291	0.398
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	0.02	0.089	0.115
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	0.16	0.069	0.093
	LTE Band 66	20M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	0.01	0.253	0.328
	LTE Band 66	20M	QPSK	50	0	-	Right Side	10mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.04	0.193	0.260
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	132322	1745	1	20.76	22.00	1.330	-	-	0.07	0.609	0.810
27	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	132072	1720	1	20.57	22.00	1.390	-	-	-0.03	0.690	0.959
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	132572	1770	1	20.69	22.00	1.352	-	-	0.19	0.521	0.704
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	132322	1745	1	20.64	22.00	1.368	-	-	-0.06	0.593	0.811
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	132072	1720	1	20.37	22.00	1.455	-	-	0	0.657	0.956
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	132572	1770	1	20.56	22.00	1.393	-	-	-0.03	0.546	0.761
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 1	DSI 4	132322	1745	1	20.51	22.00	1.409	-	-	0.07	0.584	0.823
	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	-0.12	0.457	0.593
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.03	0.358	0.483
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	0.01	0.637	0.826
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	132072	1720	1	24.17	25.50	1.358	-	-	0.12	0.627	0.852
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	132572	1770	1	24.28	25.50	1.324	-	-	0.02	0.546	0.723
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	15mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.03	0.501	0.676
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	15mm	Ant 1	DSI 2	132322	1745	1	23.40	24.50	1.288	-	-	0.05	0.493	0.635
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.11	0.317	0.387
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.01	0.243	0.302
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	1	24.13	25.00	1.222	-	-	0.03	0.286	0.349
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	1	23.06	24.00	1.242	-	-	-0.08	0.238	0.296
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.08	0.079	0.097
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.1	0.062	0.077
	LTE Band 66	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.18	0.000	0.000
	LTE Band 66	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.1	0.000	0.000
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	1	24.13	25.00	1.222	-	-	-0.05	0.559	0.683
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	2	24.13	25.00	1.222	-	-	-0.12	0.539	0.659
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	3	24.13	25.00	1.222	-	-	0.03	0.410	0.501
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	4	24.13	25.00	1.222	-	-	-0.16	0.511	0.624
	LTE Band 66	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	1	23.06	24.00	1.242	-	-	0.12	0.550	0.683
	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.03	0.123	0.150
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.14	0.101	0.125
	LTE Band 66	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	0.02	0.178	0.217
	LTE Band 66	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.11	0.159	0.197
1900MHz																					
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306	-	-	0.01	0.239	0.312



FCC SAR Test Report

Report No. : FA4D0203

	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 4	661	1880	1	27.34	28.50	1.306	-	-	-0.01	0.429	0.560
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306	-	-	0.15	0.074	0.097
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Side	10mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306	-	-	-0.05	0.183	0.239
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	10mm	Ant 1	DSI 4	661	1880	1	27.34	28.50	1.306	-	-	-0.08	0.536	0.700
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306	-	-	-0.13	0.284	0.371
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	15mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306	-	-	0.01	0.300	0.392
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	-0.11	0.442	0.660
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 4	DSI 4	661	1880	1	22.15	23.50	1.365	-	-	-0.03	0.512	0.699
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	-0.05	0.123	0.184
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Side	10mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	0.14	0.054	0.081
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	661	1880	1	22.15	23.50	1.365	-	-	-0.01	0.598	0.816
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	512	1850.2	1	21.68	23.50	1.521	-	-	0.07	0.424	0.645
28	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	810	1909.8	1	22.13	23.50	1.371	-	-	-0.05	0.751	1.030
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	810	1909.8	2	22.13	23.50	1.371	-	-	-0.02	0.597	0.818
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	810	1909.8	3	22.13	23.50	1.371	-	-	0.15	0.573	0.786
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	810	1909.8	4	22.13	23.50	1.371	-	-	-0.09	0.665	0.912
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	0.04	0.245	0.366
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Top Side	15mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	0.11	0.335	0.500
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	0.05	0.499	0.710
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	9400	1880	1	21.09	22.50	1.384	-	-	0.12	0.474	0.656
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	-0.11	0.172	0.245
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	0.17	0.397	0.565
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	9400	1880	1	21.09	22.50	1.384	-	-	-0.01	0.631	0.873
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	9262	1852.4	1	21.07	22.50	1.390	-	-	0.11	0.585	0.813
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 4	9538	1907.6	1	21.05	22.50	1.396	-	-	-0.05	0.554	0.774
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	-0.01	0.512	0.728
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	0.01	0.610	0.868
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	9262	1852.4	1	23.42	25.00	1.439	-	-	-0.15	0.531	0.764
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	9538	1907.6	1	23.41	25.00	1.442	-	-	-0.12	0.526	0.759
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	0.08	0.671	0.974
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9262	1852.4	1	20.22	22.00	1.507	-	-	0.01	0.498	0.750
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9538	1907.6	1	20.16	22.00	1.528	-	-	-0.01	0.688	1.051
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	9400	1880	1	18.35	20.00	1.462	-	-	0.03	0.529	0.773
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	-0.08	0.206	0.299
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	-0.08	0.069	0.100
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	9400	1880	1	18.35	20.00	1.462	-	-	0.1	0.642	0.939
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	9262	1852.4	1	18.32	20.00	1.472	-	-	0.1	0.471	0.693
29	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	9538	1907.6	1	18.29	20.00	1.483	-	-	0.05	0.716	1.061
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	0.12	0.418	0.607
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	-0.03	0.566	0.822
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	9262	1852.4	1	20.22	22.00	1.507	-	-	0.14	0.407	0.613
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	9538	1907.6	1	20.16	22.00	1.528	-	-	0.03	0.644	0.984
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	0.1	0.490	0.661
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	0.01	0.383	0.527
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	18900	1880	1	21.23	22.50	1.340	-	-	0.03	0.452	0.606
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	18900	1880	1	21.11	22.50	1.377	-	-	0.1	0.443	0.610
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	-0.16	0.181	0.244
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	0.05	0.355	0.489
	LTE Band 2	20M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	0.08	0.188	0.254
	LTE Band 2	20M	QPSK	50	0	-	Right Side	10mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	-0.18	0.151	0.208
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	18900	1880	1	21.23	22.50	1.340	-	-	-0.07	0.636	0.852
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	18700	1860	1	21.13	22.50	1.371	-	-	-0.09	0.552	0.757
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	19100	1900	1	21.18	22.50	1.355	-	-	0.18	0.580	0.786
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	18900	1880	1	21.11	22.50	1.377	-	-	0.11	0.620	0.854
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	18700	1860	1	20.96	22.50	1.426	-	-	0.07	0.568	0.810
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	19100	1900	1	21.01	22.50	1.409	-	-	-0.03	0.576	0.812



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 1	DSI 4	18900	1880	1	21.01	22.50	1.409	-	-	0.09	0.603	0.850
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	-0.08	0.662	0.893
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18700	1860	1	24.17	25.50	1.358	-	-	-0.05	0.599	0.814
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	19100	1900	1	24.14	25.50	1.368	-	-	-0.03	0.616	0.843
	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	0.17	0.520	0.716
	LTE Band 2	20M	QPSK	100	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	22.95	24.50	1.429	-	-	-0.14	0.516	0.737
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	-0.07	0.689	0.929
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	2	24.20	25.50	1.349	-	-	0.11	0.621	0.838
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	3	24.20	25.50	1.349	-	-	-0.05	0.630	0.850
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	4	24.20	25.50	1.349	-	-	-0.08	0.654	0.882
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18700	1860	1	24.17	25.50	1.358	-	-	-0.06	0.596	0.810
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	19100	1900	1	24.14	25.50	1.368	-	-	-0.15	0.637	0.871
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	-0.12	0.546	0.752
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	1	22.95	24.50	1.429	-	-	-0.16	0.553	0.790
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	0.08	0.680	0.848
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	18700	1860	1	20.37	21.50	1.297	-	-	0.01	0.564	0.732
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	19100	1900	1	20.48	21.50	1.265	-	-	-0.04	0.720	0.911
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	0.03	0.559	0.717
	LTE Band 2	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.28	21.50	1.324	-	-	0.1	0.564	0.747
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	1	19.09	20.00	1.233	-	-	-0.18	0.402	0.496
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	1	18.97	20.00	1.268	-	-	0.1	0.424	0.537
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	0.12	0.040	0.050
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	0.08	0.033	0.042
	LTE Band 2	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	-0.17	0.000	0.000
	LTE Band 2	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	-0.03	0.000	0.000
	LTE Band 2	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	1	19.09	20.00	1.233	-	-	0.14	0.661	0.815
	LTE Band 2	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	18700	1860	1	18.90	20.00	1.288	-	-	0.11	0.478	0.616
	LTE Band 2	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	19100	1900	1	19.02	20.00	1.253	-	-	-0.1	0.666	0.835
	LTE Band 2	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	1	18.97	20.00	1.268	-	-	-0.05	0.648	0.821
	LTE Band 2	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	18700	1860	1	18.76	20.00	1.330	-	-	0.18	0.530	0.705
30	LTE Band 2	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	19100	1900	1	18.90	20.00	1.288	-	-	-0.05	0.731	0.942
	LTE Band 2	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	1	18.81	20.00	1.315	-	-	0.14	0.708	0.931
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	-0.05	0.353	0.440
	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	-0.17	0.289	0.371
	LTE Band 2	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	-0.01	0.521	0.650
	LTE Band 2	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	0.05	0.425	0.545
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.02	0.303	0.396
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.17	0.286	0.394
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	1	20.26	21.50	1.330	-	-	0.05	0.357	0.475
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	1	20.14	21.50	1.368	-	-	0	0.365	0.499
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.18	0.157	0.205
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	-0.11	0.157	0.216
	LTE Band 7	20M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	-0.05	0.378	0.494
	LTE Band 7	20M	QPSK	50	0	-	Right Side	10mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	-0.04	0.350	0.482
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	21100	2535	1	20.26	21.50	1.330	-	-	-0.08	0.599	0.797
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	21100	2535	1	20.14	21.50	1.368	-	-	-0.14	0.579	0.792
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.01	0.425	0.555
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.18	0.390	0.537
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.06	0.486	0.635
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	15mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.02	0.446	0.614
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	0.13	0.777	0.911
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20850	2510	1	22.17	23.00	1.211	-	-	0.12	0.577	0.699
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	1	22.15	23.00	1.216	-	-	0.03	0.553	0.673
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	0.18	0.663	0.803
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	20850	2510	1	22.00	23.00	1.259	-	-	0.16	0.723	0.910



FCC SAR Test Report

Report No. : FA4D0203

31	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	1	22.11	23.00	1.227	-	-	-0.07	0.821	1.008
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	2	22.11	23.00	1.227	-	-	-0.03	0.665	0.816
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	3	22.11	23.00	1.227	-	-	-0.15	0.695	0.853
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	4	22.11	23.00	1.227	-	-	0.02	0.816	1.002
	LTE Band 7	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	21.99	23.00	1.262	-	-	-0.1	0.647	0.816
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	1	18.66	19.50	1.213	-	-	-0.18	0.507	0.615
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	1	18.63	19.50	1.222	-	-	0.1	0.404	0.494
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	0.07	0.470	0.551
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	0.01	0.382	0.462
	LTE Band 7	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	0.07	0.000	0.000
	LTE Band 7	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	-0.18	0.000	0.000
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	1	18.66	19.50	1.213	-	-	-0.01	0.605	0.734
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	1	18.63	19.50	1.222	-	-	0.03	0.455	0.556
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	-0.15	0.507	0.594
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	-0.08	0.420	0.508
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	0.08	0.723	0.847
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	20850	2510	1	22.17	23.00	1.211	-	-	-0.08	0.532	0.644
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	21350	2560	1	22.15	23.00	1.216	-	-	0.17	0.618	0.752
	LTE Band 7	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	0.18	0.567	0.686
	LTE Band 7	20M	QPSK	100	0	-	Top Side	15mm	Ant 4	DSI 2	21100	2535	1	21.99	23.00	1.262	-	-	-0.13	0.582	0.734
	LTE Band 38	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.01	0.451	0.537
	LTE Band 38	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	0.16	0.374	0.478
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	1	22.01	23.00	1.256	62.9	1.006	0.06	0.529	0.668
	LTE Band 38	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	1	21.90	23.00	1.288	62.9	1.006	-0.02	0.512	0.664
	LTE Band 38	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.07	0.162	0.193
	LTE Band 38	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.17	0.128	0.164
	LTE Band 38	20M	QPSK	1	0	-	Right Side	10mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.1	0.425	0.506
	LTE Band 38	20M	QPSK	50	0	-	Right Side	10mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	0.08	0.354	0.452
	LTE Band 38	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 4	38000	2595	1	22.01	23.00	1.256	62.9	1.006	-0.1	0.602	0.761
	LTE Band 38	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 4	38000	2595	1	21.90	23.00	1.288	62.9	1.006	0.05	0.610	0.791
	LTE Band 38	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 1	DSI 4	38000	2595	1	21.67	23.00	1.358	62.9	1.006	0.07	0.574	0.784
	LTE Band 38	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	-0.07	0.405	0.482
	LTE Band 38	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	0.11	0.313	0.400
	LTE Band 38	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.02	0.470	0.559
	LTE Band 38	20M	QPSK	50	0	-	Bottom Side	15mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	-0.17	0.368	0.470
	LTE Band 38	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.1	0.702	0.834
	LTE Band 38	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	-0.07	0.548	0.718
	LTE Band 38	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	0.07	0.549	0.721
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	38000	2595	1	20.71	21.50	1.199	62.9	1.006	0.08	0.492	0.594
	LTE Band 38	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	38000	2595	1	20.66	21.50	1.213	62.9	1.006	0.01	0.471	0.575
	LTE Band 38	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.19	0.607	0.721
	LTE Band 38	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	0	0.490	0.642
	LTE Band 38	20M	QPSK	100	0	-	Left Side	10mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	-0.12	0.502	0.660
	LTE Band 38	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	-0.03	0.000	0.000
	LTE Band 38	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	0.02	0.000	0.000
	LTE Band 38	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	38000	2595	1	20.71	21.50	1.199	62.9	1.006	0.03	0.687	0.829
	LTE Band 38	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	38000	2595	1	20.66	21.50	1.213	62.9	1.006	-0.09	0.689	0.841
	LTE Band 38	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	38000	2595	1	20.51	21.50	1.256	62.9	1.006	0.03	0.660	0.834
	LTE Band 38	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.02	0.742	0.881
	LTE Band 38	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	-0.03	0.626	0.821
32	LTE Band 38	20M	QPSK	100	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	0.06	0.737	0.968
	LTE Band 38	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.05	0.592	0.703
	LTE Band 38	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	0.15	0.596	0.781
	LTE Band 38	20M	QPSK	100	0	-	Top Side	15mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	-0.08	0.593	0.779
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	40620	2593	1	24.11	25.00	1.227	62.9	1.006	0.08	0.480	0.593
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	40620	2593	1	23.06	24.00	1.242	62.9	1.006	0.01	0.379	0.473



FCC SAR Test Report

Report No. : FA4D0203

LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	40620	2593	1	20.62	21.50	1.225	62.9	1.006	0.05	0.665	0.819
LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	39750	2506	1	20.48	21.50	1.265	62.9	1.006	0.05	0.541	0.688
LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	40185	2549.5	1	20.40	21.50	1.288	62.9	1.006	-0.05	0.625	0.810
LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	41055	2636.5	1	20.60	21.50	1.230	62.9	1.006	0.01	0.630	0.780
LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	41490	2680	1	20.58	21.50	1.236	62.9	1.006	-0.08	0.575	0.715
LTE Band 41	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	40620	2593	1	20.43	21.50	1.279	62.9	1.006	0.09	0.628	0.808
LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	23.75	24.50	1.189	62.9	1.006	-0.12	0.432	0.517
LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	22.17	23.50	1.358	62.9	1.006	-0.01	0.568	0.776
LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	39750	2506	1	22.08	23.50	1.387	62.9	1.006	0.1	0.338	0.472
LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	40185	2549.5	1	22.08	23.50	1.387	62.9	1.006	-0.04	0.501	0.699
LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	41055	2636.5	1	22.02	23.50	1.406	62.9	1.006	0.15	0.457	0.646
LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	41490	2680	1	22.05	23.50	1.396	62.9	1.006	0.09	0.327	0.459
LTE Band 41	20M	QPSK	100	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	22.10	23.50	1.380	62.9	1.006	-0.16	0.426	0.592
LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	40620	2593	1	23.75	24.50	1.189	62.9	1.006	0.05	0.682	0.815
LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	39750	2506	1	23.45	24.50	1.274	62.9	1.006	-0.18	0.475	0.609
LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	40185	2549.5	1	23.71	24.50	1.199	62.9	1.006	0.08	0.685	0.827
LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	41055	2636.5	1	23.53	24.50	1.250	62.9	1.006	-0.03	0.475	0.597
LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	41490	2680	1	23.51	24.50	1.256	62.9	1.006	-0.04	0.320	0.404
LTE Band 41	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	40620	2593	1	22.17	23.50	1.358	62.9	1.006	-0.09	0.506	0.691
LTE Band 41	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	39750	2506	1	22.08	23.50	1.387	62.9	1.006	0.11	0.421	0.587
LTE Band 41	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	40185	2549.5	1	22.08	23.50	1.387	62.9	1.006	0.07	0.330	0.460
LTE Band 41	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	41055	2636.5	1	22.02	23.50	1.406	62.9	1.006	-0.03	0.341	0.482
LTE Band 41	20M	QPSK	50	0	-	Top Side	15mm	Ant 4	DSI 2	41490	2680	1	22.05	23.50	1.396	62.9	1.006	0.09	0.246	0.346
LTE Band 41	20M	QPSK	100	0	-	Top Side	15mm	Ant 4	DSI 2	40620	2593	1	22.10	23.50	1.380	62.9	1.006	-0.08	0.504	0.700

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
34	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	0.08	0.262	0.383
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	-0.02	0.481	0.703
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	0.03	0.258	0.377
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	0.07	0.545	0.797
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	Full Power	1	2412	2	19.42	21.00	1.439	98.39	1.016	-0.18	0.517	0.756
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	Full Power	1	2412	3	19.42	21.00	1.439	98.39	1.016	0.02	0.429	0.627
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	Full Power	1	2412	4	19.42	21.00	1.439	98.39	1.016	0.16	0.538	0.786
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Simultaneous	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.08	0.309	0.435
35	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	Simultaneous	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.01	0.364	0.513
	Bluetooth	1Mbps	Front	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.1	0.034	0.052
	Bluetooth	1Mbps	Back	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.08	0.065	0.100
	Bluetooth	1Mbps	Right Side	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.1	0.000	0.000
36	WLAN5.2GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.12	0.042	0.064
	5000MHz																
	WLAN5.2GHz	802.11a 6Mbps	Front	10mm	Ant 7	Full Power	40	5200	1	18.20	19.50	1.349	90.14	1.109	-0.03	0.142	0.212
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	40	5200	1	18.20	19.50	1.349	90.14	1.109	-0.03	0.497	0.743
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	40	5200	2	18.20	19.50	1.349	90.14	1.109	0.05	0.320	0.479
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	40	5200	3	18.20	19.50	1.349	90.14	1.109	0.02	0.485	0.725
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	40	5200	4	18.20	19.50	1.349	90.14	1.109	-0.13	0.299	0.447
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10mm	Ant 7	Full Power	40	5200	1	18.20	19.50	1.349	90.14	1.109	0.11	0.214	0.320
37	WLAN5.2GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	40	5200	1	18.20	19.50	1.349	90.14	1.109	-0.05	0.423	0.633
	WLAN5.2GHz	802.11a 6Mbps	Back	10mm	Ant 7	Simultaneous	40	5200	1	14.83	16.50	1.469	90.14	1.109	0.08	0.309	0.503
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Simultaneous	40	5200	1	14.83	16.50	1.469	90.14	1.109	0.06	0.201	0.327
	WLAN5.8GHz	802.11a 6Mbps	Front	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.18	0.118	0.178
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	-0.04	0.436	0.657
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	-0.1	0.145	0.218
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.06	0.472	0.711
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.06	0.472	0.711



FCC SAR Test Report

Report No. : FA4D0203

	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	165	5825	2	17.67	19.00	1.358	90.14	1.109	-0.1	0.467	0.703
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	165	5825	3	17.67	19.00	1.358	90.14	1.109	0.18	0.452	0.681
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Full Power	165	5825	4	17.67	19.00	1.358	90.14	1.109	-0.17	0.430	0.648
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Simultaneous	165	5825	1	15.31	16.50	1.315	90.14	1.109	0.01	0.275	0.401
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 7	Simultaneous	165	5825	1	15.31	16.50	1.315	90.14	1.109	0.03	0.257	0.375



15.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	0.03	0.099	0.131
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.15	0.075	0.099
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	23230	782	1	24.27	25.50	1.327	-	-	-0.15	0.129	0.171
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	23230	782	2	24.27	25.50	1.327	-	-	0.08	0.102	0.135
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	23230	782	3	24.27	25.50	1.327	-	-	0.01	0.115	0.153
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	23230	782	4	24.27	25.50	1.327	-	-	0.03	0.096	0.127
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	23230	782	1	23.31	24.50	1.315	-	-	0.11	0.096	0.126
	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	23230	782	1	24.27	25.50	1.327	-	-	-0.08	0.126	0.167
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 1	DSI 2	23230	782	1	23.31	24.50	1.315	-	-	-0.13	0.097	0.128
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	-0.08	0.184	0.225
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	0.13	0.179	0.219
38	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	1	24.13	25.00	1.222	-	-	-0.08	0.258	0.315
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	2	24.13	25.00	1.222	-	-	-0.04	0.249	0.304
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	3	24.13	25.00	1.222	-	-	-0.08	0.255	0.312
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23230	782	4	24.13	25.00	1.222	-	-	0.17	0.245	0.299
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	23230	782	1	23.12	24.00	1.225	-	-	0.12	0.256	0.314
	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	23230	782	1	24.13	25.00	1.222	-	-	-0.15	0.175	0.214
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 4	DSI 2	23230	782	1	23.12	24.00	1.225	-	-	0.19	0.172	0.211
850MHz																					
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	-0.03	0.155	0.196
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 4	189	836.4	1	30.49	31.50	1.262	-	-	-0.03	0.239	0.302
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 1	DSI 2	189	836.4	1	30.49	31.50	1.262	-	-	-0.12	0.149	0.188
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.16	0.272	0.334
39	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 4	DSI 4	189	836.4	1	30.61	31.50	1.227	-	-	0.01	0.384	0.471
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 4	DSI 2	189	836.4	1	30.61	31.50	1.227	-	-	-0.05	0.195	0.239
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.16	0.228	0.292
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	1	23.92	25.00	1.282	-	-	0.05	0.346	0.444
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	2	23.92	25.00	1.282	-	-	0.18	0.342	0.439
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	3	23.92	25.00	1.282	-	-	-0.04	0.341	0.437
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	4	23.92	25.00	1.282	-	-	-0.08	0.340	0.436
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	4182	836.4	1	23.92	25.00	1.282	-	-	0.07	0.233	0.299
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0.13	0.295	0.424
40	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	1	22.63	24.00	1.371	-	-	0.01	0.438	0.600
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	2	22.63	24.00	1.371	-	-	-0.13	0.401	0.550
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	3	22.63	24.00	1.371	-	-	-0.04	0.331	0.454
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	4	22.63	24.00	1.371	-	-	0.06	0.356	0.488
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	4182	836.4	1	23.42	25.00	1.439	-	-	0.07	0.221	0.318
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	0.01	0.205	0.270
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	-0.01	0.178	0.235
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	1	24.31	25.50	1.315	-	-	-0.06	0.336	0.442
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	1	23.29	24.50	1.321	-	-	-0.04	0.295	0.390
	LTE Band 5	10M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20525	836.5	1	24.31	25.50	1.315	-	-	-0.13	0.225	0.296
	LTE Band 5	10M	QPSK	25	0	-	Back	15mm	Ant 1	DSI 2	20525	836.5	1	23.29	24.50	1.321	-	-	-0.01	0.195	0.258
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.05	0.315	0.394
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.18	0.263	0.330
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	1	22.92	24.00	1.282	-	-	0.14	0.344	0.441
41	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	1	22.82	24.00	1.312	-	-	0.02	0.384	0.504
	LTE Band 5	10M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	20525	836.5	1	24.03	25.00	1.250	-	-	-0.08	0.222	0.278
	LTE Band 5	10M	QPSK	25	0	-	Back	15mm	Ant 4	DSI 2	20525	836.5	1	23.01	24.00	1.256	-	-	0.05	0.197	0.247
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	0.02	0.162	0.201



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.13	0.162	0.212
	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	26865	831.5	1	24.57	25.50	1.239	-	-	0.17	0.257	0.318
	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 1	DSI 4	26865	831.5	1	23.34	24.50	1.306	-	-	0.06	0.237	0.310
	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	26865	831.5	1	24.57	25.50	1.239	-	-	-0.18	0.184	0.228
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 1	DSI 2	26865	831.5	1	23.34	24.50	1.306	-	-	-0.11	0.168	0.219
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	0.08	0.273	0.346
	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	0.01	0.234	0.306
42	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	26865	831.5	1	23.97	25.00	1.268	-	-	-0.03	0.423	0.536
	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 4	DSI 4	26865	831.5	1	22.84	24.00	1.306	-	-	0.03	0.356	0.465
	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	26865	831.5	1	23.97	25.00	1.268	-	-	-0.08	0.201	0.255
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 4	DSI 2	26865	831.5	1	22.84	24.00	1.306	-	-	-0.03	0.166	0.217
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	-0.06	0.372	0.511
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	1413	1732.6	1	20.58	22.00	1.387	-	-	0.03	0.376	0.521
43	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	1413	1732.6	1	23.62	25.00	1.374	-	-	0.12	0.478	0.657
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.02	0.260	0.386
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.05	0.240	0.357
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	1413	1732.6	1	23.28	25.00	1.486	-	-	-0.16	0.113	0.168
	LTE Band 4	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.04	0.422	0.563
	LTE Band 4	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	-0.01	0.334	0.447
	LTE Band 4	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20175	1732.5	1	21.20	22.50	1.349	-	-	0	0.432	0.583
	LTE Band 4	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	20175	1732.5	1	21.06	22.50	1.393	-	-	0.06	0.441	0.614
44	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	1	24.25	25.50	1.334	-	-	-0.16	0.529	0.705
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	2	24.25	25.50	1.334	-	-	-0.08	0.508	0.677
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	3	24.25	25.50	1.334	-	-	-0.08	0.507	0.676
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	4	24.25	25.50	1.334	-	-	0.1	0.495	0.660
	LTE Band 4	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	20175	1732.5	1	23.23	24.50	1.340	-	-	0.11	0.401	0.537
	LTE Band 4	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	0.1	0.297	0.368
	LTE Band 4	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	0.16	0.242	0.304
	LTE Band 4	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.06	0.241	0.299
	LTE Band 4	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	20175	1732.5	1	23.01	24.00	1.256	-	-	0.02	0.219	0.275
	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	20175	1732.5	1	24.07	25.00	1.239	-	-	-0.06	0.114	0.141
	LTE Band 4	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	20175	1732.5	1	23.01	24.00	1.256	-	-	-0.13	0.097	0.122
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	0.19	0.317	0.411
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.14	0.255	0.344
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	132322	1745	1	20.76	22.00	1.330	-	-	0.01	0.320	0.426
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	132322	1745	1	20.64	22.00	1.368	-	-	-0.06	0.291	0.398
45	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	132322	1745	1	24.37	25.50	1.297	-	-	-0.12	0.457	0.593
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	132322	1745	1	23.20	24.50	1.349	-	-	-0.03	0.358	0.483
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.11	0.317	0.387
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	2	24.13	25.00	1.222	-	-	-0.18	0.306	0.374
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	3	24.13	25.00	1.222	-	-	0.1	0.233	0.285
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	4	24.13	25.00	1.222	-	-	0.12	0.290	0.354
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.01	0.243	0.302
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	1	24.13	25.00	1.222	-	-	0.03	0.286	0.349
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	1	23.06	24.00	1.242	-	-	-0.08	0.238	0.296
	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	132322	1745	1	24.13	25.00	1.222	-	-	-0.03	0.123	0.150
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	132322	1745	1	23.06	24.00	1.242	-	-	0.14	0.101	0.125
1900MHz																					
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306		1.000	0.01	0.239	0.312
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 4	661	1880	1	27.34	28.50	1.306		1.000	-0.01	0.429	0.560
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 1	DSI 2	661	1880	1	27.34	28.50	1.306		1.000	-0.13	0.284	0.371
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493		1.000	-0.11	0.442	0.660
46	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 4	DSI 4	661	1880	1	22.15	23.50	1.365		1.000	-0.03	0.512	0.699
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	15mm	Ant 4	DSI 2	661	1880	1	26.76	28.50	1.493	-	-	0.04	0.245	0.366
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	0.05	0.499	0.710



FCC SAR Test Report

Report No. : FA4D0203

	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	9400	1880	1	21.09	22.50	1.384	-	-	0.12	0.474	0.656
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	DSI 2	9400	1880	1	23.47	25.00	1.422	-	-	-0.01	0.512	0.728
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	0.08	0.671	0.974
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9262	1852.4	1	20.22	22.00	1.507	-	-	0.01	0.498	0.750
47	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9538	1907.6	1	20.16	22.00	1.528	-	-	-0.01	0.688	1.051
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9538	1907.6	2	20.16	22.00	1.528	-	-	0.08	0.547	0.836
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9538	1907.6	3	20.16	22.00	1.528	-	-	-0.17	0.525	0.802
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 2	9538	1907.6	4	20.16	22.00	1.528	-	-	-0.03	0.609	0.930
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	9400	1880	1	18.35	20.00	1.462	-	-	0.03	0.529	0.773
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	DSI 2	9400	1880	1	20.38	22.00	1.452	-	-	0.12	0.418	0.607
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	0.1	0.490	0.661
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	0.01	0.383	0.527
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	18900	1880	1	21.23	22.50	1.340	-	-	0.03	0.452	0.606
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	18900	1880	1	21.11	22.50	1.377	-	-	0.1	0.443	0.610
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	24.20	25.50	1.349	-	-	-0.08	0.662	0.893
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	2	24.20	25.50	1.349	-	-	0.14	0.597	0.805
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	3	24.20	25.50	1.349	-	-	0.11	0.605	0.816
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	4	24.20	25.50	1.349	-	-	-0.05	0.628	0.847
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	18700	1860	1	24.17	25.50	1.358	-	-	-0.05	0.599	0.814
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	19100	1900	1	24.14	25.50	1.368	-	-	-0.03	0.616	0.843
	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	23.11	24.50	1.377	-	-	0.17	0.520	0.716
	LTE Band 2	20M	QPSK	100	0	-	Back	15mm	Ant 1	DSI 2	18900	1880	1	22.95	24.50	1.429	-	-	-0.14	0.516	0.737
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	0.08	0.680	0.848
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	18700	1860	1	20.37	21.50	1.297	-	-	0.01	0.564	0.732
48	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	19100	1900	1	20.48	21.50	1.265	-	-	-0.04	0.720	0.911
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	0.03	0.559	0.717
	LTE Band 2	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	18900	1880	1	20.28	21.50	1.324	-	-	0.1	0.564	0.747
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	1	19.09	20.00	1.233	-	-	-0.18	0.402	0.496
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	1	18.97	20.00	1.268	-	-	0.1	0.424	0.537
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	18900	1880	1	20.54	21.50	1.247	-	-	-0.05	0.353	0.440
	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	18900	1880	1	20.42	21.50	1.282	-	-	-0.17	0.289	0.371
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.02	0.303	0.396
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.17	0.286	0.394
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	1	20.26	21.50	1.330	-	-	0.05	0.357	0.475
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	1	20.14	21.50	1.368	-	-	0	0.365	0.499
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	21100	2535	1	23.84	25.00	1.306	-	-	0.01	0.425	0.555
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.18	0.390	0.537
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	0.13	0.777	0.911
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	20850	2510	1	22.17	23.00	1.211	-	-	0.12	0.577	0.699
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	1	22.15	23.00	1.216	-	-	0.03	0.553	0.673
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	0.18	0.663	0.803
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	20850	2510	1	22.00	23.00	1.259	-	-	0.16	0.723	0.910
49	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	1	22.11	23.00	1.227	-	-	-0.07	0.821	1.008
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	2	22.11	23.00	1.227	-	-	-0.03	0.665	0.816
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	3	22.11	23.00	1.227	-	-	-0.15	0.695	0.853
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	21350	2560	4	22.11	23.00	1.227	-	-	0.02	0.816	1.002
	LTE Band 7	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	21100	2535	1	21.99	23.00	1.262	-	-	-0.1	0.647	0.816
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	1	18.66	19.50	1.213	-	-	-0.18	0.507	0.615
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	1	18.63	19.50	1.222	-	-	0.1	0.404	0.494
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	21100	2535	1	22.31	23.00	1.172	-	-	-0.15	0.507	0.594
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	21100	2535	1	22.17	23.00	1.211	-	-	-0.08	0.420	0.508
	LTE Band 38	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	0.01	0.451	0.537
	LTE Band 38	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	0.16	0.374	0.478
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	1	22.01	23.00	1.256	62.9	1.006	0.06	0.529	0.668
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	2	22.01	23.00	1.256	62.9	1.006	0.18	0.428	0.541



FCC SAR Test Report

Report No. : FA4D0203

	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	3	22.01	23.00	1.256	62.9	1.006	0.14	0.448	0.566
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	4	22.01	23.00	1.256	62.9	1.006	-0.17	0.526	0.665
	LTE Band 38	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	38000	2595	1	21.90	23.00	1.288	62.9	1.006	-0.02	0.512	0.664
	LTE Band 38	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	38000	2595	1	24.27	25.00	1.183	62.9	1.006	-0.07	0.405	0.482
	LTE Band 38	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	38000	2595	1	22.96	24.00	1.271	62.9	1.006	0.11	0.313	0.400
	LTE Band 38	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.1	0.702	0.834
	LTE Band 38	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	-0.07	0.548	0.718
	LTE Band 38	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	0.07	0.549	0.721
	LTE Band 38	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	38000	2595	1	20.71	21.50	1.199	62.9	1.006	0.08	0.492	0.594
	LTE Band 38	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	38000	2595	1	20.66	21.50	1.213	62.9	1.006	0.01	0.471	0.575
	LTE Band 38	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	23.78	24.50	1.180	62.9	1.006	0.02	0.742	0.881
	LTE Band 38	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	22.35	23.50	1.303	62.9	1.006	-0.03	0.626	0.821
50	LTE Band 38	20M	QPSK	100	0	-	Back	15mm	Ant 4	DSI 2	38000	2595	1	22.34	23.50	1.306	62.9	1.006	0.06	0.737	0.968
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 2	40620	2593	1	24.11	25.00	1.227	62.9	1.006	0.08	0.480	0.593
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 2	40620	2593	1	23.06	24.00	1.242	62.9	1.006	0.01	0.379	0.473
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	1	21.95	23.00	1.274	62.9	1.006	0.03	0.506	0.648
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	39750	2506	1	21.79	23.00	1.321	62.9	1.006	0.02	0.475	0.631
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	40185	2549.5	1	21.82	23.00	1.312	62.9	1.006	-0.04	0.488	0.644
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	1	21.90	23.00	1.288	62.9	1.006	-0.08	0.508	0.658
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	39750	2506	1	21.70	23.00	1.349	62.9	1.006	0.06	0.480	0.651
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	40185	2549.5	1	21.65	23.00	1.365	62.9	1.006	0.07	0.471	0.647
	LTE Band 41	20M	QPSK	100	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	1	21.74	23.00	1.337	62.9	1.006	-0.04	0.484	0.651
	LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 1	DSI 2	40620	2593	1	24.11	25.00	1.227	62.9	1.006	-0.03	0.390	0.482
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 1	DSI 2	40620	2593	1	23.06	24.00	1.242	62.9	1.006	0.14	0.316	0.395
51	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	40620	2593	1	23.75	24.50	1.189	62.9	1.006	0.03	0.812	0.971
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	39750	2506	1	23.45	24.50	1.274	62.9	1.006	0.01	0.523	0.670
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	40185	2549.5	1	23.71	24.50	1.199	62.9	1.006	-0.11	0.735	0.887
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	41055	2636.5	1	23.53	24.50	1.250	62.9	1.006	0.03	0.735	0.924
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 2	41490	2680	1	23.51	24.50	1.256	62.9	1.006	-0.05	0.585	0.739
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	40620	2593	1	22.17	23.50	1.358	62.9	1.006	0.14	0.634	0.866
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	39750	2506	1	22.08	23.50	1.387	62.9	1.006	-0.12	0.430	0.600
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	40185	2549.5	1	22.08	23.50	1.387	62.9	1.006	0.07	0.604	0.843
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	41055	2636.5	1	22.02	23.50	1.406	62.9	1.006	0.09	0.552	0.781
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 2	41490	2680	1	22.05	23.50	1.396	62.9	1.006	0.04	0.441	0.619
	LTE Band 41	20M	QPSK	100	0	-	Front	10mm	Ant 4	DSI 2	40620	2593	1	22.10	23.50	1.380	62.9	1.006	0.11	0.623	0.865
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	40620	2593	1	20.71	21.50	1.199	62.9	1.006	-0.08	0.481	0.580
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	40620	2593	1	20.62	21.50	1.225	62.9	1.006	0.1	0.466	0.574
	LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	23.75	24.50	1.189	62.9	1.006	-0.12	0.432	0.517
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	22.17	23.50	1.358	62.9	1.006	-0.01	0.568	0.776
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	39750	2506	1	22.08	23.50	1.387	62.9	1.006	0.1	0.338	0.472
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	40185	2549.5	1	22.08	23.50	1.387	62.9	1.006	-0.04	0.501	0.699
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	41055	2636.5	1	22.02	23.50	1.406	62.9	1.006	0.15	0.457	0.646
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	DSI 2	41490	2680	1	22.05	23.50	1.396	62.9	1.006	0.09	0.327	0.459
	LTE Band 41	20M	QPSK	100	0	-	Back	15mm	Ant 4	DSI 2	40620	2593	1	22.10	23.50	1.380	62.9	1.006	-0.16	0.426	0.592



FCC SAR Test Report

Report No. : FA4D0203

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
52	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	0.08	0.262	0.383
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Full Power	1	2412	1	19.42	21.00	1.439	98.39	1.016	-0.02	0.481	0.703
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Full Power	1	2412	2	19.42	21.00	1.439	98.39	1.016	0.17	0.456	0.667
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Full Power	1	2412	3	19.42	21.00	1.439	98.39	1.016	-0.05	0.379	0.554
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Full Power	1	2412	4	19.42	21.00	1.439	98.39	1.016	0.01	0.475	0.694
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	Simultaneous	1	2412	1	17.58	19.00	1.387	98.39	1.016	0.08	0.309	0.435
	Bluetooth	1Mbps	Front	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.1	0.034	0.052
53	Bluetooth	1Mbps	Back	10mm	Ant 7	Full Power	78	2480	1	10.47	12.00	1.422	77.63	1.073	0.08	0.065	0.100
5000MHz																	
54	WLAN5.3GHz	802.11a 6Mbps	Front	10mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.03	0.142	0.229
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	0.01	0.487	0.784
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	52	5260	2	17.88	19.50	1.452	90.14	1.109	0.1	0.310	0.499
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	52	5260	3	17.88	19.50	1.452	90.14	1.109	-0.17	0.469	0.755
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	52	5260	4	17.88	19.50	1.452	90.14	1.109	0.04	0.289	0.465
	WLAN5.3GHz	802.11a 6Mbps	Back	10mm	Ant 7	Simultaneous	52	5260	1	14.57	16.50	1.559	90.14	1.109	0.03	0.258	0.446
	WLAN5.5GHz	802.11a 6Mbps	Front	10mm	Ant 7	Standalone	132	5660	1	17.26	18.50	1.330	90.14	1.109	0.08	0.118	0.174
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	132	5660	1	17.26	18.50	1.330	90.14	1.109	0.01	0.584	0.862
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	100	5500	1	16.15	17.50	1.364	90.14	1.109	0.03	0.544	0.823
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	116	5580	1	16.61	18.00	1.377	90.14	1.109	-0.08	0.670	1.023
55	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	124	5620	1	17.24	18.50	1.337	90.14	1.109	-0.04	0.706	1.046
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	124	5620	2	17.24	18.50	1.337	90.14	1.109	-0.01	0.455	0.674
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	124	5620	3	17.24	18.50	1.337	90.14	1.109	-0.08	0.689	1.021
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	124	5620	4	17.24	18.50	1.337	90.14	1.109	0.05	0.425	0.630
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Standalone	140	5700	1	17.02	18.50	1.406	90.14	1.109	-0.08	0.568	0.886
	WLAN5.5GHz	802.11a 6Mbps	Back	10mm	Ant 7	Simultaneous	132	5660	1	15.55	17.00	1.396	90.14	1.109	0.01	0.278	0.431
	WLAN5.8GHz	802.11a 6Mbps	Front	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	0.18	0.118	0.178
56	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	165	5825	1	17.67	19.00	1.358	90.14	1.109	-0.04	0.436	0.657
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	165	5825	2	17.67	19.00	1.358	90.14	1.109	0.06	0.431	0.649
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	165	5825	3	17.67	19.00	1.358	90.14	1.109	-0.09	0.418	0.630
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Full Power	165	5825	4	17.67	19.00	1.358	90.14	1.109	-0.08	0.397	0.598
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 7	Simultaneous	165	5825	1	15.31	16.50	1.315	90.14	1.109	0.01	0.275	0.401



15.4 Product specific 10g SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
5000MHz																	
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.17	0.189	0.304
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	0.17	0.563	0.906
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	0.01	0.285	0.459
57	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	52	5260	1	17.88	19.50	1.452	90.14	1.109	-0.06	0.662	1.066
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	52	5260	2	17.88	19.50	1.452	90.14	1.109	-0.04	0.410	0.660
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	52	5260	3	17.88	19.50	1.452	90.14	1.109	-0.09	0.663	1.067
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	52	5260	4	17.88	19.50	1.452	90.14	1.109	-0.17	0.348	0.560
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 7	Full Power	132	5660	1	18.56	20.00	1.393	90.14	1.109	0.04	0.157	0.243
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 7	Full Power	132	5660	1	18.56	20.00	1.393	90.14	1.109	-0.01	0.856	1.322
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 7	Full Power	132	5660	1	18.56	20.00	1.393	90.14	1.109	0.05	0.363	0.561
58	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	132	5660	1	18.56	20.00	1.393	90.14	1.109	-0.07	1.360	2.101
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	132	5660	2	18.56	20.00	1.393	90.14	1.109	-0.13	1.35	2.085
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	132	5660	3	18.56	20.00	1.393	90.14	1.109	-0.01	1.09	1.684
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	132	5660	4	18.56	20.00	1.393	90.14	1.109	-0.09	1.33	2.054
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	100	5500	1	17.67	19.00	1.358	90.14	1.109	0.06	1.200	1.807
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	116	5580	1	18.07	19.50	1.390	90.14	1.109	-0.09	1.130	1.742
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	124	5620	1	18.43	20.00	1.435	90.14	1.109	-0.08	1.250	1.990
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 7	Full Power	140	5700	1	17.53	19.50	1.574	90.14	1.109	0.13	0.951	1.660



15.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	19.79	20.50	1.178	62.9	1.006	0.02	0.913	1	1.082
2nd	LTE Band 38	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	38000	2595	19.79	20.50	1.178	62.9	1.006	-0.15	0.874	1.045	1.035

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN 2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN 5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WWAN + WLAN 5GHz + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- According to the EUT characteristic, WLAN5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT characteristic, WLAN2.4GHz and WLAN5GHz cannot transmit simultaneously.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- When stand-alone SAR is not required for a transmitter or antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.
- For standalone WWAN, always choose the highest SAR among all WWAN bands within all antennas for each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each band.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

16.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 7	WLAN5GHz Ant 7	Bluetooth Ant 7	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
all Band Ant 1	Right Cheek	0.421	0.299	0.171	0.093	0.72	0.69
	Right Tilted	0.317	0.358	0.207	0.107	0.68	0.63
	Left Cheek	0.375	0.431	0.254	0.252	0.81	0.88
	Left Tilted	0.229	0.530	0.268	0.288	0.76	0.79
all Band Ant 4	Right Cheek	1.067	0.299	0.171	0.093	1.37	1.33
	Right Tilted	1.082	0.358	0.207	0.107	1.44	1.19
	Left Cheek	0.655	0.431	0.254	0.252	1.09	1.16
	Left Tilted	0.680	0.530	0.268	0.288	1.21	1.24

16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	WLAN2.4GHz Ant 7	WLAN5GHz Ant 7	Bluetooth Ant 7		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
all Band Ant 1	Front	0.710	0.383	0.212	0.052	1.09	0.97
	Back	0.893	0.435	0.503	0.100	1.33	1.50
	Left side	0.489				0.49	0.49
	Right side	0.568	0.377	0.320		0.95	0.89
	Top side		0.513	0.375	0.064	0.51	0.44
	Bottom side	1.088				1.09	1.09
all Band Ant 4	Front	1.051	0.383	0.212	0.052	1.43	1.32
	Back	0.968	0.435	0.503	0.100	1.40	1.57
	Left side	0.862				0.86	0.86
	Right side	0.165	0.377	0.320		0.54	0.49
	Top side	1.061	0.513	0.375	0.064	1.57	1.50
	Bottom side					0.00	0.00

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 7	WLAN5GHz Ant 7	Bluetooth Ant 7	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
All Ant 1	Front	0.710	0.383	0.229	0.052	1.09	0.99
	Back	0.893	0.435	0.446	0.100	1.33	1.44
All Ant 4	Front	1.051	0.383	0.229	0.052	1.43	1.33
	Back	0.968	0.435	0.446	0.100	1.40	1.51

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [13] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015

-----THE END-----