




11AC20SISO\_Ant1\_5745

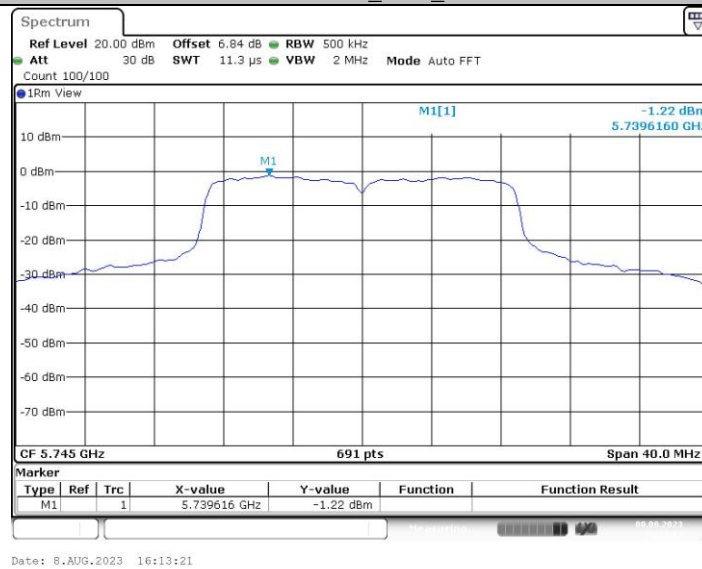


11AC20SISO\_Ant1\_5785

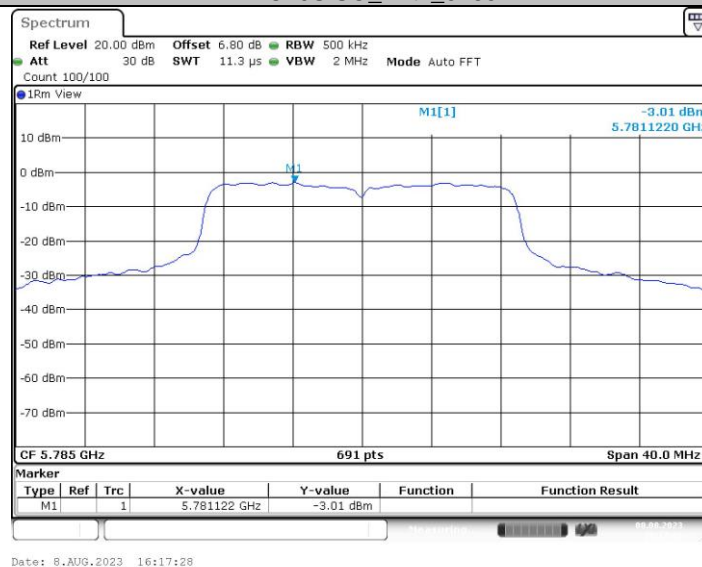


11AC20SISO\_Ant1\_5825

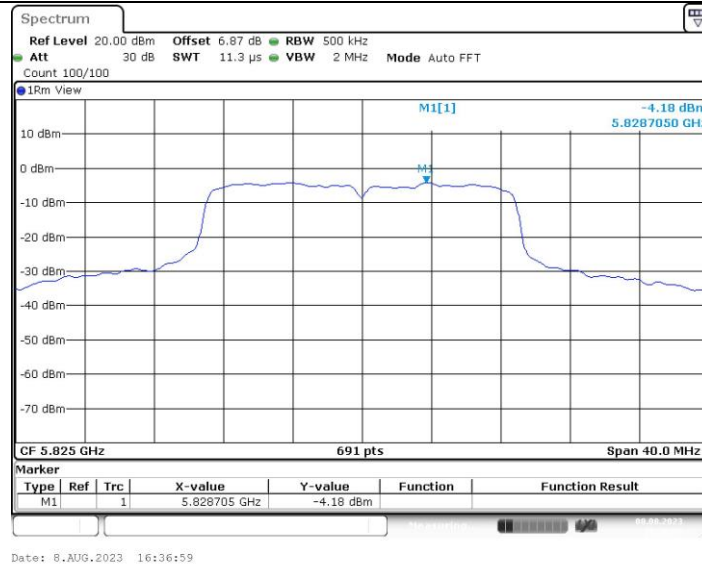


## 11AC40SISO\_Ant1\_5190

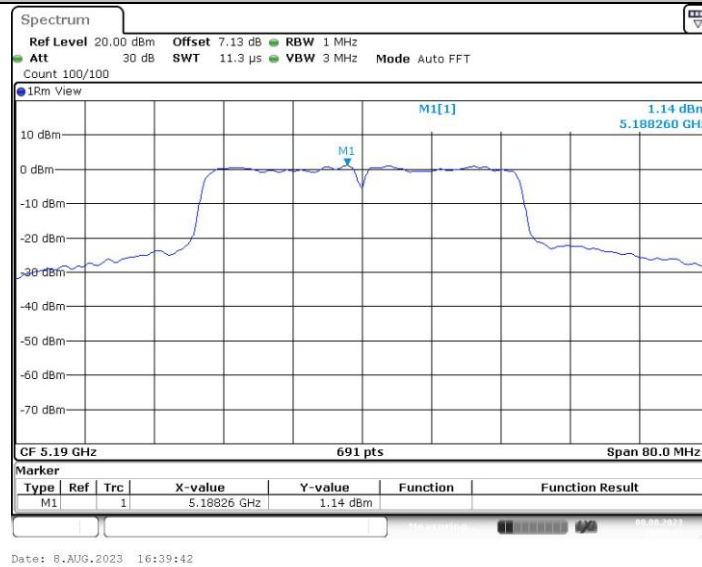


## 11AC40SISO\_Ant1\_5230

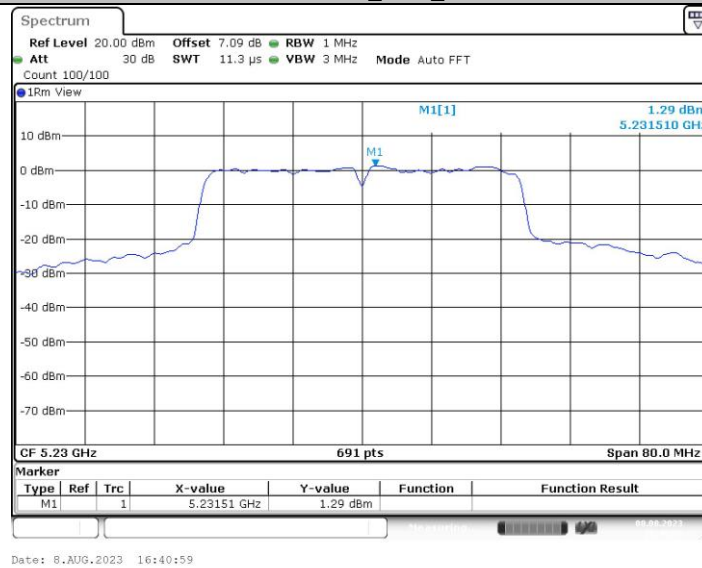


## 11AC40SISO\_Ant1\_5755

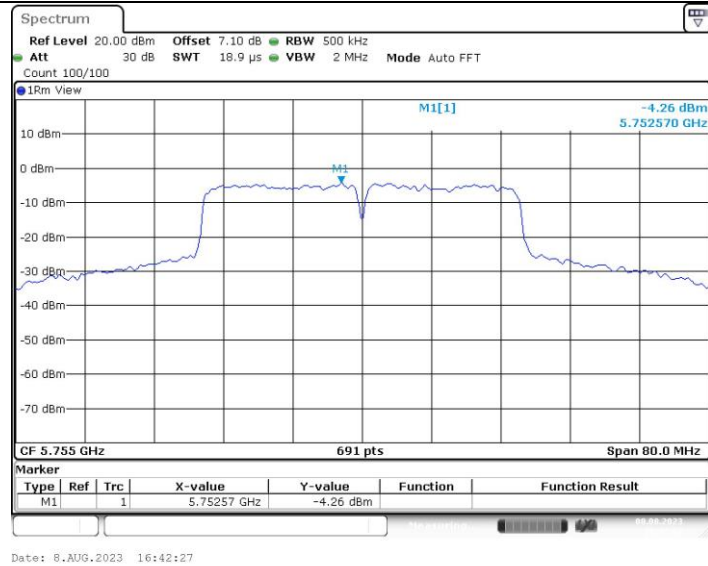


## 11AC40SISO\_Ant1\_5795

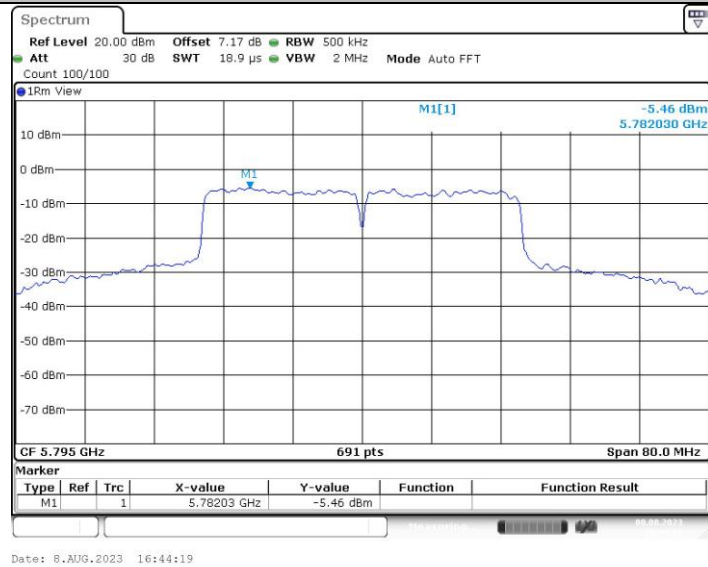

## 11AC80SISO\_Ant1\_5210

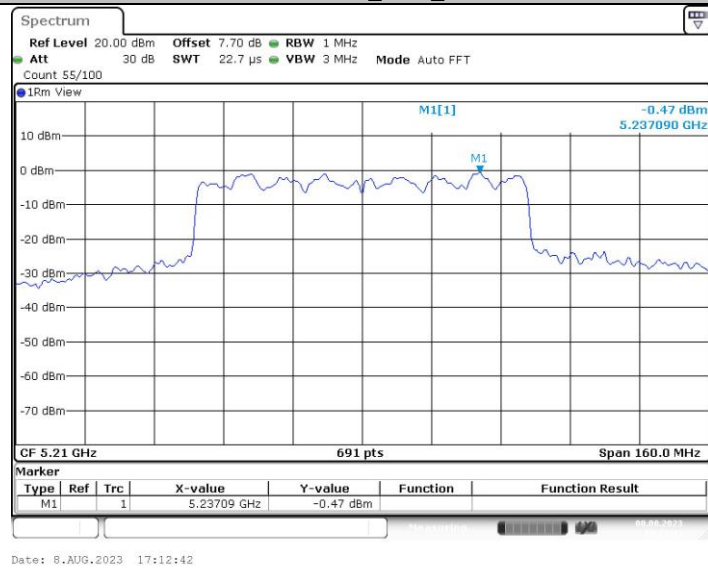

## 11AC80SISO\_Ant1\_5775

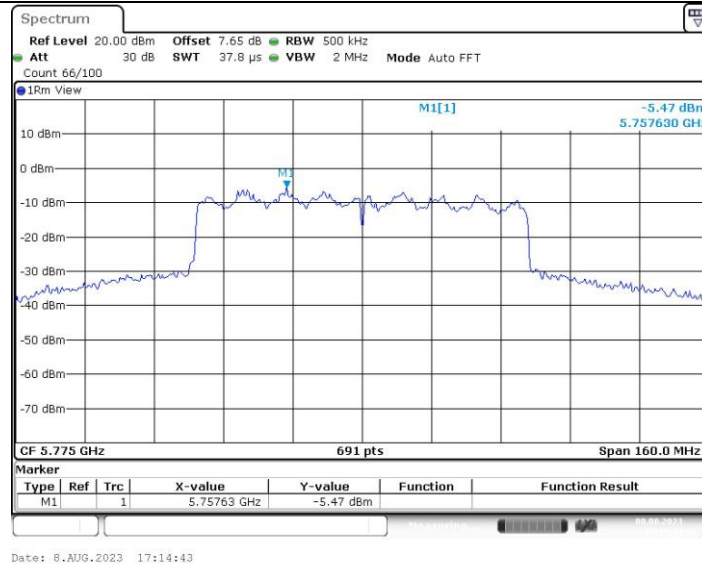




### 3.7. Frequency Stability

#### Limit

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(g)

Test Item	Limit	Frequency Range (MHz)
Frequency Stability	Specified in the user's manual, the transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5250~5350
		5500~5700
		5725~5850

#### Test Configuration

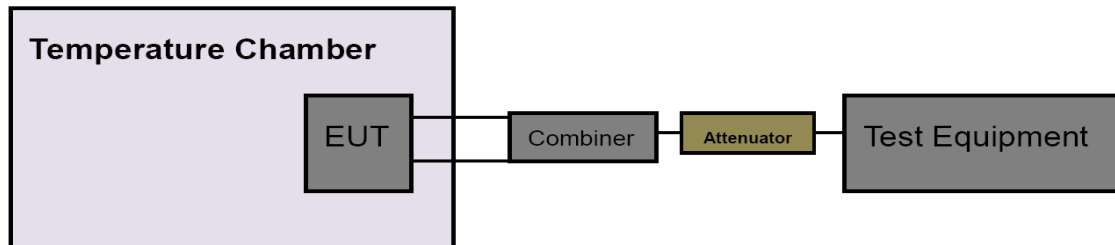

#### Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 8MHz, VBW=8MHz with peak detector and max hold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 230V to 110V percent of the nominal value.
- (6) Extreme temperature is -10°C~40°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

Voltage								
TestMode	Antenna	Freq(MHz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20M	Ant1	5180	NV	NT	-44000.00	-8.494208	20	PASS
			LV	NT	-42000.00	-8.108108	20	PASS
			HV	NT	-41000.00	-7.915058	20	PASS
		5200	NV	NT	-42000.00	-8.076923	20	PASS
			LV	NT	-41000.00	-7.884615	20	PASS
			HV	NT	-41000.00	-7.884615	20	PASS
		5240	NV	NT	-42000.00	-8.015267	20	PASS
			LV	NT	-41000.00	-7.824427	20	PASS
			HV	NT	-41000.00	-7.824427	20	PASS
		5745	NV	NT	-55900.00	-9.730200	20	PASS
			LV	NT	-56900.00	-9.904265	20	PASS
			HV	NT	-57900.00	-10.078329	20	PASS
		5785	NV	NT	-59900.00	-10.354365	20	PASS
			LV	NT	-57900.00	-10.008643	20	PASS
			HV	NT	-58900.00	-10.181504	20	PASS
		5825	NV	NT	-60900.00	-10.454936	20	PASS
			LV	NT	-58900.00	-10.111588	20	PASS
			HV	NT	-58900.00	-10.111588	20	PASS
40M	Ant1	5190	NV	NT	-54900.00	-10.578035	20	PASS
			LV	NT	-50900.00	-9.807322	20	PASS
			HV	NT	-50000.00	-9.633911	20	PASS
		5230	NV	NT	-51900.00	-9.923518	20	PASS
			LV	NT	-50000.00	-9.560229	20	PASS
			HV	NT	-50000.00	-9.560229	20	PASS
		5755	NV	NT	-58900.00	-10.234579	20	PASS
			LV	NT	-57900.00	-10.060817	20	PASS
			HV	NT	-58900.00	-10.234579	20	PASS
		5795	NV	NT	-60900.00	-10.509060	20	PASS
			LV	NT	-58900.00	-10.163934	20	PASS
			HV	NT	-58900.00	-10.163934	20	PASS
80M	Ant1	5210	NV	NT	-50900.00	-9.769674	20	PASS
			LV	NT	-50000.00	-9.596929	20	PASS
			HV	NT	-50000.00	-9.596929	20	PASS
		5775	NV	NT	-58900.00	-10.199134	20	PASS
			LV	NT	-57900.00	-10.025974	20	PASS
			HV	NT	-57900.00	-10.025974	20	PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



Temperature								
TestMode	Antenna	Freq(MHz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20M	Ant1	5180	NV	-10	-42000.00	-8.108108	20	PASS
			NV	0	-41000.00	-7.915058	20	PASS
			NV	10	-41000.00	-7.915058	20	PASS
			NV	20	-41000.00	-7.915058	20	PASS
			NV	30	-41000.00	-7.915058	20	PASS
			NV	40	-41000.00	-7.915058	20	PASS
		5200	NV	-10	-40000.00	-7.692308	20	PASS
			NV	0	-40000.00	-7.692308	20	PASS
			NV	10	-40000.00	-7.692308	20	PASS
			NV	20	-40000.00	-7.692308	20	PASS
			NV	30	-40000.00	-7.692308	20	PASS
			NV	40	-40000.00	-7.692308	20	PASS
		5240	NV	-10	-40000.00	-7.633588	20	PASS
			NV	0	-41000.00	-7.824427	20	PASS
			NV	10	-40000.00	-7.633588	20	PASS
			NV	20	-40000.00	-7.633588	20	PASS
			NV	30	-40000.00	-7.633588	20	PASS
			NV	40	-40000.00	-7.633588	20	PASS
		5745	NV	-10	-57900.00	-10.078329	20	PASS
			NV	0	-58900.00	-10.252393	20	PASS
			NV	10	-57900.00	-10.078329	20	PASS
			NV	20	-58900.00	-10.252393	20	PASS
			NV	30	-58900.00	-10.252393	20	PASS
			NV	40	-58900.00	-10.252393	20	PASS
		5785	NV	-10	-57900.00	-10.008643	20	PASS
			NV	0	-57900.00	-10.008643	20	PASS
			NV	10	-57900.00	-10.008643	20	PASS
			NV	20	-58900.00	-10.181504	20	PASS
			NV	30	-58900.00	-10.181504	20	PASS
			NV	40	-58900.00	-10.181504	20	PASS
		5825	NV	-10	-58900.00	-10.111588	20	PASS
			NV	0	-58900.00	-10.111588	20	PASS
			NV	10	-58900.00	-10.111588	20	PASS
			NV	20	-58900.00	-10.111588	20	PASS
			NV	30	-58900.00	-10.111588	20	PASS
			NV	40	-58900.00	-10.111588	20	PASS
40M	Ant1	5190	NV	-10	-50000.00	-9.633911	20	PASS
			NV	0	-50000.00	-9.633911	20	PASS
			NV	10	-50000.00	-9.633911	20	PASS
			NV	20	-50000.00	-9.633911	20	PASS
			NV	30	-49000.00	-9.441233	20	PASS
			NV	40	-49000.00	-9.441233	20	PASS
		5230	NV	-10	-49000.00	-9.369025	20	PASS
			NV	0	-49000.00	-9.369025	20	PASS
			NV	10	-49000.00	-9.369025	20	PASS
			NV	20	-49000.00	-9.369025	20	PASS
			NV	30	-49000.00	-9.369025	20	PASS
			NV	40	-49000.00	-9.369025	20	PASS
		5755	NV	-10	-58900.00	-10.234579	20	PASS
			NV	0	-58900.00	-10.234579	20	PASS
			NV	10	-58900.00	-10.234579	20	PASS
			NV	20	-58900.00	-10.234579	20	PASS
			NV	30	-59900.00	-10.408341	20	PASS
			NV	40	-59900.00	-10.408341	20	PASS
		5795	NV	-10	-58900.00	-10.163934	20	PASS
			NV	0	-58900.00	-10.163934	20	PASS
			NV	10	-58900.00	-10.163934	20	PASS
			NV	20	-58900.00	-10.163934	20	PASS
			NV	30	-57900.00	-9.991372	20	PASS
			NV	40	-58900.00	-10.163934	20	PASS
80M	Ant1	5210	NV	-10	-50000.00	-9.596929	20	PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>





			NV	0	-49000.00	-9.404990	20	PASS
			NV	10	-49000.00	-9.404990	20	PASS
			NV	20	-49000.00	-9.404990	20	PASS
			NV	30	-49000.00	-9.404990	20	PASS
			NV	40	-49000.00	-9.404990	20	PASS
		5775	NV	-10	-58900.00	-10.199134	20	PASS
			NV	0	-58900.00	-10.199134	20	PASS
			NV	10	-58900.00	-10.199134	20	PASS
			NV	20	-58900.00	-10.199134	20	PASS
			NV	30	-58900.00	-10.199134	20	PASS
			NV	40	-58900.00	-10.199134	20	PASS





### 3.8. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.



### 3.9. Dynamic Frequency Selection

#### Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Limit**

## 1. DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.  
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

## 2. DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Radar Test Waveforms**

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.



Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

$$\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\}$$

would be Round up  $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18$ .

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658



Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.





### Test Procedure

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

### Test Mode

Please refer to the clause 2.4.

### Test Result

☐ Passed ☒ Not Applicable

\*\*\*\*\*THE END\*\*\*\*\*