



Test Report

AIR-AP1810W-B-K9 AIR-OEAP1810-B-K9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102096

5470-5725 MHz

Against the following Specifications:

CFR47 Part 15.407

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
Author: Jose Aguirre Tested By	Approved By: Jim Nicholson Title: Technical Leader, Engineering Revision: 1

This report replaces any previously entered test report under EDCS – **1553987**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION	7
SECTION 3: RESULT SUMMARY	8
3.1 RESULTS SUMMARY TABLE	8
SECTION 4: SAMPLE DETAILS.....	10
APPENDIX A: EMISSION TEST RESULTS	11
CONDUCTED TEST SETUP DIAGRAM.....	11
TARGET MAXIMUM CHANNEL POWER	11
A.1 99% AND 26dB BANDWIDTH.....	12
A.2 MAXIMUM CONDUCTED OUTPUT POWER/ POWER SPECTRAL DENSITY	26
A.3 CONDUCTED SPURIOUS EMISSIONS	37
A.4 CONDUCTED BANDEDGE	48
APPENDIX B: EMISSION TEST RESULTS.....	54
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G	54
RADIATED EMISSION SETUP DIAGRAM-ABOVE 1G	54
B.1 RADIATED SPURIOUS EMISSIONS.....	55
B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ.....	70
B.3 AC CONDUCTED EMISSIONS.....	72
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	78
APPENDIX E: ABBREVIATION KEY AND DEFINITIONS	81



Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r01
- KDB 662911 D01 Multiple Transmitter Output v02r01



Section2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^{\circ}$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

**2.2 Date of testing**

01-Jan-16 - 22-Feb-16

2.3 Report Issue Date

08-March-2016

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-AP1810W-B-K9



2.6 EUT Description

The Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT20, One Antenna, 6 to 54 Mbps
 802.11n/ac - Non HT20, Two Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7
 802.11n/ac - HT/VHT20, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT20, Two Antennas, M8 to M15

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7

802.11n/ac - Non HT40 Duplicate, One Antenna, 6 to 54 Mbps
 802.11n/ac - Non HT40 Duplicate, Two Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7
 802.11n/ac - HT/VHT40, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT40, Two Antennas, M8 to M15

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7

802.11n/ac - Non HT80 Duplicate, One Antenna, 6 to 54 Mbps
 802.11n/ac - Non HT80 Duplicate, Two Antennas, 6 to 54 Mbps

802.11ac - VHT80, One Antenna, M0 to M7
 802.11ac - VHT80, Two Antennas, M0 to M7
 802.11ac - VHT80, Two Antennas, M8 to M15

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M7
 802.11ac - VHT80 Beam Forming, Two Antennas, M8 to M15

The following antennas are supported by this product series.
 The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4 GHz 2.4 / 5 GHz	BlueTooth	Omni	2
	2x2 Internal	Omni	2 / 4



Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407	Output Power: 15.407 (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Power Spectral Density: 15.407 The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Conducted Spurious Emissions / Band-Edge: 15.407 (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
FCC 15.407 FCC 15.209 FCC 15.205	Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).	Pass

**Radiated Emissions (General requirements)**

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	AC conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

* MPE calculation is recorded in a separate report



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP1810W-B-K9	Cisco Systems	01	8.1.10.159	Linux v3.4.103	RFDP2AHY202
S02*	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226

(*) S02 are support equipment Power supplies for EUT S01

4.2 System Details

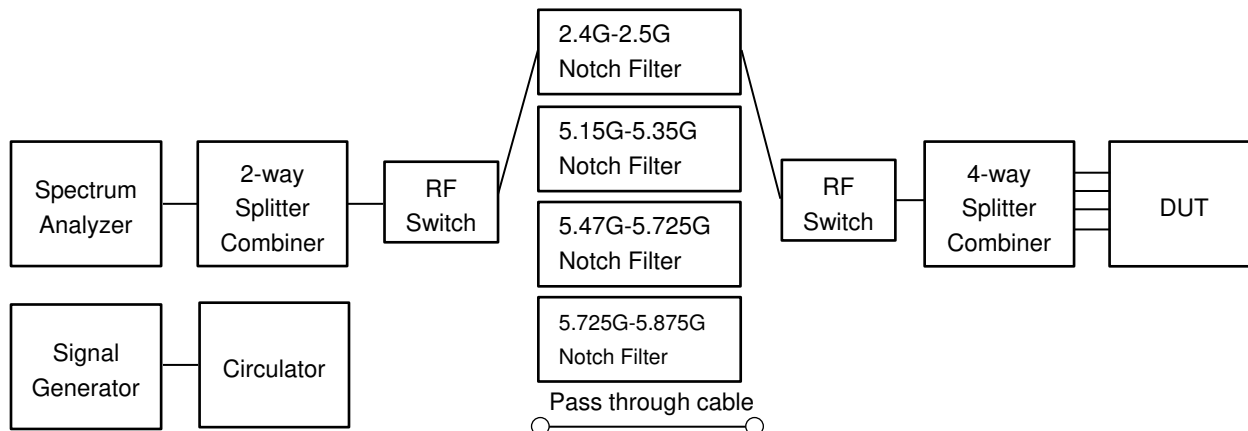
System #	Description	Samples
1	AIR-AP1810W-B-K9	S01
2	AIR-PWR-C	S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting $\geq 98\%$ duty cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r01
- KDB 662911 D01 Multiple Transmitter Output v02r01

Appendix A: Emission Test Results**Conducted Test Setup Diagram****Target Maximum Channel Power**

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5500	5560	5720
Non HT20, 6 to 54 Mbps	20	20	20
Non HT20 Beam Forming, 6 to 54 Mbps	20	20	20
HT/VHT20, M0 to M15, M0 to M9 1-0ss	19	20	19
HT/VHT20 Beam Forming, M0 to M15, M0 to M9 1-0ss	19	20	19
HT/VHT20 STBC, M0 to M7	19	20	19
	5510	5550	5710
Non HT40, 6 to 54 Mbps	19	20	20
HT/VHT40, M0 to M15, M0 to M9 1-0ss	19	21	20
HT/VHT40 Beam Forming, M0 to M15, M0 to M9 1-0ss	19	21	20
HT/VHT40 STBC, M0 to M7	19	21	20
	5530	5690	
Non HT80, 6 to 54 Mbps	18	20	
VHT80, M0 to M15, M0 to M9 1-0ss	14	20	
VHT80 Beam Forming, M0 to M15, M0 to M9 1-0ss	14	20	
VHT80 STBC, M8 to M15	14	20	

A.1 99% and 26dB Bandwidth

FCC 15.407 The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

KDB 644545 D03 v01 section D1b

Band-crossing emissions: For an emission that crosses the boundary between two adjacent U-NII bands, the boundary frequency between the bands serves as one edge for defining the portion of the EBW that falls within a particular U-NII band. However, the -26 dB points are measured relative to the highest point on the contiguous segment—regardless of which band contains that highest point (Figure4).

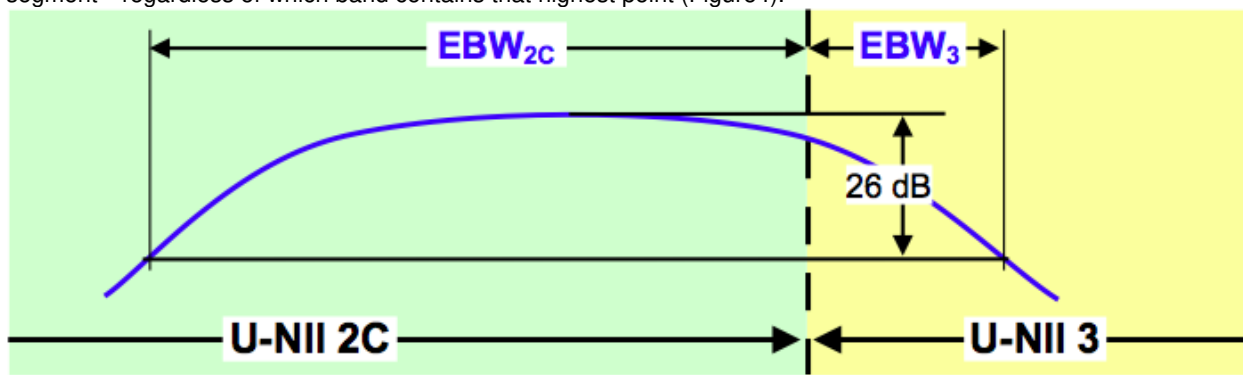


Figure 4. Emission Bandwidth (EBW) within a Band for Band-Crossing Signals

Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3
 KDB 644545 D03 v01
 KDB 789033 D02 General UNII Test Procedures New Rules v01r01
 KDB 662911 v02r01

99% BW and EBW (-26dB)

Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB)

Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)
 OBW = 99% (using the OBW function of the spectrum analyzer)
 Span = 1.5 x to 5.0 times OBW
 RBW = approx. 1% to 5% of the OBW
 VBW \geq 3 x RBW



Detector = Peak or where practical sample shall be used
Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

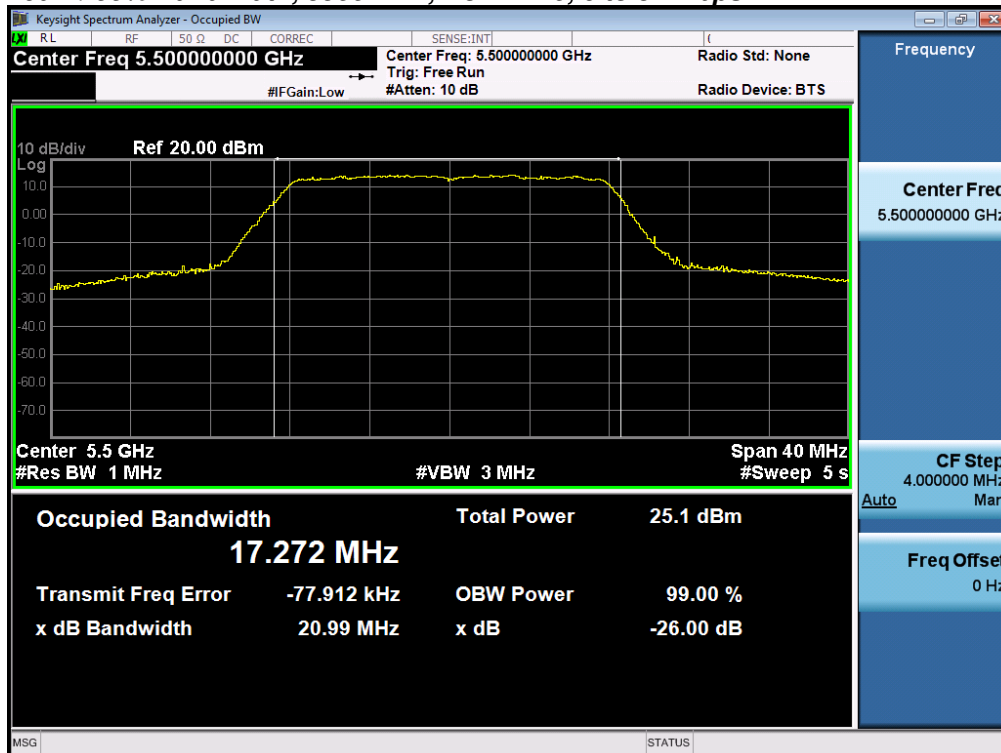
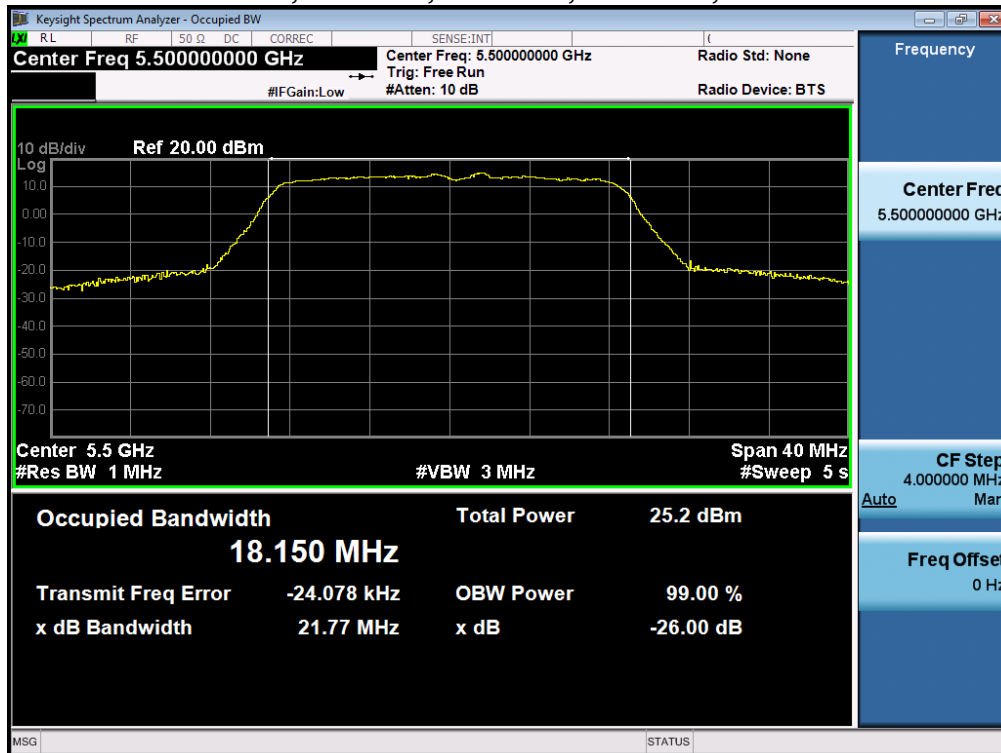
01-Jan-16 - 22-Feb-16

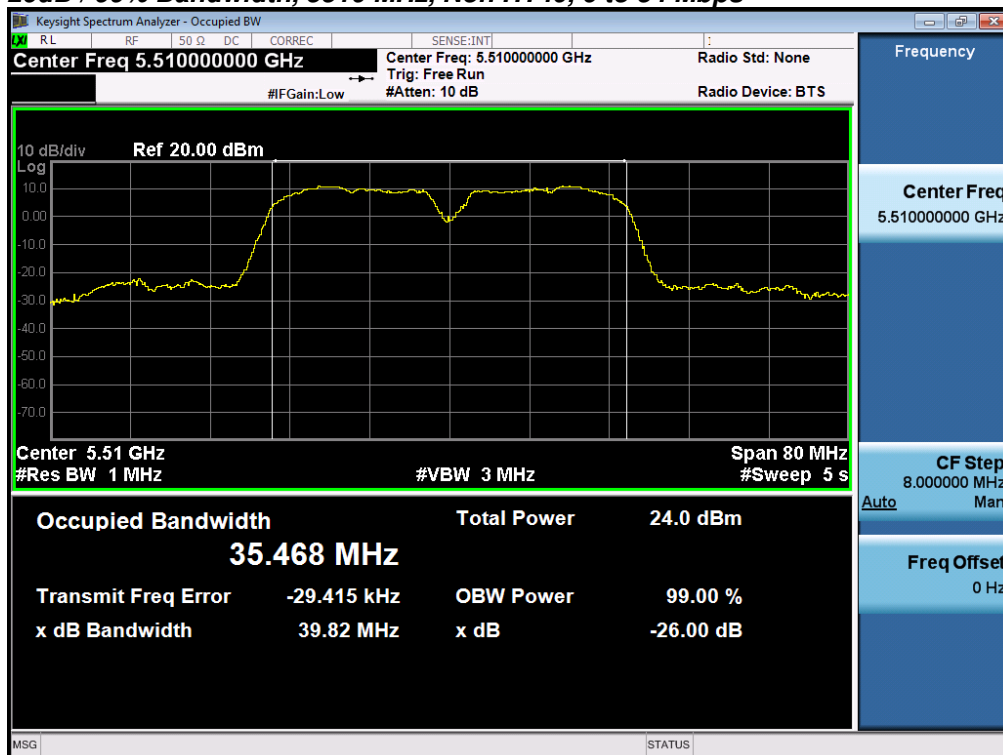
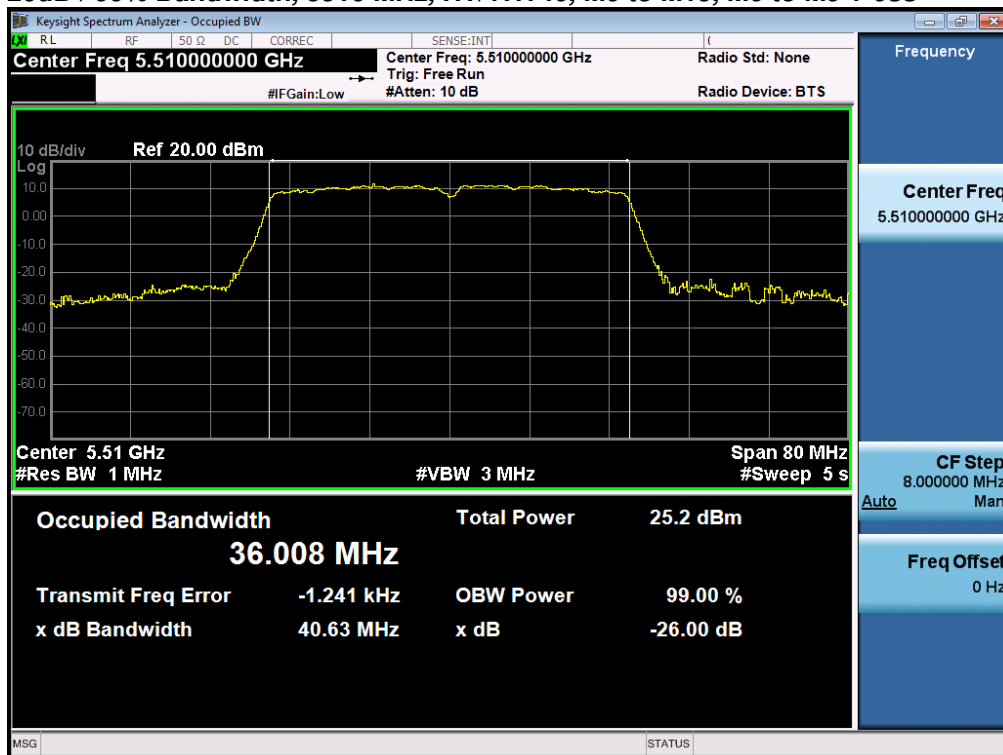
Test Result : PASS

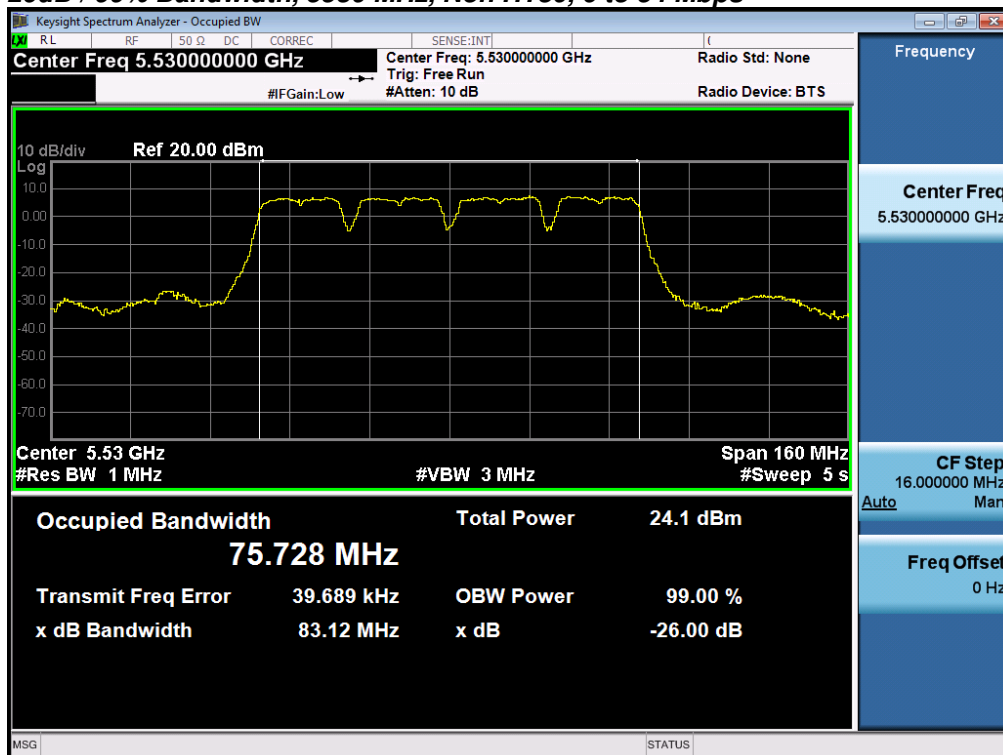
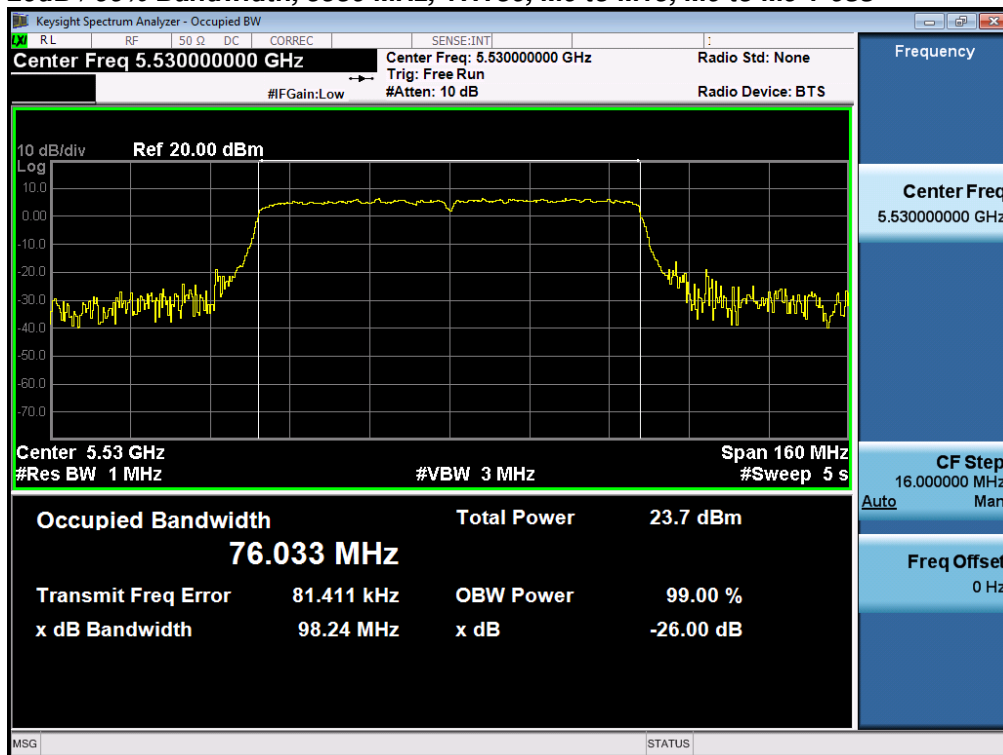
See Appendix C for list of test equipment

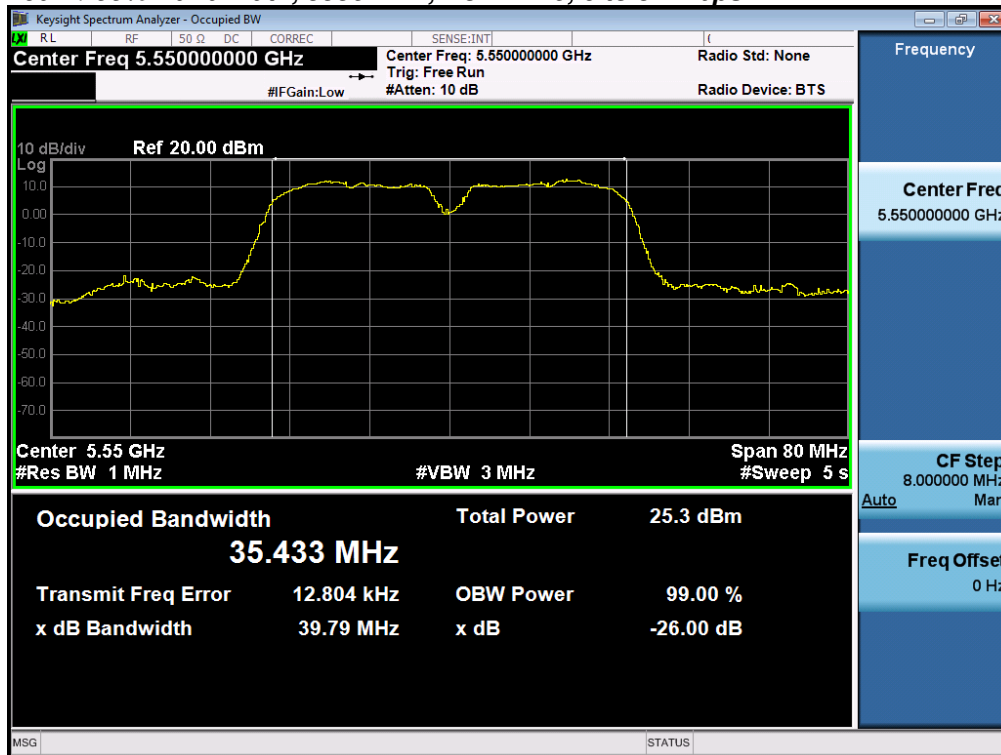
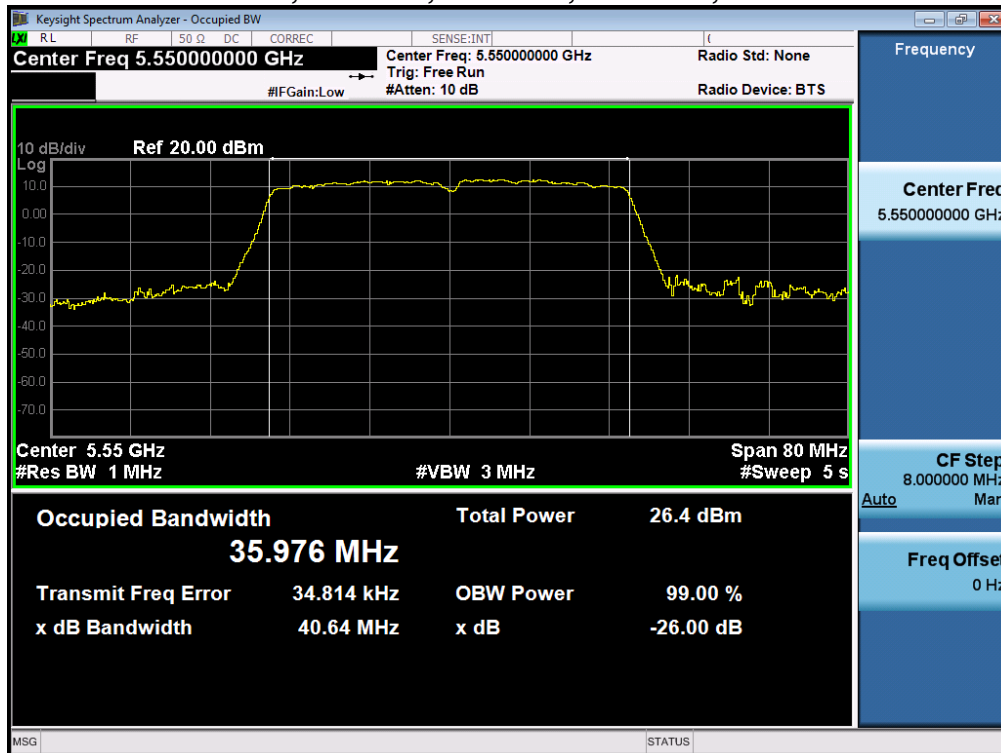


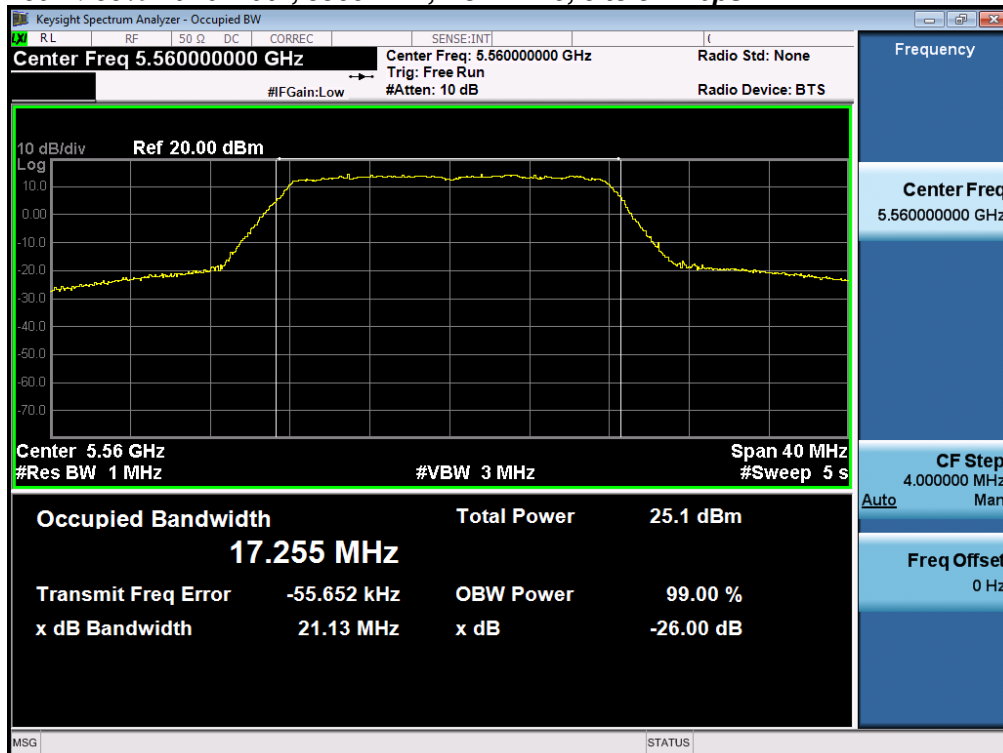
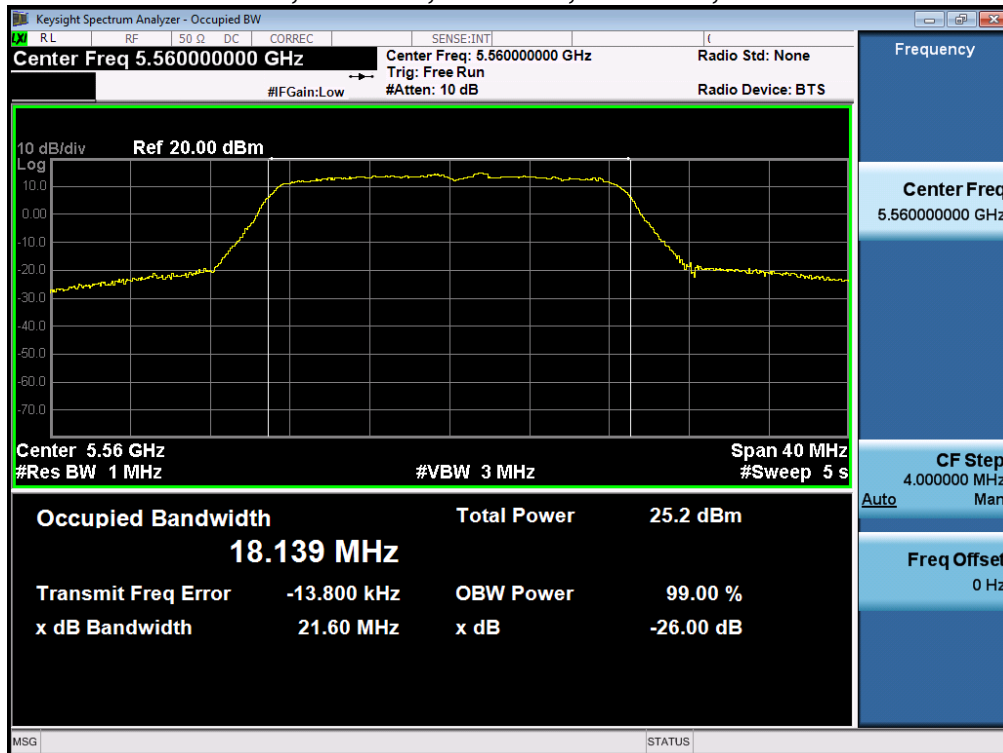
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5500	Non HT20, 6 to 54 Mbps	6	21.0	17.3
	HT/VHT20, M0 to M15, M0 to M9 1-0ss	m0	21.7	18.1
5510	Non HT40, 6 to 54 Mbps	6	39.8	35.5
	HT/VHT40, M0 to M15, M0 to M9 1-0ss	m0	40.6	36.0
5530	Non HT80, 6 to 54 Mbps	6	83.1	75.7
	VHT80, M0 to M15, M0 to M9 1-0ss	m0x1	98.2	76.0
5550	Non HT40, 6 to 54 Mbps	6	39.8	35.4
	HT/VHT40, M0 to M15, M0 to M9 1-0ss	m0	40.6	36.0
5560	Non HT20, 6 to 54 Mbps	6	21.0	17.2
	HT/VHT20, M0 to M15, M0 to M9 1-0ss	m0	21.6	18.1
5660	Non HT20, 6 to 54 Mbps	6	21.1	17.3
	HT/VHT20, M0 to M15, M0 to M9 1-0ss	m0	22.0	18.2
5670	Non HT40, 6 to 54 Mbps	6	40.0	35.8
	HT/VHT40, M0 to M15, M0 to M9 1-0ss	m0	41.2	36.2
5690	Non HT80, 6 to 54 Mbps	6	98.5	75.8
	VHT80, M0 to M15, M0 to M9 1-0ss	m0x1	91.3	76.0
5700	Non HT20, 6 to 54 Mbps	6	21.1	17.3
	HT/VHT20, M0 to M15, M0 to M9 1-0ss	m0	21.8	18.2
5710	Non HT40, 6 to 54 Mbps	6	39.8	35.6
	HT/VHT40, M0 to M15, M0 to M9 1-0ss	m0	40.8	36.1
5720	Non HT20, 6 to 54 Mbps	6	21.1	17.3
	HT/VHT20, M0 to M15, M0 to M9 1-0ss	m0	21.9	18.2

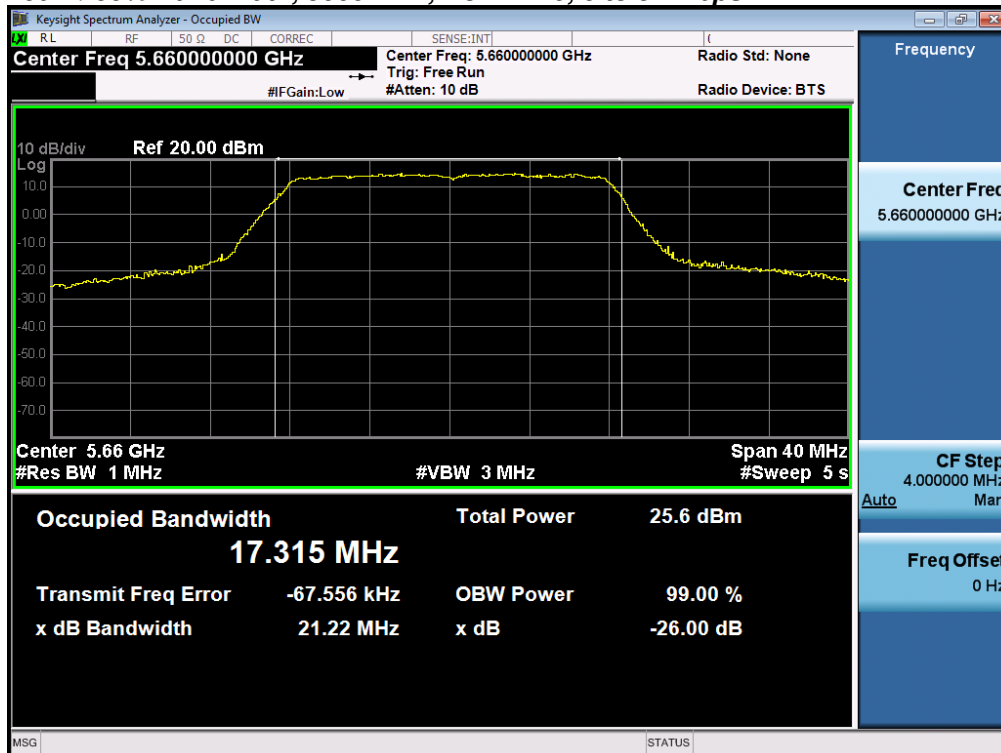
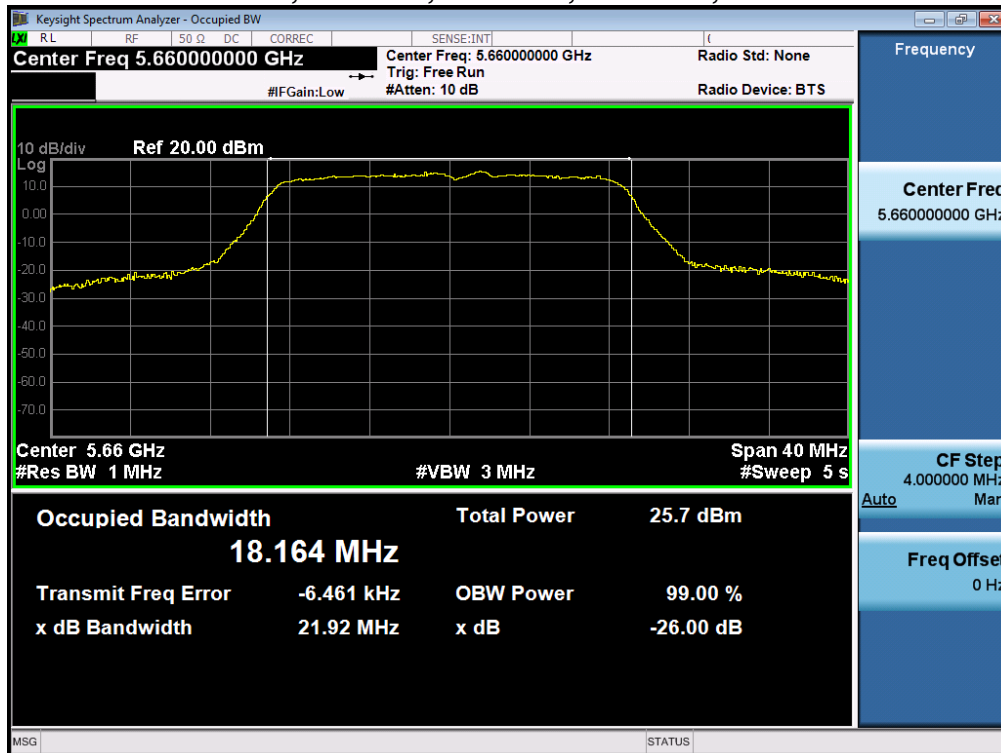
**26dB / 99% Bandwidth, 5500 MHz, Non HT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5500 MHz, HT/VHT20, M0 to M15, M0 to M9 1-0ss**

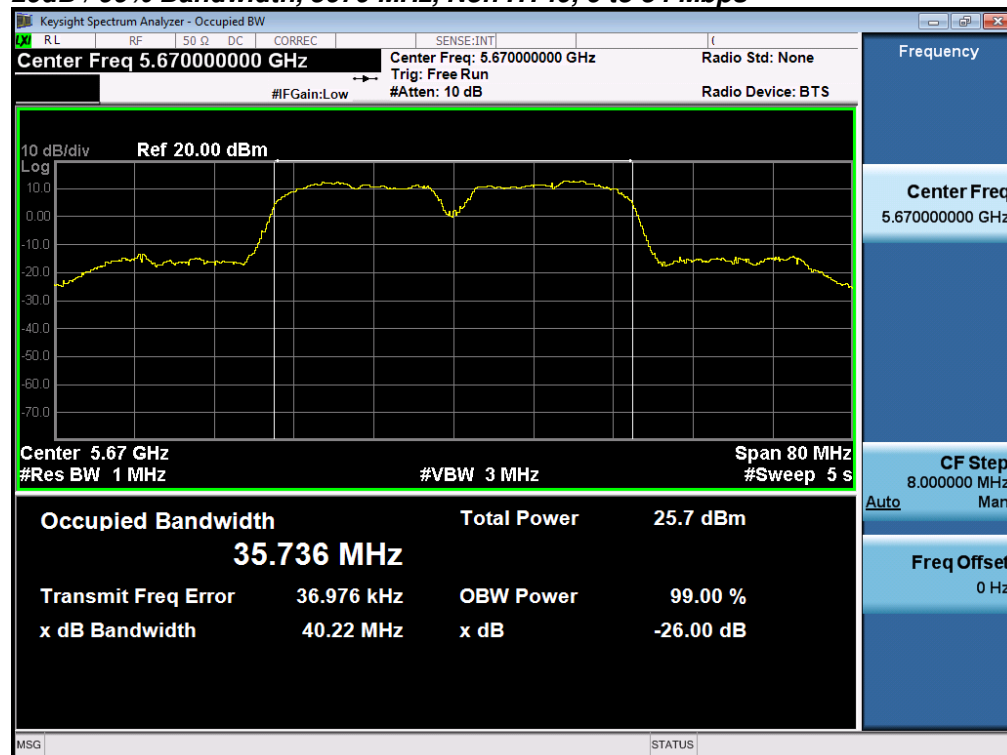
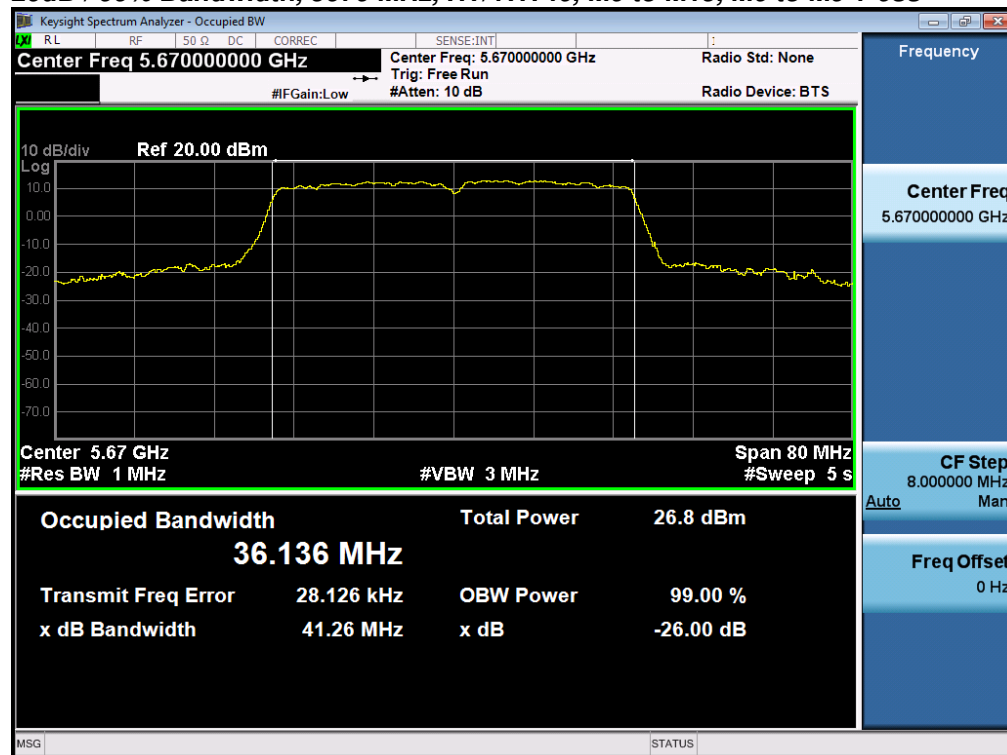
**26dB / 99% Bandwidth, 5510 MHz, Non HT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5510 MHz, HT/VHT40, M0 to M15, M0 to M9 1-0ss**

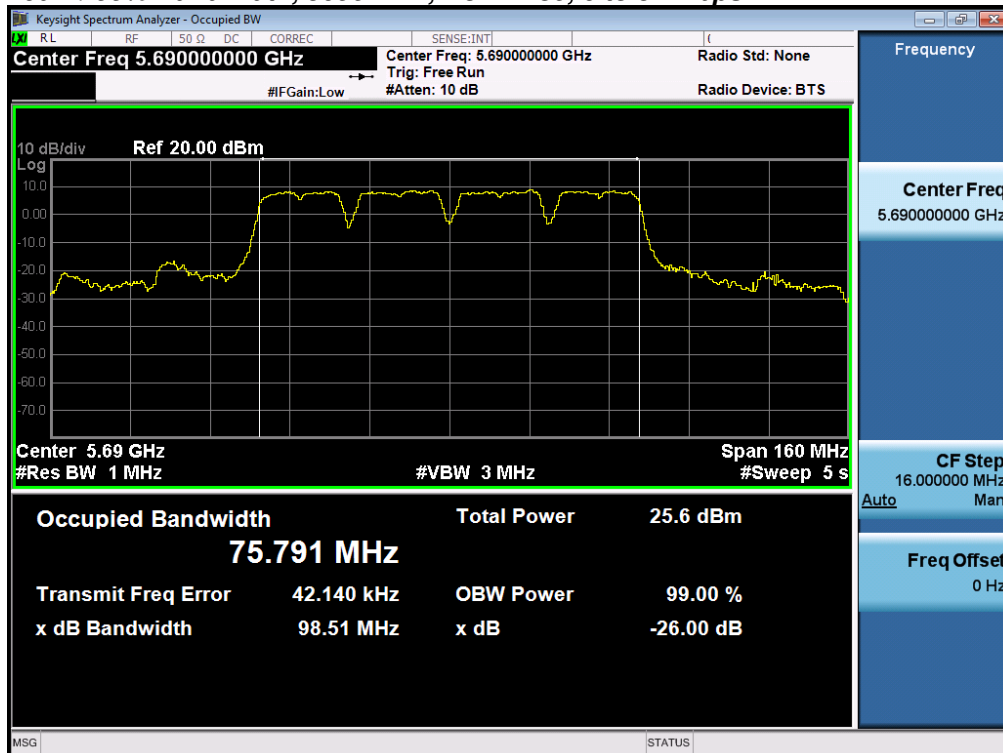
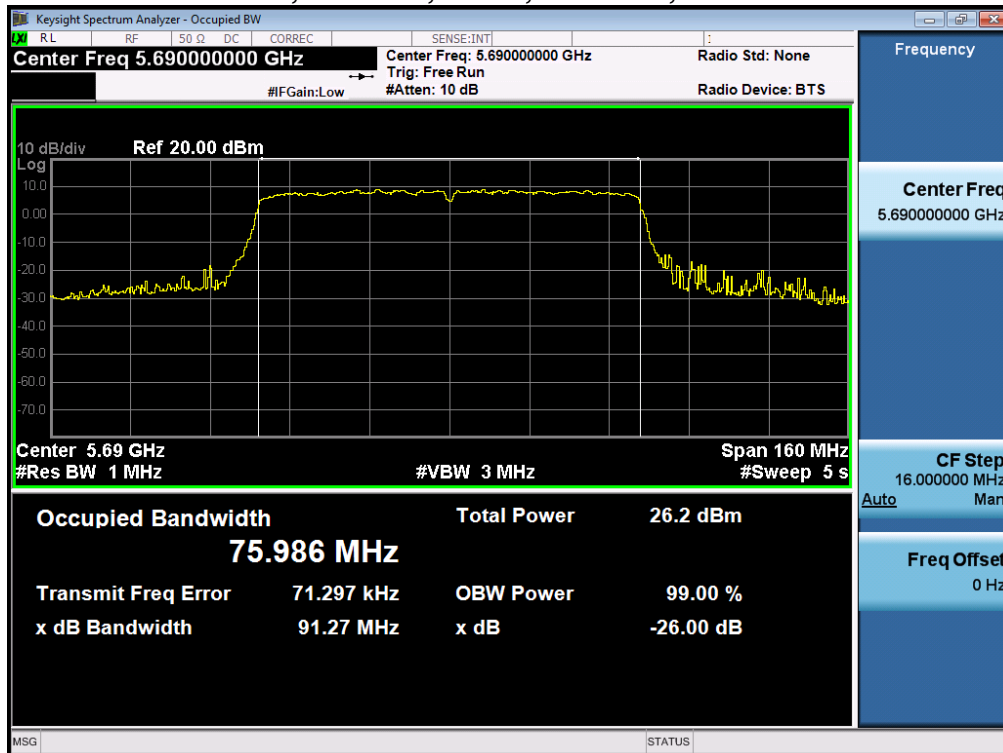
**26dB / 99% Bandwidth, 5530 MHz, Non HT80, 6 to 54 Mbps****26dB / 99% Bandwidth, 5530 MHz, VHT80, M0 to M15, M0 to M9 1-0ss**

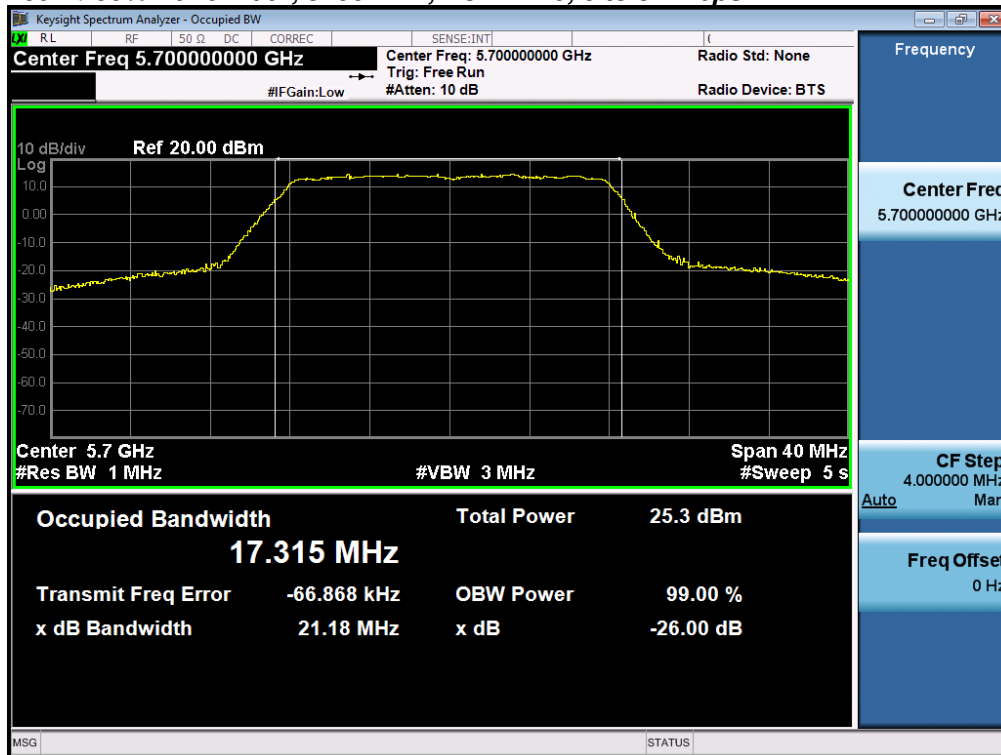
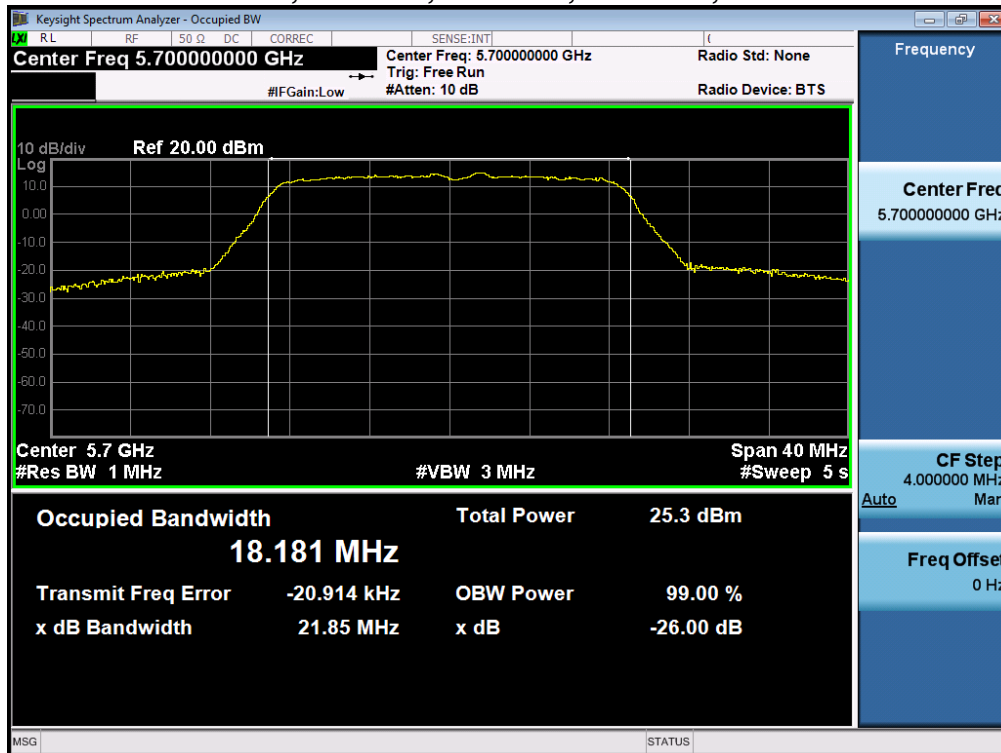
**26dB / 99% Bandwidth, 5550 MHz, Non HT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5550 MHz, HT/VHT40, M0 to M15, M0 to M9 1-0ss**

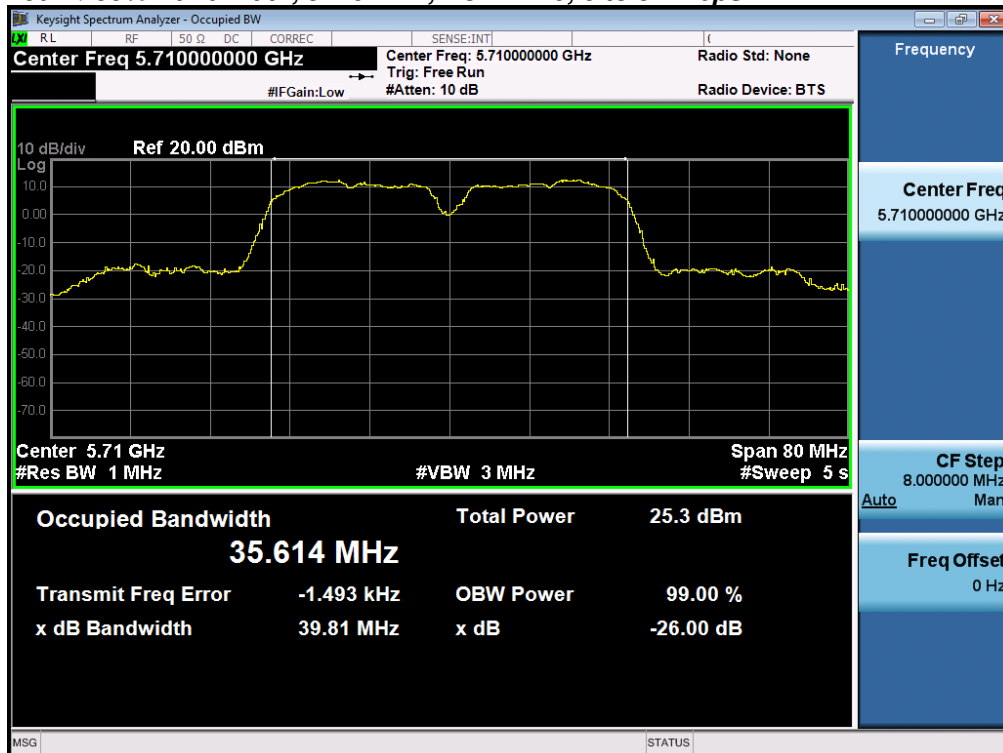
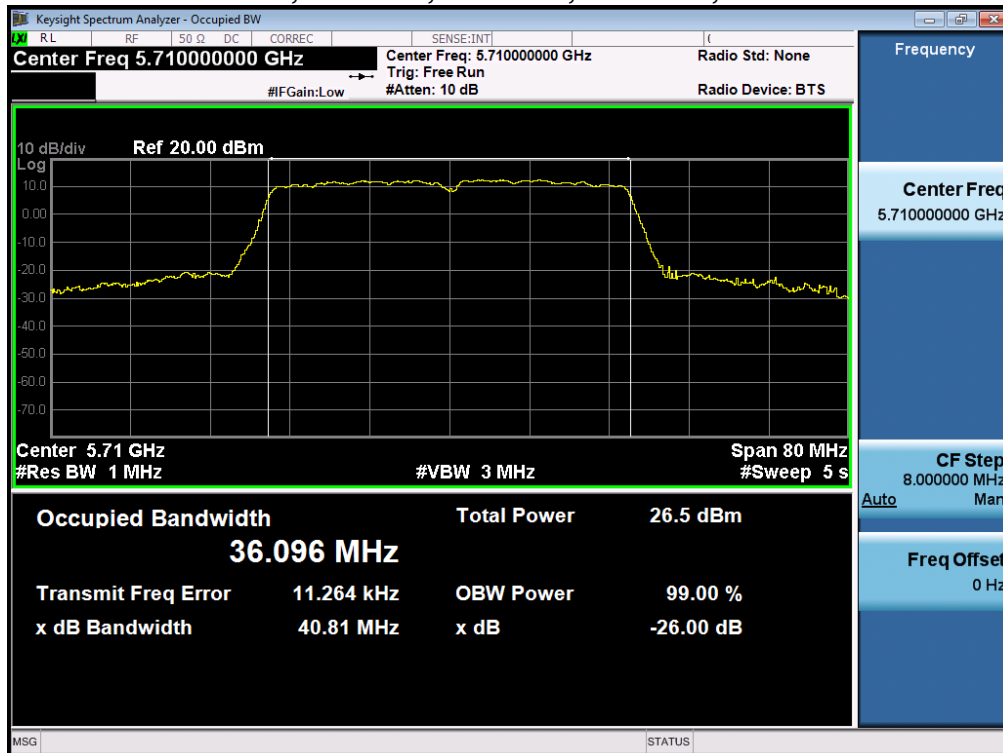
**26dB / 99% Bandwidth, 5560 MHz, Non HT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5560 MHz, HT/VHT20, M0 to M15, M0 to M9 1-0ss**

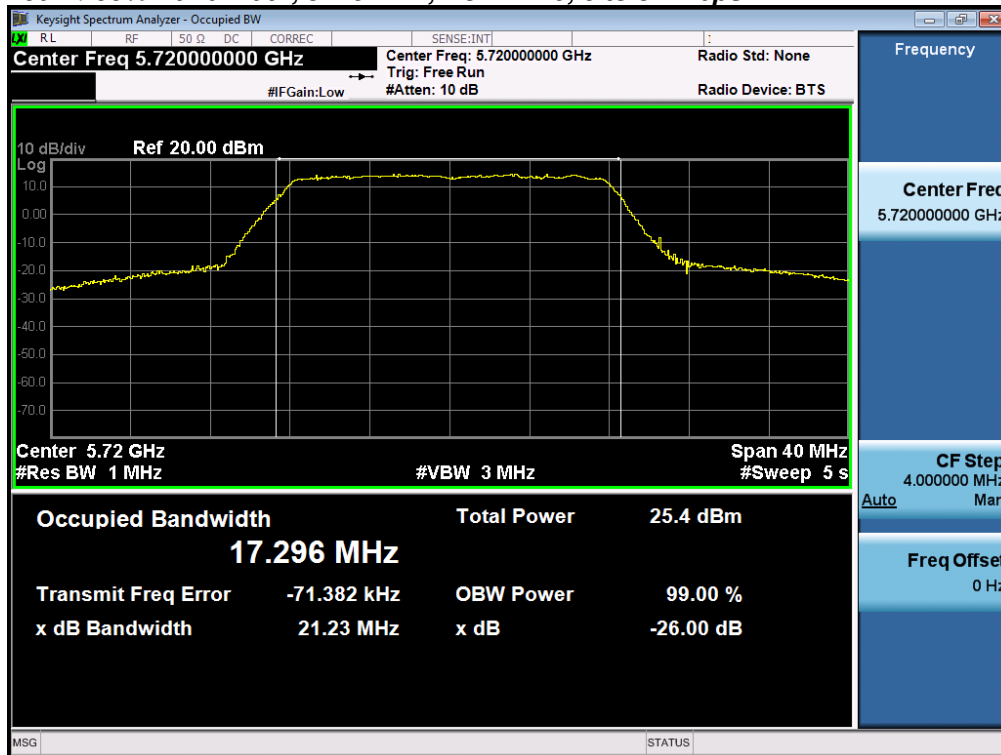
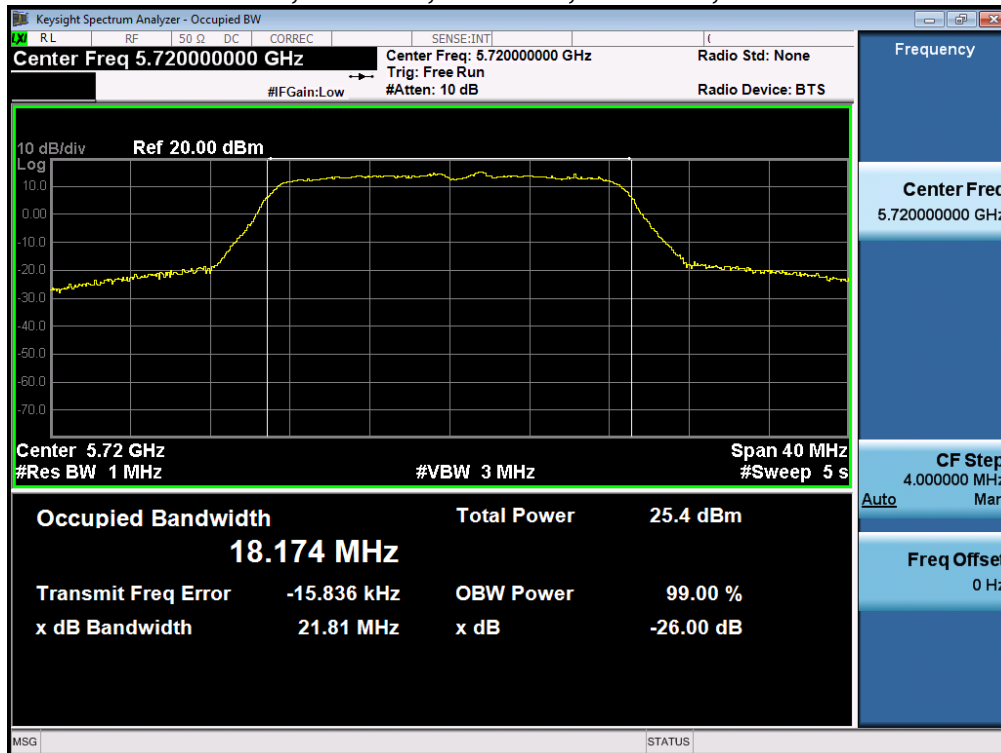
**26dB / 99% Bandwidth, 5660 MHz, Non HT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5660 MHz, HT/VHT20, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5670 MHz, Non HT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5670 MHz, HT/VHT40, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5690 MHz, Non HT80, 6 to 54 Mbps****26dB / 99% Bandwidth, 5690 MHz, VHT80, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5700 MHz, Non HT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5700 MHz, HT/VHT20, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5710 MHz, Non HT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5710 MHz, HT/VHT40, M0 to M15, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5720 MHz, Non HT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5720 MHz, HT/VHT20, M0 to M15, M0 to M9 1-0ss**

A.2 Maximum Conducted Output Power/ Power Spectral Density

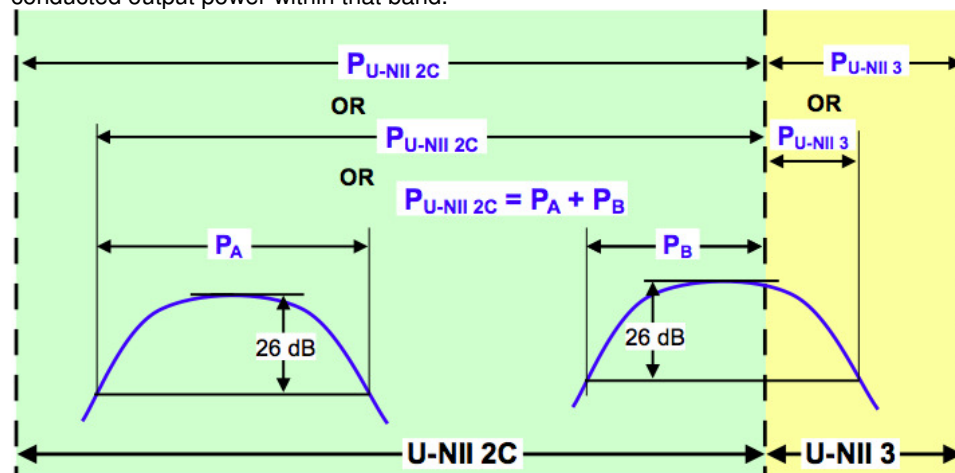
15.407 (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407 a (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

KDB 644545 D03 (section F.2.b.ii)

When measuring the portion of the maximum conducted output power within a single U-NII band, the power shall be integrated across only the portion of the EBW that falls within that band. That is, if an EBW extends across the boundary between two adjacent bands, the boundary frequency between the bands serves as one edge of the frequency range to be integrated. Integration across an entire U-NII band without regard to 26 dB points is also acceptable for determining conducted output power within that band.



Conducted output power within a U-NII band: Integrate over the band, or integrate over a span including the 26 dB EBWs of transmission segments within the band, or integrate over 26 dB EBW of each transmission segment in the band and sum.

Figure 5. Conducted Output Power Measurement Examples

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (ANSI C63.10: 2013, section 14.3.2.2)



Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r01

ANSI C63.10: 2013

KDB 644545 D03 v01

Output Power
Test Procedure
<ol style="list-style-type: none"> 1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r01

ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

Output Power
Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW $\geq 3 \times$ RBW Sweep = Auto couple Detector = sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

Power Spectral Density (UNII 2C band)	Power Spectral Density (UNII 3 band)
Test parameters	Test parameters
ANSI C63.10: 2013 , sec12.3.2.2 Method SA-1	KDB 789033 D02 v01r01 section F.5
Span = >1.5 times the OBW RBW = 1MHz VBW $\geq 3 \times$ RBW Sweep = Auto couple Detector = Sample Trace = Trace Average 100 Marker = Peak Search	Span = >1.5 times the OBW RBW = 500 kHz. VBW $\geq 3 \times$ RBW Sweep = 10s Detector = Peak Trace = Single Sweep Marker = Peak Search

The "Measure and add $10 \log(N)$ dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit. (ANSI C63.10 2013 section 14.3.2.3)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>



Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	16.6		16.6	23.4	6.8
	Non HT20, 6 to 54 Mbps	2	4	16.6	16.5	19.6	23.4	3.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	16.6	16.5	19.6	22.4	2.8
	HT/VHT20, M0 to M7	1	4	16.4		16.4	23.6	7.2
	HT/VHT20, M0 to M7	2	4	16.4	16.3	19.4	23.6	4.2
	HT/VHT20, M8 to M15	2	4	16.4	16.3	19.4	23.6	4.2
	HT/VHT20 Beam Forming, M0 to M7	2	7	16.4	16.3	19.4	22.6	3.2
	HT/VHT20 Beam Forming, M8 to M15	2	4	16.4	16.3	19.4	23.6	4.2
	HT/VHT20 STBC, M0 to M7	2	4	16.4	16.3	19.4	23.6	4.2
5510	Non HT40, 6 to 54 Mbps	1	4	15.7		15.7	24.0	8.3
	Non HT40, 6 to 54 Mbps	2	4	15.7	15.6	18.7	24.0	5.3
	HT/VHT40, M0 to M7	1	4	16.3		16.3	24.0	7.7
	HT/VHT40, M0 to M7	2	4	16.3	16.1	19.2	24.0	4.8
	HT/VHT40, M8 to M15	2	4	16.3	16.1	19.2	24.0	4.8
	HT/VHT40 Beam Forming, M0 to M7	2	7	15.3	15.1	18.2	23.0	4.8
	HT/VHT40 Beam Forming, M8 to M15	2	4	16.3	16.1	19.2	24.0	4.8
	HT/VHT40 STBC, M0 to M7	2	4	16.3	16.1	19.2	24.0	4.8
5530	Non HT80, 6 to 54 Mbps	1	4	15.9		15.9	24.0	8.1
	Non HT80, 6 to 54 Mbps	2	4	14.9	15.0	18.0	24.0	6.0
	VHT80, M0 to M7	1	4	14.4		14.4	24.0	9.6
	VHT80, M0 to M7	2	4	11.3	11.3	14.3	24.0	9.7
	VHT80, M8 to M15	2	4	11.3	11.3	14.3	24.0	9.7
	VHT80 Beam Forming, M0 to M7	2	4	11.3	11.3	14.3	24.0	9.7
	VHT80 Beam Forming, M8 to M15	2	4	11.3	11.3	14.3	24.0	9.7
	VHT80 STBC, M8 to M15	2	4	11.3	11.3	14.3	24.0	9.7
5550	Non HT40, 6 to 54 Mbps	1	4	17.2		17.2	24.0	6.8
	Non HT40, 6 to 54 Mbps	2	4	17.2	17.2	20.2	24.0	3.8
	HT/VHT40, M0 to M7	1	4	17.7		17.7	24.0	6.3
	HT/VHT40, M0 to M7	2	4	17.7	17.7	20.7	24.0	3.3
	HT/VHT40, M8 to M15	2	4	17.7	17.7	20.7	24.0	3.3
	HT/VHT40 Beam Forming, M0 to M7	2	7	17.7	17.7	20.7	23.0	2.3



	HT/VHT40 Beam Forming, M8 to M15	2	4	17.7	17.7	20.7	24.0	3.3
	HT/VHT40 STBC, M0 to M7	2	4	17.7	17.7	20.7	24.0	3.3
5560	Non HT20, 6 to 54 Mbps	1	4	17.0		17.0	23.4	6.4
	Non HT20, 6 to 54 Mbps	2	4	17.0	17.0	20.0	23.4	3.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	17.0	17.0	20.0	22.4	2.4
	HT/VHT20, M0 to M7	1	4	16.6		16.6	23.6	7.0
	HT/VHT20, M0 to M7	2	4	16.6	16.7	19.7	23.6	3.9
	HT/VHT20, M8 to M15	2	4	16.6	16.7	19.7	23.6	3.9
	HT/VHT20 Beam Forming, M0 to M7	2	7	16.6	16.7	19.7	22.6	2.9
	HT/VHT20 Beam Forming, M8 to M15	2	4	16.6	16.7	19.7	23.6	3.9
	HT/VHT20 STBC, M0 to M7	2	4	16.6	16.7	19.7	23.6	3.9
5660	Non HT20, 6 to 54 Mbps	1	4	17.3		17.3	23.4	6.1
	Non HT20, 6 to 54 Mbps	2	4	17.3	16.9	20.1	23.4	3.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	17.3	16.9	20.1	22.4	2.3
	HT/VHT20, M0 to M7	1	4	17.0		17.0	23.6	6.6
	HT/VHT20, M0 to M7	2	4	17.0	16.6	19.8	23.6	3.8
	HT/VHT20, M8 to M15	2	4	17.0	16.6	19.8	23.6	3.8
	HT/VHT20 Beam Forming, M0 to M7	2	7	17.0	16.6	19.8	22.6	2.8
	HT/VHT20 Beam Forming, M8 to M15	2	4	17.0	16.6	19.8	23.6	3.8
	HT/VHT20 STBC, M0 to M7	2	4	17.0	16.6	19.8	23.6	3.8
5670	Non HT40, 6 to 54 Mbps	1	4	17.5		17.5	24.0	6.5
	Non HT40, 6 to 54 Mbps	2	4	17.5	17.1	20.3	24.0	3.7
	HT/VHT40, M0 to M7	1	4	18.0		18.0	24.0	6.0
	HT/VHT40, M0 to M7	2	4	18.0	17.5	20.8	24.0	3.2
	HT/VHT40, M8 to M15	2	4	18.0	17.5	20.8	24.0	3.2
	HT/VHT40 Beam Forming, M0 to M7	2	7	18.0	17.5	20.8	23.0	2.2
	HT/VHT40 Beam Forming, M8 to M15	2	4	18.0	17.5	20.8	24.0	3.2
	HT/VHT40 STBC, M0 to M7	2	4	18.0	17.5	20.8	24.0	3.2
5690	Non HT80, 6 to 54 Mbps	1	4	17.5		17.5	24.0	6.5
	Non HT80, 6 to 54 Mbps	2	4	17.5	17.0	20.3	24.0	3.7
	VHT80, M0 to M7	1	4	16.9		16.9	24.0	7.1
	VHT80, M0 to M7	2	4	16.9	16.5	19.7	24.0	4.3
	VHT80, M8 to M15	2	4	16.9	16.5	19.7	24.0	4.3
	VHT80 Beam Forming, M0 to M7	2	4	16.9	16.5	19.7	24.0	4.3
	VHT80 Beam Forming, M8 to M15	2	4	16.9	16.5	19.7	24.0	4.3
	VHT80 STBC, M8 to M15	2	4	16.9	16.5	19.7	24.0	4.3



5700	Non HT20, 6 to 54 Mbps	1	4	16.9		16.9	23.4	6.5
	Non HT20, 6 to 54 Mbps	2	4	16.9	16.5	19.7	23.4	3.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	16.9	16.5	19.7	22.4	2.7
	HT/VHT20, M0 to M7	1	4	16.6		16.6	23.6	7.0
	HT/VHT20, M0 to M7	2	4	16.6	16.1	19.4	23.6	4.2
	HT/VHT20, M8 to M15	2	4	16.6	16.1	19.4	23.6	4.2
	HT/VHT20 Beam Forming, M0 to M7	2	7	16.6	16.1	19.4	22.6	3.2
	HT/VHT20 Beam Forming, M8 to M15	2	4	16.6	16.1	19.4	23.6	4.2
	HT/VHT20 STBC, M0 to M7	2	4	16.6	16.1	19.4	23.6	4.2
5710	Non HT40, 6 to 54 Mbps	1	4	17.1		17.1	24.0	6.9
	Non HT40, 6 to 54 Mbps	2	4	17.1	16.7	19.9	24.0	4.1
	HT/VHT40, M0 to M7	1	4	17.7		17.7	24.0	6.3
	HT/VHT40, M0 to M7	2	4	17.7	17.2	20.5	24.0	3.5
	HT/VHT40, M8 to M15	2	4	17.7	17.2	20.5	24.0	3.5
	HT/VHT40 Beam Forming, M0 to M7	2	7	17.7	17.2	20.5	23.0	2.5
	HT/VHT40 Beam Forming, M8 to M15	2	4	17.7	17.2	20.5	24.0	3.5
	HT/VHT40 STBC, M0 to M7	2	4	17.7	17.2	20.5	24.0	3.5
5720	Non HT20, 6 to 54 Mbps	1	4	16.9		16.9	23.4	6.5
	Non HT20, 6 to 54 Mbps	2	4	16.9	16.4	19.7	23.4	3.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	16.9	16.4	19.7	22.4	2.7
	HT/VHT20, M0 to M7	1	4	16.7		16.7	23.6	6.9
	HT/VHT20, M0 to M7	2	4	16.7	16.3	19.5	23.6	4.1
	HT/VHT20, M8 to M15	2	4	16.7	16.3	19.5	23.6	4.1
	HT/VHT20 Beam Forming, M0 to M7	2	7	16.7	16.3	19.5	22.6	3.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	16.7	16.3	19.5	23.6	4.1
	HT/VHT20 STBC, M0 to M7	2	4	16.7	16.3	19.5	23.6	4.1



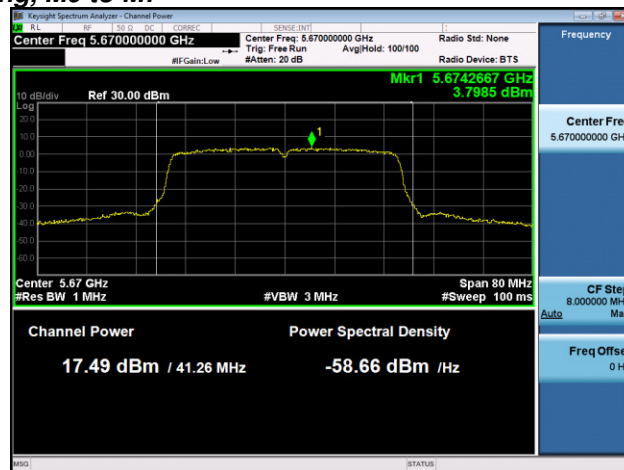
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	6.1		6.1	11.0	4.9
	Non HT20, 6 to 54 Mbps	2	7	6.1	5.8	9.0	10.0	1.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	6.1	5.8	9.0	10.0	1.0
	HT/VHT20, M0 to M7	1	4	5.4		5.4	11.0	5.6
	HT/VHT20, M0 to M7	2	7	5.4	5.1	8.3	10.0	1.7
	HT/VHT20, M8 to M15	2	4	5.4	5.1	8.3	11.0	2.7
	HT/VHT20 Beam Forming, M0 to M7	2	7	5.4	5.1	8.3	10.0	1.7
	HT/VHT20 Beam Forming, M8 to M15	2	4	5.4	5.1	8.3	11.0	2.7
	HT/VHT20 STBC, M0 to M7	2	4	5.4	5.1	8.3	11.0	2.7
5510	Non HT40, 6 to 54 Mbps	1	4	3.3		3.3	11.0	7.7
	Non HT40, 6 to 54 Mbps	2	7	3.3	3.4	6.4	10.0	3.6
	HT/VHT40, M0 to M7	1	4	2.4		2.4	11.0	8.6
	HT/VHT40, M0 to M7	2	7	2.4	2.3	5.4	10.0	4.6
	HT/VHT40, M8 to M15	2	4	2.4	2.3	5.4	11.0	5.6
	HT/VHT40 Beam Forming, M0 to M7	2	7	1.7	1.3	4.5	10.0	5.5
	HT/VHT40 Beam Forming, M8 to M15	2	4	2.4	2.3	5.4	11.0	5.6
	HT/VHT40 STBC, M0 to M7	2	4	2.4	2.3	5.4	11.0	5.6
5530	Non HT80, 6 to 54 Mbps	1	4	-0.7		-0.7	11.0	11.7
	Non HT80, 6 to 54 Mbps	2	7	-1.4	-1.3	1.7	10.0	8.3
	VHT80, M0 to M7	1	4	-2.4		-2.4	11.0	13.4
	VHT80, M0 to M7	2	4	-5.8	-5.8	-2.8	11.0	13.8
	VHT80, M8 to M15	2	4	-5.8	-5.8	-2.8	11.0	13.8
	VHT80 Beam Forming, M0 to M7	2	4	-5.8	-5.8	-2.8	11.0	13.8
	VHT80 Beam Forming, M8 to M15	2	4	-5.8	-5.8	-2.8	11.0	13.8
	VHT80 STBC, M8 to M15	2	4	-5.8	-5.8	-2.8	11.0	13.8
5550	Non HT40, 6 to 54 Mbps	1	4	4.8		4.8	11.0	6.2
	Non HT40, 6 to 54 Mbps	2	7	4.8	4.6	7.7	10.0	2.3
	HT/VHT40, M0 to M7	1	4	4.0		4.0	11.0	7.0
	HT/VHT40, M0 to M7	2	7	4.0	4.0	7.0	10.0	3.0
	HT/VHT40, M8 to M15	2	4	4.0	4.0	7.0	11.0	4.0
	HT/VHT40 Beam Forming, M0 to M7	2	7	4.0	4.0	7.0	10.0	3.0

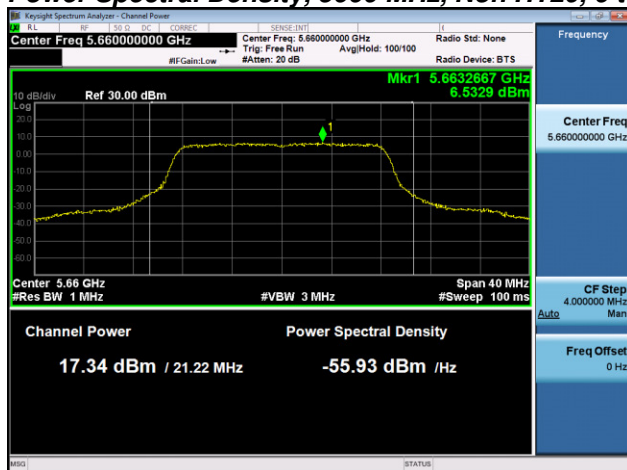
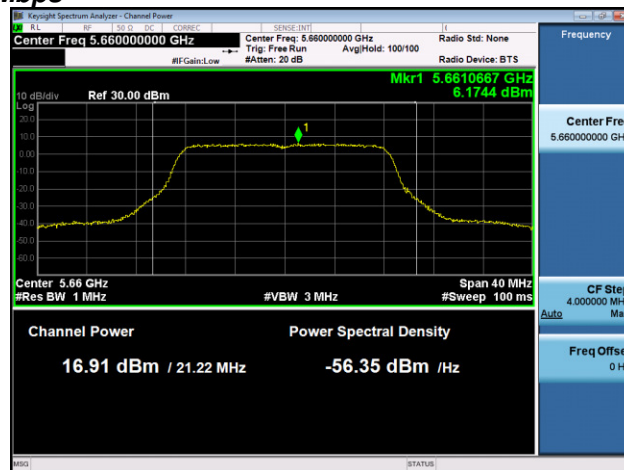


	HT/VHT40 Beam Forming, M8 to M15	2	4	4.0	4.0	7.0	11.0	4.0
	HT/VHT40 STBC, M0 to M7	2	4	4.0	4.0	7.0	11.0	4.0
5560	Non HT20, 6 to 54 Mbps	1	4	6.3		6.3	11.0	4.7
	Non HT20, 6 to 54 Mbps	2	7	6.3	6.3	9.3	10.0	0.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	6.3	6.3	9.3	10.0	0.7
	HT/VHT20, M0 to M7	1	4	5.7		5.7	11.0	5.3
	HT/VHT20, M0 to M7	2	7	5.7	5.5	8.6	10.0	1.4
	HT/VHT20, M8 to M15	2	4	5.7	5.5	8.6	11.0	2.4
	HT/VHT20 Beam Forming, M0 to M7	2	7	5.7	5.5	8.6	10.0	1.4
	HT/VHT20 Beam Forming, M8 to M15	2	4	5.7	5.5	8.6	11.0	2.4
	HT/VHT20 STBC, M0 to M7	2	4	5.7	5.5	8.6	11.0	2.4
5660	Non HT20, 6 to 54 Mbps	1	4	6.5		6.5	11.0	4.5
	Non HT20, 6 to 54 Mbps	2	7	6.5	6.2	9.4	10.0	0.6
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	6.5	6.2	9.4	10.0	0.6
	HT/VHT20, M0 to M7	1	4	6.1		6.1	11.0	4.9
	HT/VHT20, M0 to M7	2	7	6.1	5.6	8.9	10.0	1.1
	HT/VHT20, M8 to M15	2	4	6.1	5.6	8.9	11.0	2.1
	HT/VHT20 Beam Forming, M0 to M7	2	7	6.1	5.6	8.9	10.0	1.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	6.1	5.6	8.9	11.0	2.1
	HT/VHT20 STBC, M0 to M7	2	4	6.1	5.6	8.9	11.0	2.1
5670	Non HT40, 6 to 54 Mbps	1	4	4.8		4.8	11.0	6.2
	Non HT40, 6 to 54 Mbps	2	7	4.8	4.4	7.6	10.0	2.4
	HT/VHT40, M0 to M7	1	4	4.4		4.4	11.0	6.6
	HT/VHT40, M0 to M7	2	7	4.4	3.8	7.1	10.0	2.9
	HT/VHT40, M8 to M15	2	4	4.4	3.8	7.1	11.0	3.9
	HT/VHT40 Beam Forming, M0 to M7	2	7	4.4	3.8	7.1	10.0	2.9
	HT/VHT40 Beam Forming, M8 to M15	2	4	4.4	3.8	7.1	11.0	3.9
	HT/VHT40 STBC, M0 to M7	2	4	4.4	3.8	7.1	11.0	3.9
5690	Non HT80, 6 to 54 Mbps	1	4	1.2		1.2	11.0	9.8
	Non HT80, 6 to 54 Mbps	2	7	1.2	0.5	3.9	10.0	6.1
	VHT80, M0 to M7	1	4	0.1		0.1	11.0	10.9
	VHT80, M0 to M7	2	4	0.1	-0.5	2.8	11.0	8.2
	VHT80, M8 to M15	2	4	0.1	-0.5	2.8	11.0	8.2
	VHT80 Beam Forming, M0 to M7	2	4	0.1	-0.5	2.8	11.0	8.2
	VHT80 Beam Forming, M8 to M15	2	4	0.1	-0.5	2.8	11.0	8.2
	VHT80 STBC, M8 to M15	2	4	0.1	-0.5	2.8	11.0	8.2



5700	Non HT20, 6 to 54 Mbps	1	4	6.1		6.1	11.0	4.9
	Non HT20, 6 to 54 Mbps	2	7	6.1	5.6	8.9	10.0	1.1
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	6.1	5.6	8.9	10.0	1.1
	HT/VHT20, M0 to M7	1	4	5.5		5.5	11.0	5.5
	HT/VHT20, M0 to M7	2	7	5.5	5.3	8.4	10.0	1.6
	HT/VHT20, M8 to M15	2	4	5.5	5.3	8.4	11.0	2.6
	HT/VHT20 Beam Forming, M0 to M7	2	7	5.5	5.3	8.4	10.0	1.6
	HT/VHT20 Beam Forming, M8 to M15	2	4	5.5	5.3	8.4	11.0	2.6
	HT/VHT20 STBC, M0 to M7	2	4	5.5	5.3	8.4	11.0	2.6
5710	Non HT40, 6 to 54 Mbps	1	4	4.4		4.4	11.0	6.6
	Non HT40, 6 to 54 Mbps	2	7	4.4	4.0	7.2	10.0	2.8
	HT/VHT40, M0 to M7	1	4	3.8		3.8	11.0	7.2
	HT/VHT40, M0 to M7	2	7	3.8	3.5	6.7	10.0	3.3
	HT/VHT40, M8 to M15	2	4	3.8	3.5	6.7	11.0	4.3
	HT/VHT40 Beam Forming, M0 to M7	2	7	3.8	3.5	6.7	10.0	3.3
	HT/VHT40 Beam Forming, M8 to M15	2	4	3.8	3.5	6.7	11.0	4.3
	HT/VHT40 STBC, M0 to M7	2	4	3.8	3.5	6.7	11.0	4.3
5720	Non HT20, 6 to 54 Mbps	1	4	6.3		6.3	11.0	4.7
	Non HT20, 6 to 54 Mbps	2	7	6.3	5.7	9.0	10.0	1.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	6.3	5.7	9.0	10.0	1.0
	HT/VHT20, M0 to M7	1	4	5.7		5.7	11.0	5.3
	HT/VHT20, M0 to M7	2	7	5.7	5.4	8.6	10.0	1.4
	HT/VHT20, M8 to M15	2	4	5.7	5.4	8.6	11.0	2.4
	HT/VHT20 Beam Forming, M0 to M7	2	7	5.7	5.4	8.6	10.0	1.4
	HT/VHT20 Beam Forming, M8 to M15	2	4	5.7	5.4	8.6	11.0	2.4
	HT/VHT20 STBC, M0 to M7	2	4	5.7	5.4	8.6	11.0	2.4

**Peak Output Power, 5670 MHz, HT/VHT40 Beam Forming, M0 to M7****Antenna A****Antenna B**

**Power Spectral Density, 5660 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**



A.3 Conducted Spurious Emissions

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz..

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r01
ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r01
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

Conducted Spurious Emissions

Test parameters

Span = 30MHz to 18GHz / 18GHz to 40GHz
 RBW = 1 MHz
 VBW ≥ 3 x RBW for Peak, 1kHz for Average
 Sweep = Auto couple
 Detector = Peak
 Trace = Max Hold.



System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	-58.4		-54.4	-41.25	13.2
	Non HT20, 6 to 54 Mbps	2	4	-58.4	-56.0	-50.0	-41.25	8.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-58.4	-56.0	-47.0	-41.25	5.8
	HT/VHT20, M0 to M7	1	4	-58.6		-54.6	-41.25	13.4
	HT/VHT20, M0 to M7	2	4	-58.6	-58.7	-51.6	-41.25	10.4
	HT/VHT20, M8 to M15	2	4	-58.6	-58.7	-51.6	-41.25	10.4
	HT/VHT20 Beam Forming, M0 to M7	2	7	-58.6	-58.7	-48.6	-41.25	7.4
	HT/VHT20 Beam Forming, M8 to M15	2	4	-58.6	-58.7	-51.6	-41.25	10.4
	HT/VHT20 STBC, M0 to M7	2	4	-58.6	-58.7	-51.6	-41.25	10.4
5510	Non HT40, 6 to 54 Mbps	1	4	-58.6		-54.6	-41.25	13.4
	Non HT40, 6 to 54 Mbps	2	4	-58.6	-55.8	-50.0	-41.25	8.7
	HT/VHT40, M0 to M7	1	4	-58.6		-54.6	-41.25	13.4
	HT/VHT40, M0 to M7	2	4	-58.6	-56.0	-50.1	-41.25	8.8
	HT/VHT40, M8 to M15	2	4	-58.6	-56.0	-50.1	-41.25	8.8
	HT/VHT40 Beam Forming, M0 to M7	2	7	-58.5	-55.7	-46.9	-41.25	5.6
	HT/VHT40 Beam Forming, M8 to M15	2	4	-58.6	-56.0	-50.1	-41.25	8.8
	HT/VHT40 STBC, M0 to M7	2	4	-58.6	-56.0	-50.1	-41.25	8.8
5530	Non HT80, 6 to 54 Mbps	1	4	-58.6		-54.6	-41.25	13.4
	Non HT80, 6 to 54 Mbps	2	4	-58.6	-58.6	-51.6	-41.25	10.3
	VHT80, M0 to M7	1	4	-58.6		-54.6	-41.25	13.4
	VHT80, M0 to M7	2	4	-58.6	-58.6	-51.6	-41.25	10.3
	VHT80, M8 to M15	2	4	-58.6	-58.6	-51.6	-41.25	10.3
	VHT80 Beam Forming, M0 to M7	2	4	-58.6	-58.6	-51.6	-41.25	10.3
	VHT80 Beam Forming, M8 to M15	2	4	-58.6	-58.6	-51.6	-41.25	10.3
	VHT80 STBC, M8 to M15	2	4	-58.6	-58.6	-51.6	-41.25	10.3
5550	Non HT40, 6 to 54 Mbps	1	4	-58.4		-54.4	-41.25	13.2
	Non HT40, 6 to 54 Mbps	2	4	-58.4	-56.3	-50.2	-41.25	9.0
	HT/VHT40, M0 to M7	1	4	-58.4		-54.4	-41.25	13.2
	HT/VHT40, M0 to M7	2	4	-58.4	-56.3	-50.2	-41.25	9.0
	HT/VHT40, M8 to M15	2	4	-58.4	-56.3	-50.2	-41.25	9.0
	HT/VHT40 Beam Forming, M0 to M7	2	7	-58.4	-56.3	-47.2	-41.25	6.0



	HT/VHT40 Beam Forming, M8 to M15	2	4	-58.4	-56.3	-50.2	-41.25	9.0
	HT/VHT40 STBC, M0 to M7	2	4	-58.4	-56.3	-50.2	-41.25	9.0
5560	Non HT20, 6 to 54 Mbps	1	4	-58.4		-54.4	-41.25	13.2
	Non HT20, 6 to 54 Mbps	2	4	-58.4	-55.4	-49.6	-41.25	8.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-58.4	-55.4	-46.6	-41.25	5.4
	HT/VHT20, M0 to M7	1	4	-58.6		-54.6	-41.25	13.4
	HT/VHT20, M0 to M7	2	4	-58.6	-55.5	-49.8	-41.25	8.5
	HT/VHT20, M8 to M15	2	4	-58.6	-55.5	-49.8	-41.25	8.5
	HT/VHT20 Beam Forming, M0 to M7	2	7	-58.6	-55.5	-46.8	-41.25	5.5
	HT/VHT20 Beam Forming, M8 to M15	2	4	-58.6	-55.5	-49.8	-41.25	8.5
	HT/VHT20 STBC, M0 to M7	2	4	-58.6	-55.5	-49.8	-41.25	8.5
5660	Non HT20, 6 to 54 Mbps	1	4	-59.1		-55.1	-41.25	13.9
	Non HT20, 6 to 54 Mbps	2	4	-59.1	-56.4	-50.5	-41.25	9.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-59.1	-56.4	-47.5	-41.25	6.3
	HT/VHT20, M0 to M7	1	4	-59.0		-55.0	-41.25	13.8
	HT/VHT20, M0 to M7	2	4	-59.0	-56.0	-50.2	-41.25	9.0
	HT/VHT20, M8 to M15	2	4	-59.0	-56.0	-50.2	-41.25	9.0
	HT/VHT20 Beam Forming, M0 to M7	2	7	-59.0	-56.0	-47.2	-41.25	6.0
	HT/VHT20 Beam Forming, M8 to M15	2	4	-59.0	-56.0	-50.2	-41.25	9.0
	HT/VHT20 STBC, M0 to M7	2	4	-59.0	-56.0	-50.2	-41.25	9.0
5670	Non HT40, 6 to 54 Mbps	1	4	-59.1		-55.1	-41.25	13.9
	Non HT40, 6 to 54 Mbps	2	4	-59.1	-56.4	-50.5	-41.25	9.3
	HT/VHT40, M0 to M7	1	4	-59.3		-55.3	-41.25	14.1
	HT/VHT40, M0 to M7	2	4	-59.3	-56.3	-50.5	-41.25	9.3
	HT/VHT40, M8 to M15	2	4	-59.3	-56.3	-50.5	-41.25	9.3
	HT/VHT40 Beam Forming, M0 to M7	2	7	-59.3	-56.3	-47.5	-41.25	6.3
	HT/VHT40 Beam Forming, M8 to M15	2	4	-59.3	-56.3	-50.5	-41.25	9.3
	HT/VHT40 STBC, M0 to M7	2	4	-59.3	-56.3	-50.5	-41.25	9.3
5690	Non HT80, 6 to 54 Mbps	1	4	-59.1		-55.1	-41.25	13.9
	Non HT80, 6 to 54 Mbps	2	4	-59.1	-55.9	-50.2	-41.25	9.0
	VHT80, M0 to M7	1	4	-59.2		-55.2	-41.25	14.0
	VHT80, M0 to M7	2	4	-59.2	-55.6	-50.0	-41.25	8.8
	VHT80, M8 to M15	2	4	-59.2	-55.6	-50.0	-41.25	8.8
	VHT80 Beam Forming, M0 to M7	2	4	-59.2	-55.6	-50.0	-41.25	8.8
	VHT80 Beam Forming, M8 to M15	2	4	-59.2	-55.6	-50.0	-41.25	8.8
	VHT80 STBC, M8 to M15	2	4	-59.2	-55.6	-50.0	-41.25	8.8



5700	Non HT20, 6 to 54 Mbps	1	4	-58.6		-54.6	-41.25	13.4
	Non HT20, 6 to 54 Mbps	2	4	-58.6	-56.1	-50.2	-41.25	8.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-58.6	-56.1	-47.2	-41.25	5.9
	HT/VHT20, M0 to M7	1	4	-58.5		-54.5	-41.25	13.3
	HT/VHT20, M0 to M7	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT20, M8 to M15	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT20 Beam Forming, M0 to M7	2	7	-58.5	-56.3	-47.3	-41.25	6.0
	HT/VHT20 Beam Forming, M8 to M15	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT20 STBC, M0 to M7	2	4	-58.5	-56.3	-50.3	-41.25	9.0
5710	Non HT40, 6 to 54 Mbps	1	4	-58.4		-54.4	-41.25	13.2
	Non HT40, 6 to 54 Mbps	2	4	-58.4	-56.1	-50.1	-41.25	8.8
	HT/VHT40, M0 to M7	1	4	-58.5		-54.5	-41.25	13.3
	HT/VHT40, M0 to M7	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT40, M8 to M15	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT40 Beam Forming, M0 to M7	2	7	-58.5	-56.3	-47.3	-41.25	6.0
	HT/VHT40 Beam Forming, M8 to M15	2	4	-58.5	-56.3	-50.3	-41.25	9.0
	HT/VHT40 STBC, M0 to M7	2	4	-58.5	-56.3	-50.3	-41.25	9.0
5720	Non HT20, 6 to 54 Mbps	1	4	-58.6		-54.6	-41.25	13.4
	Non HT20, 6 to 54 Mbps	2	4	-58.6	-56.2	-50.2	-41.25	9.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-58.6	-56.2	-47.2	-41.25	6.0
	HT/VHT20, M0 to M7	1	4	-58.5		-54.5	-41.25	13.3
	HT/VHT20, M0 to M7	2	4	-58.5	-56.2	-50.2	-41.25	8.9
	HT/VHT20, M8 to M15	2	4	-58.5	-56.2	-50.2	-41.25	8.9
	HT/VHT20 Beam Forming, M0 to M7	2	7	-58.5	-56.2	-47.2	-41.25	5.9
	HT/VHT20 Beam Forming, M8 to M15	2	4	-58.5	-56.2	-50.2	-41.25	8.9
	HT/VHT20 STBC, M0 to M7	2	4	-58.5	-56.2	-50.2	-41.25	8.9



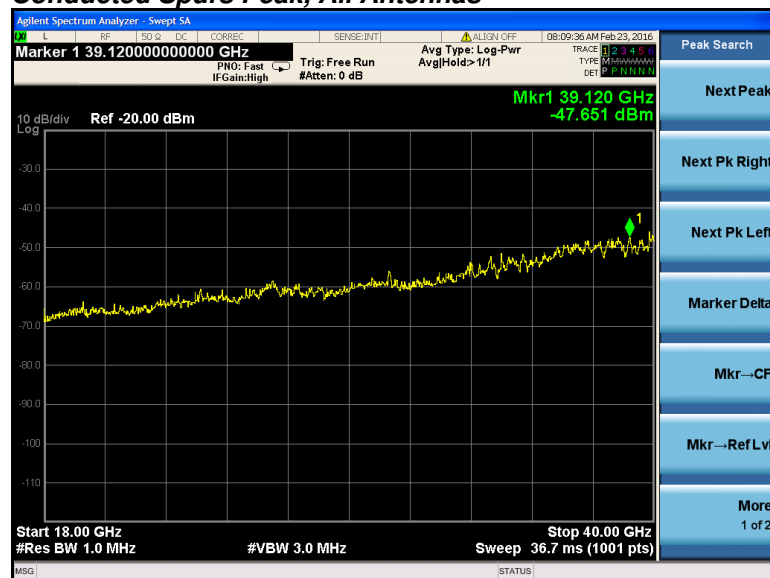
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	-49.4		-45.4	-21.25	24.2
	Non HT20, 6 to 54 Mbps	2	4	-49.4	-49.1	-42.2	-21.25	21.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-49.4	-49.1	-39.2	-21.25	18.0
	HT/VHT20, M0 to M7	1	4	-49.5		-45.5	-21.25	24.3
	HT/VHT20, M0 to M7	2	4	-49.5	-51.0	-43.2	-21.25	21.9
	HT/VHT20, M8 to M15	2	4	-49.5	-51.0	-43.2	-21.25	21.9
	HT/VHT20 Beam Forming, M0 to M7	2	7	-49.5	-51.0	-40.2	-21.25	18.9
	HT/VHT20 Beam Forming, M8 to M15	2	4	-49.5	-51.0	-43.2	-21.25	21.9
	HT/VHT20 STBC, M0 to M7	2	4	-49.5	-51.0	-43.2	-21.25	21.9
5510	Non HT40, 6 to 54 Mbps	1	4	-46.1		-42.1	-21.25	20.9
	Non HT40, 6 to 54 Mbps	2	4	-46.1	-44.5	-38.2	-21.25	17.0
	HT/VHT40, M0 to M7	1	4	-45.2		-41.2	-21.25	20.0
	HT/VHT40, M0 to M7	2	4	-45.2	-48.6	-39.6	-21.25	18.3
	HT/VHT40, M8 to M15	2	4	-45.2	-48.6	-39.6	-21.25	18.3
	HT/VHT40 Beam Forming, M0 to M7	2	7	-44.1	-44.9	-34.5	-21.25	13.2
	HT/VHT40 Beam Forming, M8 to M15	2	4	-45.2	-48.6	-39.6	-21.25	18.3
	HT/VHT40 STBC, M0 to M7	2	4	-45.2	-48.6	-39.6	-21.25	18.3
5530	Non HT80, 6 to 54 Mbps	1	4	-44.7		-40.7	-21.25	19.5
	Non HT80, 6 to 54 Mbps	2	4	-38.1	-45.3	-33.3	-21.25	12.1
	VHT80, M0 to M7	1	4	-45.3		-41.3	-21.25	20.1
	VHT80, M0 to M7	2	4	-45.6	-44.5	-38.0	-21.25	16.8
	VHT80, M8 to M15	2	4	-45.6	-44.5	-38.0	-21.25	16.8
	VHT80 Beam Forming, M0 to M7	2	4	-45.6	-44.5	-38.0	-21.25	16.8
	VHT80 Beam Forming, M8 to M15	2	4	-45.6	-44.5	-38.0	-21.25	16.8
	VHT80 STBC, M8 to M15	2	4	-45.6	-44.5	-38.0	-21.25	16.8
5550	Non HT40, 6 to 54 Mbps	1	4	-45.4		-41.4	-21.25	20.2
	Non HT40, 6 to 54 Mbps	2	4	-45.4	-45.0	-38.2	-21.25	16.9
	HT/VHT40, M0 to M7	1	4	-45.0		-41.0	-21.25	19.8
	HT/VHT40, M0 to M7	2	4	-45.0	-45.0	-38.0	-21.25	16.7
	HT/VHT40, M8 to M15	2	4	-45.0	-45.0	-38.0	-21.25	16.7
	HT/VHT40 Beam Forming, M0 to M7	2	7	-45.0	-45.0	-35.0	-21.25	13.7

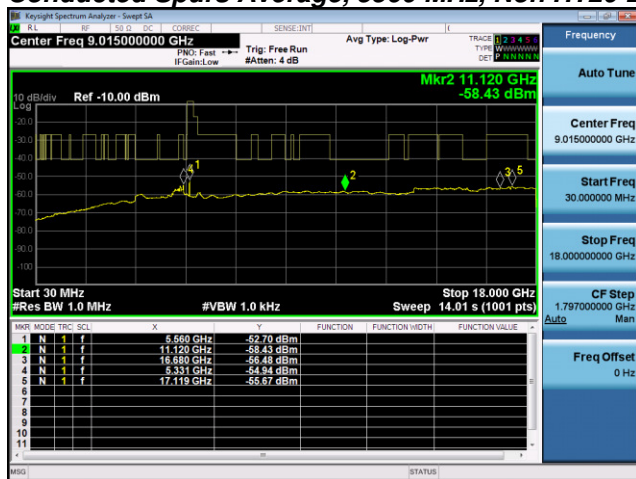


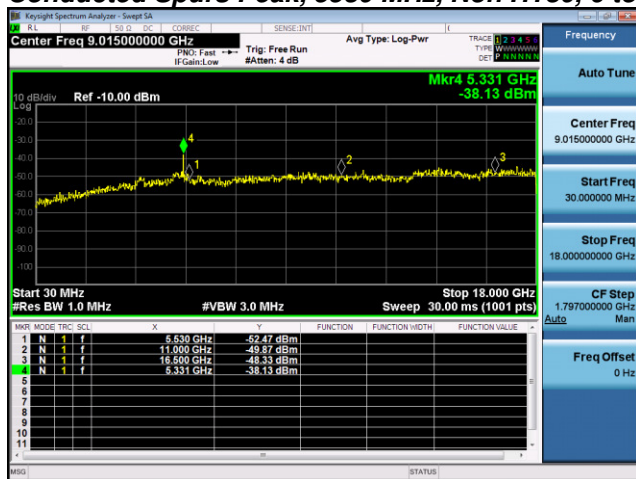
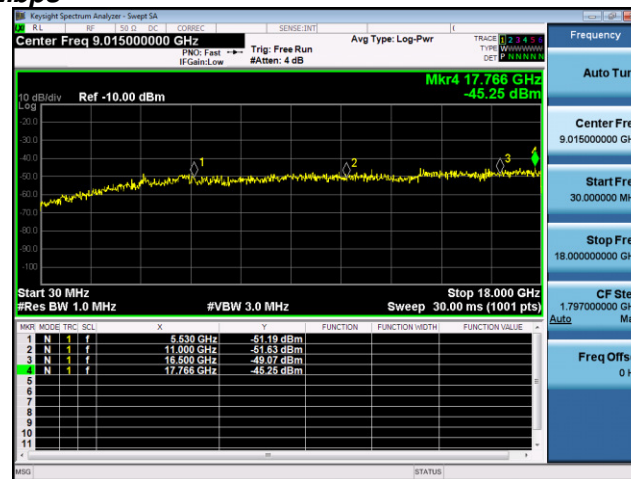
	HT/VHT40 Beam Forming, M8 to M15	2	4	-45.0	-45.0	-38.0	-21.25	16.7
	HT/VHT40 STBC, M0 to M7	2	4	-45.0	-45.0	-38.0	-21.25	16.7
5560	Non HT20, 6 to 54 Mbps	1	4	-44.7		-40.7	-21.25	19.5
	Non HT20, 6 to 54 Mbps	2	4	-44.7	-45.0	-37.8	-21.25	16.6
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-44.7	-45.0	-34.8	-21.25	13.6
	HT/VHT20, M0 to M7	1	4	-44.9		-40.9	-21.25	19.7
	HT/VHT20, M0 to M7	2	4	-44.9	-44.7	-37.8	-21.25	16.5
	HT/VHT20, M8 to M15	2	4	-44.9	-44.7	-37.8	-21.25	16.5
	HT/VHT20 Beam Forming, M0 to M7	2	7	-44.9	-44.7	-34.8	-21.25	13.5
	HT/VHT20 Beam Forming, M8 to M15	2	4	-44.9	-44.7	-37.8	-21.25	16.5
	HT/VHT20 STBC, M0 to M7	2	4	-44.9	-44.7	-37.8	-21.25	16.5
5660	Non HT20, 6 to 54 Mbps	1	4	-45.4		-41.4	-21.25	20.2
	Non HT20, 6 to 54 Mbps	2	4	-45.4	-44.6	-38.0	-21.25	16.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-45.4	-44.6	-35.0	-21.25	13.7
	HT/VHT20, M0 to M7	1	4	-45.3		-41.3	-21.25	20.1
	HT/VHT20, M0 to M7	2	4	-45.3	-45.5	-38.4	-21.25	17.1
	HT/VHT20, M8 to M15	2	4	-45.3	-45.5	-38.4	-21.25	17.1
	HT/VHT20 Beam Forming, M0 to M7	2	7	-45.3	-45.5	-35.4	-21.25	14.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	-45.3	-45.5	-38.4	-21.25	17.1
	HT/VHT20 STBC, M0 to M7	2	4	-45.3	-45.5	-38.4	-21.25	17.1
5670	Non HT40, 6 to 54 Mbps	1	4	-45.2		-41.2	-21.25	20.0
	Non HT40, 6 to 54 Mbps	2	4	-45.2	-45.4	-38.3	-21.25	17.0
	HT/VHT40, M0 to M7	1	4	-44.6		-40.6	-21.25	19.4
	HT/VHT40, M0 to M7	2	4	-44.6	-45.6	-38.1	-21.25	16.8
	HT/VHT40, M8 to M15	2	4	-44.6	-45.6	-38.1	-21.25	16.8
	HT/VHT40 Beam Forming, M0 to M7	2	7	-44.6	-45.6	-35.1	-21.25	13.8
	HT/VHT40 Beam Forming, M8 to M15	2	4	-44.6	-45.6	-38.1	-21.25	16.8
	HT/VHT40 STBC, M0 to M7	2	4	-44.6	-45.6	-38.1	-21.25	16.8
5690	Non HT80, 6 to 54 Mbps	1	4	-48.2		-44.2	-21.25	23.0
	Non HT80, 6 to 54 Mbps	2	4	-48.2	-49.2	-41.7	-21.25	20.4
	VHT80, M0 to M7	1	4	-48.4		-44.4	-21.25	23.2
	VHT80, M0 to M7	2	4	-48.4	-47.9	-41.1	-21.25	19.9
	VHT80, M8 to M15	2	4	-48.4	-47.9	-41.1	-21.25	19.9
	VHT80 Beam Forming, M0 to M7	2	4	-48.4	-47.9	-41.1	-21.25	19.9
	VHT80 Beam Forming, M8 to M15	2	4	-48.4	-47.9	-41.1	-21.25	19.9
	VHT80 STBC, M8 to M15	2	4	-48.4	-47.9	-41.1	-21.25	19.9



5700	Non HT20, 6 to 54 Mbps	1	4	-47.8		-43.8	-21.25	22.6
	Non HT20, 6 to 54 Mbps	2	4	-47.8	-45.7	-39.6	-21.25	18.4
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-47.8	-45.7	-36.6	-21.25	15.4
	HT/VHT20, M0 to M7	1	4	-46.3		-42.3	-21.25	21.1
	HT/VHT20, M0 to M7	2	4	-46.3	-48.8	-40.4	-21.25	19.1
	HT/VHT20, M8 to M15	2	4	-46.3	-48.8	-40.4	-21.25	19.1
	HT/VHT20 Beam Forming, M0 to M7	2	7	-46.3	-48.8	-37.4	-21.25	16.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	-46.3	-48.8	-40.4	-21.25	19.1
	HT/VHT20 STBC, M0 to M7	2	4	-46.3	-48.8	-40.4	-21.25	19.1
5710	Non HT40, 6 to 54 Mbps	1	4	-48.2		-44.2	-21.25	23.0
	Non HT40, 6 to 54 Mbps	2	4	-48.2	-47.7	-40.9	-21.25	19.7
	HT/VHT40, M0 to M7	1	4	-48.3		-44.3	-21.25	23.1
	HT/VHT40, M0 to M7	2	4	-48.3	-47.2	-40.7	-21.25	19.5
	HT/VHT40, M8 to M15	2	4	-48.3	-47.2	-40.7	-21.25	19.5
	HT/VHT40 Beam Forming, M0 to M7	2	7	-48.3	-47.2	-37.7	-21.25	16.5
	HT/VHT40 Beam Forming, M8 to M15	2	4	-48.3	-47.2	-40.7	-21.25	19.5
	HT/VHT40 STBC, M0 to M7	2	4	-48.3	-47.2	-40.7	-21.25	19.5
5720	Non HT20, 6 to 54 Mbps	1	4	-47.2		-43.2	-21.25	22.0
	Non HT20, 6 to 54 Mbps	2	4	-47.2	-48.3	-40.7	-21.25	19.5
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-47.2	-48.3	-37.7	-21.25	16.5
	HT/VHT20, M0 to M7	1	4	-48.5		-44.5	-21.25	23.3
	HT/VHT20, M0 to M7	2	4	-48.5	-46.5	-40.4	-21.25	19.1
	HT/VHT20, M8 to M15	2	4	-48.5	-46.5	-40.4	-21.25	19.1
	HT/VHT20 Beam Forming, M0 to M7	2	7	-48.5	-46.5	-37.4	-21.25	16.1
	HT/VHT20 Beam Forming, M8 to M15	2	4	-48.5	-46.5	-40.4	-21.25	19.1
	HT/VHT20 STBC, M0 to M7	2	4	-48.5	-46.5	-40.4	-21.25	19.1

**Conducted Spurs Average, All Antennas****Conducted Spurs Peak, All Antennas**

**Conducted Spurs Average, 5560 MHz, Non HT20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

**Conducted Spurs Peak, 5530 MHz, Non HT80, 6 to 54 Mbps****Antenna A****Antenna B**



A.4 Conducted Bandedge

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r01

ANSI C63.10: 2013

Conducted Bandedge

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

Conducted Bandedge

Test parameters restricted Band

RBW = 1 MHz

VBW $\geq 3 \times$ RBW for Peak, 100Hz for Average

Sweep = Auto couple

Detector = Peak

Trace = Max Hold.



System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

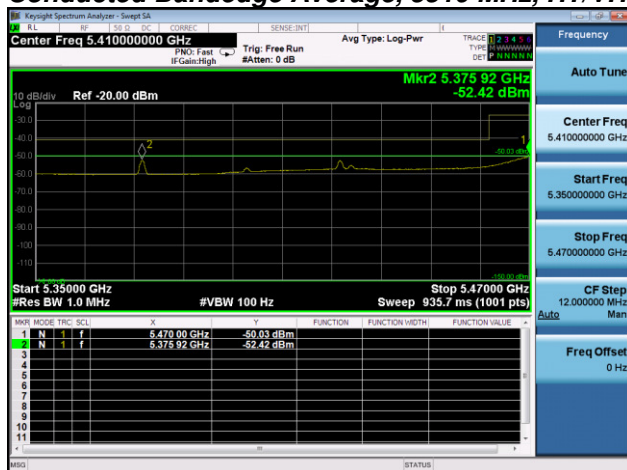
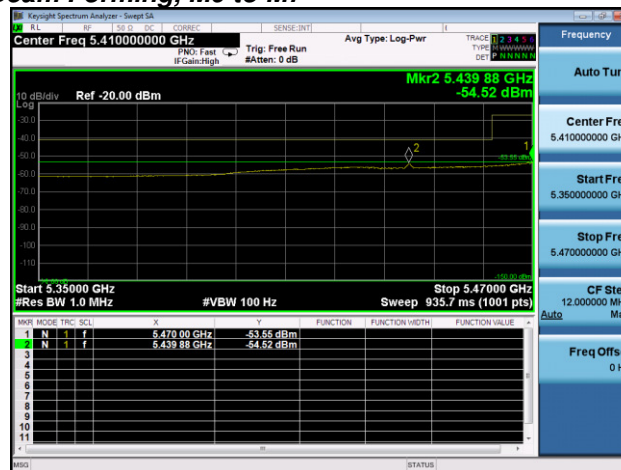
See Appendix C for list of test equipment

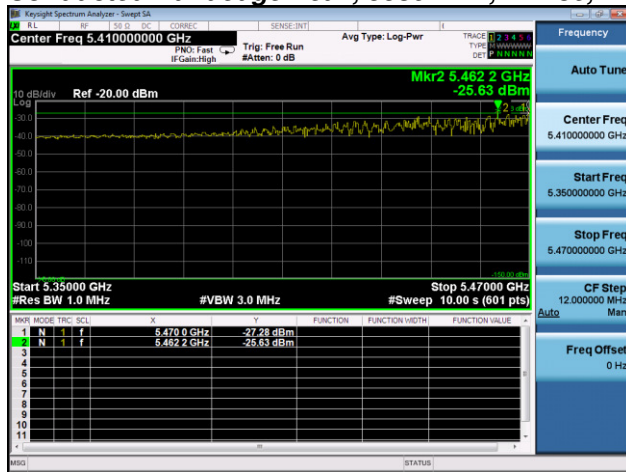


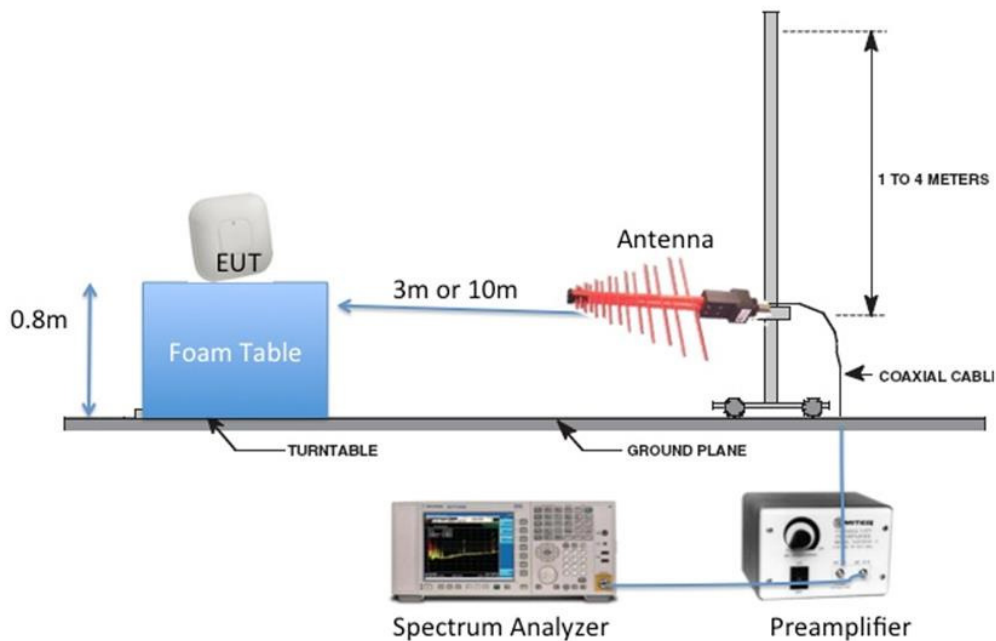
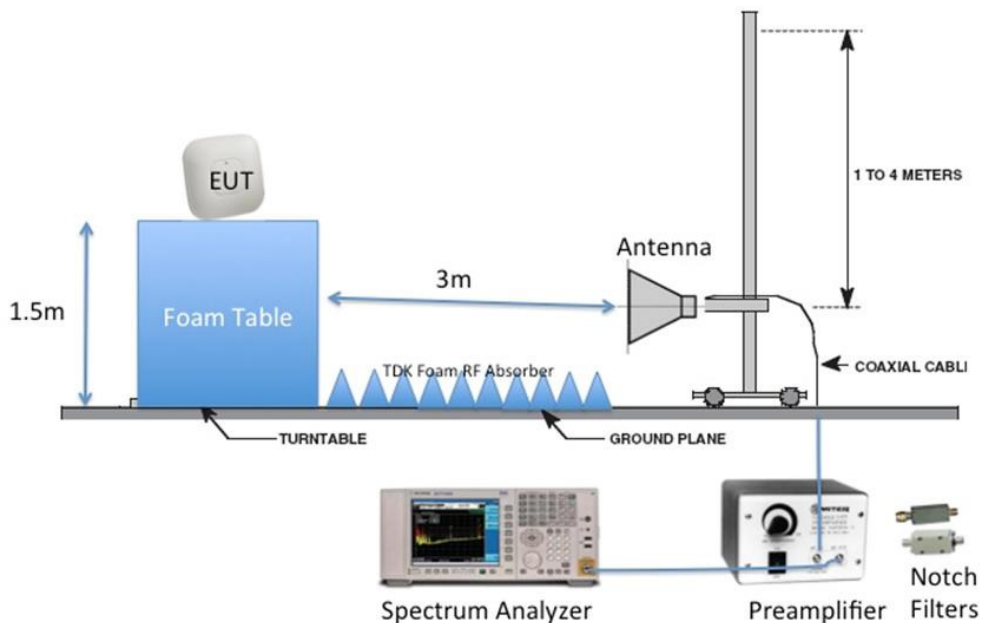
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	-52.3		-48.3	-41.25	7.1
	Non HT20, 6 to 54 Mbps	2	4	-52.3	-55.4	-46.6	-41.25	5.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-52.3	-55.4	-43.6	-41.25	2.3
	HT/VHT20, M0 to M7	1	4	-52.0		-48.0	-41.25	6.8
	HT/VHT20, M0 to M7	2	4	-52.0	-55.0	-46.2	-41.25	5.0
	HT/VHT20, M8 to M15	2	4	-52.0	-55.0	-46.2	-41.25	5.0
	HT/VHT20 Beam Forming, M0 to M7	2	7	-52.0	-55.0	-43.2	-41.25	2.0
	HT/VHT20 Beam Forming, M8 to M15	2	4	-52.0	-55.0	-46.2	-41.25	5.0
	HT/VHT20 STBC, M0 to M7	2	4	-52.0	-55.0	-46.2	-41.25	5.0
5510	Non HT40, 6 to 54 Mbps	1	4	-47.4		-43.4	-41.25	2.2
	Non HT40, 6 to 54 Mbps	2	4	-47.4	-50.9	-41.8	-41.25	0.5
	HT/VHT40, M0 to M7	1	4	-47.4		-43.4	-41.25	2.2
	HT/VHT40, M0 to M7	2	4	-47.4	-51.2	-41.9	-41.25	0.6
	HT/VHT40, M8 to M15	2	4	-47.4	-51.2	-41.9	-41.25	0.6
	HT/VHT40 Beam Forming, M0 to M7	2	7	-50.0	-53.5	-41.4	-41.25	0.1
	HT/VHT40 Beam Forming, M8 to M15	2	4	-47.4	-51.2	-41.9	-41.25	0.6
	HT/VHT40 STBC, M0 to M7	2	4	-47.4	-51.2	-41.9	-41.25	0.6
5530	Non HT80, 6 to 54 Mbps	1	4	-46.3		-42.3	-41.25	1.1
	Non HT80, 6 to 54 Mbps	2	4	-49.0	-50.8	-42.8	-41.25	1.5
	VHT80, M0 to M7	1	4	-52.1		-48.1	-41.25	6.9
	VHT80, M0 to M7	2	4	-56.3	-55.9	-49.1	-41.25	7.8
	VHT80, M8 to M15	2	4	-56.3	-55.9	-49.1	-41.25	7.8
	VHT80 Beam Forming, M0 to M7	2	4	-56.3	-55.9	-49.1	-41.25	7.8
	VHT80 Beam Forming, M8 to M15	2	4	-56.3	-55.9	-49.1	-41.25	7.8
	VHT80 STBC, M8 to M15	2	4	-56.3	-55.9	-49.1	-41.25	7.8



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT20, 6 to 54 Mbps	1	4	-32.9		-28.9	-21.25	7.7
	Non HT20, 6 to 54 Mbps	2	4	-32.9	-35.1	-26.9	-21.25	5.6
	Non HT20 Beam Forming, 6 to 54 Mbps	2	7	-32.9	-35.1	-23.9	-21.25	2.6
	HT/VHT20, M0 to M7	1	4	-33.0		-29.0	-21.25	7.8
	HT/VHT20, M0 to M7	2	4	-33.0	-35.2	-27.0	-21.25	5.7
	HT/VHT20, M8 to M15	2	4	-33.0	-35.2	-27.0	-21.25	5.7
	HT/VHT20 Beam Forming, M0 to M7	2	7	-33.0	-35.2	-24.0	-21.25	2.7
	HT/VHT20 Beam Forming, M8 to M15	2	4	-33.0	-35.2	-27.0	-21.25	5.7
	HT/VHT20 STBC, M0 to M7	2	4	-33.0	-35.2	-27.0	-21.25	5.7
5510	Non HT40, 6 to 54 Mbps	1	4	-31.4		-27.4	-21.25	6.2
	Non HT40, 6 to 54 Mbps	2	4	-31.4	-34.2	-25.6	-21.25	4.3
	HT/VHT40, M0 to M7	1	4	-31.6		-27.6	-21.25	6.4
	HT/VHT40, M0 to M7	2	4	-31.6	-32.8	-25.1	-21.25	3.9
	HT/VHT40, M8 to M15	2	4	-31.6	-32.8	-25.1	-21.25	3.9
	HT/VHT40 Beam Forming, M0 to M7	2	7	-30.8	-33.1	-21.8	-21.25	0.5
	HT/VHT40 Beam Forming, M8 to M15	2	4	-31.6	-32.8	-25.1	-21.25	3.9
	HT/VHT40 STBC, M0 to M7	2	4	-31.6	-32.8	-25.1	-21.25	3.9
5530	Non HT80, 6 to 54 Mbps	1	4	-28.4		-24.4	-21.25	3.2
	Non HT80, 6 to 54 Mbps	2	4	-30.9	-37.7	-26.1	-21.25	4.8
	VHT80, M0 to M7	1	4	-25.6		-21.6	-21.25	0.4
	VHT80, M0 to M7	2	4	-27.9	-29.5	-21.6	-21.25	0.4
	VHT80, M8 to M15	2	4	-27.9	-29.5	-21.6	-21.25	0.4
	VHT80 Beam Forming, M0 to M7	2	4	-27.9	-29.5	-21.6	-21.25	0.4
	VHT80 Beam Forming, M8 to M15	2	4	-27.9	-29.5	-21.6	-21.25	0.4
	VHT80 STBC, M8 to M15	2	4	-27.9	-29.5	-21.6	-21.25	0.4

**Conducted Bandedge Average, 5510 MHz, HT/VHT40 Beam Forming, M0 to M7****Antenna A****Antenna B**

**Conducted Bandedge Peak, 5530 MHz, VHT80, M0 to M7****Antenna A**

Appendix B: Emission Test Results**Testing Laboratory:** Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA**Radiated Emission Setup Diagram-Below 1G****Radiated Emission Setup Diagram-Above 1G**



B.1 Radiated Spurious Emissions

15.407 (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

15.205 / 15.209

(7) The provisions of 15.205 apply to intentional radiators operating under this section.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz/18GHz-26G/26GHz-40GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz for peak, 1 KHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

See Appendix C for list of test equipment

**B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5500	HT/VHT20, M0 to M23	M0	50.2	54.0	3.8
5510	HT/VHT40, M0 to M23	M0	50.4	54.0	3.6
5530	VHT80, M0.1 to M9.3	M0x1	50.5	54.0	3.5
5560	HT/VHT20, M0 to M23	M0	50.3	54.0	3.7
5670	HT/VHT20, M0 to M23	M0	50.5	54.0	3.5
5690	VHT80, M0.1 to M9.3	M0x1	50.5	54.0	3.5
5710	HT/VHT20, M0 to M23	M0	50.4	54.0	3.6
5720	HT/VHT20, M0 to M23	M0	50.0	54.0	4.0

**B.1.P.1 Radiated Transmitter Spurs, 5500 MHz, HT/VHT20, M0 to M23, Average (1-18GHz)****B.1.P.2 Radiated Transmitter Spurs, 5510 MHz, HT/VHT40, M0 to M23, Average (1-18GHz)**

**B.1.P.3 Radiated Transmitter Spurs, 5530 MHz, VHT80, M0.1 to M9.3, Average (1-18GHz)****B.1.P.4 Radiated Transmitter Spurs, 5560 MHz, HT/VHT20, M0 to M23, Average (1-18GHz)**

**B.1.P.6 Radiated Transmitter Spurs, 5670 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Average (1-18GHz)**

**B.1.P.7 Radiated Transmitter Spurs, 5690 MHz, VHT80, M0.1 to M9.3, Average (1-18GHz)****B.1.P.8 Radiated Transmitter Spurs, 5710 MHz, HT/VHT40, M0 to M23, Average (1-18GHz)**

**B.1.P.9 Radiated Transmitter Spurs, 5720 MHz, HT/VHT20, M0 to M23, Average (1-18GHz)**

**B.1.P.10 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz) Horizontal & Vertical****B.1.P.11 Radiated Transmitter Spurs, All rate, All modes, Average (26.5-40GHz) Horizontal & Vertical**

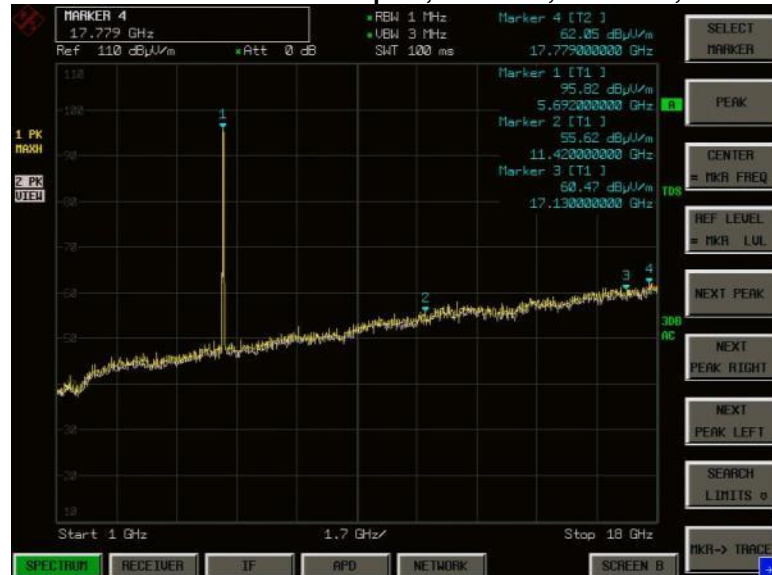
**B.1.P Transmitter Radiated Spurious Emissions-Peak worst case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5500	HT/VHT20, M0 to M23	M0	61.7	74.0	12.3
5510	HT/VHT40, M0 to M23	M0	61.8	74.0	12.2
5530	VHT80, M0.1 to M9.3	M0x1	62.2	74.0	11.8
5560	HT/VHT20, M0 to M23	M0	61.7	74.0	12.3
5670	HT/VHT20, M0 to M23	M0	62.4	74.0	11.6
5690	VHT80, M0.1 to M9.3	M0x1	61.6	74.0	12.4
5710	HT/VHT20, M0 to M23	M0	62.1	74.0	11.9
5720	HT/VHT20, M0 to M23	M0	62.7	74.0	11.3

**B.1.P.1 Radiated Transmitter Spurs, 5500 MHz, HT/VHT20, M0 to M23, Peak (1-18GHz)****B.1.P.2 Radiated Transmitter Spurs, 5510 MHz, HT/VHT40, M0 to M23, Peak (1-18GHz)**

**B.1.P.3 Radiated Transmitter Spurs, 5530 MHz, VHT80, M0.1 to M9.3, Peak (1-18GHz)****B.1.P.4 Radiated Transmitter Spurs, 5560 MHz, HT/VHT20, M0 to M23, Peak (1-18GHz)**

**B.1.P.6 Radiated Transmitter Spurs, 5670 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)**

B.1.P.7 Radiated Transmitter Spurs, 5690 MHz, VHT80, M0.1 to M9.3, Peak (1-18GHz)**B.1.P.8 Radiated Transmitter Spurs, 5710 MHz, HT/VHT40, M0 to M23, Peak (1-18GHz)**

**B.1.P.9 Radiated Transmitter Spurs, 5720 MHz, HT/VHT20, M0 to M23, Peak (1-18GHz)**

**B.1.P.10 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical****B.1.P.11 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical**



B.2 Radiated Emissions 30MHz to 1GHz

FCC 15.209 / 15.205 / 15.407 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

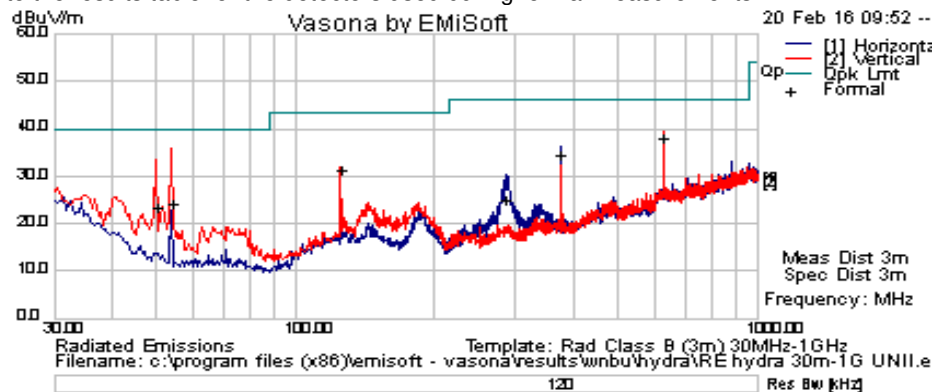
Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

See Appendix C for list of test equipment



Graphical Test Results

Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements



Test Results

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
53.993	16.3	0.7	7.4	24.4	Quasi Peak.	V	300	45	40	-15.6	Pass
625.002	16.3	2.4	19.5	38.2	Quasi Peak.	V	115	48	46	-7.8	Pass
285.11	10.2	1.6	13.4	25.2	Quasi Peak.	H	133	112	46	-20.8	Pass
375.001	17.7	1.8	15.3	34.8	Quasi Peak.	H	110	245	46	-11.2	Pass
125.001	16.4	1.1	13.9	31.4	Quasi Peak.	V	108	333	43.5	-12.1	Pass
50.003	14.9	0.7	8	23.6	Quasi Peak.	V	102	75	40	-16.4	Pass



B.3 AC Conducted Emissions

FCC 15.207 Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure
Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 150 KHz – 30 MHz
Attenuation: 10 dB
Sweep Time: Coupled
Resolution Bandwidth: 9 KHz
Video Bandwidth: 30 KHz
Detector: Quasi-Peak / Average

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

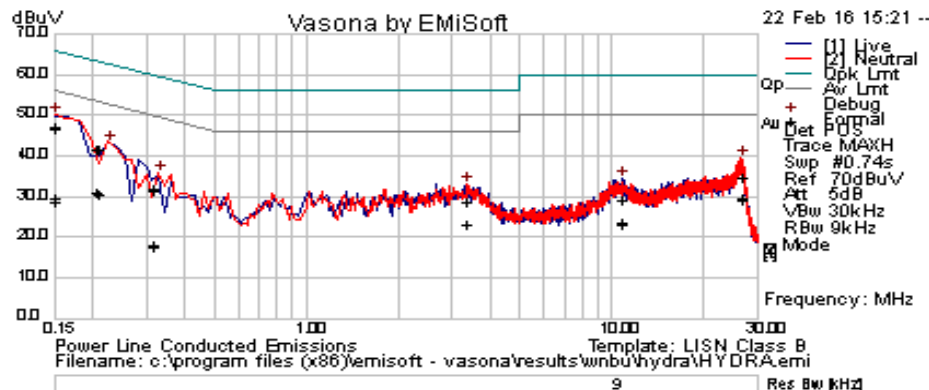
Tested By : Jose Aguirre	Date of testing: 01-Jan-16 - 22-Feb-16
Test Result : PASS	

See Appendix C for list of test equipment



Graphical Test Results

Note that the data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements



Test Results

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
3.328074	8.87	19.94	0.05	28.87	Quasi Peak	Live	56	-27.13	Pass
0.206625	20.9	20.8	0.05	41.76	Quasi Peak	Live	63.34	-21.58	Pass
0.150119	25.75	21.16	0.08	46.98	Quasi Peak	Live	65.99	-19.01	Pass
26.520726	14.4	20.44	0.28	35.11	Quasi Peak	Live	60	-24.89	Pass
10.79433	9.38	20.09	0.08	29.55	Quasi Peak	Live	60	-30.45	Pass
0.312792	11.36	20.34	0.04	31.74	Quasi Peak	Live	59.9	-28.15	Pass
0.209523	20.96	20.79	0.05	41.8	Quasi Peak	Neutral	63.22	-21.42	Pass
0.150339	26.11	21.16	0.08	47.35	Quasi Peak	Neutral	65.98	-18.63	Pass
26.513274	14.07	20.44	0.28	34.78	Quasi Peak	Neutral	60	-25.22	Pass
0.313386	11.62	20.34	0.04	32	Quasi Peak	Neutral	59.88	-27.88	Pass
3.355524	8.79	19.94	0.05	28.78	Quasi Peak	Neutral	56	-27.22	Pass
10.791576	9.2	20.09	0.08	29.37	Quasi Peak	Neutral	60	-30.63	Pass
3.328074	3.5	19.94	0.05	23.5	Average	Live	46	-22.5	Pass
0.206625	10.25	20.8	0.05	31.1	Average	Live	53.34	-22.24	Pass
0.150119	7.65	21.16	0.08	28.88	Average	Live	55.99	-27.11	Pass
26.520726	9.1	20.44	0.28	29.81	Average	Live	50	-20.19	Pass
10.79433	3.56	20.09	0.08	23.73	Average	Live	50	-26.27	Pass
0.312792	-2.8	20.34	0.04	17.59	Average	Live	49.9	-32.31	Pass
0.209523	9.94	20.79	0.05	30.78	Average	Neutral	53.22	-22.45	Pass
0.150339	8.39	21.16	0.08	29.62	Average	Neutral	55.98	-26.36	Pass
26.513274	8.64	20.44	0.28	29.36	Average	Neutral	50	-20.64	Pass
0.313386	-2.14	20.34	0.04	18.24	Average	Neutral	49.88	-31.64	Pass
3.355524	3.46	19.94	0.05	23.45	Average	Neutral	46	-22.55	Pass
10.791576	3.16	20.09	0.08	23.33	Average	Neutral	50	-26.67	Pass

Photographs of setup

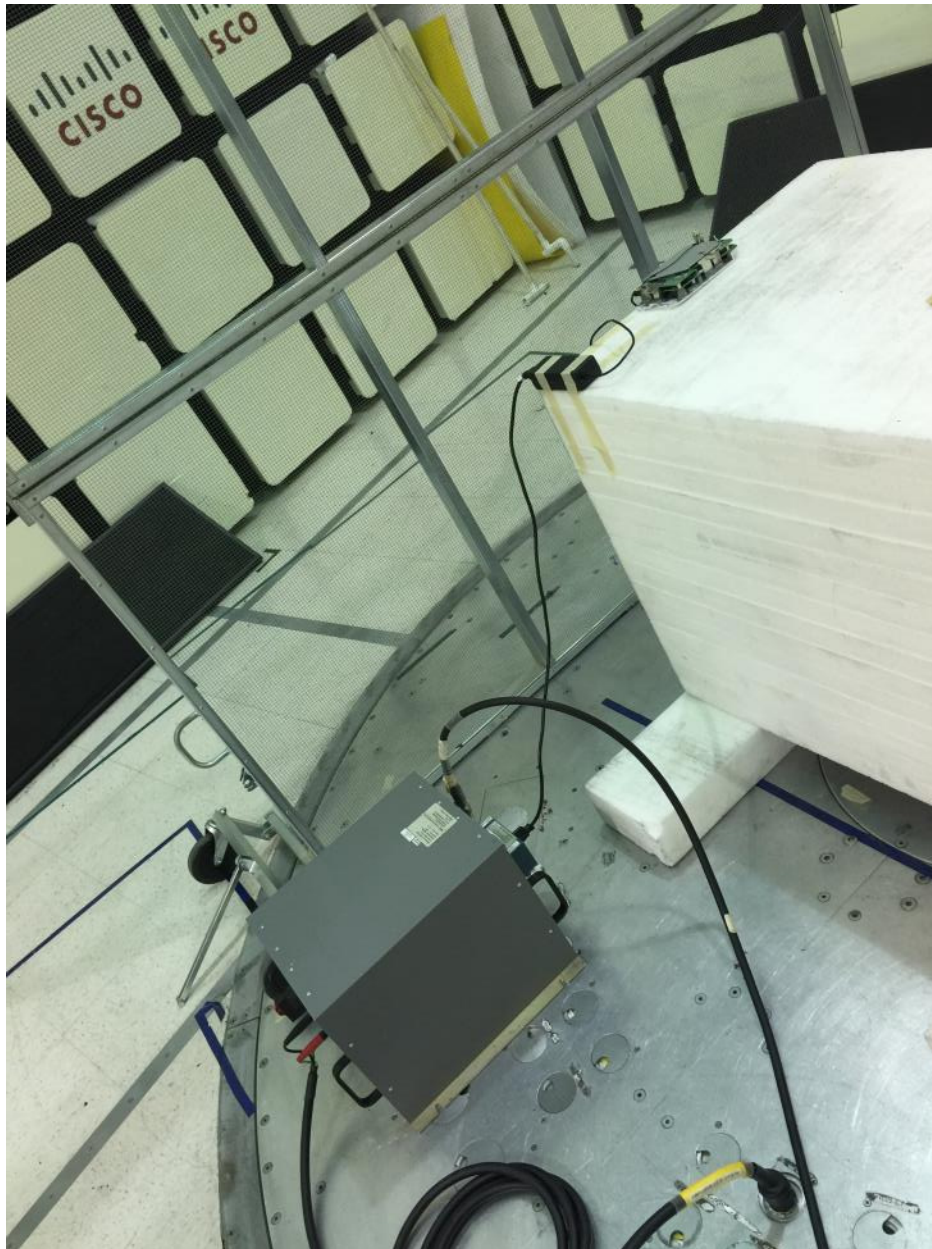


Title: Conducted Test Setup

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

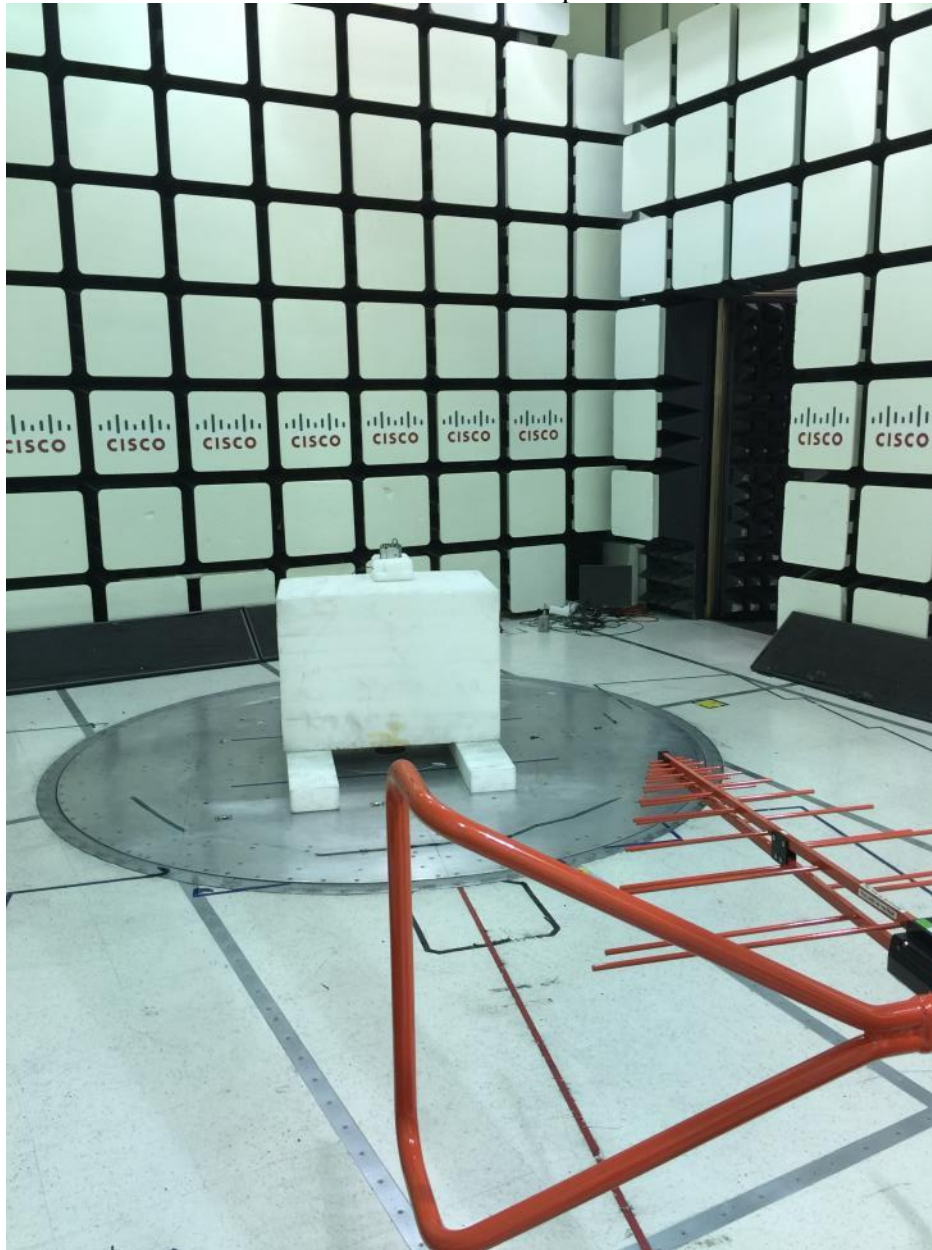


AIR-AP1810W-x-K9 AC Mains Conducted Emissions setup

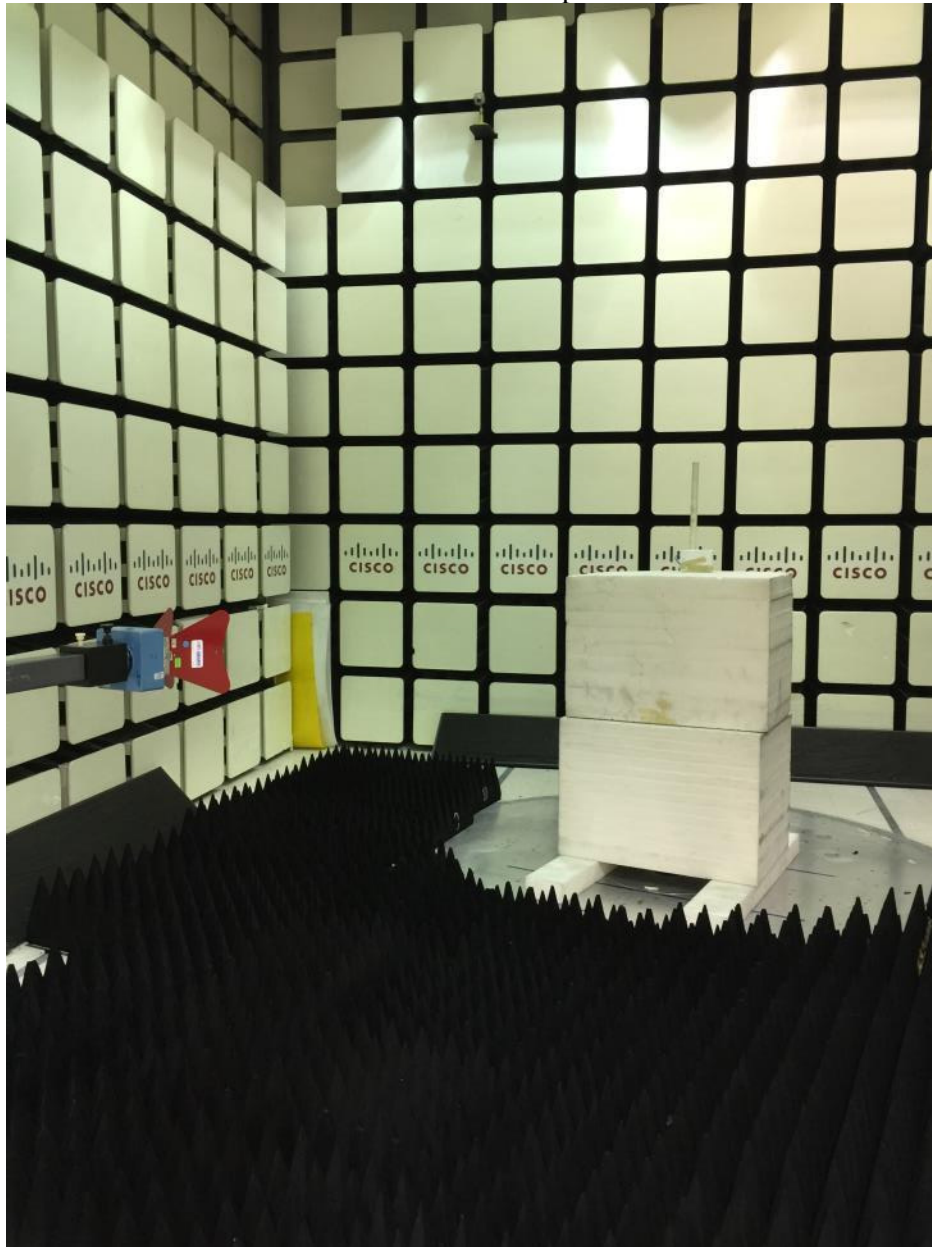




AIR-AP1810W-x-K9 Radiated Emissions setup 30MHz – 1GHz



AIR-AP1810W-x-K9 Radiated Emissions setup above 1GHz





Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS005691	NSP1800-25-S1 Miteq	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS008448	NSA 5m Chamber Cisco	NSA 5m Chamber	9-Oct-15	9-Oct-16	B.1, B.2
CIS021117	UFB311A-0-2484-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-15	24-Aug-16	B.1, B.2
CIS034075	RSG 2000 Schaffner	Reference Spectrum Generator, 1-18GHz	Cal Not Required	Cal Not Required	B.1
CIS035284	3117 ETS-Lindgren	Double Ridged Waveguide Horn Antenna	30-Sep-15	30-Sep-16	B.1
CIS037236	50CB-015 JFW	GPIB Control Box	Cal Not Required	Cal Not Required	B.1
CIS040597	Above 1GHz Site Cal Cisco	Above 1GHz Cisp Site Verification	25-Sep-15	25-Sep-16	B.1
CIS041979	1840 Cisco	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS042266	JB1 Sunol Sciences	Combination Antenna	21-Apr-15	21-Apr-16	B.2
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.1, B.2
CIS054230	iBTHP-5-DB9 Newport	5 inch Temp/RH/Press Sensor w/20ft cable	10-Feb-16	10-Feb-17	B.1, B.2
CIS041979	1840 Cisco	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS047299	N9030A Agilent Technologies	PXA Signal Analyzer	23-Oct-15	23-Oct-16	B.1
CIS037236	50CB-015 JFW	GPIB Control Box	Cal Not Required	Cal Not Required	B.1
CIS034075	RSG 2000 Schaffner	Reference Spectrum Generator, 1-18GHz	Cal Not Required	Cal Not Required	B.1
CIS049563	Sucoflex 106A Huber + Suhner	N Type Cable 18GHz	24-Aug-15	24-Aug-16	B.1, B.2

Test Equipment used for AC Mains Conducted Emissions					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS002464	FCC-801-M2-16 Fischer Custom Communications	CDN, 2-LINE, 16A	12-Mar-15	12-Mar-16	B.3
CIS049532	H785-150K-50-21378 TTE	High Pass Filter	8-May-15	8-May-16	B.3
CIS020913	FCC-LISN-PA-NEMA-5-15 Fischer Custom Communications	AC Adapter	8-May-15	8-May-16	B.3
CIS007704	FCC-LISN-50/250-50-2-01 Fischer Custom Communications	LISN	8-May-15	8-May-16	B.3
CIS008185	FCC-450B-2.4-N Fischer Custom Communications	Instrumentation Limiter	28-Jul-15	28-Jul-16	B.3
CIS051756	5-T-MB Bird	5W 50 Ohm BNC Termination 4GHz	6-Aug-15	6-Aug-16	B.3
CIS049563	Sucoflex 106A Huber + Suhner	N Type Cable 18GHz	24-Aug-15	24-Aug-16	B.3



CIS021117	UFB311A-0-2484-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-15	24-Aug-16	B.4
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.4
CIS054647	33-605 Stanley	10meter Measuring Tape	Cal not required	Cal not required	B.4
CIS018963	CNE V York	Comparison Noise Emitter, 30 - 1000MHz	Cal not required	Cal not required	B.4

Test Equipment used for RF Conducted Tests					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS050721	N9030A Keysight	PXA Signal Analyzer	13-Apr-15	13-Apr-16	A1 thru A4
CIS054662	SF18-S1S1-36 MegaPhase	SMA 36" cable	24-Sep-15	24-Sep-16	A1 thru A4
CIS054663	F120-S1S1-48 MegaPhase	SMA 48" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054665	RA08-S1S1-24 MegaPhase	SMA 24" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054666	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054667	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054668	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054669	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054670	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054671	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054672	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054673	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054674	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054675	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054677	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054678	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054686	NI PXI-2796 National Instruments	Plug-in switch module	6-Oct-15	6-Oct-16	A1 thru A4
CIS055094	PXI-1042 National Instruments	Chassis	Cal Not Required	Cal Not Required	A1 thru A4
CIS055117	RFLT2WDC40G RF Lambda	2 Way 40GHz Splitter	11-Nov-15	11-Nov-16	A1 thru A4
CIS055166	RFLT4WDC40GK RF Lambda	4 Way Power Divider 40GHz	23-Nov-15	23-Nov-16	A1 thru A4
CIS054656	BRC50705-02 Micro-Tronics	Band Reject Filter	24-Sep-15	24-Sep-16	A1 thru A4
CIS054655	BRC50704-02 Micro-Tronics	Notch Filter, SB:5.470-5.725GHz, to 12GHz	24-Sep-15	24-Sep-16	A1 thru A4



CIS054654	BRC50703-02 Micro-Tronics	Notch Filter, SB:5.150-5.350GHz, to 11GHz	24-Sep-15	24-Sep-16	A1 thru A4
CIS054653	BRM50702-02 Micro-Tronics	Notch Filter, SB:2.400-2.500GHz, to 18GHz	24-Sep-15	24-Sep-16	A1 thru A4
CIS054637	BWS30-W2/ Aeroflex	SMA 30dB Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054636	BWS20-W2/ Aeroflex	20dB SMA Attenuator	02-June-15	02-June-16	A1 thru A4



Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current



End