



TEST REPORT

Product Name: TWS earbuds
FCC ID: 2BC3D-GHOSTBUDS
Trademark: 
Model Number: Ghostbuds
Prepared For: Rupt Group Corporation
Address: PO Box 193 Alamo California the United States
Manufacturer: Rupt Group Corporation
Address: PO Box 193 Alamo California the United States
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 20, 2023
Sample tested Date: Oct. 20, 2023 to Nov. 22, 2023
Issue Date: Nov. 22, 2023
Report No.: CTB231106019RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou Kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. CONDUCTED PEAK OUTPUT POWER	46
9.1 Block Diagram Of Test Setup	46
9.2 Limit	46
9.3 Test procedure	46
9.4 Test Result	47
10. 20DB OCCUPIED BANDWIDTH	52
10.1 Block Diagram Of Test Setup	52
10.2 Limit	52
10.3 Test procedure	52
10.4 Test Result	52
11. CARRIER FREQUENCIES SEPARATION	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57
11.3 Test procedure	57
11.4 Test Result	57
12. HOPPING CHANNEL NUMBER	62
12.1 Block Diagram Of Test Setup	62
12.2 Limit	62
12.3 Test procedure	62
12.4 Test Result	62
13. DWELL TIME	65
13.1 Block Diagram Of Test Setup	65

13.2	Limit	65
13.3	Test procedure	65
13.4	Test Result	66
14.	PSEUDORANDOM FREQUENCY	73
14.1	Limit	73
14.2	Test procedure	73
14.3	Test Result	74
15.	ANTENNA REQUIREMENT	75
16.	EUT TEST SETUP PHOTOGRAPHS	76

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB231106019RFX	Nov. 22, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	Ghostbuds
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.3
Hardware Version:	J171 1.0
Software Version:	SDK2.3.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 1.172dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK
Antenna installation:	Bluetooth: Chip Antenna
Antenna Gain:	Bluetooth: 1.72dBi
Ratings:	DC 5V charging from adapter DC 3.7V from battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/


Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

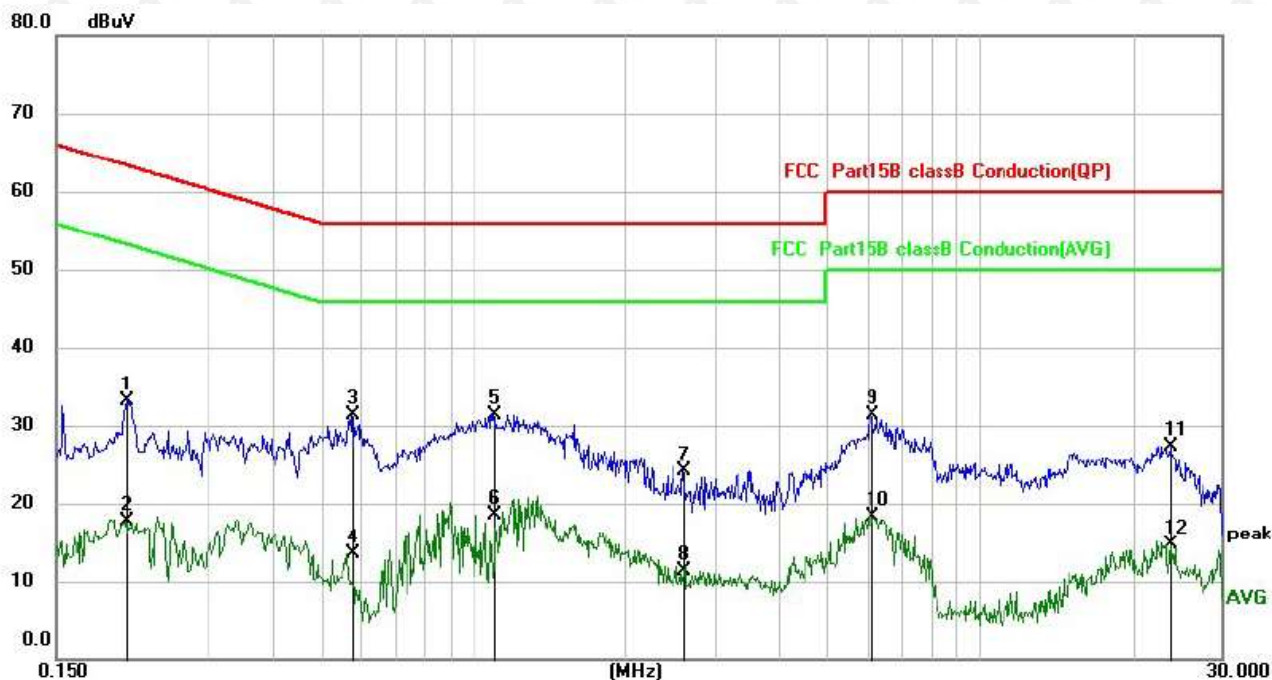


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2071	23.25	9.95	33.20	63.32	-30.12	QP
2		0.2071	7.78	9.95	17.73	53.32	-35.59	AVG
3		0.5779	21.24	10.00	31.24	56.00	-24.76	QP
4		0.5779	3.41	10.00	13.41	46.00	-32.59	AVG
5	*	1.0980	21.38	10.02	31.40	56.00	-24.60	QP
6		1.0980	8.52	10.02	18.54	46.00	-27.46	AVG
7		2.6059	14.04	10.15	24.19	56.00	-31.81	QP
8		2.6059	1.11	10.15	11.26	46.00	-34.74	AVG
9		6.1100	20.80	10.46	31.26	60.00	-28.74	QP
10		6.1100	7.87	10.46	18.33	50.00	-31.67	AVG
11		23.8019	16.31	10.96	27.27	60.00	-32.73	QP
12		23.8019	3.73	10.96	14.69	50.00	-35.31	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
Measurement=Reading level+correct facto

N: Worst case-GFSK(low channel)

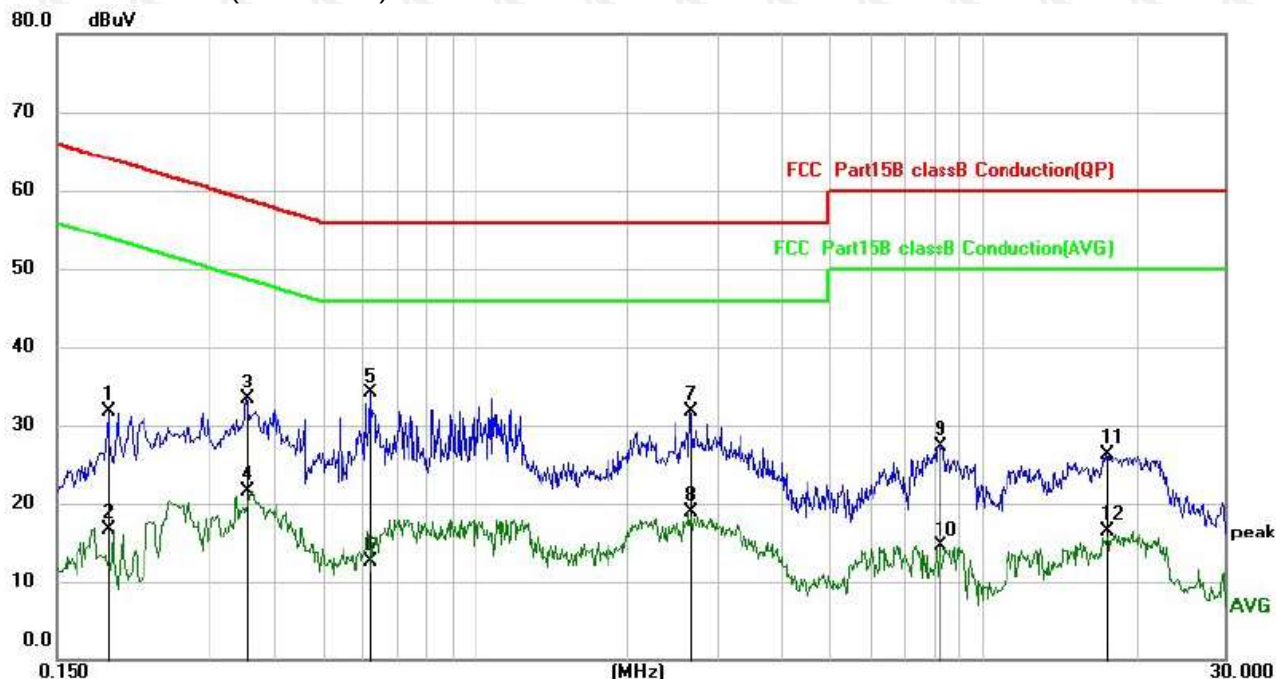

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	21.84	9.95	31.79	64.04	-32.25	QP
2		0.1900	6.79	9.95	16.74	54.04	-37.30	AVG
3		0.3540	23.31	9.97	33.28	58.87	-25.59	QP
4		0.3540	11.46	9.97	21.43	48.87	-27.44	AVG
5	*	0.6220	24.08	10.01	34.09	56.00	-21.91	QP
6		0.6220	2.58	10.01	12.59	46.00	-33.41	AVG
7		2.6580	21.47	10.15	31.62	56.00	-24.38	QP
8		2.6580	8.76	10.15	18.91	46.00	-27.09	AVG
9		8.2339	16.79	10.54	27.33	60.00	-32.67	QP
10		8.2339	3.89	10.54	14.43	50.00	-35.57	AVG
11		17.4819	15.52	10.77	26.29	60.00	-33.71	QP
12		17.4819	5.69	10.77	16.46	50.00	-33.54	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
Measurement=Reading level+correct facto

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

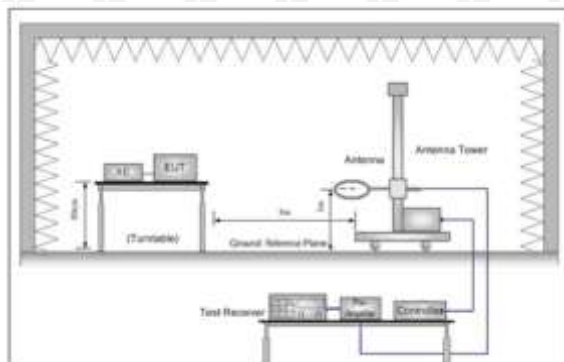


Figure 1. Below 30MHz

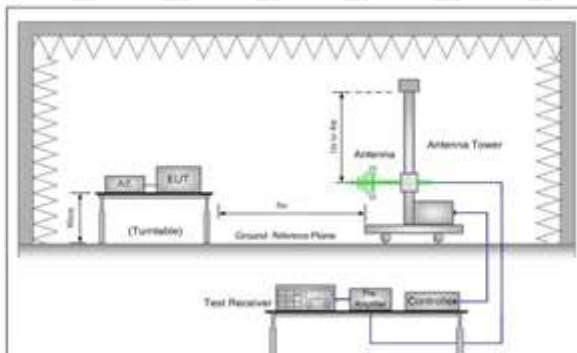


Figure 2. 30MHz to 1GHz

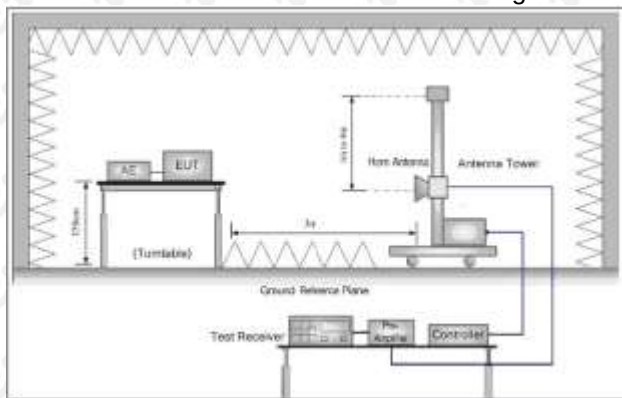


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

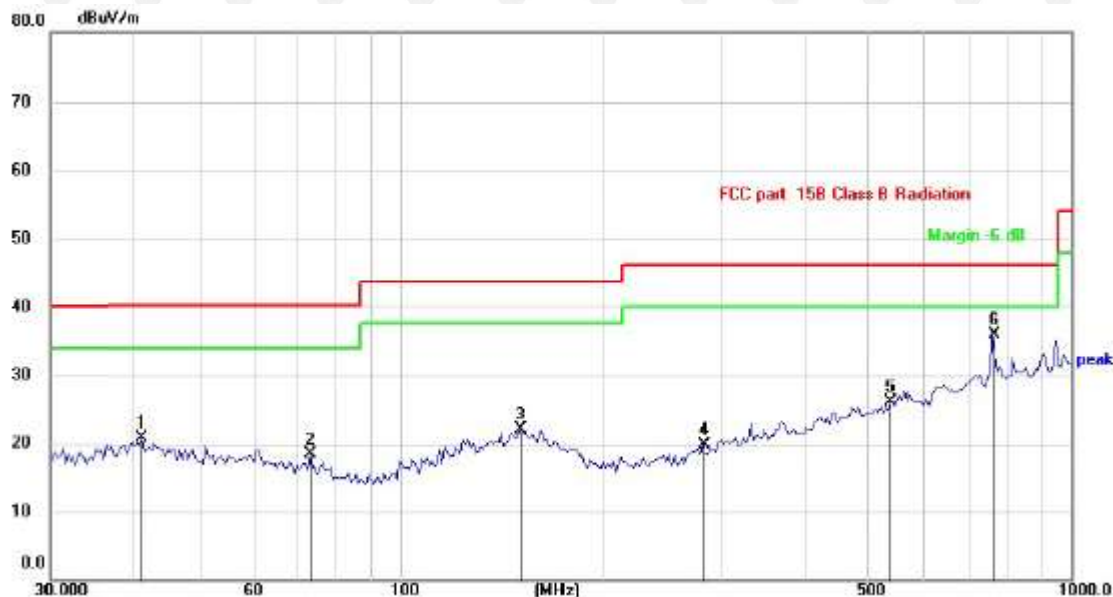

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		41.1320	25.84	-4.98	20.86	40.00	-19.14	QP
2		73.3593	26.87	-8.40	18.47	40.00	-21.53	QP
3		151.8632	25.37	-3.24	22.13	43.50	-21.37	QP
4		282.9852	25.37	-5.48	19.89	46.00	-26.11	QP
5		541.3725	24.94	1.11	26.05	46.00	-19.95	QP
6	*	762.0385	30.12	5.71	35.83	46.00	-10.17	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)

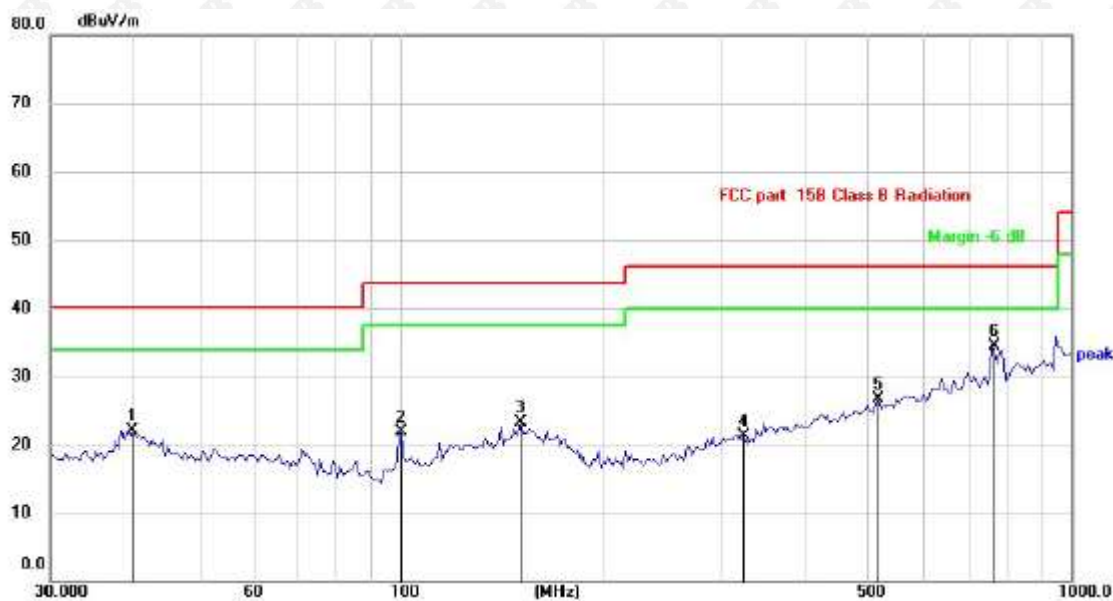

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	27.11	-4.94	22.17	40.00	-17.83	QP
2		99.7028	30.92	-8.93	21.99	43.50	-21.51	QP
3		151.8632	26.52	-3.24	23.28	43.50	-20.22	QP
4		325.5958	25.33	-4.08	21.25	46.00	-24.75	QP
5		518.1556	26.28	0.51	26.79	46.00	-19.21	QP
6	*	762.0385	28.72	5.71	34.43	46.00	-11.57	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Right ear:

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.9750	30.44	-5.33	25.11	40.00	-14.89	QP
2		76.6461	29.10	-8.73	20.37	40.00	-19.63	QP
3		141.5774	29.81	-4.20	25.61	43.50	-17.89	QP
4		317.1444	29.15	-4.30	24.85	46.00	-21.15	QP
5		522.7178	24.78	0.63	25.41	46.00	-20.59	QP
6	*	762.0384	27.62	5.71	33.33	46.00	-12.67	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		39.3680	29.61	-4.94	24.67	40.00	-15.33	QP
2		71.4551	29.74	-8.20	21.54	40.00	-18.46	QP
3		151.8632	29.52	-3.24	26.28	43.50	-17.22	QP
4		331.3546	29.25	-3.93	25.32	46.00	-20.68	QP
5		518.1556	26.78	0.51	27.29	46.00	-18.71	QP
6	*	762.0384	27.22	5.71	32.93	46.00	-13.07	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct facto

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.02	-3.65	54.37	74.00	-19.63	peak
4804	49.83	-3.65	46.18	54.00	-7.82	AVG
7206	61.36	-0.95	60.41	74.00	-13.59	peak
7206	42.09	-0.95	41.14	54.00	-12.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.04	-3.65	54.39	74.00	-19.61	peak
4804	48.45	-3.65	44.80	54.00	-9.20	AVG
7206	59.04	-0.95	58.09	74.00	-15.91	peak
7206	42.16	-0.95	41.21	54.00	-12.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.32	-3.54	54.78	74.00	-19.22	peak
4882.00	46.93	-3.54	43.39	54.00	-10.61	AVG
7323.00	56.06	-0.81	55.25	74.00	-18.75	peak
7323.00	44.13	-0.81	43.32	54.00	-10.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.72	-3.54	54.18	74.00	-19.82	peak
4882.00	48.45	-3.54	44.91	54.00	-9.09	AVG
7323.00	56.62	-0.81	55.81	74.00	-18.19	peak
7323.00	43.39	-0.81	42.58	54.00	-11.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.65	-3.43	53.22	74.00	-20.78	peak
4960	47.61	-3.44	44.17	54.00	-9.83	AVG
7440	59.88	-0.77	59.11	74.00	-14.89	peak
7440	41.51	-0.77	40.74	54.00	-13.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.49	-3.43	55.06	74.00	-18.94	peak
4960	47.51	-3.44	44.07	54.00	-9.93	AVG
7440	59.85	-0.77	59.08	74.00	-14.92	peak
7440	41.45	-0.77	40.68	54.00	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.56	-5.81	50.75	74.00	-23.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.57	-5.84	49.73	74.00	-24.27	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.55	-5.81	50.74	74.00	-23.26	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.75	-5.84	50.91	74.00	-23.09	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.29	-5.81	48.48	74.00	-25.52	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.97	-6.06	47.91	74.00	-26.09	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.33	-5.81	50.52	74.00	-23.48	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.41	-6.06	48.35	74.00	-25.65	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74.00	-24.45	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.32	-5.84	47.48	74.00	-26.52	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.19	-5.81	49.38	74.00	-24.62	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	52.73	-5.84	46.89	74.00	-27.11	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.19	-5.81	49.38	74.00	-24.62	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.90	-6.06	48.84	74.00	-25.16	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.32	-5.81	50.51	74.00	-23.49	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.71	-6.06	48.65	74.00	-25.35	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.14	-3.65	54.49	74.00	-19.51	peak
4804	50.07	-3.65	46.42	54.00	-7.58	AVG
7206	60.63	-0.95	59.68	74.00	-14.32	peak
7206	40.27	-0.95	39.32	54.00	-14.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.51	-3.65	52.86	74.00	-21.14	peak
4804	49.99	-3.65	46.34	54.00	-7.66	AVG
7206	59.24	-0.95	58.29	74.00	-15.71	peak
7206	40.90	-0.95	39.95	54.00	-14.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	60.26	-3.54	56.72	74.00	-17.28	peak
4882.00	47.49	-3.54	43.95	54.00	-10.05	AVG
7323.00	57.65	-0.81	56.84	74.00	-17.16	peak
7323.00	44.45	-0.81	43.64	54.00	-10.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.72	-3.54	54.18	74.00	-19.82	peak
4882.00	48.75	-3.54	45.21	54.00	-8.79	AVG
7323.00	58.09	-0.81	57.28	74.00	-16.72	peak
7323.00	43.65	-0.81	42.84	54.00	-11.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.29	-3.43	55.86	74.00	-18.14	peak
4960	49.87	-3.44	46.43	54.00	-7.57	AVG
7440	61.29	-0.77	60.52	74.00	-13.48	peak
7440	40.47	-0.77	39.70	54.00	-14.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.66	-3.43	54.23	74.00	-19.77	peak
4960	48.76	-3.44	45.32	54.00	-8.68	AVG
7440	58.58	-0.77	57.81	74.00	-16.19	peak
7440	42.50	-0.77	41.73	54.00	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.23	-5.81	51.42	74.00	-22.58	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.19	-5.84	50.35	74.00	-23.65	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.59	-5.81	49.78	74.00	-24.22	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.32	-5.84	49.48	74.00	-24.52	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.27	-5.81	48.46	74.00	-25.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.17	-6.06	47.11	74.00	-26.89	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.82	-5.81	50.01	74.00	-23.99	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.54	-6.06	48.48	74.00	-25.52	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.69	-5.81	49.88	74.00	-24.12	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.38	-5.84	48.54	74.00	-25.46	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.80	-5.81	50.99	74.00	-23.01	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.38	-5.84	49.54	74.00	-24.46	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.98	-5.81	51.17	74.00	-22.83	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.87	-6.06	48.81	74.00	-25.19	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.49	-5.81	50.68	74.00	-23.32	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.85	-6.06	48.79	74.00	-25.21	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

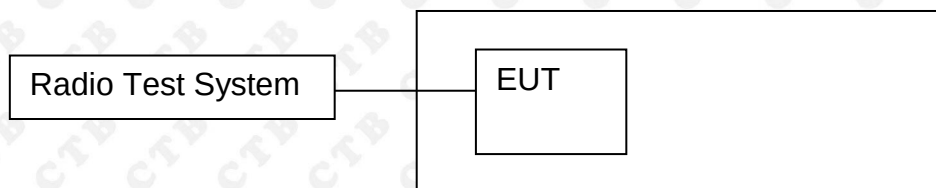

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result


Left ear:

BAND EDGE Graphs


GFSK/LCH/
No Hop



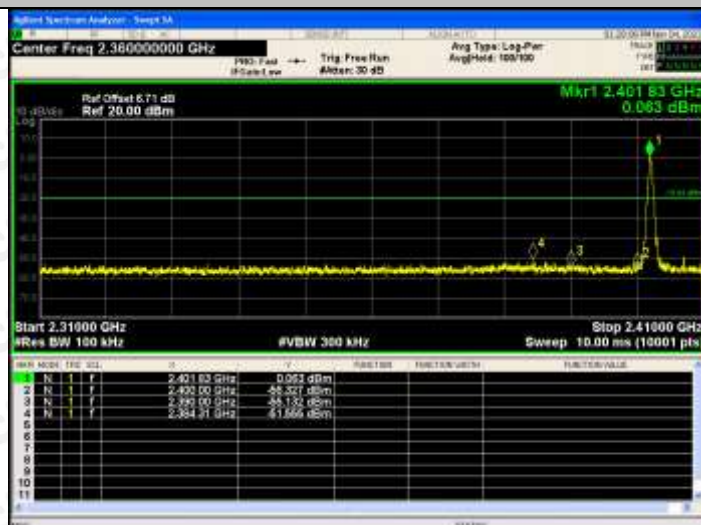


GFSK/LCH/
Hop

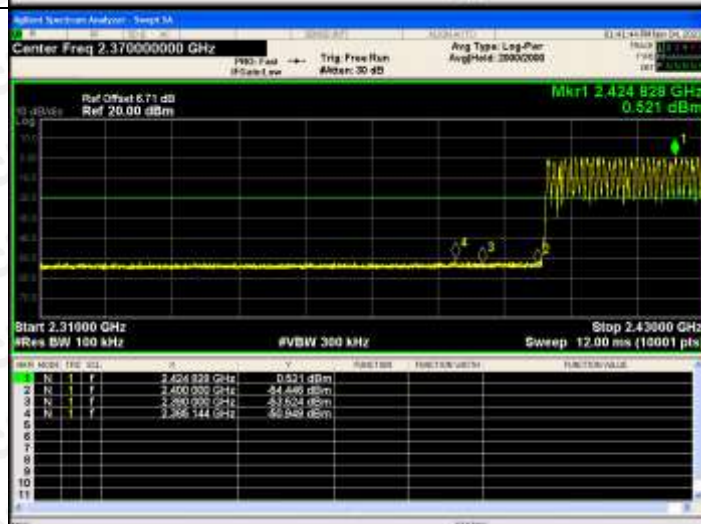

GFSK/HCH/
No Hop

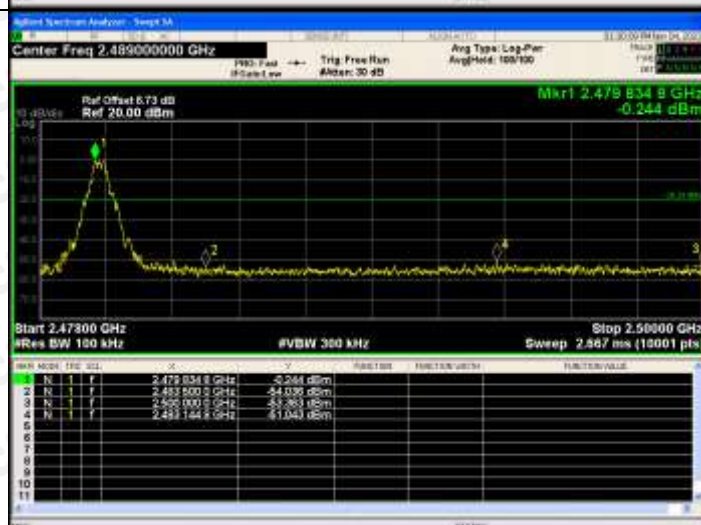


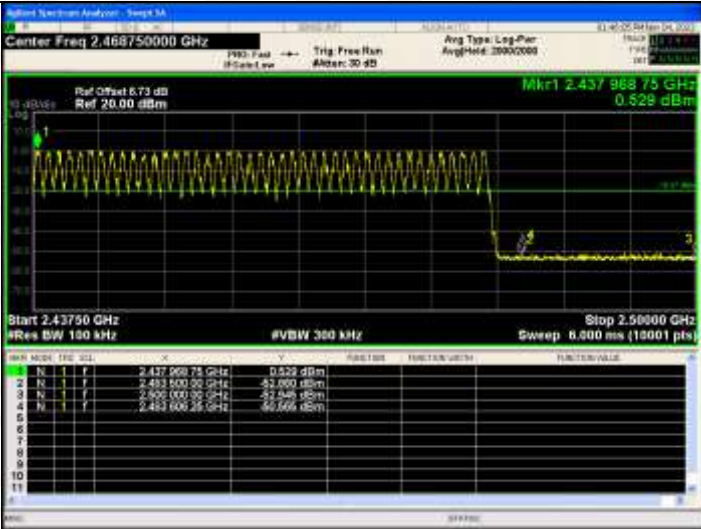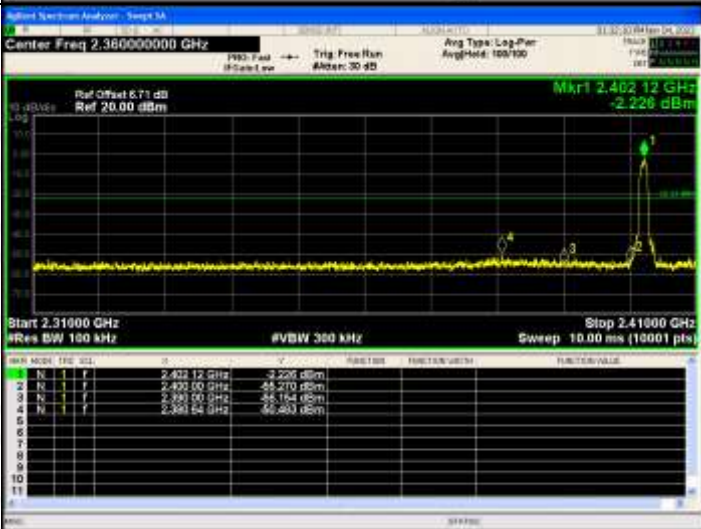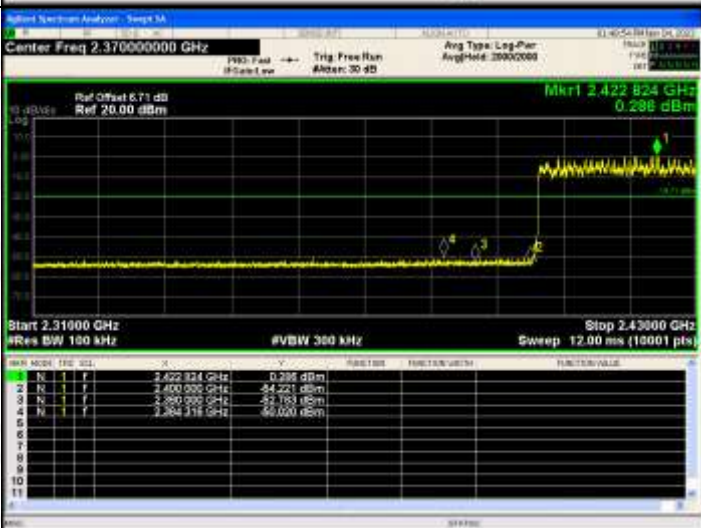GFSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.43798875 GHz 0.529 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><tr><th>SNR</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.43798875</td><td>0.529</td></tr><tr><td>2</td><td>N</td><td>2.483500000</td><td>-52.000</td></tr><tr><td>3</td><td>N</td><td>2.483500000</td><td>-52.000</td></tr><tr><td>4</td><td>N</td><td>2.483500000</td><td>-52.000</td></tr></table>	SNR	MODE	FREQ (GHz)	Power (dBm)	1	N	2.43798875	0.529	2	N	2.483500000	-52.000	3	N	2.483500000	-52.000	4	N	2.483500000	-52.000
SNR	MODE	FREQ (GHz)	Power (dBm)																		
1	N	2.43798875	0.529																		
2	N	2.483500000	-52.000																		
3	N	2.483500000	-52.000																		
4	N	2.483500000	-52.000																		
$\pi/4$ DQPSK/LCH/ No Hop	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.360000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.46212 GHz -2.226 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><tr><th>SNR</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.46212</td><td>-2.226</td></tr><tr><td>2</td><td>N</td><td>2.43350</td><td>-55.270</td></tr><tr><td>3</td><td>N</td><td>2.39150</td><td>-55.164</td></tr><tr><td>4</td><td>N</td><td>2.39154</td><td>-55.263</td></tr></table>	SNR	MODE	FREQ (GHz)	Power (dBm)	1	N	2.46212	-2.226	2	N	2.43350	-55.270	3	N	2.39150	-55.164	4	N	2.39154	-55.263
SNR	MODE	FREQ (GHz)	Power (dBm)																		
1	N	2.46212	-2.226																		
2	N	2.43350	-55.270																		
3	N	2.39150	-55.164																		
4	N	2.39154	-55.263																		
$\pi/4$ DQPSK/LCH/ Hop	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.370000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.422824 GHz 0.298 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts) <table><tr><th>SNR</th><th>MODE</th><th>FREQ (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>N</td><td>2.422824</td><td>0.298</td></tr><tr><td>2</td><td>N</td><td>2.40000</td><td>-54.221</td></tr><tr><td>3</td><td>N</td><td>2.38000</td><td>-52.783</td></tr><tr><td>4</td><td>N</td><td>2.364318</td><td>-50.020</td></tr></table>	SNR	MODE	FREQ (GHz)	Power (dBm)	1	N	2.422824	0.298	2	N	2.40000	-54.221	3	N	2.38000	-52.783	4	N	2.364318	-50.020
SNR	MODE	FREQ (GHz)	Power (dBm)																		
1	N	2.422824	0.298																		
2	N	2.40000	-54.221																		
3	N	2.38000	-52.783																		
4	N	2.364318	-50.020																		




RF Conducted Spurious Emissions Graphs


GFSK/LCH

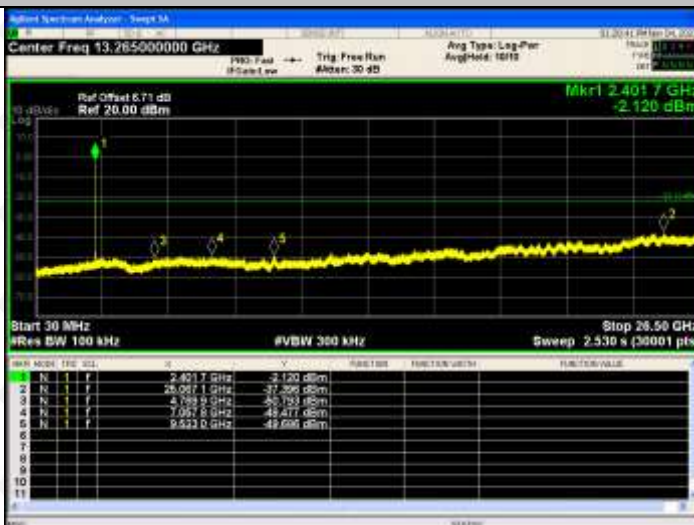


GFSK/MCH

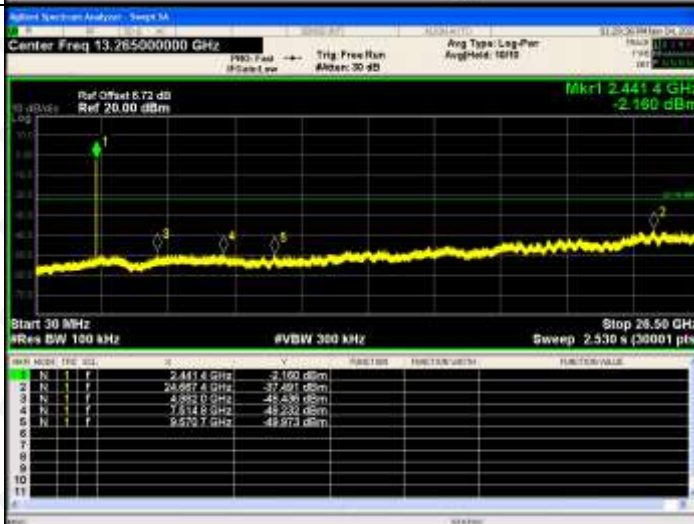




GFSK/HCH

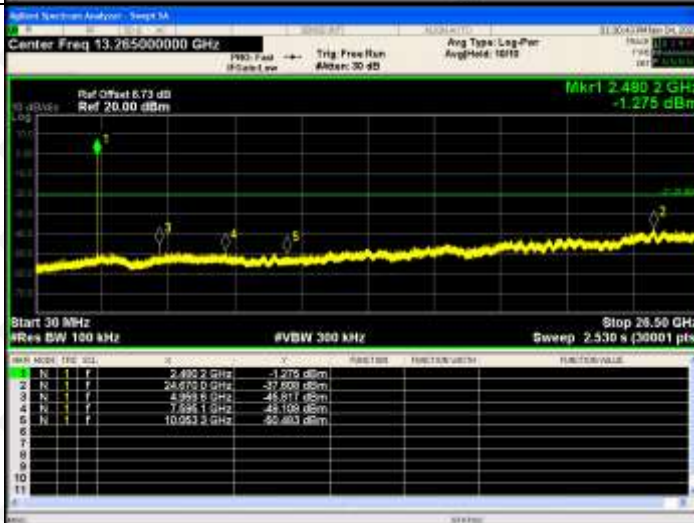

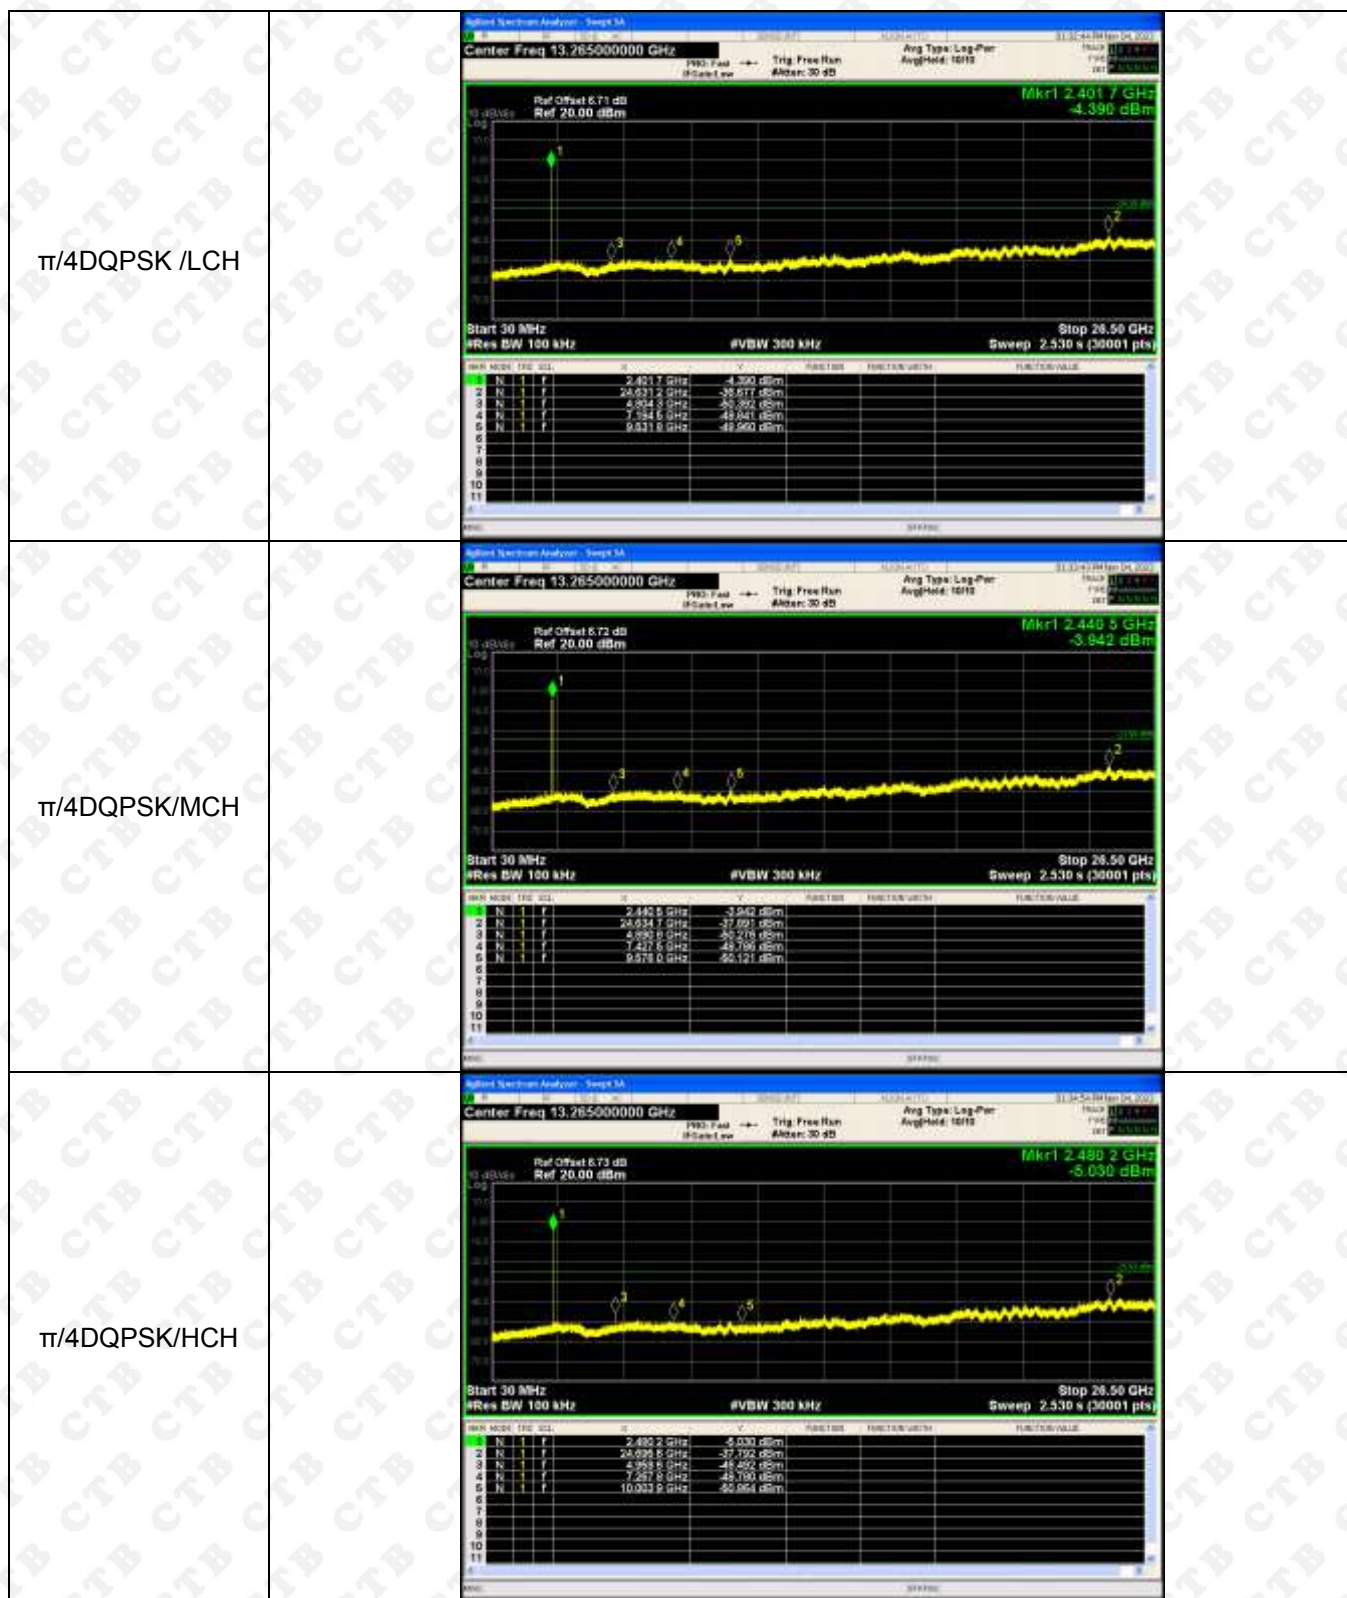

Right ear:

BAND EDGE Graphs

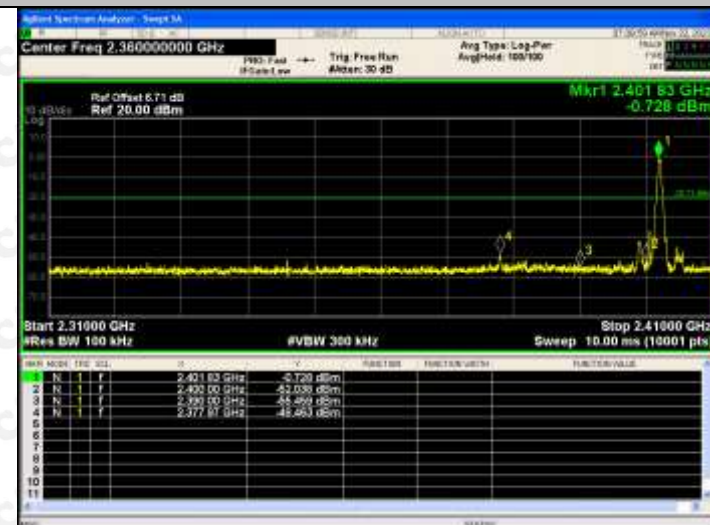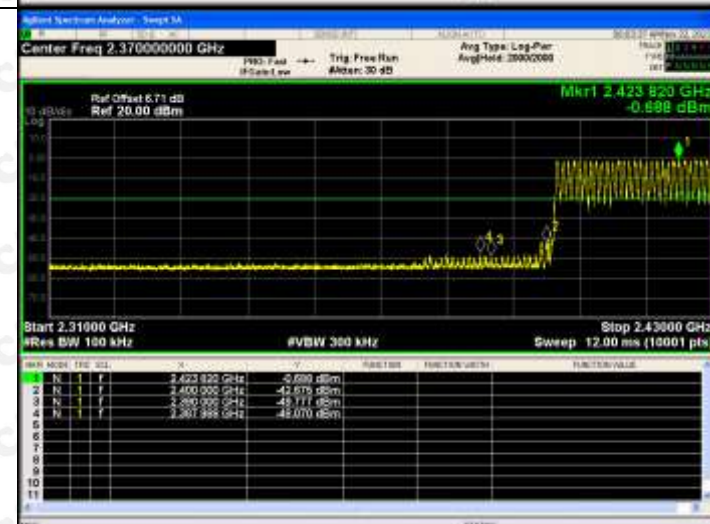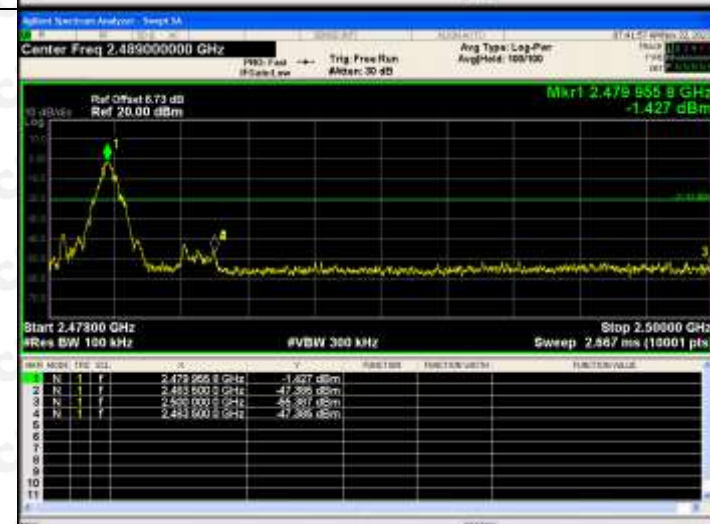
GFSK/LCH/
No Hop

GFSK/LCH/
Hop

GFSK/HCH/
No Hop


GFSK/HCH/ Hop		
$\pi/4$DQPSK/LCH/ No Hop		
$\pi/4$DQPSK/LCH/ Hop		

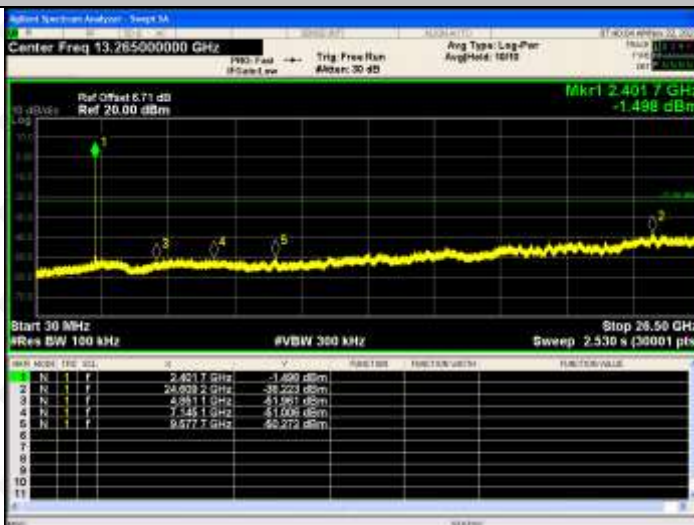


RF Conducted Spurious Emissions Graphs


GFSK/LCH





GFSK/MCH

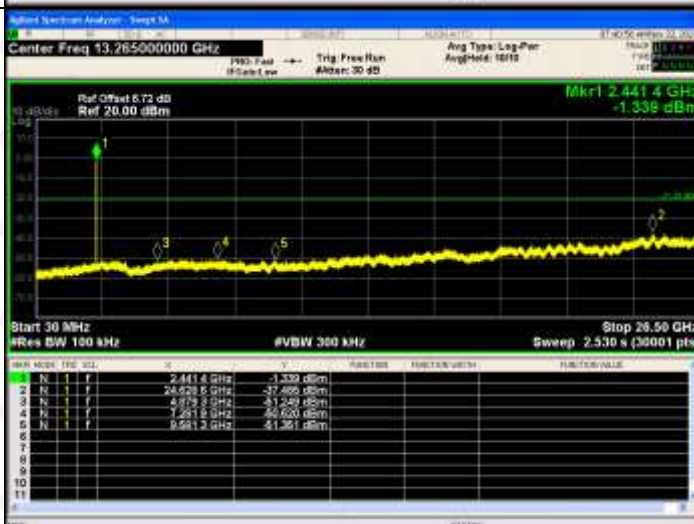


GFSK/HCH

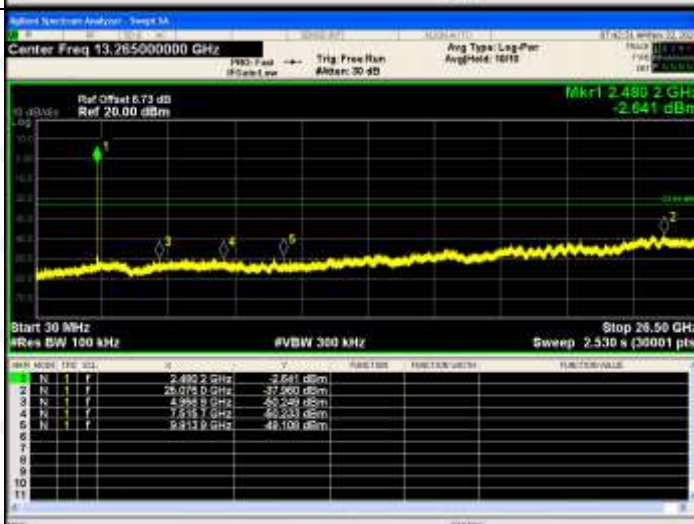

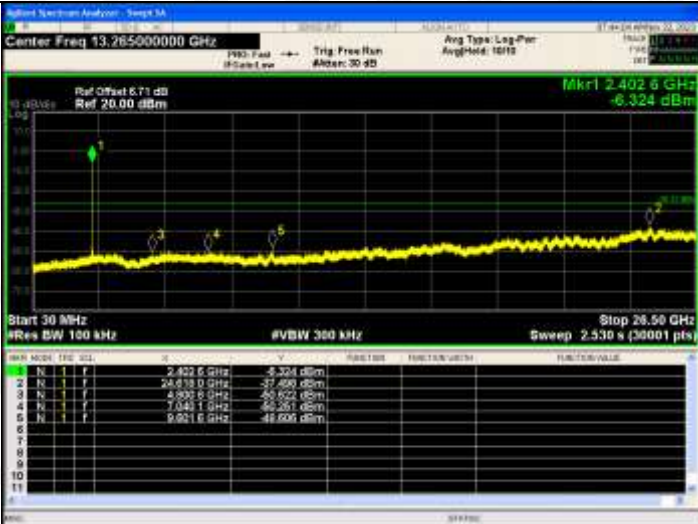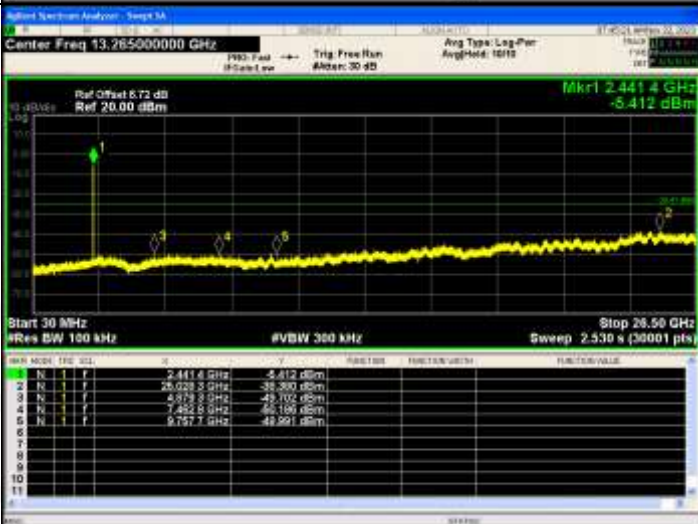$\pi/4$ DQPSK /LCH	 Ref Offset 6.71 dB Ref 20.00 dBm Center Freq 13.265000000 GHz Mkr1 2.4026 GHz -6.324 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>SN</th><th>MOD</th><th>FREQ</th><th>dB</th><th>UNIT</th><th>FUNCTION</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4026 GHz</td><td>-6.324</td><td>dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.618 GHz</td><td>-37.490</td><td>dBm</td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.839 GHz</td><td>-39.624</td><td>dBm</td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.041 GHz</td><td>-39.261</td><td>dBm</td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.021 GHz</td><td>-48.606</td><td>dBm</td><td></td><td></td></tr></table>	SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE	1	N	2.4026 GHz	-6.324	dBm			2	N	24.618 GHz	-37.490	dBm			3	N	4.839 GHz	-39.624	dBm			4	N	7.041 GHz	-39.261	dBm			5	N	9.021 GHz	-48.606	dBm		
SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE																																					
1	N	2.4026 GHz	-6.324	dBm																																							
2	N	24.618 GHz	-37.490	dBm																																							
3	N	4.839 GHz	-39.624	dBm																																							
4	N	7.041 GHz	-39.261	dBm																																							
5	N	9.021 GHz	-48.606	dBm																																							
$\pi/4$ DQPSK/MCH	 Ref Offset 6.73 dB Ref 20.00 dBm Center Freq 13.265000000 GHz Mkr1 2.4414 GHz -6.412 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>SN</th><th>MOD</th><th>FREQ</th><th>dB</th><th>UNIT</th><th>FUNCTION</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4414 GHz</td><td>-6.412</td><td>dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.028 GHz</td><td>-39.390</td><td>dBm</td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.873 GHz</td><td>-40.102</td><td>dBm</td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.492 GHz</td><td>-45.106</td><td>dBm</td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.757 GHz</td><td>-49.991</td><td>dBm</td><td></td><td></td></tr></table>	SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE	1	N	2.4414 GHz	-6.412	dBm			2	N	25.028 GHz	-39.390	dBm			3	N	4.873 GHz	-40.102	dBm			4	N	7.492 GHz	-45.106	dBm			5	N	9.757 GHz	-49.991	dBm		
SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE																																					
1	N	2.4414 GHz	-6.412	dBm																																							
2	N	25.028 GHz	-39.390	dBm																																							
3	N	4.873 GHz	-40.102	dBm																																							
4	N	7.492 GHz	-45.106	dBm																																							
5	N	9.757 GHz	-49.991	dBm																																							
$\pi/4$ DQPSK/HCH	 Ref Offset 6.73 dB Ref 20.00 dBm Center Freq 13.265000000 GHz Mkr1 2.4802 GHz -4.388 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>SN</th><th>MOD</th><th>FREQ</th><th>dB</th><th>UNIT</th><th>FUNCTION</th><th>VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4802 GHz</td><td>-4.388</td><td>dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.650 GHz</td><td>-38.070</td><td>dBm</td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.998 GHz</td><td>-42.301</td><td>dBm</td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.445 GHz</td><td>-45.431</td><td>dBm</td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.213 GHz</td><td>-48.867</td><td>dBm</td><td></td><td></td></tr></table>	SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE	1	N	2.4802 GHz	-4.388	dBm			2	N	24.650 GHz	-38.070	dBm			3	N	4.998 GHz	-42.301	dBm			4	N	7.445 GHz	-45.431	dBm			5	N	9.213 GHz	-48.867	dBm		
SN	MOD	FREQ	dB	UNIT	FUNCTION	VALUE																																					
1	N	2.4802 GHz	-4.388	dBm																																							
2	N	24.650 GHz	-38.070	dBm																																							
3	N	4.998 GHz	-42.301	dBm																																							
4	N	7.445 GHz	-45.431	dBm																																							
5	N	9.213 GHz	-48.867	dBm																																							

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

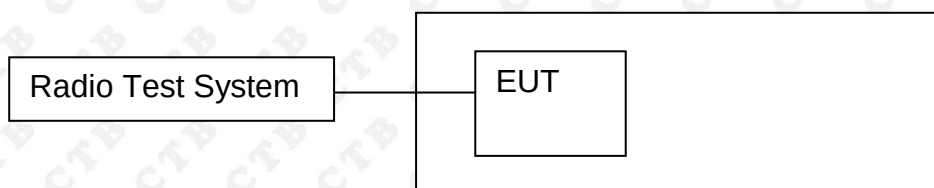

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.265	20.97	PASS
	MCH	0.52	20.97	PASS
	HCH	0.05	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	0.94	20.97	PASS
	MCH	1.172	20.97	PASS
	HCH	0.697	20.97	PASS

Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.621	20.97	PASS
	MCH	-0.895	20.97	PASS
	HCH	-0.394	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	0.24	20.97	PASS
	MCH	-0.052	20.97	PASS
	HCH	0.401	20.97	PASS

Left ear:

Test Graph:

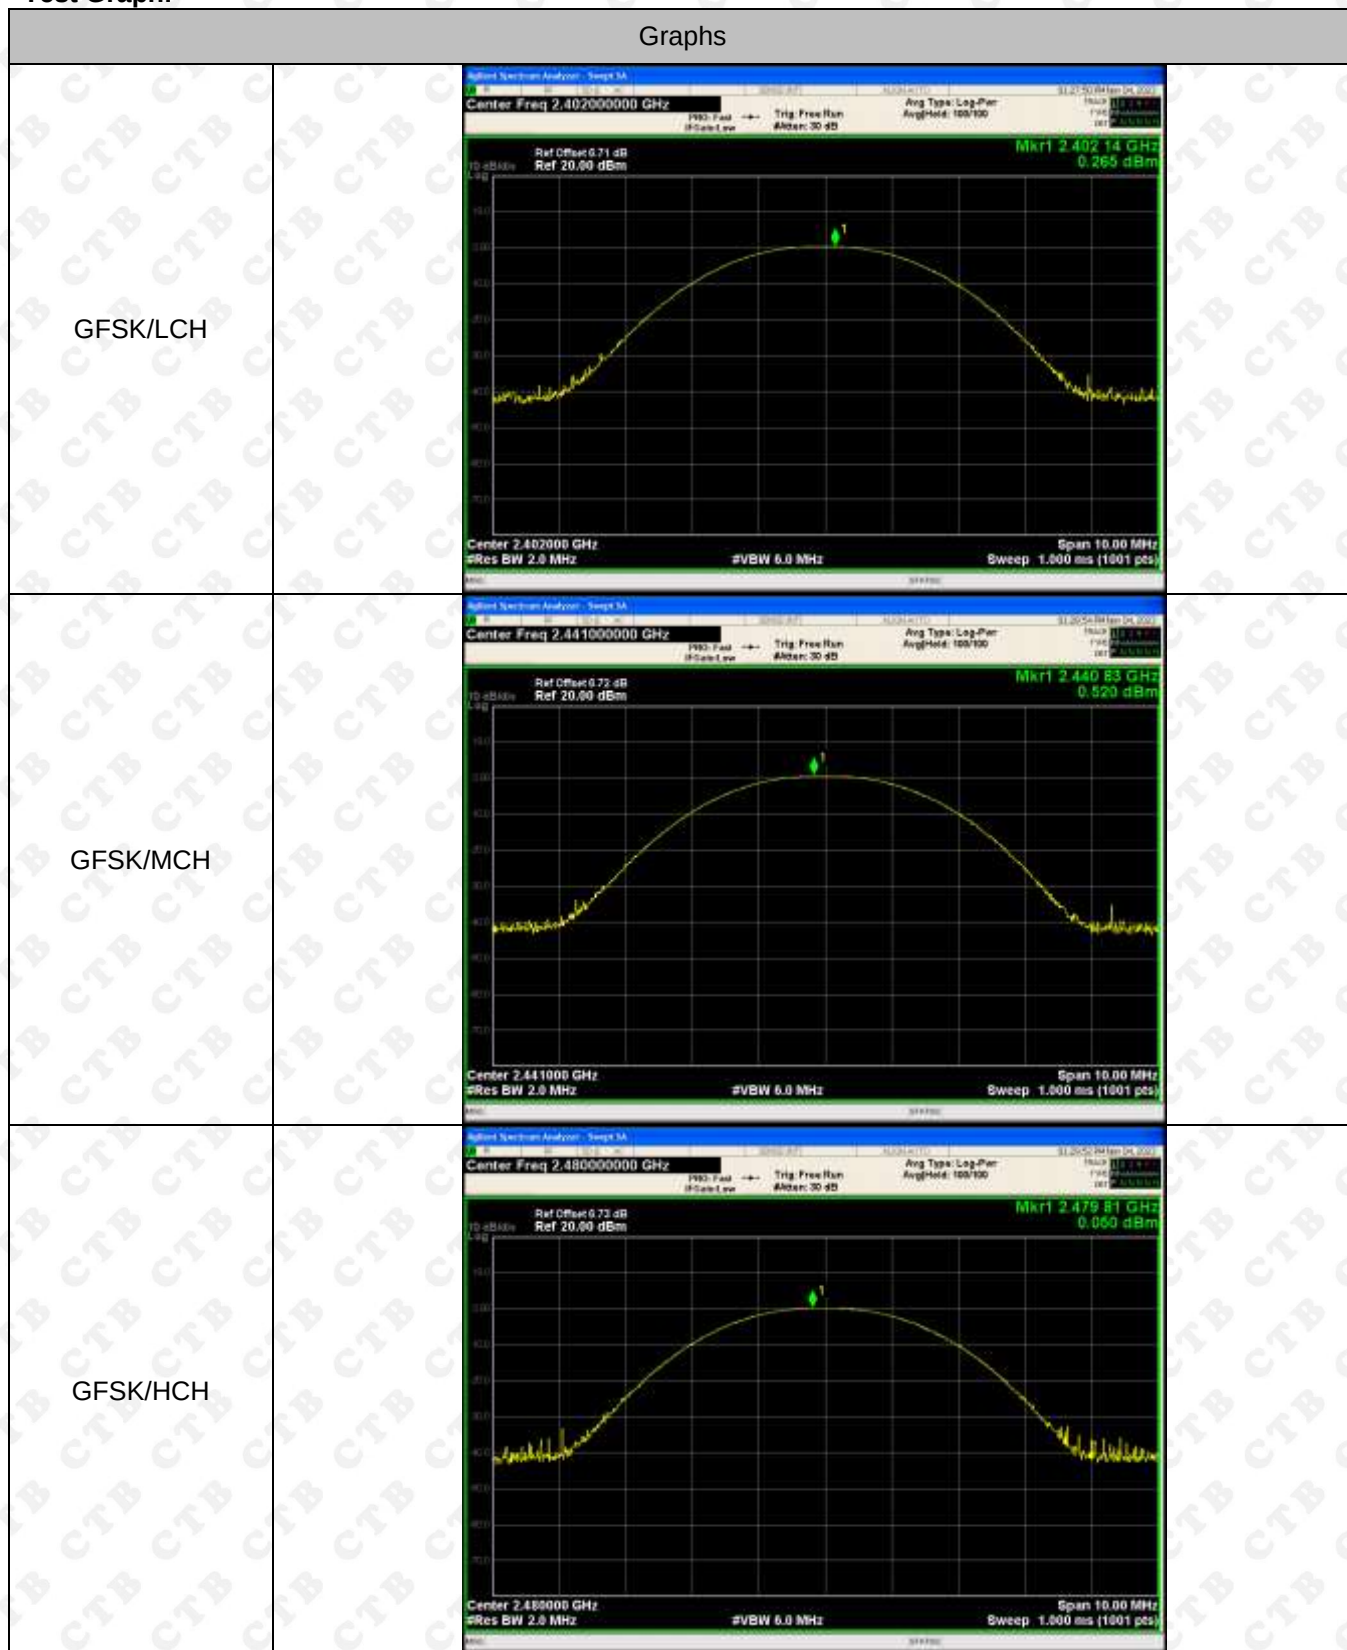

$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	


Right ear:
Test Graph:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

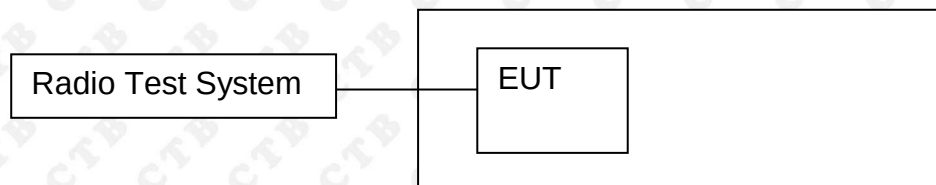

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.876	PASS
	Mid channel	0.853	PASS
	High channel	0.864	PASS
$\pi/4$ DQPSK	Low channel	1.285	PASS
	Mid channel	1.268	PASS
	High channel	1.314	PASS

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.857	PASS
	Mid channel	0.864	PASS
	High channel	0.875	PASS
$\pi/4$ DQPSK	Low channel	1.279	PASS
	Mid channel	1.319	PASS
	High channel	1.266	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Left ear:
Test Graph:

GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	


Right ear:
Test Graph:

GFSK Low channel		
GFSK Mid channel		
GFSK High channel		

$\pi/4$-DQPSK Low channel	 Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run AvgHold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 5.71 dB Ref: 26.71 dBm Mkr3: 2.402611 GHz -21.222 dBm Center: 2.402 GHz Res BW: 30 kHz N/BW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1852 MHz Total Power: 5.63 dBm Transmit Freq Error: -28.286 kHz OBW Power: 99.00 % x dB Bandwidth: 1.279 MHz x dB: -20.00 dB
$\pi/4$-DQPSK Mid channel	 Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run AvgHold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 5.72 dB Ref: 26.72 dBm Mkr3: 2.441832 GHz -25.337 dBm Center: 2.441 GHz Res BW: 30 kHz N/BW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1898 MHz Total Power: 4.96 dBm Transmit Freq Error: -27.484 kHz OBW Power: 99.00 % x dB Bandwidth: 1.319 MHz x dB: -20.00 dB
$\pi/4$-DQPSK High channel	 Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run AvgHold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 5.73 dB Ref: 26.73 dBm Mkr3: 2.4808 GHz -21.212 dBm Center: 2.48 GHz Res BW: 30 kHz N/BW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1703 MHz Total Power: 6.03 dBm Transmit Freq Error: -33.074 kHz OBW Power: 99.00 % x dB Bandwidth: 1.266 MHz x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

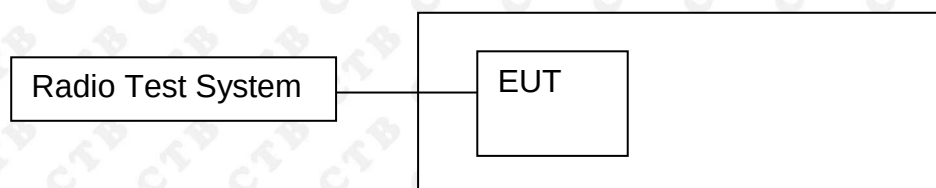

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Left ear:



Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.006	0.584	PASS
GFSK	MCH	0.996	0.569	PASS
GFSK	HCH	0.998	0.576	PASS
$\pi/4$ DQPSK	LCH	1.004	0.857	PASS
$\pi/4$ DQPSK	MCH	1.000	0.845	PASS
$\pi/4$ DQPSK	HCH	1.000	0.876	PASS

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.992	0.571	PASS
GFSK	MCH	1.002	0.576	PASS
GFSK	HCH	0.998	0.583	PASS
$\pi/4$ DQPSK	LCH	1.000	0.853	PASS
$\pi/4$ DQPSK	MCH	1.000	0.879	PASS
$\pi/4$ DQPSK	HCH	1.002	0.844	PASS


Left ear:
Test Graph

Graphs		
GFSK/LCH		
GFSK/MCH		
GFSK/HCH		

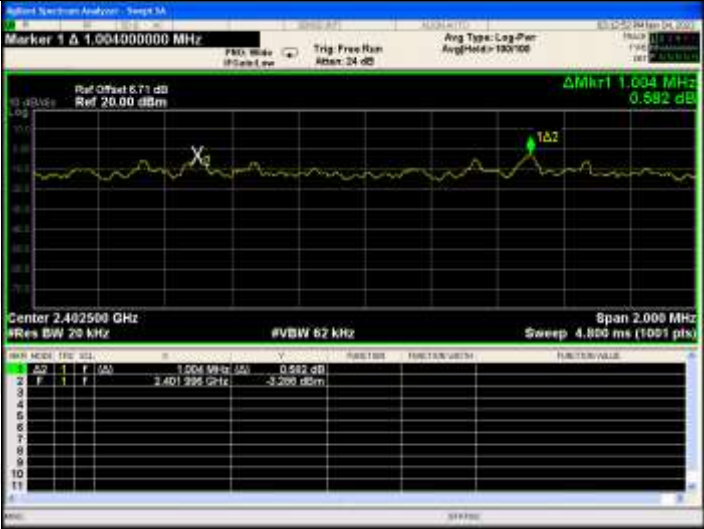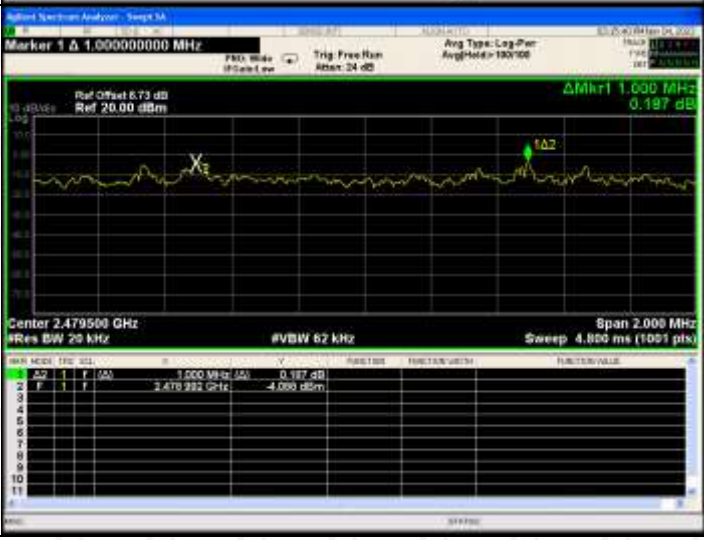$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	


Right ear:
Test Graph

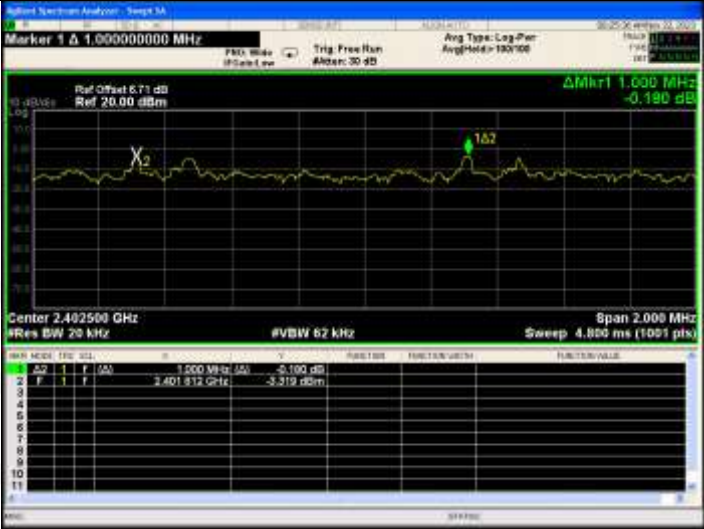

$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

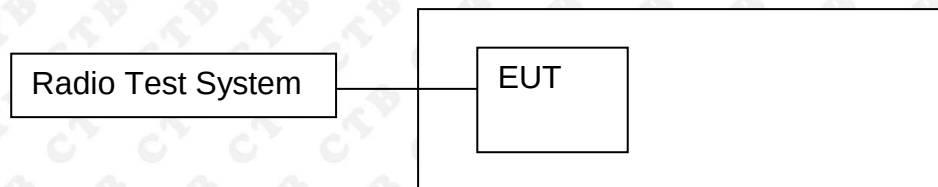

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS


Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS


Left ear:
Test Graph

Graphs

GFSK/Hop

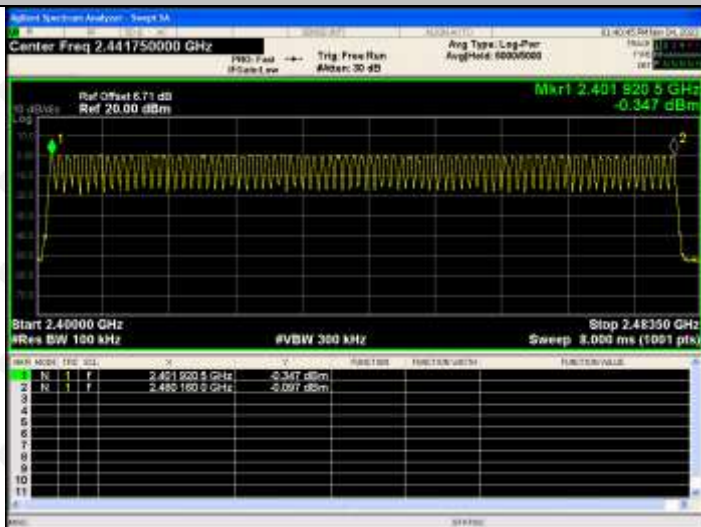


$\pi/4$ DQPSK/Hop

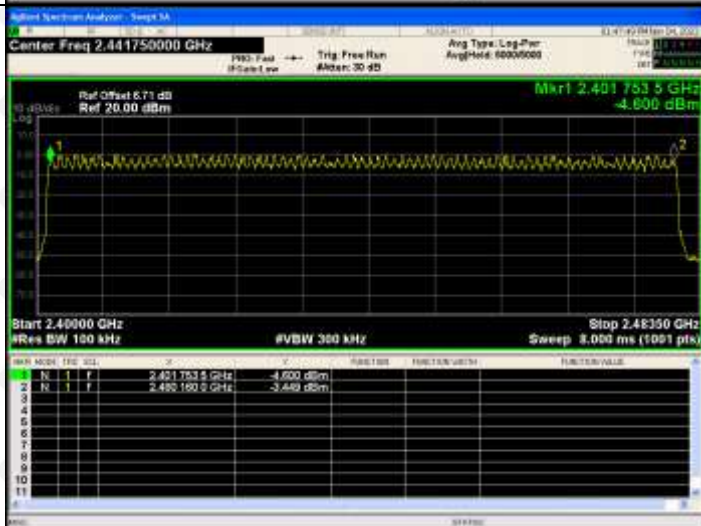


Right ear:
Test Graph

Graphs

GFSK/Hop

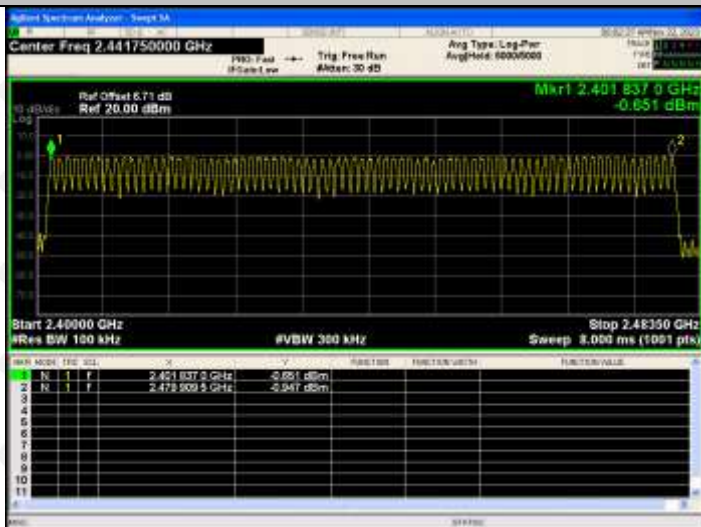


$\pi/4$ DQPSK/Hop

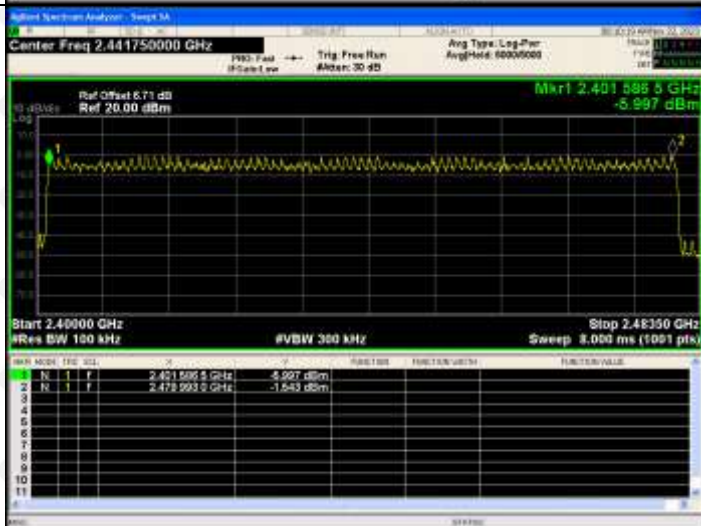

13. DWELL TIME

13.1 Block Diagram Of Test Setup

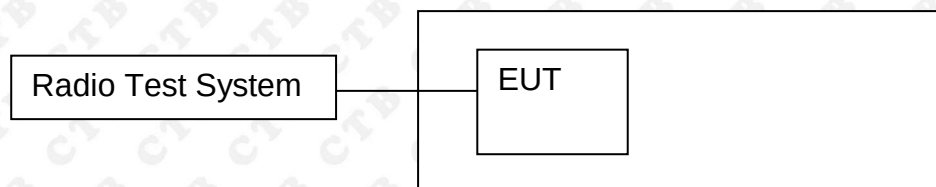

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.382	122.24	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.643	262.88	400	PASS
	DH5	LCH	2.887	307.947	400	PASS
	DH5	MCH	2.887	307.947	400	PASS
	DH5	HCH	2.886	307.84	400	PASS

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.376	120.32	400	PASS
	DH1	MCH	0.376	120.32	400	PASS
	DH1	HCH	0.376	120.32	400	PASS
	DH3	LCH	1.638	262.08	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.881	307.307	400	PASS
	DH5	MCH	2.881	307.307	400	PASS
	DH5	HCH	2.88	307.2	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Left ear:
Test Graph

Graphs


GFSK_DH1/LCH

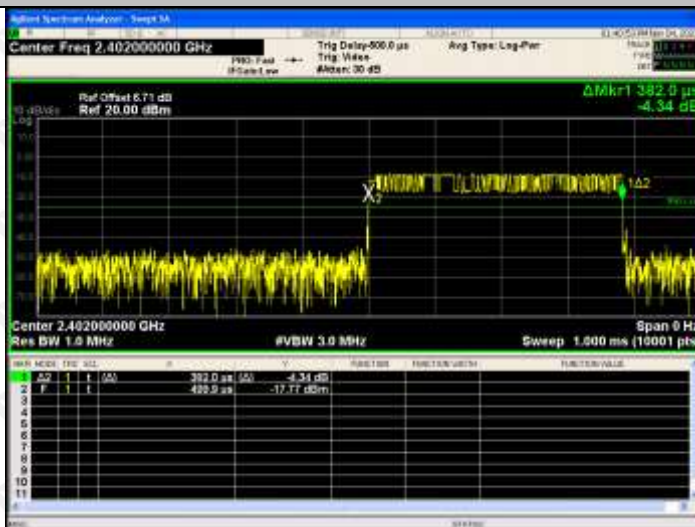


GFSK_DH1/MCH

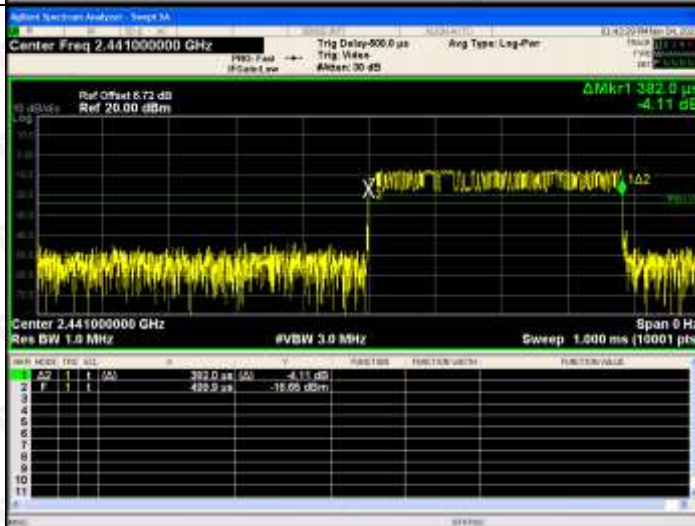


GFSK_DH1/HCH

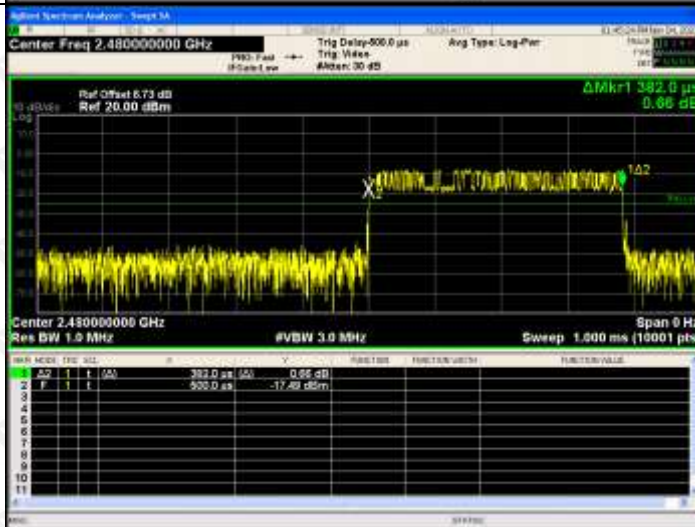


GFSK_DH3/LCH

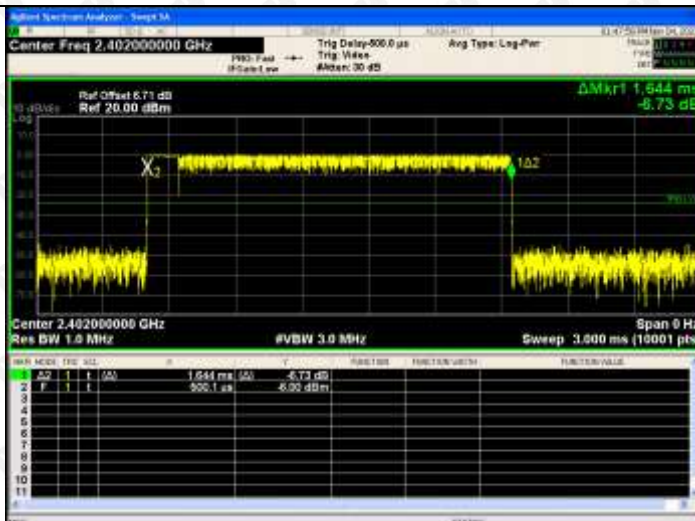


GFSK_DH3/MCH

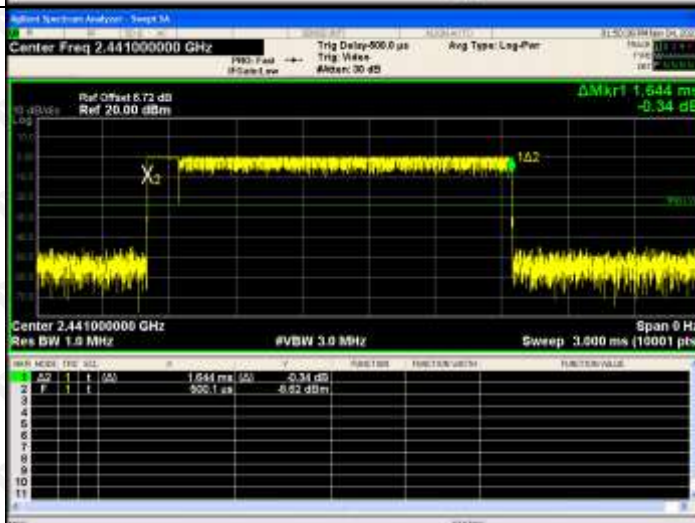


GFSK_DH3/HCH

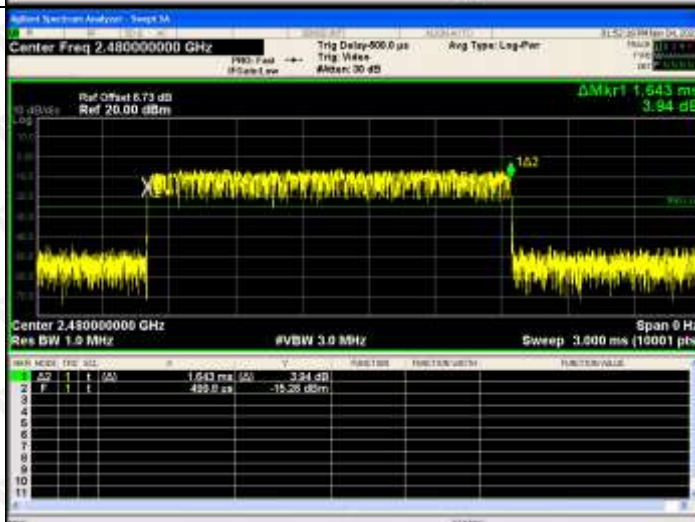


GFSK_DH5/LCH

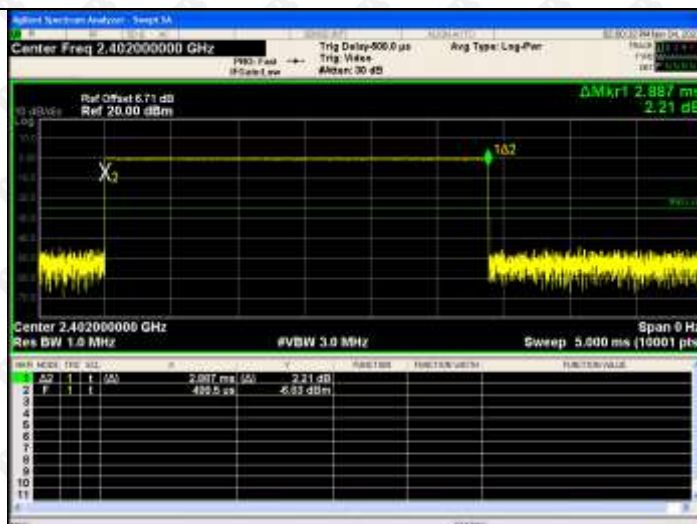

GFSK_DH5/MCH

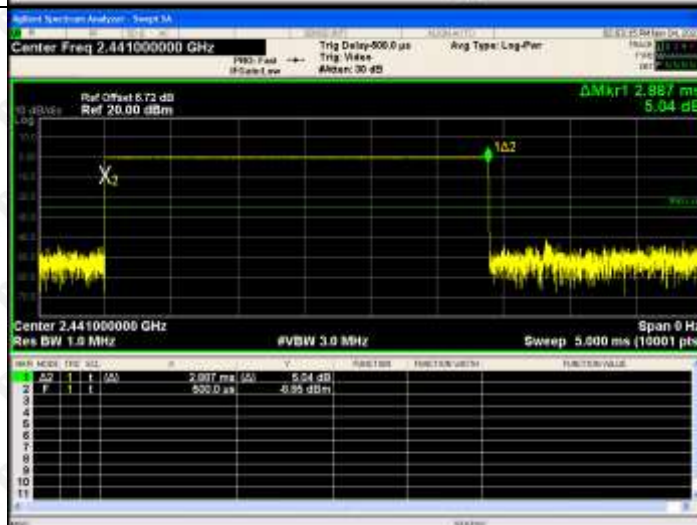


GFSK_DH5/HCH

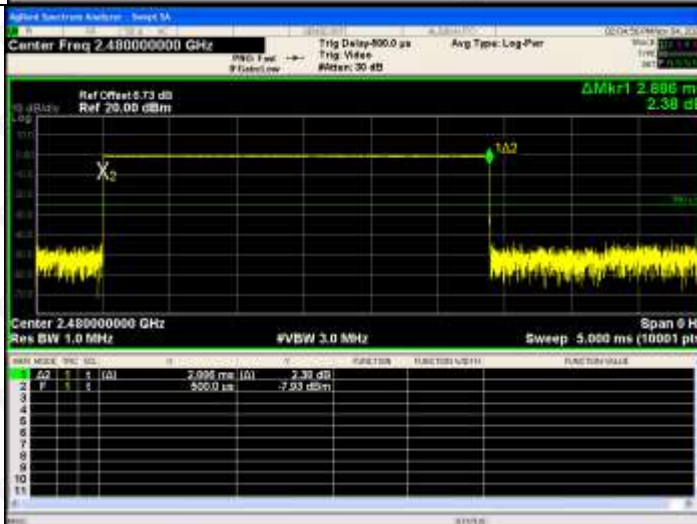


Right ear:
Test Graph

Graphs


GFSK_DH1/LCH

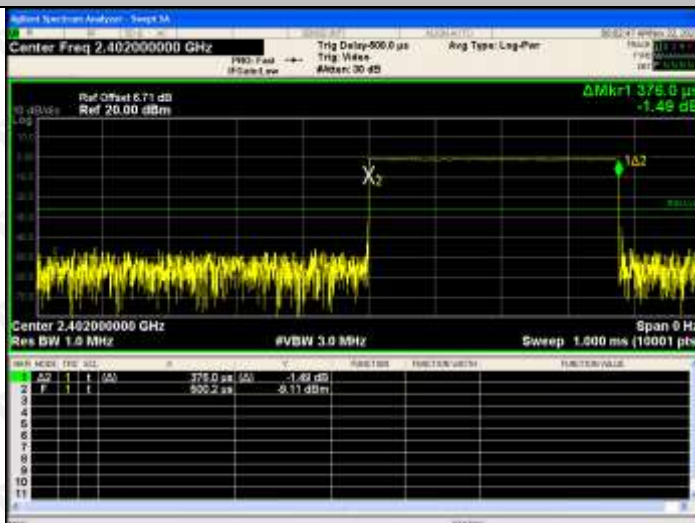

GFSK_DH1/MCH

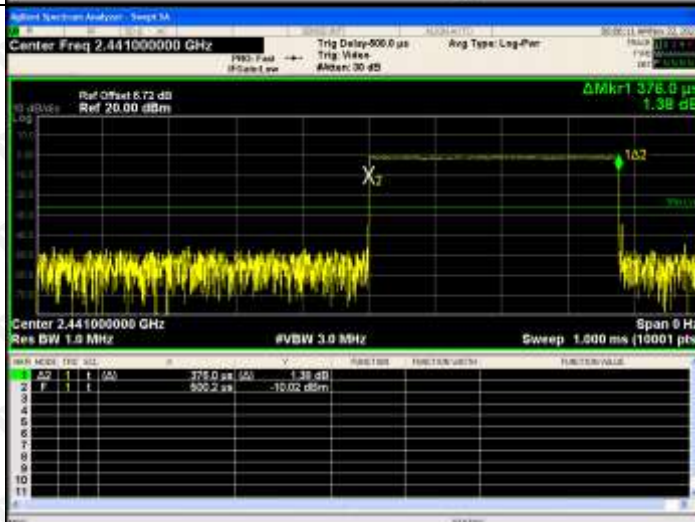

GFSK_DH1/HCH

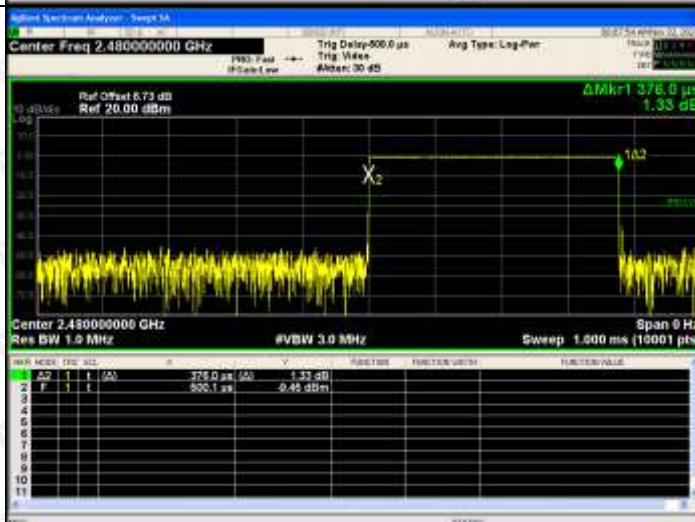

The screenshot displays a Vector Signal Analyzer (VSA) interface. The top section shows the center frequency at 2.402000000 GHz. The spectrum plot shows a signal with a peak at 1.62. The bottom section shows a table of measurement results.

Center Freq 2.402000000 GHz

Trig Delay: 500.0 μ s

Arg Type: Log/Per

Ref Offset: 8.71 dB

Ref: 20.00 dBm

Span: 0 Hz

Res BW: 1.0 MHz

#VBW: 3.0 MHz

Sweep: 5.000 ms (10001 pts)

Measurement Results Table:

SNR	MEAS	TRIG	VAL	UNIT	FUNCTION	FUNCTION VALUE	FUNCTION VALUE
1	AR	1	1	dB	2.091 ms (dB)	-6.04 dB	
2	F	1	1	dB	499.5 ps	-17.30 dBm	
3							
4							
5							
6							
7							
8							
9							
10							
11							

Spectrum Analyzer

Center Freq 2.441000000 GHz

Trig Delay: 500.0 μ s
Trig Video
Athen: 30 dB

Arg Type: Log-Per

Ref Offset: 8.73 dB
Ref: 20.00 dBm

$\Delta \text{Max} = 1.951 \text{ mV}$
 -3.24 dB

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 3.0 MHz
Sweep 5.000 ms (10001 pts)

SWR MODE	FREQ	UNIT	V	RESBW	FUNCTION	FUNCTION VALUE
1	AZ	f	t	(dB)	2.091 ms (dB)	-3.24 dB
2	F	f	t	(dB)	488.5 ps	-17.41 dBm
3						
4						
5						
6						
7						
8						
9						
10						
11						

The screenshot shows a Keysight Spectrum Analyzer interface. The main display is a frequency spectrum plot with a center frequency of 2.480000000 GHz. The plot shows a noisy signal with a prominent peak at 1.0 dB. The peak is labeled '1.02'. The plot has a grid with a span of 0 Hz and a resolution bandwidth (RBW) of 1.0 MHz. The vertical axis is labeled 'dBm' and ranges from -10 to 10. The horizontal axis is labeled 'Frequency' and ranges from 2.475 to 2.485 GHz. The plot also shows a reference level at 20.00 dBm and a reference offset of 5.73 dB. The plot is labeled 'X2'.

Center Freq 2.480000000 GHz

Ref Offset 5.73 dB
Ref 20.00 dBm

Trig Delay: 500.0 μ s
Trig Wave
Athen: 30 dB

Arg Type: Log-Per

Span 0 Hz
Res BW 1.0 MHz
#VBW 3.0 MHz
Sweep 5.000 ms (10001 pts)

CHN	MODE	FREQ	SQL	dB	V	RES1BW	RES2BW/SPAN	FUNCTION/VALUE
1	A2	f	f	(dB)	2.000 ms (50)	0.43 dB		
2	F	f	f		500.0 μ s	-5.21 dBm		
3								
4								
5								
6								
7								
8								
9								
10								
11								

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

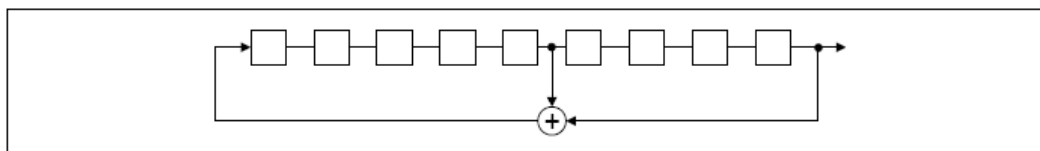

An example of Pseudorandom Frequency Hopping Sequence as follow:

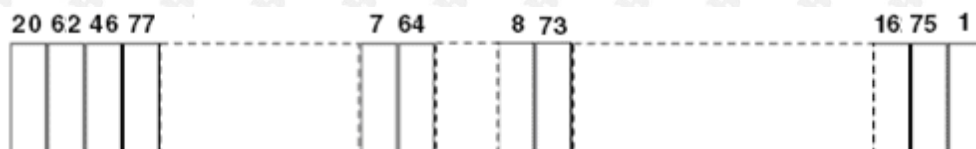

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Chip Antenna. The best case gain of the antenna is 1.72dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****