

FCC 47 CFR PART 15 SUBPART B

(ICES-003) TEST REPORT

Test Report No. : OT-244-RED-071
Reception No. : 2403001145
Applicant : LG Electronics USA, Inc.
Address : 111 Sylvan Ave, North Building, Englewood Cliffs, New Jersey, 07632, United States
Manufacturer : LG Electronics Inc.
Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 17709, Rep. of Korea
Use of Report : FCC Supplier's Declaration of Conformity
Type of Equipment : Bluetooth Earbud
Model Name : TONE-FP8
Multiple Model Name : Refer to the clause section 3.2
FCC ID. : ZNFTONEFP8
Serial number : N/A
Total page of Report : 20 pages (including this page)
Date of Incoming : April 02, 2024
Test Period : April 03, 2024 ~ April 05, 2024
Date of Issuing : April 15, 2024

SUMMARY


The equipment complies with the requirement of


ANSI C63.4a: 2017 / FCC Part 15 Subpart B (Other Class B digital devices & peripherals)


ICES-003 Issue 7 / CAN/CSA-CISPR 32:17

This test report contains only the results of a single test of the sample supplied for the examination.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.


Tested by:
 Jae-Yeon, Kim / Engineer
 EMC Testing Div.
 ONETECH Corp.


Reviewed by:
 Sun-Teak, Oh / Manager
 EMC Testing Div.
 ONETECH Corp.


Approved by:
 Seung-Hyun, Park / Senior Manager
 EMC Testing Div.
 ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	5
2. TEST FACILITY.....	6
3. PRODUCT INFORMATION.....	7
3.1 DESCRIPTION OF EUT.....	7
3.2 MODEL DIFFERENCES.....	8
3.3 SUPPORT EQUIPMENT	9
3.4 SYSTEM CONFIGURATION.....	9
3.5 CABLE DESCRIPTION FOR THE EUT	9
3.6 EQUIPMENT MODIFICATIONS	9
3.7 INFORMATION OF MEASUREMENT SOFTWARE.....	9
4. TEST SUMMARY.....	10
4.1 TEST STANDARDS AND RESULT	10
4.2 TEST CONDITION.....	10
5. FINAL RESULT OF MEASUREMENT.....	11
5.1 CONDUCTED DISTURBANCE	11
5.1.1 Test Date.....	11
5.1.2 Operating Environment	11
5.1.3 Test Setup	11
5.1.4 Measurement uncertainty.....	11
5.1.5 Limit	11
5.1.6 Test Equipment used.....	11
5.1.7 Test data	12
5.2 RADIATED DISTURBANCE	14
5.2.1 Test Date.....	14
5.2.2 Operating Environment	14
5.2.3 Test Setup	14
5.2.4 Measurement uncertainty.....	14
5.2.5 Limit	15
5.2.6 Test Equipment used.....	15
5.2.7 Test Data	16
6. SAMPLE CALCULATIONS	20

APPENDIX A – TEST SET-UP PHOTOGRAPHS

APPENDIX B – PHOTOGRAPHS OF EUT

APPENDIX C – DECLARATION OF CONFORMITY

APPENDIX D – LABELLING REQUIREMENTS / INFORMATION TO THE USER IN USER'S MANUAL

Revision History

Rev. No.	Issued Report No.	Issued Date	Revisions	Section Affected
0	OT-216-RED-010	June 03, 2021	Initial Issue	All
1	OT-216-RED-071	April 15, 2024	Added Multiple Model Names	1 Page and Section 3.2
2	OT-244-RED-071	April 15, 2024	Changed the PCB Manufacturer of Earbud	All

* Please contact us (e-mail: info@onetech.co.kr) for verification of this test report.

1. VERIFICATION OF COMPLIANCE

APPLICANT	LG Electronics USA, Inc. 111 Sylvan Ave, North Building, Englewood Cliffs, New Jersey, 07632, United States
NAME AND ADDRESS OF FACTORY	BLUECOM C5-4, Area CN1, Trang Due Industrial Park, An Duong District, Haiphong City, Vietnam

EQUIPMENT CLASS	Other Class B digital devices & peripherals
E.U.T. DESCRIPTION	Bluetooth Earbud
MEASUREMENT PROCEDURES	ANSI C63.4a: 2017
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Supplier's Declaration of Conformity (SDoC)
STANDARDS	FCC Part 15, Section 15.101 (Class B) Canadian Standard ICES-003 Issue 7
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m Semi anechoic chamber

ONETECH Corp. tested the above equipment in accordance with the requirements set forth in the above standard. The test results show that equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


2. TEST FACILITY

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025 by Radio Research Agency as accreditation body. The Onetech Corp. is accredited for measuring devices subject to Declaration of Conformity (DOC) under Parts 15 & 18 as a Conformity Assessment Body (CAB) with designation number KR0013.

These measurement tests were conducted at Onetech Corp.

The 10 m semi anechoic chamber and conducted measurement facilities are located at

- 1) 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.
- 2) 12-5, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

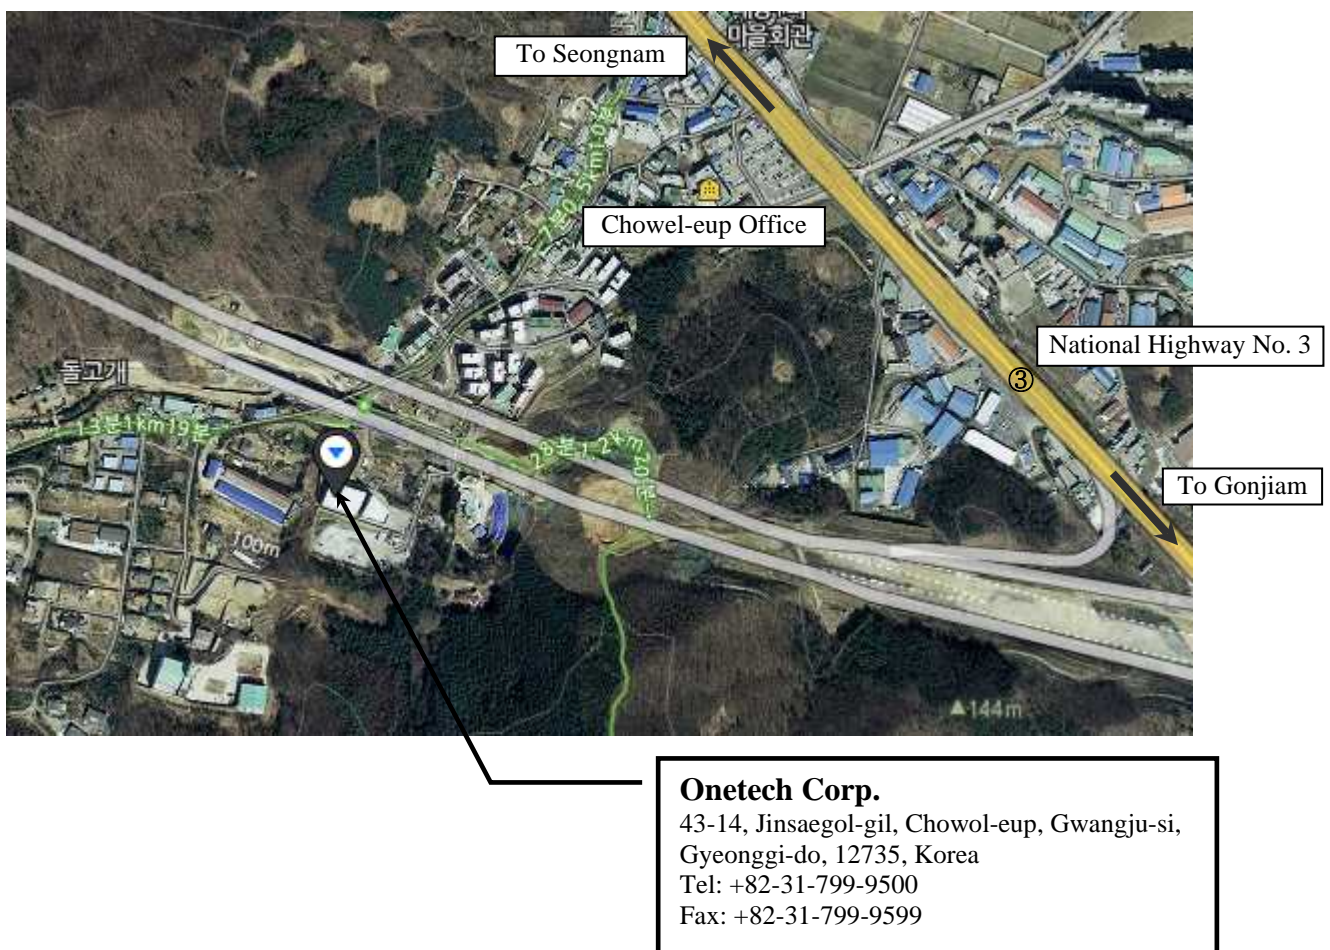

3. PRODUCT INFORMATION

3.1 Description of EUT

The LG Electronics USA, Inc., Model TONE-FP8 (referred to as the EUT in this report) is a Bluetooth Earbud.

Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. or CRY. FREQ. (FREQ. \geq 1 MHz)	20 MHz
RF FREQ.	2 402 MHz ~ 2 480 MHz
ELECTRICAL RATING	Earbud: DC 5 V, 110 mA Charging case : DC 5 V, 500 mA
NUMBER OF PCB LAYERS	-
EXTERNAL CONNECTOR	Earbud: Charging terminals Charging case : Charging terminals, Charge port(USB Type C)
Temperature Range	0 °C ~ 40 °C

3.2 Model Differences

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
TONE-FP8	Basic Model (Charcoal)	<input checked="" type="checkbox"/>
TONE-FP8W	This model is identical to the basic model except for the Color (White) and model name.	<input type="checkbox"/>
TONE-FP8E	This model is identical to the basic model except for the Color (Beige) and model name.	<input type="checkbox"/>
TONE-TFP8	This model is identical to the basic model except for the Marketing area (Korea) and model name.	<input type="checkbox"/>
TONE-TFP8W	This model is identical to the basic model except for the Color(White), Marketing area (KOREA) and model name.	<input type="checkbox"/>
TONE-TFP8E	This model is identical to the basic model except for the Color(Beige), Marketing area (KOREA) and model name.	<input type="checkbox"/>
TONE-UFP8	This model is identical to the basic model except for the Marketing area (United Kingdom) and model name.	<input type="checkbox"/>
TONE-UFP8W	This model is identical to the basic model except for the Color(White), Marketing area (United Kingdom) and model name.	<input type="checkbox"/>
TONE-UFP8E	This model is identical to the basic model except for the Color(Beige), Marketing area (United Kingdom) and model name.	<input type="checkbox"/>
TONE-DFP8	This model is identical to the basic model except for the Marketing area (Germany) and model name.	<input type="checkbox"/>
TONE-DFP8W	This model is identical to the basic model except for the Color(White), Marketing area (Germany) and model name.	<input type="checkbox"/>
TONE-DFP8E	This model is identical to the basic model except for the Color(Beige), Marketing area (Germany) and model name.	<input type="checkbox"/>
TONE-AFP8	This model is identical to the basic model except for the Marketing area (Australia) and model name.	<input type="checkbox"/>
TONE-AFP8W	This model is identical to the basic model except for the Color(White), Marketing area (Australia) and model name.	<input type="checkbox"/>
TONE-AFP8E	This model is identical to the basic model except for the Color(Beige), Marketing area (Australia) and model name.	<input type="checkbox"/>
TONE-FP8A	This model is identical to the basic model except for the Marketing area (Australia) and model name.	<input type="checkbox"/>
TONE-FP8WA	This model is identical to the basic model except for the Color(White), Marketing area (Australia) and model name.	<input type="checkbox"/>
TONE-FP8EA	This model is identical to the basic model except for the Color(Beige), Marketing area (Australia) and model name.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore, this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

3.3 Support Equipment

The model numbers for all the equipment that were used in the tested system is:

Description	Model	Manufacturer	Connected to
Bluetooth Earbud (EUT)	TONE-FP8	LG Electronics Inc.	-
Adapter	ETA-U90KBK	RF Tech	EUT

3.4 System Configuration

DEVICE TYPE	MODEL/PART NUMBER	MANUFACTURER
Bluetooth Earbud	TONE-FP8	LG Electronics Inc.

3.5 Cable Description for the EUT

Port name		Shielded	Ferrite Bead	Metal Shell	Length (m)	Connected to
Earbud	Charging terminals	-	-	-	-	Cradle
	Charging terminals	-	-	-	-	Earbud
Cradle	Charge port(USB Type C)	Y	N	N	0.5	Adapter

3.6 Equipment Modifications

-. None

3.7 Information of Measurement Software

	Chamber name	Software name	Software version
<input type="checkbox"/> -	Conducted Emission #1	Noise Terminal Voltage Measurement	2.00.0180
<input type="checkbox"/> -	Conducted Emission #2	EMC32	10.60.10
<input checked="" type="checkbox"/> -	Conducted Emission #3	Noise Terminal Voltage Measurement	2.00.0178
<input type="checkbox"/> -	Radiated Emission 10 m SAC 1	Radiated Emission Measurement	2.00.0201
<input checked="" type="checkbox"/> -	Radiated Emission 10 m SAC 2	Radiated Emission Measurement	2.00.0202
<input type="checkbox"/> -	Radiated Emission 3 m SAC	Radiated Emission Measurement	2.00.0202

4. TEST SUMMARY

4.1 Test standards and result

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4a: 2017 CAN/CSA-CISPR 32:17	C
Radiated Disturbance	ANSI C63.4a: 2017 CAN/CSA-CISPR 32:17	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

4.2 Test Condition

The test conditions of the noted test mode(s) in this test report are;

-. Test Voltage / Frequency: 120 V~, 60 Hz

-. Test Mode(s)

Test Mode		Operating States
1	Charging	a) The USB Type C port on the EUT was connected to the adapter and then the EUT was charging operate.

5. FINAL RESULT OF MEASUREMENT

Exploratory measurement was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Disturbance

5.1.1 Test Date

Test Date	April 04, 2024
-----------	----------------

5.1.2 Operating Environment

Temperature (°C)	20.4
Relative humidity (% R.H.)	38.5

5.1.3 Test Setup

The EUT and other support equipment were placed on a non-conductive table, 0.8 m height above the reference ground plane. The power of EUT was fed through a 50 Ω / 50 μ H + 5 Ω LISN. The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

5.1.4 Measurement uncertainty

Conducted emission, quasi-peak detection : 2.1 dB

Conducted emission, CISPR-average detection : 2.1 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor, $k = 2$.

5.1.5 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	CISPR Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

5.1.6 Test Equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - ESCI	Rohde & Schwarz	Test Receiver	101420	Mar. 05, 2024 (1Y)
■ - LT32C/10	Afj Instruments	LISN	32032039322	Mar. 05, 2024 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Mar. 05, 2024 (1Y)
■ - VTSD 9561-F	Schwarzbeck	Pulse Limiter	01365	Nov. 23, 2023 (1Y)

All test equipment used is calibrated on a regular basis.

5.1.7 Test data

-. Test Result : Pass

Test Mode 1 (Charging)			
Frequency range	: 0.15 MHz ~ 30 MHz	Tested Line	: HOT LINE
Resolution bandwidth	: 9 kHz		

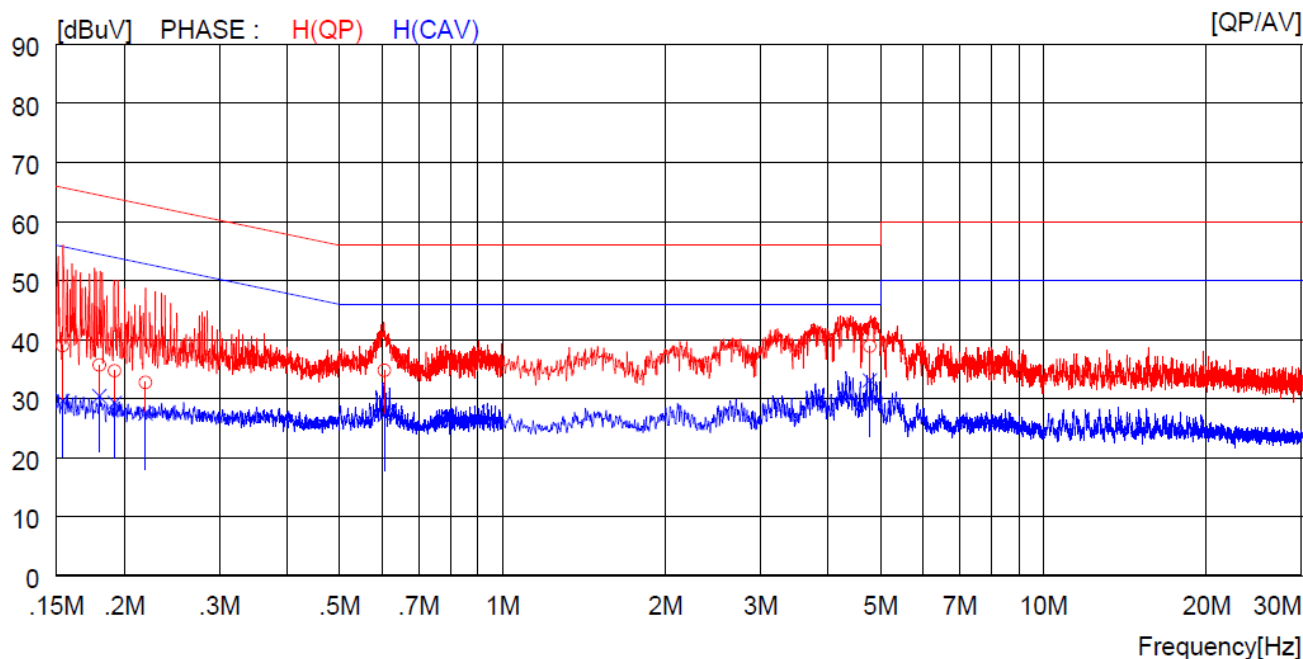


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	17.5	----	21.5	39.0	----	65.8	----	26.8	----	H (QP)
2	0.18000	14.2	----	21.5	35.7	----	64.5	----	28.8	----	H (QP)
3	0.19200	13.2	----	21.5	34.7	----	63.9	----	29.2	----	H (QP)
4	0.21900	11.2	----	21.5	32.7	----	62.9	----	30.2	----	H (QP)
5	0.60500	13.3	----	21.5	34.8	----	56.0	----	21.2	----	H (QP)
6	4.77600	17.4	----	21.5	38.9	----	56.0	----	17.1	----	H (QP)
7	0.15400	----	8.1	21.5	----	29.6	----	55.8	----	26.2	H (CAV)
8	0.18000	----	8.9	21.5	----	30.4	----	54.5	----	24.1	H (CAV)
9	0.19200	----	7.8	21.5	----	29.3	----	53.9	----	24.6	H (CAV)
10	0.21900	----	6.0	21.5	----	27.5	----	52.9	----	25.4	H (CAV)
11	0.60500	----	5.7	21.5	----	27.2	----	46.0	----	18.8	H (CAV)
12	4.77600	----	11.6	21.5	----	33.1	----	46.0	----	12.9	H (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The result level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Test Mode 1 (Charging)			
Frequency range	: 0.15 MHz ~ 30 MHz	Tested Line	: NEUTRAL LINE
Resolution bandwidth	: 9 kHz		

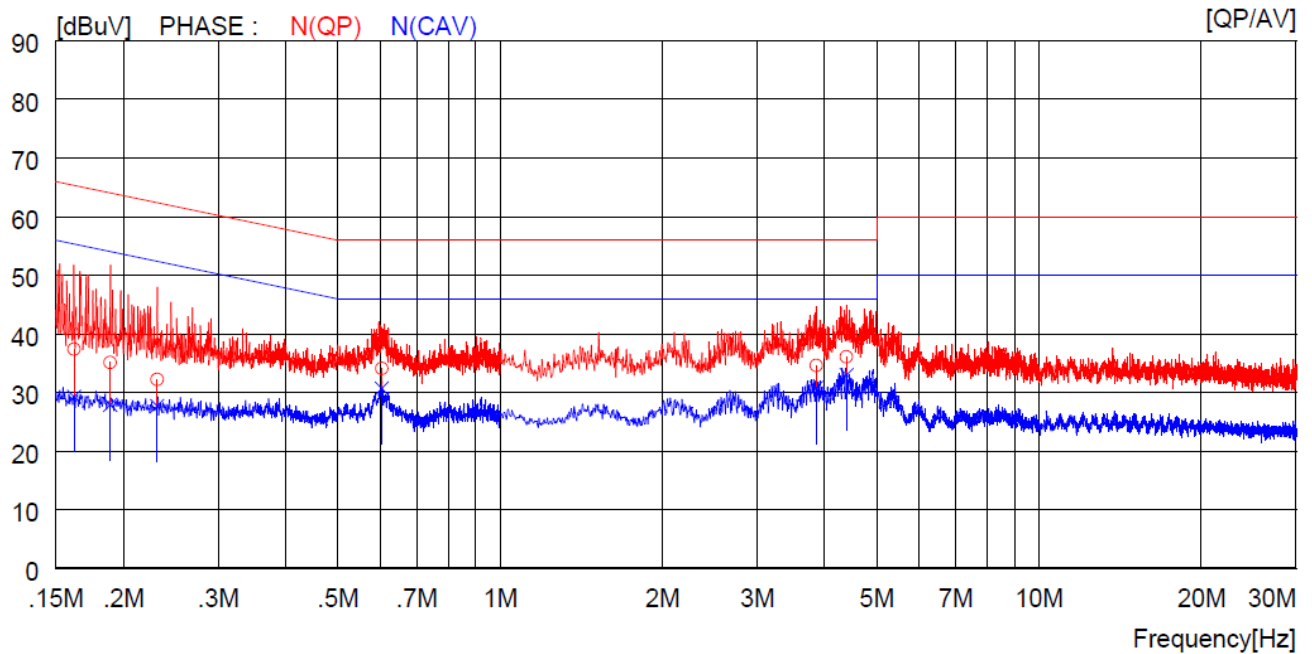

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16200	15.9	----	21.5	37.4	----	65.4	----	28.0	----	N (QP)
2	0.18900	13.6	----	21.5	35.1	----	64.1	----	29.0	----	N (QP)
3	0.23100	10.7	----	21.5	32.2	----	62.4	----	30.2	----	N (QP)
4	0.60300	12.6	----	21.5	34.1	----	56.0	----	21.9	----	N (QP)
5	3.86000	13.1	----	21.5	34.6	----	56.0	----	21.4	----	N (QP)
6	4.39200	14.6	----	21.5	36.1	----	56.0	----	19.9	----	N (QP)
7	0.16200	----	7.8	21.5	----	29.3	----	55.4	----	26.1	N (CAV)
8	0.18900	----	6.4	21.5	----	27.9	----	54.1	----	26.2	N (CAV)
9	0.23100	----	6.2	21.5	----	27.7	----	52.4	----	24.7	N (CAV)
10	0.60300	----	9.2	21.5	----	30.7	----	46.0	----	15.3	N (CAV)
11	3.86000	----	9.3	21.5	----	30.8	----	46.0	----	15.2	N (CAV)
12	4.39200	----	11.5	21.5	----	33.0	----	46.0	----	13.0	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The result level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

5.2 Radiated Disturbance

5.2.1 Test Date

Test Date	April 03, 2024
------------------	----------------

5.2.2 Operating Environment

Temperature (°C)	22.7
Relative humidity (% R.H.)	48.3

5.2.3 Test Setup

The radiated emissions measurements were on the in 10 m semi anechoic chamber. The EUT and all local support equipments were placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 MHz to 18 000 MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

5.2.4 Measurement uncertainty

Radiated emission electric field intensity, 30 MHz ~ 1 000 MHz : 4.1 dB

Radiated emission electric field intensity, 1 000 MHz ~ 6 000 MHz : 6.1 dB

Radiated emission electric field intensity, 6 000 MHz ~ 18 000 MHz : 6.1 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor, $k = 2$.

5.2.5 Limit

-. FCC Part 15 Subpart B

Frequency of Emission (MHz)	Resolution bandwidth	Field strength @ 3 m (dBμV/m)	
		Quasi-peak	
30 ~ 88 88 ~ 216 216 ~ 960 Above 960	120 kHz	40.0 43.5 46.0 54.0	
Frequency of Emission (MHz)	Resolution bandwidth	Field strength @ 3 m (dBμV/m)	
		Peak	CISPR Average
> 1 000	1 MHz	74.0	54.0

-. ICES-003

Frequency of Emission (MHz)	Resolution bandwidth	Field strength @ 3 m (dBμV/m)	Field strength @ 10 m (dBμV/m)
		Quasi-peak	Quasi-peak
30 ~ 88 88 ~ 216 216 ~ 230 230 ~ 960 960 ~ 1 000	120 kHz	40.0 43.5 46.0 47.0 54.0	30.0 33.1 35.6 37.0 43.5
Frequency of Emission (MHz)	Resolution bandwidth	Field strength @ 3 m (dBμV/m)	
		Peak	CISPR Average
> 1 000	1 MHz	74.0	54.0

5.2.6 Test Equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESW	Rohde & Schwarz	Test Receiver	101851	Mar. 06, 2024 (1Y)
■ - VULB9163	Schwarzbeck	Trilog Broadband Antenna	9163-225	Sep. 14, 2022 (2Y)
■ - 3115	ETS-LINDGREN	Horn Antenna	34823	Aug. 16, 2023 (1Y)
■ - PAM-118A	Com-Power	Pre-Amplifier	18040081	Oct. 16, 2023 (1Y)
■ - 8447D	Hewlett Packard	Amplifier	2944A07777	Mar. 06, 2024 (1Y)
■ - CO3000	Innco Systems GmbH	Controller	N/A	N/A
■ - DT5000	Innco Systems GmbH	Turn Table	N/A	N/A
■ - MA4000-EP	Innco Systems GmbH	Antenna Master	MA4000/508	N/A
■ - MA4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/592/40700517	N/A

All test equipment used is calibrated on a regular basis.

5.2.7 Test Data

-. Test Result : Pass

Test Mode 1 (Charging)			
Frequency range	: 30 MHz ~ 1 000 MHz	Applied Standards	: FCC Part 15 Subpart B
Resolution bandwidth	: 120 kHz	Measurement distance	: 3 m
		Detector Mode	: Quasi-Peak

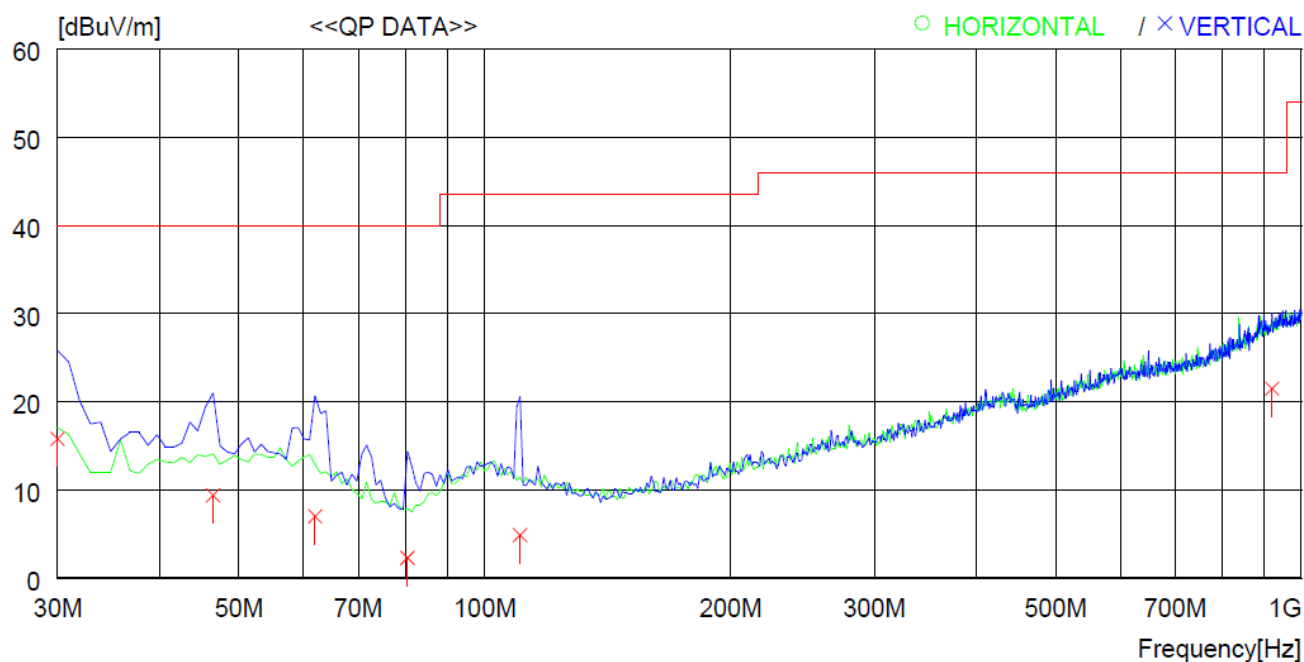


No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QF	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Vertical -----										
1	30.000	29.4	12.2	2.5	28.3	15.8	40.0	24.2	100	359
2	46.490	20.5	14.0	3.1	28.2	9.4	40.0	30.6	300	108
3	62.010	19.2	12.6	3.4	28.2	7.0	40.0	33.0	300	0
4	80.440	18.9	7.6	3.9	28.1	2.3	40.0	37.7	100	50
5	110.510	17.2	11.2	4.5	28.0	4.9	43.5	38.6	100	60
6	920.448	13.3	22.2	13.3	27.3	21.5	46.0	24.5	300	0

Remark: Margin (dB) = Limit – Result

Result = Reading Quasi-Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

Test Mode 1 (Charging)			
Frequency range	: 30 MHz ~ 1 000 MHz	Applied Standards	: ICES-003 Issue 7
Resolution bandwidth	: 120 kHz	Measurement distance	: 3 m
		Detector Mode	: Quasi-Peak

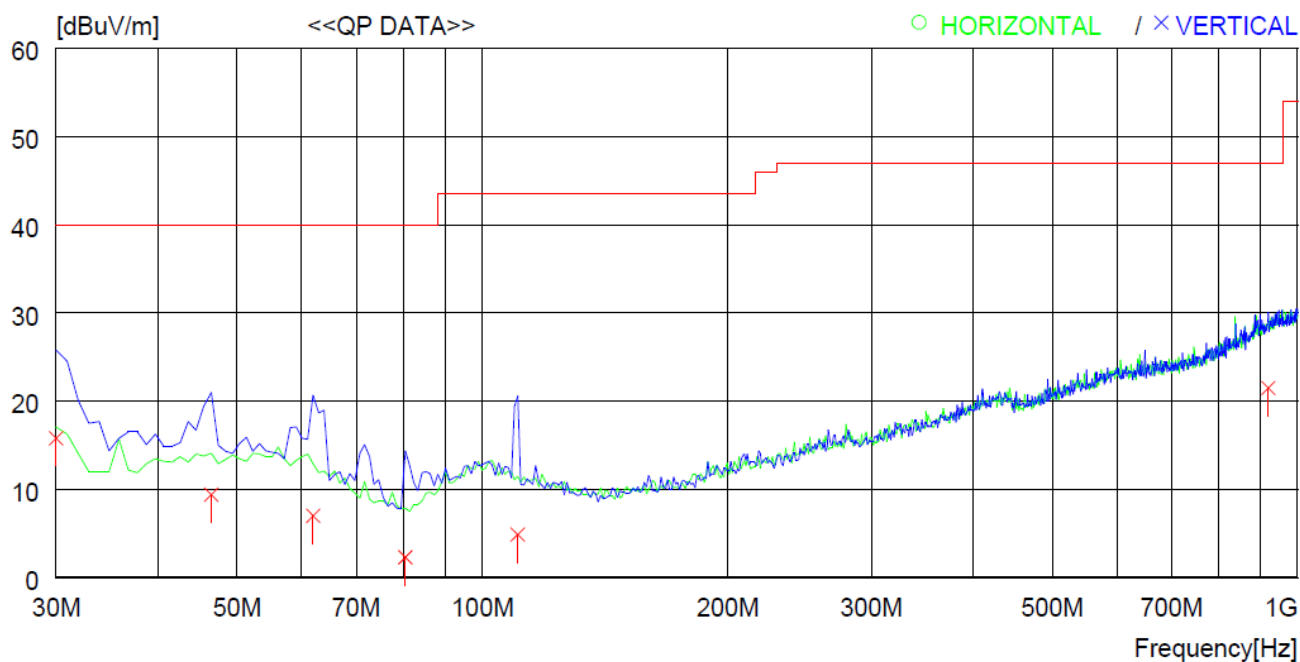


No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QF	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Vertical -----										
1	30.000	29.4	12.2	2.5	28.3	15.8	40.0	24.2	100	359
2	46.490	20.5	14.0	3.1	28.2	9.4	40.0	30.6	300	108
3	62.010	19.2	12.6	3.4	28.2	7.0	40.0	33.0	300	0
4	80.440	18.9	7.6	3.9	28.1	2.3	40.0	37.7	100	50
5	110.510	17.2	11.2	4.5	28.0	4.9	43.5	38.6	100	60
6	920.448	13.3	22.2	13.3	27.3	21.5	47.0	25.5	300	0

Remark: Margin (dB) = Limit – Result

Result = Reading Quasi-Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

Test Mode 1 (Charging)			
Frequency range	: 1 GHz ~ 18 GHz	Measurement distance	: 3 m
Resolution bandwidth	: 1 MHz	Detector Mode	: Peak

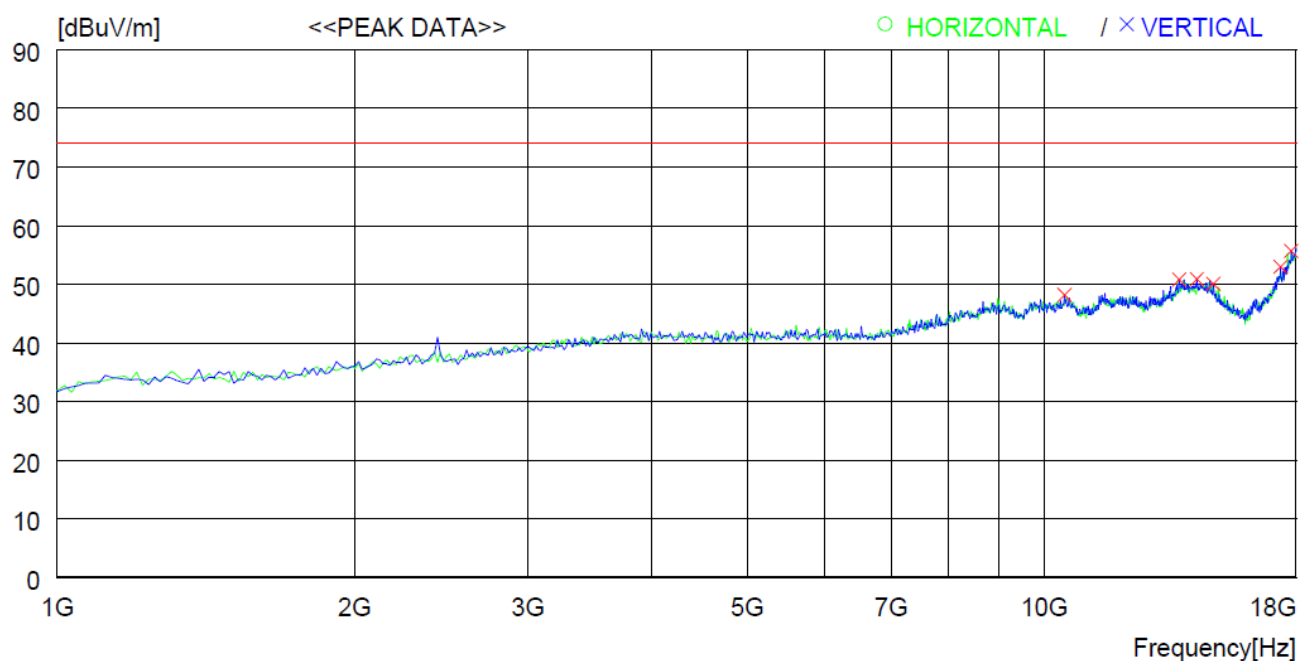


No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Vertical -----										
1	10486.000	43.4	38.0	4.8	40.3	45.9	74.0	28.1	100	108
2	13699.000	42.5	40.7	5.8	40.5	48.5	74.0	25.5	200	209
3	14277.000	41.2	41.8	6.0	40.4	48.6	74.0	25.4	200	0
4	14838.000	41.2	41.0	6.1	40.5	47.8	74.0	26.2	100	267
5	17354.000	41.2	43.0	7.2	40.7	50.7	74.0	23.3	200	347
6	17796.000	40.0	46.3	7.9	40.8	53.4	74.0	20.6	100	83

Remark: Margin (dB) = Limit – Result

Result = Reading Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

Test Mode 1 (Charging)			
Frequency range	: 1 GHz ~ 18 GHz	Measurement distance	: 3 m
Resolution bandwidth	: 1 MHz	Detector Mode	: CISPR-Average

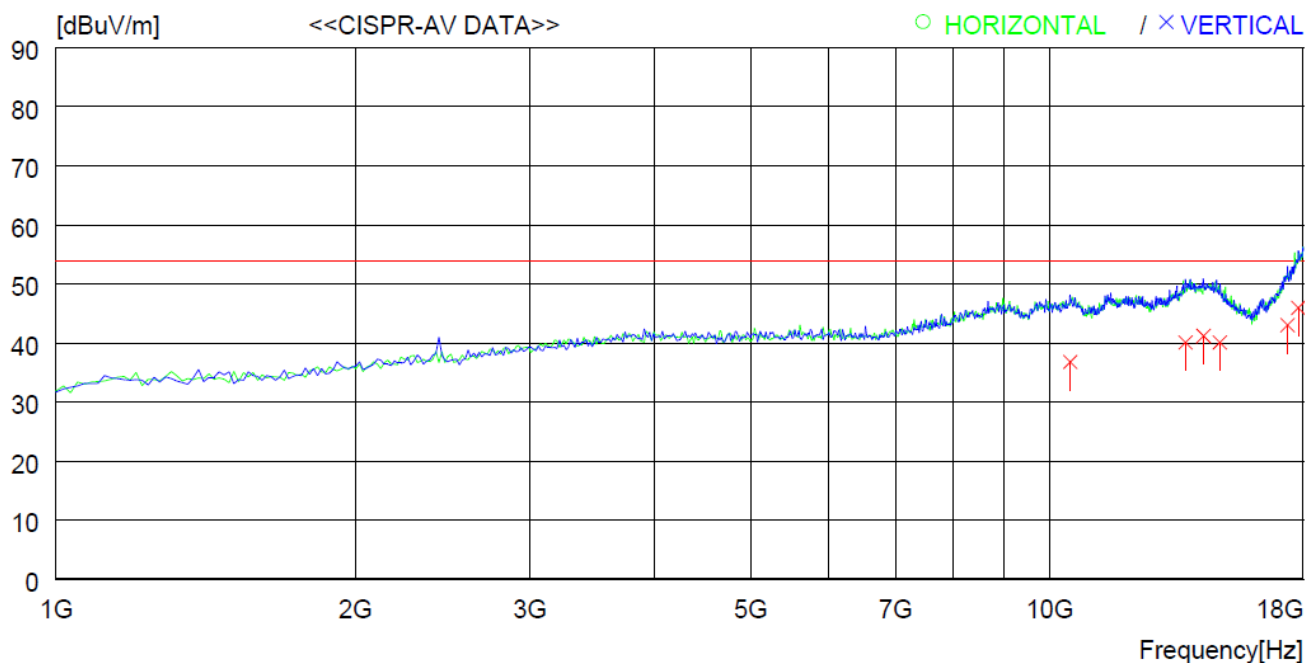

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	CAV	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Vertical -----										
1	10486.380	32.0	38.0	4.8	40.3	36.8	54.0	17.2	100	108
2	13699.730	31.8	40.7	5.8	40.5	40.1	54.0	13.9	200	209
3	14277.760	31.5	41.8	6.0	40.4	41.2	54.0	12.8	200	0
4	14838.320	31.3	40.9	6.1	40.5	40.1	54.0	13.9	100	267
5	17354.850	31.1	43.1	7.2	40.7	43.0	54.0	11.0	200	347
6	17796.380	30.3	46.3	7.9	40.8	46.0	54.0	8.0	100	83

Remark: Margin (dB) = Limit – Result

Result = Reading CISPR-Average + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

6. SAMPLE CALCULATIONS

$$\text{dB}\mu\text{V} = 20 \text{ Log}_{10}(\mu\text{V})$$

$$\text{Margin} = \text{Limit} - \text{Result}$$

-. Example 1: 4.77600 MHz


Class B Limit	= 46.0 dB μ V (CISPR-Average)
Reading	= 11.6 dB μ V
Correction Factor	= Cable Loss + Pulse Limiter
	= 21.5 dB
Total	= 33.1 dB μ V
Margin	= 46.0 dB μ V – 33.1 dB μ V
	= 12.9 dB μ V

-. Example 2: 17796.380 MHz

Class B Limit	= 54.0 dB μ V/m (CISPR-Average)
Reading	= 30.3 dB μ V
Correction Factor	= Antenna Factor (46.3 dB/m) + Cable Loss (7.9 dB) - Amp. Gain (40.8 dB)
	= 13.4 dB
Total	= 46.0 dB μ V/m
Margin	= 54.0 dB μ V/m – 46.0 dB μ V/m
	= 8.0 dB

APPENDIX A
[TEST SET UP PHOTOGRAPHS]

Conducted Disturbance Test Set Up

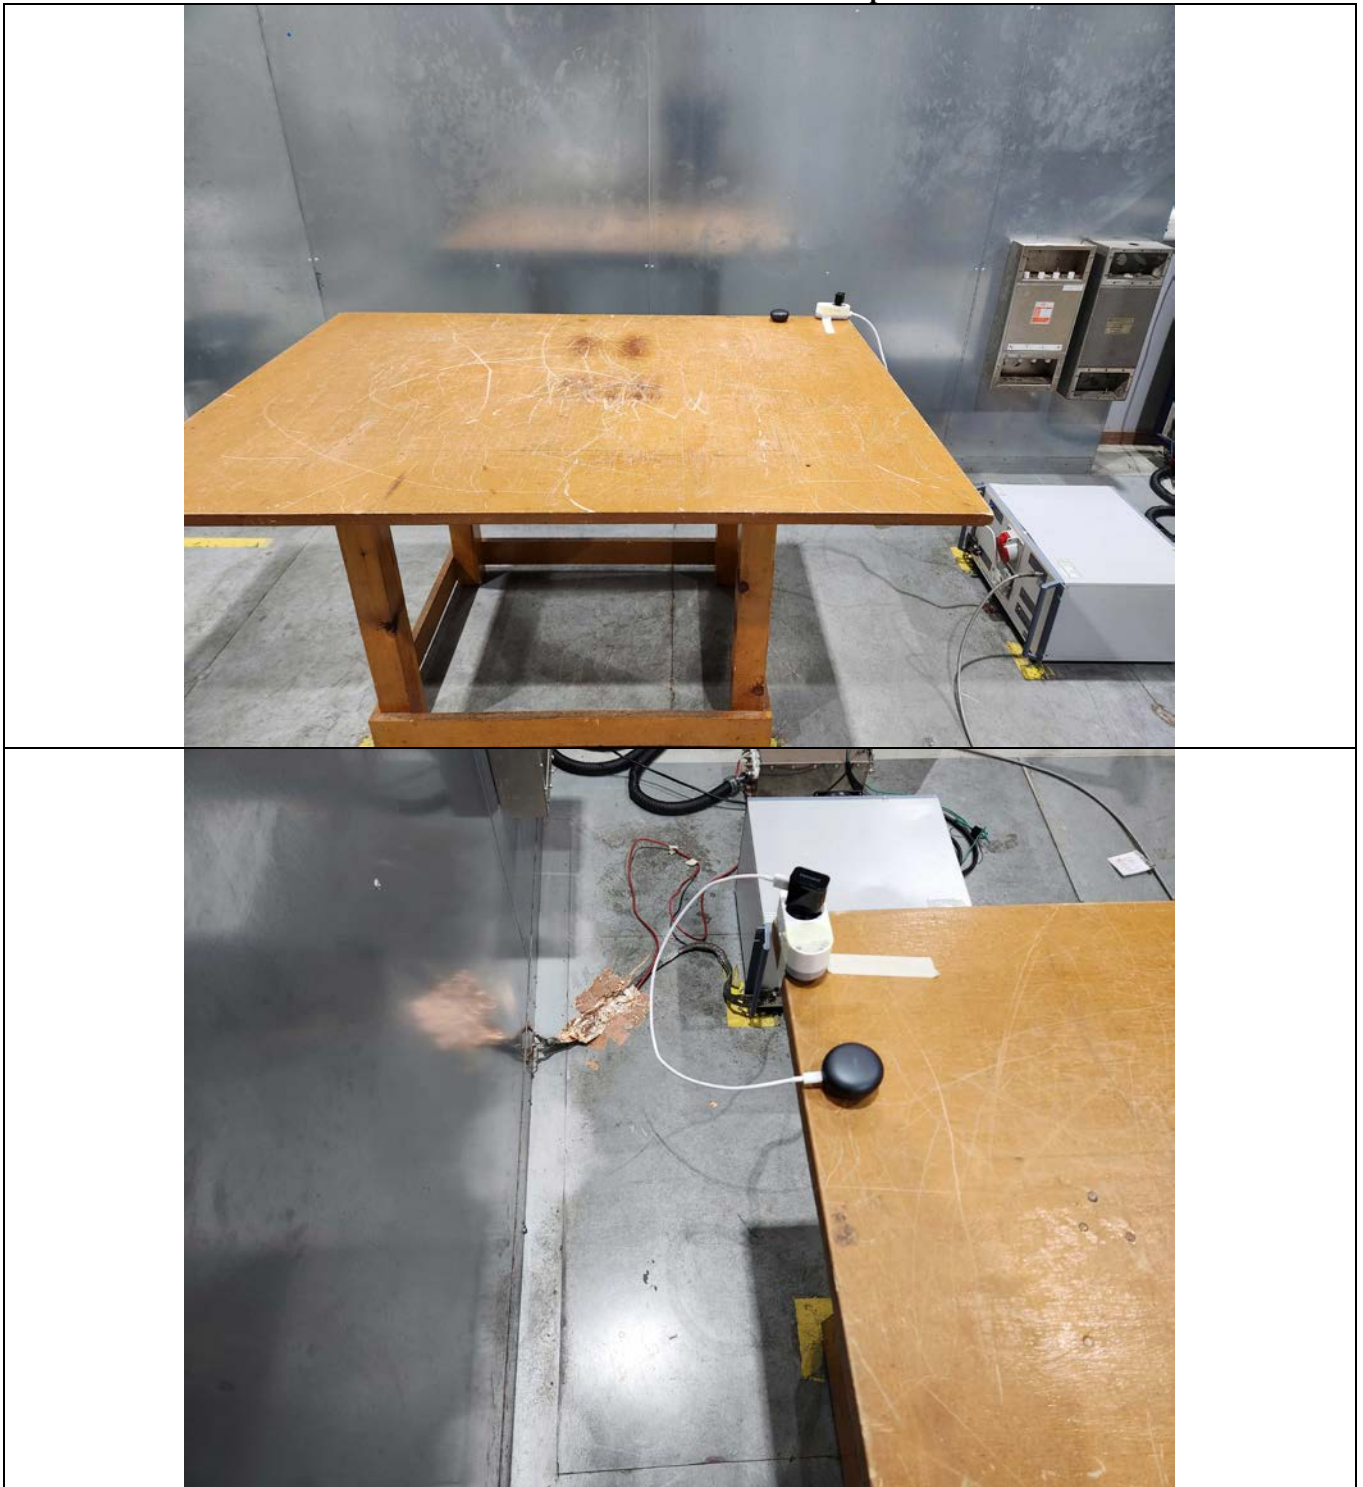

Radiated Disturbance Test Set Up (Below 1 GHz)





Radiated Disturbance Test Set Up (Above 1 GHz)




APPENDIX B


[PHOTOGRAPHS OF EUT]

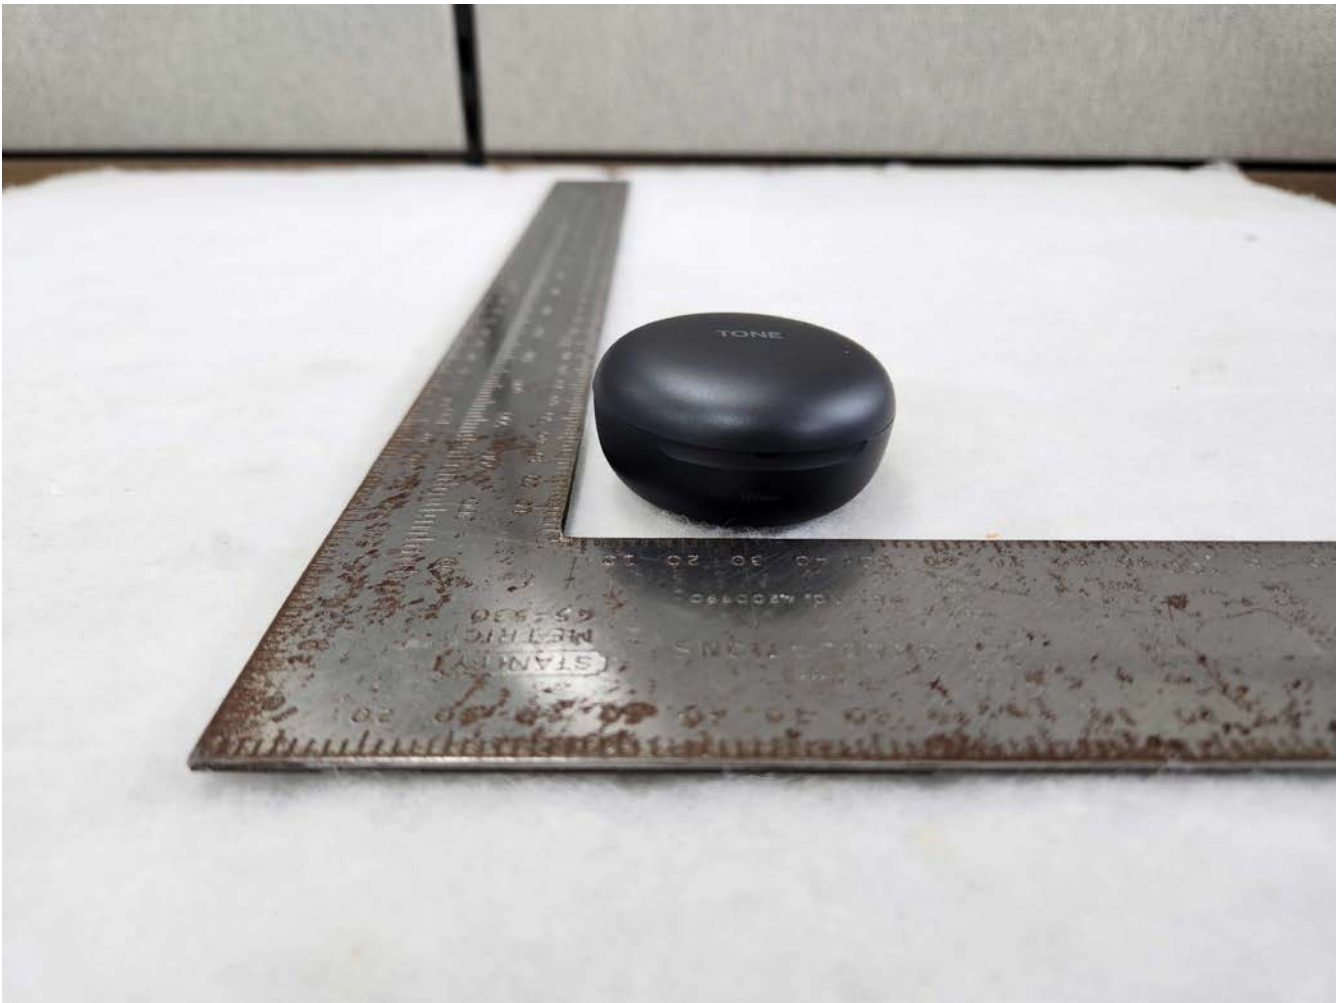


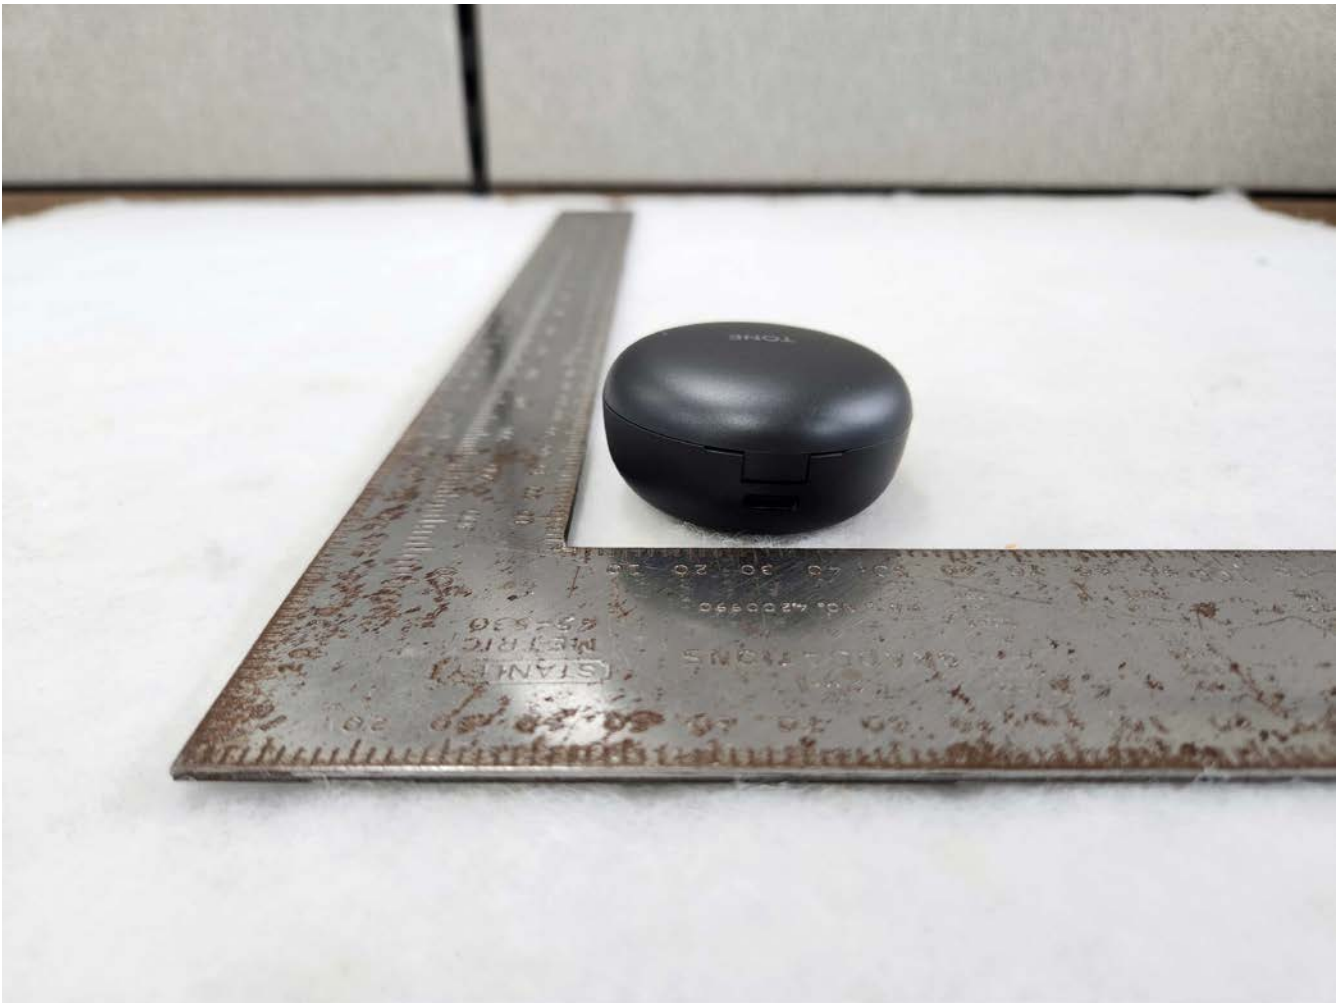



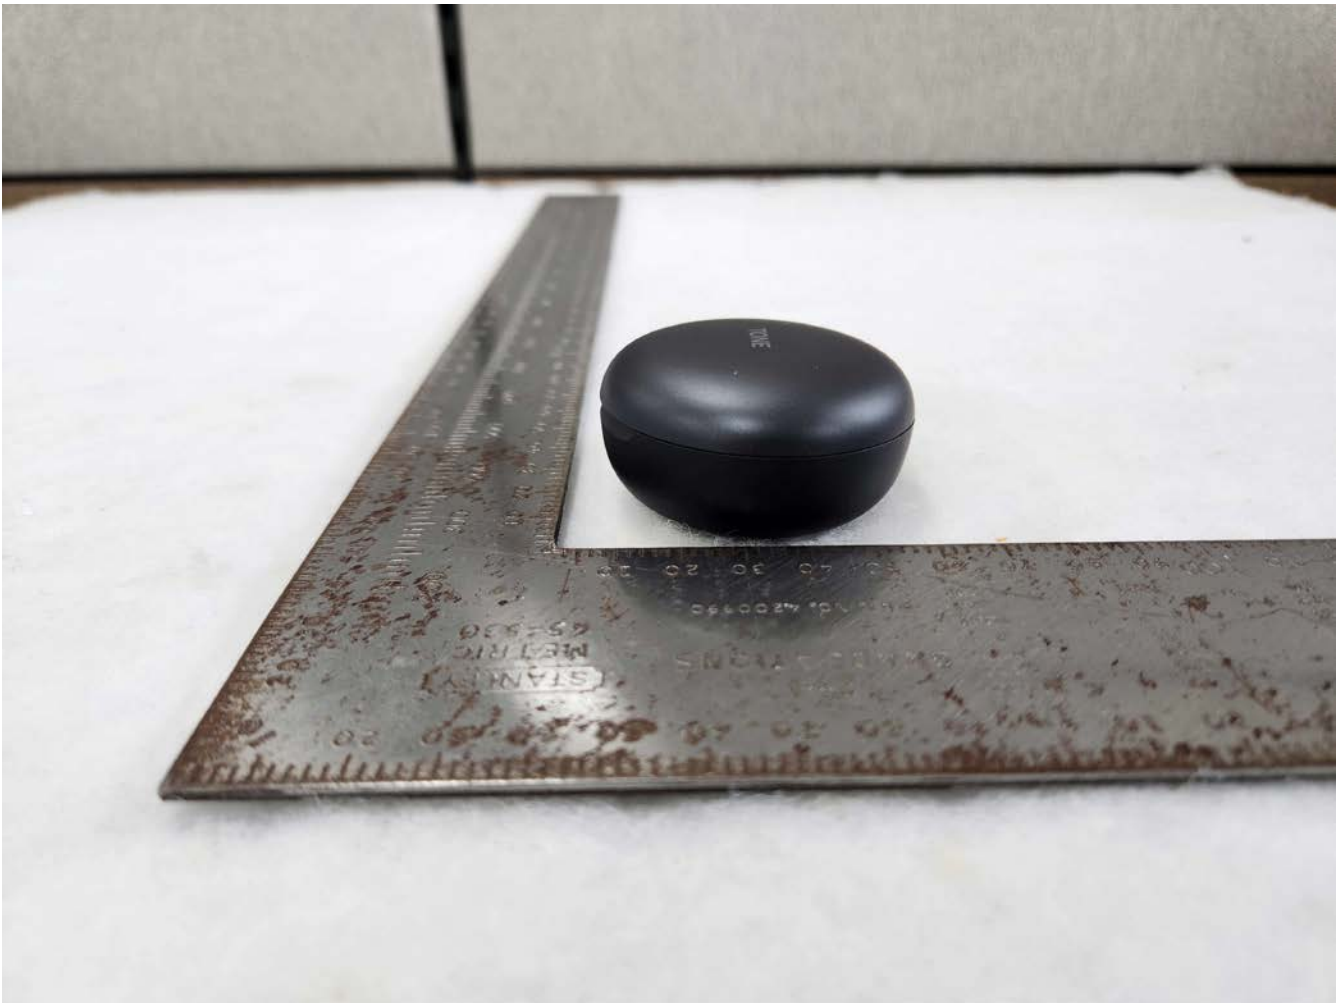


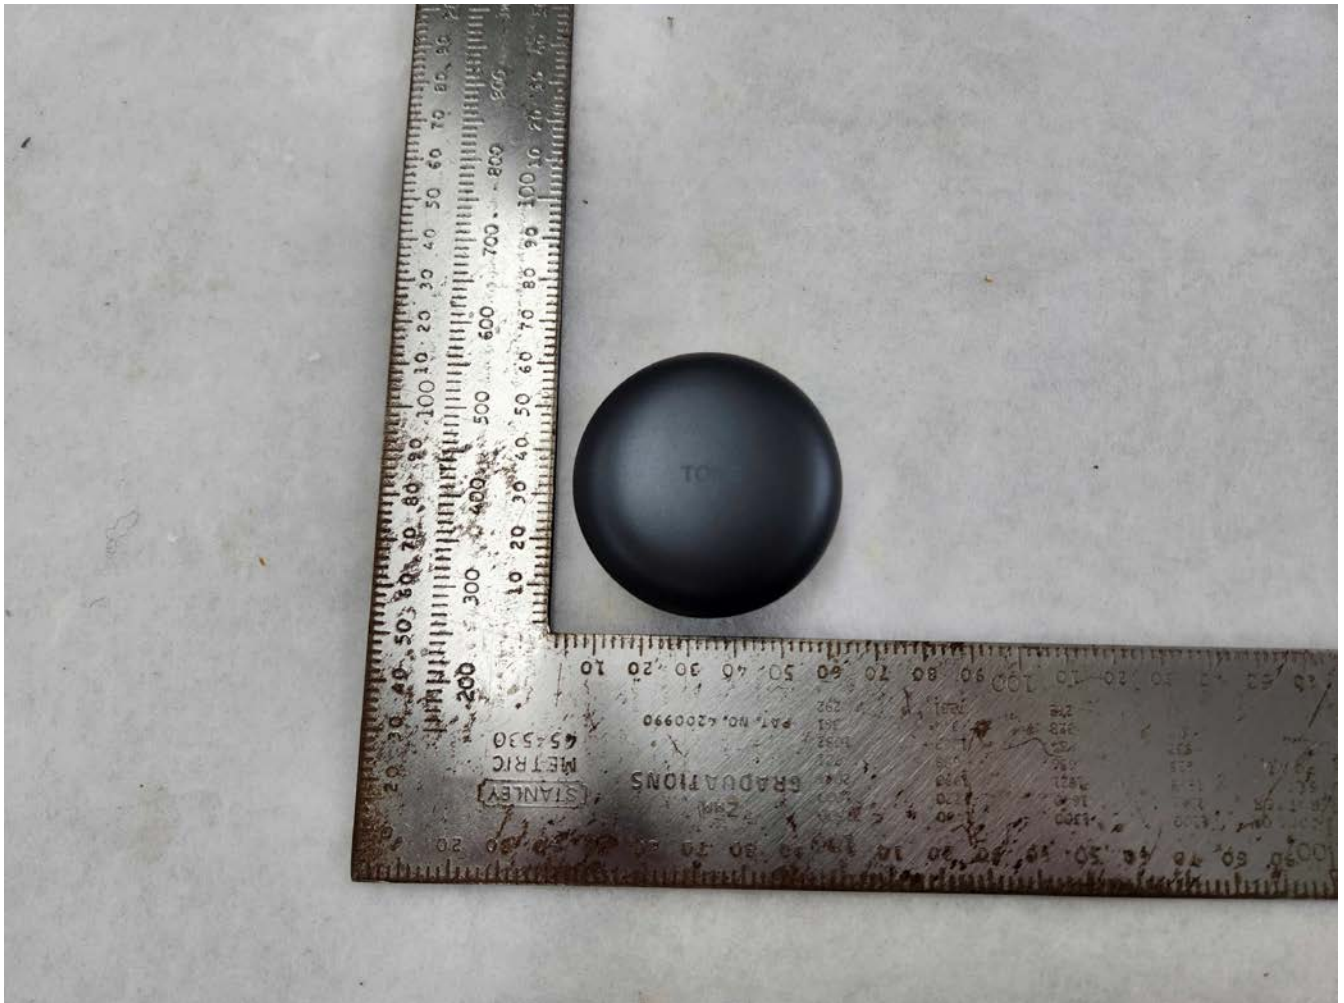


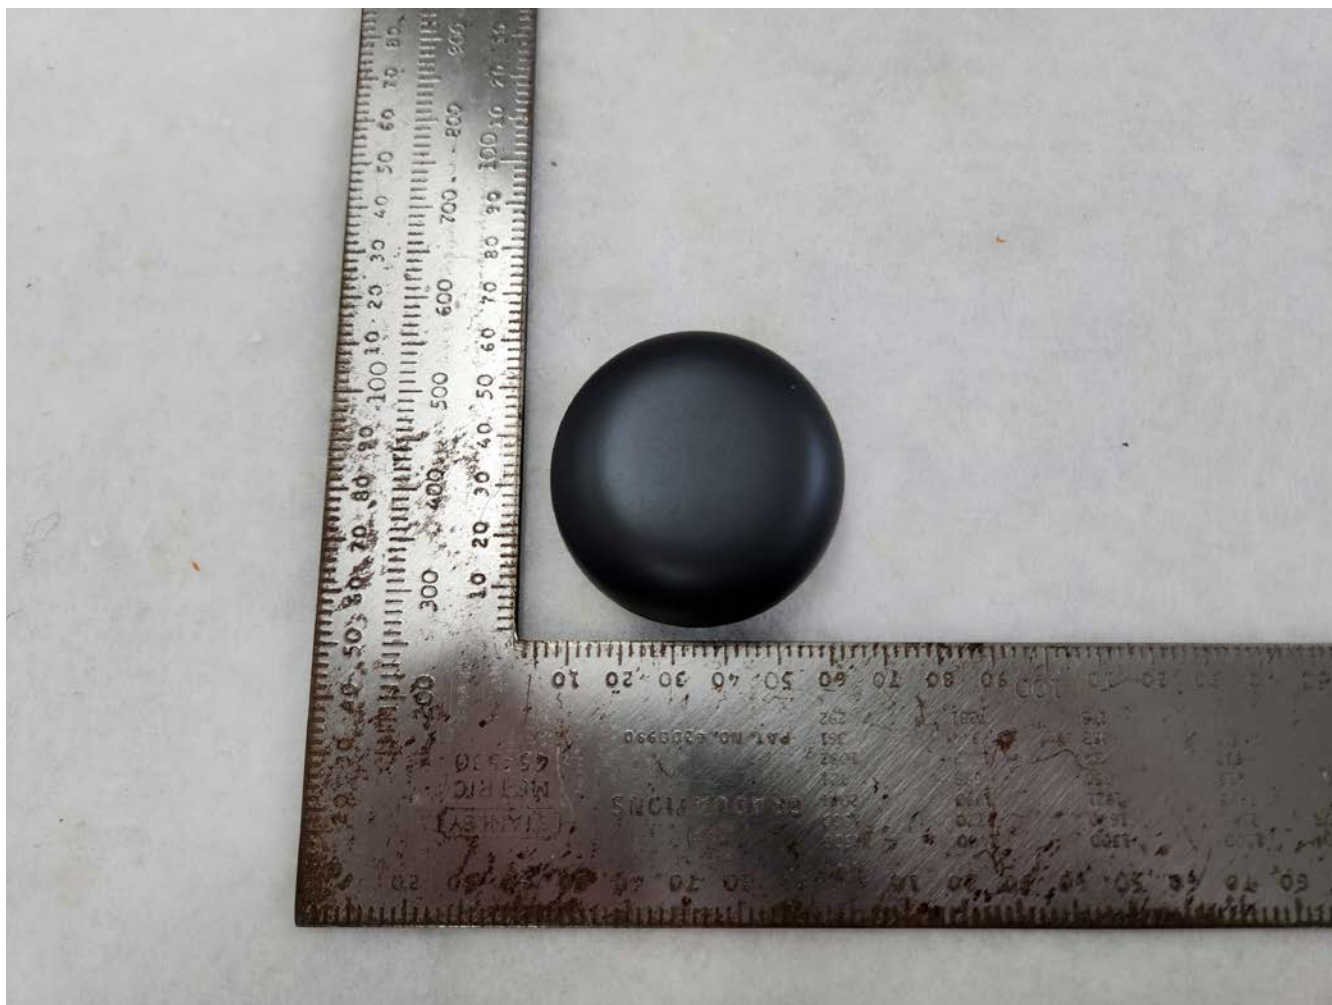






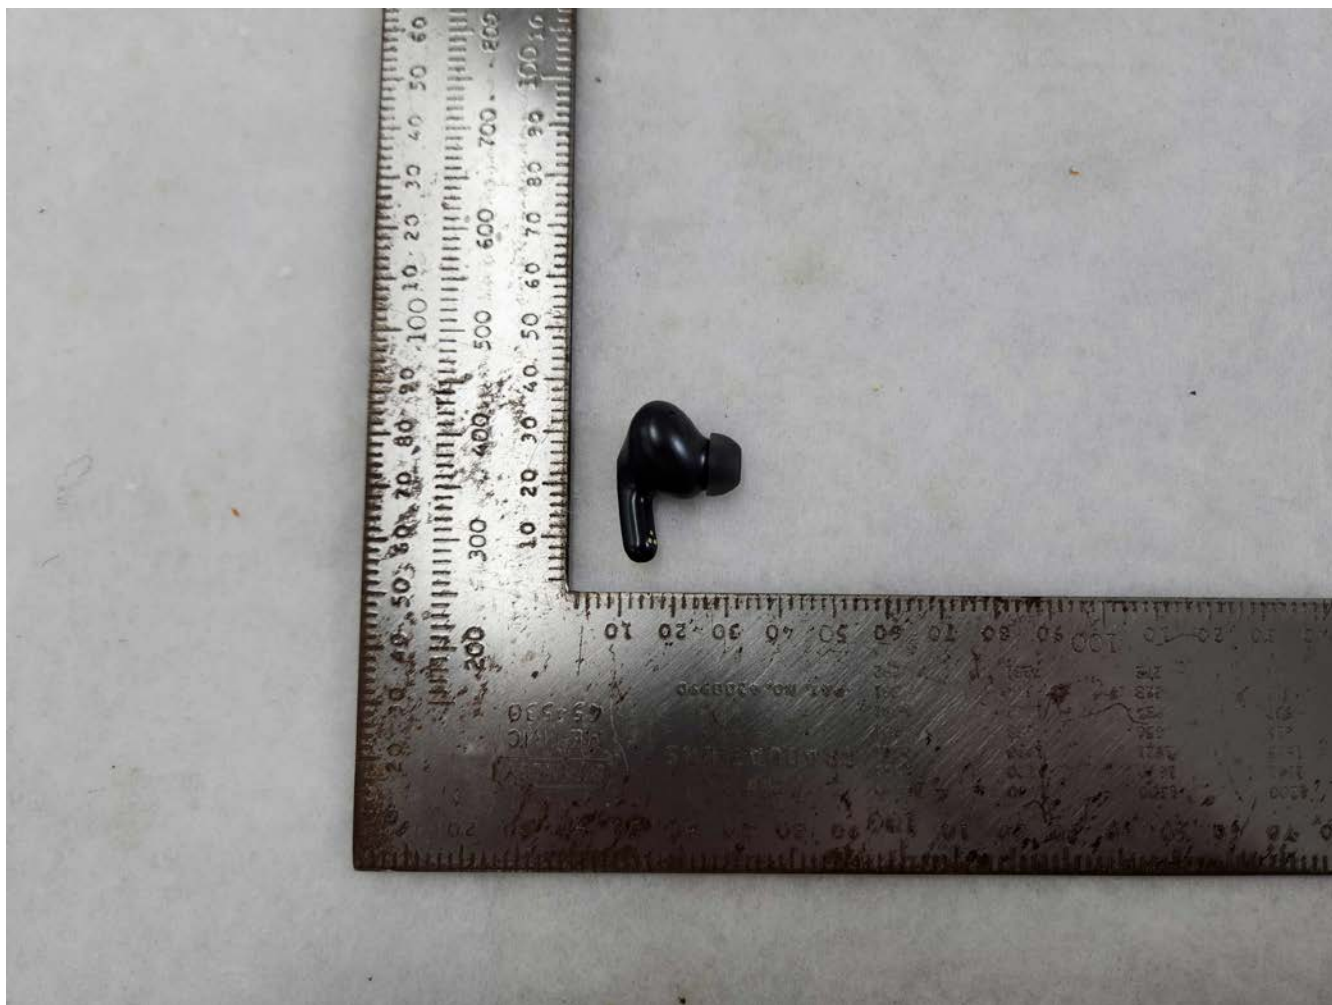

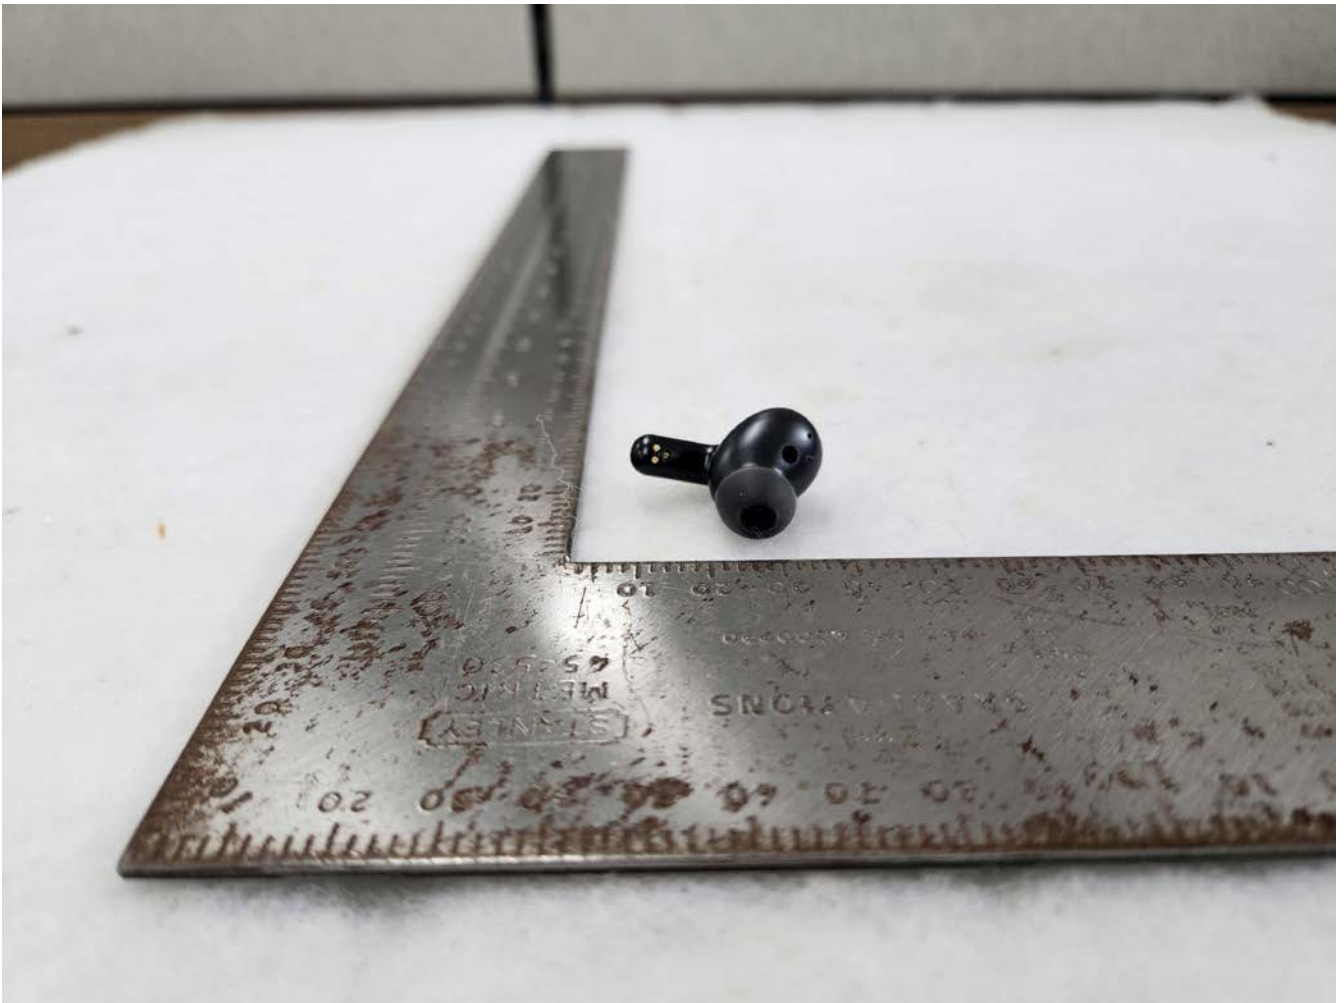



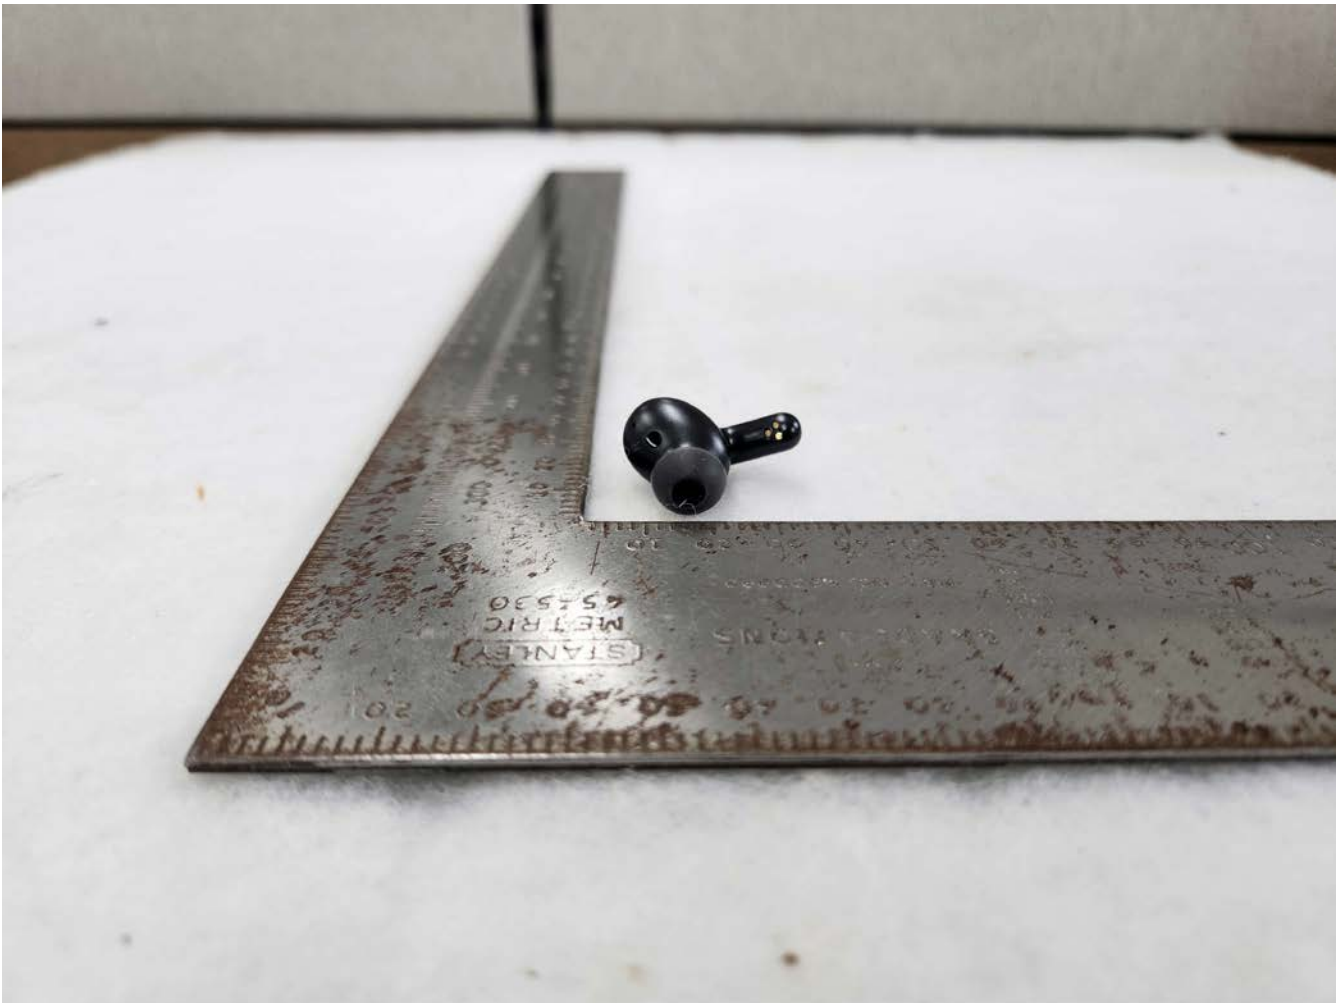

APPENDIX C
[DECLARATION OF CONFORMITY]

SUPPLIER'S DECLARATION OF CONFORMITY

Per FCC § 2.1077 Compliance information.

Trade Name: LG

Model Number: TONE-FP8, TONE-FP8W, TONE-FP8E, TONE-TFP8, TONE-TFP8W, TONE-TFP8E, TONE-UFP8, TONE-UFP8W, TONE-UFP8E, TONE-DFP8, TONE-DFP8W, TONE-DFP8E, TONE-AFP8, TONE-AFP8W, TONE-AFP8E, TONE-FP8A, TONE-FP8WA, TONE-FP8EA

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful Interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Responsible Party: LG Electronics USA, Inc.

Address: 111 Sylvan Avenue, North Building
Englewood Cliffs, New Jersey
07632

E-mail: lg.environmental@lge.com

We hereby declare that the equipment bearing the trade and model number specified above was tested conforming to the applicable FCC rules under the most accurate measurement standards possible, and that the necessary steps have been taken and are in force to assure that production units equipment will continue to comply with the Commission's requirements.



LG Electronics USA, Inc.

A handwritten signature in black ink, appearing to read 'Zil B'.

Signature

April 15, 2024

Date

APPENDIX D
[LABELLING REQUIREMENTS]
[INFORMATION TO THE USER IN USER'S MANUAL]

LABELLING REQUIREMENTS

FCC Part 15 SUBPART B § 15.19 Labeling requirements

(a) In addition to the requirements in part 2 of this chapter, a device subject to certification, or Supplier's Declaration of Conformity shall be labeled as follows:

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under part 73 of this chapter, land mobile operation under part 90 of this chapter, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is impracticable to label it with the statement specified under paragraph (a) of this section in a font that is four-point or larger, and the device does not have a display that can show electronic labeling, then the information required by this paragraph shall be placed in the user manual and must also either be placed on the device packaging or on a removable label attached to the device.

For FCC Certification

If the device is subject to Certification: (1) Section 2.925 contains information on identification of the equipment; (2) include a label bearing an FCC Identifier (FCC ID) (Section 2.926) and (3) include the appropriate compliance statement in Section 15.19(a). If the labelling area is considered too small and therefore it is impractical (smaller than the palm of the hand) to display the compliance statement, then the statement may be placed in the user manual or product packaging. However, the device must still be labelled with the FCC ID. If the device is unquestionably too small for the FCC ID to be readable (smaller than 4-6 points), the FCC ID may be placed in the user manual. However, it must be determined that the device itself is too small – the label area allocated to the FCC ID may not be reduced because of over crowded identification of other product and regulatory information. Justification for placing the FCC ID in the manual must be submitted with the initial application for certification for review and approval.

For FCC Supplier's Declaration of Conformity (SDOC)

(a) If a product must be tested and authorized under Supplier's Declaration of Conformity, a compliance information statement shall be supplied with the product at the time of marketing or importation, containing the following information:

- (1) Identification of the product, e.g., name and model number;
- (2) A compliance statement as applicable, e.g., for devices subject to part 15 of this chapter as specified in §15.19(a)(3) of this chapter, that the product complies with the rules; and
- (3) The identification, by name, address and telephone number or Internet contact information, of the responsible party, as defined in §2.909. The responsible party for Supplier's Declaration of Conformity must be located within the United States.

(b) If a product is assembled from modular components (e.g., enclosures, power supplies and CPU boards) that, by themselves, are authorized under a Supplier's Declaration of Conformity and/or a grant of certification, and the assembled product is also subject to authorization under Supplier's Declaration of Conformity but, in accordance with the applicable regulations, does not require additional testing, the product shall be supplied, at the time of marketing or importation, with a compliance information statement containing the following information:

- (1) Identification of the assembled product, e.g., name and model number.
- (2) Identification of the modular components used in the assembly. A modular component authorized under Supplier's Declaration of Conformity shall be identified as specified in paragraph (a)(1) of this section. A modular component authorized under a grant of certification shall be identified by name and model number (if applicable) along with the FCC Identifier number.
- (3) A statement that the product complies with part 15 of this chapter.
- (4) The identification, by name, address and telephone number or Internet contact information, of the responsible party who assembled the product from modular components, as defined in §2.909. The responsible party for Supplier's Declaration of Conformity must be located within the United States.
- (5) Copies of the compliance information statements for each modular component used in the system that is authorized under Supplier's Declaration of Conformity.

(c) The compliance information statement shall be included in the user's manual or as a separate sheet. In cases where the manual is provided only in a form other than paper, such as on a computer disk or over the Internet, the information required by this section may be included in the manual in that alternative form, provided the user can reasonably be expected to have the capability to access information in that form. The information may be provided electronically as permitted in §2.935.

For ICES-003

The manufacturer, importer or supplier shall meet the labelling requirements set out in this section and in Notice 2014-DRS1003 for electronic labelling for every unit:

- i. prior to marketing in Canada, for ITE manufactured in Canada and
- ii. prior to importation into Canada, for imported ITE.

Each unit of an ITE model shall bear a label (see below) that represents the manufacturer's or the importer's SDoC with Innovation, Science and Economic Development Canada's ICES-003. This label shall be permanently affixed to the ITE or displayed electronically and its text must be clearly legible. If the dimensions of the device are too small or if it is not practical to place the label on the ITE and electronic labelling has not been implemented, the label shall be, upon agreement with Innovation, Science and Economic Development Canada, placed in a prominent location in the user manual supplied with the ITE. The user manual may be in an electronic format and must be readily available.

Innovation, Science and Economic Development Canada ICES-003 Compliance Label:

CAN ICES-3 (*)/NMB-3(*)

* Insert either "A" or "B" but not both to identify the applicable Class of ITE.

PROPOSED LABEL

The label included following statement will be attached on product or the compliance statement can be observed in a prominent location in the instruction manual.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

INFORMATION TO THE USER IN USER'S MANUAL

For FCC: The instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

For a **Class A** digital device or peripheral

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WARNING

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

For a **Class B** digital device or peripheral

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

WARNING

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.