

Radio Satellite Communication Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

56117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of 63 Pages

Page 1 (63)



# **Accredited Bluetooth Test Facility (BQTF)**

Test report no.: 1\_0138-06-04/01 FCC Part 24 NPL-1

CETECOM – ICT Services GmbH Untertürkheimerstr. 6-10 66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0 Fax: + 49 (0) 681 / 9075



Test report no.:1 0138-06-04/01 Issue date: 2002-02-06 Page 2 (63)

## **Table of Contents**

- 1 General information
- 1.1 **Notes**
- 1.2
- Testing laboratory Details of applicant 1.3
- Application details Test item
- **Test standards**
- 2 Technical test
- 2.1 2.2 **Summary of test results**
- Test report
- **General information** 1

#### 1.1 **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### 1.2 **Testing laboratory**

**CETECOM ICT Services GmbH** 

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telefone : +49 681 598 - 9100 Telefax : +49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de Accredited testing laboratory

DAR-registration number: TTI-P-G-166/98-30 Accredited Bluetooth<sup>™</sup> Test Facility (BQTF)

BLUETOOTH<sup>™</sup> is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM



## 1.3 Details of applicant

Name : Nokia Mobile Phones Street : Wilhelm-Runge-Str. 11

City : D-89081 Ulm Country : Germany

Telephone: +49 (0) 731 505-08 Telefax: +49 (0) 731 505-68 06 Contact: Mr. Thomas Raitmayer Telephone: +49 (0) 731 505-67 28

1.4 Application details

Date of receipt of application : 21.01.2002 Date of receipt of test item : 28.01.2002

Date of test : 31.01.-01.02.2002

1.5 Test item

Type of equipment : Triple Band Mobile Phone

Type designation : NPL-1 tested with HDE-1, DCH-8D and ACP-12E

Manufacturer : Applicant

Street

City :

Country

Serial number : IMEI 00400/00/161853/5

**Additional informations::** 

Frequency : 1850 – 1910 MHz

Type of modulation : 300KF2D

Number of channels : 300

Antenna : Integral antenna and socket Power supply : 3.6V Li-polymer Battery

Output power : 31.47 dBm Peak , ERP : 27.9 dBm (Burst); EIRP:30.0 dBm (Burst)

Type of equipment : Temperature range :  $-30^{\circ}\text{C} - +60^{\circ}\text{C}$ 

FCC – ID

Hardware : HW131119837

Software : B4.0

1.6 Test standards: FCC Part 24



#### 2 Technical test

The radiated measurements were performed vertical andhorizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual remeasurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, wave guide horn

## 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing:

2002-02-06 RSC 8411 Berg M.

Date Section Name Signature

Technical responsibility for area of testing:

2002-02-06 RSC8412 Hausknecht D. / Cus / e ct

Date Section Name Signature



2.2 Testreport

**TEST REPORT** 

Test report no.: 1\_0138-06-04/01



## TEST REPORT REFERENCE

### LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED	Paragraph	PAGE
POWER OUTPUT	SUBCLAUSE § 24.232	7
FREQUENCY STABILITY	SUBCLAUSE § 24.235	9
AFC FREQ ERROR vs. VOLTAGE		10
AFC FREQ ERROR vs. TEMPERATURE	E	10
EMISSIONS LIMITS	<b>§24.238</b>	12
CONDUCTED SPURIOUS EMISSIONS		31
OCCUPIED BANDWIDTH	<b>§2.989</b>	40
CONDUCTED EMISSIONS	§ 15.107/207	47
TEST EQUIPMENT AND ANCILLARIE	CS USED FOR TESTS	49
Test site		51
Photographs of the equipment		54



#### **POWER OUTPUT**

**SUBCLAUSE § 24.232** 

#### **Summery:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is wthin the required mask (this mask is specified in the JTC standarts, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### **Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

#### Limits:

Power Step	Nominal Peak Output Power	Tolerance (dB)
	(dBm)	
0	+30	± 2

#### **Power Measurements:**

### **Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	31.47	31.36
1880.0	0	30.12	30.02
1909.8	0	30.46	30.35
Measuremen	t uncertainty	±0.5	5 dB



#### **EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

#### Method of Measurement:

- 1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. A "reference path loss" is established as Pin + 2.1 Pr.
- 3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
- 5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
- 6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi.

### Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

#### **Power Measurements:**

#### Radiated:

		BURST A	VERAGE	MODULATION AVERAGE		
Frequency	Power Step	(dF	Bm)	(dF	Bm)	
(MHz)		EIRP	ERP	EIRP	ERP	
1850.2	0	29.51	27.41	20.51	18.41	
1880.0	0	30.00	27.90	21.00	18.90	
1909.8	0	29.80	27.70	20.80	18.70	
Measurement unce	±3 dB					



#### FREQUENCY STABILITY

SUBCLAUSE § 24.235

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMD 65 DIGITAL RADIOCOMMUNICATION TESTER..

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the mobile station to overnight soak at -30 C.
- 3. With the mobile station, powered with 3.6 Volts, connected to the CMD 65 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5. Remeasure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.2 Volts to maximum 4.4 Volts, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at 3.6 Volts for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
- 6. Subject the mobile station to overnight soak at +60 C.
- 7. With the mobile station, powered with 3.6 Volts, connected to the CMD 65 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment...," Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2 Vdc and 4.4 Vdc, with a nominal voltage of 3.6 Vdc (Li-Ploymer accu). Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of +22.2% and -5.4%. For the purposes of measuring frequency stability these voltage limits are to be used.



Test report no.:1\_0138-06-04/01 Issue date: 2002-02-06 Page 10 (63)

# AFC FREQ ERROR vs. VOLTAGE


Voltage	Frequency Error	Frequency Error	Frequency Error
<b>(V)</b>	(Hz)	(ppm)	(%)
3.2	+28	0,0149	0,00000149
3.3	+20	0,0106	0,00000106
3.4	+20	0,0106	0,00000106
3.5	+26	0,0138	0,00000138
3.6	+30	0,0160	0,00000160
3.7	+26	0,0138	0,00000138
3.8	+24	0,0128	0,00000128
3.9	+19	0,0101	0,00000101
4.0	+16	0,0085	0,00000085
4.1	+16	0,0085	0,00000085
4.2	+22	0,0117	0,00000117
4.3	+20	0,0106	0,00000106
4.4	+24	0,0128	0,00000128


## AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE	Frequency Error	Frequency Error	Frequency Error
(°C)	(Hz)	(ppm)	(%)
-30	+16	0,0085	0,00000085
-20	+14	0,0074	0,0000074
-10	+10	0,0053	0,00000053
±0.0	+11	0,0059	0,00000059
+10	+9	0,0048	0,00000048
+20	+10	0,0053	0,00000053
+30	+13	0,0069	0,00000069
+40	+18	0,0096	0,00000096
+50	+22	0,0117	0,00000117
+60	+16	0,0085	0,00000085



Test report no.:1\_0138-06-04/01 Issue date: 2002-02-06 Page 11 (63)

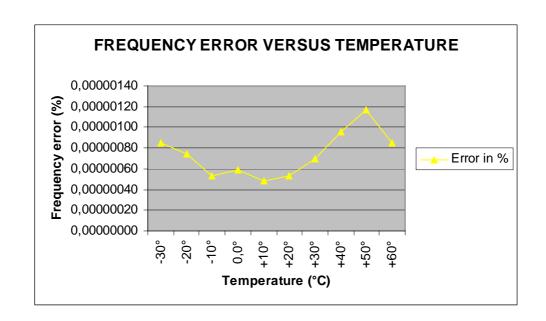

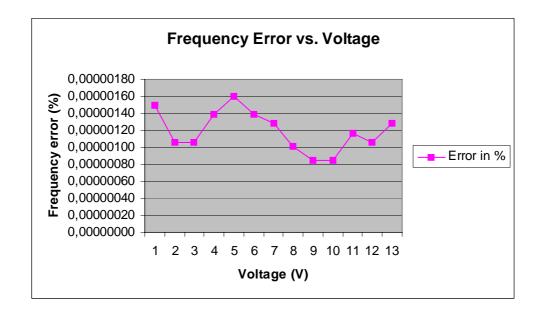



#### **EMISSIONS LIMITS**

§24.238

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

#### The final open field emission test procedure is as follows:

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

 $Pg = E^{2} 4\pi d^{2} / 120\pi = E^{2} d^{2} / 30$ where : P = power in watts

g = arithmetic gain of transmitting antenna over isotropic radiator.

E = maximum field strength in volts/meter

d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

P(dBm) = E(dBuV/m) - 97.2dB

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.



#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

As can be seen from this data, the emissions from the test item were within the specification limit.

#### **Channel 512**

Data File : /10138_45.DOC								30 Ja	an 2002
No	EMISSION FREQUENCY MHz	SPEC LIMIT dBu	ABS	SUREME: dLIM dB			SITE HGT AZM cm deg	CORR FACTOR dB	COMMENTS
1	49.7	29.5	17.0	-12.5	 РК	V	97 360	N/T	

#### Channel 661

Data File : /10138_50_DOC 30									30 Ja	n 2002
No	EMISSION FREQUENCY MHz	SPEC LIMIT dBu	ABS	SUREME dLIM dB	NTS MODE	POL	-	AZM deg	CORR FACTOR dB	COMMENTS
1 2	54.5 170.7			-11.4 -10.6	PK PK	V V			N/T N/T	


#### Channel 810


Data	File : /10	138_55_1		30 Ja	n 2002				
No	EMISSION FREQUENCY MHz	SPEC LIMIT dBu	ABS	SUREME dLIM dB		POL	SITE HGT AZM cm deg	CORR FACTOR dB	COMMENTS
1 2	52.4 153.5		16.2 21.3		PK PK	V V	97 279 97 191	N/T N/T	

 $\ensuremath{\mathrm{N}/\mathrm{T}}$  in CORR FACTOR column denotes a non-traceable signal.




## Channel 512 (up to 1 GHz)

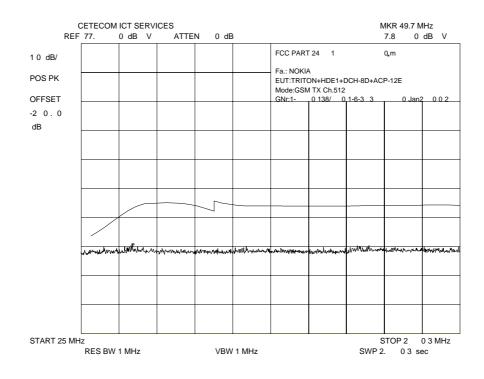

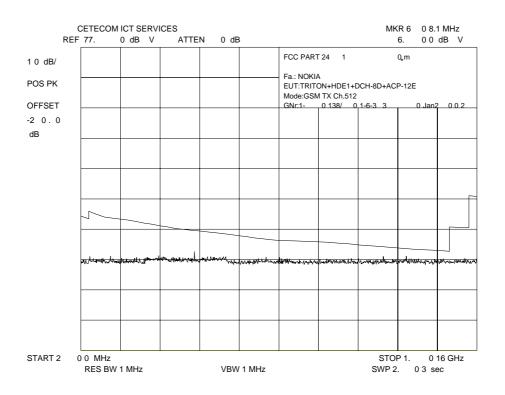




# Channel 512 (up to 4 GHz)

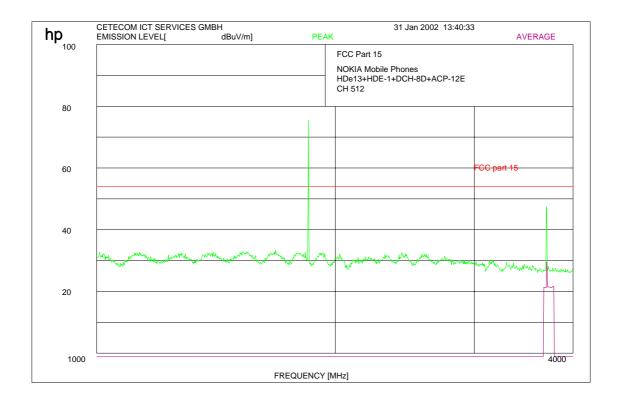

3701.5 MHz 29.5  $dB\mu V/m AV$ 




**Channel 512:- 12 GHz** 

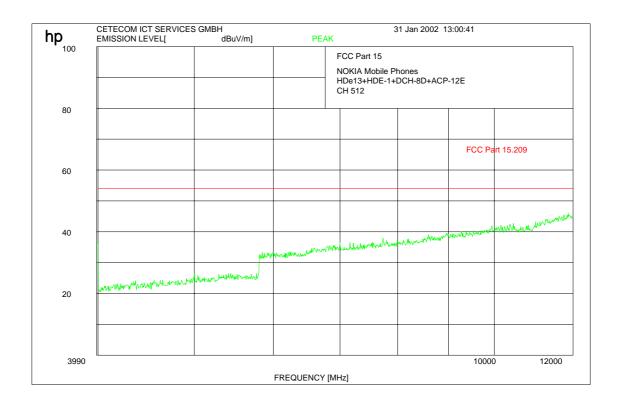




Channel 512: 12 - 20 GHz

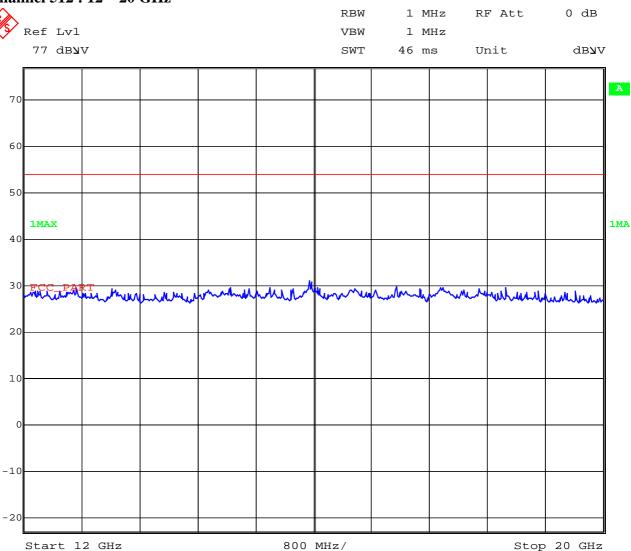


Date: 31.JAN.2002 14:16:05



## Channel 661 (up to 1 GHz)

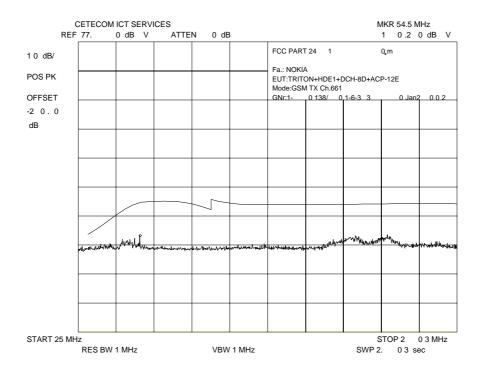

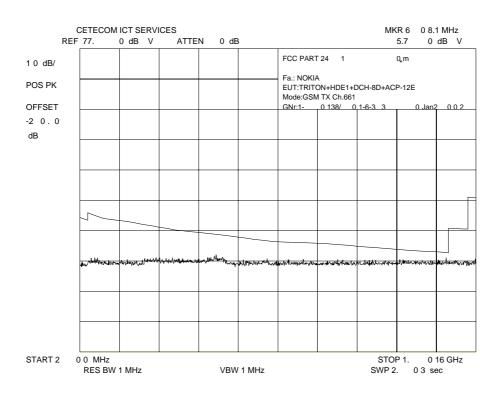




## Channel 661 (up to 4 GHz)



3763.5 MHz  $30.8 \text{ dB}\mu\text{V/m AV}$ 




Channel 661: 4 – 12 GHz

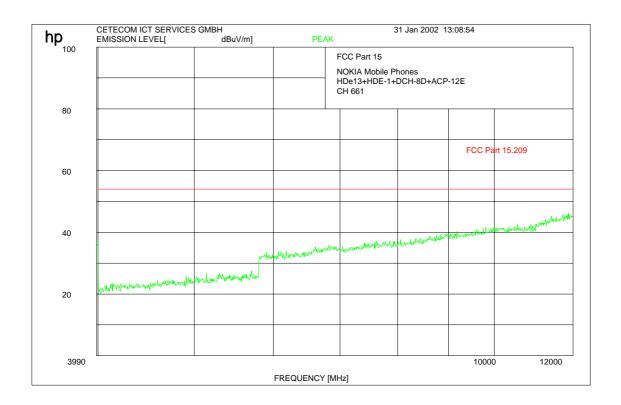




Channel 661: 12 - 20 GHz

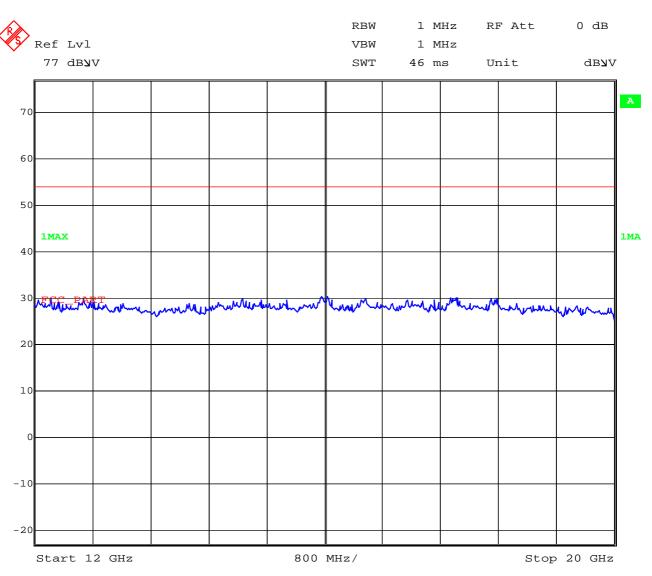


Date: 31.JAN.2002 14:15:34




## Channel 810 up to 1 GHz

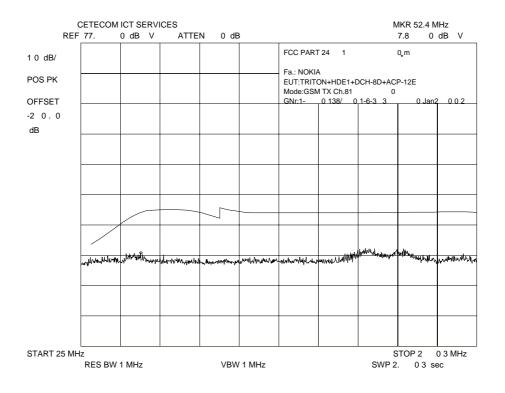

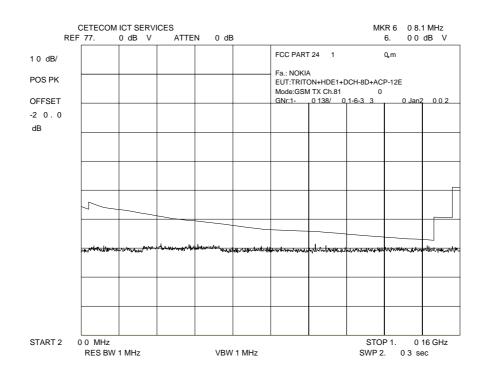




## Channel 810 up to 4 GHz

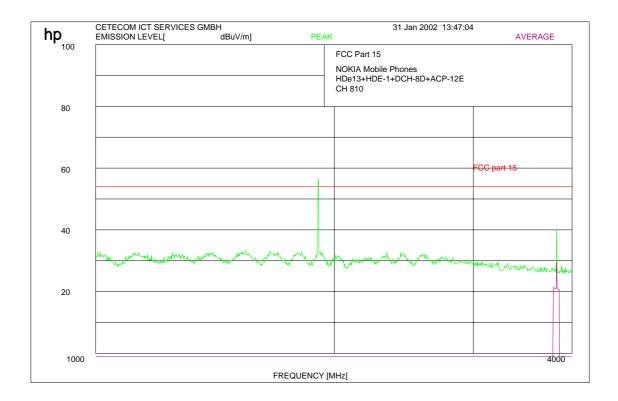

3821.3 MHz  $29.4 \text{ dB}\mu\text{V/m AV}$ 




Channel 810: 4-12 GHz

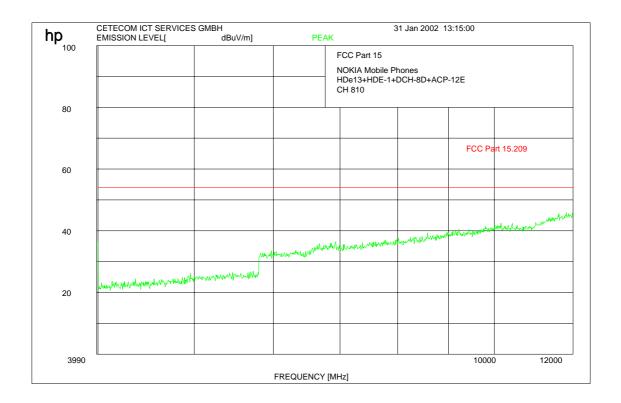



Channel 810: 12 - 20 GHz

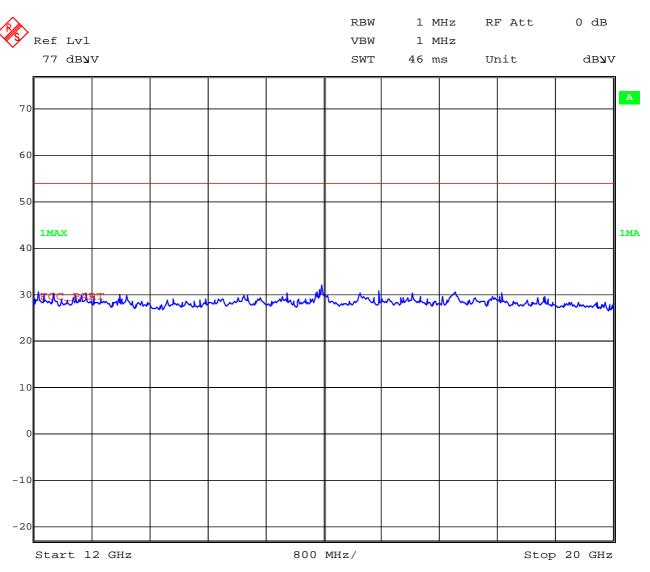

Date: 31.JAN.2002 14:15:04



# Channel 661 (this is valid for all 3 channels and up to 1 GHz) Idle-Mode

Test: Rad. Emission


Data File : /10138\_60\_DOC 30 Jan 2002


1 48.3 29.5 19.0 -10.5 PK V 97 360 N/T 2 154.5 33.0 21.8 -11.2 PK V 97 360 N/T	No	EMISSION FREQUENCY	SPEC LIMIT	ABS	SUREME dLIM	 POL	_	AZM	CORR FACTOR	COMMENTS
3 159.9 33.0 24.7 -8.3 PK V 97 360 N/T	1 2		29.5	19.0 21.8	-11.2	 V	97 97	360		

 $\ensuremath{\mathrm{N}/\mathrm{T}}$  in CORR FACTOR column denotes a non-traceable signal.




# Channel 661 (this is valid for all 3 channels and up to 1 GHz) Idle-Mode

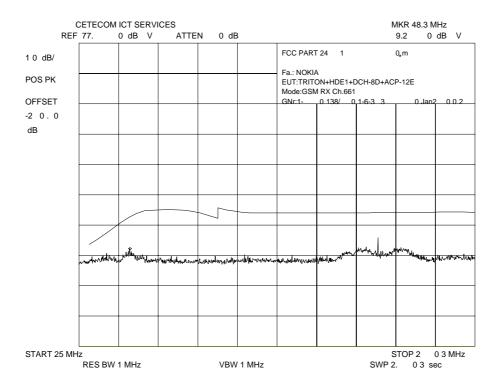

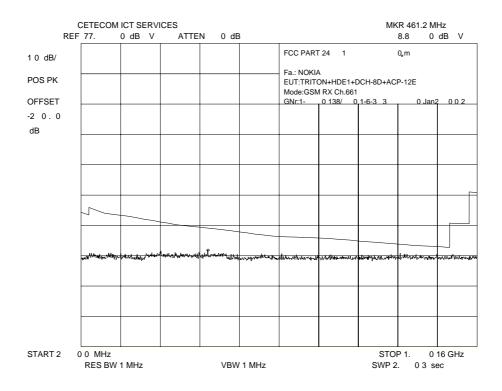




Channel 661 (this is valid for all 3 channels and up to 4 GHz) Idle-Mode

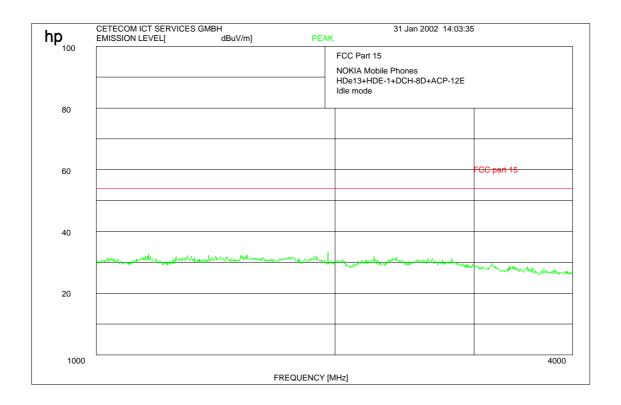




# Channel 661 (this is valid for all 3 channels and 4 to 12 GHz) Idle-Mode $\,$

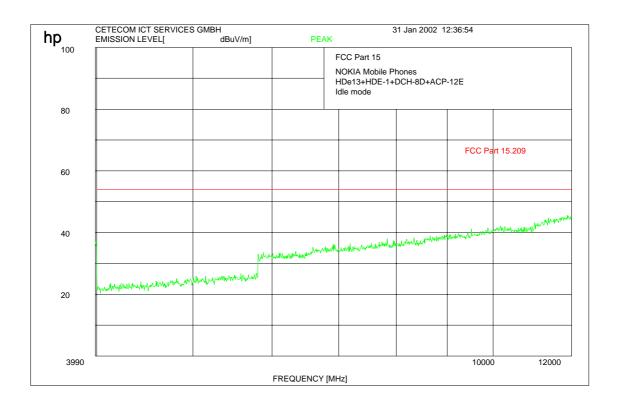



# Channel 661 (this is valid for all 3 channels and 12 to 20 GHz) Idle-Mode $\,$

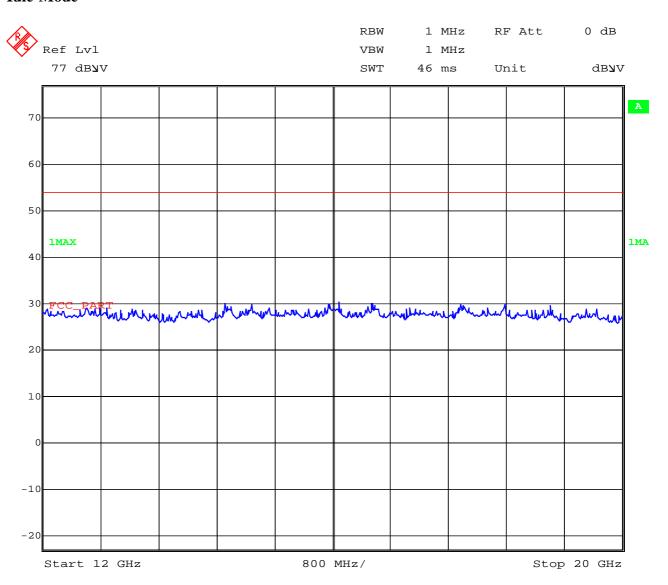

Date: 31.JAN.2002 14:17:00



### **CONDUCTED SPURIOUS EMISSIONS**

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

- 1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
- 2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **USPCS Transmitter**

#### **Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0

dBm, this becomes a constant specification limit of -13 dBm.




Stop 1.84 GHz

### **Measurements:**

Channel: 512

-60

-70

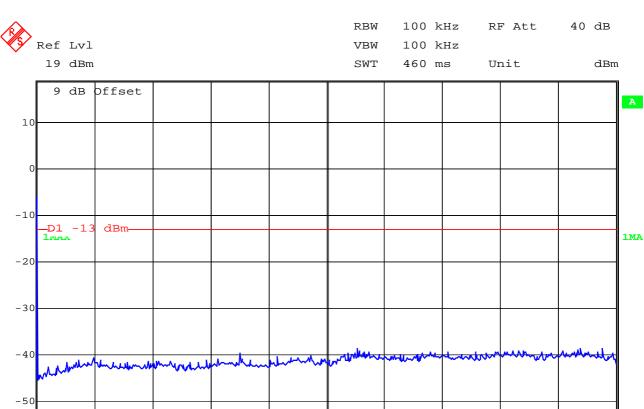


183.9991 MHz/


Date: 31.JAN.2002 13:44:02

Start 9 kHz



#### **Channel 512**




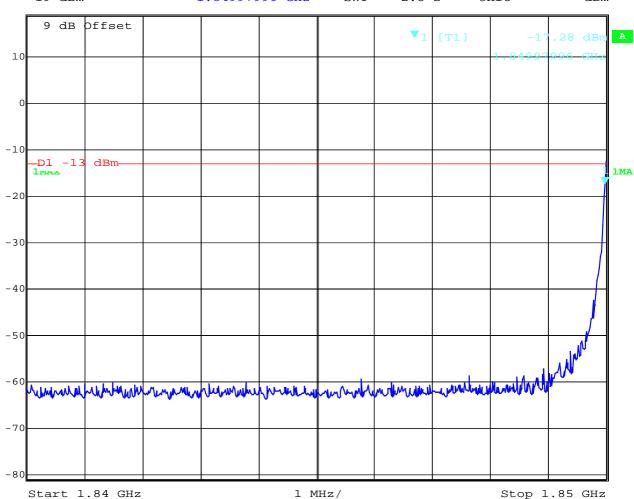

Date: 31.JAN.2002 13:45:21




#### **Channel 512**

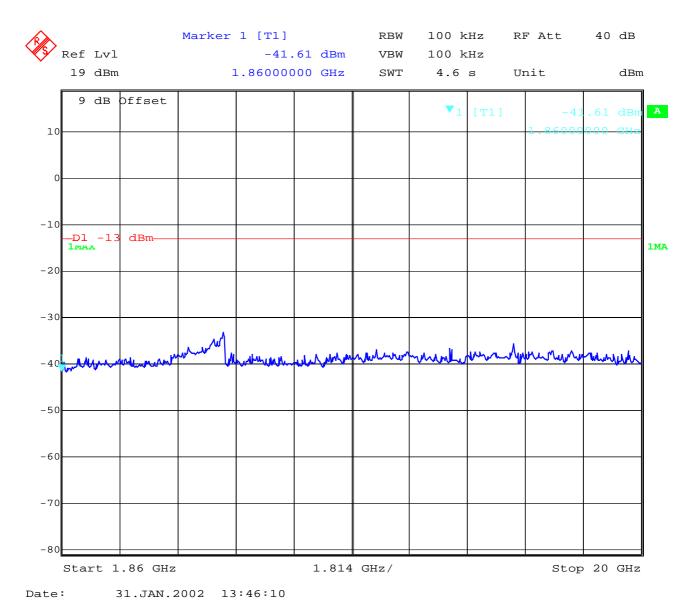




#### **Channel 661**

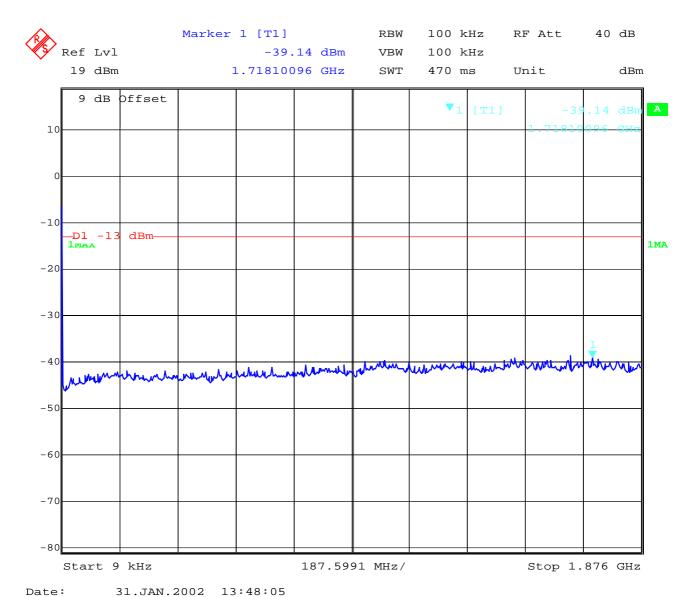




#### **Channel 661**

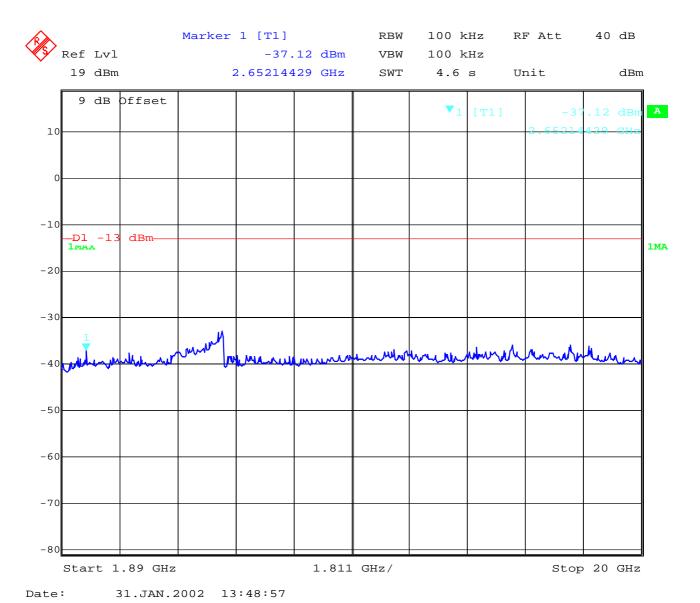




#### **Channel 810**

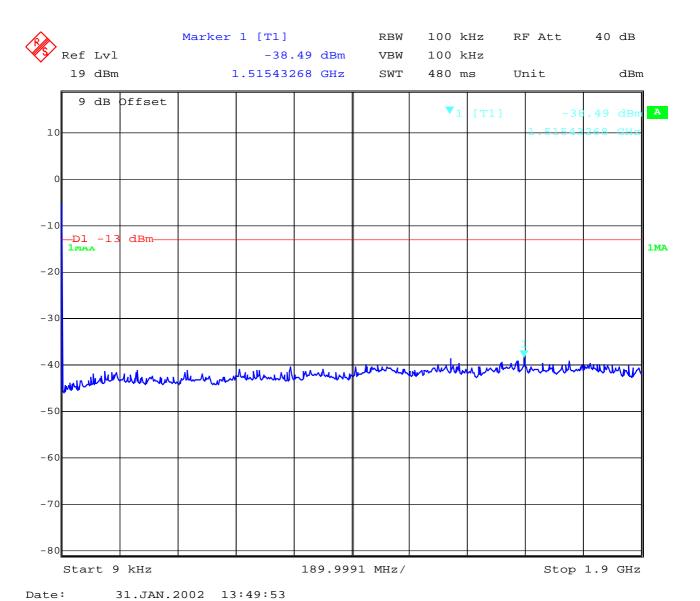




#### **Channel 810**

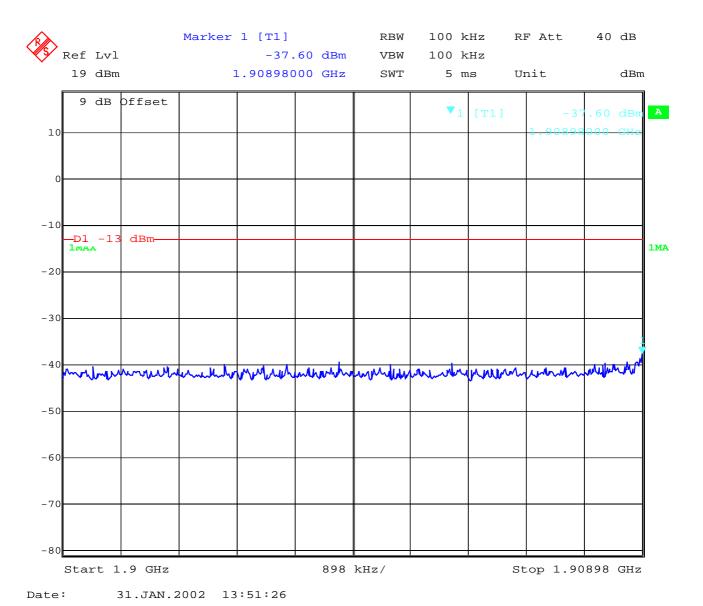



#### **Channel 810**

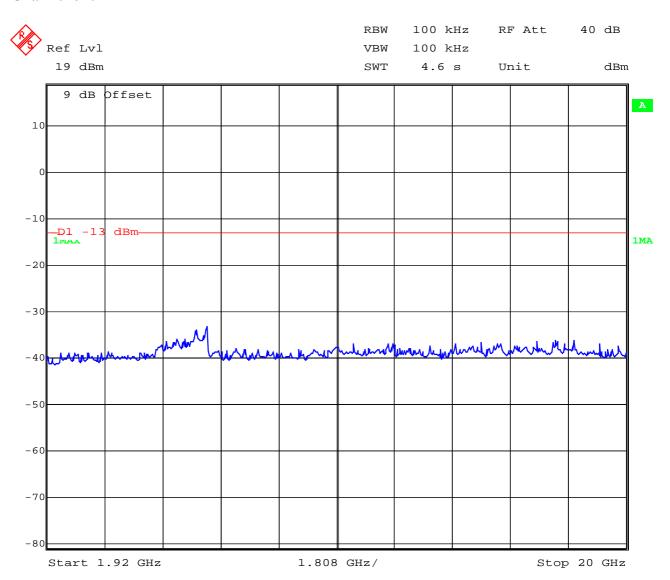

Date: 31.JAN.2002 13:52:07



#### OCCUPIED BANDWIDTH

**§2.989** 

#### **Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	282.525	310.621
1880.0 MHz	274.549	310.621
1909.2 MHz	270.541	304.609

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 290 kHz, this equates to a resolution bandwidth of at least 2.96 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.




## Channel 512 99% Occupied Bandwidth

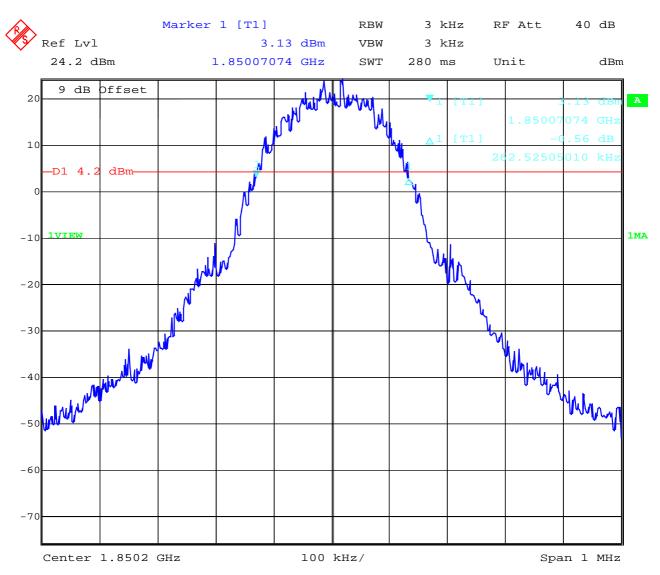

Date: 31.JAN.2002 13:57:11




# Channel 512 -26 dBc Bandwidth

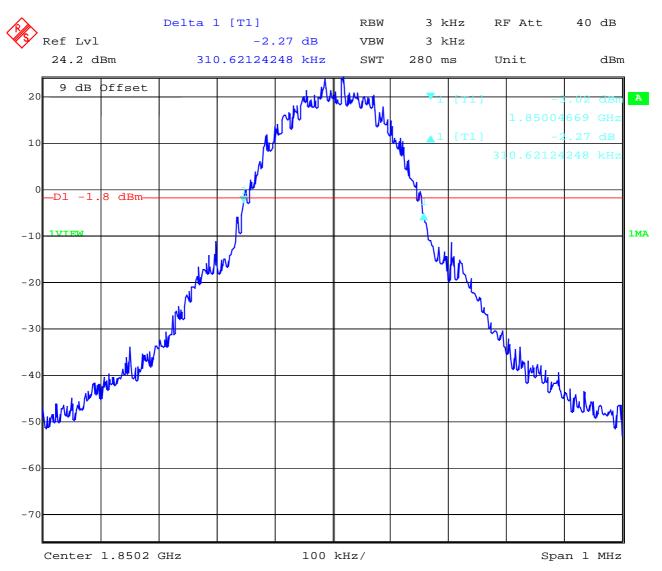

Date: 31.JAN.2002 13:58:27




## Channel 661 99% Occupied Bandwidth

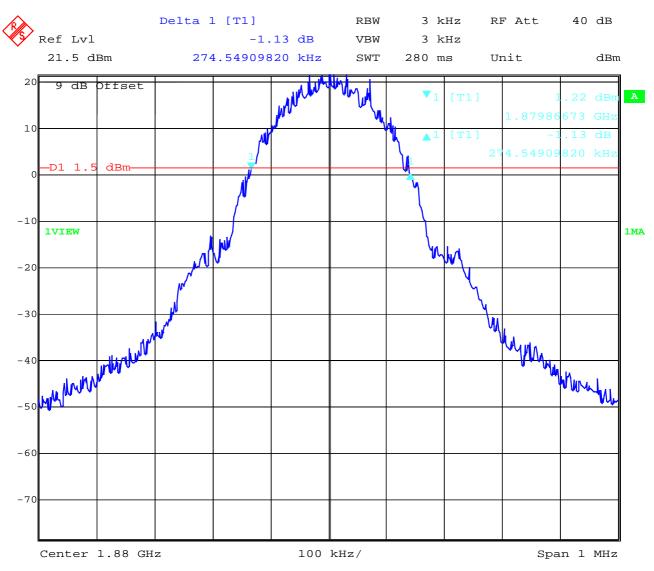

Date: 31.JAN.2002 14:01:39




# Channel 661 -26 dBc Bandwidth

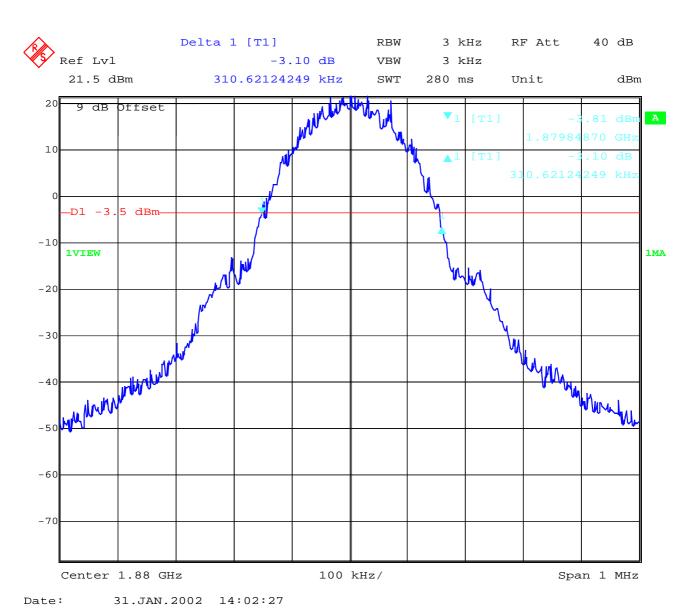




## Channel 810 99% Occupied Bandwidth

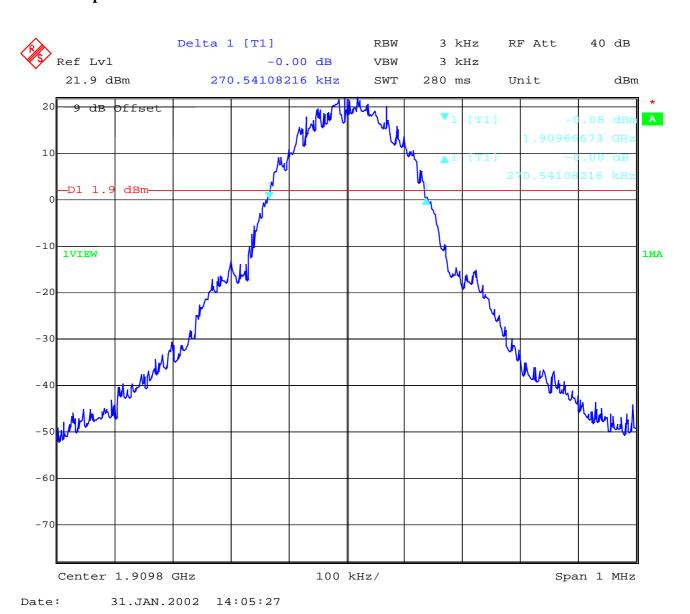



## Channel 810 -26 dBc Bandwidth

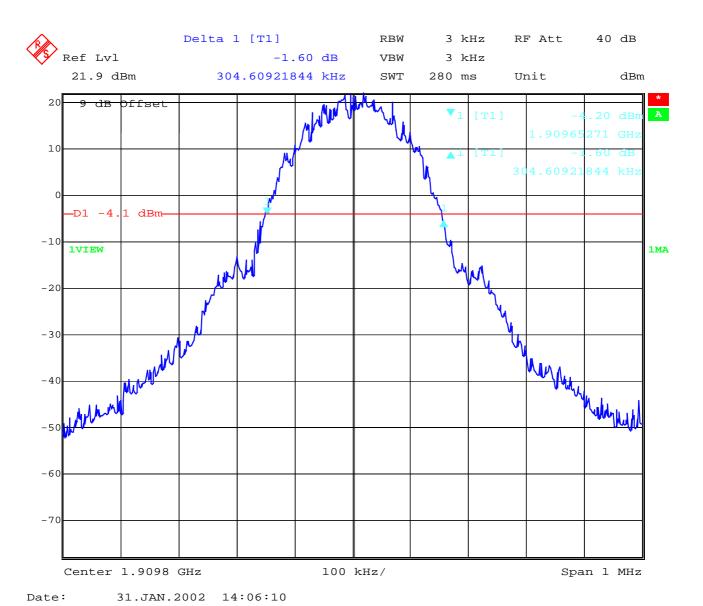




## **CONDUCTED EMISSIONS**

§ 15.107/207


## Line-L1

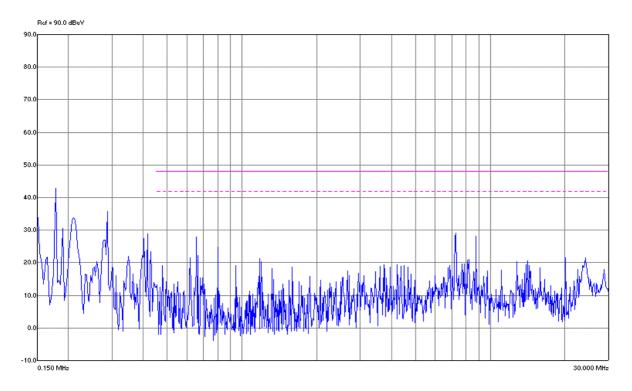

Frequency	Peak Q	P Lim	QP	DelLim-QP	Avg Lim	Avg	DelLim-Avg
MHz	dBuV	dBuV	dBuV	dВ	dBuV	dBuV	dВ
========	=======	======	=====		=======	======	
0.64432	9 32.67	48.00	18.5	-29.4	5 48.00	9.37	7 -38.63
0.80517	1 24.74	48.00	13.29	9 -34.7	1 48.00	-4.15	-52.15
7.25741	8 29.02	48.00	11.95	-36.0	5 48.00	-2.48	-50.48
8.79910	1 28.05	48.00	7.93	1 -40.0	9 48.00	2.50	-45.50
20.16112	7 21.60	48.00	0.76	-47.2	4 48.00	-10.68	-58.68



Line N

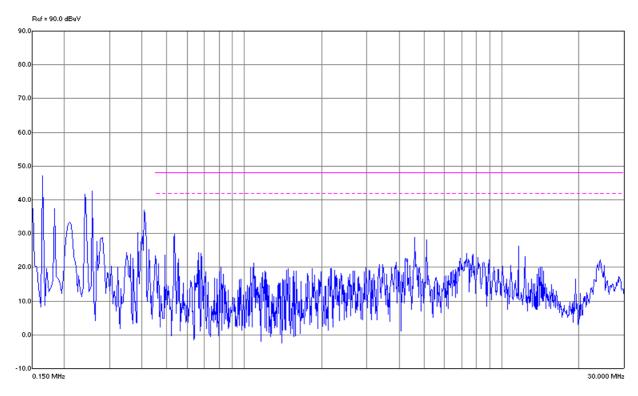

Frequency	~	Lim	~	~	Avg Lim	_	DelLim-Avg	
MHz	dBuV 	dBuV	dBuV	dB 	dBu'	V dBuV	dB 	
0 52004		40.00		- 01 4	- 40	00 10 2	25.65	
0.53004	7 29.81	48.00	26.55	5 -21.4	5 48.	00 10.3	5 -37.65	
0.65438	7 24.43	48.00	18.68	3 -29.32	2 48.	00 2.6	5 -45.35	
4.59302	0 28.89	48.00	11.69	9 -36.33	1 48.	00 -4.4	0 -52.40	
5.13251	9 28.12	48.00	13.01	1 -34.99	9 48.	00 -5.8	0 -53.80	
11.64326	9 26.32	48.00	4.62	2 -43.38	8 48.	00 -8.6	9 -56.69	



#### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No         Instrument/Ancillary         Type         Manufacturer         Serial No.           01         Spectrum Analyzer         8566 A         Hewlett-Packard         1925A0025           02         Analyzer Display         8566 A         Hewlett-Packard         1925A00860           03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         22848A07027           06         Signal Generator         8662 A         Hewlett-Packard         2215G00867           07         Signal Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A10056           15         Mod					1
02         Analyzer Display         8566 A         Hewlett-Packard         1925A00860           03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2248A07027           06         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         264           16         Frequency		Instrument/Ancillary			
03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2248007027           06         Signal Generator         8111 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic		Spectrum Analyzer		Hewlett-Packard	1925A00257
04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2848A07027           06         Signal Generator         8662 A         Hewlett-Packard         2215G00867           07         Signal Generator         A662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         2747A05306           17		Analyzer Display		Hewlett-Packard	1925A00860
Analyzer   05   System Power Supply   6038 A   Hewlett-Packard   2848A07027   06   Signal Generator   8111 A   Hewlett-Packard   2215G00867   07   Signal Generator   8662 A   Hewlett-Packard   2224A01012   08   Function Generator   AFGU   Rohde & Schwarz   862480/032   09   Regulating Transformer   MPL   Erfi   91350   10   LISN   NNLA 8120   Schwarzbeck   8120331   11   Relay-Matrix   PSU   Rohde & Schwarz   893 285/020   12   Power-Meter   436 A   Hewlett-Packard   2101A12378   13   Power-Sensor   8484 A   Hewlett-Packard   2237A10156   14   Power-Sensor   8482 A   Hewlett-Packard   2237A00616   15   Modulation Meter   9008   Racal-Dana   2647   Anechoic Chamber     MWB   87400/002   18   Spectrum Analyzer   85660 B   Hewlett-Packard   2747A05306   19   Analyzer Display   85662 A   Hewlett-Packard   2816A16541   20   Quasi Peak Adapter   85650 A   Hewlett-Packard   2816A16541   20   Quasi Peak Adapter   85650 A   Hewlett-Packard   2813A00768   22   Biconical Antenna   3104   Emco   3758   23   Log. Per. Antenna   3146   Emco   3758   23   Log. Per. Antenna   3146   Emco   3088   25   EMI-Testreceiver   ESAI   Rohde & Schwarz   863 180/013   26   EMI-Analyzer-Display   ESAI-D   Rohde & Schwarz   889 45/013   28   Log. Per. Antenna   HK 116   Rohde & Schwarz   889 45/013   28   Log. Per. Antenna   HK 116   Rohde & Schwarz   825 584/002   9   Relay-Switch-Unit   RSU   Rohde & Schwarz   375 339/002   30   Highpass   HM985955   FSY Microwave   375 339/002   30   Amplifier   P42-GA29   Tron-Tech   B 23602   32   Anechoic Chamber   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004	03	Oscilloscope	7633	Tektronix	230054
05         System Power Supply         6038 A         Hewlett-Packard         2848A07027           06         Signal Generator         8111 A         Hewlett-Packard         2215G00867           07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer <td>04</td> <td>Radio Communication</td> <td>CMTA 54</td> <td>Rohde &amp; Schwarz</td> <td>894 043/010</td>	04	Radio Communication	CMTA 54	Rohde & Schwarz	894 043/010
06         Signal Generator         8111 A         Hewlett-Packard         2215G00867           07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A00616           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber		ř			
07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter <td>05</td> <td>System Power Supply</td> <td>6038 A</td> <td>Hewlett-Packard</td> <td>2848A07027</td>	05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector	06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A00616           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2831A00768           22         Biconical Antenna <td>07</td> <td>Signal Generator</td> <td>8662 A</td> <td>Hewlett-Packard</td> <td>2224A01012</td>	07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2813A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna	08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn	09	Regulating Transformer	MPL	Erfi	91350
12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI<	10	LISN	NNLA 8120	Schwarzbeck	8120331
13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         281A01131           21         RF-Preselector         85685 A         Hewlett-Packard         283A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display <t< td=""><td>11</td><td>Relay-Matrix</td><td>PSU</td><td>Rohde &amp; Schwarz</td><td>893 285/020</td></t<>	11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna	12	Power-Meter	436 A	Hewlett-Packard	2101A12378
15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         886 945/013           28         Log. Per. Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit </td <td>13</td> <td>Power-Sensor</td> <td>8484 A</td> <td>Hewlett-Packard</td> <td>2237A10156</td>	13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpas	14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpa	15	<b>Modulation Meter</b>	9008	Racal-Dana	2647
18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber	16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber	17	Anechoic Chamber		MWB	87400/002
20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia         Frankonia           33         Control Computer         PSM 7	18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz	19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
24Double Ridged Horn3115Emco308825EMI-TestreceiverESAIRohde & Schwarz863 180/01326EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 771/00827Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	22	Biconical Antenna	3104	Emco	3758
25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	23	Log. Per. Antenna	3146	Emco	2130
26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	24	Double Ridged Horn	3115	Emco	3088
27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
29Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	27	<b>Biconical Antenna</b>	HK 116	Rohde & Schwarz	888 945/013
29Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
31AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	29		RSU	Rohde & Schwarz	375 339/002
32Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	30	Highpass	HM985955	FSY Microwave	001
33 Control Computer PSM 7 Rohde & Schwarz 834 621/004 34 EMI Test Receiver ESMI Rohde & Schwarz 827 063/010	31	Amplifier	P42-GA29	Tron-Tech	B 23602
34 EMI Test Receiver ESMI Rohde & Schwarz 827 063/010	32	Anechoic Chamber		Frankonia	
	33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
35 EMI Test Receiver Display Rohde & Schwarz 829 808/010	34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
	35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010



## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn	3115	EMCO	9107-3696
	Antenna 1-26.5 GHz			
50	Microw. Sys. Amplifier	8317A	Hewlett Packard	3123A00105
	0.5- 26.5 GHz			
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				