

SPECIFICATION



Shenzhen Daxian Technology Co., Ltd.

Cosonic CE-2176N Right ear
Bluetooth headset antenna

Material Recognition Letter

Guest households	Cosonic	frequency band	2400MHz~2500MHz
Project name	CE-2176N	version	V7.9
Material No.	2E-2176N-108	color	Black
R F design	Peng.Hu	structure design	RuiBin.Zhou
Quality Manager	Jin.Yang	R & D director	Lei.Zhang
Date	2024-05-11		

client confirmation:

Whether the assembly meets your requirements: ☐OK ☐NG

Shenzhen DanXian Technology Co., Ltd.

Shangshuijing Village, No. 513, ihua Road, BujiTown, Longgang District, Shenzhen (opposite to theNational Defense Training Base)reached the 7thfloor of the Industrial Park Complex

TEL:0755-28576002

FAX:0755-84276383

Shanghai Branch: Room 201, Building 8 No, 3000Longdong Avenue,Integrated Circuit IndustrialZone, Zhangjiang Hi-tech Park, Shanghai

TEL:021-61630552

FAX:755-84276383

Change resume

[illegible]

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

Index

I、 Project description.....	4
II、 BT antenna.....	4
1、 specifications.....	4
1.1 Electrical specification standard.....	5
1.2 Motherboard antenna end match:.....	5
1.3 Antenna composition.....	5
2、 The Equipment of Active Test.....	6
3、 test.....	7
3.1 The Test of standing Wave (VSWR).....	7
3.1.1 test connection.....	7
3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS).....	7
3.2.1 Test site.....	7
3.2.2 Test instrument.....	7
3.2.3 test data	7-8
4、 conclusion	8
5、 VSWR parameter diagram.....	9
6、 Antenna passive field patter.....	9-10
7、 Antenna Active Field Patterns.....	10-11
8、 Loading Notes:.....	12
III、 schedule drawing.....	13

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

I、 Project description

Customer name:	Cosonic
Whole machine type:	Bluetooth headset
Antenna band:	2400 ~ 2500MHz
Antenna form:	FPC
Feed form:	flick a foot
Number of feed feet:	2 left and right ears
Hardware version:	motherboard:

II、 BT antenna

This report provides a variety of measurements of the electrical performance of the CE-2176N antenna. Figure 1 shows the antenna designed by the display.

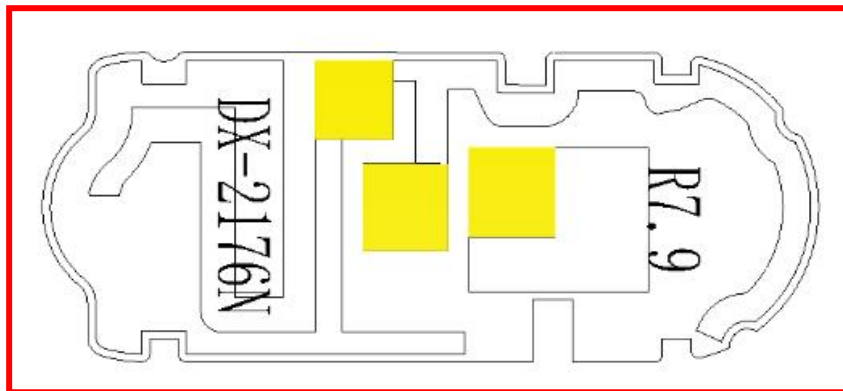

antenna appearing diagram

Figure 1

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.

Frequency Range	Frequency (MHz)	VSWR
Right ear BT	2400 ~ 2500	≤ 3

1.2 Motherboard antenna end match:

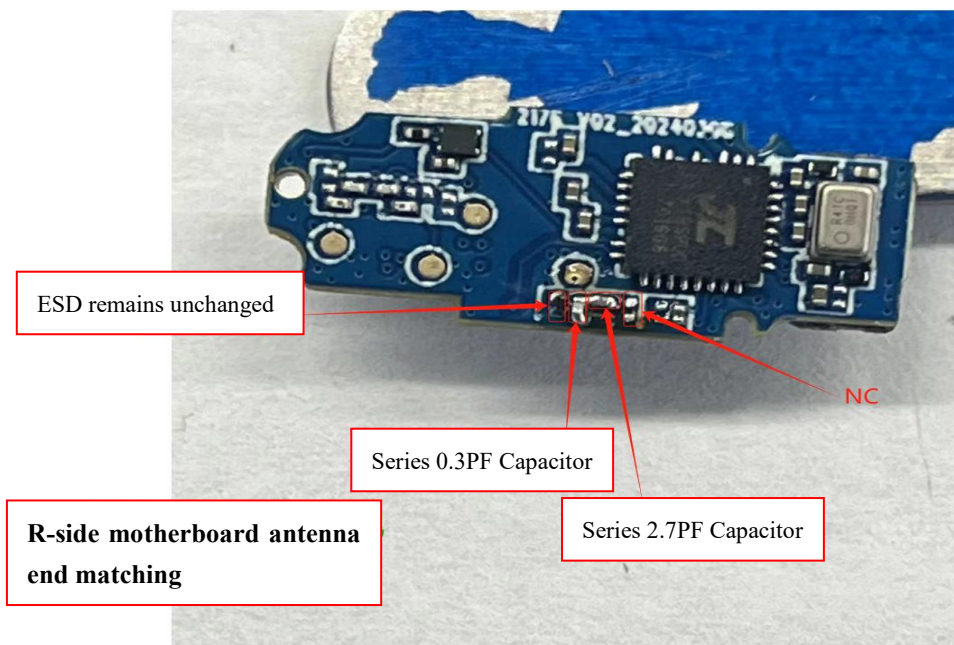

1.3 Antenna composition

The antenna is mainly composed of FPC.

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



Figure 2

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than-50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

OTA Active Test:

R (Right ear)Free Space			
BAND	CH	TRP	TIS
BT	0	2.59	-86.79
	39	3.23	-87.43
	78	2.83	-87.37

R(Riht ear)head Mold			
BAND	CH	TRP	TIS
BT	0	-2.55	-82.03
	39	-2.17	-82.39
	78	-1.79	-82.58

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

Passive Test: R-side-freedom efficiency

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	20.11	-6.21	-1.72
2410	21.08	-5.94	-1.47
2420	22.44	-5.58	-1.46
2430	23.52	-5.32	-1.38
2440	24.35	-5.13	-1.16
2450	25.47	-4.89	-0.79
2460	26.03	-4.77	-0.6
2470	25.95	-4.79	-0.43
2480	25.71	-4.84	-0.3
2490	25.09	-4.97	-0.28
2500	23.97	-5.22	-0.32

R-side-head mold efficiency:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	8.13	-10.63	-5.96
2410	8.22	-10.56	-5.74
2420	8.28	-10.52	-5.82
2430	8.18	-10.59	-5.82
2440	8.05	-10.68	-5.66
2450	8.04	-10.69	-5.42
2460	7.88	-10.8	-5.52
2470	7.71	-10.94	-5.54
2480	7.55	-11.05	-5.52
2490	7.39	-11.18	-5.57
2500	7.21	-11.33	-5.84

4、 conclusion:


This antenna is designed on the basis of the prototype provided by the customer, electrical parameters and structural performance have reached the technical requirements, please confirm!

www.Topant.com.cn


Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

5、 VSWR parameter diagram-Right ear

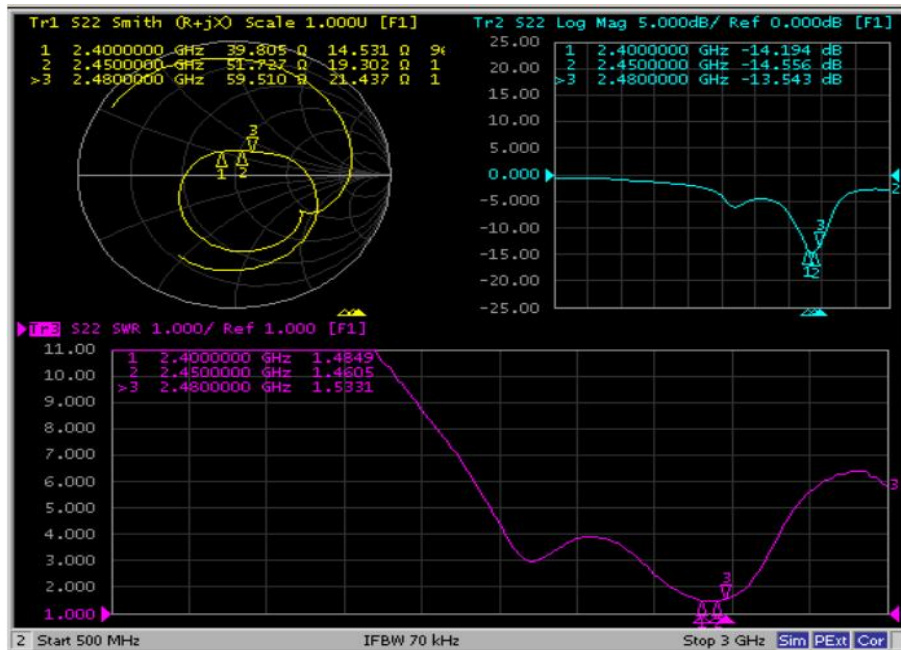


6、 Antenna passive field pattern:

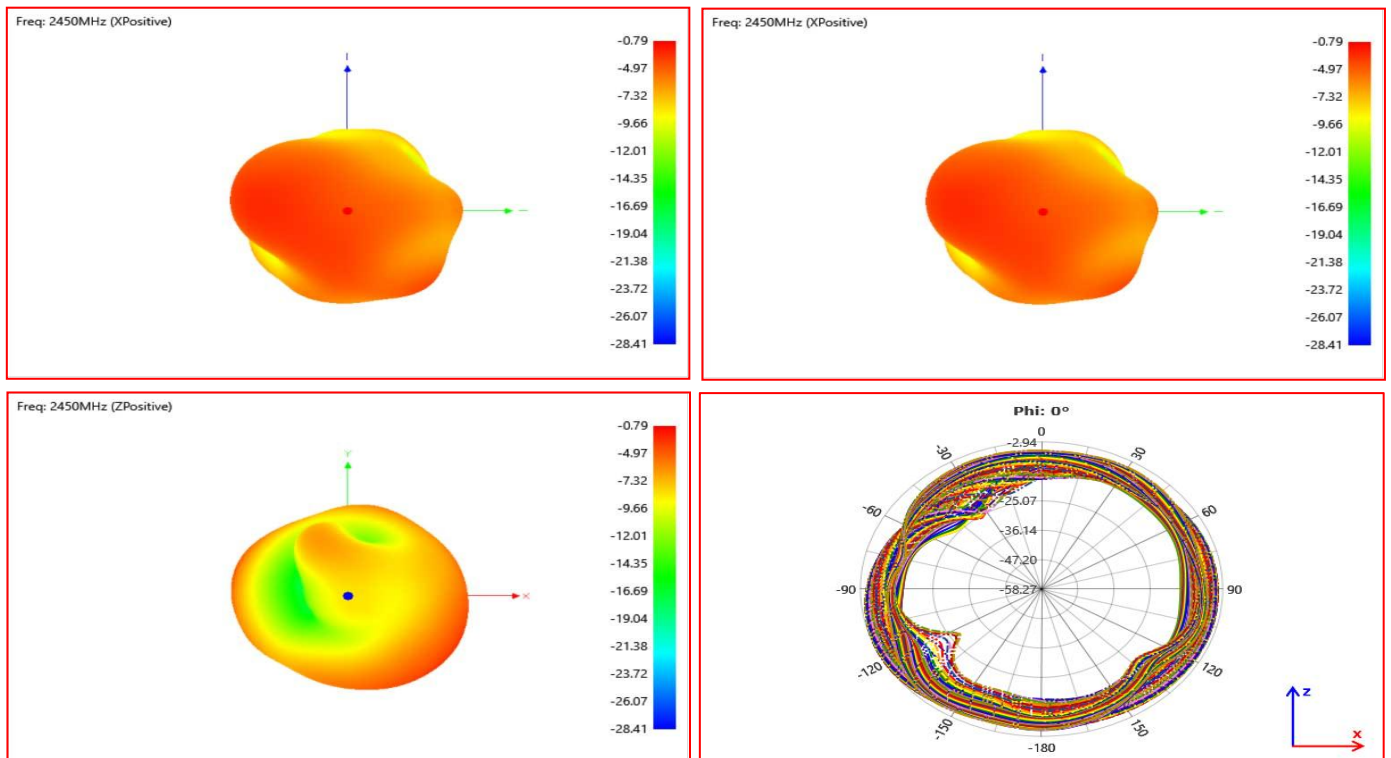

www.Topant.com.cn


Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

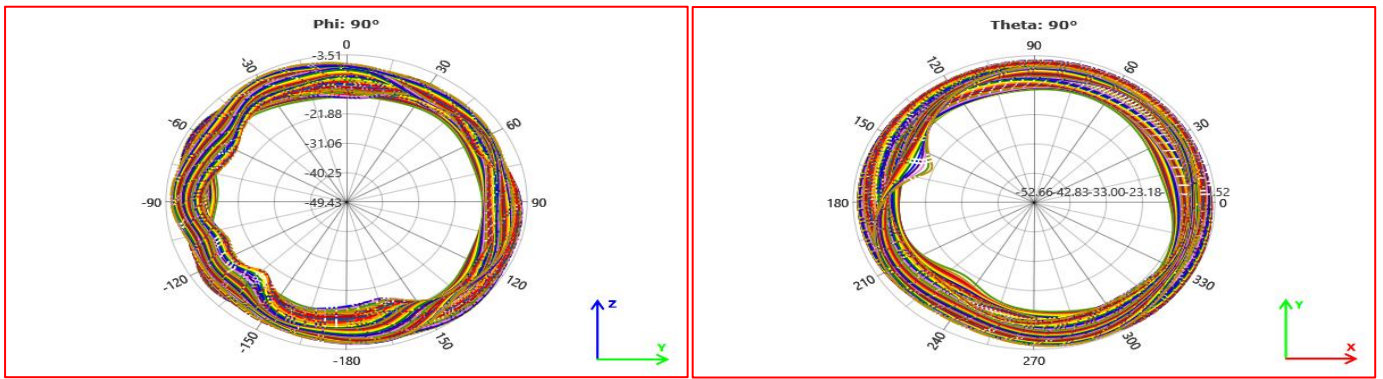

7、Antenna Active Field Patterns:

TRP:

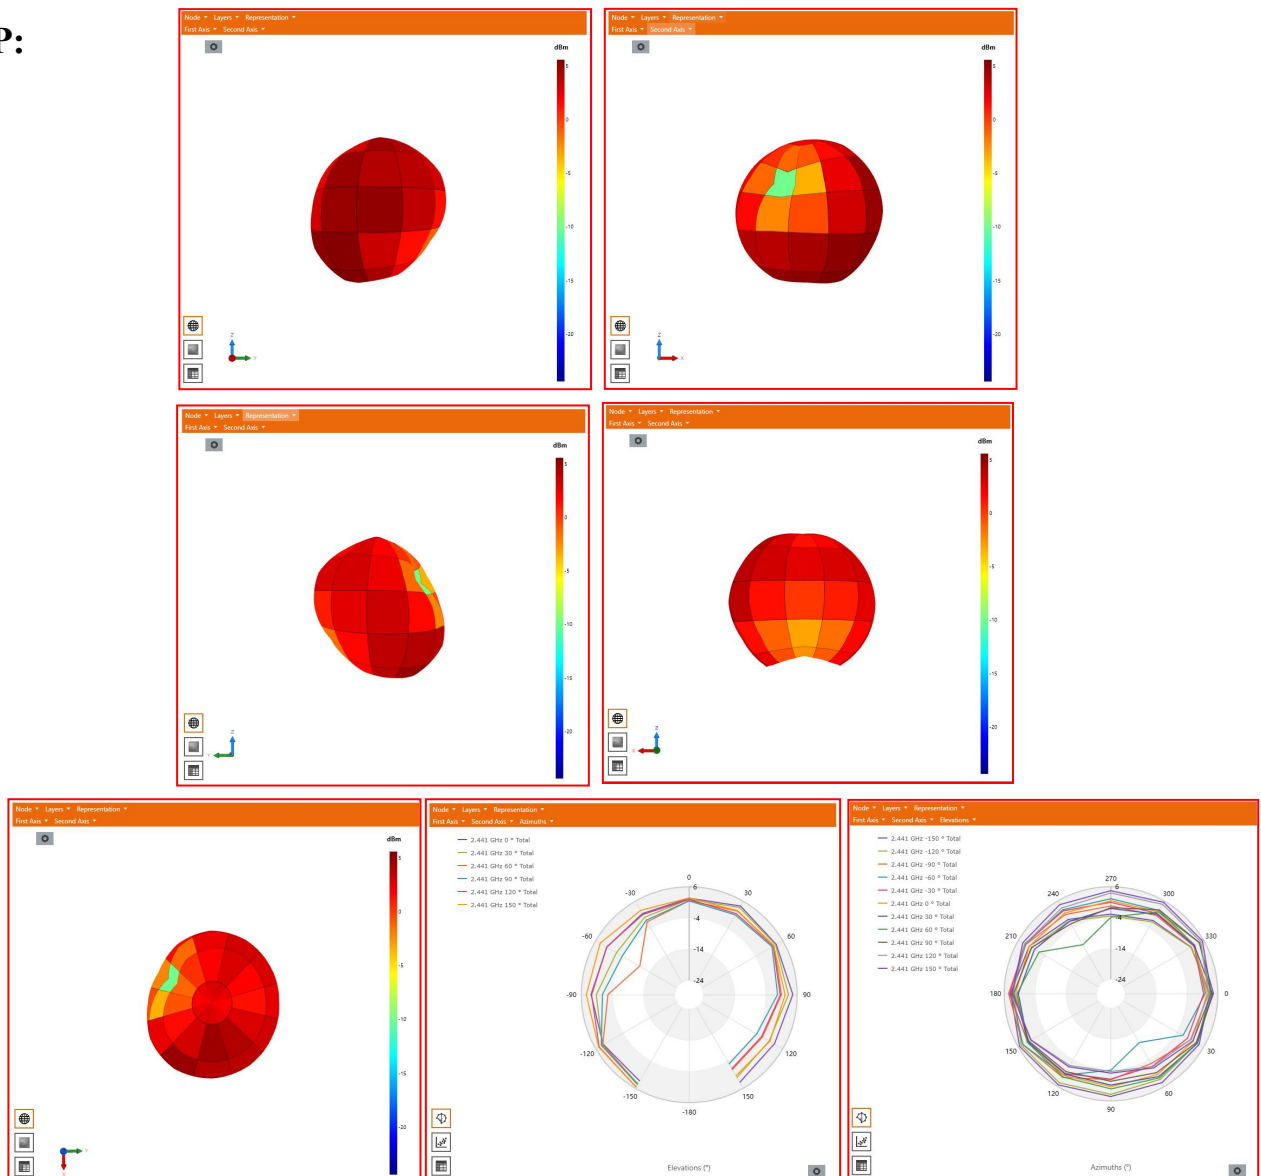


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

TIS:

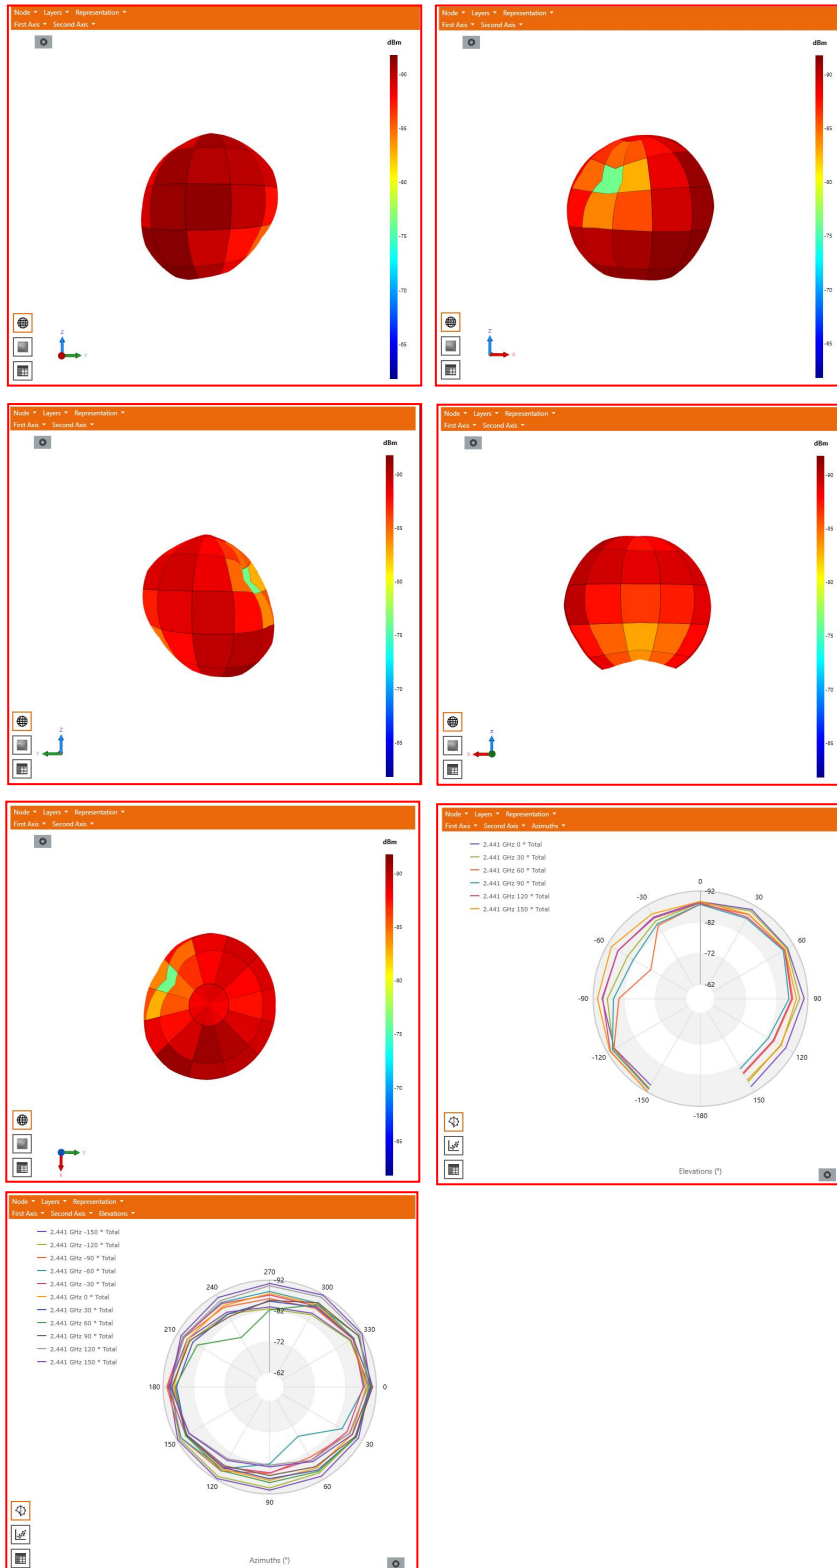


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

8、Loading Notes:

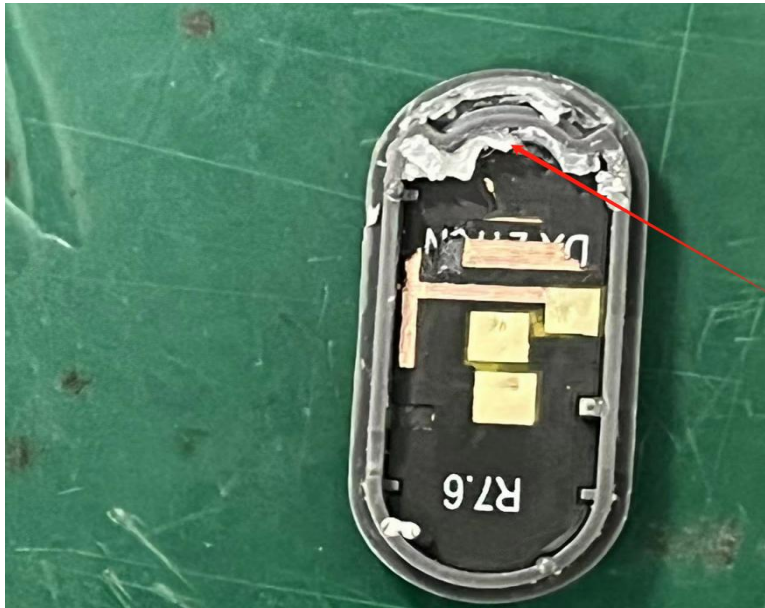

Reference picture: need to reduce the control of the amount of glue, can not let the glue directly overflow to the top of the FPC antenna.

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

[illegible]