

FCC RADIO TEST REPORT

FCC ID: 2AX4YV20

Product: Smart Phone

Trade Mark: DOOGEE

Model No.: V20

Family Model: S86Pro, S86, S97Pro, V10

Report No.: STR220222001005E

Issue Date: Mar 28. 2022

Prepared for

Shenzhen DOOGEE Hengtong Technology CO.,LTD
B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22,
Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street,
Longhua New District, Shenzhen, Guangdong China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	9
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	10
6.2	SUPPORT EQUIPMENT.....	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
7	TEST REQUIREMENTS	14
7.1	FIELD STRENGTH OF SPURIOUS RADIATION	14
7.2	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER.....	31
7.3	CONDUCTED OUTPUT POWER.....	40
7.4	FREQUENCY STABILITY	42
7.5	PEAK-TO-AVERAGE RATIO	51
7.6	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	53
7.7	CONDUCTED BAND EDGE	55
7.8	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	56

1 TEST RESULT CERTIFICATION

Applicant's name	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China
Manufacturer's Name	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China
Product description	
Product name	Smart Phone
Model and/or type reference	V20
Family Model	S86Pro, S86, S97Pro, V10

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E, Part 90S, Part 27 ANSI/TIA-603-E-2016 FCC KDB 971168 D01 Power Meas License Digital Systems v03 ANSI C63.26:2015	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Feb 22, 2022 ~Mar 28, 2022

Testing Engineer : 
(Mukzi Lee)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS

FCC Part22H / FCC Part24E / FCC Part 27/FCC Part 90 & ANSI C63.26-2015			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
Sub clause 5.2.3.4 of ANSI C63.26-2015	Peak-to-Average Ratio	PASS	
2.1049 22.917	Occupied Bandwidth	PASS	
2.1051 22.917 24.238 27.53 90.691	Band Edge	PASS	
22.913	Effective Radiated Power	PASS	
2.1053 22.917 24.238 27.53 90.691	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 90.213	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917 24.238 27.53 90.691	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration

The Certificate Registration Number is 9270A-1.

FCC- Accredited

Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab.

The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm

: Shenzhen NTEK Testing Technology Co., Ltd.

Site Location

: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Smart Phone
Trade Mark	DOOGEE
FCC ID	2AX4YV20
Model No.	V20
Family Model	S86Pro, S86, S97Pro, V10
Model Difference	All the model are the same circuit and RF module,except the model names.
Operating Frequency	☒ GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; ☒ UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; ☒ PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; ☒ UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz; ☒ UMTS-FDD Band IV:TX1710MHz~1755MHz /RX2110MHz~2155MHz ☒ CDMA2000 BC0: TX824.70MHz~848.31MHz /RX869MHz~894MHz; ☒ CDMA2000 BC1: TX1851.25MHz~1908.75MHz /RX1931.25MHz~1988.75MHz; ☒ CDMA2000 BC10: TX816MHz~824MHz /RX861MHz~869MHz;
Modulation	☒ GMSK for GSM/GPRS; ☒ 8PSK for EGPRS; ☒ QPSK for UMTS bands; ☒ QPSK for CDMA2000;
Power Class	4, tested with power level 5(GSM 850) 1, tested with power level 0(GSM 1900) 3, tested with power control "all 1"(WCDMA Band II/IV/V) 3, tested with power control "all up"(CDMA BC0/1/10)
GPRS Class	☒ Multi-Class12 ☒ Only 4 timeslots are used for GPRS
CDMA Type	1xRTT, 1xEV-Do
SIM CARD	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna Type	PIFA Antenna
Antenna Gain	0.8 dBi
Adapter	Model: HJ-PD33W-US Input: AC 100-240V~50/60Hz, 0.8A Output: DC 5.0V---3.0A. DC 9.0V---3.0A. DC 11.0V---3.0A. 33.0W
Battery	DC 3.85V, 6000mAh, 23.1Wh
Power supply	DC 3.85V from battery or DC 11V from Adapter.

HW Version	A201_V01
SW Version	DOOGEE-V20-Android11.0-20211119

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

[illegible]

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on CDMA2000 BC0,BC1, BC10,GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV frequency band.

Note: GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV, CDMA2000 BC0, BC1, BC10 modes have been tested during the test. the worst condition (GSM850, RMC 12.2k, CDMA2000 1xRTT BC0, BC1, BC10& 1xEVDO Rev A BC0, BC1, BC10) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V/ UMTS FDD Band IV.
2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II/CDMA BC0/1/10

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link
CDMA2000	1xRTT& 1xEVDO Rev A	1xRTT& 1xEVDO Rev A

Test Frequency and Channels:

Frequency Band	☒ GSM 850		☒ GSM 1900		☒ UMTS Band II		☒ UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	189	836.4	661	1880.0	9400	1880.0	4182	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4

Frequency Band	☒ UMTS Band IV		☒ CDMA2000 BC1		☒ CDMA2000 BC0		☒ CDMA2000 BC10	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	1513	1752.6	25	1851.25	777	848.31	450	817.25
CH_M	1412	1732.4	600	1880.00	384	836.52	560	820
CH_L	1312	1712.4	1175	1908.75	1013	824.70	670	822.75


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For Radiated Test Cases




For Conducted Output Power

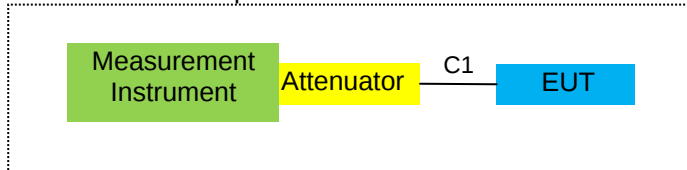

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

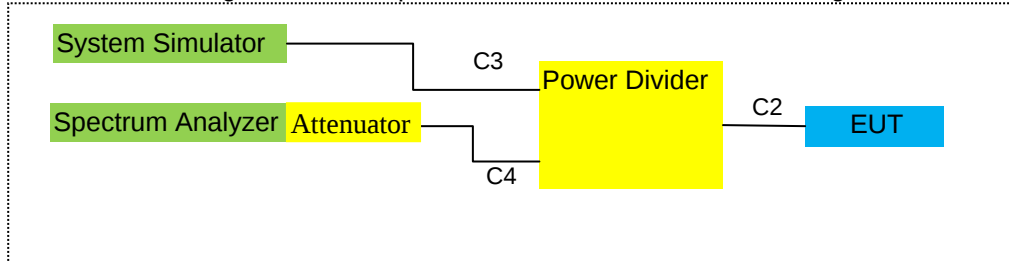

For Frequency Stability

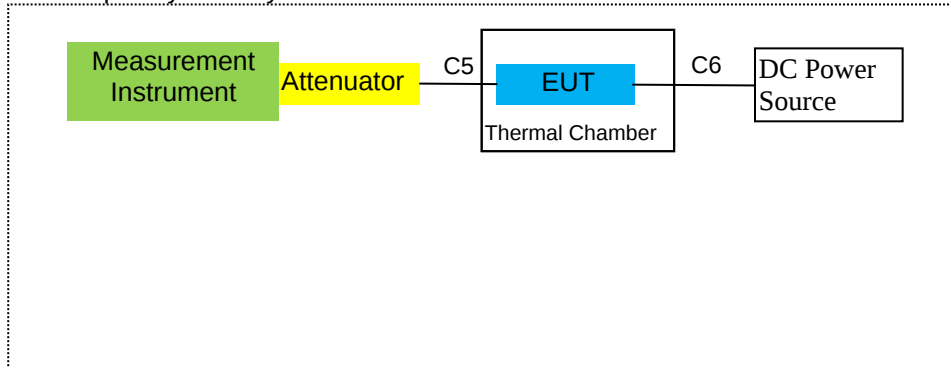

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m
C-2	RF Cable	YES	NO	0.1m
C-3	RF Cable	YES	NO	0.1m
C-4	RF Cable	YES	NO	0.2m
C-5	RF Cable	YES	NO	0.2m
C-6	DC Cable	NO	NO	1.0m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
2	Test Receiver	R&S	ESPI	101318	2021.04.27	2022.04.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2021.11.07	2022.11.06	1 year
7	Amplifier	EM	EM-30180	060538	2021.07.01	2022.06.30	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2021.04.27	2022.04.26	1 year
9	Power Meter	R&S	NRVS	100696	2021.07.01	2022.06.30	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2021.04.27	2022.04.26	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
15	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
16	LISN	EMCO	3816/2	00042990	2021.04.27	2022.04.26	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2021.04.27	2022.04.26	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2021.04.27	2022.04.26	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2020.04.07	2023.04.06	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2021.04.27	2022.04.26	1 year
24	test receiver	R&S	ESCI	a0304218	2021.04.27	2022.04.26	1 year
25	Communication Tester	R&S	CMU200	A0304247	2021.07.01	2022.06.30	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2021.04.27	2022.04.26	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year

29	Communication Tester	R&S	CMW500	148500	2021.07.01	2022.06.30	1 year
30	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 FIELD STRENGTH OF SPURIOUS RADIATION

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E-2016 Section 2.2.12

7.1.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.1.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II / WCDMA Band V / GSM 850 / GSM 1900.

TEST CONFIGURATION

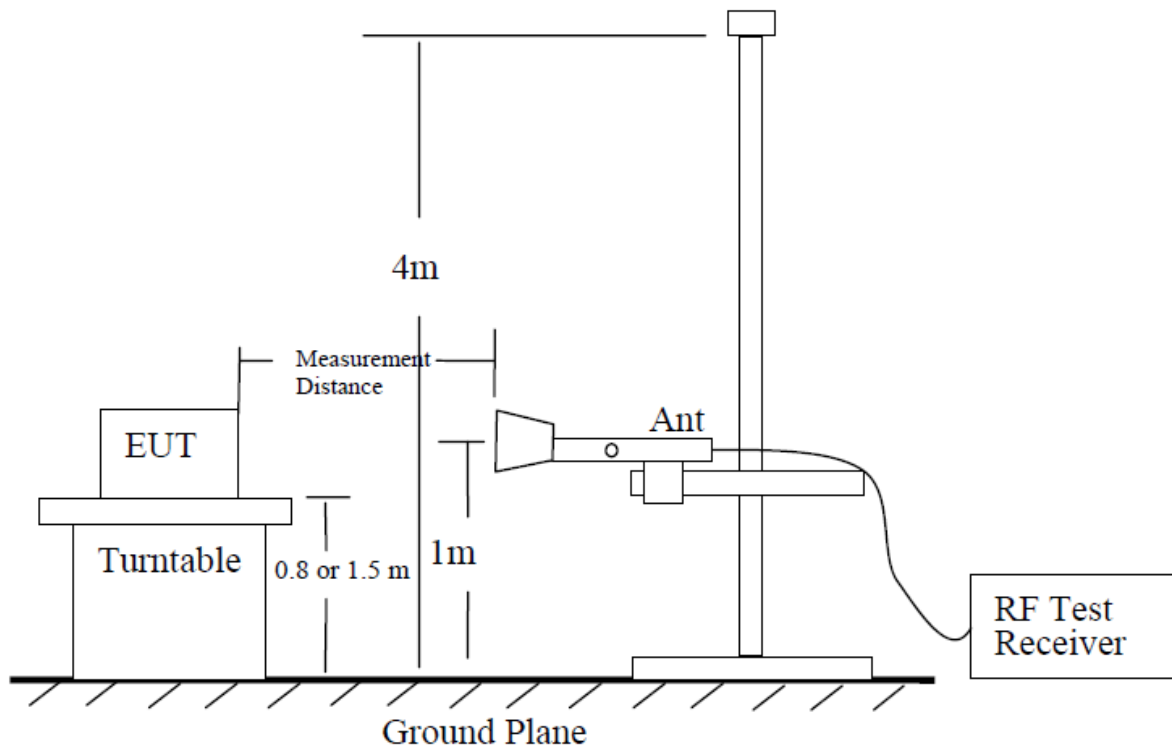

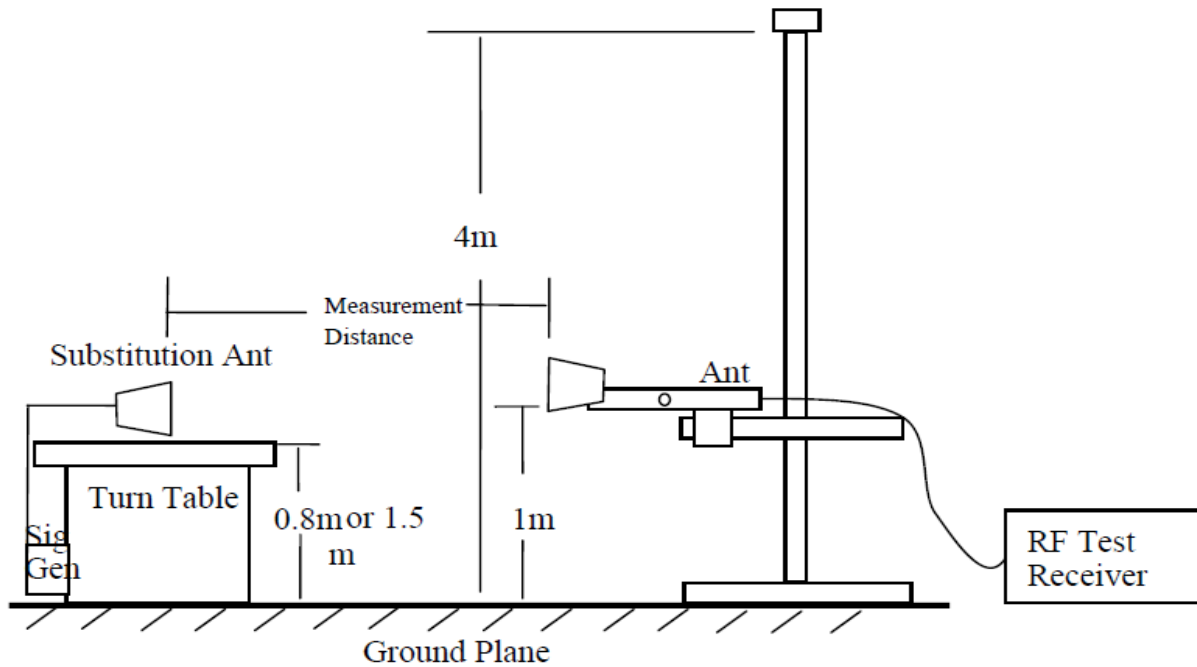

7.1.5 Test Procedure

1. EUT was placed on a 0.8 meter (For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss), the Substitution Antenna Gain should be recorded after test.
The measurement results are obtained as described below:
 $\text{Power(EIRP)} = \text{SG Level} - \text{Cable Loss} + \text{Antenna Gain}$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

7.1.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC10 CDMA2000 EVDO-Rev A BC0/BC1/BC10	Test By:	Mukzi Lee

■ Radiated Spurious Emission

GSM 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-53.71	2.80	27.50	-29.01	-13	-16.01	Vertical
1648.4	-48.02	2.80	27.50	-23.32	-13	-10.32	Horizontal
2472.6	-48.56	2.91	27.80	-23.67	-13	-10.67	Vertical
2472.6	-51.41	2.91	27.80	-26.52	-13	-13.52	Horizontal
3296.8	-44.84	4.02	29.87	-18.99	-13	-5.99	Vertical
3296.8	-53.5	4.02	29.87	-27.65	-13	-14.65	Horizontal
131.2	-48.02	1.35	17.77	-31.60	-13	-18.60	Vertical
116.8	-53.03	1.77	17.83	-36.97	-13	-23.97	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-48.63	2.80	27.48	-23.95	-13	-10.95	Vertical
1673.2	-52.78	2.80	27.48	-28.10	-13	-15.10	Horizontal
2509.8	-52.07	2.91	27.70	-27.28	-13	-14.28	Vertical
2509.8	-48.34	2.91	27.70	-23.55	-13	-10.55	Horizontal
3346.4	-49.83	4.02	29.82	-24.03	-13	-11.03	Vertical
3346.4	-51.72	4.02	29.82	-25.92	-13	-12.92	Horizontal
208.8	-46.68	1.44	15.26	-32.87	-13	-19.87	Vertical
131.6	-47.94	1.51	17.23	-32.22	-13	-19.22	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-49.7	2.80	27.42	-25.08	-13	-12.08	Vertical
1697.6	-49.49	2.80	27.42	-24.87	-13	-11.87	Horizontal
2546.4	-48.05	2.91	27.68	-23.28	-13	-10.28	Vertical
2546.4	-53.99	2.91	27.68	-29.22	-13	-16.22	Horizontal
3395.2	-52.15	4.02	29.80	-26.37	-13	-13.37	Vertical
3395.2	-52.81	4.02	29.80	-27.03	-13	-14.03	Horizontal
95.0	-49.73	1.74	16.46	-35.01	-13	-22.01	Vertical
208.3	-50.89	1.68	16.21	-36.36	-13	-23.36	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-45.29	2.80	27.50	-20.59	-13	-7.59	Vertical
1648.4	-44.14	2.80	27.50	-19.44	-13	-6.44	Horizontal
2472.6	-46.36	2.91	27.80	-21.47	-13	-8.47	Vertical
2472.6	-53.96	2.91	27.80	-29.07	-13	-16.07	Horizontal
3296.8	-53.82	4.02	29.87	-27.97	-13	-14.97	Vertical
3296.8	-52.23	4.02	29.87	-26.38	-13	-13.38	Horizontal
154.8	-47.86	1.35	16.91	-32.30	-13	-19.30	Vertical
238.4	-45.09	1.59	17.39	-29.28	-13	-16.28	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-51.73	2.80	27.48	-27.05	-13	-14.05	Vertical
1673.2	-49.87	2.80	27.48	-25.19	-13	-12.19	Horizontal
2509.8	-45.02	2.91	27.70	-20.23	-13	-7.23	Vertical
2509.8	-51.96	2.91	27.70	-27.17	-13	-14.17	Horizontal
3346.4	-45.46	4.02	29.82	-19.66	-13	-6.66	Vertical
3346.4	-52.84	4.02	29.82	-27.04	-13	-14.04	Horizontal
110.1	-45.25	1.36	17.36	-29.25	-13	-16.25	Vertical
148.2	-51.12	1.32	15.19	-37.26	-13	-24.26	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-44.1	2.80	27.42	-19.48	-13	-6.48	Vertical
1697.6	-46.8	2.80	27.42	-22.18	-13	-9.18	Horizontal
2546.4	-48.23	2.91	27.68	-23.46	-13	-10.46	Vertical
2546.4	-49.18	2.91	27.68	-24.41	-13	-11.41	Horizontal
3395.2	-49.61	4.02	29.80	-23.83	-13	-10.83	Vertical
3395.2	-50.08	4.02	29.80	-24.30	-13	-11.30	Horizontal
198.1	-52.06	1.46	17.68	-35.84	-13	-22.84	Vertical
220.2	-47.45	1.31	15.79	-32.97	-13	-19.97	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 850							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 128/824.2 MHz							
1648.4	-52.83	2.80	27.50	-28.13	-13	-15.13	Vertical
1648.4	-44.23	2.80	27.50	-19.53	-13	-6.53	Horizontal
2472.6	-46.38	2.91	27.80	-21.49	-13	-8.49	Vertical
2472.6	-45.76	2.91	27.80	-20.87	-13	-7.87	Horizontal
3296.8	-49.21	4.02	29.87	-23.36	-13	-10.36	Vertical
3296.8	-45.04	4.02	29.87	-19.19	-13	-6.19	Horizontal
116.4	-49.56	1.69	16.60	-34.65	-13	-21.65	Vertical
166.1	-52.55	1.44	17.78	-36.20	-13	-23.20	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-52.53	2.80	27.48	-27.85	-13	-14.85	Vertical
1673.2	-49.23	2.80	27.48	-24.55	-13	-11.55	Horizontal
2509.8	-52.61	2.91	27.70	-27.82	-13	-14.82	Vertical
2509.8	-47.88	2.91	27.70	-23.09	-13	-10.09	Horizontal
3346.4	-50.89	4.02	29.82	-25.09	-13	-12.09	Vertical
3346.4	-45.6	4.02	29.82	-19.80	-13	-6.80	Horizontal
160.1	-48.2	1.54	16.14	-33.61	-13	-20.61	Vertical
246.5	-47.64	1.31	17.24	-31.71	-13	-18.71	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-51.93	2.80	27.42	-27.31	-13	-14.31	Vertical
1697.6	-44.27	2.80	27.42	-19.65	-13	-6.65	Horizontal
2546.4	-50.92	2.91	27.68	-26.15	-13	-13.15	Vertical
2546.4	-44.1	2.91	27.68	-19.33	-13	-6.33	Horizontal
3395.2	-52.26	4.02	29.80	-26.48	-13	-13.48	Vertical
3395.2	-45.81	4.02	29.80	-20.03	-13	-7.03	Horizontal
272.1	-48.73	1.73	15.96	-34.50	-13	-21.50	Vertical
163.9	-50.76	1.35	17.53	-34.58	-13	-21.58	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band V							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 4233/846.6MHz							
1693.2	-47.94	2.80	27.50	-23.24	-13	-10.24	Vertical
1693.2	-44.83	2.80	27.50	-20.13	-13	-7.13	Horizontal
2539.8	-49.04	2.91	27.80	-24.15	-13	-11.15	Vertical
2539.8	-44.6	2.91	27.80	-19.71	-13	-6.71	Horizontal
3386.4	-52.83	4.02	29.87	-26.98	-13	-13.98	Vertical
3386.4	-51.81	4.02	29.87	-25.96	-13	-12.96	Horizontal
264.3	-49.29	1.75	15.49	-35.55	-13	-22.55	Vertical
209.9	-45.97	1.37	16.58	-30.76	-13	-17.76	Horizontal
Test Results for Channel 4182/836.4MHz							
1672.8	-52.06	2.80	27.48	-27.38	-13	-14.38	Vertical
1672.8	-49.18	2.80	27.48	-24.50	-13	-11.50	Horizontal
2509.2	-50.89	2.91	27.70	-26.10	-13	-13.10	Vertical
2509.2	-45.77	2.91	27.70	-20.98	-13	-7.98	Horizontal
3345.6	-45.04	4.02	29.82	-19.24	-13	-6.24	Vertical
3345.6	-44.34	4.02	29.82	-18.54	-13	-5.54	Horizontal
255.8	-45.69	1.68	17.84	-29.53	-13	-16.53	Vertical
129.8	-49.89	1.49	16.34	-35.03	-13	-22.03	Horizontal
Test Results for Channel 4132/826.4MHz							
1652.8	-48.24	2.80	27.42	-23.62	-13	-10.62	Vertical
1652.8	-50.2	2.80	27.42	-25.58	-13	-12.58	Horizontal
2479.2	-46.65	2.91	27.68	-21.88	-13	-8.88	Vertical
2479.2	-46.09	2.91	27.68	-21.32	-13	-8.32	Horizontal
3305.6	-50.77	4.02	29.80	-24.99	-13	-11.99	Vertical
3305.6	-46.83	4.02	29.80	-21.05	-13	-8.05	Horizontal
135.6	-48.47	1.36	17.52	-32.31	-13	-19.31	Vertical
190.6	-51.46	1.63	15.02	-38.07	-13	-25.07	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GSM 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-45.08	4.04	33.51	-15.61	-13	-2.61	Vertical
3700.4	-53.55	4.04	33.51	-24.08	-13	-11.08	Horizontal
5550.6	-51.86	5.24	35.84	-21.26	-13	-8.26	Vertical
5550.6	-52.77	5.24	35.84	-22.17	-13	-9.17	Horizontal
105.3	-44.88	1.40	15.14	-31.14	-13	-18.14	Vertical
247.6	-53.38	1.45	17.54	-37.29	-13	-24.29	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-52.82	4.04	33.56	-23.30	-13	-10.30	Vertical
3760	-46.68	4.04	33.56	-17.16	-13	-4.16	Horizontal
5640	-48.98	5.24	35.91	-18.31	-13	-5.31	Vertical
5640	-50.99	5.24	35.91	-20.32	-13	-7.32	Horizontal
187.9	-47.86	1.74	16.40	-33.20	-13	-20.20	Vertical
86.7	-44.04	1.42	15.72	-29.73	-13	-16.73	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-45.65	4.04	34.00	-15.69	-13	-2.69	Vertical
3819.6	-49.13	4.04	34.00	-19.17	-13	-6.17	Horizontal
5729.4	-49.4	5.24	36.04	-18.60	-13	-5.60	Vertical
5729.4	-44.01	5.24	36.04	-13.21	-13	-0.21	Horizontal
217.3	-50.63	1.67	17.51	-34.79	-13	-21.79	Vertical
112.7	-53.46	1.58	17.73	-37.31	-13	-24.31	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-44.68	4.04	33.51	-15.21	-13	-2.21	Vertical
3700.4	-50.69	4.04	33.51	-21.22	-13	-8.22	Horizontal
5550.6	-49.81	5.24	35.84	-19.21	-13	-6.21	Vertical
5550.6	-44.7	5.24	35.84	-14.10	-13	-1.10	Horizontal
249.9	-47.34	1.66	17.06	-31.95	-13	-18.95	Vertical
237.9	-52.25	1.34	15.54	-38.05	-13	-25.05	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-52.04	4.04	33.56	-22.52	-13	-9.52	Vertical
3760	-53.62	4.04	33.56	-24.10	-13	-11.10	Horizontal
5640	-53.65	5.24	35.91	-22.98	-13	-9.98	Vertical
5640	-47.73	5.24	35.91	-17.06	-13	-4.06	Horizontal
168.5	-50.17	1.33	16.18	-35.32	-13	-22.32	Vertical
249.4	-51	1.60	17.99	-34.61	-13	-21.61	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-50.36	4.04	34.00	-20.40	-13	-7.40	Vertical
3819.6	-52.41	4.04	34.00	-22.45	-13	-9.45	Horizontal
5729.4	-46.44	5.24	36.04	-15.64	-13	-2.64	Vertical
5729.4	-45.68	5.24	36.04	-14.88	-13	-1.88	Horizontal
206.6	-49.67	1.65	17.27	-34.06	-13	-21.06	Vertical
227.8	-44.43	1.39	15.49	-30.34	-13	-17.34	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 1900							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 512/1850.2MHz							
3700.4	-49.12	4.04	33.51	-19.65	-13	-6.65	Vertical
3700.4	-51.85	4.04	33.51	-22.38	-13	-9.38	Horizontal
5550.6	-53.29	5.24	35.84	-22.69	-13	-9.69	Vertical
5550.6	-51.93	5.24	35.84	-21.33	-13	-8.33	Horizontal
224.9	-48.72	1.41	17.87	-32.26	-13	-19.26	Vertical
105.4	-44.43	1.47	17.45	-28.46	-13	-15.46	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-44.5	4.04	33.56	-14.98	-13	-1.98	Vertical
3760	-47.46	4.04	33.56	-17.94	-13	-4.94	Horizontal
5640	-50.02	5.24	35.91	-19.35	-13	-6.35	Vertical
5640	-53.65	5.24	35.91	-22.98	-13	-9.98	Horizontal
110.0	-50.25	1.35	15.31	-36.30	-13	-23.30	Vertical
231.5	-51.77	1.48	17.05	-36.20	-13	-23.20	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-50.19	4.04	34.00	-20.23	-13	-7.23	Vertical
3819.6	-46.92	4.04	34.00	-16.96	-13	-3.96	Horizontal
5729.4	-52.54	5.24	36.04	-21.74	-13	-8.74	Vertical
5729.4	-45.46	5.24	36.04	-14.66	-13	-1.66	Horizontal
156.0	-49.43	1.49	17.71	-33.21	-13	-20.21	Vertical
144.9	-51.18	1.55	15.08	-37.65	-13	-24.65	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band II							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 9262/1852.4MHz							
3704.8	-44.97	4.04	33.51	-15.50	-13	-2.50	Vertical
3704.8	-48.98	4.04	33.51	-19.51	-13	-6.51	Horizontal
5557.2	-45.04	5.24	35.84	-14.44	-13	-1.44	Vertical
5557.2	-49.44	5.24	35.84	-18.84	-13	-5.84	Horizontal
91.6	-51.93	1.66	17.47	-36.12	-13	-23.12	Vertical
104.4	-45.76	1.38	16.18	-30.96	-13	-17.96	Horizontal
Test Results for Channel 9400/1880MHz							
3760	-53.43	4.04	33.56	-23.91	-13	-10.91	Vertical
3760	-45.19	4.04	33.56	-15.67	-13	-2.67	Horizontal
5640	-45.9	5.24	35.91	-15.23	-13	-2.23	Vertical
5640	-47.24	5.24	35.91	-16.57	-13	-3.57	Horizontal
121.2	-48.31	1.38	16.34	-33.35	-13	-20.35	Vertical
167.8	-48.46	1.34	16.03	-33.77	-13	-20.77	Horizontal
Test Results for Channel 9538/1907.6MHz							
3815.2	-51.45	4.04	34.00	-21.49	-13	-8.49	Vertical
3815.2	-52.29	4.04	34.00	-22.33	-13	-9.33	Horizontal
5722.8	-51.86	5.24	36.04	-21.06	-13	-8.06	Vertical
5722.8	-46.32	5.24	36.04	-15.52	-13	-2.52	Horizontal
135.9	-52.17	1.51	15.52	-38.16	-13	-25.16	Vertical
247.5	-51.74	1.32	17.18	-35.89	-13	-22.89	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band IV							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 1312/1712.4MHz							
3424.8	-46.46	4.02	29.80	-20.68	-13	-7.68	Vertical
3424.8	-47.12	4.02	29.80	-21.34	-13	-8.34	Horizontal
5137.2	-47.06	5.24	35.84	-16.46	-13	-3.46	Vertical
5137.2	-49.09	5.24	35.84	-18.49	-13	-5.49	Horizontal
81.8	-53.07	1.66	15.00	-39.73	-13	-26.73	Vertical
115.1	-48.18	1.58	16.20	-33.56	-13	-20.56	Horizontal
Test Results for Channel 1412/1732.4MHz							
3464.8	-49.21	4.03	30.00	-23.24	-13	-10.24	Vertical
3464.8	-45.47	4.03	30.00	-19.50	-13	-6.50	Horizontal
5197.2	-50.82	5.25	35.86	-20.21	-13	-7.21	Vertical
5197.2	-49.76	5.25	35.86	-19.15	-13	-6.15	Horizontal
246.8	-49.67	1.55	16.39	-34.82	-13	-21.82	Vertical
101.0	-44.29	1.32	16.25	-29.36	-13	-16.36	Horizontal
Test Results for Channel 1513/1752.6MHz							
3505.2	-52.61	2.91	27.68	-27.84	-13	-14.84	Vertical
3505.2	-50.62	2.91	27.68	-25.85	-13	-12.85	Horizontal
5257.8	-45.9	5.26	35.86	-15.30	-13	-2.30	Vertical
5257.8	-46.13	5.26	35.86	-15.53	-13	-2.53	Horizontal
199.0	-48.63	1.33	15.78	-34.18	-13	-21.18	Vertical
193.1	-48.96	1.47	17.42	-33.01	-13	-20.01	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 1xRTT BC0							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 1013/824.70 MHz							
1649.4	-45.92	2.8	27.5	-21.22	-13	-8.22	Vertical
1649.4	-49.21	2.8	27.5	-24.51	-13	-11.51	Horizontal
2474.1	-46.31	2.91	27.8	-21.42	-13	-8.42	Vertical
2474.1	-53.66	2.91	27.8	-28.77	-13	-15.77	Horizontal
3298.8	-51.93	4.02	29.87	-26.08	-13	-13.08	Vertical
3298.8	-46.66	4.02	29.87	-20.81	-13	-7.81	Horizontal
Test Results for Channel 384/836.52 MHz							
1673.04	-45.16	2.8	27.48	-20.48	-13	-7.48	Vertical
1673.04	-50.75	2.8	27.48	-26.07	-13	-13.07	Horizontal
2509.56	-47.5	2.91	27.7	-22.71	-13	-9.71	Vertical
2509.56	-50.54	2.91	27.7	-25.75	-13	-12.75	Horizontal
3346.08	-45.06	4.02	29.82	-19.26	-13	-6.26	Vertical
3346.08	-45.66	4.02	29.82	-19.86	-13	-6.86	Horizontal
Test Results for Channel 777/848.31 MHz							
1696.62	-52.41	2.8	27.42	-27.79	-13	-14.79	Vertical
1696.62	-45.23	2.8	27.42	-20.61	-13	-7.61	Horizontal
2544.93	-51.89	2.91	27.68	-27.12	-13	-14.12	Vertical
2544.93	-52.67	2.91	27.68	-27.90	-13	-14.90	Horizontal
3393.24	-44.15	4.02	29.8	-18.37	-13	-5.37	Vertical
3393.24	-44.21	4.02	29.8	-18.43	-13	-5.43	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 1xEVDO-Rev A BC0							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 1013/824.70 MHz							
1649.4	-50.32	2.8	27.5	-25.62	-13	-12.62	Vertical
1649.4	-51.67	2.8	27.5	-26.97	-13	-13.97	Horizontal
2474.1	-44.63	2.91	27.8	-19.74	-13	-6.74	Vertical
2474.1	-51.37	2.91	27.8	-26.48	-13	-13.48	Horizontal
3298.8	-45.09	4.02	29.87	-19.24	-13	-6.24	Vertical
3298.8	-47.02	4.02	29.87	-21.17	-13	-8.17	Horizontal
Test Results for Channel 384/836.52 MHz							
1673.04	-49.82	2.8	27.48	-25.14	-13	-12.14	Vertical
1673.04	-46.46	2.8	27.48	-21.78	-13	-8.78	Horizontal
2509.56	-52.34	2.91	27.7	-27.55	-13	-14.55	Vertical
2509.56	-45.48	2.91	27.7	-20.69	-13	-7.69	Horizontal
3346.08	-51	4.02	29.82	-25.20	-13	-12.20	Vertical
3346.08	-44.27	4.02	29.82	-18.47	-13	-5.47	Horizontal
Test Results for Channel 777/848.31 MHz							
1696.62	-46.11	2.8	27.42	-21.49	-13	-8.49	Vertical
1696.62	-44.08	2.8	27.42	-19.46	-13	-6.46	Horizontal
2544.93	-49.76	2.91	27.68	-24.99	-13	-11.99	Vertical
2544.93	-51.15	2.91	27.68	-26.38	-13	-13.38	Horizontal
3393.24	-49.83	4.02	29.8	-24.05	-13	-11.05	Vertical
3393.24	-46.58	4.02	29.8	-20.80	-13	-7.80	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 1xRTT BC1							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 25/1851.25 MHz							
3702.5	-45.91	2.8	27.5	-29.44	-13	-16.44	Vertical
3702.5	-46.44	2.8	27.5	-26.57	-13	-13.57	Horizontal
5553.75	-50.13	2.91	27.8	-27.39	-13	-14.39	Vertical
5553.75	-50.92	2.91	27.8	-28.73	-13	-15.73	Horizontal
326.56	-45.41	4.02	29.87	-27	-13	-14	Vertical
376.26	-50.74	4.02	29.87	-28.31	-13	-15.31	Horizontal
Test Results for Channel 666/1880.00 MHz							
3760	-47.14	2.8	27.48	-35.27	-13	-22.27	Vertical
3760	-51.75	2.8	27.48	-31.97	-13	-18.97	Horizontal
5640	-52.12	2.91	27.7	-28.49	-13	-15.49	Vertical
5640	-49.03	2.91	27.7	-29.68	-13	-16.68	Horizontal
451.72	-51.25	4.02	29.82	-30.68	-13	-17.68	Vertical
262.24	-50.49	4.02	29.82	-29.72	-13	-16.72	Horizontal
Test Results for Channel 1175/1908.75 MHz							
3817.5	-46.09	2.8	27.42	-29.85	-13	-16.85	Vertical
3817.5	-50.92	2.8	27.42	-29	-13	-16	Horizontal
5726.25	-50.18	2.91	27.68	-29.64	-13	-16.64	Vertical
5726.25	-51.44	2.91	27.68	-30.81	-13	-17.81	Horizontal
215.86	-53.14	4.02	29.8	-28.89	-13	-15.89	Vertical
433.26	-46.33	4.02	29.8	-28.2	-13	-15.2	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 1xEVDO-Rev A BC1							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 25/1851.25 MHz							
3702.5	-46.99	2.8	27.5	-22.29	-13	-9.29	Vertical
3702.5	-47.68	2.8	27.5	-22.98	-13	-9.98	Horizontal
5553.75	-48.65	2.91	27.8	-23.76	-13	-10.76	Vertical
5553.75	-50.93	2.91	27.8	-26.04	-13	-13.04	Horizontal
326.56	-53.73	4.02	29.87	-27.88	-13	-14.88	Vertical
376.26	-45.38	4.02	29.87	-19.53	-13	-6.53	Horizontal
Test Results for Channel 666/1880.00 MHz							
3760	-51.85	2.8	27.48	-27.17	-13	-14.17	Vertical
3760	-48.86	2.8	27.48	-24.18	-13	-11.18	Horizontal
5640	-52.28	2.91	27.7	-27.49	-13	-14.49	Vertical
5640	-53.04	2.91	27.7	-28.25	-13	-15.25	Horizontal
451.72	-45.76	4.02	29.82	-19.96	-13	-6.96	Vertical
262.24	-45.25	4.02	29.82	-19.45	-13	-6.45	Horizontal
Test Results for Channel 1175/1908.75 MHz							
3817.5	-51.38	2.8	27.42	-26.76	-13	-13.76	Vertical
3817.5	-51.47	2.8	27.42	-26.85	-13	-13.85	Horizontal
5726.25	-48.43	2.91	27.68	-23.66	-13	-10.66	Vertical
5726.25	-46.29	2.91	27.68	-21.52	-13	-8.52	Horizontal
215.86	-49.26	4.02	29.8	-23.48	-13	-10.48	Vertical
433.26	-51	4.02	29.8	-25.22	-13	-12.22	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 BC10 1xRTT							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 450/817.25 MHz							
1634.5	-50.69	2.80	27.50	-25.99	-13	-12.99	Vertical
1634.5	-51.09	2.80	27.50	-26.39	-13	-13.39	Horizontal
2451.75	-46.95	2.91	27.80	-22.06	-13	-9.06	Vertical
2451.75	-52.08	2.91	27.80	-27.19	-13	-14.19	Horizontal
3269	-54.83	4.02	29.87	-28.98	-13	-15.98	Vertical
3269	-44.21	4.02	29.87	-18.36	-13	-5.36	Horizontal
232.1	-46.89	1.56	16.76	-31.69	-13	-18.69	Vertical
152.3	-39.15	1.46	16.84	-23.77	-13	-10.77	Horizontal
Test Results for Channel 560/820 MHz							
1640	-42.16	2.80	27.48	-17.48	-13	-4.48	Vertical
1640	-42.12	2.80	27.48	-17.44	-13	-4.44	Horizontal
2460	-52.43	2.91	27.70	-27.64	-13	-14.64	Vertical
2460	-41.5	2.91	27.70	-16.71	-13	-3.71	Horizontal
3280	-42.88	4.02	29.82	-17.08	-13	-4.08	Vertical
3280	-51.76	4.02	29.82	-25.96	-13	-12.96	Horizontal
147.7	-44.41	1.60	16.55	-29.46	-13	-16.46	Vertical
215.9	-45.59	1.79	15.82	-31.56	-13	-18.56	Horizontal
Test Results for Channel 670/822.75 MHz							
1645.5	-41.66	2.80	27.42	-17.04	-13	-4.04	Vertical
1645.5	-43.7	2.80	27.42	-19.08	-13	-6.08	Horizontal
2468.25	-45.59	2.91	27.68	-20.82	-13	-7.82	Vertical
2468.25	-44.5	2.91	27.68	-19.73	-13	-6.73	Horizontal
3291	-46.22	4.02	29.80	-20.44	-13	-7.44	Vertical
3291	-49.73	4.02	29.80	-23.95	-13	-10.95	Horizontal
212.3	-45.31	1.59	15.96	-30.94	-13	-17.94	Vertical
153.6	-40.25	1.64	15.11	-26.78	-13	-13.78	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

CDMA2000 BC10 1xEV-Do Rel.A							
Frequency	SG Level	Cable Loss	Antenna Gain	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 450/817.25 MHz							
1634.5	-43.47	2.80	27.50	-18.77	-13	-5.77	Vertical
1634.5	-45.05	2.80	27.50	-20.35	-13	-7.35	Horizontal
2451.75	-44.95	2.91	27.80	-20.06	-13	-7.06	Vertical
2451.75	-50.58	2.91	27.80	-25.69	-13	-12.69	Horizontal
3269	-49.38	4.02	29.87	-23.53	-13	-10.53	Vertical
3269	-42.59	4.02	29.87	-16.74	-13	-3.74	Horizontal
128.5	-40.66	1.66	16.48	-25.84	-13	-12.84	Vertical
92.6	-45.50	1.53	15.13	-31.90	-13	-18.90	Horizontal
Test Results for Channel 560/820 MHz							
1640	-52.29	2.80	27.48	-27.61	-13	-14.61	Vertical
1640	-45.58	2.80	27.48	-20.90	-13	-7.90	Horizontal
2460	-45.45	2.91	27.70	-20.66	-13	-7.66	Vertical
2460	-47.39	2.91	27.70	-22.60	-13	-9.60	Horizontal
3280	-50.04	4.02	29.82	-24.24	-13	-11.24	Vertical
3280	-51.21	4.02	29.82	-25.41	-13	-12.41	Horizontal
277.8	-45.50	1.68	17.27	-29.91	-13	-16.91	Vertical
169.3	-43.97	1.66	15.80	-29.83	-13	-16.83	Horizontal
Test Results for Channel 670/822.75 MHz							
1645.5	-50.32	2.80	27.42	-25.70	-13	-12.70	Vertical
1645.5	-39.87	2.80	27.42	-15.25	-13	-2.25	Horizontal
2468.25	-46.35	2.91	27.68	-21.58	-13	-8.58	Vertical
2468.25	-45.57	2.91	27.68	-20.80	-13	-7.80	Horizontal
3291	-41.04	4.02	29.80	-15.26	-13	-2.26	Vertical
3291	-45.86	4.02	29.80	-20.08	-13	-7.08	Horizontal
198.2	-45.09	1.77	17.60	-29.26	-13	-16.26	Vertical
266.9	-45.11	1.48	17.31	-29.28	-13	-16.28	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

7.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.2.1/ Section 5.2.2.2 and ANSI/TIA-603-E-2016 Section 2.2.17

7.2.2 Conformance Limit

The substitution method, in ANSI/TIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements
Please refer to the section 7.1.4 in this report.

7.2.5 Test Procedure

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.
In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$ERP/EIRP = SGLevel - P_{cl} + G_a$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

G_a = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

P_{cl} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS/EGPRS	UMTS band/ CDMA2000
Span	500KHz	10MHz
RBW	10KHz	300KHz
VBW	30KHz	1MHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.2.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band VI/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee

■ Effective Radiated Power

Radiated Power (ERP) for GSM850							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	14.20	2.11	23.84	2.15	33.78	2.387811
836.4	H	14.92	2.13	23.15	2.15	33.79	2.393316
848.8	H	14.99	2.13	23.06	2.15	33.77	2.382319
824.2	V	14.80	2.11	23.11	2.15	33.65	2.317395
836.4	V	14.93	2.13	23.07	2.15	33.72	2.355049
848.8	V	14.79	2.13	23.25	2.15	33.76	2.376840

Radiated Power (ERP) for GPRS850							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	14.20	2.11	23.84	2.15	33.78	2.387811
836.4	H	14.91	2.13	23.15	2.15	33.78	2.387811
848.8	H	14.98	2.13	23.06	2.15	33.76	2.376840
824.2	V	14.88	2.11	23.11	2.15	33.73	2.360478
836.4	V	14.84	2.13	23.07	2.15	33.63	2.306747
848.8	V	14.78	2.13	23.25	2.15	33.75	2.371374

Radiated Power (ERP) for EGPRS850							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
824.2	H	6.67	2.11	23.84	2.15	26.25	0.421697
836.4	H	7.35	2.13	23.15	2.15	26.22	0.418794
848.8	H	8.11	2.13	23.06	2.15	26.89	0.488652
824.2	V	7.35	2.11	23.11	2.15	26.20	0.416869
836.4	V	7.36	2.13	23.07	2.15	26.15	0.412098
848.8	V	7.86	2.13	23.25	2.15	26.83	0.481948

Radiated Power (ERP) for UMTS band V							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
826.4	H	4.20	2.11	23.84	2.15	23.78	0.238781
836.4	H	4.79	2.13	23.15	2.15	23.66	0.232274
846.6	H	4.76	2.13	23.06	2.15	23.54	0.225944
826.4	V	4.89	2.11	23.11	2.15	23.74	0.236592
836.4	V	4.81	2.13	23.07	2.15	23.60	0.229087
846.6	V	4.44	2.13	23.25	2.15	23.41	0.219280

Radiated Power (E.I.R.P) for GSM1900						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	6.40	3.76	28.24	30.88	1.224616
1880	H	6.76	3.91	28.22	31.07	1.279381
1909.8	H	6.98	3.93	28.20	31.25	1.333521
1850.2	V	7.28	3.76	27.32	30.84	1.213389
1880	V	7.54	3.91	27.33	30.96	1.247384
1909.8	V	7.76	3.93	27.31	31.14	1.300170

Radiated Power (E.I.R.P) for GPRS1900						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	6.36	3.76	28.24	30.84	1.213389
1880	H	6.74	3.91	28.22	31.05	1.273503
1909.8	H	6.96	3.93	28.20	31.23	1.327394
1850.2	V	7.23	3.76	27.32	30.79	1.199499
1880	V	7.51	3.91	27.33	30.93	1.238797
1909.8	V	7.75	3.93	27.31	31.13	1.297179

Radiated Power (E.I.R.P) for EGPRS1900						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	1.99	3.76	28.24	26.47	0.443609
1880	H	2.35	3.91	28.22	26.66	0.463447
1909.8	H	2.13	3.93	28.20	26.40	0.436516
1850.2	V	2.79	3.76	27.32	26.35	0.431519
1880	V	3.15	3.91	27.33	26.57	0.453942
1909.8	V	2.95	3.93	27.31	26.33	0.429536

Radiated Power (E.I.R.P) for UMTS band II						
Frequency	Polarization	SG	Pcl	Ga	EIRP	EIRP
(MHz)		Level		Antenna		
		(dBm)	(dB)	Gain	(dBm)	(W)
1852.4	H	-0.49	3.76	28.24	23.99	0.250611
1880	H	-0.41	3.91	28.22	23.90	0.245471
1907.6	H	-0.40	3.93	28.20	23.87	0.243781
1852.4	V	0.36	3.76	27.32	23.92	0.246604
1880	V	0.35	3.91	27.33	23.77	0.238232
1907.6	V	0.47	3.93	27.31	23.85	0.242661

Radiated Power (E.I.R.P) for UMTS band IV						
Frequency	Polarization	SG	Pcl	Ga	EIRP	EIRP
(MHz)		Level		Antenna		
		(dBm)	(dB)	Gain	(dBm)	(W)
1712.4	H	-0.42	3.13	27.63	24.08	0.255859
1732.4	H	-0.10	3.27	27.61	24.24	0.265461
1752.6	H	-0.07	3.30	27.60	24.23	0.264850
1712.4	V	-0.51	3.13	27.63	23.99	0.250611
1732.4	V	-0.18	3.27	27.61	24.16	0.260615
1752.6	V	-0.15	3.30	27.60	24.15	0.260016

Radiated Power (ERP) for CDMA2000 1xRTT RC3,SO32(+F-SCH) BC0							
Frequency	Polarization	SG Level	Pcl	Ga	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	Antenna Gain	(dB)	(dBm)	(W)
824.7	H	2.87	2.11	23.84	2.15	22.45	0.175792
836.52	H	3.25	2.13	23.15	2.15	22.12	0.162930
848.31	H	2.87	2.13	23.06	2.15	21.65	0.146218
824.7	V	2.77	2.11	23.11	2.15	21.62	0.145211
836.52	V	2.54	2.13	23.07	2.15	21.33	0.135831
848.31	V	3.57	2.13	23.25	2.15	22.54	0.179473

Radiated Power (ERP) for CDMA2000 1xEVDO-Rev A BC0							
Frequency	Polarization	SG Level	Pcl	Ga	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	Antenna Gain	(dB)	(dBm)	(W)
824.7	H	2.87	2.11	23.84	2.15	22.45	0.175792
836.52	H	2.88	2.13	23.15	2.15	21.75	0.149624
848.31	H	2.34	2.13	23.06	2.15	21.12	0.129420
824.7	V	2.61	2.11	23.11	2.15	21.46	0.139959
836.52	V	3.51	2.13	23.07	2.15	22.30	0.169824
848.31	V	2.87	2.13	23.25	2.15	21.84	0.152757

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

ERP(dBm)=EIRP-2.15

Radiated Power (ERP) for CDMA2000 1xRTT RC3,SO32(+F-SCH) BC1						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1851.25	H	-0.68	3.76	28.24	23.80	0.239883
1880	H	-0.75	3.91	28.22	23.56	0.226986
1908.75	H	-0.58	3.93	28.20	23.69	0.233884
1851.25	V	-0.37	3.76	27.32	23.19	0.208449
1880	V	-0.11	3.91	27.33	23.31	0.214289
1908.75	V	-0.28	3.93	27.31	23.10	0.204174

Radiated Power (ERP) for CDMA2000 1xEVDO-Rev A BC1						
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1851.25	H	-0.88	3.76	28.24	23.60	0.229087
1880	H	-1.12	3.91	28.22	23.19	0.208449
1908.75	H	-0.53	3.93	28.20	23.74	0.236592
1851.25	V	-0.42	3.76	27.32	23.14	0.206063
1880	V	-0.11	3.91	27.33	23.31	0.214289
1908.75	V	0.28	3.93	27.31	23.66	0.232274

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

Radiated Power (ERP) for CDMA2000 BC10 1xRTT							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
817.25	H	5.01	1.89	23.84	2.15	24.81	0.302691
820	H	5.32	1.92	23.15	2.15	24.40	0.275423
822.75	H	4.73	1.94	23.06	2.15	23.70	0.234423
817.25	V	5.05	1.89	23.11	2.15	24.12	0.258226
820	V	4.79	1.92	23.07	2.15	23.79	0.239332
822.75	V	5.85	1.94	23.25	2.15	25.01	0.316957

Radiated Power (ERP) for CDMA2000 BC10 1xEV-Do Rel.A							
Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	Correction	ERP	ERP
(MHz)		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)
817.25	H	5.18	1.89	23.84	2.15	24.98	0.314775
820	H	5.48	1.92	23.15	2.15	24.56	0.285759
822.75	H	4.64	1.94	23.06	2.15	23.61	0.229615
817.25	V	5.11	1.89	23.11	2.15	24.18	0.261818
820	V	5.08	1.92	23.07	2.15	24.08	0.255859
822.75	V	6.03	1.94	23.25	2.15	25.19	0.330370

Note:

SG Level= Signal generator output

Pcl= cable loss

Ga= Antenna Gain

Peak EIRP(dBm)= SGLevel -Pcl +Ga

7.3 CONDUCTED OUTPUT POWER

7.3.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2)) and FCC KDB 971168 D01 v03 Section 5.2

7.3.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

For CDMA2000 Power: Maximum output power is verified on the Low,Middle and High channels according to procedures in section 4.4.5.2.of 3GPP2 C.S0011/TIA-98-E for 1Xrtt, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel.0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev.A.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.3.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee

Test data reference attachment

7.4 FREQUENCY STABILITY

7.4.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC KDB 971168 D01 Section 9.0

7.4.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.4.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band VI/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee
Results: PASS			

Frequency Error Against Voltage for GSM 850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	9.16	0.010952
3.85	8.55	0.010222
4.2	6.8	0.008130

Frequency Error Against Temperature for GSM 850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	5.19	0.006205
-20	8.23	0.009840
-10	7.78	0.009302
0	6.18	0.007389
10	8.91	0.010653
20	9.75	0.011657
30	8.97	0.010725
40	8.87	0.010605
50	12.29	0.014694

Frequency Error Against Voltage for GPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	9.28	0.011095
3.85	6	0.007174
4.2	6.46	0.007724

Frequency Error Against Temperature for GPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	6.88	0.008226
-20	7.37	0.008812
-10	9.77	0.011681
0	6.11	0.007305
10	7.6	0.009087
20	9.94	0.011884
30	9.88	0.011813
40	8.01	0.009577
50	11.75	0.014048

Frequency Error Against Voltage for EGPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	6.34	0.007580
3.85	8.94	0.010689
4.2	9.01	0.010772

Frequency Error Against Temperature for EGPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	8.07	0.009648
-20	7.62	0.009110
-10	6.84	0.008178
0	6.13	0.007329
10	8.78	0.010497
20	8.5	0.010163
30	6.2	0.007413
40	6.4	0.007652
50	13.39	0.016009

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band V(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-18.95	0.022657
3.85	-16.87	0.020170
4.2	-19.6	0.023434

Frequency Error Against Temperature for UMTS band V (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17.75	0.021222
-20	-15.29	0.018281
-10	-16.69	0.019955
0	-17.44	0.020851
10	-18.25	0.021820
20	-17.43	0.020839
30	-15.94	0.019058
40	-19.16	0.022908
50	-18.61	0.022250

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for CDMA2000 1xRTT BC0(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-15.44	0.018457
3.85	-15.67	0.018732
4.2	-16.7	0.019964

Frequency Error Against Temperature for CDMA2000 1xRTT BC0(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-16.84	0.020131
-20	-15.02	0.017955
-10	-19.35	0.023132
0	-19.71	0.023562
10	-17.68	0.021135
20	-19.07	0.022797
30	-18.15	0.021697
40	-18.51	0.022127
50	-20.77	0.024829

Frequency Error Against Voltage for CDMA2000 1xEV-Do Rev.A BC0(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-17.75	0.021219
3.85	-16.77	0.020047
4.2	-19.66	0.023502

Frequency Error Against Temperature for CDMA2000 1xEV-Do Rev.A BC0(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-18.17	0.021721
-20	-18.84	0.022522
-10	-18.57	0.022199
0	-16.66	0.019916
10	-19.89	0.023777
20	-18.62	0.022259
30	-19.21	0.022964
40	-17.08	0.020418
50	-22.23	0.026574

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for PCS 1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	16.42	0.008734
3.85	20.51	0.010910
4.2	18.05	0.009601

Frequency Error Against Temperature for PCS 1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	17.13	0.009112
-20	19.45	0.010346
-10	16.56	0.008809
0	17.29	0.009197
10	19.92	0.010596
20	18.04	0.009596
30	17.23	0.009165
40	19.63	0.010441
50	21.79	0.011590

Frequency Error Against Voltage for GPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	17.3	0.009202
3.85	16.22	0.008628
4.2	19.96	0.010617

Frequency Error Against Temperature for GPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	20.55	0.010931
-20	19.9	0.010585
-10	16.95	0.009016
0	17.89	0.009516
10	16.35	0.008697
20	20.7	0.011011
30	17.84	0.009489
40	16.35	0.008697
50	19.69	0.010473

Frequency Error Against Voltage for EGPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	16.85	0.008963
3.85	20.61	0.010963
4.2	19.05	0.010133

Frequency Error Against Temperature for EGPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	19.93	0.010601
-20	17.29	0.009197
-10	18.12	0.009638
0	18.54	0.009862
10	17.28	0.009191
20	19.49	0.010367
30	17.99	0.009569
40	19.22	0.010223
50	24.04	0.012787

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band II (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-15.33	0.008154
3.85	-19.4	0.010319
4.2	-18.38	0.009777

Frequency Error Against Temperature for UMTS band II (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-15.99	0.008505
-20	-15.29	0.008133
-10	-19.17	0.010197
0	-18.61	0.009899
10	-18.75	0.009973
20	-18.56	0.009872
30	-18.47	0.009824
40	-17.63	0.009378
50	-22.6	0.012021

Frequency Error Against Voltage for UMTS band IV (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-14.49	0.008364
3.85	-15.73	0.009080
4.2	-16.45	0.009495

Frequency Error Against Temperature for UMTS band IV (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-9.63	0.005559
-20	-11.82	0.006823
-10	-11.33	0.006540
0	-11.96	0.006904
10	-11.16	0.006442
20	-17.66	0.010194
30	-18.03	0.010408
40	-19.88	0.011475
50	-19.96	0.011522

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for CDMA2000 1xRTT BC1(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-19.96	0.010617
3.85	-15.6	0.008298
4.2	-18	0.009574

Frequency Error Against Temperature for CDMA2000 1xRTT BC1(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-15.47	0.008229
-20	-17.98	0.009564
-10	-18.1	0.009628
0	-16.7	0.008883
10	-19.57	0.010410
20	-16.86	0.008968
30	-19.76	0.010511
40	-18.72	0.009957
50	-20.08	0.010681

Frequency Error Against Voltage for CDMA2000 1xEV-Do Rev.A BC1(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-18.05	0.009601
3.85	-17.55	0.009335
4.2	-19.45	0.010346

Frequency Error Against Temperature for CDMA2000 1xEV-Do Rev.A BC1(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17.15	0.009122
-20	-17.71	0.009420
-10	-15.46	0.008223
0	-17.61	0.009367
10	-17.88	0.009511
20	-15.35	0.008165
30	-15.36	0.008170
40	-19.16	0.010191
50	-22.76	0.012106

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage =4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for CDMA2000 BC10 1xRTT Mid CH

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	-21.75	-0.026524
3.85	11.95	0.014573
4.2	-16.06	-0.019585

Frequency Error Against Voltage for CDMA2000 BC10 1xRTT Mid CH

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-23.3	-0.028415
-20	6.67	0.008134
-10	19.25	0.023476
0	-4.64	-0.005659
10	9.65	0.011768
20	13.72	0.016732
30	33.71	0.041110
40	22.54	0.027488
50	-5.55	-0.006768

Frequency Error Against Voltage for CDMA2000 BC10 1xEV-Do Rel.A Mid CH

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.4	19.31	0.023549
3.85	-27.77	-0.033866
4.2	32.86	0.040073

Frequency Error Against Voltage for CDMA2000 BC10 1xEV-Do Rel.A Mid CH

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-25.41	-0.030988
-20	16.8	0.020488
-10	11.61	0.014159
0	13.54	0.016512
10	14.92	0.018195
20	18.88	0.023024
30	6.82	0.008317
40	8.56	0.010439
50	25.74	0.031390

Note:

1. Normal Voltage = 3.85V; Battery End Point (BEP) = 3.4V; Maximum Voltage = 4.2V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to Subclause 5.2.3.4 of ANSI C63.26-2015 and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee
Results: PASS			

The Test data reference attachment:

7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC KDB 971168 D01 Section 4

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 4.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.6.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee
Results: PASS			

The Test data reference attachment:

7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$

7.7.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee
Results: PASS			

The Test data reference attachment:

7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

7.8.6 Test Results

EUT:	Smart Phone	Model No.:	V20
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band VI/ UMTS band IV, CDMA2000 1xRTT BC0/BC1/BC 10, CDMA2000 EVDO-Rev A BC0/BC1/BC 10	Test By:	Mukzi Lee
Results: PASS			

The Test data reference attachment:

END OF REPORT