



# TEST REPORT

**Report No.** ..... : **CHTEW19120199** Report verification : 

**Project No.** ..... : **SHT1912030901EW**

**FCC ID** ..... : **2AHJMDMREJJ**

**Applicant's name** ..... : **Altis Technology (Hong Kong) Ltd.**

**Address** ..... : Suite 711, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong, China

**Manufacturer**..... : Altis Technology (Hong Kong) Ltd.

**Address**..... : Suite 711, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong, China

**Test item description** ..... : **Walkie Talkie Two-way Radio**

**Trade Mark** ..... : DXDMR500

**Model/Type reference** ..... : DXDMR510

**Listed Model(s)**..... : DEWALT

**Standard**..... : **FCC CFR Title 47 Part 2**  
**FCC CFR Title 47 Part 90**

**Date of receipt of test sample**..... : Dec.12, 2019

**Date of testing**..... : Dec.12, 2019- Dec,25, 2019

**Date of issue**..... : Dec,26, 2019

**Result** ..... : **PASS**

**Compiled by**  
 ( position+printed name+signature) . : File administrators Echo Wei 

**Supervised by**  
 ( position+printed name+signature) . : Project Engineer Gaosheng Pan 

**Approved by**  
 ( position+printed name+signature) . : RF Manager Hans Hu 

**Testing Laboratory Name**..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

**Address** ..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

|                 |   |                  |
|-----------------|---|------------------|
| <b><u>1</u></b> | <b><u>TEST STANDARDS AND REPORT VERSION</u></b>       | <b><u>3</u></b>  |
| 1.1.            | Test Standards  | 3                |
| 1.2.            | Report revised information                            | 3                |
| <b><u>2</u></b> | <b><u>TEST DESCRIPTION</u></b>                        | <b><u>4</u></b>  |
| <b><u>3</u></b> | <b><u>SUMMARY</u></b>                                 | <b><u>5</u></b>  |
| 3.1             | Client Information                                    | 5                |
| 3.2             | Product Description                                   | 5                |
| 3.3             | Test frequency list                                   | 6                |
| 3.4             | Operation mode  | 7                |
| 3.5             | EUT configuration                                     | 8                |
| <b><u>4</u></b> | <b><u>TEST ENVIRONMENT</u></b>                        | <b><u>9</u></b>  |
| 4.1             | Address of the test laboratory                        | 9                |
| 4.2             | Test Facility   | 9                |
| 4.3             | Environmental conditions                              | 10               |
| 4.4             | Statement of the measurement uncertainty              | 10               |
| 4.5             | Equipments Used during the Test                       | 11               |
| <b><u>5</u></b> | <b><u>TEST CONDITIONS AND RESULTS</u></b>             | <b><u>13</u></b> |
| 5.1             | Conducted Carrier Output Power                        | 13               |
| 5.2             | 99% Occupied Bandwidth & 26dB Bandwidth               | 14               |
| 5.3             | Emission Mask   | 16               |
| 5.4             | Modulation Limit                                      | 18               |
| 5.5             | Audio Frequency Response                              | 19               |
| 5.6             | Frequency stability VS Temperature                    | 21               |
| 5.7             | Frequency stability VS Voltage                        | 22               |
| 5.8             | Transmitter Frequency Behavior                        | 23               |
| 5.9             | Transmit Conducted Spurious Emission                  | 25               |
| 5.10            | Transmitter Radiated Spurious Emission                | 26               |
| <b><u>6</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT</u></b>            | <b><u>39</u></b> |
| <b><u>7</u></b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b> | <b><u>41</u></b> |
| <b><u>8</u></b> | <b><u>APPENDIX REPORT</u></b>                         | <b><u>48</u></b> |

# **1 TEST STANDARDS AND REPORT VERSION**

## **1.1. Test Standards**

The tests were performed according to following standards:

[FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations

[FCC Rules Part 90](#): Private land mobile radio services.

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[ANSI/TIA-603-E\(2016\)](#): Land Mobile FM or PM Communications Equipment and Performance Standards

[FCC Part 15 Subpart B](#): Unintentional Radiators.

[ANSI C63.4-2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## **1.2. Report revised information**

| Revised No. | Date of issued | Description |
|-------------|----------------|-------------|
| N/A         | 2019-12-26     | Original    |
|             |                |             |
|             |                |             |
|             |                |             |
|             |                |             |

## **2 TEST DESCRIPTION**

| <b>Test Item</b>                        | <b>Section in CFR 47</b>         | <b>Result</b> | <b>Test Engineer</b> |
|---|----------------------------------|---------------|----------------------|
| Conducted Carrier Output Power          | Part 90.205<br>Part 2.1046(a)    | Pass          | Linshuang Chen       |
| 99% Occupied Bandwidth & 26dB bandwidth | Part 90.209 & 210<br>Part 2.1049 | Pass          | Linshuang Chen       |
| Emission Mask                           | Part 90.209 & 210<br>Part 2.1049 | Pass          | Linshuang Chen       |
| Modulation Limit                        | Part 2.1047(b)                   | Pass          | Linshuang Chen       |
| Audio Frequency Response                | Part 2.1047(a)                   | Pass          | Linshuang Chen       |
| Frequency Stability VS Temperature      | Part 90.213<br>Part 2.1055       | Pass          | Linshuang Chen       |
| Frequency Stability VS Voltage          | Part 90.213<br>Part 2.1055       | Pass          | Linshuang Chen       |
| Transient Frequency Behavior            | Part 90.214                      | Pass          | Linshuang Chen       |
| Transmit Conducted Spurious Emission    | Part 90.210<br>Part 2.1051       | Pass          | Linshuang Chen       |
| Transmit Radiated Spurious Emission     | Part 90.210<br>Part 2.1053       | Pass          | Linshuang Chen       |

### 3 SUMMARY

#### 3.1 Client Information

|               |   |
|---------------|---|
| Applicant:    | Altis Technology (Hong Kong) Ltd.                                   |
| Address:      | Suite 711, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong, China |
| Manufacturer: | Altis Technology (Hong Kong) Ltd.                                   |
| Address:      | Suite 711, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong, China |

#### 3.2 Product Description

|                                |  |  |
|--------------------------------|--|--|
| Name of EUT:                   | Walkie Talkie Two-way Radio  |  |
| Trade mark:                    | DEWALT   |  |
| Model/Type reference:          | DXDMR500   |  |
| Listed model(s):               | DXDMR510   |  |
| Power supply:                  | DC 7.4V  |  |
| Battery Information            | Model:KB-75A<br>7.4V/2000mAh(14.8Wh)   |  |
| Adapter information:           | Model: FJ-SW126K1201000DU<br>Input: 100-240Va.c.,50/60Hz 0.4A Max<br>Output: 12Vd.c.,1000mA          |  |
| Charger information            | Model:CH-DM500<br>Input: 12Vd.c.,500mA<br>Output: 400mA  |  |
| Hardware version:              | V2.0   |  |
| Software version:              | V1.2.3.6   |  |
| <b>RF Specification</b>        |  |  |
| Support Frequency Range:       | 400MHz~470MHz  |  |
| Permitted frequency range: *1  | 400MHz~406MHz, 406.1MHz~470MHz   |  |
| Rated Output Power:            | <input checked="" type="checkbox"/> High Power: 4W <input checked="" type="checkbox"/> Low Power: 1W |  |
| Modulation Type:               | Analog:  | FM   |
|                                | Digital :  | 4FSK   |
| Supported Digital Protocol: *2 | DMR  |  |
| Channel Separation:            | Analog:  | <input checked="" type="checkbox"/> 12.5kHz                                  |
|                                | Digital :  | <input type="checkbox"/> 6.25kHz <input checked="" type="checkbox"/> 12.5kHz |
| Emission Designator: *3        | Analog:  | 11K0F3E  |
|                                | Digital:   | 7K60FXW, 7K60FXD   |
| Support data rate:             | 9.6kbps  |  |
| Antenna Type:                  | External Antenna   |  |

## Note:

- (1) \*<sup>1</sup> Listed frequency range 400MHz~406MHz for Federal use Only.
- (2) \*<sup>2</sup> The DMR standard specifies two-slot Time Division Multiplexing Technology to split the 12.5 kHz channel into two virtual 6.25kHz communication paths. This equates to an efficiency of one voice channel per 6.25 kHz of bandwidth even though it operates in channels of 12.5 kHz

- (3) \*<sup>3</sup> According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:

- For FM Voice Modulation

Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2*3 + 2*2.5*1 = 11 \text{ KHz}$

Emission designation: 11K0F3E

- For FM Data Modulation

Channel Spacing = 12.5 KHz, R = 9600 bps, D = 1944Hz, S = 4, K = 0.72

$B_n = (R/\log_2 S) + 2DK \approx 7.6 \text{ KHz}$

Emission designation: 7K60FXW, 7K60FXD

### 3.3 Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

| Frequency range over which EUT operates | Number of frequencies | Location in frequency range of operation     |
|---|-----------------------|--|
| 1 MHz or less                           | 1                     | Middle                                       |
| 1 MHz to 10 MHz                         | 2                     | 1 near top and 1 near bottom                 |
| More than 10 MHz                        | 3                     | 1 near top, 1 near middle, and 1 near bottom |

| Frequency Bands (MHz) | Test Frequency (MHz)      |
|-----------------------|---------------------------|
| 400MHz ~ 406MHz       | CH <sub>L</sub> 400.0125  |
|                       | CH <sub>M1</sub> 405.9875 |
| 406.1MHz ~470MHz      | CH <sub>M2</sub> 406.1125 |
|                       | CH <sub>M3</sub> 438.0125 |
|                       | CH <sub>H</sub> 469.9875  |

### 3.4 Operation mode

| Test Mode | Transmitting | Receiving | Digital | Analog  | Power Level |     |
|-----------|--------------|-----------|---------|---------|-------------|-----|
|           |              |           | 12.5kHz | 12.5kHz | High        | Low |
| TX-DNH    | ■            |           | ■       |         | ■           |     |
| TX-DNL    | ■            |           | ■       |         |             | ■   |
| TX-ANH    | ■            |           |         | ■       | ■           |     |
| TX-ANL    | ■            |           |         | ■       |             | ■   |

Note:

■: is operation mode.

| Modulation Type | Description   |
|-----------------|---|
| UM              | Un-modulation   |
| AM2             | Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.   |
| AM6             | Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB |
| AM5             | Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.   |
| DM              | A 511 bit binary pseudo-random bit sequence based on ITU-T Rec. O.153   |

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report.

| Test item                               | Modulation Type | Test mode (Worse case mode)    |
|---|-----------------|--------------------------------|
| Conducted Output Power                  | UM              | TX-DNH, TX-DNL, TX-ANH, TX-ANL |
| 99% Occupied Bandwidth & 26dB bandwidth | AM6, DM         | TX-DNH, TX-DNL, TX-ANH, TX-ANL |
| Emission Mask                           | AM5, DM         | TX-DNH, TX-DNL, TX-ANH, TX-ANL |
| Modulation Limit                        | AM6             | TX-ANH                         |
| Audio Frequency Response                | AM2             | TX-ANH                         |
| Frequency Stability VS Temperature      | UM              | TX-DNH, TX-DNL, TX-ANH, TX-ANL |
| Frequency Stability VS Voltage          | UM              | TX-DNH, TX-DNL, TX-ANH, TX-ANL |
| Transient Frequency Behavior            | UM              | TX-DNH, TX-ANH                 |
| Transmit Conducted Spurious Emission    | AM5, DM         | TX-DNH, TX-ANH                 |
| Transmit Radiated Spurious Emission     | AM5, DM         | TX-DNH, TX-ANH                 |

### 3.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

|   |             |                |              |
|---|-------------|----------------|--------------|
| ● | Power Cable | Length (m) :   | /            |
|   |             | Shield :       | Unshielded   |
|   |             | Detachable :   | Undetachable |
| ○ | Multimeter  | Manufacturer : | /            |
|   |             | Model No. :    | /            |

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No. 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

#### **IC-Registration No.: 5377A**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3 Environmental conditions

| Atmospheric Contions              |                       |
|-----------------------------------|-----------------------|
| Temperature:                      | 21°C to 25°C          |
| Relative Humidity:                | 20 % to 75 %.         |
| Atmospheric Pressure:             | 860 mbar to 1060 mbar |
| Norminal Test Voltage:            | $V_N = DC 7.40V$      |
| Extrem Test Voltage @115% $V_N$ : | $V_H = DC 8.51V$      |
| Extrem Test Voltage @85% $V_N$ :  | $V_L = DC 6.29V$      |

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

| Test Items                               | Measurement Uncertainty              | Notes |
|--|--------------------------------------|-------|
| Frequency stability & Occupied Bandwidth | 15Hz for <1GHz<br>70Hz for >1GHz     | (1)   |
| Conducted Output Power                   | 0.51dB                               | (1)   |
| ERP / EIRP / RSE                         | 2.66dB for <1GHz<br>3.44dB for >1GHz | (1)   |
| Conducted Emission 9KHz-30MHz            | 3.02dB                               | (1)   |
| Radiated Emission 30~1000MHz             | 4.90dB                               | (1)   |
| Radiated Emission 1~18GHz                | 4.96dB                               | (1)   |
| FM deviation                             | 25 Hz                                | (1)   |
| Audio level                              | 0.62 dB                              | (1)   |
| Low Pass Filter Response                 | 0.76 dB                              | (1)   |
| Modulation Limiting                      | 0.42 %                               | (1)   |
| Transient Frequency Behavior             | 6.8 %                                | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 4.5 Equipments Used during the Test

| ● TS8613 Test system |                                       |              |               |              |            |                           |                           |
|----------------------|---------------------------------------|--------------|---------------|--------------|------------|---------------------------|---------------------------|
| Used                 | Test Equipment                        | Manufacturer | Equipment No. | Model No.    | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ●                    | Spectrum Analyzer                     | Agilent      | HTWE0286      | N9020A       | MY50510187 | 2019/10/26                | 2020/10/25                |
| ●                    | Signal & Spectrum Analyzer            | R&S          | HTWE0262      | FSW26        | 103440     | 2019/10/26                | 2020/10/25                |
| ●                    | RF Communication Test Set             | HP           | HTWE0038      | 8920A        | 3813A10206 | 2019/10/26                | 2020/10/25                |
| ●                    | Digital intercom communication tester | Aeroflex     | HTWE0255      | 3920B        | 1001682041 | 2019/10/26                | 2020/10/25                |
| ●                    | Signal Generator                      | R&S          | HTWE0191      | SML02        | 100507     | 2019/10/26                | 2020/10/25                |
| ●                    | RF Control Unit                       | Tonscend     | HTWE0294      | JS0806-2     | N/A        | N/A                       | N/A                       |
| ○                    | Filter-VHF                            | Microwave    | HTWE0309      | N26460M1     | 498702     | N/A                       | N/A                       |
| ●                    | Filter-UHF                            | Microwave    | HTWE0311      | N25155M2     | 498704     | N/A                       | N/A                       |
| ○                    | Power Divider                         | Microwave    | HTWE0043      | OPD1040-N-4  | N/A        | 2019/05/24                | 2020/05/23                |
| ○                    | Attenuator                            | JFW          | HTWE0292      | 50FH-030-100 | N/A        | 2019/05/18                | 2020/05/17                |
| ○                    | Attenuator                            | JFW          | HTWE0293      | 50-A-MFN-20  | 0322       | 2019/05/18                | 2020/05/17                |
| ●                    | Test software                         | HTW          | N/A           | Radio ATE    | N/A        | N/A                       | N/A                       |

| ● Auxiliary Equipment |                 |              |               |           |            |                           |                           |
|-----------------------|-----------------|--------------|---------------|-----------|------------|---------------------------|---------------------------|
| Used                  | Test Equipment  | Manufacturer | Equipment No. | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ●                     | Climate chamber | ESPEC        | HTWE0254      | GPL-2     | N/A        | 2019/10/23                | 2020/10/22                |
| ●                     | DC Power Supply | Gwinstek     | HTWE0274      | SPS-2415  | GER835793  | N/A                       | N/A                       |

| Used | Test Equipment               | Manufacturer | Equipment No. | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
|------|------------------------------|--------------|---------------|-----------|------------|---------------------------|---------------------------|
| ●    | Signal and spectrum Analyzer | R&S          | HTWE0242      | FSV40     | 100048     | 2019/10/26                | 2020/10/25                |
| ●    | Spectrum Analyzer            | Agilent      | HTWE0286      | N9020A    | MY50510187 | 2019/10/26                | 2020/10/25                |
| ●    | Radio communication tester   | R&S          | HTWE0287      | CMW500    | 137688-Lv  | 2019/10/26                | 2020/10/25                |
| ●    | Test software                | Tonscend     | N/A           | JS1120    | N/A        | N/A                       | N/A                       |

| ● Radiated Spurious Emission |                         |                    |               |                   |             |                           |                           |
|------------------------------|-------------------------|--------------------|---------------|-------------------|-------------|---------------------------|---------------------------|
| Used                         | Test Equipment          | Manufacturer       | Equipment No. | Model No.         | Serial No.  | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) |
| ●                            | Semi-Anechoic Chamber   | Albatross projects | HTWE0122      | SAC-3m-01         | N/A         | 2018/09/27                | 2021/09/26                |
| ●                            | Spectrum Analyzer       | R&S                | HTWE0098      | FSP40             | 100597      | 2019/10/26                | 2020/10/25                |
| ●                            | Loop Antenna            | R&S                | HTWE0170      | HFH2-Z2           | 100020      | 2018/04/02                | 2021/04/01                |
| ●                            | Broadband Horn Antenna  | SCHWARZBECK        | HTWE0103      | BBHA9170          | BBHA9170472 | 2018/10/11                | 2021/10/10                |
| ●                            | Ultra-Broadband Antenna | SCHWARZBECK        | HTWE0123      | VULB9163          | 538         | 2018/04/04                | 2021/04/03                |
| ●                            | Horn Antenna            | SCHWARZBECK        | HTWE0126      | 9120D             | 1011        | 2017/04/01                | 2020/03/31                |
| ●                            | Pre-amplifier           | CD                 | HTWE0071      | PAP-0102          | 12004       | 2019/11/14                | 2020/11/13                |
| ●                            | Broadband Preamplifier  | SCHWARZBECK        | HTWE0201      | BBV 9718          | 9718-248    | 2019/05/23                | 2020/05/22                |
| ●                            | RF Connection Cable     | HUBER+SUHNER       | HTWE0120-01   | 6m 18GHz S Serisa | N/A         | 2019/05/10                | 2020/05/09                |
| ●                            | RF Connection Cable     | HUBER+SUHNER       | HTWE0120-02   | 6m 3GHz RG Serisa | N/A         | 2019/05/10                | 2020/05/09                |
| ●                            | RF Connection Cable     | HUBER+SUHNER       | HTWE0120-03   | 6m 3GHz RG Serisa | N/A         | 2019/05/10                | 2020/05/09                |
| ●                            | RF Connection Cable     | HUBER+SUHNER       | HTWE0120-04   | 6m 3GHz RG Serisa | N/A         | 2019/05/10                | 2020/05/09                |
| ●                            | RF Connection Cable     | HUBER+SUHNER       | HTWE0121-01   | 6m 18GHz S Serisa | N/A         | 2019/05/10                | 2020/05/09                |
| ●                            | EMI Test Software       | Audix              | N/A           | E3                | N/A         | N/A                       | N/A                       |
| ●                            | Filter-UHF              | Microwave          | HTWE0311      | N25155M2          | 498704      | N/A                       | N/A                       |

## **5 TEST CONDITIONS AND RESULTS**


### **5.1 Conducted Carrier Output Power**

#### **LIMIT**

##### **FCC Part 90.205, FCC Part 2.1046**

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation.

#### **TEST CONFIGURATION**

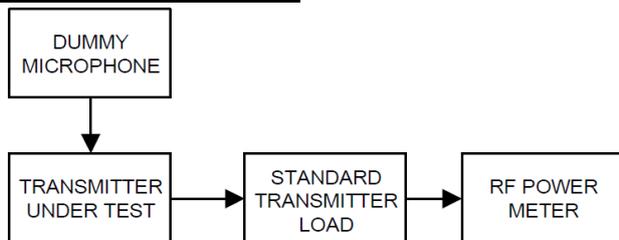

#### **TEST PROCEDURE**

- (1) Connect the equipment as illustrated
- (2) Correct for all losses in the RF path
- (3) Measure the transmitter output power
- (4) If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

#### **TEST MODE**

Please reference to the section 3.4

#### **TEST RESULTS**

**Passed**       **Not Applicable**

Please refer to appendix A on the section 8 appendix report

## 5.2 99% Occupied Bandwidth & 26dB Bandwidth


### LIMIT

FCC Part 90.209, FCC Part 2.1049


| Frequency band (MHz)                  | Channel spacing (kHz) | Authorized bandwidth (kHz) |
|---------------------------------------|-----------------------|----------------------------|
| Below 25 <sup>2</sup>                 |                       |                            |
| 25-50                                 | 20                    | 20                         |
| 72-76                                 | 20                    | 20                         |
| 150-174                               | 17.5                  | <sup>1</sup> 320/11.25/6   |
| 216-220 <sup>5</sup>                  | 6.25                  | 20/11.25/6                 |
| 220-222                               | 5                     | 4                          |
| 406-512 <sup>2</sup>                  | <sup>1</sup> 6.25     | <sup>136</sup> 20/11.25/6  |
| 806-809/851-854                       | 12.5                  | 20                         |
| 809-824/854-869                       | 25                    | <sup>6</sup> 20            |
| 896-901/935-940                       | 12.5                  | 13.6                       |
| 902-928 <sup>4</sup>                  |                       |                            |
| 929-930                               | 25                    | 20                         |
| 1427-1432 <sup>5</sup>                | 12.5                  | 12.5                       |
| <sup>3</sup> 2450-2483.5 <sup>2</sup> |                       |                            |
| Above 2500 <sup>2</sup>               |                       |                            |

### TEST CONFIGURATION

Test setup for Analog:

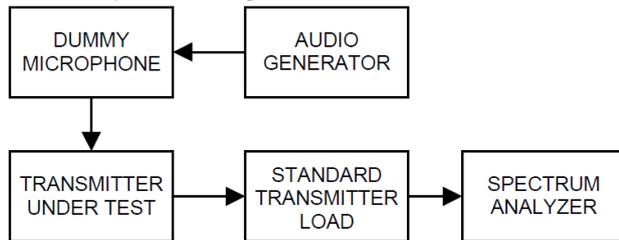

Test setup for Digital:

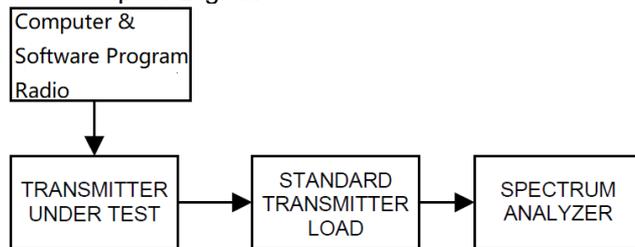

### TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Spectrum set as follow:  
 Centre frequency = the nominal EUT channel center frequency,  
 The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient)  
 RBW = 1% to 5% of the anticipated OBW, VBW ≥ 3 × RBW, Sweep = auto,  
 Detector function = peak, Trace = max hold
- (3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- (4) Measure and record the results in the test report.

**TEST MODE**

Please reference to the section 3.4

**TEST RESULTS**

**Passed**       **Not Applicable**

Please refer to appendix B on the section 8 appendix report

### 5.3 Emission Mask

#### LIMIT

FCC Part 90.210, FCC Part 2.1049

| Frequency band (MHz)           | Mask for equipment with audio low pass filter | Mask for equipment without audio low pass filter |
|--------------------------------|---|--|
| Below 25 <sup>1</sup>          | A or B  | A or C   |
| 25-50                          | B   | C  |
| 72-76                          | B   | C  |
| 150-174 <sup>2</sup>           | B, D, or E                                    | C, D or E  |
| 150 paging only                | B   | C  |
| 220-222                        | F   | F  |
| 421-512 <sup>2 5</sup>         | B, D, or E                                    | C, D, or E                                       |
| 450 paging only                | B   | G  |
| 806-809/851-854 <sup>6</sup>   | B   | H  |
| 809-824/854-869 <sup>3 5</sup> | B   | G  |
| 896-901/935-940                | I   | J  |
| 902-928                        | K   | K  |
| 929-930                        | B   | G  |
| 4940-4990 MHz                  | L or M  | L or M   |
| 5850-5925 <sup>4</sup>         |   |  |
| All other bands                | B   | C  |


#### Emission Mask D — 12.5 kHz channel bandwidth equipment

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the centre of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : 0dB
- (2) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

#### TEST CONFIGURATION

Test setup for Analog:

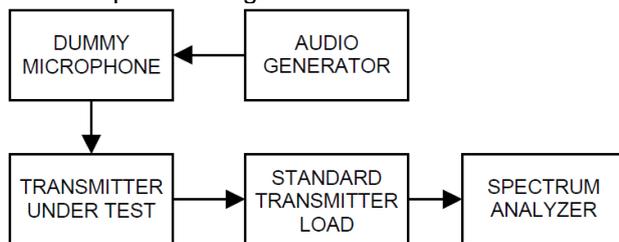

Test setup for Digital:

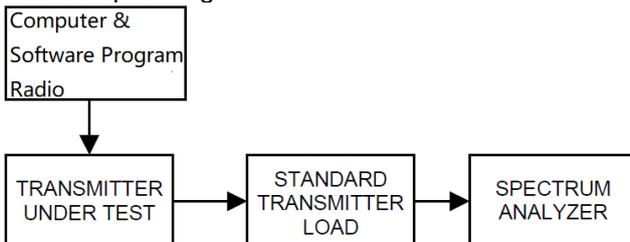

**TEST PROCEDURE**

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:  
Centre frequency = fundamental frequency, span=120kHz for 12.5kHz channel spacing,  
RBW=100Hz, VBW=1000Hz, Sweep = auto,  
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4
- 5) Measure and record the results in the test report.

**TEST MODE**

Please reference to the section 3.4

**TEST RESULTS**

**Passed**       **Not Applicable**

Please refer to appendix C on the section 8 appendix report


## 5.4 Modulation Limit

### LIMIT

FCC Part 2.1047(b)

2.5kHz for 12.5 KHz Channel Spacing System

### TEST CONFIGURATION

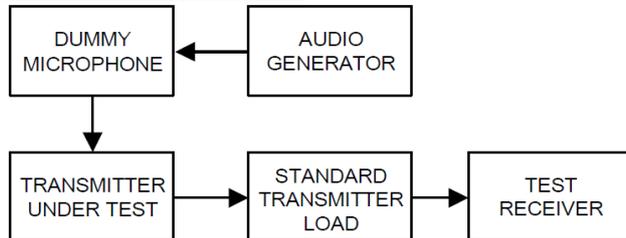

### TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for  $\leq 0.25$  Hz to  $\geq 15,000$  Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4 and vary the input level from  $-20$  to  $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence.

### TEST MODE

Please reference to the section 3.4

### TEST RESULTS


Passed       Not Applicable

Please refer to appendix D on the section 8 appendix report

## 5.5 Audio Frequency Response


### LIMIT

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

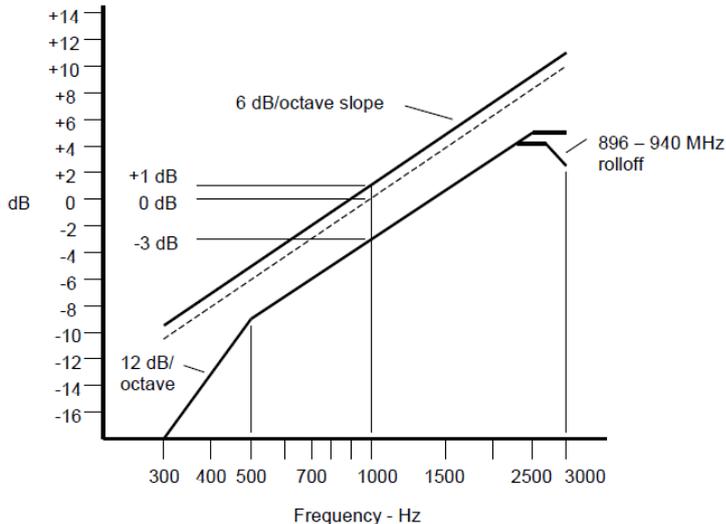

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

### TEST CONFIGURATION

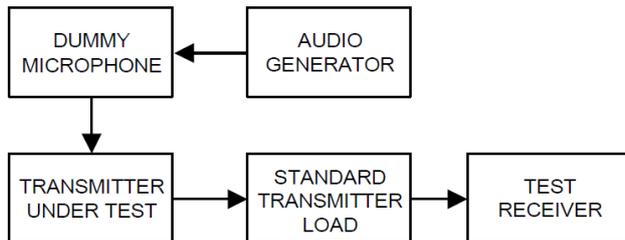

### TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 3.4
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as  $V_{REF}$ .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as  $V_{FREQ}$
- 11) Calculate the audio frequency response at the present frequency as:  
audio frequency response =  $20 \log_{10} (V_{FREQ}/V_{REF})$ .
- 12) Repeat steps 8) through 11) for all the desired test frequencies

**TEST MODE**

Please reference to the section 3.4

**TEST RESULTS**

**Passed**       **Not Applicable**

Please refer to appendix E on the section 8 appendix report


### 5.6 Frequency stability VS Temperature

#### LIMIT

#### FCC Part 90.213, FCC Part 2.1055

| Frequency range (MHz)    | Fixed and base stations | Mobile stations           |                              |
|--------------------------|-------------------------|---------------------------|------------------------------|
|                          |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25                 | 1 2 3 100               | 100                       | 200                          |
| 25-50                    | 20                      | 20                        | 50                           |
| 72-76                    | 5                       |                           | 50                           |
| 150-174                  | 5 11 5                  | 6 5                       | 4 6 5 0                      |
| 216-220                  | 1.0                     |                           | 1.0                          |
| 220-222 <sup>12</sup>    | 0.1                     | 1.5                       | 1.5                          |
| 421-512                  | 7 11 14 2.5             | 8 5                       | 8 5                          |
| 806-809                  | 14 1.0                  | 1.5                       | 1.5                          |
| 809-824                  | 14 1.5                  | 2.5                       | 2.5                          |
| 851-854                  | 1.0                     | 1.5                       | 1.5                          |
| 854-869                  | 1.5                     | 2.5                       | 2.5                          |
| 896-901                  | 14 0.1                  | 1.5                       | 1.5                          |
| 902-928                  | 2.5                     | 2.5                       | 2.5                          |
| 902-928 <sup>13</sup>    | 2.5                     | 2.5                       | 2.5                          |
| 929-930                  | 1.5                     |                           |                              |
| 935-940                  | 0.1                     | 1.5                       | 1.5                          |
| 1427-1435                | 9 300                   | 300                       | 300                          |
| Above 2450 <sup>10</sup> |                         |                           |                              |

#### TEST CONFIGURATION

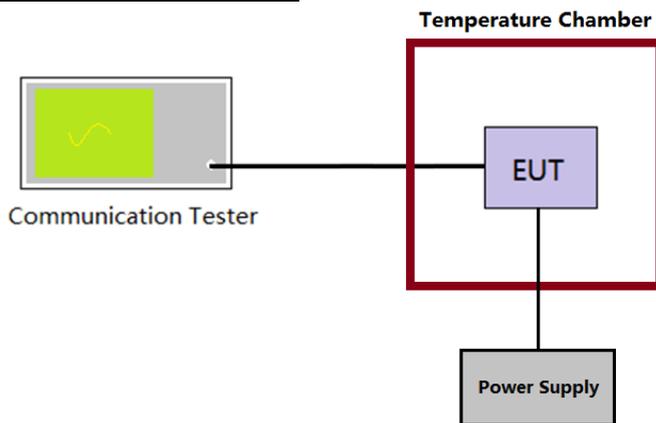

#### TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to  $-30^{\circ}\text{C}$ . After the temperature stabilized for approximately 30 minutes recorded the frequency as  $MCF_{\text{MHz}}$ .
- 4) Calculate the ppm frequency error by the following:  

$$\text{ppm error} = (MCF_{\text{MHz}} / ACF_{\text{MHz}} - 1) * 10^6$$
 where  
 $MCF_{\text{MHz}}$  is the Measured Carrier Frequency in MHz  
 $ACF_{\text{MHz}}$  is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with  $10^{\circ}\text{C}$  increased per stage until the highest temperature of  $+50^{\circ}\text{C}$  reached.

#### TEST MODE

Please reference to the section 3.4

#### TEST RESULTS

Passed       Not Applicable

Please refer to appendix F on the section 8 appendix report


### 5.7 Frequency stability VS Voltage

#### LIMIT

FCC Part 90.213, FCC Part 2.1055

| Frequency range (MHz)    | Fixed and base stations | Mobile stations           |                              |
|--------------------------|-------------------------|---------------------------|------------------------------|
|                          |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25                 | 1 2 3 100               | 100                       | 200                          |
| 25-50                    | 20                      | 20                        | 50                           |
| 72-76                    | 5                       |                           | 50                           |
| 150-174                  | 5 11 5                  | 6 5                       | 4 6 5 0                      |
| 216-220                  | 1.0                     |                           | 1.0                          |
| 220-222 <sup>12</sup>    | 0.1                     | 1.5                       | 1.5                          |
| 421-512                  | 7 11 14 2.5             | 8 5                       | 8 5                          |
| 806-809                  | 14 1.0                  | 1.5                       | 1.5                          |
| 809-824                  | 14 1.5                  | 2.5                       | 2.5                          |
| 851-854                  | 1.0                     | 1.5                       | 1.5                          |
| 854-869                  | 1.5                     | 2.5                       | 2.5                          |
| 896-901                  | 14 0.1                  | 1.5                       | 1.5                          |
| 902-928                  | 2.5                     | 2.5                       | 2.5                          |
| 902-928 <sup>13</sup>    | 2.5                     | 2.5                       | 2.5                          |
| 929-930                  | 1.5                     |                           |                              |
| 935-940                  | 0.1                     | 1.5                       | 1.5                          |
| 1427-1435                | 9 300                   | 300                       | 300                          |
| Above 2450 <sup>10</sup> |                         |                           |                              |

#### TEST CONFIGURATION

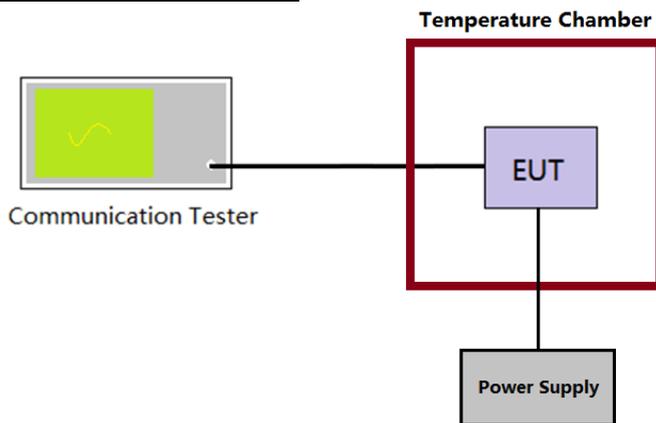

#### TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as  $MCF_{MHz}$
- 4) Calculate the ppm frequency error by the following:  

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$
 where  
 $MCF_{MHz}$  is the Measured Carrier Frequency in MHz  
 $ACF_{MHz}$  is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied  $\pm 15\%$  of the nominal value measured at the input to the EUT

#### TEST MODE

Please reference to the section 3.4

#### TEST RESULTS

Passed       Not Applicable

Please refer to appendix G on the section 8 appendix report

## 5.8 Transmitter Frequency Behavior

### LIMIT

#### FCC part 90.214


Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time intervals <sup>1 2</sup>   | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|---|---|----------------|----------------|
|   |   | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |   |                |                |
| t <sub>1</sub> <sup>4</sup>   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>  | ±12.5 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup>   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>  | ±6.25 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup>   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>  | ±3.125 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |

Note:

- On is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
  - t<sub>1</sub> is the time period immediately following ton.
  - t<sub>2</sub> is the time period immediately following t<sub>1</sub>.
  - t<sub>3</sub> is the time period from the instant when the transmitter is turned off until toff.
  - t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### TEST CONFIGURATION

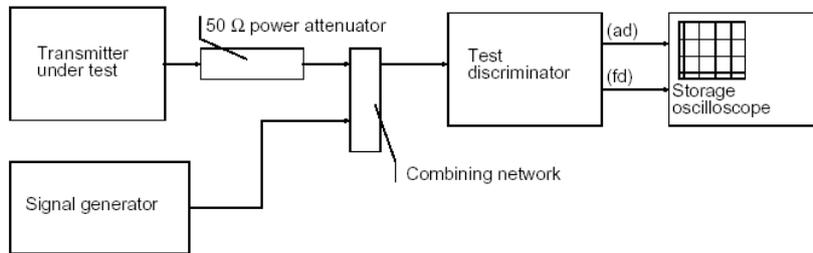

### TEST PROCEDURE

- Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;
- Input 1kHz signal into DUT;
- Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;
- Keep DUT in OFF state and Key the PTT;
- Observe the stored oscilloscope of modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t<sub>1</sub> and t<sub>2</sub>, and shall also remain within limits following t<sub>2</sub>;
- Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.
- Keep the digital portable radio in ON state and unkey the PTT;
- Observe the stored oscilloscope of modulation domain analyzer, The signal trace shall be maintained within the allowable limits during the period t<sub>3</sub>.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ±12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.

- 11) Supply sufficient attenuation via the RF attenuator to provide an input level to the stored oscilloscope
- 12) that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the stored oscilloscope as  $P_0$ .
- 13) Turn off the transmitter.
- 14) Adjust the RF level of the signal generator to provide RF power equal to  $P_0$ . This signal generator RF level shall be maintained throughout the rest of the measurement.
- 15) Remove the attenuation, so the input power to the stored oscilloscope is increased by 30 dB when the transmitter is turned on.
- 16) Adjust the vertical amplitude control of the stored oscilloscope to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- 17) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be ton. The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
- 18) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum
- 19) Analyzer. The trace should be maintained within the allowed divisions during the period  $t_3$ .

### **TEST MODE**

Please reference to the section 3.4

### **TEST RESULTS**

**Passed**       **Not Applicable**

Please refer to appendix H on the section 8 appendix report

### 5.9 Transmit Conducted Spurious Emission

#### LIMIT

FCC Part 90.210, FCC Part 2.1051

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.


*In general, the worse case attenuation requirement shown above was applied.*

*Calculation: Limit (dBm) =EL-50-10log (P)*

*EL is the emission level of the Output Power expressed in dBm,*

*Limit (dBm) = P(dBm)-50-10 log (Pwatts) = -20dBm*

#### TEST CONFIGURATION

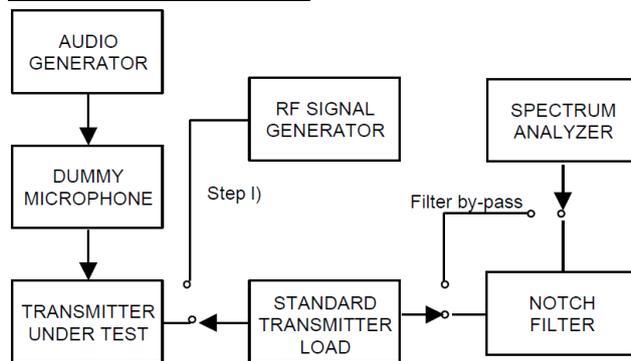

#### TEST PROCEDURE

1. Connect the equipment as illustrated, with the notch filter by-passed.
2. Apply Input Modulation Signal to EUT according to Section 3.4
3. Adjust the spectrum analyzer for the following settings:  
 Below 1GHz: RBW=100kHz, VBW=300kHz  
 Above 1GHz: RBW=1MHz, VBW=3MHz  
 Detector=Peak, Sweep time=Auto, Trace=Max hold
4. Scan frequency range up to 10<sup>th</sup> harmonic.
5. Record the frequencies and levels of spurious emissions

#### TEST MODE

Please reference to the section 3.4

#### TEST RESULTS

Passed       Not Applicable

Please refer to appendix I on the section 8 appendix report

### 5.10 Transmitter Radiated Spurious Emission

Radiated spurious emissions are emissions from the equipment when transmitting into a nonradiating load on a frequency or frequencies that are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

#### LIMIT

FCC Part 90.210, FCC Part 2.1051

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

**Emission Mask E**—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

*In general, the worse case attenuation requirement shown above was applied.*


*Calculation: Limit (dBm) = EL - 50 - 10 log (P)*

*EL is the emission level of the Output Power expressed in dBm,*


*Limit (dBm) = P(dBm) - 50 - 10 log (Pwatts) = -20dBm*


#### TEST CONFIGURATION

**Below 1GHz:**

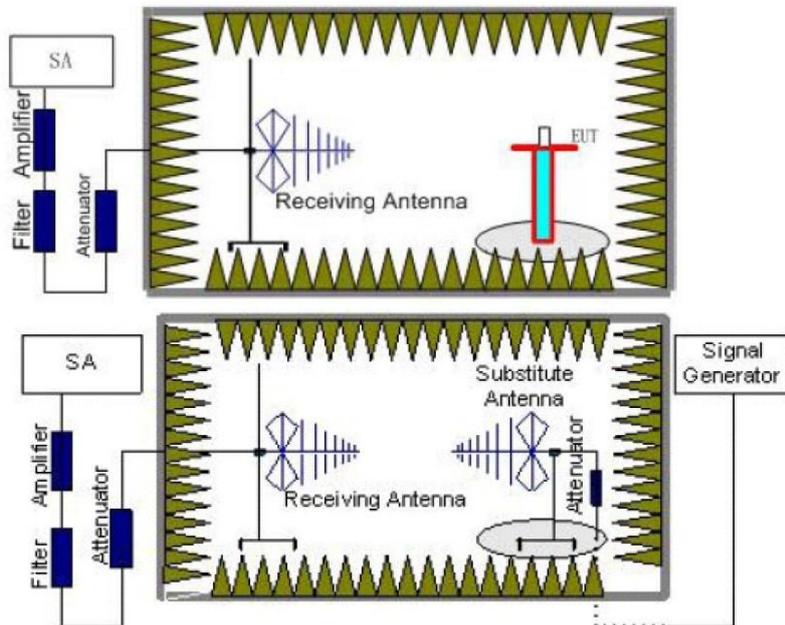

**Above 1GHz:**

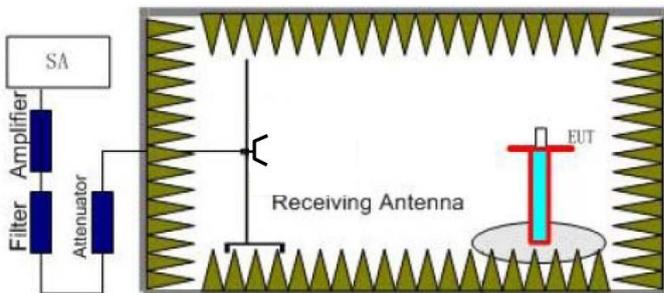

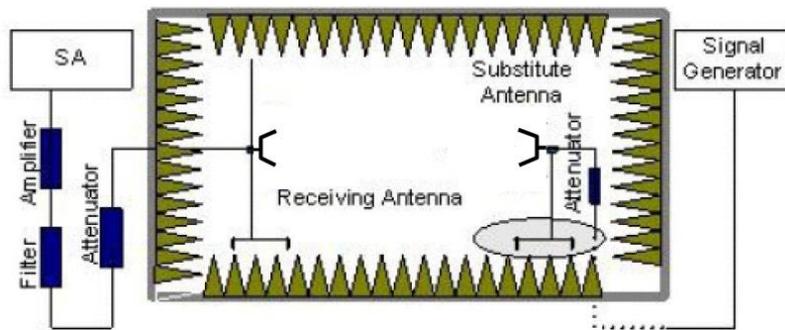

## TEST PROCEDURE

1. Place the EUT in the center of the turntable.
  - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
  - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:  
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto  
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
  - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
  - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
  - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:  

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where  
 $P_e$  = equivalent emission power in dBm  
 $P_s$  = source (signal generator) power in dBm  
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$



If necessary, the antenna gain can be calculated from calibrated antenna factor information  
14. Provide the complete measurement results as a part of the test report.



**TEST MODE**



Please reference to the section 3.4

**TEST RESULTS**


**Passed**       **Not Applicable**

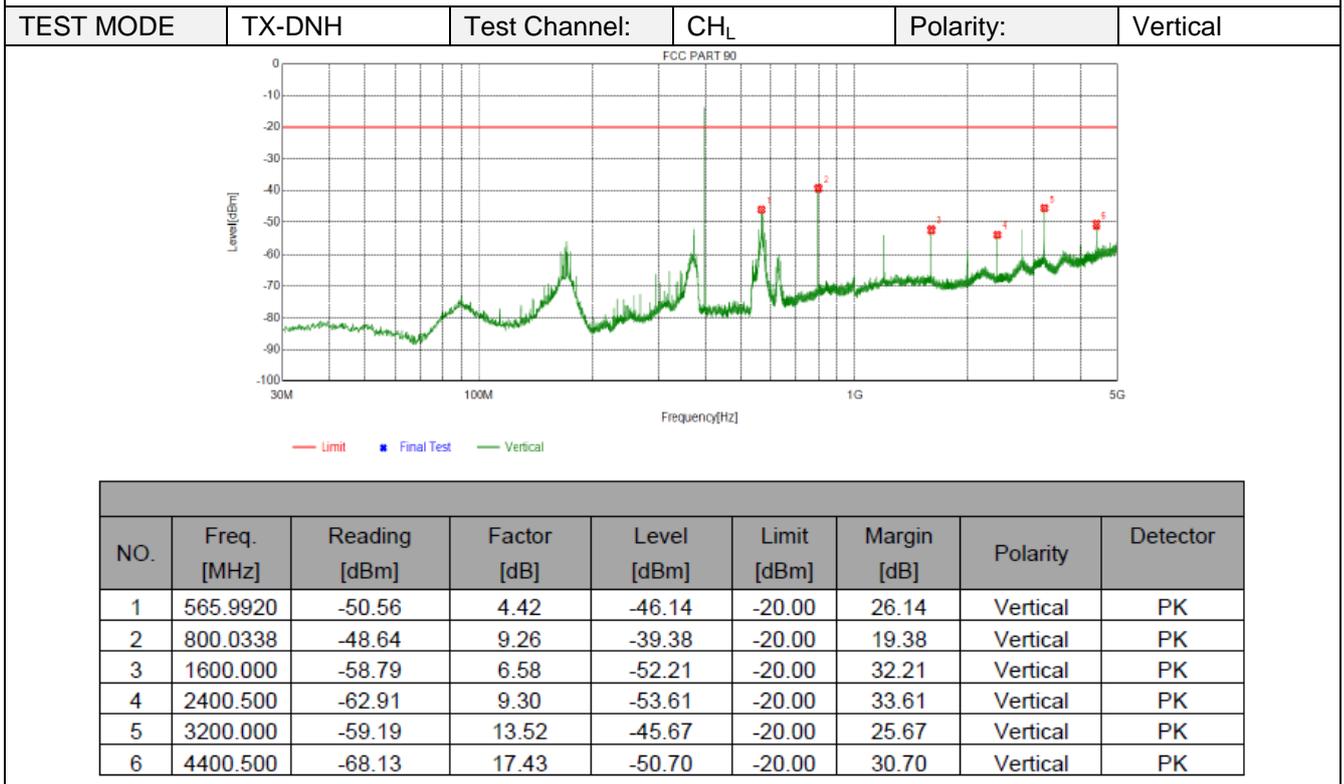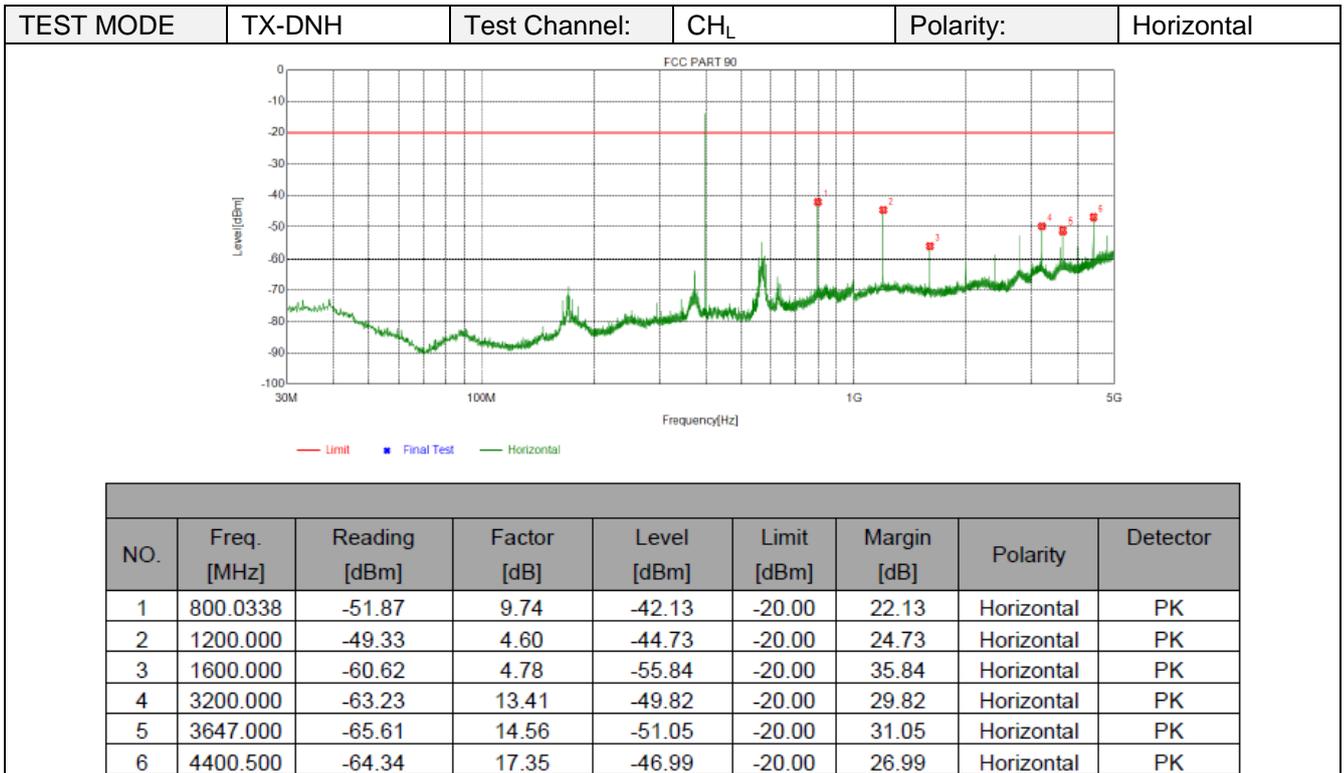

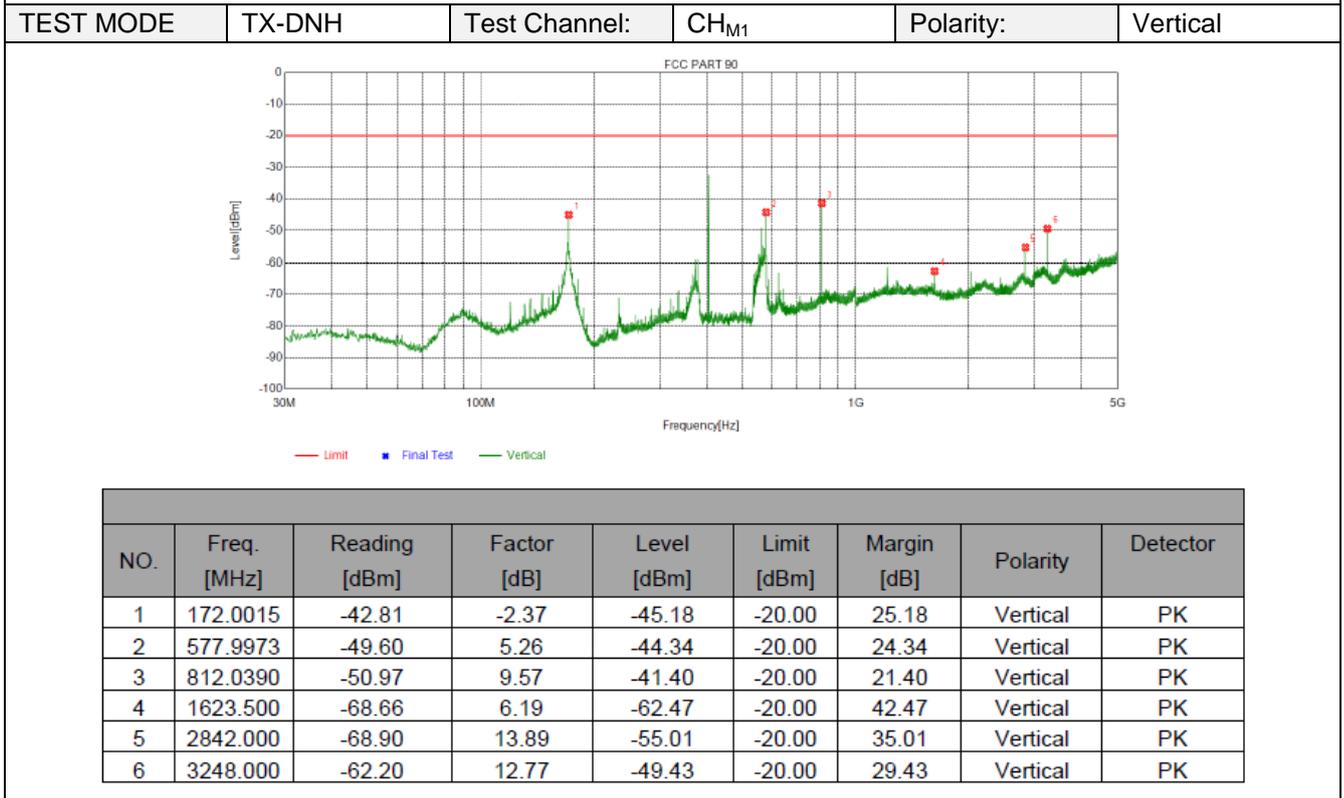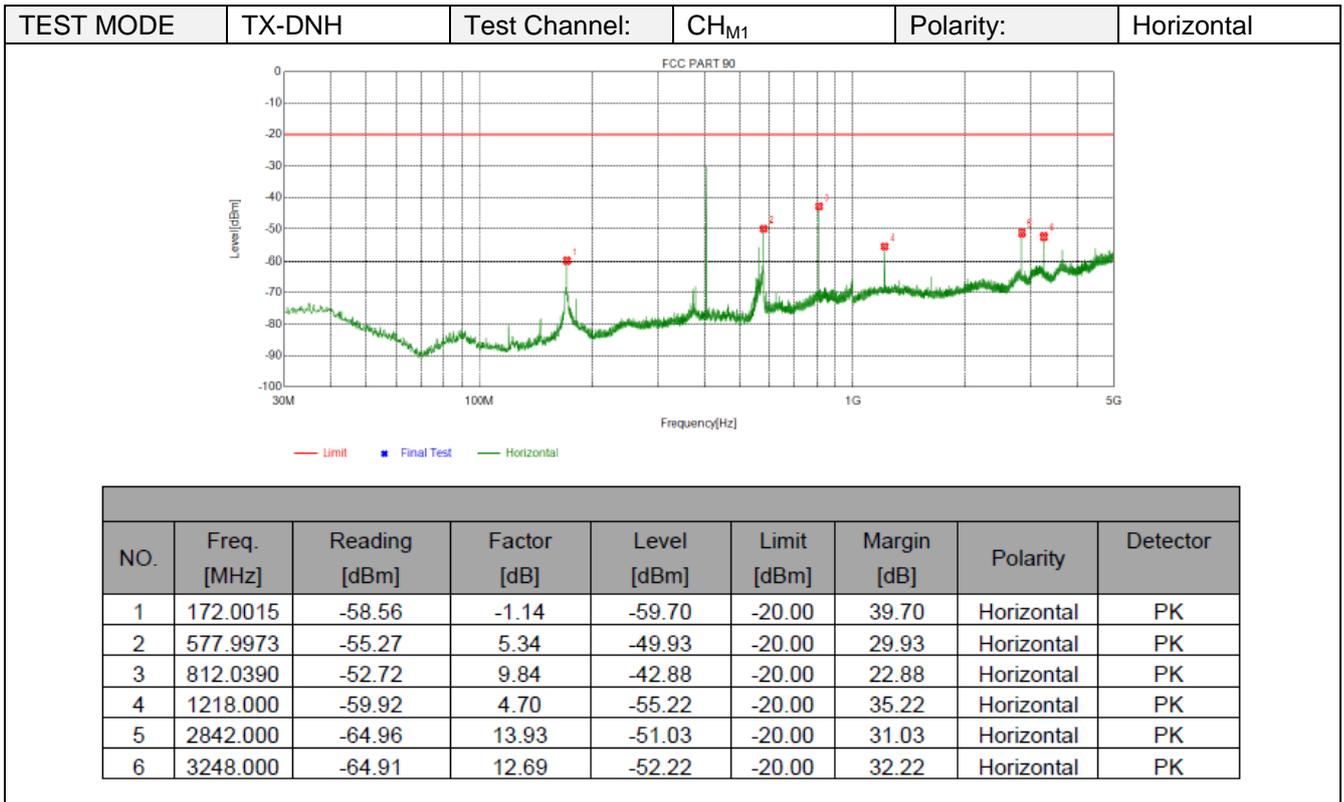

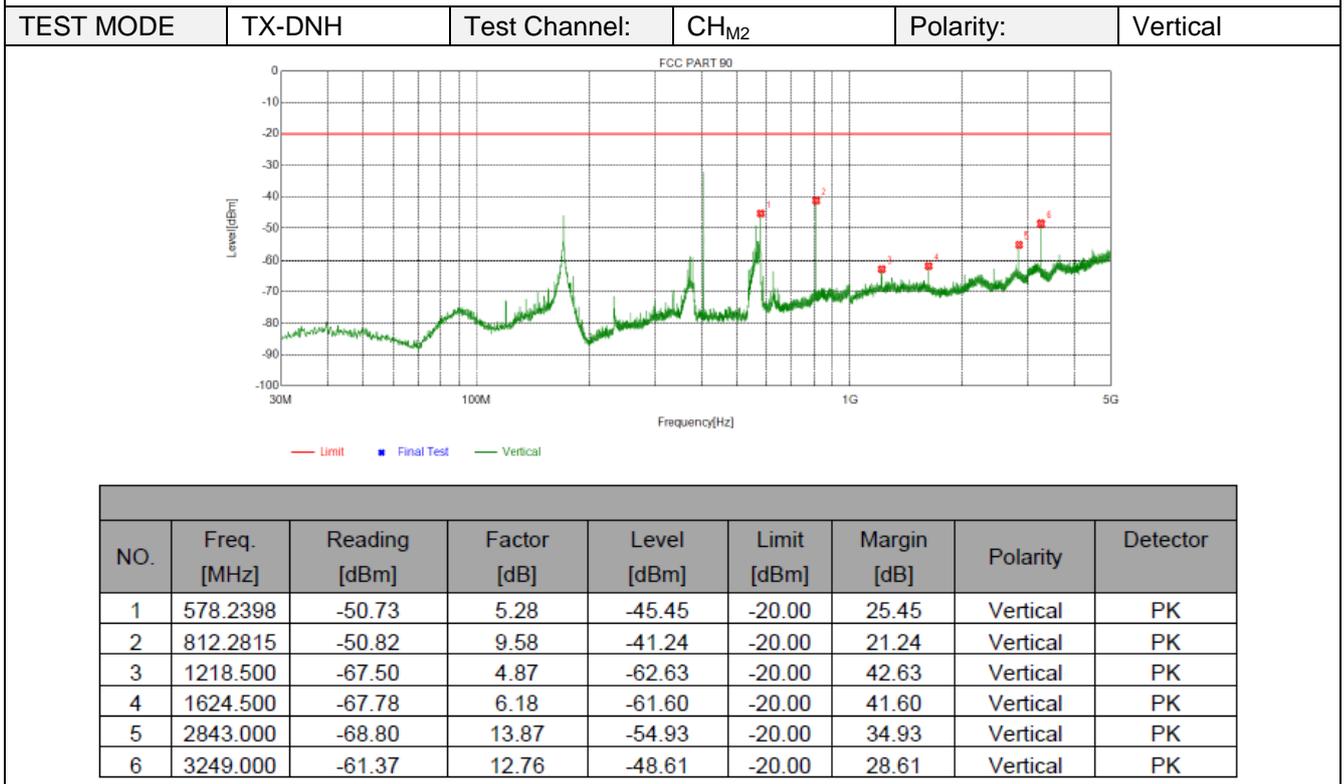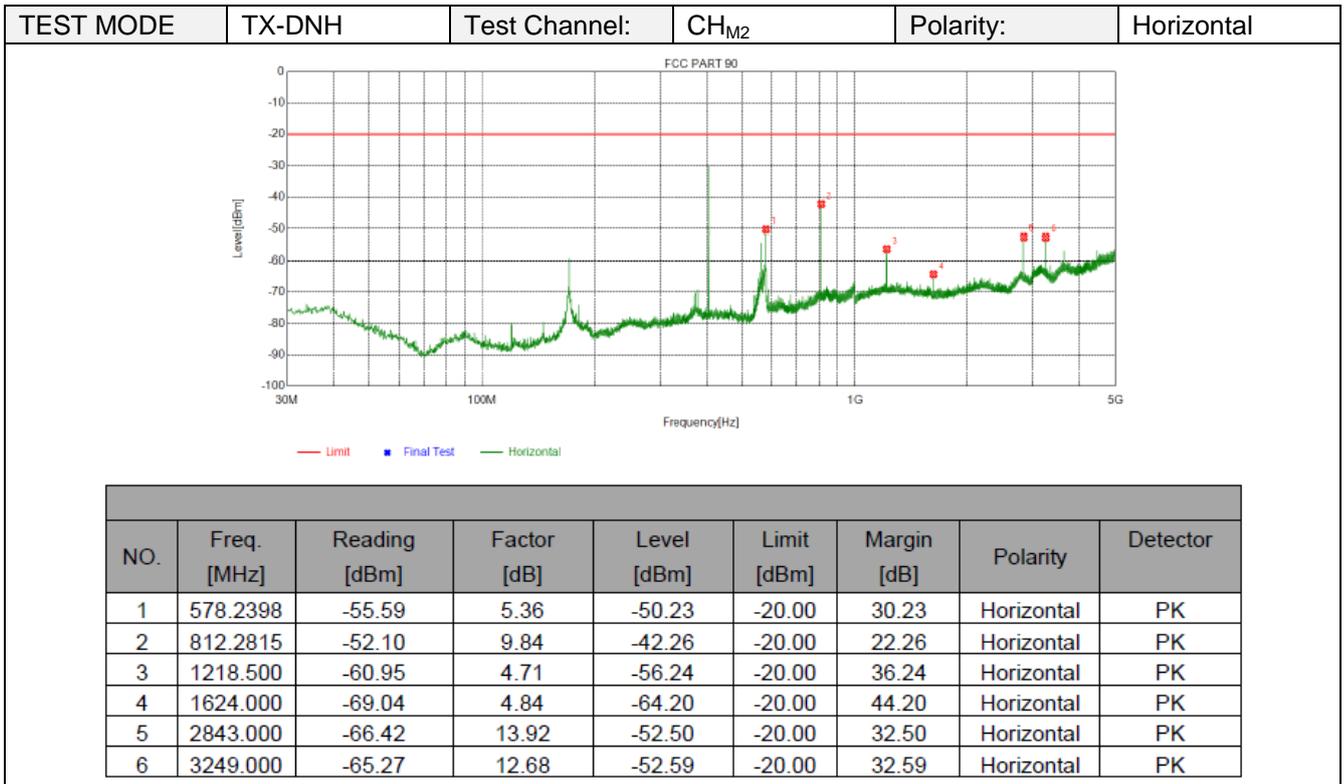


|           |        |               |                  |           |            |
|-----------|--------|---------------|------------------|-----------|------------|
| TEST MODE | TX-DNH | Test Channel: | CH <sub>M3</sub> | Polarity: | Horizontal |
|-----------|--------|---------------|------------------|-----------|------------|


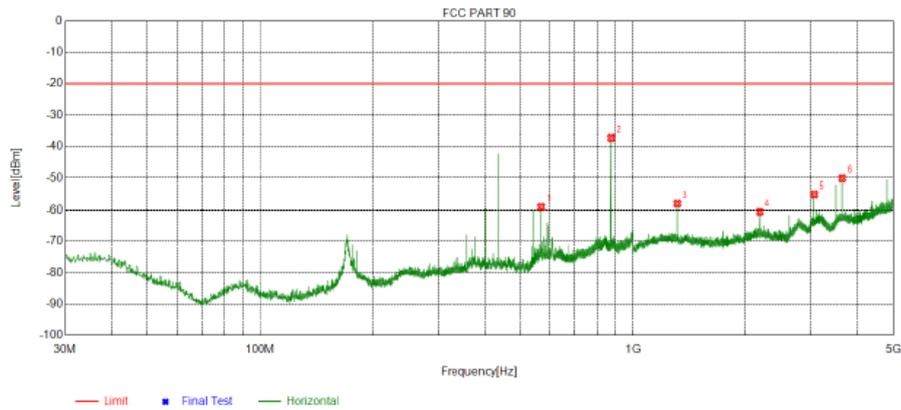




| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity   | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|------------|----------|
| 1   | 568.0535    | -63.65        | 4.69        | -58.96      | -20.00      | 38.96       | Horizontal | PK       |
| 2   | 876.0670    | -47.44        | 10.13       | -37.31      | -20.00      | 17.31       | Horizontal | PK       |
| 3   | 1314.000    | -63.15        | 5.25        | -57.90      | -20.00      | 37.90       | Horizontal | PK       |
| 4   | 2190.000    | -70.90        | 10.39       | -60.51      | -20.00      | 40.51       | Horizontal | PK       |
| 5   | 3066.000    | -67.55        | 12.59       | -54.96      | -20.00      | 34.96       | Horizontal | PK       |
| 6   | 3648.000    | -64.68        | 14.56       | -50.12      | -20.00      | 30.12       | Horizontal | PK       |



|           |        |               |                  |           |          |
|-----------|--------|---------------|------------------|-----------|----------|
| TEST MODE | TX-DNH | Test Channel: | CH <sub>M3</sub> | Polarity: | Vertical |
|-----------|--------|---------------|------------------|-----------|----------|


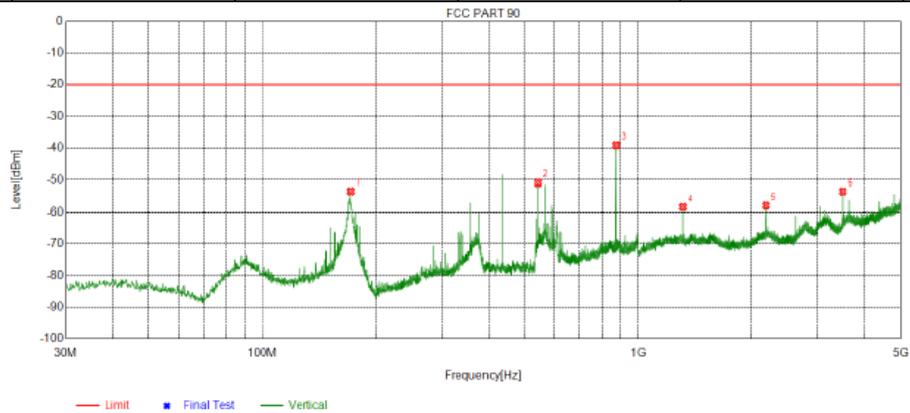


| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|----------|----------|
| 1   | 172.1228    | -51.02        | -2.35       | -53.37      | -20.00      | 33.37       | Vertical | PK       |
| 2   | 541.9815    | -54.65        | 3.85        | -50.80      | -20.00      | 30.80       | Vertical | PK       |
| 3   | 876.0670    | -49.39        | 10.26       | -39.13      | -20.00      | 19.13       | Vertical | PK       |
| 4   | 1314.000    | -63.91        | 5.65        | -58.26      | -20.00      | 38.26       | Vertical | PK       |
| 5   | 2190.000    | -68.87        | 11.07       | -57.80      | -20.00      | 37.80       | Vertical | PK       |
| 6   | 3504.500    | -66.66        | 13.24       | -53.42      | -20.00      | 33.42       | Vertical | PK       |

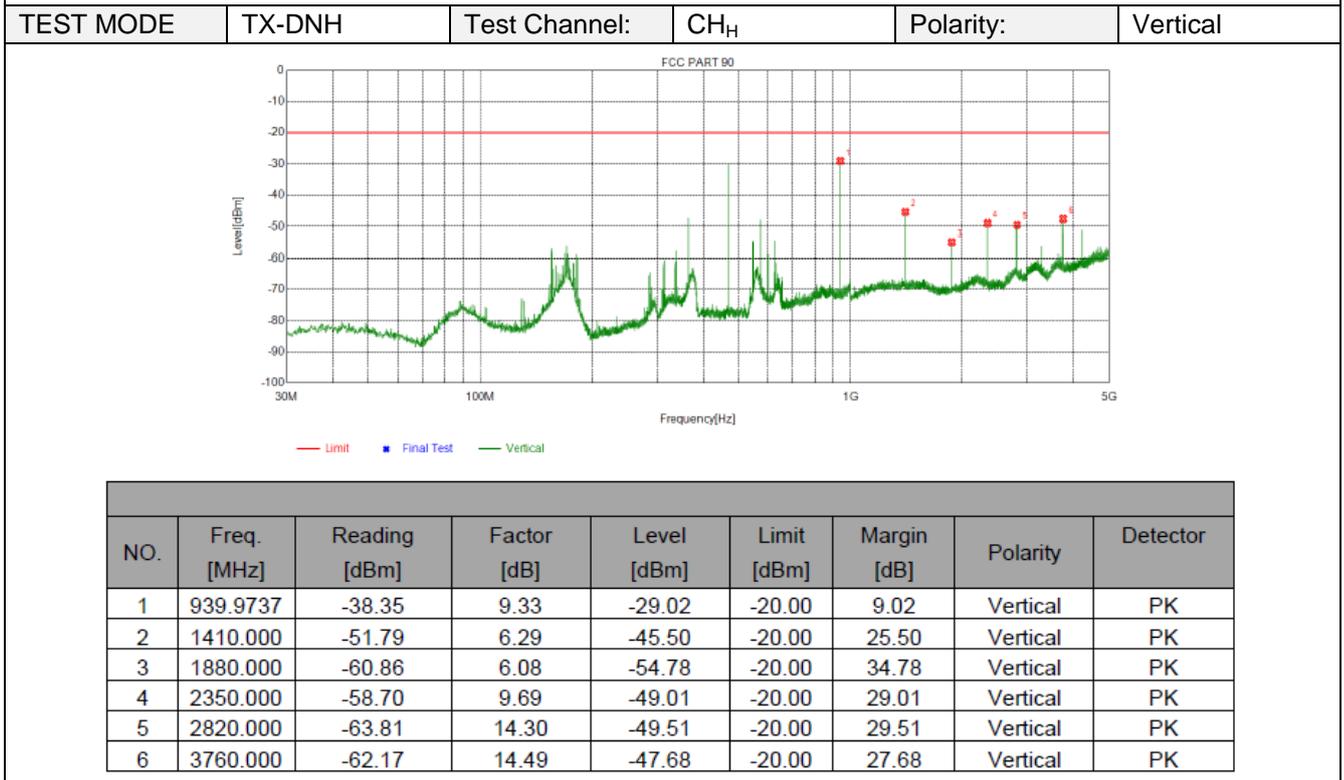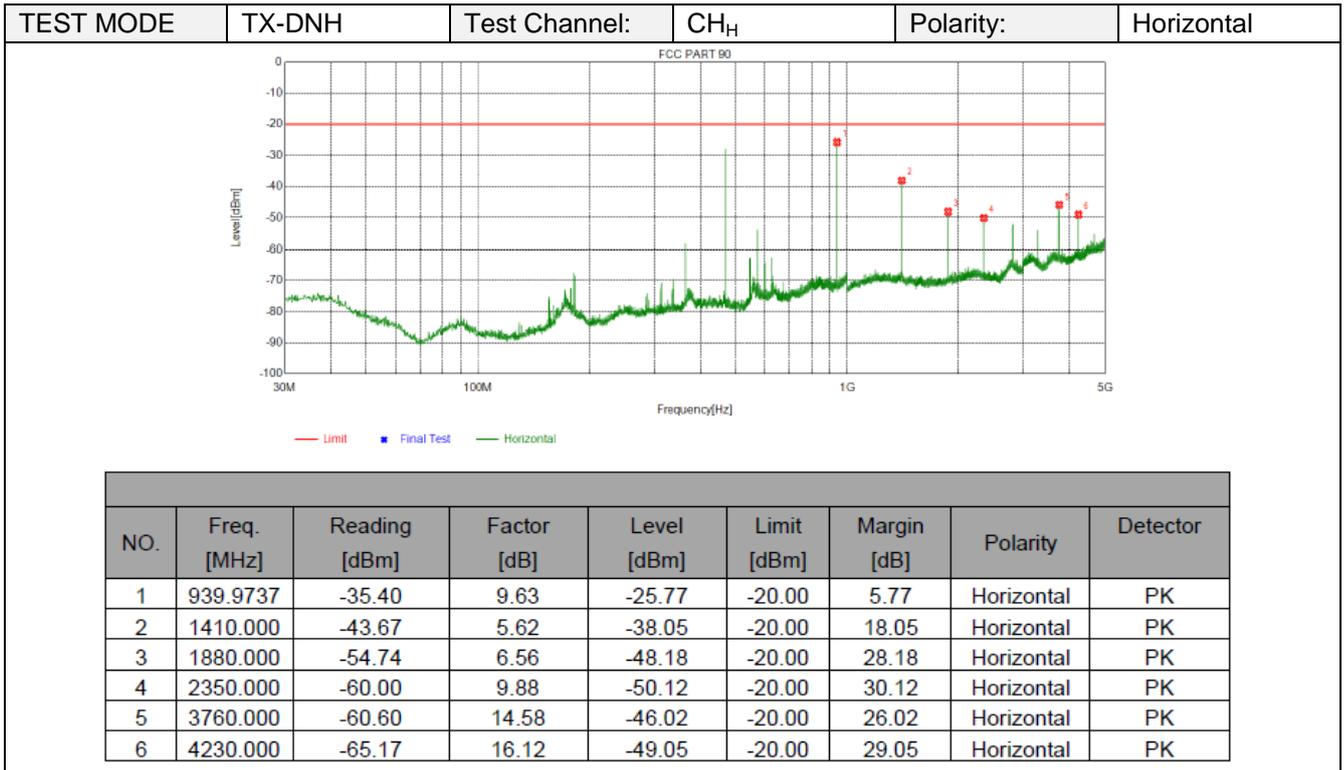


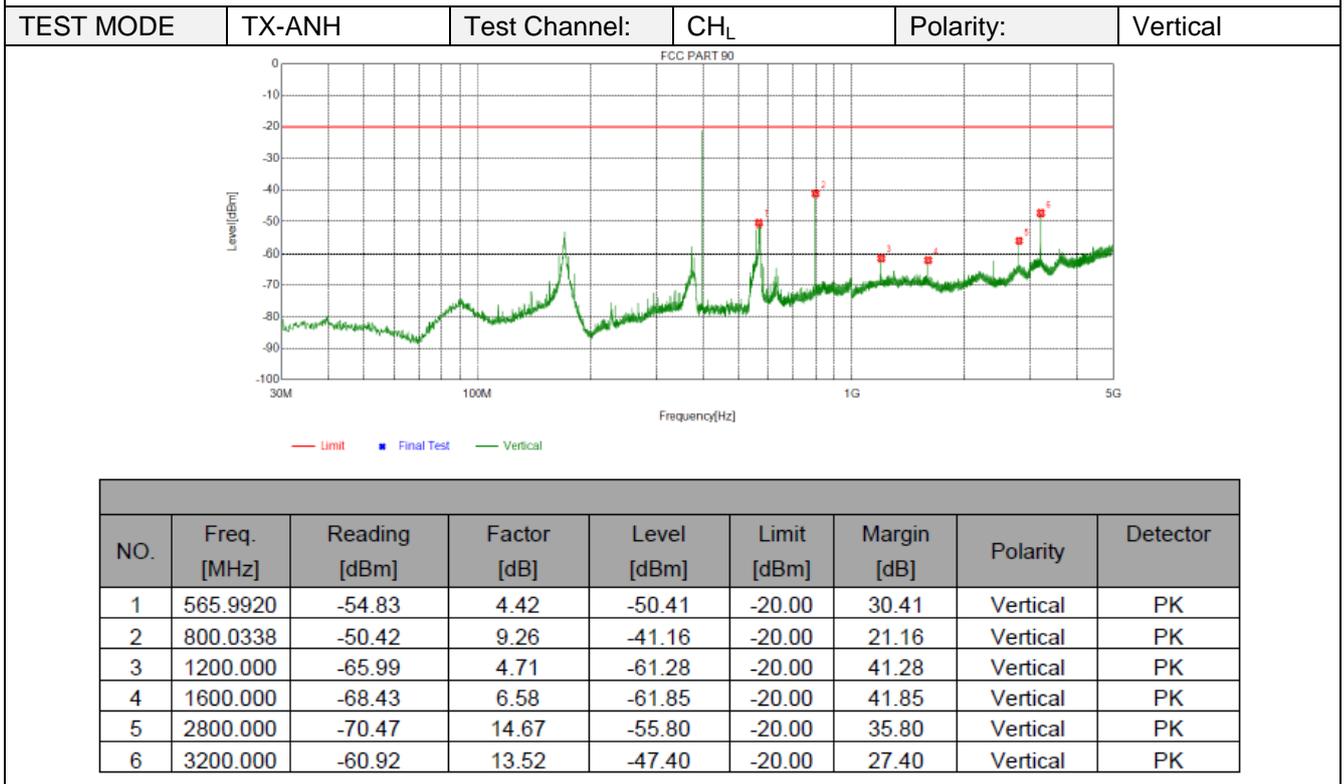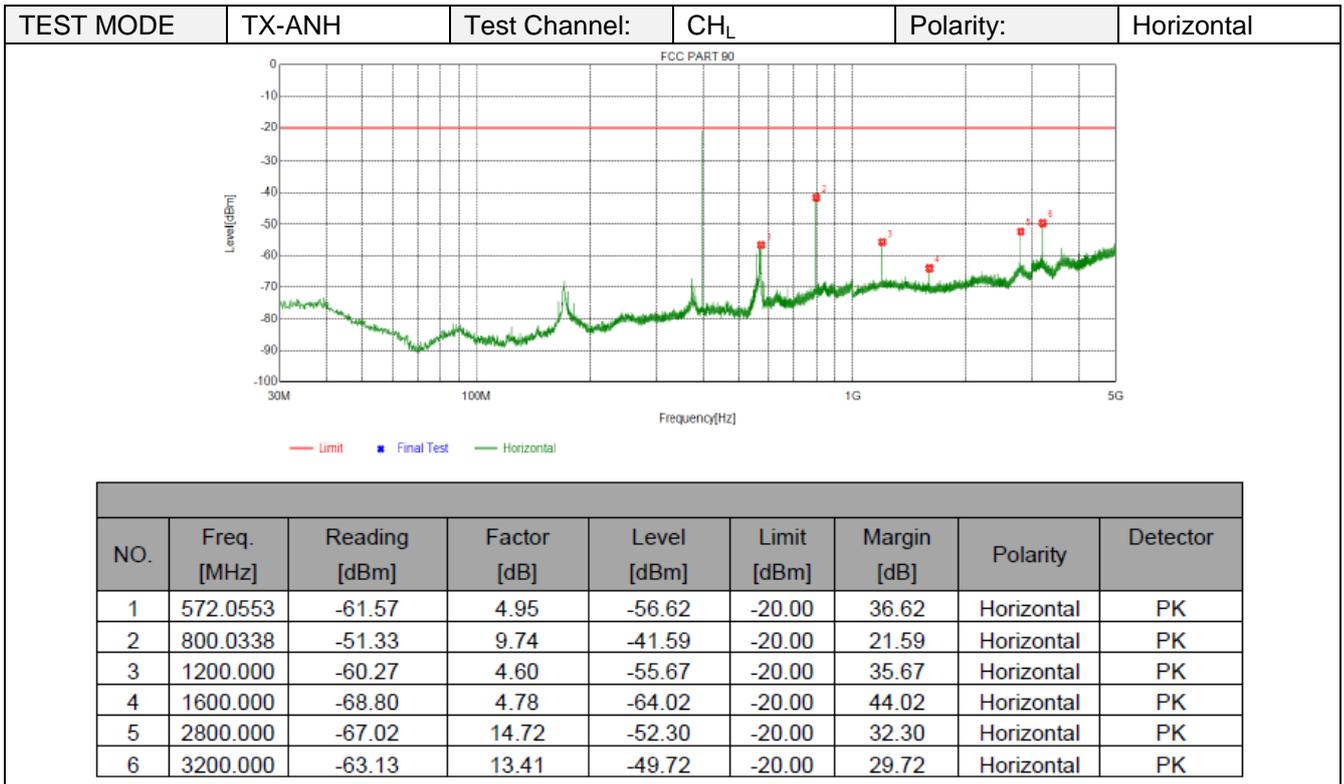

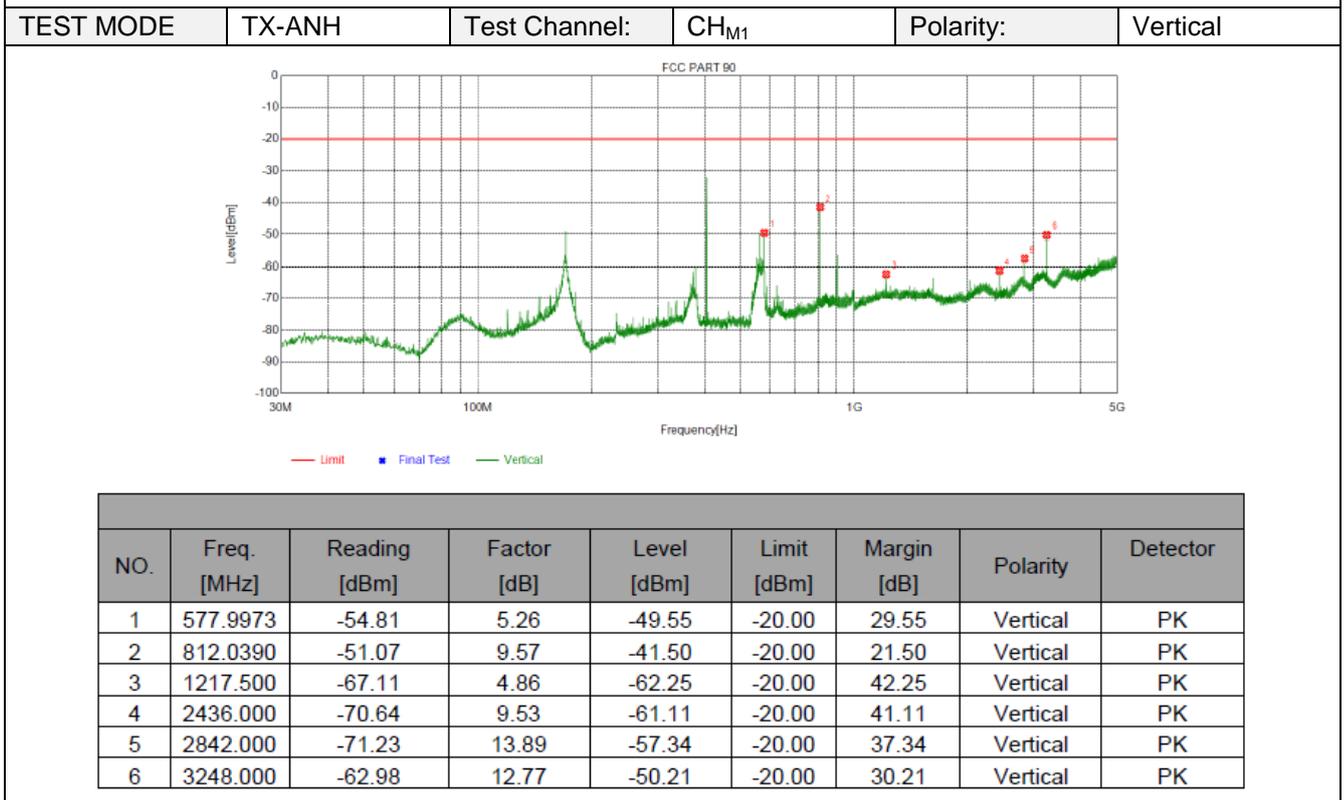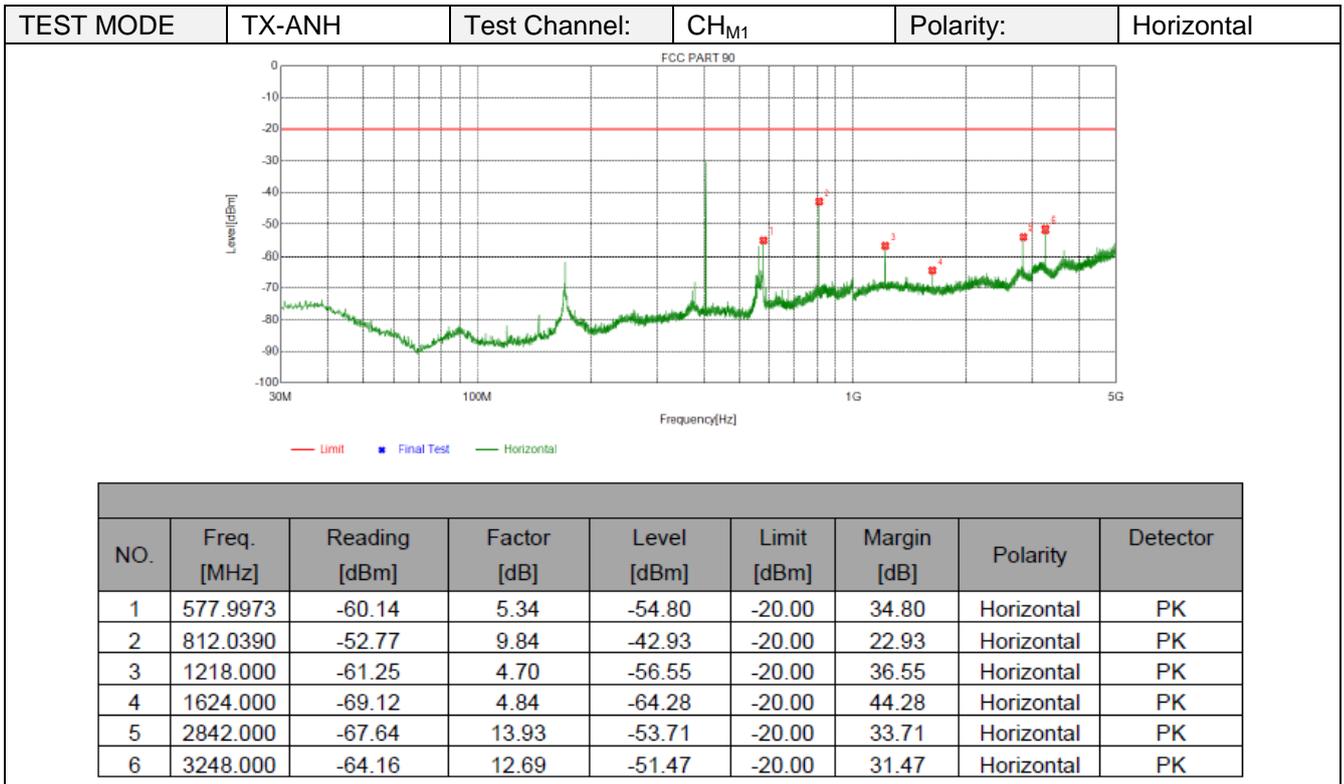

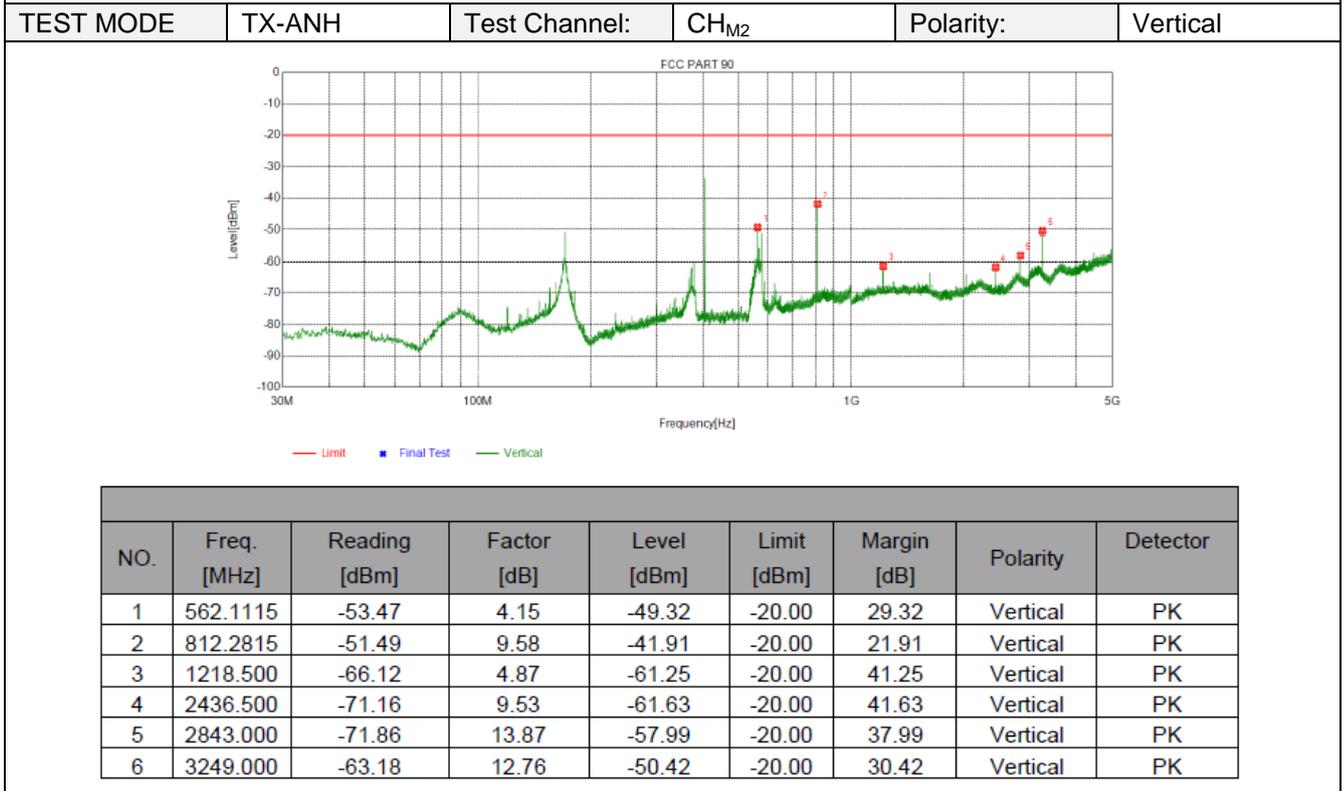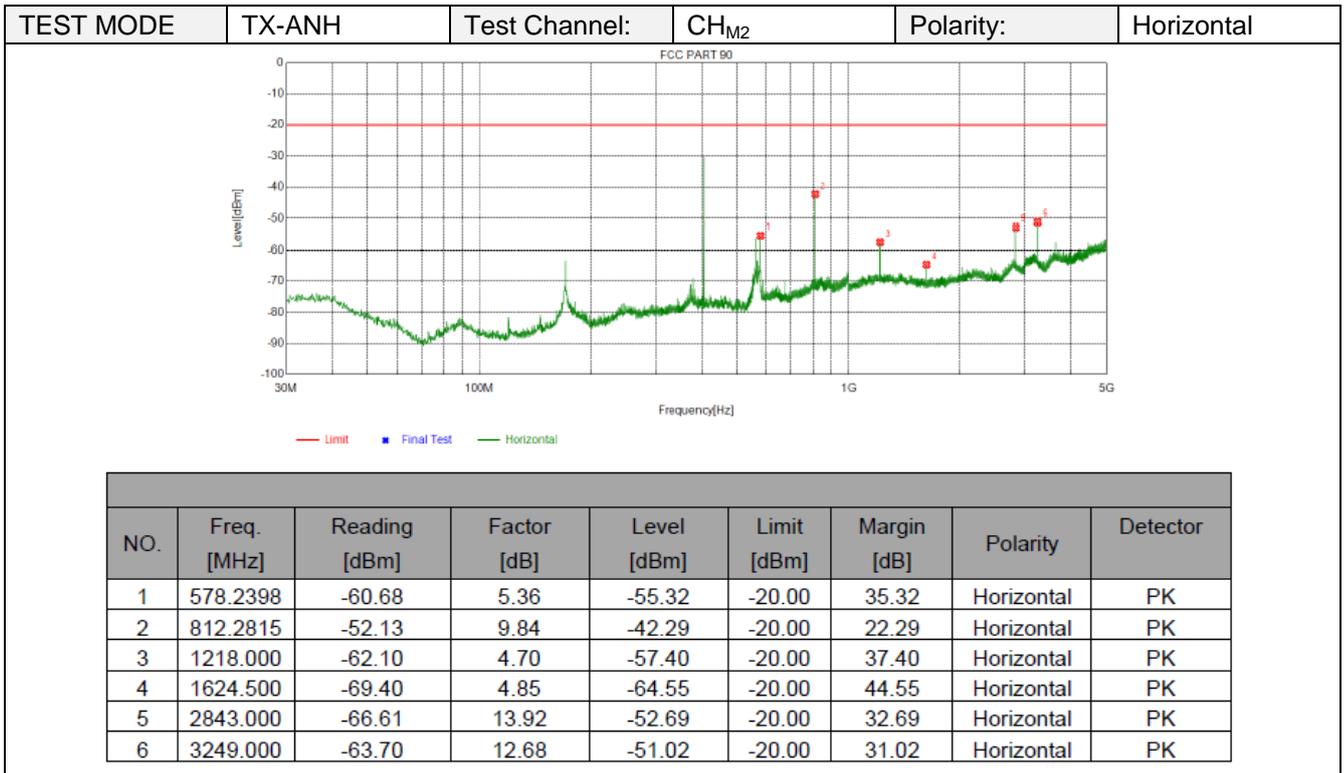


|           |        |               |                  |           |            |
|-----------|--------|---------------|------------------|-----------|------------|
| TEST MODE | TX-ANH | Test Channel: | CH <sub>M3</sub> | Polarity: | Horizontal |
|-----------|--------|---------------|------------------|-----------|------------|

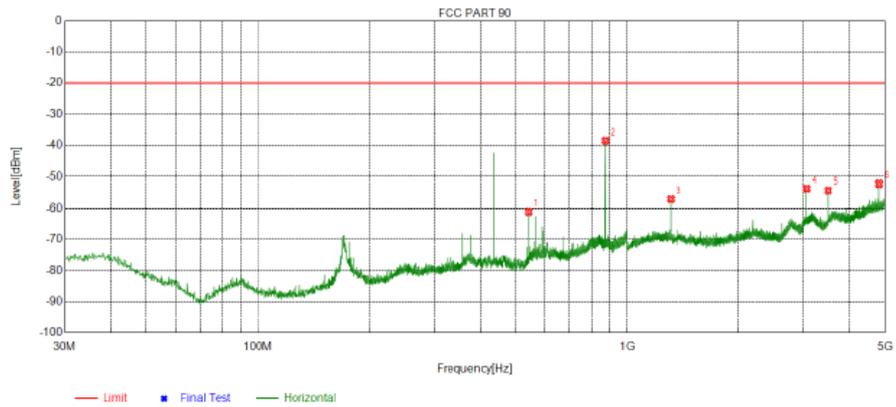


| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity   | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|------------|----------|
| 1   | 541.9815    | -64.79        | 3.74        | -61.05      | -20.00      | 41.05       | Horizontal | PK       |
| 2   | 876.0670    | -48.63        | 10.13       | -38.50      | -20.00      | 18.50       | Horizontal | PK       |
| 3   | 1314.000    | -62.17        | 5.25        | -56.92      | -20.00      | 36.92       | Horizontal | PK       |
| 4   | 3066.500    | -66.18        | 12.59       | -53.59      | -20.00      | 33.59       | Horizontal | PK       |
| 5   | 3504.500    | -67.33        | 13.13       | -54.20      | -20.00      | 34.20       | Horizontal | PK       |
| 6   | 4818.500    | -71.37        | 19.23       | -52.14      | -20.00      | 32.14       | Horizontal | PK       |

|           |        |               |                  |           |          |
|-----------|--------|---------------|------------------|-----------|----------|
| TEST MODE | TX-ANH | Test Channel: | CH <sub>M3</sub> | Polarity: | Vertical |
|-----------|--------|---------------|------------------|-----------|----------|

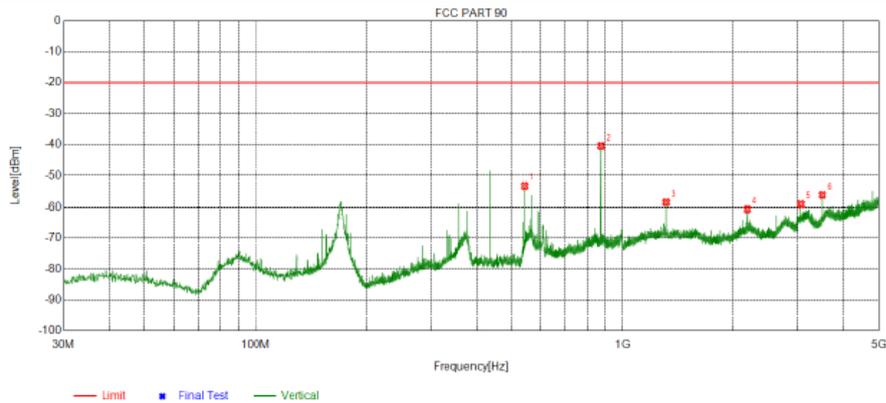


| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|----------|----------|
| 1   | 541.9815    | -56.92        | 3.85        | -53.07      | -20.00      | 33.07       | Vertical | PK       |
| 2   | 876.0670    | -50.75        | 10.26       | -40.49      | -20.00      | 20.49       | Vertical | PK       |
| 3   | 1314.000    | -63.99        | 5.65        | -58.34      | -20.00      | 38.34       | Vertical | PK       |
| 4   | 2190.000    | -71.66        | 11.07       | -60.59      | -20.00      | 40.59       | Vertical | PK       |
| 5   | 3066.000    | -71.55        | 12.61       | -58.94      | -20.00      | 38.94       | Vertical | PK       |
| 6   | 3504.500    | -69.20        | 13.24       | -55.96      | -20.00      | 35.96       | Vertical | PK       |

|           |        |               |                 |           |            |
|-----------|--------|---------------|-----------------|-----------|------------|
| TEST MODE | TX-ANH | Test Channel: | CH <sub>H</sub> | Polarity: | Horizontal |
|-----------|--------|---------------|-----------------|-----------|------------|

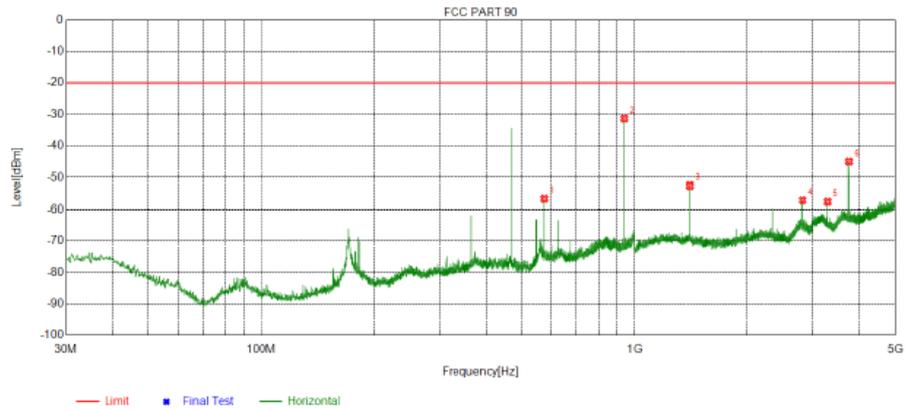

| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity   | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|------------|----------|
| 1   | 573.9955    | -61.57        | 5.08        | -56.49      | -20.00      | 36.49       | Horizontal | PK       |
| 2   | 939.9737    | -40.99        | 9.63        | -31.36      | -20.00      | 11.36       | Horizontal | PK       |
| 3   | 1410.000    | -58.07        | 5.62        | -52.45      | -20.00      | 32.45       | Horizontal | PK       |
| 4   | 2820.000    | -71.33        | 14.35       | -56.98      | -20.00      | 36.98       | Horizontal | PK       |
| 5   | 3290.000    | -69.50        | 12.06       | -57.44      | -20.00      | 37.44       | Horizontal | PK       |
| 6   | 3760.000    | -59.71        | 14.58       | -45.13      | -20.00      | 25.13       | Horizontal | PK       |



|           |        |               |                 |           |          |
|-----------|--------|---------------|-----------------|-----------|----------|
| TEST MODE | TX-ANH | Test Channel: | CH <sub>H</sub> | Polarity: | Vertical |
|-----------|--------|---------------|-----------------|-----------|----------|

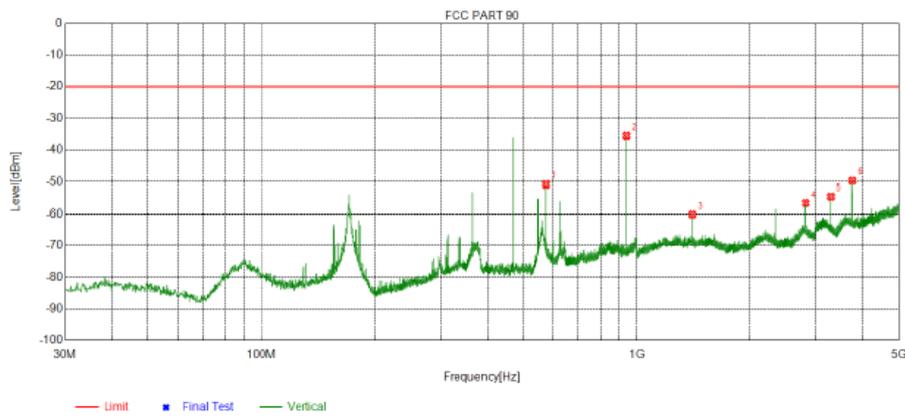

| NO. | Freq. [MHz] | Reading [dBm] | Factor [dB] | Level [dBm] | Limit [dBm] | Margin [dB] | Polarity | Detector |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|----------|----------|
| 1   | 573.9955    | -55.69        | 4.98        | -50.71      | -20.00      | 30.71       | Vertical | PK       |
| 2   | 939.9737    | -44.90        | 9.33        | -35.57      | -20.00      | 15.57       | Vertical | PK       |
| 3   | 1409.500    | -66.34        | 6.28        | -60.06      | -20.00      | 40.06       | Vertical | PK       |
| 4   | 2820.000    | -70.73        | 14.30       | -56.43      | -20.00      | 36.43       | Vertical | PK       |
| 5   | 3290.000    | -66.57        | 12.12       | -54.45      | -20.00      | 34.45       | Vertical | PK       |
| 6   | 3760.000    | -64.12        | 14.49       | -49.63      | -20.00      | 29.63       | Vertical | PK       |

## 6 TEST SETUP PHOTOS OF THE EUT

Transmitter Radiated Spurious Emission:

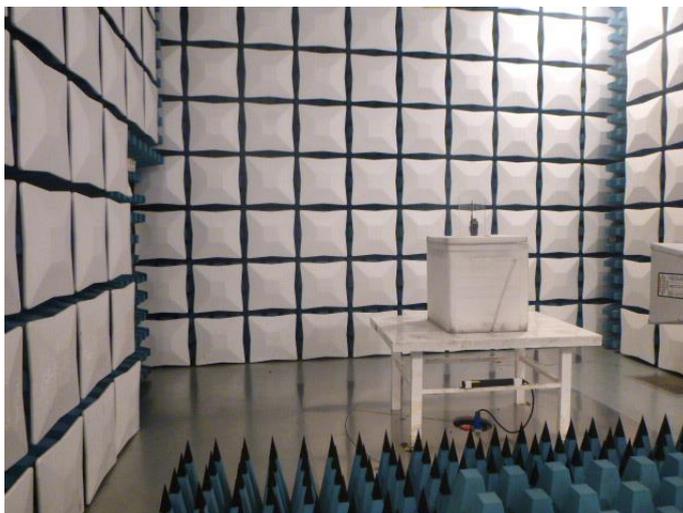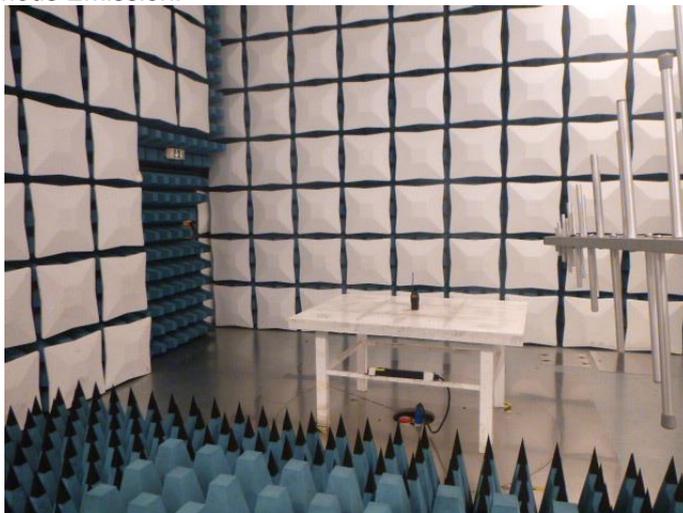



RF Conducted Test Item:





## 7 EXTERNAL AND INTERNAL PHOTOS OF THE EUT

### External Photos of the EUT



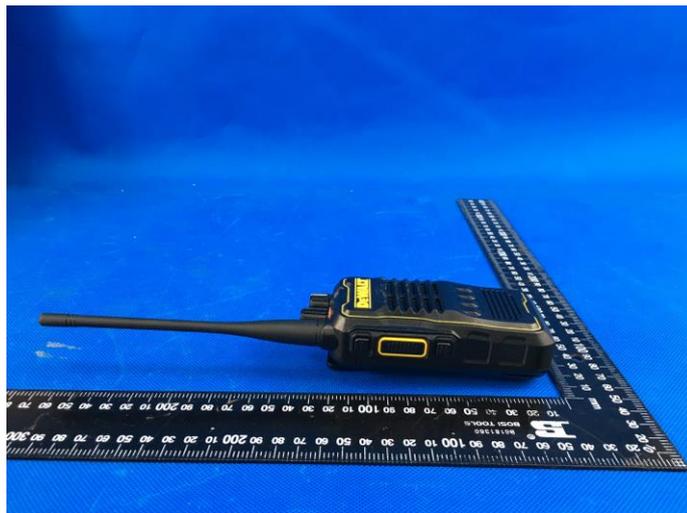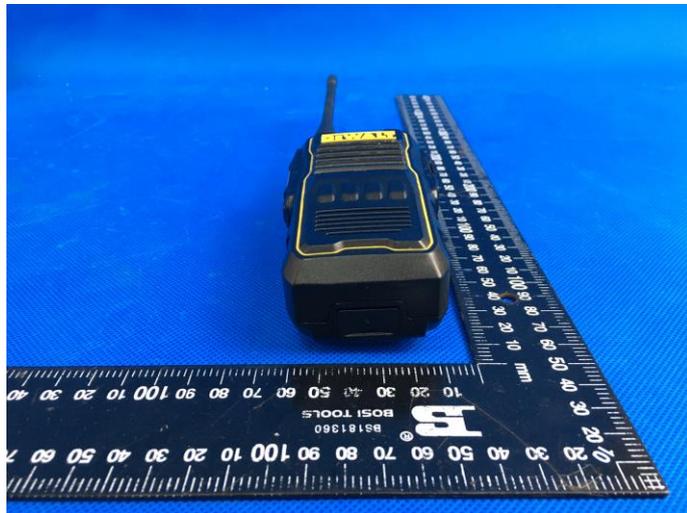

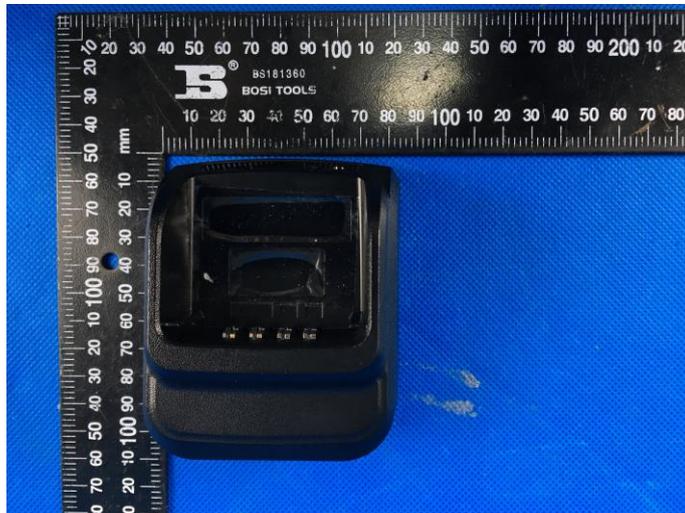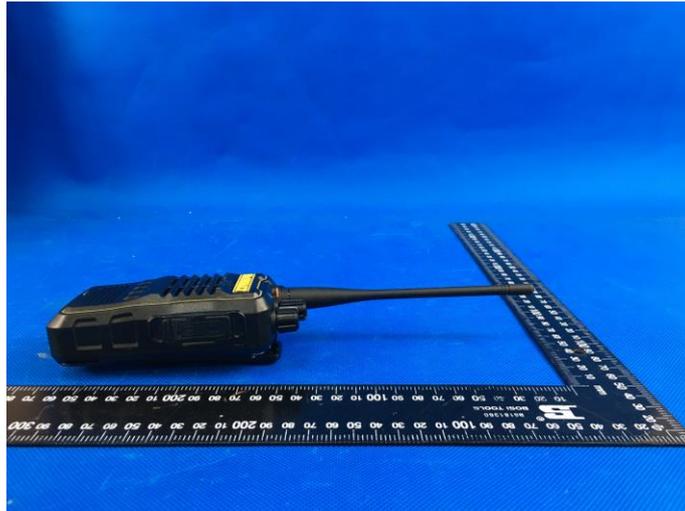

**DEWALT** MODEL NO: CH-DM500  
Desktop Charger

DATE CODE: **MYYWW**

**CAUTION:**  
RISK OF FIRE  
RISK OF ELECTRIC SHOCK  
DRY LOCATION USE ONLY

Input: 12V  $\equiv$  500mA / Output: 400mA

**⚠ WARNING: READ INSTRUCTION MANUAL**

**⚠ ATTENTION: LISEZ LE MANUEL D'INSTRUCTIONS**

**⚠ ADVERTENCIA: LEER EL MANUAL DE INSTRUCCIONES**

MADE IN CHINA



### Internal Photos of the EUT






**Li-ion rechargeable battery**  
Model: KB-75A  
Specification: 7.4V/2000mAh (14.8Wh)  
Manufacture date: YYYY-MM




 Warning: See Owner's Manual for all safety and operating instructions.



- LI-ION RECHARGEABLE BATTERY. DO NOT TRANSPORT PACKAGE IF DAMAGED. A FIRE HAZARD COULD EXIST.
- Do not disassemble, crush, deform, puncture, shred or incinerate the battery.
- Do not expose to fire or high temperature.
- Charge with dedicated charger only.
- Do not use the battery if swell or damage.
- Replace only the battery pack designated for this product.

Manufacturer: Kirisun Communication Co.Ltd.  
Made in China



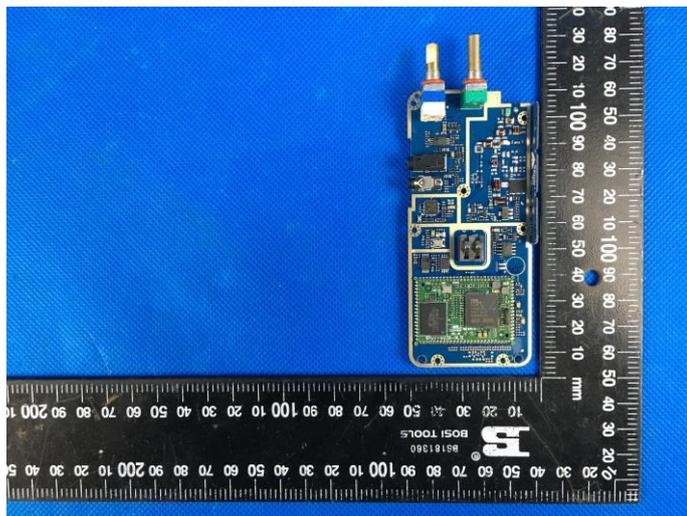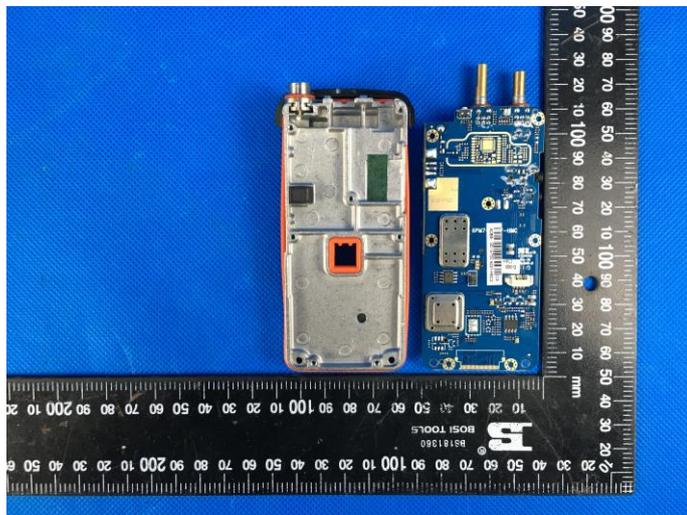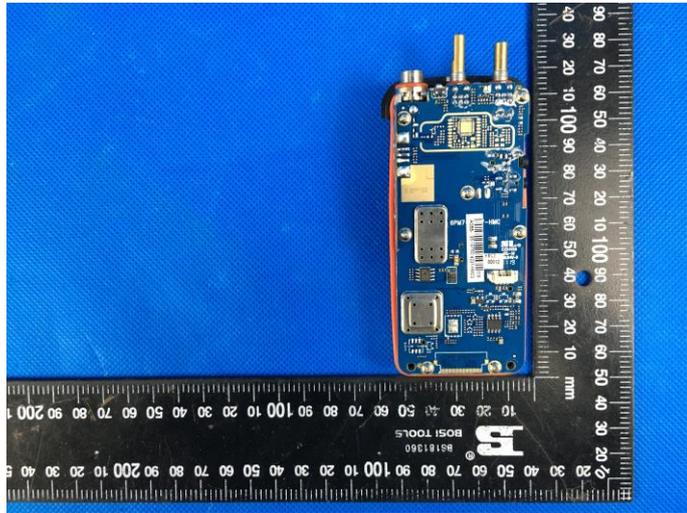

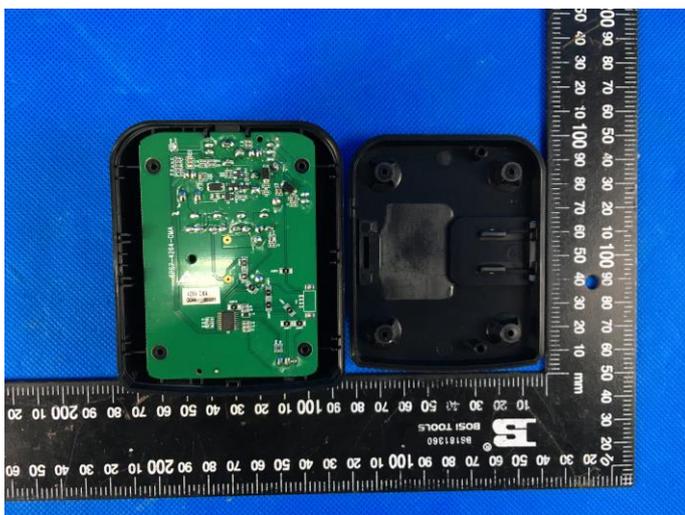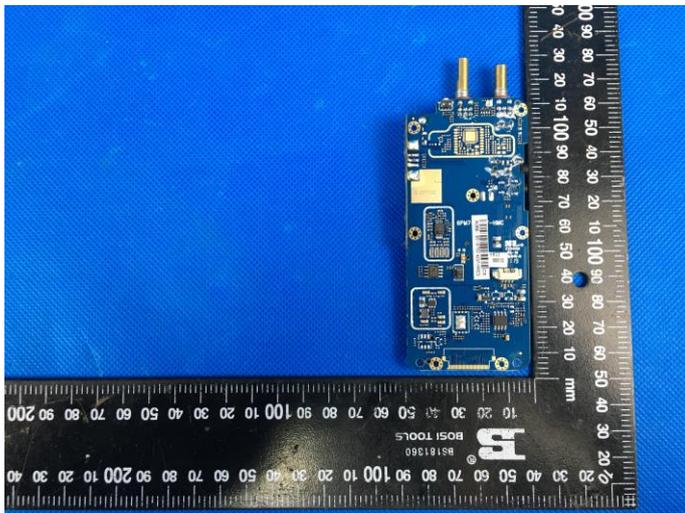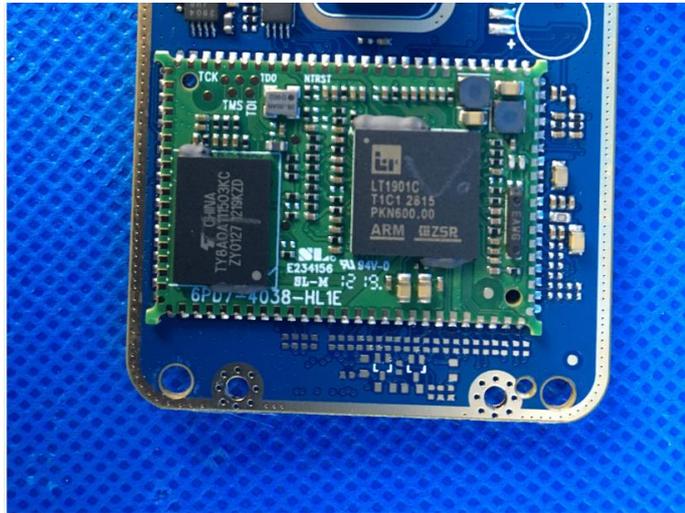

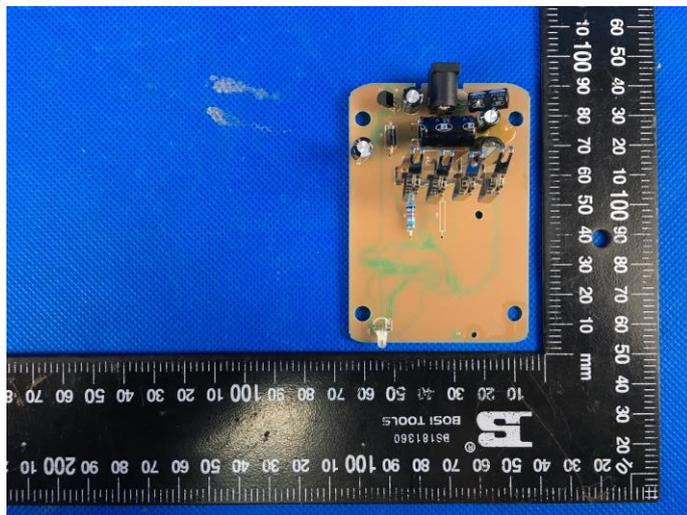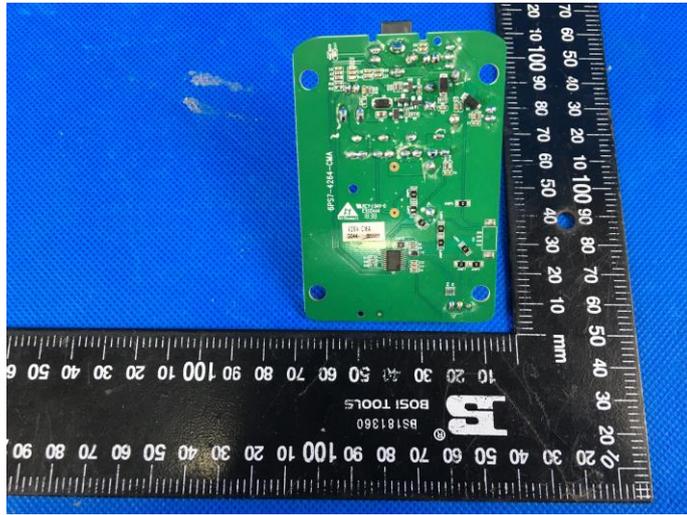

## 8 APPENDIX REPORT