

TEST REPORT

Product Name : LTE CAT1 ASSET GNSS TRACKER

Model Number : LL301, LL301L, LL301E

FCC ID : 2AMLFJM-LL301L

Prepared for : Shenzhen Jimi IoT Co., Ltd.
Address : 3-4/F, Block A, Building #7, Shenzhen International
Innovation Valley, Dashi 1st Road, Nanshan District,
Shenzhen, Guangdong, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280

Fax: (0755) 26954282

Report Number : ENS2109260016W00401R
Date(s) of Tests : Sept. 26, 2021 to December 1, 2021
Date of issue : December 1, 2021

Table of Contents

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	5
3	SUMMARY OF TEST RESULT	6
3.1	TEST ITEM.....	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	12
5.1	FACILITIES	12
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	12
6	TEST SYSTEM UNCERTAINTY	13
7	SETUP OF EQUIPMENT UNDER TEST	14
7.1	RADIO FREQUENCY TEST SETUP 1	14
7.2	RADIO FREQUENCY TEST SETUP 2	14
7.3	SUPPORT EQUIPMENT	16
8	TEST REQUIREMENTS	17
8.1	RF POWER OUTPUT	17
8.2	EFFECTIVE (ISOTROPIC) RADIATED POWER.....	18
8.3	MODULATION CHARACTERISTICS.....	31
8.4	OCCUPIED BANDWIDTH.....	32
8.5	BAND EDGE EMISSION	34
8.6	OUT OF BAND EMISSIONS AT ANTENNA TERMINALS	35
8.7	FIELD STRENGTH OF SPURIOUS RADIATION	36
8.8	FREQUENCY STABILITY	42
8.9	PEAK TO AVERAGE RATIO	43

1 TEST RESULT CERTIFICATION

Applicant:	Shenzhen Jimi IoT Co., Ltd. 3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Jimi IoT Co., Ltd. 3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China
Product Description:	LTE CAT1 ASSET GNSS TRACKER
Trademark:	JIMI
Model Number:	LL301, LL301L, LL301E (The product is the same, only the name is different. LL301 is the main model of the product, LL301L is sold to North America for model identification, LL301E is sold to Europe for model identification)


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 22, Subpart H FCC 47 CFR Part 24, Subpart E FCC 47 CFR Part 27	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.25 (2015) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, 22(H), 24(E), 27.

The test results of this report relate only to the tested sample identified in this report

Date of Test : Sept. 26, 2021 to December 1, 2021

Prepared by : 
Yu Xiaolan /Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager



Modified History

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2109260016W00401R	/	Original Report



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Device Type:	LTE CAT1 ASSET GNSS TRACKER
Operation Band:	LTE BAND2, LTE BAND4, LTE BAND5, LTE BAND7, LTE BAND66
Sample:	1#
Modulation:	QPSK, 16QAM
Operating Frequency Range(s):	FDD: TX 1850 to 1910MHz /RX 1930 to 1990MHz for LTE BAND2 TX 1710 to 1755MHz /RX 2110 to 2155MHz for LTE BAND4 TX 824 to 849MHz /RX 869 to 894MHz for LTE BAND5 TX 2500 to 2570MHz /RX 2620 to 2690MHz for LTE BAND7 TX 1710 to 1780MHz /RX 2110 to 2180MHz for LTE BAND66
Supported Channel Bandwidth:	LTE BAND2 <input type="checkbox"/> 1.4MHz, <input type="checkbox"/> 3MHz, <input type="checkbox"/> 5MHz, <input type="checkbox"/> 10MHz, <input type="checkbox"/> 15MHz, <input type="checkbox"/> 20MHz,
	LTE BAND4 <input type="checkbox"/> 1.4MHz, <input type="checkbox"/> 3MHz, <input type="checkbox"/> 5MHz, <input type="checkbox"/> 10MHz, <input type="checkbox"/> 15MHz, <input type="checkbox"/> 20MHz,
	LTE BAND5 <input type="checkbox"/> 1.4MHz, <input type="checkbox"/> 3MHz, <input type="checkbox"/> 5MHz, <input type="checkbox"/> 10MHz
	LTE BAND7 <input type="checkbox"/> 5MHz, <input type="checkbox"/> 10MHz, <input type="checkbox"/> 15MHz, <input type="checkbox"/> 20MHz
	LTE BAND66 <input type="checkbox"/> 1.4MHz, <input type="checkbox"/> 3MHz, <input type="checkbox"/> 5MHz, <input type="checkbox"/> 10MHz, <input type="checkbox"/> 15MHz, <input type="checkbox"/> 20MHz
TX and RX Antenna:	Ant1 (Main Antenna)-Support Transmit and Receive Ant2 (Slave Antenna)-Only Support Receive Remark: Ant2 cannot work independently, it only assists receiving function with the main antenna
EIRP:	BAND2: 24 dBm BAND4: 24 dBm BAND5: 24 dBm BAND7: 24 dBm BAND66: 24 dBm
Antenna Type:	External antenna
Antenna Gain:	-2.5 dBi for LTE BAND2 -2.5 dBi for LTE BAND4 -3 dBi for LTE BAND5 -2 dBi for LTE BAND7 -2.5 dBi for LTE BAND66
Power supply:	DC 3.7V from battery DC 5V from Adapter

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

3.1 TEST ITEM

FCC Rule	IC Rule	Test Parameter	Verdict	Remark
2.1046	RSS GEN 6.12	RF Power Output	PASS	
22.913, 24.232, 27.50, 90.635	RSS-130, 4.4 RSS-132, 5.4 RSS-133, 6.4 RSS-139, 6.5 RSS-195, 5.5 RSS-199, 4.4	Equivalent (Isotropic) Radiated Power	PASS	
2.1047	RSS-130, 4.1 RSS-132, 5.2 RSS-133, 6.2 RSS-139, 6.2 RSS-195, 5.3 RSS-199, 4.1	Modulation Characteristics	PASS	
2.1049	RSS-Gen, 6.6	Occupied Bandwidth	PASS	
2.1051, 22.917, 24.238, 27.53, 90.691	RSS-GEN 6.13 RSS-130, 4.5 RSS-132, 5.5 RSS-133, 6.5 RSS-139, 6.5 RSS-195, 5.6 RSS-199, 4.5	Out of Band Emissions at Antenna Terminals	PASS	
		Band Edge Emission	PASS	
2.1053, 22.917, 24.238, 27.53, 90.691	RSS-GEN 6.13 RSS-130, 4.5 RSS-132, 5.5 RSS-133, 6.5 RSS-139, 6.5 RSS-195, 5.6 RSS-199, 4.5	Field Strength of Spurious Radiation	PASS	
2.1055, 22.355, 24.235, 27.54, 90.213	RSS GEN 6.11 RSS-130, 4.3 RSS-132, 5.3 RSS-133, 6.3 RSS-139, 6.4 RSS-195, 5.4 RSS-199, 4.3	Frequency Stability versus Temperature	PASS	
		Frequency Stability versus Voltage	PASS	
24.232, 27.50	RSS-130, 4.4 RSS-132, 5.4 RSS-133, 6.4 RSS-139, 6.4 RSS-195, 5.5.1 RSS-199, 4.4	Peak to Average Ratio	PASS	
NOTE1: N/A (Not Applicable)				

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AMLFJM-LL301L filing to comply with FCC 47 CFR Part 2, 22(H), 24(E), 27, 90

The system is compliance with Subpart B is authorized under a DOC procedure

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 22H

FCC 47 CFR Part 24E

FCC 47 CFR Part 27

KDB971168 D01: v02r02

ANSI/TIA-603-D-2010, ANSI C63.26:2015

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	R & S	ESU 26	100154	2021/5/15
Pre-Amplifier	HP	8447D	2944A07999	2021/5/15
Bilog Antenna	Schwarzbeck	VULB9163	659	2021/8/22
Bilog Antenna	Schwarzbeck	VULB9163	661	2021/6/12
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2021/6/12
Horn Antenna	Schwarzbeck	BBHA 9170	9170-399	2021/6/12
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1177	2021/6/12
Cable	Schwarzbeck	AK9513	ACRX1	2021/5/15
Cable	Rosenberger	N/A	FP2RX2	2021/5/15
Cable	Schwarzbeck	AK9513	CRPX1	2021/5/15
Cable	Schwarzbeck	AK9513	CRRX2	2021/5/15
Cable	H+B	0.5M SF104-26.5	289147/4	2021/5/15
Cable	H+B	3M SF104-26.5	295838/4	2021/5/15
Cable	H+B	6M SF104-26.5	295840/4	2021/5/15

4.2.2 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2021/5/15
Power meter	\	PS-X10-100	\	2021/5/15
Power sensor	BOONTON	51011EMC	34236	2021/5/15
Spectrum Analyzer	Agilent	N9010A	My53470879	2021/5/16
Spectrum Analyzer	R & S	FSV30	103039	2021/5/15
Spectrum Analyzer	R & S	FSV40	100967	2021/5/15
Universal Radio Communication	R&S	CMW500	147366	2021/5/15
Power Splitter	Mini-Circuits	ZFRSC-183-S +	\	2021/5/15
Attenuator	EMTEST	100W 6dB DC-3G	\	2021/5/15
Temp. / Humidity Chamber	Kingson	THS-M1	242	2021/5/15

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

During all testing, EUT is in link mode with base station emulator at maximum power level.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

■ Test Mode and system config

Configure the CMW500 call box to support all LTE tests in respect to the 3GPP 36.521.

UE term. Conn: User defined Channels

Exp. Nominal Power Mode: According to UL Power Control Settings

RS EPRE: -75.0 dBm/15kHz Full Cell BW Power: -50.2 dBm

PSS Power Offset = SSS Power Offset = PBCH Power Offset = PCFICH Power Offset = PDCCH Power Offset = 0.0 dB

PHICH Power Offset = -12 dB

OCNG ON

PDSCH Power Offset PA: 0 dB, Power Ratio Index PB: 0 (rhoB/rhoA: 1)

Active TPC Setup: Max Power

Security Settings: Authentication OFF, NAS Security OFF, AS Security OFF

Integrity Algorithm: NULL

Milenage OFF

Configure the desired channel, BW, resource block allocation and modulation.

Connect to test set.

Set CMW500 TPC Setup to Max Power (Up power control command).

According to 3GPP 36.521, V9.1.0., the output power level for Power Class 3 LTE is to be 23.0dBm + 2.7dB. The lower limit is shifted down by the MPR amount allowed for certain configurations. Maximum Power Reduction (MPR) is allowed due to higher order modulation and transmit bandwidth configurations. These MPR levels reduce the lower limit of each output power by the either 1 or 2dB per 3GPP 36.521.

Modulation	Channel bandwidth / Transmission bandwidth configuration[RB]						MPR (dB)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

■ Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Ambient	VL	10.8V
	VN	12V
	VH	13.2V
NOTE: VL= Lower Extreme Test Voltage VN= Nominal Voltage VH= Upper Extreme Test Voltage TN= Normal Temperature		

■ Test Channel and Frequency

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE BAND2	1.4MHz	TX	Channel 18607	Mid CH 18900	High CH 19193
			1850.7 MHz	1880.0 MHz	1909.3 MHz
		RX	Channel 607	Channel 900	Channel 1193
			1930.7 MHz	1960 MHz	1989.3MHz
	3MHz	TX	Channel 18615	Channel 18900	Channel 19185
			1851.5MHz	1880.0MHz	1908.5MHz
		RX	Channel 615	Channel 900	Channel 1185
			1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel 1175
			1932.5 MHz	1960 MHz	1987.5 MHz
	10MHz	TX	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
	15MHz	TX	Channel 18675	Channel 18900	Channel 19125
			1857.5 MHz	1880 MHz	1902.5 MHz
		RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
	20MHz	TX	Channel 18700	Channel 18900	Channel 19100
			1860 MHz	1880 MHz	1900 MHz
		RX	Channel 700	Channel 900	Channel 1100
			1940 MHz	1960 MHz	1980 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE BAND4	1.4MHz	TX	Channel 19957	Channel 20175	Channel 20393
			1710.7 MHz	1732.5 MHz	1754.3 MHz
		RX	Channel 1957	Channel 2175	Channel 2393
			2110.7 MHz	2132.5MHz	2154.3 MHz
	3MHz	TX	Channel 19965	Channel 20175	Channel 20385
			1711.5 MHz	1732.5 MHz	1753.5 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2111.5 MHz	2132.5MHz	2153.5 MHz
	5MHz	TX	Channel 19975	Channel 20175	Channel 20375
			1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375

	10MHz	TX	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
	15MHz	TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
			Channel 2025	Channel 2175	Channel 2325
			2117.5 MHz	2132.5MHz	2147.5 MHz
		RX	Channel 20050	Channel 20175	Channel 20300
			1720 MHz	1732.5 MHz	1745 MHz
			Channel 2050	Channel 2175	Channel 2300
20MHz	RX	2120 MHz	2132.5MHz	2145 MHz	

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE BAND5	1.4MHz	TX	Channel 20407	Channel 20525	Channel 20643
			824.7 MHz	836.5 MHz	848.3 MHz
			Channel 8697	Channel 2525	Channel 2643
		RX	859.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
			825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	TX	Channel 2415	Channel 2525	Channel 2635
			870.5 MHz	881.5 MHz	892.5 MHz
			Channel 20425	Channel 20525	Channel 20625
		RX	826.5 MHz	836.5 MHz	846.5 MHz
			Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
	5MHz	TX	Channel 20450	Channel 20525	Channel 20600
			829 MHz	836.5 MHz	844 MHz
			Channel 2450	Channel 2525	Channel 2600
		RX	874 MHz	881.5 MHz	889 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE BAND7	5MHz	TX	Channel 20775	Channel 21100	Channel 21425
			2502.5 MHz	2535 MHz	2567.5 MHz
			Channel 2775	Channel 3100	Channel 3425
		RX	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
			2505 MHz	2535 MHz	2565 MHz
	10MHz	TX	Channel 2800	Channel 3100	Channel 3400
			2625 MHz	2655 MHz	2685MHz
			Channel 20825	Channel 21100	Channel21375
		RX	2507.5 MHz	2535 MHz	2562.5 MHz
			Channel2825	Channel 3100	Channel3375
			2627.5 MHz	2655 MHz	2682.5 MHz
	15MHz	TX	Channel 20850	Channel 3100	Channel 21350
			2510 MHz	2655 MHz	2560 MHz
			Channel 2850	Channel 3100	Channel 3350
		RX	2630 MHz	2655 MHz	2680 MHz

LTE BAND66					
Test Frequency	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Low Range	1.4	131979	1710.7	66443	2110.7
	3	131987	1711.5	66451	2111.5
	5	131997	1712.5	66461	2112.5
	10	132022	1715	66486	2115
	15	132047	1717.5	66511	2117.5
	20	132072	1720	66536	2120
Mid Range Tx	1.4/3/5/10/15/20	132322	1745	66786	2145
High Range	1.4	132665	1779.3	67129	2179.3
	3	132657	1778.5	67121	2178.5
	5	132647	1777.5	67111	2177.5
	10	132622	1775	67086	2175
	15	132597	1772.5	67061	2172.5
	20	132572	1770	67036	2170



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.26 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2018.11.30
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L2291

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA, August 25, 2020

The Certificate Registration Number is 4321.01

Accredited by Industry Canada, November 09, 2018

The Certificate Registration Number is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
RF Power Output	$\pm 1.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

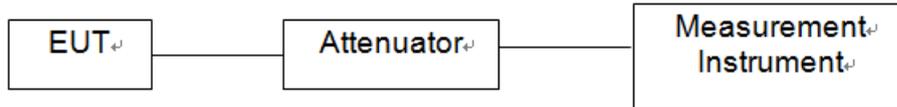

7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.26-2015 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

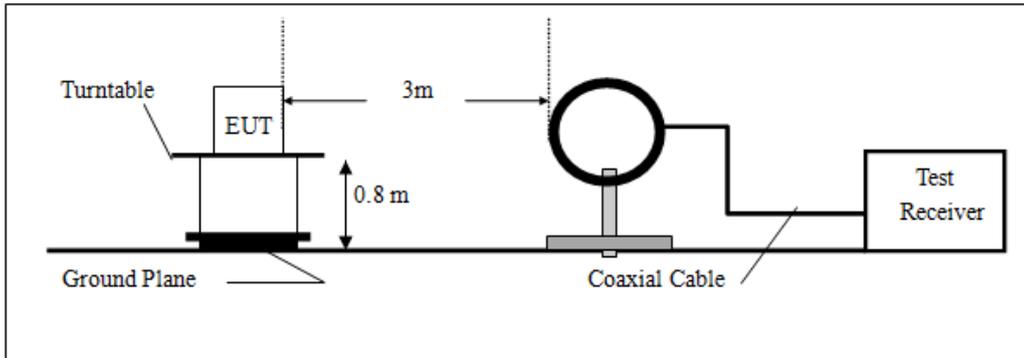

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

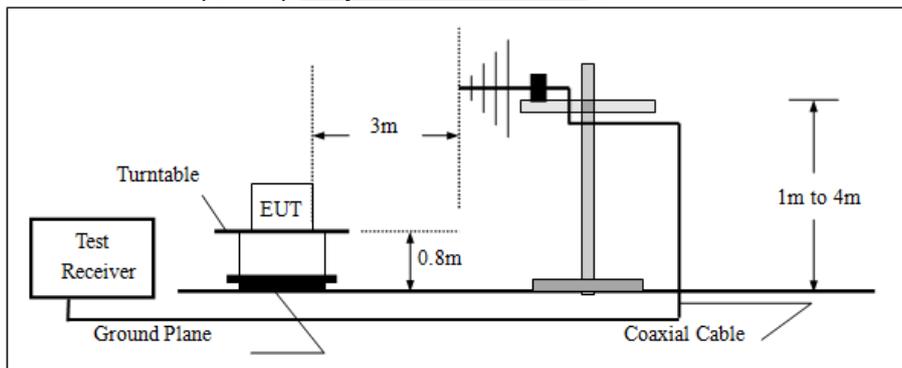

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

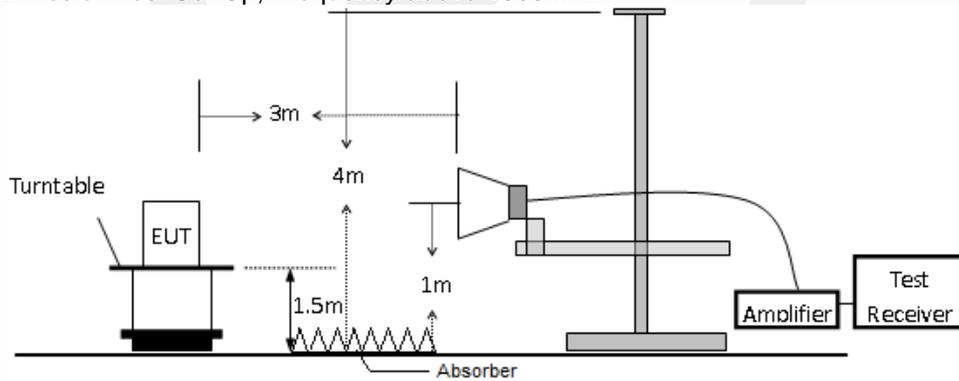

7.3 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



8 TEST REQUIREMENTS

8.1 RF POWER OUTPUT

8.1.1 Conformance Limit

No limit requirement.

8.1.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

8.1.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66

8.2 EFFECTIVE (ISOTROPIC) RADIATED POWER

8.2.1 Conformance Limit

LTE BAND2 (25)	FCC Part 24.232
Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.	
LTE BAND4	FCC Part 27.50
Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.	
LTE BAND12	FCC Part 27.50
Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.	

8.2.2 Test Configuration

Test according to clause 7.3 radio frequency test setup 3

8.2.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test

The instrument must have an available measurement/resolution bandwidth that is equal to or exceeds the OBW. If this capability is available, then the following procedure can be used to determine the total peak output power.

- Set the $RBW \geq OBW$.
- Set $VBW \geq 3 \times RBW$.
- Set $span \geq 2 \times RBW$
- Sweep time = auto couple.
- Detector = peak.
- Ensure that the number of measurement points $\geq span/RBW$.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the peak amplitude level.

The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Repeat above procedures until all frequency measured was complete.

A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

The EUT shall be replaced by a substitution antenna. The test setup refers to figure below. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the

input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antennapolarization.

A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole,

$$\text{ERP} = \text{EIRP} - 2.15\text{dBi}$$

8.2.4 Test Results

Pass

Band/BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH	
				18607	18900	19193	
				1850.7 MHz	1880.0 MHz	1909.3 MHz	
2/1.4	QPSK	1	0	22.14	22.52	21.58	
		1	2	21.93	22.04	21.52	
		1	5	21.04	21.39	20.77	
		3	0	22.10	22.34	21.55	
		3	1	22.02	22.30	21.48	
		3	3	21.91	21.59	21.57	
			6	0	20.56	20.91	20.29
	16QAM	1	0	21.05	21.43	20.56	
		1	2	20.72	21.09	20.36	
		1	5	19.92	20.41	19.70	
		3	0	20.91	21.13	20.43	
		3	1	21.04	21.19	20.42	
		3	3	20.75	20.42	20.39	
			6	0	19.59	19.92	19.28

Band/BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18615	18900	19185
				1851.5 MHz	1880.0 MHz	1908.5 MHz
2/3	QPSK	1	0	22.02	-17.54	21.56
		1	7	21.87	21.13	21.97
		1	14	20.19	-22.51	20.28
		8	0	22.17	20.94	22.00
		8	3	22.12	-22.44	21.99
		8	7	22.06	22.16	21.99
		15	0	20.40	20.85	20.62

16QAM	1	0	20.96	-23.22	20.60
	1	7	20.74	22.51	20.91
	1	14	19.04	-22.49	19.29
	8	0	21.13	-22.81	20.96
	8	3	21.12	21.99	21.03
	8	7	21.02	21.23	21.09
	15	0	19.46	20.00	19.64

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				1852.5 MHz	1880.0 MHz	1907.5 MHz
2/5	QPSK	1	0	21.33	21.90	21.32
		1	12	21.09	21.71	21.26
		1	24	20.91	21.97	21.36
		12	0	21.88	22.06	21.24
		12	6	21.63	21.93	21.31
		12	13	21.58	21.57	21.24
	16QAM	25	0	20.17	20.47	20.19
		1	0	20.44	20.92	20.28
		1	12	20.19	20.70	20.15
		1	24	20.09	21.14	20.35
		12	0	20.86	21.09	20.31
		12	6	20.86	21.05	20.34
		12	13	20.67	20.60	20.31
		25	0	19.20	19.61	19.25

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				1855.0 MHz	1880.0 MHz	1905.0 MHz
2/10	QPSK	1	0	21.91	21.67	21.07
		1	24	21.25	21.67	21.28
		1	49	21.16	21.50	21.30
		25	0	21.69	22.10	21.02
		25	12	21.58	22.00	20.97
		25	25	21.57	21.51	21.54
		50	0	20.20	20.59	20.14
	16QAM	1	0	21.06	20.68	20.10
		1	24	20.38	20.66	20.21
		1	49	20.83	20.42	20.30
		25	0	20.75	21.98	19.97
		25	12	20.58	21.00	19.94
		25	25	20.68	20.43	20.50
		50	0	19.21	19.62	19.15

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				1857.5 MHz	1880.0 MHz	1902.5 MHz
2/15	QPSK	1	0	22.08	21.71	21.31
		1	38	21.26	21.61	21.10
		1	74	21.15	21.50	21.39
		38	0	21.16	20.81	20.23
		38	18	20.52	20.66	20.17
		38	37	20.36	20.57	20.52
		75	0	20.20	20.52	20.13
	16QAM	1	0	21.23	20.77	20.31
		1	38	20.52	20.71	20.19
		1	74	20.48	20.70	20.58
		38	0	21.11	20.69	20.23
		38	18	20.43	20.75	20.11
		38	37	20.34	20.59	20.48
		75	0	19.20	19.55	19.14

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				1860.0 MHz	1880.0 MHz	1900.0 MHz
2/20	QPSK	1	0	21.27	21.59	21.65
		1	49	21.23	21.71	21.24
		1	99	21.34	21.24	21.39
		50	0	21.78	22.05	21.47
		50	25	21.82	22.01	21.42
		50	50	21.85	22.04	21.83
		100	0	21.59	21.85	21.46
	16QAM	1	0	20.29	20.61	20.65
		1	50	20.16	20.70	20.17
		1	99	20.33	20.27	20.43
		50	0	20.72	21.01	20.40
		50	25	20.79	20.99	20.40
		50	50	20.81	21.02	20.79
		100	0	20.63	20.83	20.53

Band/BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz
4/1.4	QPSK	1	0	21.49	21.71	21.73
		1	2	21.75	22.16	21.83
		1	5	20.99	21.43	22.41
		3	0	21.48	21.74	22.23
		3	1	21.36	21.84	22.18
		3	3	21.41	21.92	22.82
	16QAM	6	0	20.52	20.90	20.63
		1	0	20.46	20.72	20.65
		1	2	20.71	21.11	20.75
		1	5	20.02	20.40	21.29
		3	0	20.33	20.58	21.12
		3	1	20.33	20.68	21.21
		3	3	20.32	20.69	21.69
		6	0	20.35	19.89	19.54
Limit:				30		

Band/BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz
4/3	QPSK	1	0	21.50	21.93	21.50
		1	8	21.93	22.47	22.15
		1	14	20.50	20.98	21.67
		8	0	21.69	22.35	21.90
		8	4	21.61	22.30	21.88
		8	7	22.04	22.32	22.25
		15	0	20.66	21.09	20.80
	16QAM	1	0	20.43	20.98	20.57
		1	8	20.83	21.58	21.13
		1	14	19.34	20.08	20.58
		8	0	20.66	21.37	20.89
		8	4	20.76	21.37	20.91
		8	7	21.00	21.28	21.33
		15	0	19.71	20.13	19.87
Limit:				30		

Band/BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz
4/5	QPSK	1	0	21.64	21.90	22.07
		1	12	21.53	21.93	21.95
		1	24	21.02	20.99	22.81
		12	0	21.63	22.01	21.97
		12	6	21.57	21.99	21.89
		12	13	21.70	21.96	23.07
		25	0	20.47	20.95	20.98
	16QAM	1	0	20.84	20.91	21.33
		1	12	20.69	20.93	21.17
		1	24	20.38	20.00	21.97
		12	0	20.70	20.97	20.97
		12	6	20.67	20.99	21.11
		12	13	20.83	21.04	22.04
		25	0	19.56	20.03	19.98
Limit:		30				

Band/BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz
4/10	QPSK	1	0	21.59	21.86	22.12
		1	24	21.72	22.15	21.93
		1	49	21.30	21.32	22.17
		25	0	21.77	22.25	22.33
		25	12	21.72	22.24	22.37
		25	25	22.20	22.05	22.57
		50	0	20.76	21.06	20.86
	16QAM	1	0	20.62	20.88	21.11
		1	24	20.68	21.05	20.85
		1	49	20.29	20.32	21.19
		25	0	20.75	21.14	21.23
		25	12	20.75	21.25	21.37
		25	25	21.19	21.02	21.54
		50	0	19.80	20.04	19.91
Limit:		30				

Band/BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz
4/15	QPSK	1	0	21.80	21.48	22.18
		1	38	22.25	21.82	21.82
		1	74	22.19	21.50	22.22
		38	0	21.46	21.55	22.26
		38	19	21.64	21.82	21.80
		38	38	21.73	21.51	22.34
		75	0	20.85	20.94	20.94
	16QAM	1	0	20.80	20.46	21.22
		1	38	21.18	20.81	20.73
		1	74	21.23	20.47	21.26
		38	0	20.40	20.48	21.22
		38	19	20.62	20.82	20.82
		38	38	20.75	20.50	21.33
		75	0	19.92	19.93	20.00
Limit:				30		

Band/BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz
4/20	QPSK	1	0	22.05	22.11	22.52
		1	49	22.40	22.57	22.37
		1	99	22.17	21.77	22.92
		50	0	22.18	22.58	23.05
		50	25	22.10	22.52	23.03
		50	49	22.56	22.39	23.46
		100	0	21.28	21.11	21.07
	16QAM	1	0	21.06	21.11	21.58
		1	50	21.36	21.49	21.28
		1	99	21.17	20.76	21.95
		50	0	21.10	21.54	21.96
		50	25	21.08	21.54	21.98
		50	50	21.55	21.34	22.39
		100	0	20.30	20.15	20.08
Limit:				30		

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH (20525)	High CH 20643
				Frequency (824.7) MHz	Frequency (836.5)MHz	Frequency (848.3) MHz
5/1.4	QPSK	1	0	22.73	22.70	21.85
		1	2	22.72	22.56	22.53
		1	5	22.63	21.94	22.34
		3	0	22.54	22.62	22.52
		3	1	22.50	22.44	22.45
		3	3	22.48	22.36	22.74
		6	0	21.59	21.38	21.46
	16QAM	1	0	21.64	21.64	20.82
		1	2	21.77	21.48	21.40
		1	5	21.71	20.75	21.25
		3	0	21.42	21.42	21.40
		3	1	21.35	21.46	21.44
		3	3	21.32	21.22	21.61
		6	0	20.60	20.33	20.46

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH (20525)	High CH 20635
				Frequency (824.7) MHz	Frequency (836.5)MHz	Frequency (848.3) MHz
5/3	QPSK	1	0	22.55	22.70	21.72
		1	8	23.08	22.81	22.89
		1	14	22.32	21.24	22.37
		8	0	22.95	22.74	22.96
		8	4	22.85	22.71	22.91
		8	7	22.90	22.95	23.15
		15	0	21.74	21.58	21.61
	16QAM	1	0	21.56	21.51	20.84
		1	8	21.96	21.68	22.00
		1	14	21.27	20.13	21.60
		8	0	21.96	21.72	22.01
		8	4	21.94	21.86	22.02
		8	7	21.88	21.99	22.19
		15	0	20.74	20.64	20.77

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH (20525)	High CH 20625
				Frequency (824.7) MHz	Frequency (836.5)MHz	Frequency (848.3) MHz
5/5	QPSK	1	0	22.82	22.62	21.78
		1	12	22.65	22.40	22.60
		1	24	22.74	21.90	22.63
		12	0	22.65	22.57	22.54
		12	6	22.61	22.53	22.45
		12	13	22.67	22.41	22.72
		25	0	21.68	21.64	21.66
	16QAM	1	0	22.03	21.54	20.73
		1	12	21.72	21.45	21.49
		1	24	21.85	20.91	21.64
		12	0	21.72	21.58	21.49
		12	6	21.73	21.58	21.54
		12	13	21.78	21.46	21.78
		25	0	20.72	20.71	20.72

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH (20525)	High CH 20600
				Frequency (824.7) MHz	Frequency (836.5)MHz	Frequency (848.3) MHz
5/10	QPSK	1	0	22.45	22.76	21.61
		1	24	22.86	22.55	22.64
		1	49	22.97	21.73	22.61
		25	0	22.67	22.45	22.43
		25	12	22.71	22.36	22.35
		25	25	22.88	22.67	22.76
		50	0	21.78	21.70	21.61
	16QAM	1	0	21.48	21.81	20.63
		1	24	21.79	21.47	21.57
		1	49	22.01	20.73	21.64
		25	0	21.62	21.37	21.34
		25	12	21.70	21.37	21.34
		25	25	21.83	21.61	21.73
		50	0	20.79	20.71	20.66

Band/BW	Modulation	RB Size	RB Offset	Low CH 20775	Mid CH 21100	High CH 21425
				Frequency 2502.5 MHz	Frequency 2535 MHz	Frequency 2567.5 MHz
7/5	QPSK	1	0	21.03	21.26	20.31
		1	12	20.82	22.05	21.09
		1	24	20.86	20.87	19.86
		12	0	21.23	21.93	21.22
		12	6	21.29	21.85	21.11
		12	13	21.51	21.73	20.84
	16QAM	25	0	20.39	21.28	21.00
		1	0	19.94	20.60	20.51
		1	12	19.89	21.15	21.15
		1	24	20.07	20.84	20.10
		12	0	20.27	21.35	21.18
		12	6	20.52	21.30	21.17
		12	13	20.68	21.28	20.84
		25	0	19.47	20.52	20.54

Band/BW	Modulation	RB Size	RB Offset	Low CH 20800	Mid CH 21100	High CH 21400
				Frequency 2505 MHz	Frequency 2535 MHz	Frequency 2565 MHz
7/10	QPSK	1	0	21.33	21.03	20.44
		1	24	21.35	22.11	21.45
		1	49	20.85	20.59	19.84
		25	0	21.45	21.86	21.38
		25	12	21.51	21.88	21.32
		25	25	21.68	21.74	21.12
	16QAM	50	0	20.53	21.32	21.23
		1	0	19.76	20.03	20.48
		1	24	19.80	20.42	21.42
		1	49	19.57	20.04	19.89
		25	0	20.11	19.97	21.37
		25	12	20.00	20.27	21.35
		25	25	20.20	20.30	21.15
		50	0	19.17	20.05	21.25

Band/BW	Modulation	RB Size	RB Offset	Low CH 20825	Mid CH 21100	High CH 21375
				Frequency 2507.5 MHz	Frequency 2535 MHz	Frequency 2562.5 MHz
7/15	QPSK	1	0	20.88	20.91	20.91
		1	38	20.25	21.50	21.00
		1	74	20.39	21.27	20.05
		38	0	20.64	21.20	20.83
		38	18	19.99	21.72	20.86
		38	37	20.45	21.07	19.98
		75	0	19.34	20.84	20.97

	16QAM	1	0	20.01	20.03	20.88
		1	38	19.31	20.55	21.00
		1	74	19.49	20.37	20.10
		38	0	19.70	20.22	20.83
		38	18	19.08	20.80	20.91
		38	37	19.50	20.09	19.95
		75	0	18.50	19.98	19.90

Band/BW	Modulation	RB Size	RB Offset	Low CH 20850	Mid CH 21100	High CH 21350
				Frequency 2510 MHz	Frequency 2535 MHz	Frequency 2560 MHz
7/20	QPSK	1	0	20.89	21.46	20.91
		1	49	20.58	22.07	21.33
		1	99	20.68	20.92	19.92
		50	0	20.80	21.90	21.19
		50	25	20.94	21.78	21.11
		50	50	21.36	21.56	20.72
		100	0	19.76	20.94	20.92
	16QAM	1	0	19.97	20.55	19.97
		1	49	19.64	21.14	20.37
		1	99	19.71	19.99	19.04
		50	0	19.87	21.00	20.25
		50	25	20.01	20.90	20.21
		50	50	20.38	20.58	19.79
		100	0	18.82	19.91	19.98

Band/BW	Modulation	RB Size	RB Offset	Low CH (131979)	Mid CH (132322)	High CH (132665)
				Frequency (1710.7)MHz	Frequency (1745)MHz	Frequency (1779.3)MHz
66/1.4	QPSK	1	0	21.50	21.72	21.37
		1	2	21.60	21.83	21.47
		1	5	20.79	21.05	21.30
		3	0	21.33	21.85	21.22
		3	1	21.33	21.83	21.29
		3	3	21.12	21.56	21.91
		6	0	20.39	20.60	20.36
	16QAM	1	0	20.53	20.69	20.27
		1	2	20.61	20.90	20.45
		1	5	19.88	20.05	20.15
		3	0	20.11	20.71	20.23
		3	1	20.18	20.70	20.17
		3	3	19.88	20.35	20.80
		6	0	19.41	19.62	19.34

Band/BW	Modulation	RB Size	RB Offset	Low CH (131987)	Mid CH (132322)	High CH (132657)
				Frequency (1711.5)MHz	Frequency (1745)MHz	Frequency (1778.5)MHz
66/3	QPSK	1	0	-23.01	21.75	20.38
		1	8	21.86	22.25	21.86
		1	14	20.28	20.60	21.46
		8	0	21.60	22.08	21.64
		8	4	21.49	22.01	21.62
		8	7	21.84	22.32	21.58
		15	0	20.44	20.86	20.45
	16QAM	1	0	20.22	20.75	19.30
		1	8	20.78	21.24	20.73
		1	14	19.11	19.72	20.36
		8	0	20.51	21.06	20.59
		8	4	20.59	21.11	20.73
		8	7	20.88	21.34	20.61
		15	0	19.49	19.90	19.50

Band/BW	Modulation	RB Size	RB Offset	Low CH (131997)	Mid CH (132322)	High CH (132647)
				Frequency (1712.5)MHz	Frequency (1745)MHz	Frequency (1777.5)MHz
66/5	QPSK	1	0	21.03	21.86	20.39
		1	12	21.34	22.08	21.53
		1	24	20.82	20.98	21.78
		12	0	21.45	22.20	21.65
		12	6	21.43	22.12	21.58
		12	13	21.76	22.34	21.77
		25	0	20.61	21.11	20.61
	16QAM	1	0	20.28	20.84	19.53
		1	12	20.52	21.04	20.70
		1	24	20.02	19.83	21.00
		12	0	20.47	21.15	20.73
		12	6	20.62	21.12	20.88
		12	13	20.93	21.39	20.87
		25	0	19.77	20.14	19.67

Band/BW	Modulation	RB Size	RB Offset	Low CH (132022)	Mid CH (132322)	High CH (132622)
				Frequency (1715)MHz	Frequency (1745)MHz	Frequency (1775)MHz
66/10	QPSK	1	0	21.22	21.38	20.13
		1	24	21.12	21.79	21.42
		1	49	20.72	20.60	21.08
		25	0	21.42	21.81	21.44
		25	12	21.32	21.79	21.33
		25	25	21.30	22.25	21.37
		50	0	19.73	20.68	20.34
	16QAM	1	0	20.41	20.67	19.44
		1	24	20.27	21.05	20.71
		1	49	20.25	19.97	20.45

		25	0	20.66	21.05	20.67
		25	12	20.61	21.09	20.69
		25	25	20.42	21.53	20.61
		50	0	18.81	19.97	19.66

Band/BW	Modulation	RB Size	RB Offset	Low CH (132047)	Mid CH (132322)	High CH (132597)
				Frequency (1717.5)MHz	Frequency (1745)MHz	Frequency (1772.5)MHz
66/15	QPSK	1	0	21.10	21.50	21.04
		1	38	21.64	21.75	21.16
		1	74	21.52	20.91	21.11
		38	0	21.15	21.51	20.88
		38	18	21.67	21.70	21.05
		38	37	21.63	20.87	21.22
		75	0	20.89	20.66	20.31
	16QAM	1	0	20.41	20.78	20.34
		1	38	20.88	21.05	20.43
		1	74	20.90	20.19	20.45
		38	0	20.40	20.80	20.16
		38	18	20.97	21.05	20.37
		38	37	20.95	20.18	20.48
		75	0	20.27	20.00	19.65

Band/BW	Modulation	RB Size	RB Offset	Low CH (132072)	Mid CH (132422)	High CH (132572)
				Frequency (1720)MHz	Frequency (1745)MHz	Frequency (1770)MHz
66/20	QPSK	1	0	21.70	22.19	21.32
		1	49	22.09	22.09	21.20
		1	99	21.69	20.57	21.43
		50	0	22.03	22.46	21.88
		50	25	22.07	22.36	21.84
		50	50	22.05	23.19	21.69
		100	0	20.79	20.66	20.12
	16QAM	1	0	20.99	21.49	20.52
		1	49	21.33	21.32	20.38
		1	99	21.04	19.89	20.65
		50	0	21.29	21.75	21.04
		50	25	21.37	21.69	21.04
		50	50	21.37	22.47	20.85
		100	0	20.13	19.97	19.37

8.3 MODULATION CHARACTERISTICS

8.3.1 Conformance Limit

No specific modulation characteristics requirement limits.

8.3.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test, The frequency band is set as selected frequency, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. and 3GPP2 C.S0011/TIA-98-E for 1XRTT.and 3GPP2 C.S0033-0/tia-866 for Rel.0 and 3GPP2 C.S0033-A for Rev.A The waveform quality and constellation of the was tested.

8.3.4 Test Results

Pass

8.4 OCCUPIED BANDWIDTH

8.4.1 Conformance Limit

No specific modulation characteristics requirement limits.

8.4.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test,

■ 99% Occupied bandwidth

The following procedure shall be used for measuring (99 %) power bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) Set the detection mode to peak, and the trace mode to max hold..
- f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.
- h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

■ 26 dB Occupied bandwidth

The reference value is the highest level of the spectral envelope of the modulated signal.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target “-X dB down” requirement (i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-X dB down amplitude” as equal to (Reference Value – X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s)

8.4.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66



8.5 BAND EDGE EMISSION

8.5.1 Conformance Limit

LTE BAND2 (25)	FCC Part 24.238
≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	
LTE BAND4	FCC Part 27.53(h)
≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	
LTE BAND12	FCC Part 27.53(g)
≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	

8.5.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.5.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test,

Spectrum Analyzer is set as below:
SET RBW ≥ 1% of Emission BW.
SET VBW about three times of RBW
Detector: RMS
Trace mode= max hold.

8.5.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66

8.6 OUT OF BAND EMISSIONS AT ANTENNA TERMINALS

8.6.1 Conformance Limit

LTE BAND2 (25)	FCC Part 24.238
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	
LTE BAND4	FCC Part 27.53(h)
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	
LTE BAND12	FCC Part 27.53(g)
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

8.6.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.6.3 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer
Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test,

Spectrum Analyzer is set as below:

9kHz~150kHz, RBW = 1KHz, VBW $\geq 3 \times$ RBW,

150kHz~30MHz, RBW = 10KHz, VBW $\geq 3 \times$ RBW,

30MHz~1GHz, RBW = 100 kHz, VBW = 300 kHz. Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

Detector: Peak

Trace mode= max hold.

8.6.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66

8.7 FIELD STRENGTH OF SPURIOUS RADIATION

8.7.1 Conformance Limit

LTE BAND2 (25)	FCC Part 24.238
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	
LTE BAND4	FCC Part 27.53(h)
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	
LTE BAND12	FCC Part 27.53(g)
Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

8.7.2 Test Configuration

Test according to clause 7.3 radio frequency test setup 3

8.7.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

then the following procedure can be used to determine spurious emission

- RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for $f < 30$ MHz(150KHz to 30KHz)
- Set VBW $\geq 3 \times$ RBW.
- Set span wide enough to fully capture the emission being measured
- Sweep time = auto couple.
- Detector = peak.
- Ensure that the number of measurement points \geq span/RBW.
- Trace mode = max hold.
- Allow trace to fully stabilize.

- i) Use the peak marker function to determine the peak amplitude level.
- Step1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
- Step2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- Step3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- Step4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Step5. Make the measurement with the spectrum analyzer's RBW , VBW , taking the record of maximum spurious emission.
- Step6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- Step7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- Step8. Taking the record of output power at antenna port.
- Step9. Repeat step 7 to step 8 for another polarization.
- Step10. Emission level (dBm) = output power + substitution Gain. Test Results

8.7.4 Test Results

Pass

All modes have been tested, and the worst result was report as below:

For LTE BAND2 link

- Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	23.7℃	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND2		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

- Spurious Emission Above 30MHz (30MHz to 10th harmonics)

Temperature:	23.7℃	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND2		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
216.0240	V	1.4 MHz	RB1#0	-76.04	-13.00	-63.04	Pass
2499.893	V	1.4 MHz	RB1#0	-49.10	-13.00	-36.10	Pass
4482.150	V	1.4 MHz	RB1#0	-48.15	-13.00	-35.15	Pass
10215.01	V	1.4 MHz	RB1#0	-40.36	-13.00	-27.36	Pass
12184.58	V	1.4 MHz	RB1#0	-38.98	-13.00	-25.98	Pass
18000	V	1.4 MHz	RB1#0	-32.44	-13.00	-19.44	Pass
304.6100	H	1.4 MHz	RB1#0	-79.06	-13.00	-66.06	Pass

4495.124	H	1.4 MHz	RB1#0	-46.89	-13.00	-33.89	Pass
9073.460	H	1.4 MHz	RB1#0	-42.33	-13.00	-29.33	Pass
11533.48	H	1.4 MHz	RB1#0	-39.18	-13.00	-26.18	Pass
13957.52	H	1.4 MHz	RB1#0	-38.52	-13.00	-25.52	Pass
18000	H	1.4 MHz	RB1#0	-32.12	-13.00	-19.12	Pass

Note: (1) Emission Level= Reading Level+ Correct Factor +Cable Loss.

(2) Correct Factor= Ant_F + Cab_L - Preamp

(3))The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

For LTE BAND4 link

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	23.7°C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND4		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission Above 30MHz (30MHz to 10th harmonics)

Temperature:	23.7°C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND4		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
377.2591	V	1.4 MHz	RB1#0	-78.23	-13.00	-65.23	Pass
4495.124	V	1.4 MHz	RB1#0	-48.65	-13.00	-35.65	Pass
5104.741	V	1.4 MHz	RB1#0	-43.53	-13.00	-30.53	Pass
8392.291	V	1.4 MHz	RB1#0	-41.86	-13.00	-28.86	Pass
10822.92	V	1.4 MHz	RB1#0	-39.80	-13.00	-26.80	Pass
18000	V	1.4 MHz	RB1#0	-32.12	-13.00	-19.12	Pass
390.7226	H	1.4 MHz	RB1#0	-77.58	-13.00	-64.58	Pass
4495.124	H	1.4 MHz	RB1#0	-46.96	-13.00	-33.96	Pass
7117.542	H	1.4 MHz	RB1#0	-46.43	-13.00	-33.43	Pass
8392.292	H	1.4 MHz	RB1#0	-41.86	-13.00	-28.86	Pass
12255.22	H	1.4 MHz	RB1#0	-38.62	-13.00	-25.62	Pass
18000	H	1.4 MHz	RB1#0	-32.12	-13.00	-19.12	Pass

Note: (1) Emission Level= Reading Level+ Correct Factor +Cable Loss.

(2) Correct Factor= Ant_F + Cab_L - Preamp

(3))The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

For LTE BAND5 link
■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND5		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission Above 30MHz (30MHz to 10th harmonics)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND5		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
216.0240	V	1.4 MHz	RB1#0	-75.86	-13.00	-62.86	Pass
4482.150	V	1.4 MHz	RB1#0	-48.47	-13.00	-35.47	Pass
8392.292	V	1.4 MHz	RB1#0	-42.68	-13.00	-29.68	Pass
11533.48	V	1.4 MHz	RB1#0	-38.96	-13.00	-25.96	Pass
14284.02	V	1.4 MHz	RB1#0	-36.98	-13.00	-23.98	Pass
17948.04	V	1.4 MHz	RB1#0	-32.21	-13.00	-19.21	Pass
265.6757	H	1.4 MHz	RB1#0	-79.81	-13.00	-66.81	Pass
2499.893	H	1.4 MHz	RB1#0	-46.94	-13.00	-33.94	Pass
4495.124	H	1.4 MHz	RB1#0	-46.79	-13.00	-33.79	Pass
9585.684	H	1.4 MHz	RB1#0	-41.07	-13.00	-28.07	Pass
11500.19	H	1.4 MHz	RB1#0	-38.31	-13.00	-25.31	Pass
18000	H	1.4 MHz	RB1#0	-32.12	-13.00	-19.12	Pass

Note: (1) Emission Level= Reading Level+ Correct Factor +Cable Loss.

(2) Correct Factor= Ant_F + Cab_L - Preamp

(3))The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

For LTE BAND7 link
■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND7		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission Above 30MHz (30MHz to 10th harmonics)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND7		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
216.0240	V	1.4 MHz	RB1#0	-75.42	-13.00	-62.42	Pass
4482.150	V	1.4 MHz	RB1#0	-47.18	-13.00	-34.18	Pass
7829.860	V	1.4 MHz	RB1#0	-42.32	-13.00	-29.32	Pass
11600.35	V	1.4 MHz	RB1#0	-38.12	-13.00	-25.12	Pass
14960.12	V	1.4 MHz	RB1#0	-37.58	-13.00	-24.58	Pass
17844.59	V	1.4 MHz	RB1#0	-31.92	-13.00	-18.92	Pass
338.4001	H	1.4 MHz	RB1#0	-78.06	-13.00	-65.06	Pass
4482.150	H	1.4 MHz	RB1#0	-47.60	-13.00	-34.60	Pass
7852.524	H	1.4 MHz	RB1#0	-42.77	-13.00	-29.77	Pass
9809.916	H	1.4 MHz	RB1#0	-40.96	-13.00	-27.96	Pass
14325.37	H	1.4 MHz	RB1#0	-38.12	-13.00	-25.12	Pass
18000	H	1.4 MHz	RB1#0	-32.67	-13.00	-19.67	Pass

Note: (1) Emission Level= Reading Level+ Correct Factor +Cable Loss.

(2) Correct Factor= Ant_F + Cab_L - Preamp

(3))The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

For LTE BAND 66 link
■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND66		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission Above 30MHz (30MHz to 10th harmonics)

Temperature:	23.7 °C	Test By:	XW
Humidity:	61 %	Test Mode:	QPSK/ Middle Channel
Test Band:	LTE BAND66		

Freq. (MHz)	H/V	Bandwidth (MHz)	Test RB	Emission Level(dBm)	Limit (dBm)	Margin (dBm)	Verdict
216.0240	V	1.4 MHz	RB1#0	-75.46	-13.00	-62.46	Pass
2694.998	V	1.4 MHz	RB1#0	-44.80	-13.00	-31.80	Pass
4482.150	V	1.4 MHz	RB1#0	-48.14	-13.00	-35.14	Pass
11600.35	V	1.4 MHz	RB1#0	-38.69	-13.00	-25.69	Pass
14366.84	V	1.4 MHz	RB1#0	-38.22	-13.00	-25.22	Pass
17793.09	V	1.4 MHz	RB1#0	-33.01	-13.00	-20.01	Pass
364.2595	H	1.4 MHz	RB1#0	-77.97	-13.00	-64.97	Pass
4482.150	H	1.4 MHz	RB1#0	-47.13	-13.00	-34.13	Pass
6267.553	H	1.4 MHz	RB1#0	-49.63	-13.00	-36.63	Pass
8392.292	H	1.4 MHz	RB1#0	-42.14	-13.00	-29.14	Pass
11467.00	H	1.4 MHz	RB1#0	-39.20	-13.00	-26.20	Pass
18000	H	1.4 MHz	RB1#0	-32.45	-13.00	-19.45	Pass

Note: (1) Emission Level= Reading Level+ Correct Factor +Cable Loss.

(2) Correct Factor= Ant_F + Cab_L - Preamp

(3))The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8.8 FREQUENCY STABILITY

8.8.1 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

8.8.2 Test Configuration

Test according to clause 7.2 conducted emission test setup2.

8.8.3 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 95 to 105 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

8.8.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66

8.9 PEAK TO AVERAGE RATIO

8.9.1 Conformance Limit

LTE BAND4	FCC Part 27.50
Equipment employed must be authorized in accordance with the provisions of §24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

8.9.2 Test Configuration

Test according to clause 7.1 conducted emission test setup1.

8.9.3 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

8.9.4 Test Results

Pass

Note: The details please see Appendix BAND2, Appendix BAND4, Appendix BAND5, Appendix BAND7, Appendix BAND66

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

*** End of Report ***