

FCC Test Report

Report No.: AGC00484220202FE03

FCC ID : RBD-PSE0540

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Portable Conference Microphone

BRAND NAME : PHILIPS

MODEL NAME : PSE0540

APPLICANT: Shenzhen Jingwah Information Technology Co., Ltd.

DATE OF ISSUE : Apr. 07, 2022

STANDARD(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Martiance (Shenzhen) Co., Ltd





Report No.: AGC00484220202FE03

Page 2 of 69

REPORT REVISE RECORD

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | Apr. 07, 2022 | Valid | Initial Release |




TABLE OF CONTENTS

| 1. VERIFICATION OF CONFORMITY | |
|---|----|
| 2. GENERAL INFORMATION | 6 |
| 2.1. PRODUCT DESCRIPTION | 6 |
| 2.2. TABLE OF CARRIER FREQUENCYS | 6 |
| 2.3. RECEIVER INPUT BANDWIDTH | 7 |
| 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE | 7 |
| 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR | 7 |
| 2.6. RELATED SUBMITTAL(S) / GRANT (S) | 8 |
| 2.7. TEST METHODOLOGY | 8 |
| 2.8. SPECIAL ACCESSORIES | 8 |
| 2.9. EQUIPMENT MODIFICATIONS | 8 |
| 2.10. ANTENNA REQUIREMENT | 8 |
| 3. MEASUREMENT UNCERTAINTY | 9 |
| 4. DESCRIPTION OF TEST MODES | 10 |
| 5. SYSTEM TEST CONFIGURATION | 11 |
| 5.1. CONFIGURATION OF EUT SYSTEM | 11 |
| 5.2. EQUIPMENT USED IN TESTED SYSTEM | 11 |
| 5.3. SUMMARY OF TEST RESULTS | 11 |
| 6. TEST FACILITY | 12 |
| 7. PEAK OUTPUT POWER | 13 |
| 7.1. MEASUREMENT PROCEDURE | 13 |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 13 |
| 7.3. LIMITS AND MEASUREMENT RESULT | 14 |
| 8. 20DB BANDWIDTH | 19 |
| 8.1. MEASUREMENT PROCEDURE | 19 |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 19 |
| 8.3. LIMITS AND MEASUREMENT RESULTS | 20 |
| 9. CONDUCTED SPURIOUS EMISSION | 25 |
| 9.1. MEASUREMENT PROCEDURE | 25 |



| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 25 |
|---|----|
| 9.3. MEASUREMENT EQUIPMENT USED | 25 |
| 9.4. LIMITS AND MEASUREMENT RESULT | 25 |
| 10. RADIATED EMISSION | 46 |
| 10.1. MEASUREMENT PROCEDURE | 46 |
| 10.2. TEST SETUP | |
| 10.3. LIMITS AND MEASUREMENT RESULT | 49 |
| 10.4. TEST RESULT | 49 |
| 11. NUMBER OF HOPPING FREQUENCY | 59 |
| 11.1. MEASUREMENT PROCEDURE | 59 |
| 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) | 59 |
| 11.3. MEASUREMENT EQUIPMENT USED | |
| 11.4. LIMITS AND MEASUREMENT RESULT | 59 |
| 12. TIME OF OCCUPANCY (DWELL TIME) | 60 |
| 12.1. MEASUREMENT PROCEDURE | 60 |
| 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) | 60 |
| 12.3. MEASUREMENT EQUIPMENT USED | 60 |
| 12.4. LIMITS AND MEASUREMENT RESULT | 60 |
| 13. FREQUENCY SEPARATION | 64 |
| 13.1. MEASUREMENT PROCEDURE | 64 |
| 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) | 64 |
| 13.3. MEASUREMENT EQUIPMENT USED | 64 |
| 13.4. LIMITS AND MEASUREMENT RESULT | 64 |
| 14. LINE CONDUCTED EMISSION TEST | 65 |
| 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST | 65 |
| 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST | |
| 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST | 66 |
| 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST | |
| 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST | |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP | 69 |
| APPENDIX B: PHOTOGRAPHS OF EUT | 69 |





1. VERIFICATION OF CONFORMITY

| Applicant | Shenzhen Jingwah Information Technology Co., Ltd. |
|--------------------------|---|
| Address | 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei, Futian District, Shenzhen, Guangdong, China |
| Manufacturer | Shenzhen Jingwah Information Technology Co., Ltd. |
| Address | 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei, Futian District, Shenzhen, Guangdong, China |
| Factory | Shenzhen Jingwah Information Technology Co., Ltd. |
| Address | 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei, Futian District, Shenzhen, Guangdong, China |
| Product Designation | Portable Conference Microphone |
| Brand Name | PHILIPS |
| Test Model | PSE0540 |
| Date of test | Feb. 24, 2022 to Mar. 30, 2022 |
| Deviation | No any deviation from the test method |
| Condition of Test Sample | Normal |
| Test Result | Pass |
| Report Template | AGCRT-US-BR/RF |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

| Prepared By | John Zeng | | |
|-------------|-----------------------------------|---------------|--|
| | John Zeng (Project Engineer) | Apr. 07, 2022 | |
| Reviewed By | Calin Lin | | |
| | Calvin Liu (Reviewer) | Apr. 07, 2022 | |
| Approved By | Max Zhang | | |
| | Max Zhang (Authorized Officer) | Apr. 07, 2022 | |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC00484220202FE03 Page 6 of 69

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Portable Conference Microphone". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

| A major technical description of EOT is described as following | | |
|--|---|--|
| Operation Frequency | 2.402GHz to 2.480GHz | |
| RF Output Power | -0.048dBm (Max) | |
| Bluetooth Version | V5.0 | |
| Modulation | BR⊠GFSK, EDR⊠π /4-DQPSK, ⊠8DPSK BLE□GFSK 1Mbps □GFSK 2Mbps | |
| Number of channels | 79 Channels | |
| Hardware Version | V1.0 | |
| Software Version | V1.0 | |
| Antenna Designation | FPC Antenna (Comply with requirements of the FCC part 15.203) | |
| Antenna Gain | 2dBi | |
| Power Supply | DC 7.4V by battery or DC 12V by adapter | |

2.2. TABLE OF CARRIER FREQUENCYS

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| | 0 | 2402 MHz |
| | 1 | 2403 MHz |
| | : | : |
| | 38 | 2440 MHz |
| 2402~2480MHz | 39 | 2441 MHz |
| | 40 | 2442 MHz |
| | : | : |
| | 77 | 2479 MHz |
| | 78 | 2480 MHz |



Report No.: AGC00484220202FE03 Page 7 of 69

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:


- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD ADDRESS. The BD ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.





The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: RBD-PSE0540** filing to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Report No.: AGC00484220202FE03

Page 9 of 69

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Item | Measurement Uncertainty |
|---|----------------------------|
| Uncertainty of Conducted Emission for AC Port | $U_c = \pm 2.9 \text{ dB}$ |
| Uncertainty of Radiated Emission below 1GHz | $U_c = \pm 3.8 \text{ dB}$ |
| Uncertainty of Radiated Emission above 1GHz | $U_c = \pm 4.4 \text{ dB}$ |
| Uncertainty of total RF power, conducted | $U_c = \pm 0.8 \text{ dB}$ |
| Uncertainty of RF power density, conducted | $U_c = \pm 2.6 \text{ dB}$ |
| Uncertainty of spurious emissions, conducted | U _c = ±2 % |
| Uncertainty of Occupied Channel Bandwidth | $U_c = \pm 2 \%$ |




4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION | |
|-----|--------------------------|--|
| 1 | Low channel GFSK | |
| 2 | Middle channel GFSK | |
| 3 | High channel GFSK | |
| 4 | Low channel π/4-DQPSK | |
| 5 | Middle channel π/4-DQPSK | |
| 6 | High channel π/4-DQPSK | |
| 7 | Low channel 8DPSK | |
| 8 | Middle channel 8DPSK | |
| 9 | High channel 8DPSK | |
| 10 | Hopping mode GFSK | |
| 11 | Hopping mode π/4-DQPSK | |
| 12 | Hopping mode 8DPSK | |

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

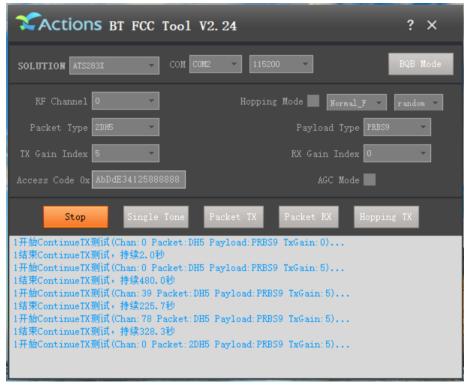

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC00484220202FE03

Page 11 of 69


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:




5.2. EQUIPMENT USED IN TESTED SYSTEM

| Item | Equipment | Model No. | ID or Specification | Remark |
|------|-----------------------------------|---------------|--|-----------|
| 1 | Portable Conference Microphone | PSE0540 | RBD-PSE0540 | EUT |
| 2 | Control Box | USB-TTL | N/A | AE |
| 3 | Charger line | N/A | 1.8m unshielded | Accessory |
| 4 | Type-C | N/A | 3.0m shielded | Accessory |
| 5 | Adapter | RJT-AS120 250 | Input: AC 100-240V 50/60Hz, 1.0A Output: DC 12.0V, 2.5A | Accessory |

5.3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|--------------------|-----------------------------|-----------|
| 15.247 (b)(1) | Peak Output Power | Compliant |
| 15.247 (a)(1) | 20 dB Bandwidth | Compliant |
| 15.247 (d) | Conducted Spurious Emission | Compliant |
| 15.209 | Radiated Emission | Compliant |
| 15.247 (a)(1)(iii) | Number of Hopping Frequency | Compliant |
| 15.247 (a)(1)(iii) | Time of Occupancy | Compliant |
| 15.247 (a)(1) | Frequency Separation | Compliant |
| 15.207 | Conducted Emission | Compliant |





6. TEST FACILITY


| Test Site | Attestation of Global Compliance (Shenzhen) Co., Ltd |
|--------------------------------------|--|
| Location | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number | CN1259 |
| FCC Test Firm Registration Number | 975832 |
| A2LA Cert. No. | 5054.02 |
| Description | Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA |

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|--------------------------|--------------|-----------------------------|--------|---------------|---------------|
| Test Receiver | R&S | ESPI | 101206 | May.11, 2021 | May.10, 2022 |
| Artificial power network | R&S | ESH2-Z5 | 100086 | Jun. 09, 2021 | Jun. 08, 2022 |
| Test Software | FARA | EZ-EMC(Ver. AGC-CON03A1) | N/A | N/A | N/A |

TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|--------------------------------------|----------------|------------------------|------------------|---------------|---------------|
| Test Receiver | R&S | ESCI | 10096 | Apr. 14, 2021 | Apr. 13, 2022 |
| EXA Signal Analyzer | Aglient | N9010A | MY53470504 | Nov. 17, 2021 | Nov. 16, 2022 |
| 2.4GHz Filter | EM Electronics | N/A | N/A | Mar. 23, 2020 | Mar. 22, 2022 |
| 2.4GHz Filter | EM Electronics | N/A | N/A | Mar. 18, 2022 | Mar. 19, 2024 |
| Attenuator | ZHINAN | E-002 | N/A | Sep. 03, 2020 | Sep. 02, 2022 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | 768 | Oct. 31, 2021 | Oct. 30, 2023 |
| Active loop antenna (9K-30MHz) | ZHINAN | ZN30900C | 18051 | May 22, 2020 | May 21, 2022 |
| preamplifier | ChengYi | EMC184045SE | 980508 | Oct. 29, 2021 | Oct. 28, 2023 |
| Double-Ridged Waveguide Horn | ETS LINDGREN | 3117 | 00154520 | Sep. 06, 2021 | Sep. 05, 2023 |
| Preamplifier Assembly | ETS LINDGREN | 3117PA | 00225134 | Sep. 03, 2020 | Sep. 02, 2022 |
| Wideband Antenna | SCHWARZBECK | VULB9168 | VULB9168-49 4 | Jan. 08, 2021 | Jan. 07, 2023 |
| Test Software | FARA | EZ-EMC(Ver.RA-0 3A) | N/A | N/A | N/A |





7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

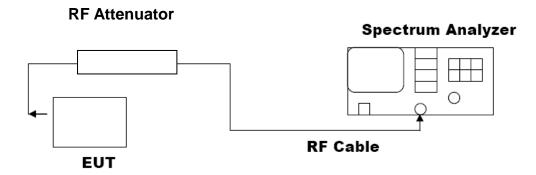




7.3. LIMITS AND MEASUREMENT RESULT

| Test Data of Conducted Output Power | | | | | |
|-------------------------------------|-----------------------|---------------------|-----------------|--------------|--|
| Test Mode | Test Channel (MHz) | Peak Power (dBm) | Limits (dBm) | Pass or Fail | |
| | 2402 | -0.419 | \$21 | Pass | |
| GFSK | 2441 | -0.079 | ⊴ 21 | Pass | |
| | 2480 | -0.213 | 21 | Pass | |
| π /4-DQPSK | 2402 | -0.521 | \$21 | Pass | |
| | 2441 | -0.125 | ⊴ 21 | Pass | |
| | 2480 | -0.282 | 21 | Pass | |
| | 2402 | -0.435 | 21 | Pass | |
| 8DPSK | 2441 | -0.048 | ⊴ 21 | Pass | |
| | 2480 | -0.203 | \$21 | Pass | |

Test Graphs of Conducted Output Power

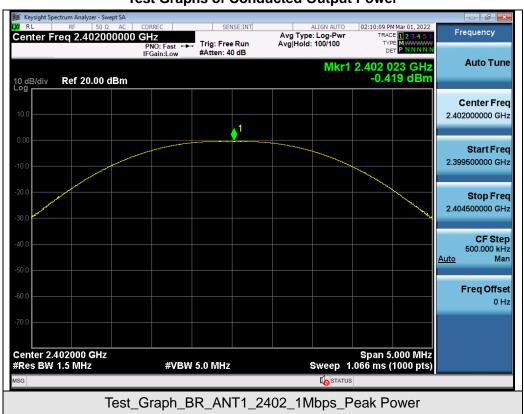


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.









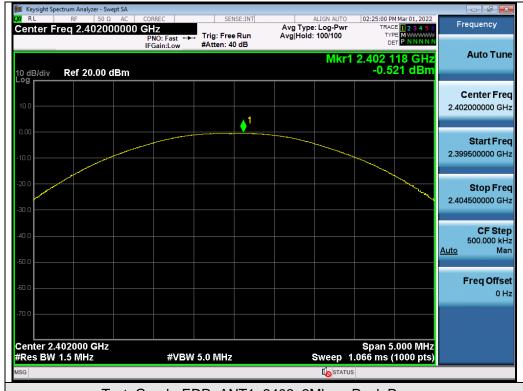













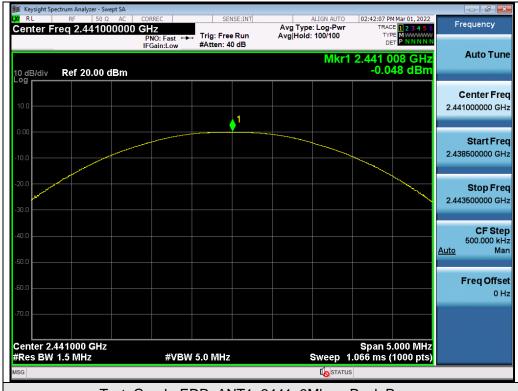









8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

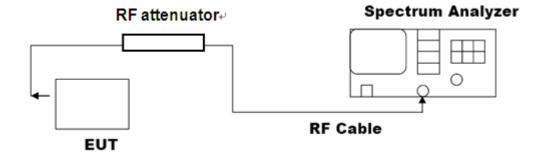






8.3. LIMITS AND MEASUREMENT RESULTS


| Test Data of Occupied Bandwidth and -20dB Bandwidth | | | | | |
|---|-----------------------|---------------------------------|--------------------------|--------|--------------|
| Test Mode | Test Channel (MHz) | 99% Occupied Bandwidth (MHz) | -20dB Bandwidth (MHz) | Limits | Pass or Fail |
| | 2402 | 0.863 | 0.938 | N/A | Pass |
| GFSK | 2441 | 0.850 | 0.941 | N/A | Pass |
| | 2480 | 0.849 | 0.937 | N/A | Pass |
| | 2402 | 1.164 | 1.263 | N/A | Pass |
| π /4-DQPSK | 2441 | 1.163 | 1.267 | N/A | Pass |
| | 2480 | 1.163 | 1.268 | N/A | Pass |
| 8DPSK | 2402 | 1.152 | 1.243 | N/A | Pass |
| | 2441 | 1.153 | 1.244 | N/A | Pass |
| | 2480 | 1.151 | 1.243 | N/A | Pass |

Test Graphs of Occupied Bandwidth and -20 Bandwidth

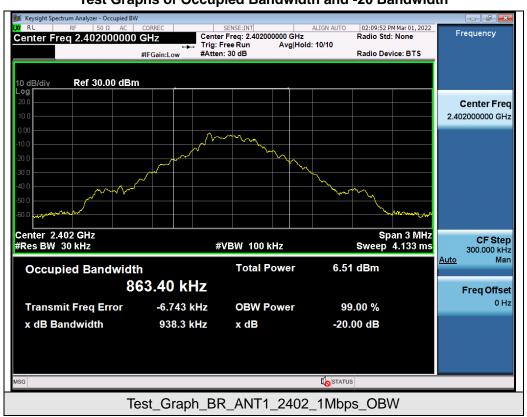


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



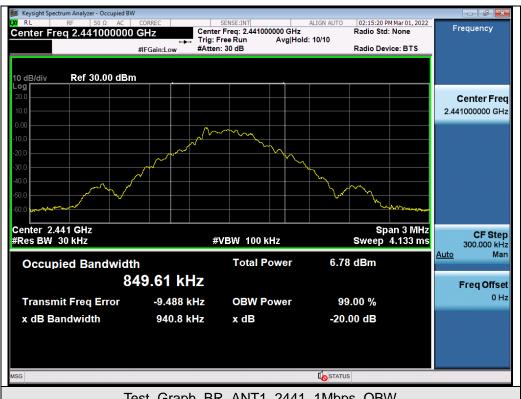





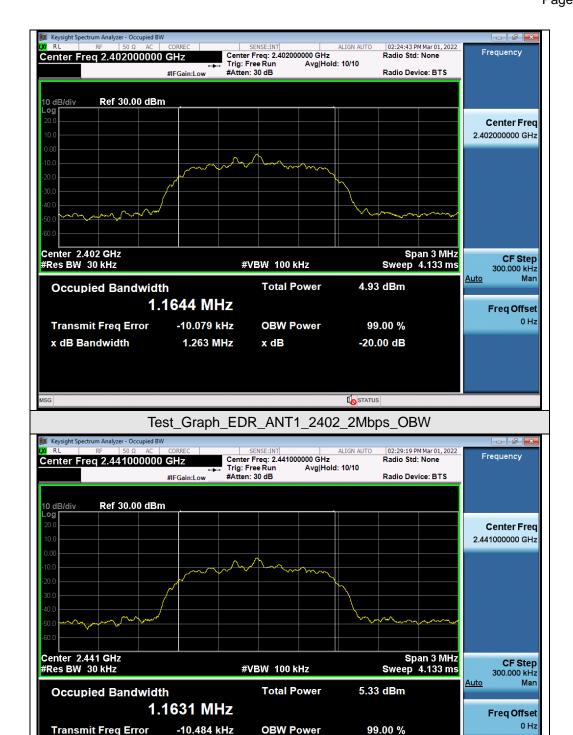

x dB

Test_Graph_EDR_ANT1_2441_2Mbps_OBW


-20.00 dB

STATUS

1.267 MHz

x dB Bandwidth




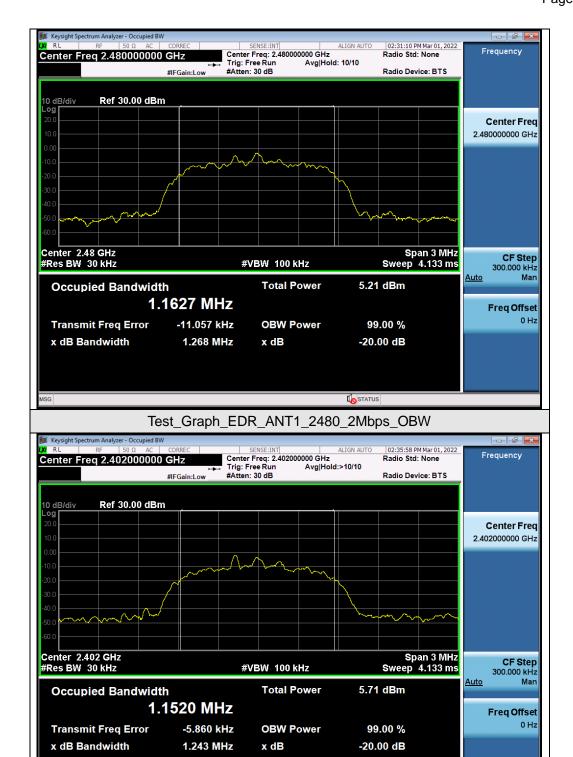

Test_Graph_EDR_ANT1_2402_3Mbps_OBW

STATUS



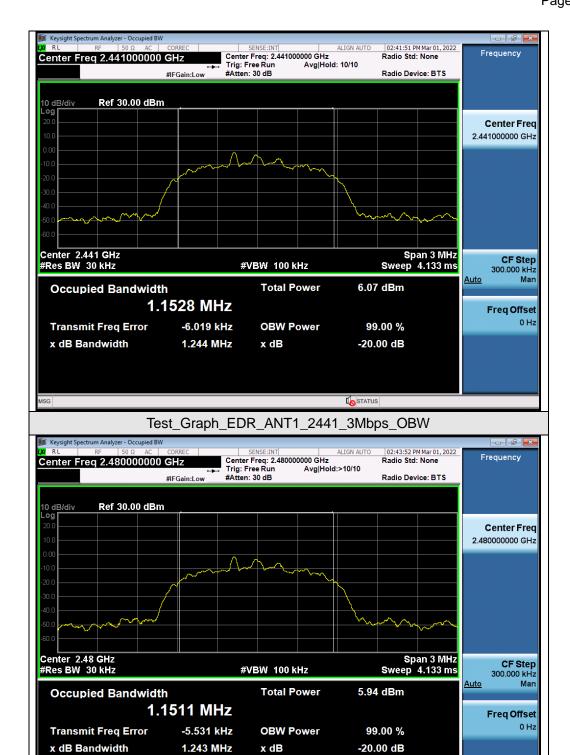

Test_Graph_EDR_ANT1_2480_3Mbps_OBW

STATUS



Report No.: AGC00484220202FE03

Page 25 of 69

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT | | | | | |
|---|--------------------------------|----------|--|--|--|
| Amuliachia Limita | Measurement Result | | | | |
| Applicable Limits | Test Data | Criteria | | | |
| In any 100 kHz Bandwidth Outside the | At least -20dBc than the limit | | | | |
| frequency band in which the spread spectrum | Specified on the BOTTOM | PASS | | | |
| intentional radiator is operating, the radio frequency | Channel | | | | |
| power that is produce by the intentional radiator shall | | | | | |
| be at least 20 dB below that in 100KHz bandwidth | | | | | |
| within the band that contains the highest level of the | | | | | |
| desired power. | At least -20dBc than the limit | DACC | | | |
| In addition, radiation emissions which fall in the | Specified on the TOP Channel | PASS | | | |
| restricted bands, as defined in §15.205(a), must also | | | | | |
| comply with the radiated emission limits specified | | | | | |
| in§15.209(a)) | | | | | |




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

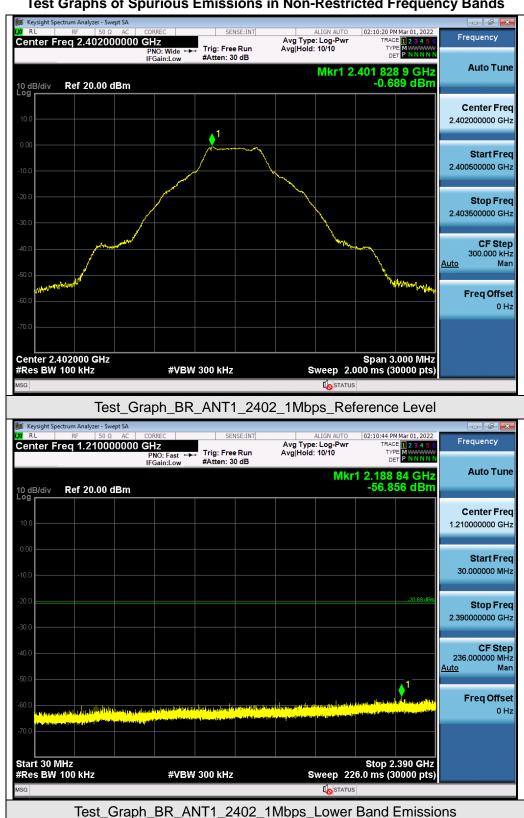


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





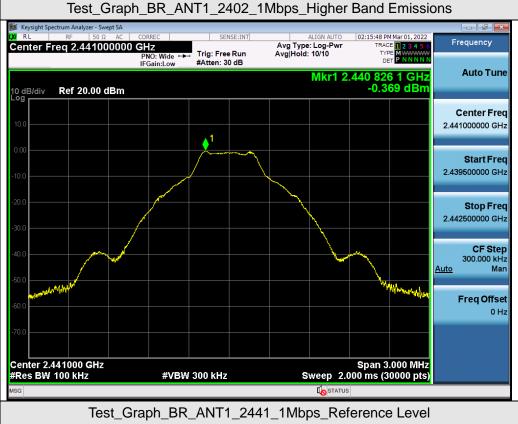



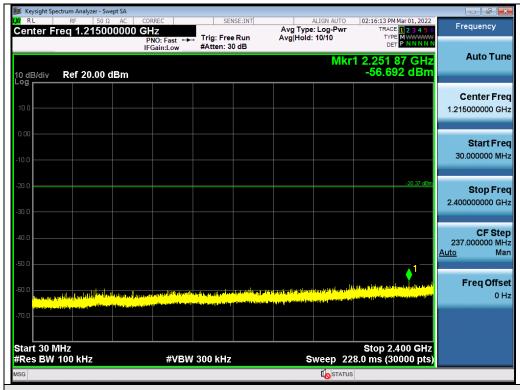















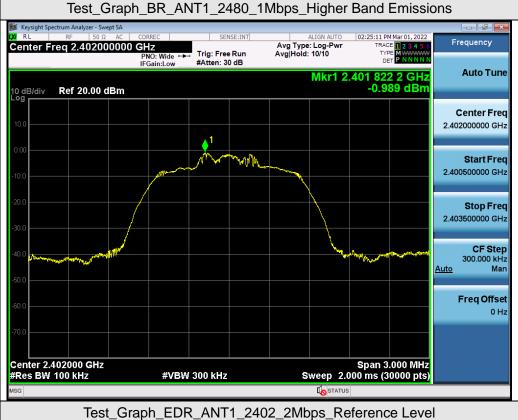




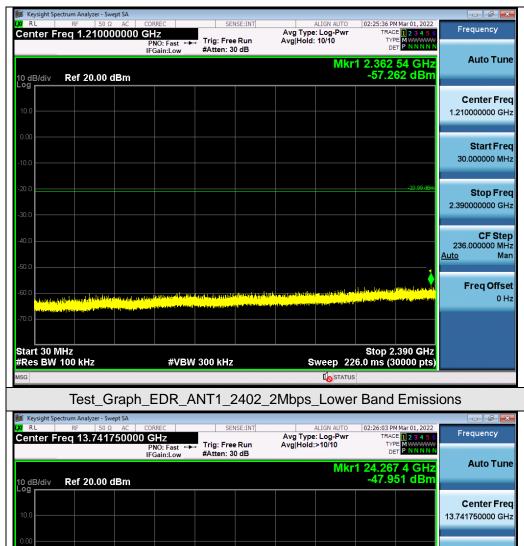






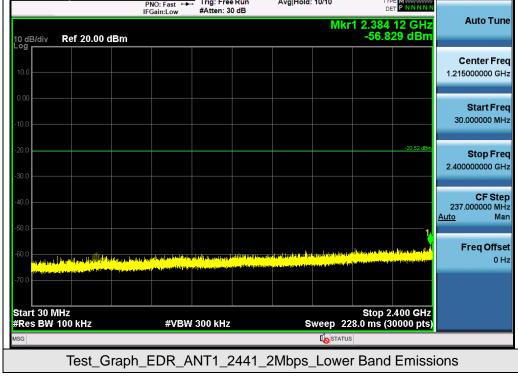




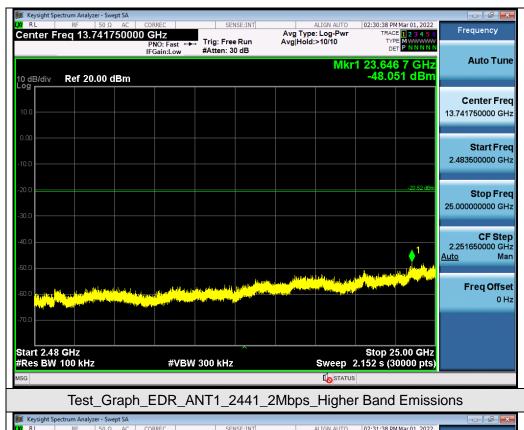





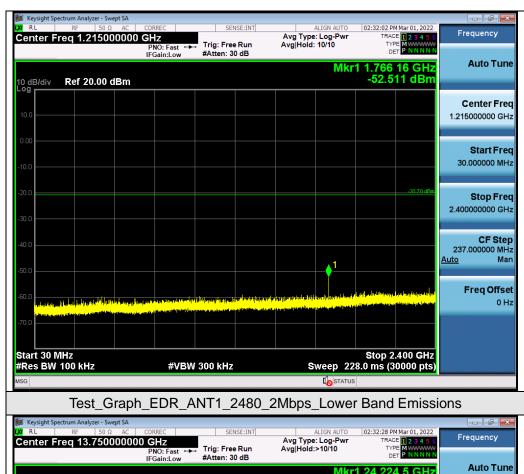



0 Hz

Stop 2.390 GHz Sweep 226.0 ms (30000 pts)





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2402_3Mbps_Lower Band Emissions

#VBW 300 kHz

Start 30 MHz #Res BW 100 kHz

CF Step 300.000 kHz


Freq Offset

Mar

<u>Auto</u>

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



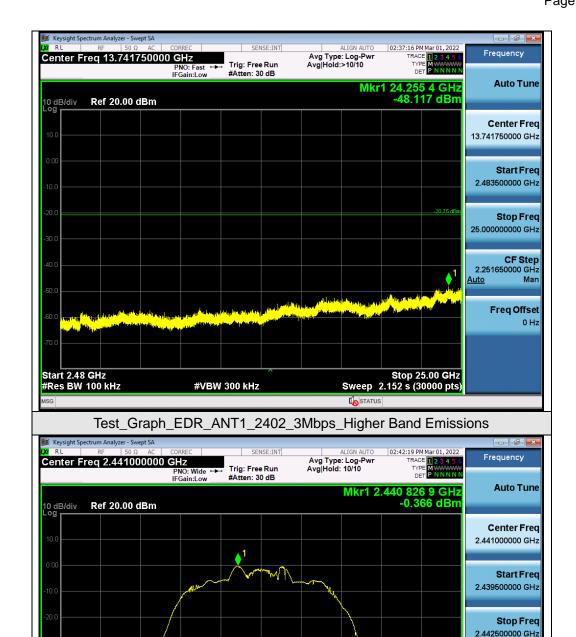


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2441_3Mbps_Reference Level

#VBW 300 kHz

Center 2.441000 GHz #Res BW 100 kHz



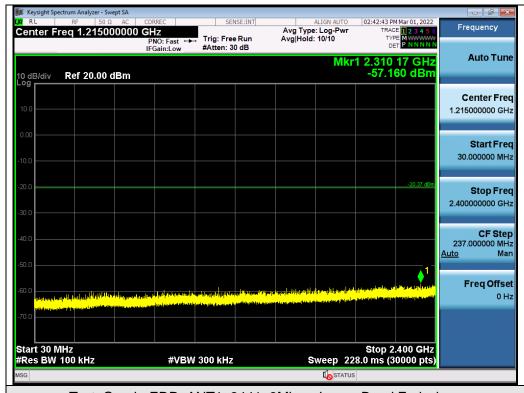



Mar

Freq Offset

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2480_3Mbps_Lower Band Emissions

#VBW 300 kHz


Start 30 MHz #Res BW 100 kHz




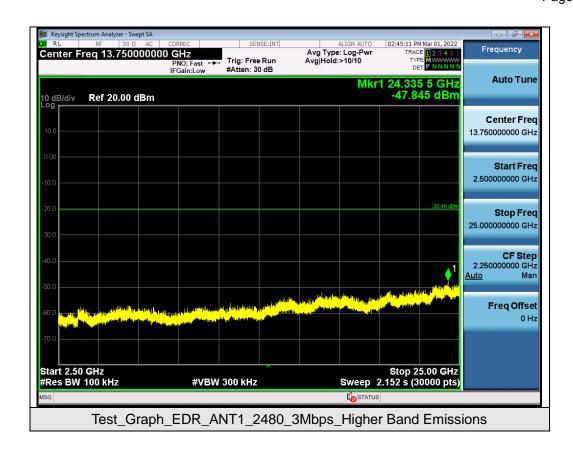




Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

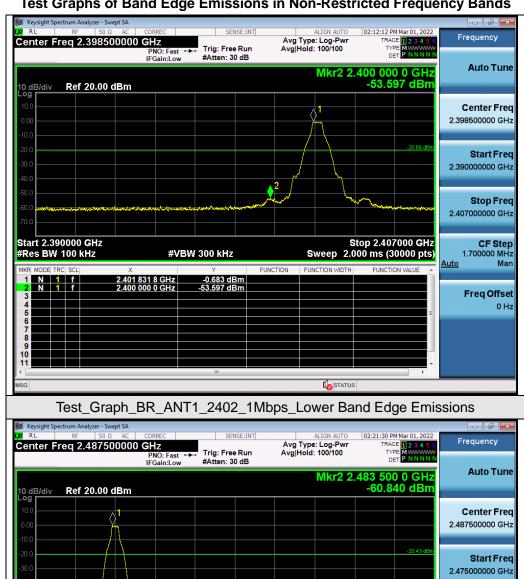

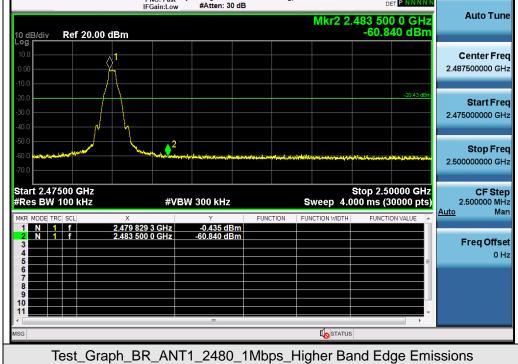

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



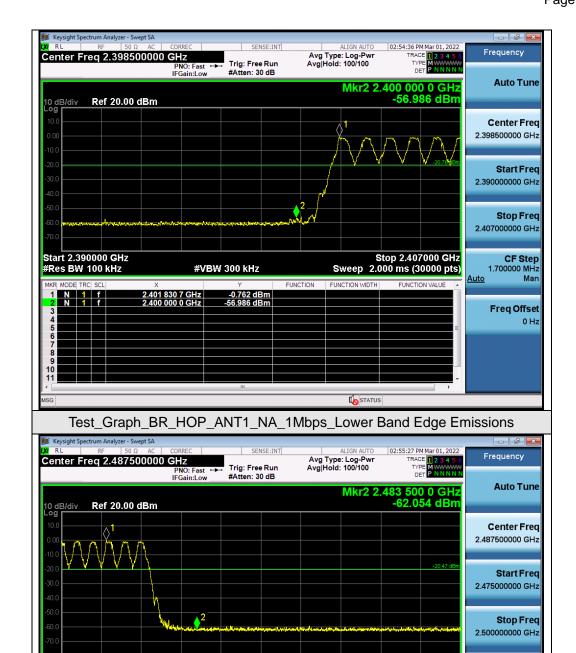

Stop 2.50000 GHz Sweep 4.000 ms (30000 pts)

FUNCTION WIDTH

STATUS

CF Step 2.500000 MHz

Freq Offset

Mar

<u>Auto</u>

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#VBW 300 kHz

FUNCTION

Test_Graph_BR_HOP_ANT1_NA_1Mbps_Higher Band Edge Emissions

Start 2.47500 GHz

#Res BW 100 kHz