

2023.10.19

RA-N2310-52

APPROVAL SHEET

MODEL : X-COM3 PRO
DIV ANT
Antenna layout

Review	Consent	Approval

Messrs. SENA Technology Co.,Ltd



RadiNa Co. ,Ltd

TEL:+82-2-463-0373

FAX:+82-2-463-0374

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	2 / 9

Table of contents

1. Revision History

2. Product Information

2.1 General Features

2.2 Electrical Specifications

3. Electrical Characteristics

3.1 VSWR

3.2 Smith Chart

3.3 3D-PLOT

3.4 2D-GAIN

4. Passive Measurement

5. Measurement Process

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	3 / 9

1. Revision History

NO.	Before	After	Reason	Date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	4 / 9

2.Product Information

2.1 General Features

PART NUMBER	GRSN22128MS51
ANTENNA TYPE	Dipole Antenna
APPLICATIONS	Mesh


2.2 Electrical Specifications

Frequency Range1 (TX)		2400MHz~2485MHz	
Frequency Range1 (RX)		2400MHz~2485MHz	
IMPEDANCE		50 Ω	
V.S.W.R	TX	2400MHz	2485MHz
		3 ↓	3 ↓
	RX	2400MHz	2485MHz
		3 ↓	3 ↓
RADIATION PATTERN		Omni-directional	
POLARIZATION		Linear	


	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	5 / 9

3. Electrical Characteristics

3.1 VSWR

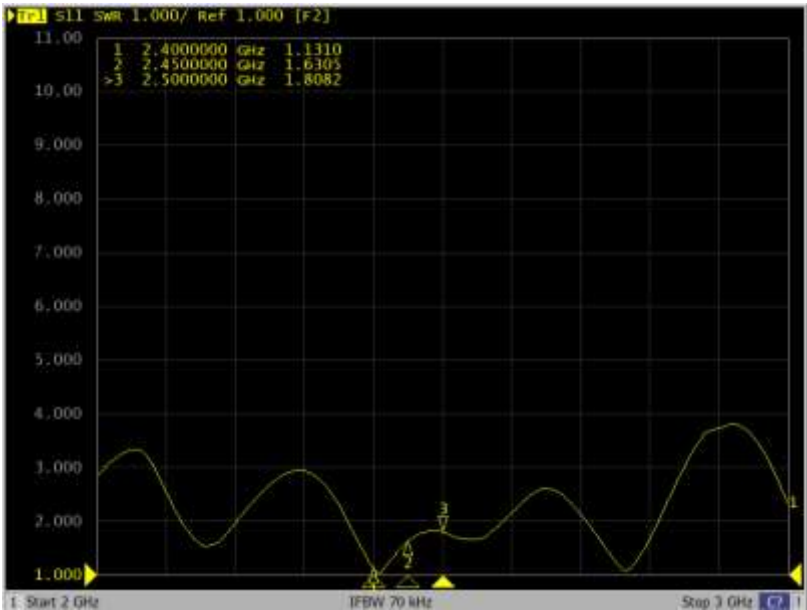


3.2 SMITH CHART

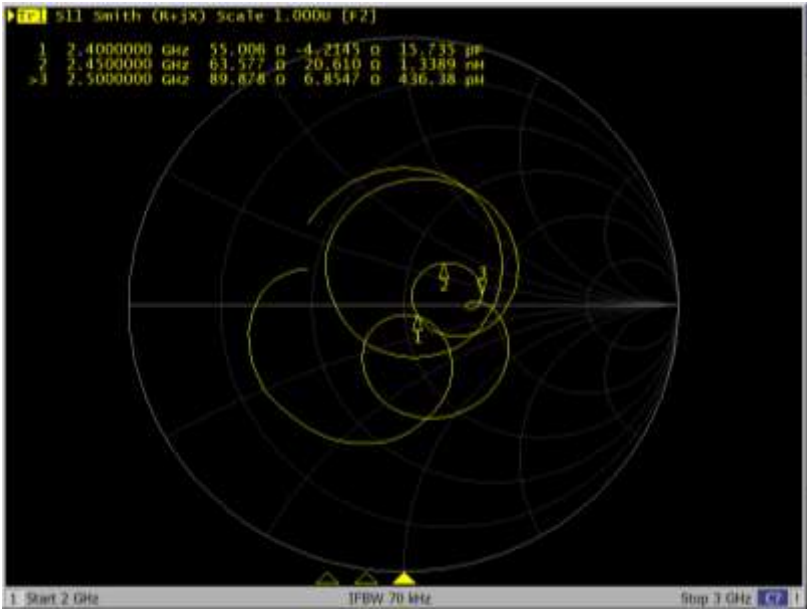


	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	6 / 9

3.3 3D-PLOT

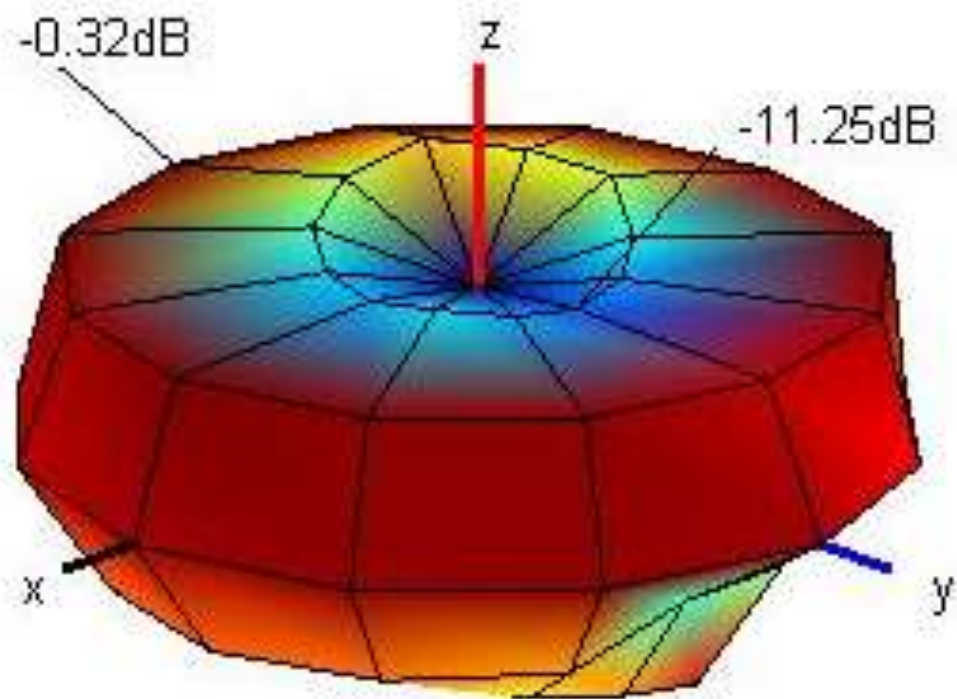

3.4 2D-GAIN

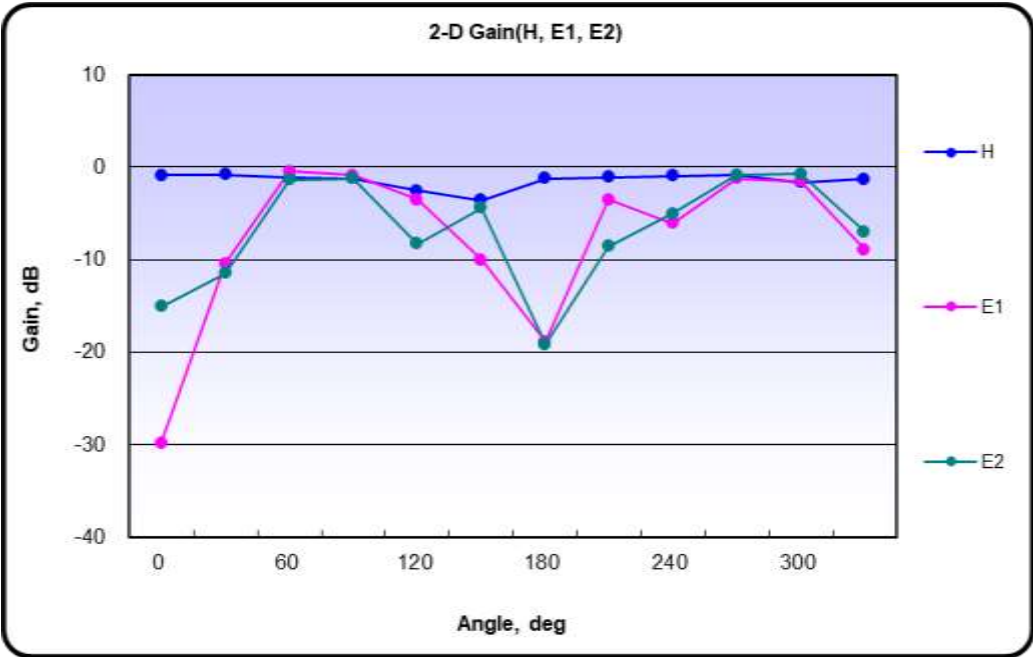

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	7 / 9

4. Passive Measurement

	1	2	3	4	5	6	7	8	9	10
Frequency [MHz]	2400	2405	2410	2415	2420	2425	2430	2435	2440	2445
Efficiency [dB]	-2.98	-2.88	-2.85	-2.96	-3.04	-3.18	-2.97	-2.79	-2.72	-2.78
Efficiency [%]	50.4	51.6	51.9	50.6	49.7	48.0	50.5	52.6	53.4	52.7
TRG _θ [dB]	-3.41	-3.31	-3.24	-3.35	-3.39	-3.55	-3.31	-3.11	-3.03	-3.06
Gain _{θ Peak} [dB]	-0.23	-0.02	-0.16	-0.12	-0.28	-0.25	-0.16	-0.06	-0.42	-0.49
Gain _{θ Min} [dB]	-16.17	-17.70	-17.04	-15.31	-14.60	-13.17	-12.55	-12.21	-11.39	-11.52
TRG _φ [dB]	-13.17	-13.06	-13.56	-13.66	-14.07	-14.09	-14.18	-14.28	-14.37	-14.90
Gain _{φ Peak} [dB]	-6.76	-5.90	-7.35	-6.93	-6.66	-7.11	-8.23	-7.59	-7.69	-8.23
Gain _{φ Min} [dB]	-31.99	-46.51	-33.14	-33.67	-32.14	-35.21	-32.67	-44.84	-36.58	-40.57
UHRG [dB]	-5.08	-4.99	-4.95	-5.05	-5.12	-5.30	-5.12	-4.93	-4.92	-5.02
UHRG/TRG [%]	61.7	61.5	61.6	61.8	61.9	61.4	60.9	61.1	60.3	59.7
H-Plane	-2.07	-2.03	-1.81	-1.93	-2.03	-2.04	-1.83	-1.59	-1.31	-1.38
E1-Plane, AVG [dB]	-4.46	-4.45	-4.31	-4.44	-4.45	-4.61	-4.45	-4.15	-4.21	-4.12
E2-Plane, AVG [dB]	-4.73	-4.67	-4.70	-4.40	-4.71	-4.97	-4.56	-4.31	-4.40	-4.34
Peak Gain [dB]	-0.23	-0.02	-0.10	0.01	0.03	-0.05	-0.16	0.18	-0.32	-0.32
Directivity [dB]	2.75	2.86	2.75	2.97	3.07	3.14	2.81	2.97	2.40	2.46
Minimum Gain [dB]	-15.30	-14.40	-13.87	-14.38	-13.98	-12.87	-12.37	-11.72	-11.03	-11.25

	12	13	14	15	16	17	18	19	20	12
Frequency [MHz]	2450	2455	2460	2465	2470	2475	2480	2485	2490	2497
Efficiency [dB]	-2.91	-3.03	-3.22	-3.16	-2.77	-2.91	-2.97	-3.52	-3.73	-3.60
Efficiency [%]	51.1	49.8	47.7	48.3	52.9	51.2	50.5	44.4	42.4	43.6
TRG _θ [dB]	-3.17	-3.28	-3.47	-3.40	-3.01	-3.12	-3.19	-3.75	-3.93	-3.79
Gain _{θ Peak} [dB]	-0.40	-0.16	-0.76	-0.85	-0.59	-0.36	-0.68	-1.00	-1.26	-1.19
Gain _{θ Min} [dB]	-11.13	-10.79	-11.22	-10.20	-9.84	-9.11	-8.71	-9.44	-9.81	-9.45
TRG _φ [dB]	-15.35	-15.50	-15.74	-15.81	-15.51	-15.99	-16.05	-16.53	-17.13	-17.46
Gain _{φ Peak} [dB]	-8.55	-9.50	-9.44	-9.86	-10.02	-9.83	-9.68	-10.22	-10.71	-11.71
Gain _{φ Min} [dB]	-35.58	-33.03	-33.07	-33.48	-45.47	-38.95	-31.33	-38.42	-39.68	-33.21
UHRG [dB]	-5.13	-5.27	-5.52	-5.48	-5.12	-5.33	-5.33	-5.96	-6.19	-6.00
UHRG/TRG [%]	60.0	59.7	58.9	58.5	58.2	57.2	58.0	57.1	56.7	57.6
H-Plane	-1.54	-1.65	-1.73	-1.63	-1.21	-1.30	-1.34	-1.87	-1.98	-2.13
E1-Plane, AVG [dB]	-4.27	-4.33	-4.41	-4.56	-4.03	-4.13	-4.21	-4.96	-5.09	-5.07
E2-Plane, AVG [dB]	-4.40	-4.43	-4.72	-4.65	-4.12	-4.54	-4.32	-4.84	-5.29	-5.00
Peak Gain [dB]	-0.14	-0.13	-0.74	-0.58	-0.44	-0.33	-0.53	-0.75	-0.90	-1.08
Directivity [dB]	2.77	2.89	2.48	2.58	2.32	2.57	2.43	2.78	2.83	2.52
Minimum Gain [dB]	-10.60	-10.57	-10.60	-9.98	-9.69	-9.07	-8.57	-9.20	-9.66	-9.27

Average Efficiency	-3.04dBi	49.67%
Average Efficiency	0.18dBi	

RADINA. Co., LTD

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	8 / 9

5.Measurement Process

5.1 SWR / Return loss

	Set Condition
Network Analyzer	Agilent 8753ES
Cable	Semi-ridid (40mm, 60mm)
Test condition	

5.2 Gain

Antenna gain is measured in the anechoic chamber of this company.


Anechoic Chamber for Antenna Gain Measurement	
	
	

	PRODUCT APPROVAL SHEET		GRSN23108MS42			
	MODEL NAME	X-COM3 PRO (DIV)	REV.	1.0	Page	9 / 9

5.3 Gain test block diagram

Active test Sysetm

- TRP, NHPRP, UHRP
- TIS, NHPIS, UHIS
- Relative Sensitivity

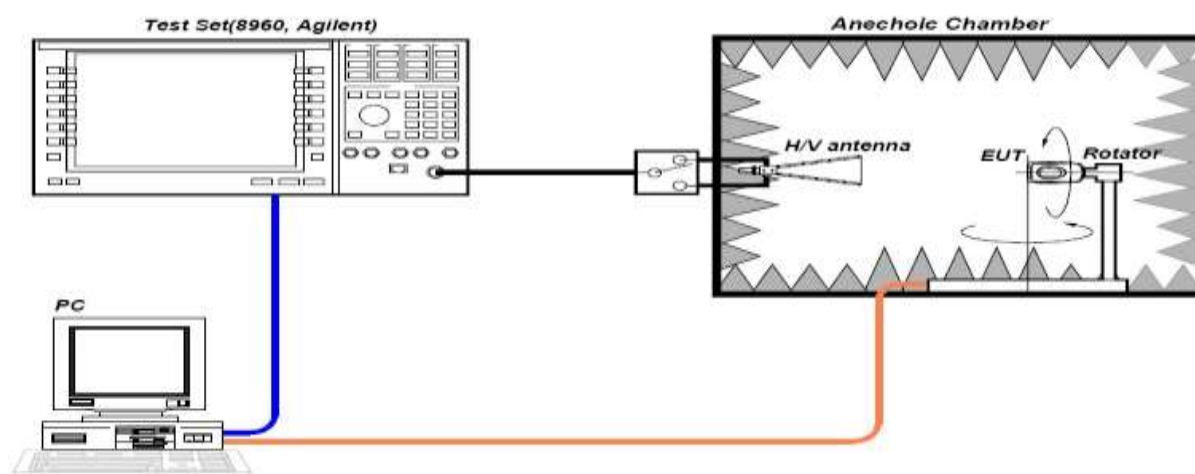

Passiver test Sysetm

- Efficiency
- Peak Gain, Avg, Gain
- Min, Max PWR

