

FCC TEST REPORT

(PART 27)


Applicant:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/b – 34010 Sgonico, Trieste – Italy

Manufacturer or Supplier:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/b – 34010 Sgonico, Trieste – Italy
Product:	ME310M1-W2 / ME310M1-W1
Brand Name:	Telit Cinterion
Model Name:	ME310M1-W2 / ME310M1-W1
Series Model:	RI7ME310M1WX
FCC ID	Telit Communications SpA
Date of tests	Feb. 18, 2024 ~ Apr. 26, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 27** ☒ **ANSI/TIA/EIA-603-D**
☒ **FCC Part 2** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Apr. 26, 2024	Date: Apr. 26, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	6
1 SUMMARY OF TEST RESULTS	7
1.1 MEASUREMENT UNCERTAINTY	9
1.2 TEST SITE AND INSTRUMENTS	10
2 GENERAL INFORMATION	12
2.1 GENERAL DESCRIPTION OF EUT	12
2.2 CONFIGURATION OF SYSTEM UNDER TEST	17
2.3 DESCRIPTION OF SUPPORT UNITS	18
2.4 TEST ITEM AND TEST CONFIGURATION	18
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	29
3 TEST TYPES AND RESULTS	30
3.1 OUTPUT POWER MEASUREMENT	30
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	30
3.1.2 TEST PROCEDURES	30
3.1.3 TEST SETUP	32
3.1.4 TEST RESULTS	33
3.2 FREQUENCY STABILITY MEASUREMENT	56
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	56
3.2.2 TEST PROCEDURE	56
3.2.3 TEST SETUP	56
3.2.4 TEST RESULTS	57
3.3 OCCUPIED BANDWIDTH MEASUREMENT	58
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	58
3.3.2 TEST SETUP	58
3.3.3 TEST PROCEDURES	58
3.3.4 TEST RESULTS	59
3.4 BAND EDGE MEASUREMENT	60
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	60
3.4.2 TEST SETUP	61
3.4.3 TEST PROCEDURES	62
3.4.4 TEST RESULTS	63
3.5 CONDUCTED SPURIOUS EMISSIONS	64
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	64
3.5.2 TEST PROCEDURE	65
3.5.3 TEST SETUP	65
3.5.4 TEST RESULTS	66
3.6 RADIATED EMISSION MEASUREMENT	67
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	67
3.6.2 TEST PROCEDURES	68
3.6.3 DEVIATION FROM TEST STANDARD	68
3.6.4 TEST SETUP	69
3.6.5 TEST RESULTS	71
3.7 PEAK TO AVERAGE RATIO	147
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	147
3.7.2 TEST SETUP	147
3.7.3 TEST PROCEDURES	147
3.7.4 TEST RESULTS	148
4 INFORMATION ON THE TESTING LABORATORIES	149
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB. 150	

6 APPENDIX	151
CAT-M: LTE BAND12(INCLUDING LTE BAND17).....	151
PEAK-TO-AVERAGE RATIO(CCDF).....	151
TEST RESULT	151
TEST GRAPHS	152
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	164
TEST RESULT	164
BAND EDGE.....	177
TEST RESULT	177
TEST GRAPHS	178
CONDUCTED SPURIOUS EMISSION	194
TEST RESULT	194
TEST GRAPHS	195
FREQUENCY STABILITY.....	207
TEST RESULT	207
NB-IOT: LTE BAND12(INCLUDING LTE BAND17).....	209
PEAK-TO-AVERAGE RATIO(CCDF).....	209
TEST RESULT	209
TEST GRAPHS	210
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	212
TEST RESULT	212
BAND EDGE.....	221
TEST RESULT	221
TEST GRAPHS	221
CONDUCTED SPURIOUS EMISSION	227
TEST RESULT	227
TEST GRAPHS	228
FREQUENCY STABILITY.....	236
TEST RESULT	236
CAT-M: LTE BAND13.....	237
PEAK-TO-AVERAGE RATIO(CCDF).....	237
TEST RESULT	237
TEST GRAPHS	238
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	242
TEST RESULT	242
BAND EDGE.....	247
TEST RESULT	247
TEST GRAPHS	247
CONDUCTED SPURIOUS EMISSION	255
TEST RESULT	255
TEST GRAPHS	256
FREQUENCY STABILITY.....	260
TEST RESULT	260
NB-IOT: LTE BAND13.....	261
PEAK-TO-AVERAGE RATIO(CCDF).....	261
TEST RESULT	261
TEST GRAPHS	262
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	264
TEST RESULT	264
BAND EDGE.....	273
TEST RESULT	273
TEST GRAPHS	273
CONDUCTED SPURIOUS EMISSION	289
TEST RESULT	289
TEST GRAPHS	290
FREQUENCY STABILITY.....	298

TEST RESULT	298
CAT-M: LTE BAND71	299
PEAK-TO-AVERAGE RATIO(CCDF)	299
TEST RESULT	299
TEST GRAPHS	300
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	312
TEST RESULT	312
TEST GRAPHS	313
BAND EDGE	325
TEST RESULT	325
TEST GRAPHS	325
CONDUCTED SPURIOUS EMISSION	342
TEST RESULT	342
TEST GRAPHS	343
FREQUENCY STABILITY	354
TEST RESULT	354
NB-IOT: LTE BAND71	357
PEAK-TO-AVERAGE RATIO(CCDF)	357
TEST RESULT	357
TEST GRAPHS	358
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	360
TEST RESULT	360
BAND EDGE	369
TEST RESULT	369
TEST GRAPHS	369
CONDUCTED SPURIOUS EMISSION	375
TEST RESULT	375
TEST GRAPHS	376
FREQUENCY STABILITY	384
TEST RESULT	384
CAT-M: LTE BAND85	385
PEAK-TO-AVERAGE RATIO(CCDF)	385
TEST RESULT	385
TEST GRAPHS	386
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	392
BAND EDGE	399
TEST RESULT	399
TEST GRAPHS	399
CONDUCTED SPURIOUS EMISSION	408
TEST RESULT	408
TEST GRAPHS	409
FREQUENCY STABILITY	414
TEST RESULT	414
NB-IOT: LTE BAND85	416
PEAK-TO-AVERAGE RATIO(CCDF)	416
TEST RESULT	416
TEST GRAPHS	417
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	419
TEST RESULT	419
BAND EDGE	428
TEST RESULT	428
TEST GRAPHS	428
CONDUCTED SPURIOUS EMISSION	434
TEST RESULT	434
TEST GRAPHS	434
FREQUENCY STABILITY	443



Test Report No.: W7L-240204W001RF03

TEST RESULT 443



Test Report No.: W7L-240204W001RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240204W001RF03	Original release	Apr. 26, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(c)(10) §27.50(b)(10) §27.1507(a)&(b)	Effective Radiated Power (Band 12) (Band 13) (Band 14) (Band 17) (Band 71) (Band 85) (Band 8)	Compliance	A
§27.50(d)(4) §27.50(h)(2)	Equivalent Isotropically Radiated Power	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(c)(2) §27.53(g) §27.53(h) §27.53(m)(4)	Conducted Band Edge Measurements (Band 12) (Band 13) (Band 14) (Band 17) (Band 71) (Band 85) (Band 8)	Compliance	A
§2.1051 §27.53(g) §27.53(c)(2) §27.53(f) §27.53(h) §27.53(m)(4) §27.1509(a)	Conducted Spurious Emissions (Band 12) (Band 13) (Band 14) (Band 17) (Band 71) (Band 85) (Band 8)	Compliance	A
§2.1053 §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h) §27.53(m)(4) §27.1509(a)	Radiated Spurious Emissions (Band 12) (Band 13) (Band 14) (Band 17) (Band 71) (Band 85) (Band 8)	Compliance	A
§27.50	Peak to average ratio*	Compliance	A

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.



Test Report No.: W7L-240204W001RF03

Note:

The differences between LTE NB-IoT/Cat-M1 modules ME310M1-W1 (FCC ID:RI7ME310M1WX) HW 0.0 and ME310M1-W2 (FCC ID: RI7ME310M1W2) HW0.0 are as shown in the following list. Testing has been run on parent product ME310M1-W2 and the worst cases of power and RSE have been verified also on ME310M1-W1 variant. Only the worst-case data (ME310M1-W2) have been reported.

Model	ME310M1-W1 HW0.0	ME310M1-W2 HW0.0
The PSRAM section (U403/R402/R402/C402)	NOT-mounted	Mounted
The FLASH dimensions and capacity (U401)	(Small dimensions) 8MB	(Big dimensions) 16MB

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

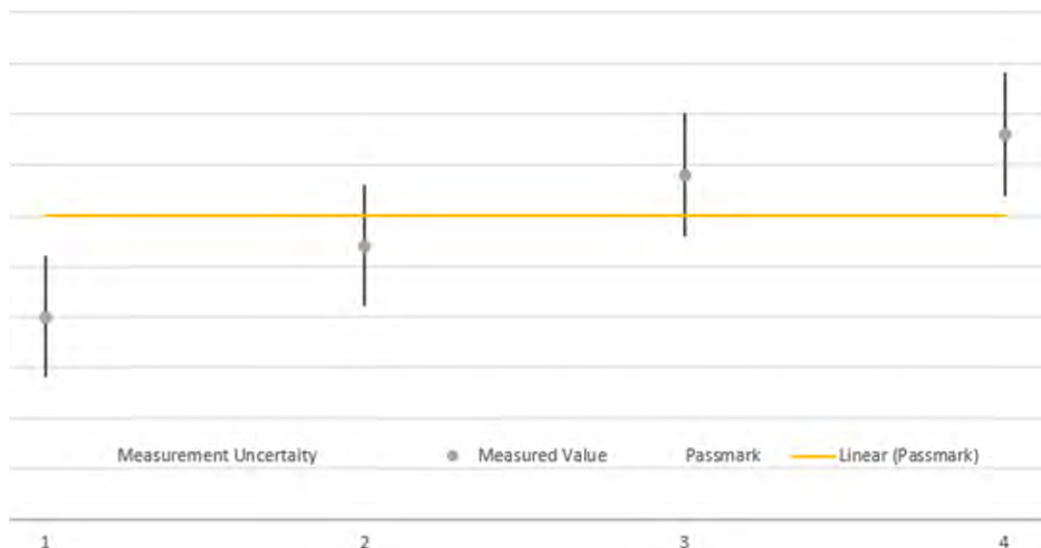

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESR26	101734	Feb.24,24	Feb.23,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Apr.27,24
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24



Test Report No.: W7L-240204W001RF03

- NOTE:**
1. The calibration interval of the above test instruments is 12/ 24 / 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	ME310M1-W2 / ME310M1-W1	
BRAND NAME*	Telit Cinterion	
MODEL NAME*	ME310M1-W2 / ME310M1-W1	
NOMINAL VOLTAGE*	EUT 3.8Vdc	
MODULATION TECHNOLOGY	CAT-M / NB-IOT :LTE	BPSK, QPSK, 16QAM
FREQUENCY RANGE CAM-T	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 71 Channel Bandwidth: 5MHz	665.5MHz ~ 695.5MHz
	LTE Band 71 Channel Bandwidth: 10MHz	668MHz ~ 693MHz
	LTE Band 71 Channel Bandwidth: 15MHz	670.5MHz ~ 690.5MHz
	LTE Band 71 Channel Bandwidth: 20MHz	673MHz ~ 688MHz
	LTE Band 85 Channel Bandwidth: 5MHz	700.5MHz ~ 713.5MHz
	LTE Band 85 Channel Bandwidth: 10MHz	703MHz ~ 711MHz
	LTE Band 8 Channel Bandwidth: 1.4MHz	898.2MHz ~ 899.8MHz
	LTE Band 8 Channel Bandwidth: 3MHz	899MHz
FREQUENCY RANGE NB-IOT	LTE Band 12 (Sub-carrier Speacing: 3.75/15KHz)	699.1MHz ~ 715.8MHz
	LTE Band 13 (Sub-carrier Speacing: 3.75/15KHz)	771.1MHz ~ 786.8MHz
	LTE Band 71 (Sub-carrier Speacing: 3.75/15KHz)	663.2MHz ~ 697.8MHz

	LTE Band 85 (Sub-carrier Spacing: 3.75/15KHz)	698.2MHz ~ 715.8MHz
	LTE Band 8 (Sub-carrier Spacing: 3.75/15KHz)	897.7MHz ~ 900.3MHz
MAX. ERP/EIRP POWER CAM-T	LTE Band 12 Channel Bandwidth: 1.4MHz	302.69mW
	LTE Band 12 Channel Bandwidth: 3MHz	302mW
	LTE Band 12 Channel Bandwidth: 5MHz	303.39mW
	LTE Band 12 Channel Bandwidth: 10MHz	304.79mW
	LTE Band 13 Channel Bandwidth: 5MHz	297.85mW
	LTE Band 13 Channel Bandwidth: 10MHz	299.23mW
	LTE Band 71 Channel Bandwidth: 5MHz	320.63mW
	LTE Band 71 Channel Bandwidth: 10MHz	317.69mW
	LTE Band 71 Channel Bandwidth: 15MHz	316.96mW
	LTE Band 71 Channel Bandwidth: 20MHz	323.59mW
	LTE Band 85 Channel Bandwidth: 5MHz	334.97mW
	LTE Band 85 Channel Bandwidth: 10MHz	344.35mW
	LTE Band 8 Channel Bandwidth: 1.4MHz	294.44mW
	LTE Band 8 Channel Bandwidth: 3MHz	297.17mW
MAX. ERP/EIRP POWER NB-IOT	LTE Band 12 (Sub-carrier Spacing: 3.75KHz)	302mW
	LTE Band 12 (Sub-carrier Spacing: 15KHz)	303.39mW
	LTE Band 13 (Sub-carrier Spacing: 3.75KHz)	305.49mW
	LTE Band 13 (Sub-carrier Spacing: 15KHz)	304.09mW

	LTE Band 71 (Sub-carrier Spacing: 3.75KHz)	310.46mW
	LTE Band 71 (Sub-carrier Spacing: 15KHz)	311.17mW
	LTE Band 85 (Sub-carrier Spacing: 3.75KHz)	309.03mW
	LTE Band 85 (Sub-carrier Spacing: 15KHz)	306.2mW
	LTE Band 8 (Sub-carrier Spacing: 3.75KHz)	308.32mW
	LTE Band 8(Sub-carrier Spacing: 15KHz)	307.61mW
EMISSION DESIGNATOR CAM-T	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 1M08G7D
		16QAM: 1M07W7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 1M07G7D
		16QAM: 1M07W7D
	LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 71 Channel Bandwidth: 5MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 71 Channel Bandwidth: 10MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 71 Channel Bandwidth: 15MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 71 Channel Bandwidth: 20MHz	QPSK: 1M09G7D
		16QAM: 1M08W7D

	LTE Band 85 Channel Bandwidth: 5MHz	QPSK: 1M08G7D	
		16QAM: 1M08W7D	
	LTE Band 85 Channel Bandwidth: 10MHz	QPSK: 1M08G7D	
		16QAM: 1M08W7D	
	LTE Band 8 Channel Bandwidth: 1.4MHz	QPSK: 1M07G7D	
		16QAM: 1M08W7D	
	LTE Band 8 Channel Bandwidth: 3MHz	QPSK: 1M06G7D	
		16QAM: 1M08W7D	
	EMISSION DESIGNATOR NB-IOT	LTE Band 12 (Sub-carrier Speacing: 3.75KHz)	BPSK: 69K09G7D
			QPSK: 96K45W7D
LTE Band 12 (Sub-carrier Speacing: 15KHz)		BPSK: 132K5G7D	
		QPSK: 190K6W7D	
LTE Band 13 (Sub-carrier Speacing: 3.75KHz)		BPSK: 43K11G7D	
		QPSK: 47K97W7D	
LTE Band 13 (Sub-carrier Speacing: 15KHz)		BPSK: 127K2G7D	
		QPSK: 191K5W7D	
LTE Band 71 (Sub-carrier Speacing: 3.75KHz)		BPSK: 44K66G7D	
		QPSK: 49K15W7D	
LTE Band 71 (Sub-carrier Speacing: 15KHz)		BPSK: 120K0G7D	
		QPSK: 121K6W7D	
LTE Band 85 (Sub-carrier Speacing: 3.75KHz)		BPSK: 45K32G7D	
		QPSK: 48K78W7D	
LTE Band 85 (Sub-carrier Speacing: 15KHz)		BPSK: 111K58G7D	
		QPSK: 191K04W7D	
LTE Band 8 (Sub-carrier Speacing: 3.75KHz)	BPSK: 47K22G7D		
	QPSK: 46K19W7D		
LTE Band 8 (Sub-carrier Speacing: 15KHz)	BPSK: 133K59G7D		
	QPSK: 190K8W7D		
ANTENNA TYPE*	1/4 1 Antenna with 2.14dBi for LTE12/ LTE13/ LTE71/ LTE85/LTE8		

HW VERSION*	0.0
SW VERSION*	ME310M1-W2: M0U.100001/ME310M1-W1: M0U.000001
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	N/A
EXTREME TEMPERATURE*	-40-85 °C
EXTREME VOLTAGE*	2.5V - 4.5V

NOTE:





1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

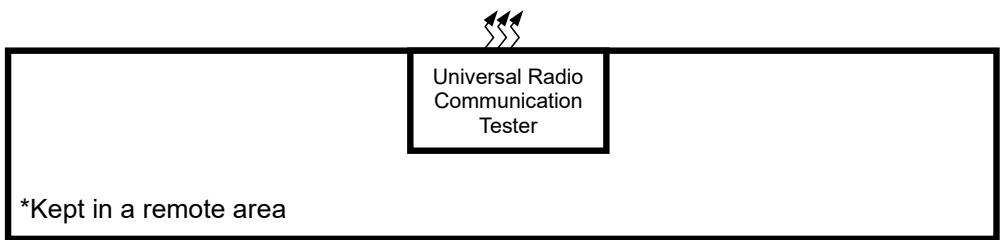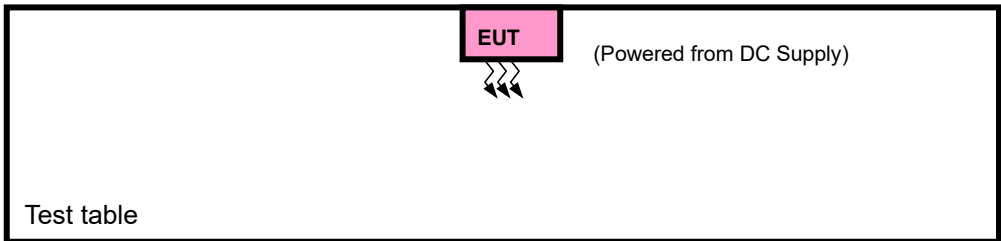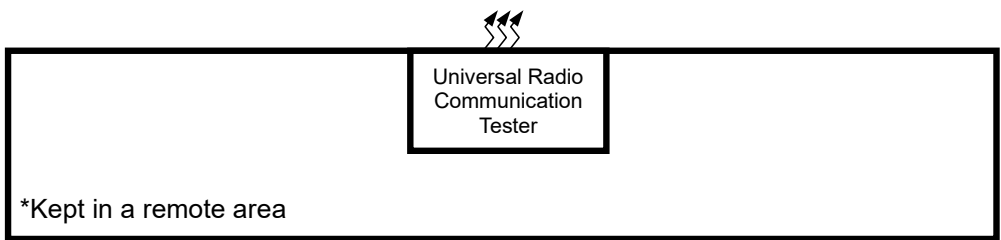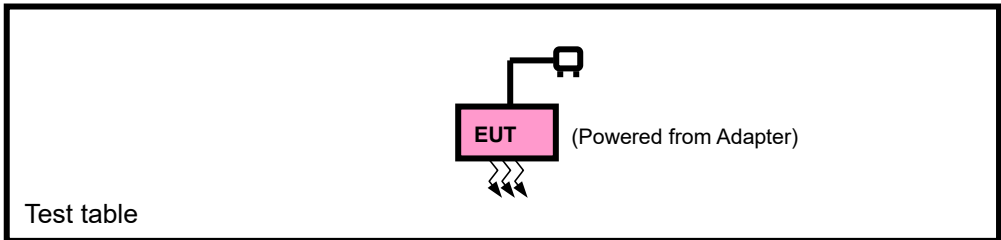

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	ThinkPad E14	HRSW00024	N/A
2	DC Source	HYELEC	HY3010B	551016	N/A
3	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable, 1.0m;
2	USB Line: Unshielded, Detachable, 1.0m;

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Source with LTE link

CAM-T LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23025 to 23165	23025	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		23035 to 23155	23035	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23060 to 23130	23060	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDCUDED EMISSION	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060,23095,23130	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	23012 to 23178	23012,23095,23178	BPSK,QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23095	23095	BPSK,QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23012 to 23178	23012,23095,23178	BPSK,QPSK	6 RB / 0 RB Offset
		23095	23095	BPSK,QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23095	23095	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23012 to 23178	23012	BPSK,QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23178	BPSK,QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23095	23095	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
					1 RB / 49 RB Offset 50 RB / 0 RB Offset
			23095	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
					1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	23012 to 23178	23012,23095,23178	BPSK,QPSK	1 RB / 0 RB Offset
		23095	23095	BPSK,QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23012 to 23178	23012,23095,23178	QPSK	1 RB / 0 RB Offset
		23095	23095	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

CAM-T LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 20175, 23255	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23230	23230	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23205 to 23255	23205, 20175, 23255	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23205 to 23255	23205	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23255	5MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDCUDED EMISSION	23205 to 23255	23205, 20175, 23255	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	23182 to 23278	23182, 23230, 23278	BPSK,QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23230	23230	BPSK,QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23182 to 23278	23182, 23230, 23278	BPSK,QPSK	6 RB / 0 RB Offset
		23230	23230	BPSK,QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23230	23230	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23182 to 23278	23182	BPSK,QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23278	BPSK,QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23230	23230	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			23230	BPSK,QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	23182 to 23278	23182, 23230, 23278	BPSK,QPSK	1 RB / 0 RB Offset
		23230	23230	BPSK,QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23182 to 23278	23182, 23230, 23278	QPSK	1 RB / 0 RB Offset
		23230	23230	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

CAM-T LTE BAND 71 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	133222 to 133372	133222, 133322, 133372	20MHz	QPSK	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	133222 to 133372	133222, 133322, 133372	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	133147 to 133447	133147	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			133447	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		133172 to 133422	133172	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			133422	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		133197 to 133397	133197	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			133397	15MHz	QPSK,16QAM, 64QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		133222 to 133372	133222	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			133372	20MHz	QPSK,16QAM, 64QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	CONDCUDED EMISSION	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	133147 to 133447	133297	5MHz	QPSK	1 RB / 0 RB Offset
		133172 to 133422	133172, 133297, 133422	10MHz	QPSK	1 RB / 0 RB Offset
		133197 to 133397	133297	15MHz	QPSK	1 RB / 0 RB Offset
		133222 to 133372	133297	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 71 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	133124 to 133297	133124, 13297, 133470	BPSK,QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	133297	133297	BPSK,QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	26692 to 26788	26697, 26740, 26783	BPSK,QPSK	6 RB / 0 RB Offset
		133297	133297	BPSK,QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	133297	133297	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	133124 to 133297	133124	BPSK,QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			133297	BPSK,QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		133297	133297	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			133297	BPSK,QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	133124 to 133297	133124, 13297, 133470	BPSK,QPSK	1 RB / 0 RB Offset
		133297	133297	BPSK,QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	133124 to 133297	133124, 13297, 133470	QPSK	1 RB / 0 RB Offset
		133297	133297	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

CAM-T LTE BAND 85 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	134027 to 134157	134027, 134092, 134157	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		134052 to 134132	134052, 134092, 134132	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	134052 to 134132	134052, 134092, 134132	10MHz	QPSK	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	134027 to 134157	134027, 134092, 134157	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		134052 to 134132	134052, 134092, 134132	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	134052 to 134132	134052, 134092, 134132	10MHz	QPSK, 16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	134027 to 134157	134027, 134092, 134157	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			134027, 134092, 134157	5MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		134052 to 134132	134052, 134092, 134132	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			134052, 134092, 134132	10MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDCUDED EMISSION	134027 to 134157	134027, 134092, 134157	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		134052 to 134132	134052, 134092, 134132	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	134027 to 134157	134092	5MHz	QPSK	1 RB / 0 RB Offset
		134052 to 134132	134052, 134092, 134132	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 85 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	134004 to 132180	134004, 134092, 134180	BPSK,QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	134092	134092	BPSK,QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	134004 to 132180	134004, 134092, 134180	BPSK,QPSK	6 RB / 0 RB Offset
		134092	134092	BPSK,QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	134092	134092	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	134004 to 132180	134004	BPSK,QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			132670	BPSK,QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		134092	134092	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			134092	BPSK,QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	134004 to 132180	134004, 134092, 134180	BPSK,QPSK	1 RB / 0 RB Offset
		134092	134092	BPSK,QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	134004 to 132180	134004, 134092, 134180	QPSK	1 RB / 0 RB Offset
		134092	134092	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

CAM-T LTE BAND 8 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	21632 to 21648	21632,21640,21648	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		21640	21640	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	21632 to 21648	21632,21640,21648	1.4MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	21632 to 21648	21632,21640,21648	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		21640	21640	3MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	21632 to 21648	21632,21640,21648	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	21632 to 21648	21632	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				3MHz		6 RB / 0 RB Offset
			21648	1.4MHz	QPSK, 16QAM	1 RB / 5 RB Offset
				3MHz		6 RB / 0 RB Offset
		21640	21640	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
A	CONDUCTED EMISSION	21632 to 21648	21632,21640,21648	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		21640	21640	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	21640	21640	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		21640	21640	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 8 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	21627 to 21653	21627,21640,21653	BPSK,QPSK	1 RB / 0 RB Offset
		21640	21640	BPSK,QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	21640	21640	BPSK,QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	21627 to 21653	21627,21640,21653	BPSK,QPSK	6 RB / 0 RB Offset
		21640	21640	BPSK,QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	21627 to 21653	21627,21640,21653	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	21627 to 21653	21627	BPSK,QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			21653	BPSK,QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		21640	21640	BPSK,QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	21627 to 21653	21627,21640,21653	BPSK,QPSK	1 RB / 0 RB Offset
		21640	21640	BPSK,QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	21627 to 21653	21627,21640,21653	QPSK	1 RB / 0 RB Offset
		21640	21640	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 2.5V/ 3.8V/ 4.5V By DC Source	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
CONDUCTED EMISSION	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1-watt EIRP.

According to the specific rule Part 27.50(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698–746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

Part 27.50(b)(10): Portable stations (hand-held devices) transmitting in the 746–757 MHz, 776–788 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

FCC §27.1507 (a) & (d):

(a) Maximum ERP. The power limits specified in this section are applicable to operations in areas more than 110 km (68.4 miles) from the U.S./Mexico border and 140 km (87 miles) from the U.S./Canada border.

(3) Mobile, control and auxiliary test stations. Mobile, control and auxiliary test stations must not exceed 10 watts ERP.

(4) Portable stations. Portable stations must not exceed 3 watts ERP.

(d) PAR limit. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);



Test Report No.: W7L-240204W001RF03

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);


L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

CAM-T

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	22.43	22.51	22.38
		1	5	22.59	22.42	22.42
		3	0	22.54	22.61	22.56
		3	3	22.59	22.63	22.55
		6	0	22.41	22.42	22.33
	16QAM	1	0	22.48	22.44	22.38
		1	5	22.52	22.43	22.47
		3	0	22.54	22.53	22.64
		3	3	22.67	22.61	22.51
		6	0	22.40	22.35	22.35

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	22.43	22.52	22.41
		1	5	22.54	22.39	22.48
		3	0	22.57	22.57	22.64
		3	3	22.59	22.54	22.55
		6	0	22.47	22.33	22.30
	16QAM	1	0	22.44	22.49	22.42
		1	5	22.52	22.48	22.41
		3	0	22.53	22.66	22.60
		3	3	22.56	22.66	22.55
		6	0	22.39	22.37	22.36

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	22.48	22.50	22.38
		1	5	22.56	22.53	22.51
		3	0	22.66	22.54	22.59
		3	3	22.55	22.55	22.52
		6	0	22.47	22.32	22.35
	16QAM	1	0	22.47	22.42	22.39
		1	5	22.57	22.52	22.55
		3	0	22.61	22.62	22.53
		3	3	22.68	22.60	22.55
		6	0	22.37	22.30	22.33

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	22.58	22.55	22.48
		1	5	22.66	22.54	22.56
		3	0	22.68	22.67	22.66
		3	3	22.70	22.68	22.65
		6	0	22.51	22.45	22.41
	16QAM	1	0	22.54	22.46	22.43
		1	5	22.59	22.46	22.47
		3	0	22.64	22.65	22.59
		3	3	22.64	22.65	22.59
		6	0	22.36	22.33	22.37

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	22.43	22.35	22.39
		1	5	22.41	22.45	22.46
		3	0	22.58	22.53	22.54
		3	3	22.55	22.60	22.58
		6	0	22.24	22.36	22.34
	16QAM	1	0	22.40	22.36	22.31
		1	5	22.33	22.38	22.40
		3	0	22.47	22.35	22.51
		3	3	22.45	22.36	22.57
		6	0	22.18	22.13	22.20

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	22.48	/
		1	5	/	22.53	/
		3	0	/	22.59	/
		3	3	/	22.62	/
		6	0	/	22.37	/
	16QAM	1	0	/	22.38	/
		1	5	/	22.40	/
		3	0	/	22.48	/
		3	3	/	22.50	/
		6	0	/	22.26	/

LTE Band 71

Band/BW	Modulation	RB Size	RB Offset	Low CH 133147	Mid CH 133297	High CH 133447
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
71/ 5	QPSK	1	0	22.67	22.57	22.63
		1	5	22.62	22.71	22.64
		3	0	22.76	22.75	22.79
		3	3	22.82	22.75	22.73
		6	0	22.86	22.92	22.88
	16QAM	1	0	22.54	22.64	22.67
		1	5	22.69	22.54	22.61
		3	0	22.73	22.72	22.65
		3	3	22.70	22.66	22.67
		6	0	22.74	22.64	22.67

Band/BW	Modulation	RB Size	RB Offset	Low CH 133172	Mid CH 133297	High CH 133422
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
71/ 10	QPSK	1	0	22.68	22.62	22.66
		1	5	22.76	22.75	22.61
		3	0	22.75	22.79	22.73
		3	3	22.78	22.77	22.82
		6	0	22.88	22.82	22.87
	16QAM	1	0	22.60	22.55	22.57
		1	5	22.59	22.64	22.59
		3	0	22.60	22.67	22.69
		3	3	22.70	22.66	22.73
		6	0	22.68	22.73	22.73

Band/BW	Modulation	RB Size	RB Offset	Low CH 133197	Mid CH 133297	High CH 133397
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
71/ 15	QPSK	1	0	22.68	22.69	22.63
		1	5	22.66	22.61	22.57
		3	0	22.79	22.74	22.80
		3	3	22.78	22.82	22.71
		6	0	22.84	22.87	22.74
	16QAM	1	0	22.66	22.57	22.67
		1	5	22.57	22.58	22.62
		3	0	22.65	22.63	22.68
		3	3	22.81	22.64	22.68
		6	0	22.81	22.64	22.68

Band/BW	Modulation	RB Size	RB Offset	Low CH 133222	Mid CH 133322	High CH 133372
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
71/ 20	QPSK	1	0	22.73	22.71	22.75
		1	5	22.77	22.76	22.72
		3	0	22.86	22.83	22.85
		3	3	22.87	22.85	22.84
		6	0	22.96	22.94	22.89
	16QAM	1	0	22.69	22.68	22.71
		1	5	22.72	22.68	22.63
		3	0	22.75	22.73	22.79
		3	3	22.85	22.78	22.79
		6	0	22.83	22.79	22.77

LTE Band 85

Band/BW	Modulation	RB Size	RB Offset	Low CH 134027	Mid CH 134092	High CH 134157
				Frequency 700.5 MHz	Frequency 707 MHz	Frequency 713.5 MHz
85/ 5	QPSK	1	0	22.71	22.71	22.59
		1	5	22.74	22.75	22.61
		3	0	22.69	22.65	22.76
		3	3	22.82	22.80	22.73
		6	0	22.57	22.58	22.62
	16QAM	1	0	23.11	23.05	22.96
		1	5	23.10	23.05	23.11
		3	0	22.87	22.93	22.88
		3	3	22.84	22.88	22.84
		6	0	22.20	22.16	22.24

Band/BW	Modulation	RB Size	RB Offset	Low CH 134052	Mid CH 134092	High CH 134132
				Frequency 703 MHz	Frequency 707 MHz	Frequency 711 MHz
85/ 10	QPSK	1	0	22.72	22.73	22.69
		1	5	22.76	22.81	22.74
		3	0	22.81	22.80	22.86
		3	3	22.83	22.84	22.85
		6	0	22.64	22.71	22.68
	16QAM	1	0	23.23	23.13	23.09
		1	5	23.16	23.07	23.13
		3	0	22.97	22.96	22.94
		3	3	22.96	22.92	22.93
		6	0	22.29	22.24	22.25

LTE Band 8

Band/BW	Modulation	RB Size	RB Offset	Low CH 21632	Mid CH 21640	High CH 134157
				Frequency 898.2 MHz	Frequency 899 MHz	Frequency 899.8MHz
8/ 1.4	QPSK	1	0	22.45	22.44	22.40
		1	5	22.55	22.51	22.48
		3	0	22.26	22.25	22.34
		3	3	22.40	22.37	22.38
		6	0	22.46	22.44	22.44
	16QAM	1	0	22.12	22.23	22.20
		1	5	22.22	22.24	22.29
		3	0	22.27	22.16	22.16
		3	3	22.14	22.09	22.06
		6	0	22.15	22.25	22.23

Band/BW	Modulation	RB	Size	RB Offset	/	Mid CH 21640	/
					/	Frequency 899 MHz	/
8/ 3	QPSK	1	0	0	/	22.52	/
		1	5	5	/	22.59	/
		3	0	0	/	22.35	/
		3	3	3	/	22.50	/
		6	0	0	/	22.56	/
	16QAM	1	0	0	/	22.24	/
		1	5	5	/	22.33	/
		3	0	0	/	22.31	/
		3	3	3	/	22.18	/
		6	0	0	/	22.29	/

NB-IOT

LTE Band 12						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		23011	23095	23178
		Frequency (MHz)		699.1	707.5	715.8
3.75	BPSK	1	0	22.66	22.58	22.63
		1	47	22.62	22.61	22.64
	QPSK	1	0	22.65	22.64	22.62
		1	47	22.64	22.59	22.63
15	BPSK	1	0	22.65	22.62	22.68
		1	11	22.61	22.59	22.62
	QPSK	1	0	22.63	22.62	22.58
		1	11	22.63	22.63	22.65
		12	0	21.45	21.44	21.59

LTE Band 13						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		23181	23230	23278
		Frequency (MHz)		777.1	782	786.8
3.75	BPSK	1	0	22.68	22.71	22.64
		1	47	22.67	22.69	22.58
	QPSK	1	0	22.61	22.62	22.57
		1	47	22.67	22.68	22.56
15	BPSK	1	0	22.62	22.69	22.63
		1	11	22.61	22.60	22.51
	QPSK	1	0	22.63	22.62	22.61
		1	11	22.62	22.61	22.59
		12	0	21.59	21.55	21.46

LTE Band 71						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		133124	133297	133470
		Frequency (MHz)		663.2	680.5	697.8
3.75	BPSK	1	0	22.72	22.69	22.63
		1	47	22.78	22.71	22.67
	QPSK	1	0	22.76	22.73	22.65
		1	47	22.75	22.68	22.62
15	BPSK	1	0	22.78	22.76	22.71
		1	11	22.79	22.75	22.66
	QPSK	1	0	22.75	22.74	22.67
		1	11	22.77	22.75	22.71
		12	0	21.61	21.45	21.48

LTE Band 85						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		134004	134092	134180
		Frequency (MHz)		698.2	707	715.8
3.75	BPSK	1	0	22.75	22.63	22.72
		1	47	22.76	22.65	22.74
	QPSK	1	0	22.66	22.60	22.64
		1	47	22.74	22.59	22.69
15	BPSK	1	0	22.70	22.67	22.72
		1	11	22.69	22.72	22.68
	QPSK	1	0	22.68	22.70	22.71
		1	11	22.72	22.71	22.69
		12	0	21.65	21.63	21.67

LTE Band 8 (106) Part27						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		21627	21640	21653
		Frequency (MHz)		897.7	899	900.3
3.75	BPSK	1	0	22.68	22.67	22.65
		1	47	22.75	22.66	22.68
	QPSK	1	0	22.67	22.64	22.72
		1	47	22.73	22.72	22.74
15	BPSK	1	0	22.73	22.72	22.74
		1	11	22.59	22.65	22.66
	QPSK	1	0	22.62	22.67	22.64
		1	11	22.72	22.66	22.65
		12	0	21.47	21.46	21.38

ERP /EIRP

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	22.59	2.14	24.73	297.17	3
23095	707.5	22.63	2.14	24.77	299.92	3
23173	715.3	22.56	2.14	24.7	295.12	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	22.67	2.14	24.81	302.69	3
23095	707.5	22.61	2.14	24.75	298.54	3
23173	715.3	22.64	2.14	24.78	300.61	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.59	2.14	24.73	297.17	3
23095	707.5	22.57	2.14	24.71	295.8	3
23165	714.5	22.64	2.14	24.78	300.61	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.56	2.14	24.7	295.12	3
23095	707.5	22.66	2.14	24.8	302	3
23165	714.5	22.6	2.14	24.74	297.85	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.66	2.14	24.8	302	3
23095	707.5	22.55	2.14	24.69	294.44	3
23155	713.5	22.59	2.14	24.73	297.17	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.68	2.14	24.82	303.39	3
23095	707.5	22.62	2.14	24.76	299.23	3
23155	713.5	22.55	2.14	24.69	294.44	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.7	2.14	24.84	304.79	3
23095	707.5	22.68	2.14	24.82	303.39	3
23130	711	22.66	2.14	24.8	302	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.64	2.14	24.78	300.61	3
23095	707.5	22.65	2.14	24.79	301.3	3
23130	711	22.59	2.14	24.73	297.17	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.58	2.14	24.72	296.48	3
23230	782	22.6	2.14	24.74	297.85	3
23255	784.5	22.58	2.14	24.72	296.48	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.47	2.14	24.61	289.07	3
23230	782	22.38	2.14	24.52	283.14	3
23255	784.5	22.57	2.14	24.71	295.8	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23230	782	22.62	2.14	24.76	299.23	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23230	782	22.5	2.14	24.64	291.07	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 71

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133147	665.5	22.74	2.14	24.88	307.61	1
133297	680.5	22.72	2.14	24.86	306.2	1
133447	695.5	22.67	2.14	24.81	302.69	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133147	665.5	22.86	2.14	25	316.23	1
133297	680.5	22.92	2.14	25.06	320.63	1
133447	695.5	22.88	2.14	25.02	317.69	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133172	668	22.88	2.14	25.02	317.69	1
133297	680.5	22.82	2.14	24.96	313.33	1
133422	693	22.87	2.14	25.01	316.96	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133172	668	22.7	2.14	24.84	304.79	1
133297	680.5	22.73	2.14	24.87	306.9	1
133422	693	22.73	2.14	24.87	306.9	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133197	670.5	22.84	2.14	24.98	314.77	1
133297	680.5	22.87	2.14	25.01	316.96	1
133397	690.5	22.8	2.14	24.94	311.89	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133197	670.5	22.81	2.14	24.95	312.61	1
133297	680.5	22.64	2.14	24.78	300.61	1
133397	690.5	22.68	2.14	24.82	303.39	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133222	673	22.96	2.14	25.1	323.59	1
133322	683	22.94	2.14	25.08	322.11	1
133372	688	22.89	2.14	25.03	318.42	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133222	673	22.85	2.14	24.99	315.5	1
133322	683	22.79	2.14	24.93	311.17	1
133372	688	22.79	2.14	24.93	311.17	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 85

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134027	700.5	22.82	2.14	24.96	313.33	3
134092	707	22.8	2.14	24.94	311.89	3
134157	713.5	22.76	2.14	24.9	309.03	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134027	700.5	23.11	2.14	25.25	334.97	3
134092	707	23.05	2.14	25.19	330.37	3
134157	713.5	23.11	2.14	25.25	334.97	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134052	703	22.83	2.14	24.97	314.05	3
134092	707	22.84	2.14	24.98	314.77	3
134132	711	22.86	2.14	25	316.23	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134052	703	23.23	2.14	25.37	344.35	3
134092	707	23.13	2.14	25.27	336.51	3
134132	711	23.13	2.14	25.27	336.51	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 8

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21632	898.2	22.55	2.14	24.69	294.44	3
21640	899	22.51	2.14	24.65	291.74	3
21648	899.8	22.48	2.14	24.62	289.73	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21632	898.2	22.27	2.14	24.41	276.06	3
21640	899	22.25	2.14	24.39	274.79	3
21648	899.8	22.29	2.14	24.43	277.33	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21640	899	22.59	2.14	24.73	297.17	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21640	899	22.33	2.14	24.47	279.9	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B12 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23011	699.1	22.66	2.14	24.8	302	3
23095	707.5	22.61	2.14	24.75	298.54	3
23178	715.8	22.64	2.14	24.78	300.61	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23011	699.1	22.65	2.14	24.79	301.3	3
23095	707.5	22.64	2.14	24.78	300.61	3
23178	715.8	22.63	2.14	24.77	299.92	3

LTE B12 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23011	699.1	22.65	2.14	24.79	301.3	3
23095	707.5	22.62	2.14	24.76	299.23	3
23178	715.8	22.68	2.14	24.82	303.39	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23011	699.1	22.63	2.14	24.77	299.92	3
23095	707.5	22.63	2.14	24.77	299.92	3
23178	715.8	22.65	2.14	24.79	301.3	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B13 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23181	777.1	22.68	2.14	24.82	303.39	3
23230	782	22.71	2.14	24.85	305.49	3
23278	786.8	22.64	2.14	24.78	300.61	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23181	777.1	22.67	2.14	24.81	302.69	3
23230	782	22.68	2.14	24.82	303.39	3
23278	786.8	22.57	2.14	24.71	295.8	3

LTE B13 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23181	777.1	22.62	2.14	24.76	299.23	3
23230	782	22.69	2.14	24.83	304.09	3
23278	786.8	22.63	2.14	24.77	299.92	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23181	777.1	22.63	2.14	24.77	299.92	3
23230	782	22.62	2.14	24.76	299.23	3
23278	786.8	22.61	2.14	24.75	298.54	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B71 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133124	663.2	22.78	2.14	24.92	310.46	1
133297	680.5	22.71	2.14	24.85	305.49	1
133470	697.8	22.67	2.14	24.81	302.69	1

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133124	663.2	22.76	2.14	24.9	309.03	1
133297	680.5	22.73	2.14	24.87	306.9	1
133470	697.8	22.65	2.14	24.79	301.3	1

LTE B71 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133124	663.2	22.79	2.14	24.93	311.17	1
133297	680.5	22.76	2.14	24.9	309.03	1
133470	697.8	22.71	2.14	24.85	305.49	1

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133124	663.2	22.77	2.14	24.91	309.74	1
133297	680.5	22.75	2.14	24.89	308.32	1
133470	697.8	22.71	2.14	24.85	305.49	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B85 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134004	698.2	22.76	2.14	24.9	309.03	3
134092	707	22.65	2.14	24.79	301.3	3
134180	715.8	22.74	2.14	24.88	307.61	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134004	698.2	22.74	2.14	24.88	307.61	3
134092	707	22.6	2.14	24.74	297.85	3
134180	715.8	22.69	2.14	24.83	304.09	3

LTE B85 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134004	698.2	22.7	2.14	24.84	304.79	3
134092	707	22.72	2.14	24.86	306.2	3
134180	715.8	22.72	2.14	24.86	306.2	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
134004	698.2	22.72	2.14	24.86	306.2	3
134092	707	22.71	2.14	24.85	305.49	3
134180	715.8	22.71	2.14	24.85	305.49	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B8A 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21627	897.7	22.75	2.14	24.89	308.32	3
21640	899	22.67	2.14	24.81	302.69	3
21653	900.3	22.68	2.14	24.82	303.39	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21627	897.7	22.73	2.14	24.87	306.9	3
21640	899	22.72	2.14	24.86	306.2	3
21653	900.3	22.74	2.14	24.88	307.61	3

LTE B8A 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21627	897.7	22.73	2.14	24.87	306.9	3
21640	899	22.72	2.14	24.86	306.2	3
21653	900.3	22.74	2.14	24.88	307.61	3

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
21627	897.7	22.72	2.14	24.86	306.2	3
21640	899	22.67	2.14	24.81	302.69	3
21653	900.3	22.65	2.14	24.79	301.3	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

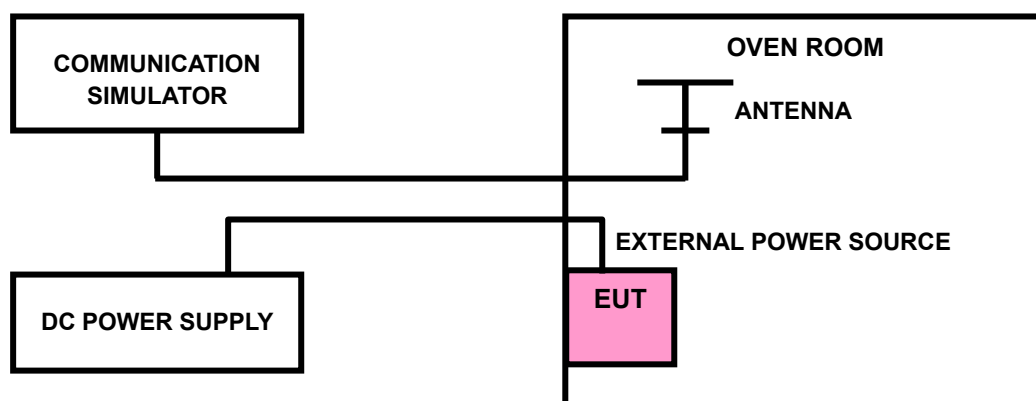



Test Report No.: W7L-240204W001RF03

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.


Note: VL = Low voltage(2.5V); VN/NV = Normal voltage(3.8V); VH = High voltage(4.5V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

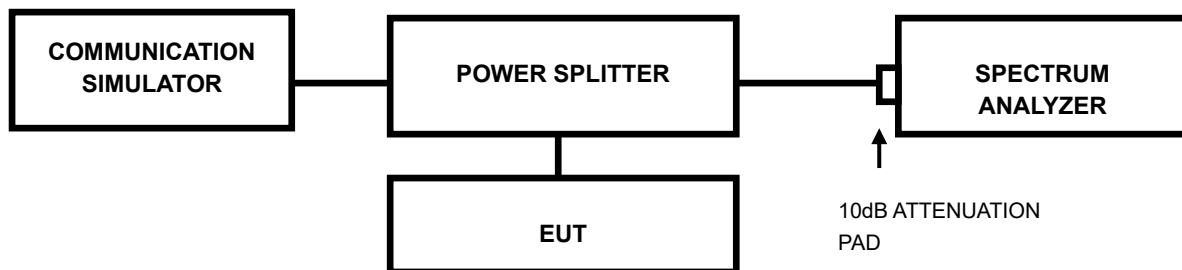

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-240204W001RF03

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

3.4.2 TEST SETUP

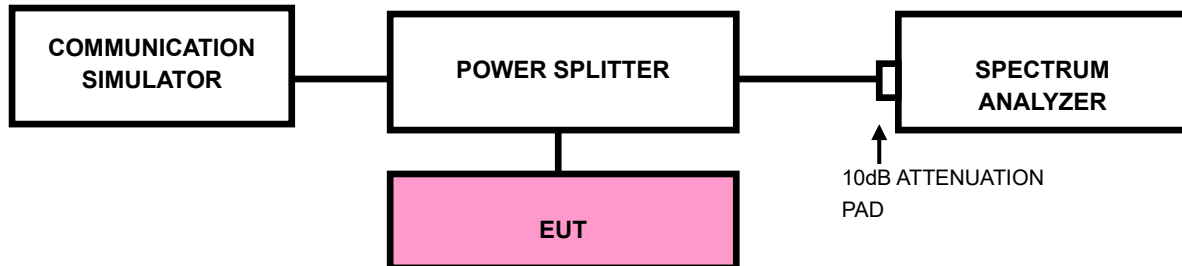

3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth
(EBW)
- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



Test Report No.: W7L-240204W001RF03

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.


FCC §27.1509 (a):

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) in watts by at least the following amounts: (a) For 900 MHz broadband operations in 897.5–900.5 MHz band by at least $43 + 10 \log (P)$ dB.

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

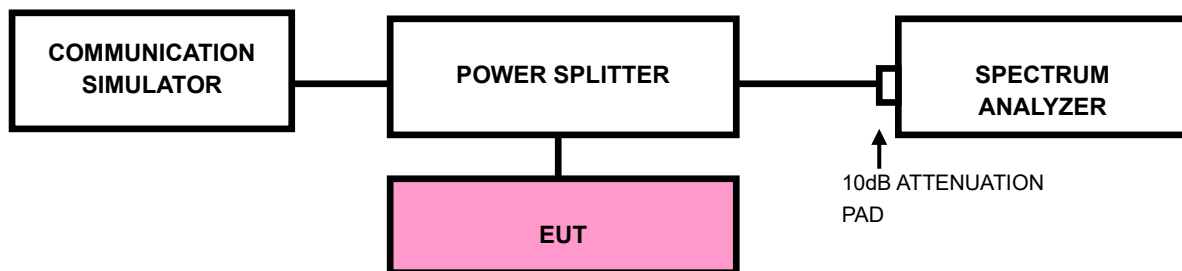



Test Report No.: W7L-240204W001RF03

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC §27.1509 (a):

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) in watts by at least the following amounts: (a) For 900 MHz broadband operations in 897.5–900.5 MHz band by at least $43 + 10 \log (P)$ dB.

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

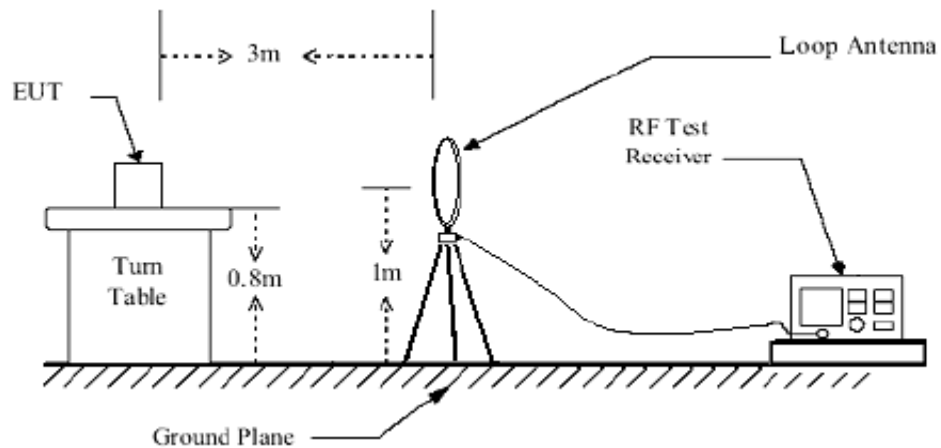

< Frequency Range 30MHz~1GHz >

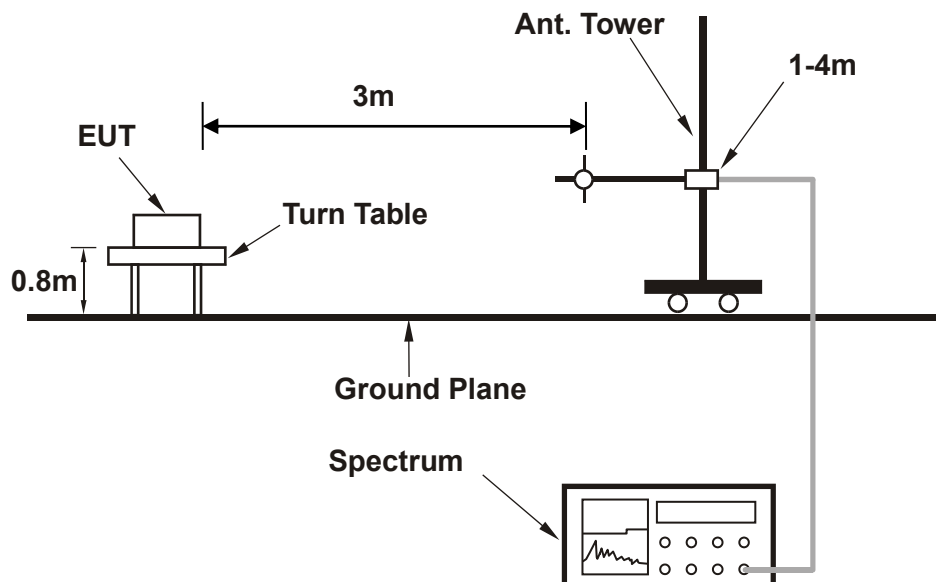

<Frequency Range above 1GHz>

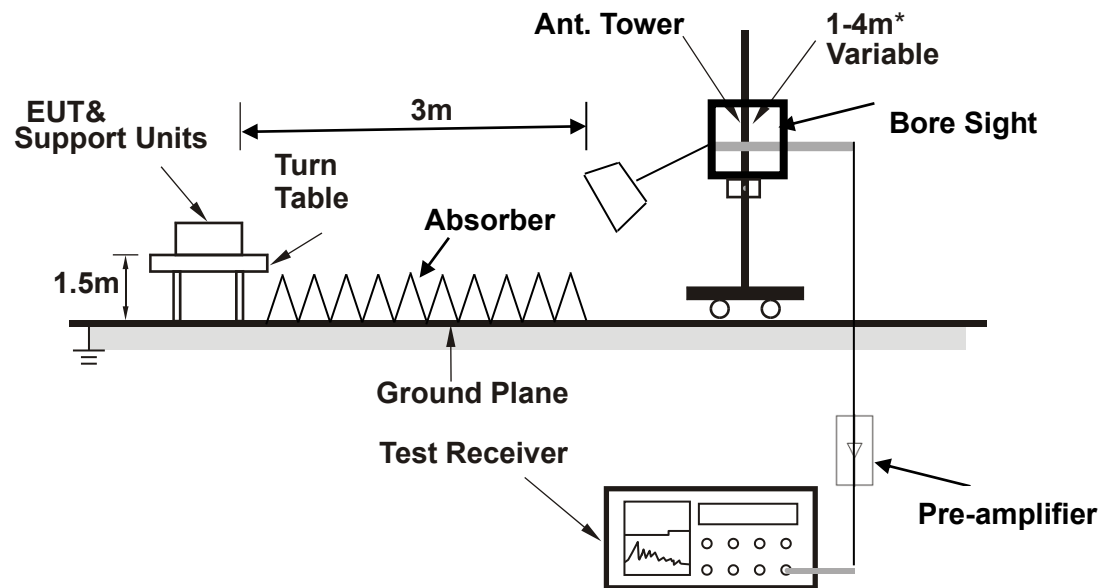

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

NB-IOT LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 23230	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	46.400	-65.03	-13.00	52.03	2.88	H	227.8	2.00
1	80.200	-65.40	-13.00	52.40	-5.69	H	280.5	1.00
1	106.550	-67.05	-13.00	54.05	-0.26	H	355.5	2.00
1	152.000	-64.98	-13.00	51.98	-5.25	H	280.5	1.00
1	238.650	-63.88	-13.00	50.88	2.47	H	280.5	1.00
1	339.900	-63.01	-13.00	50.01	6.06	H	127.4	2.00

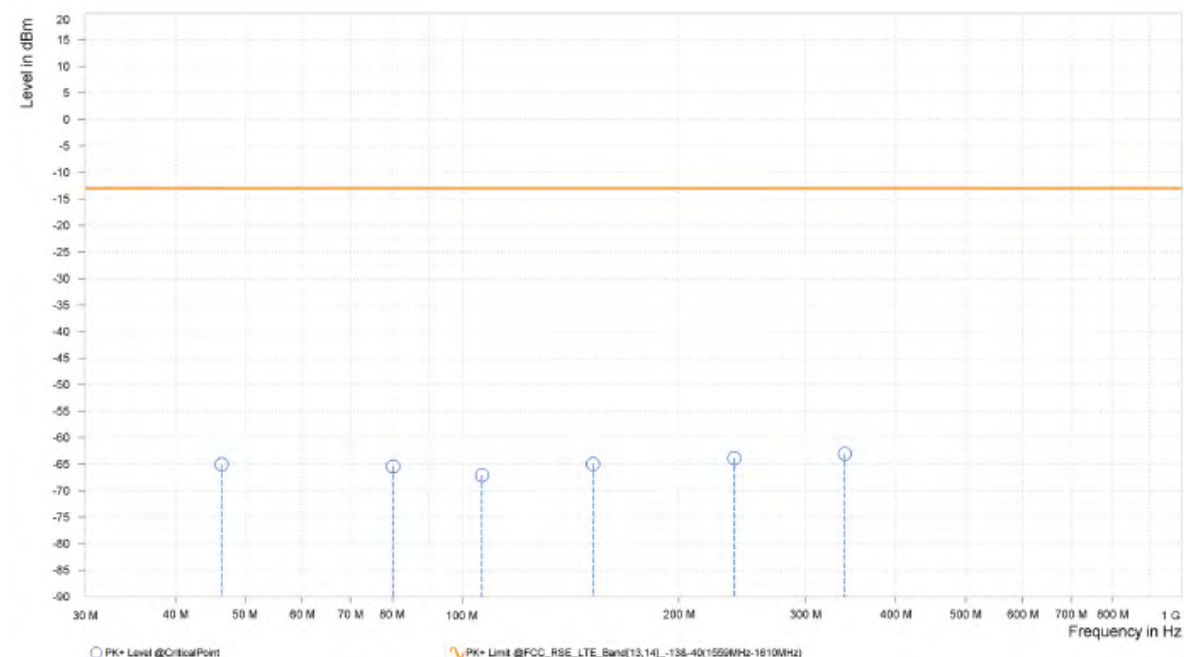

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	43.850	-64.22	-13.00	51.22	5.54	V	302	1.00
1	60.100	-67.94	-13.00	54.94	4.44	V	203.9	1.00
1	98.900	-69.86	-13.00	56.86	4.26	V	1	1.00
1	154.100	-74.55	-13.00	61.55	-2.44	V	359.1	1.00
1	198.500	-70.54	-13.00	57.54	1.14	V	203.9	1.00
1	276.750	-68.61	-13.00	55.61	3.20	V	203.9	1.00

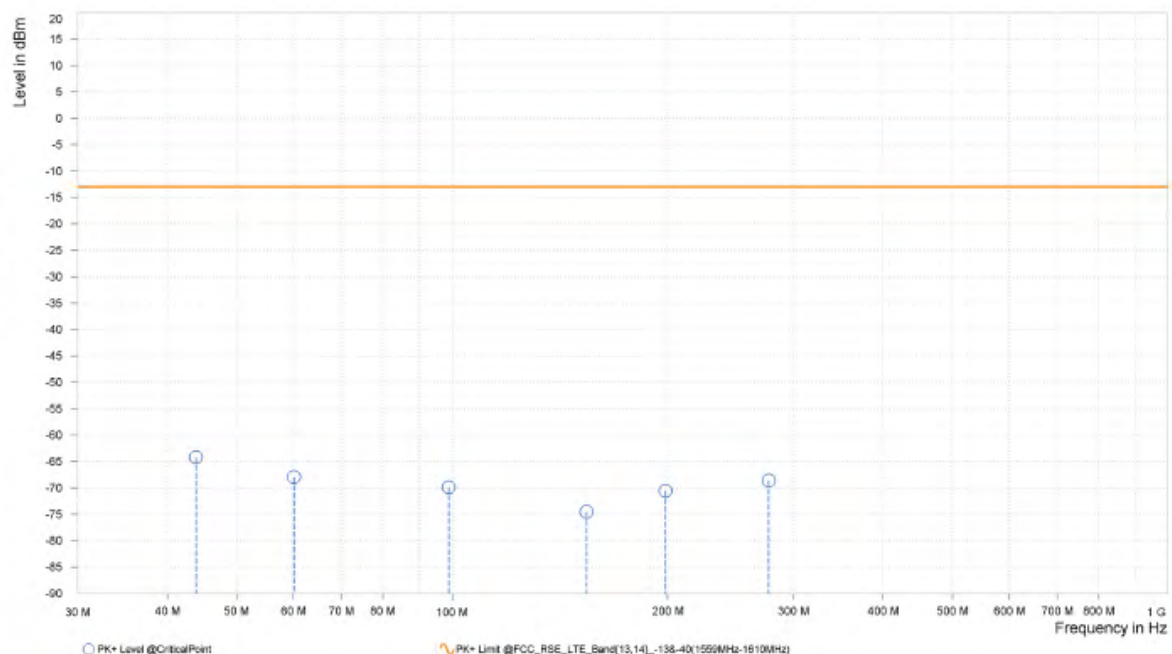

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,413.740	-57.91	-13.00	44.91	2.91	H	354.8	2.00
1	2,120.610	-51.16	-13.00	38.16	10.89	H	1	1.00

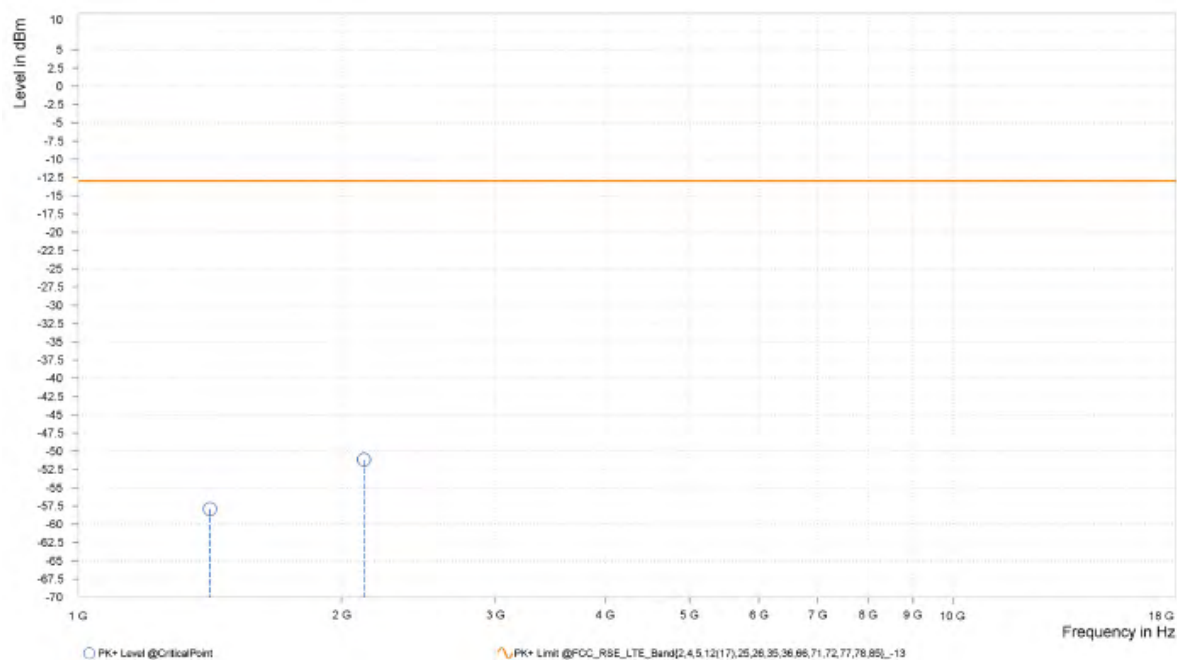

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,413.740	-53.33	-13.00	40.33	2.81	V	2.6	2.00
1	2,120.610	-51.45	-13.00	38.45	10.53	V	256.6	1.00

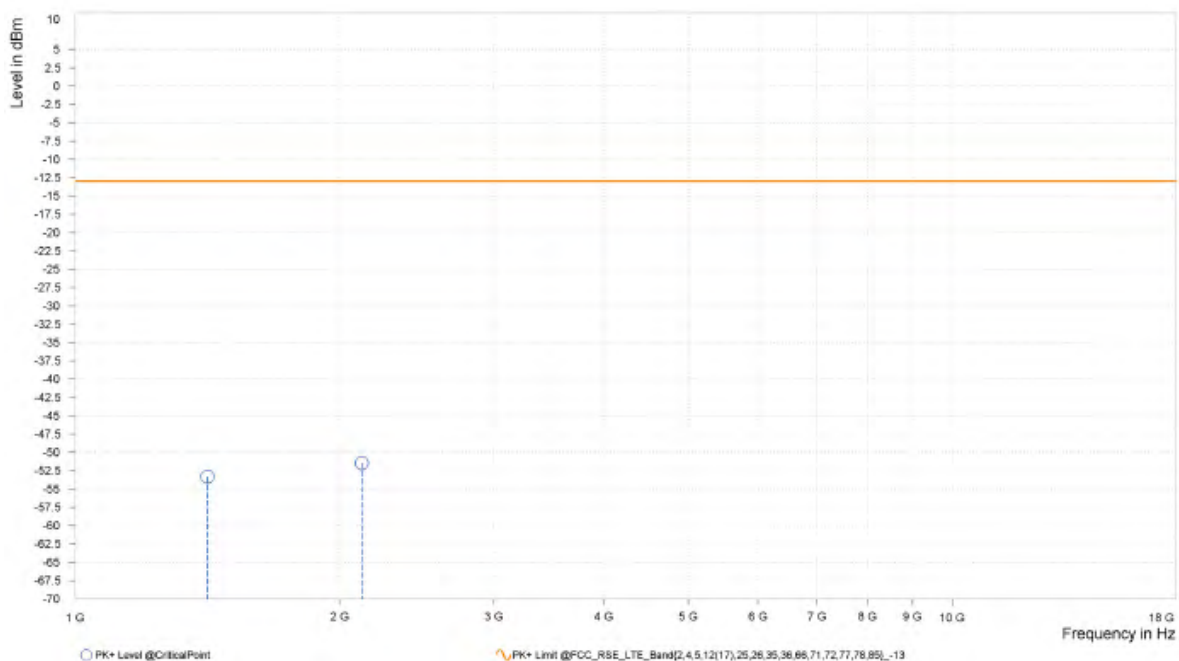

**CHANNEL BANDWIDTH: 3MHz / QPSK
CH23095**


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,412.300	-57.55	-13.00	44.55	3.05	H	355.4	2.00
1	2,118.450	-51.46	-13.00	38.46	10.80	H	355.4	2.00

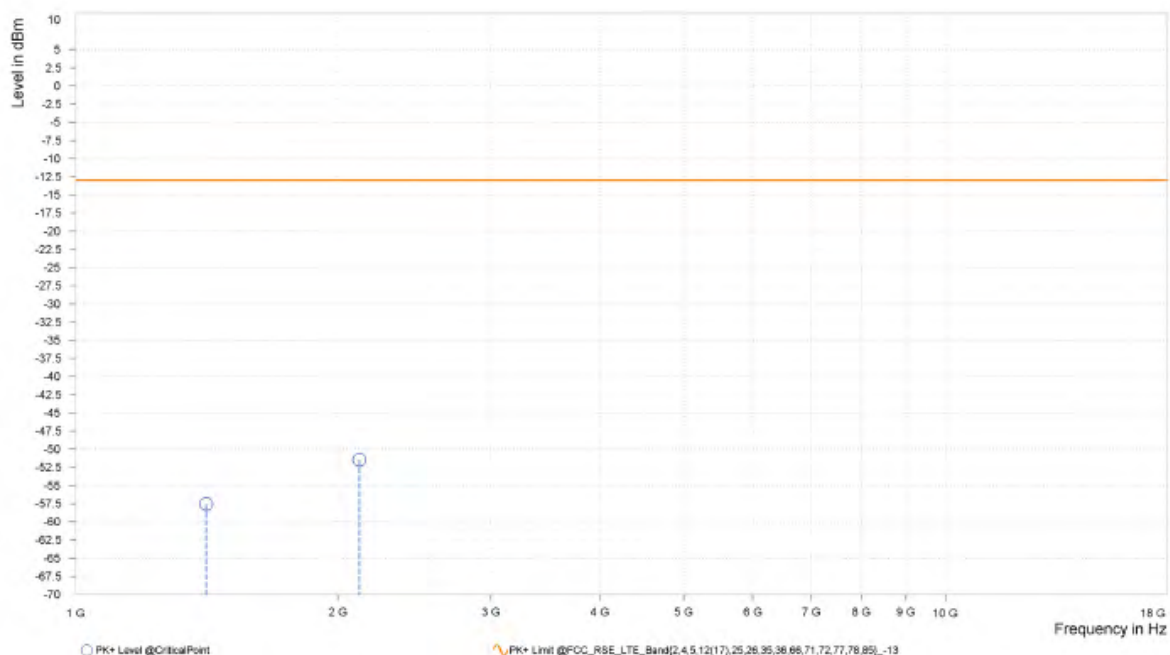

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,412.300	-55.81	-13.00	42.81	2.96	V	357.5	1.00
1	2,118.450	-51.98	-13.00	38.98	10.47	V	1	1.00

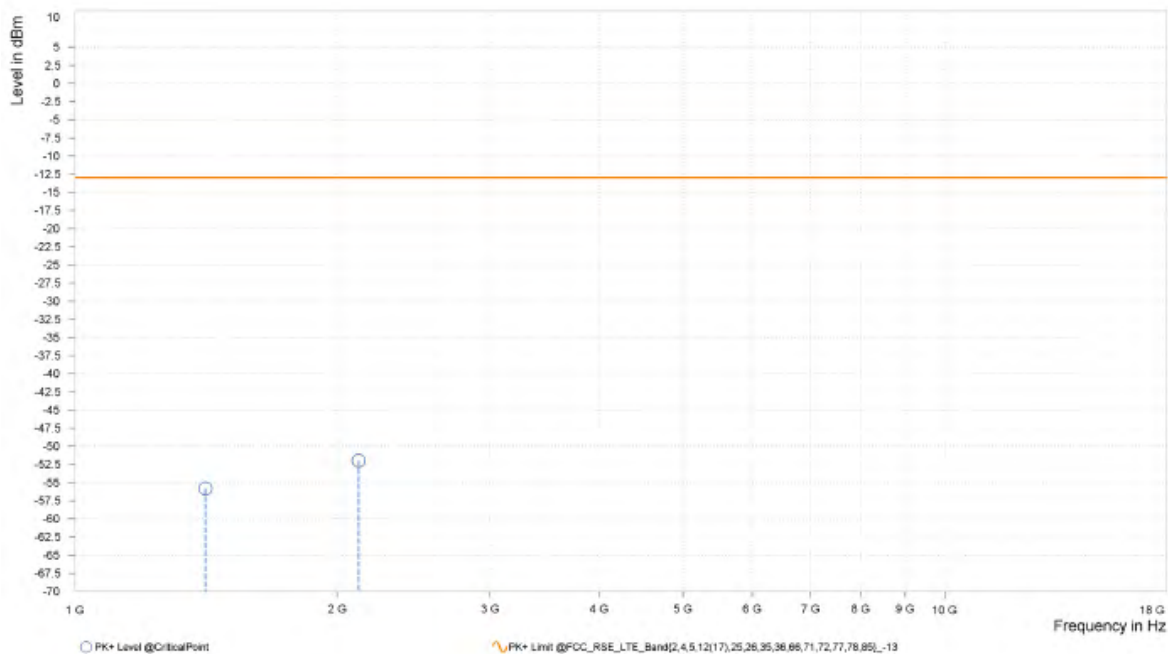


CHANNEL BANDWIDTH: 5MHz / QPSK

CH23095


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,410.500	-56.09	-13.00	43.09	3.34	H	2.6	2.00
1	2,115.750	-51.29	-13.00	38.29	10.67	H	224.4	1.00

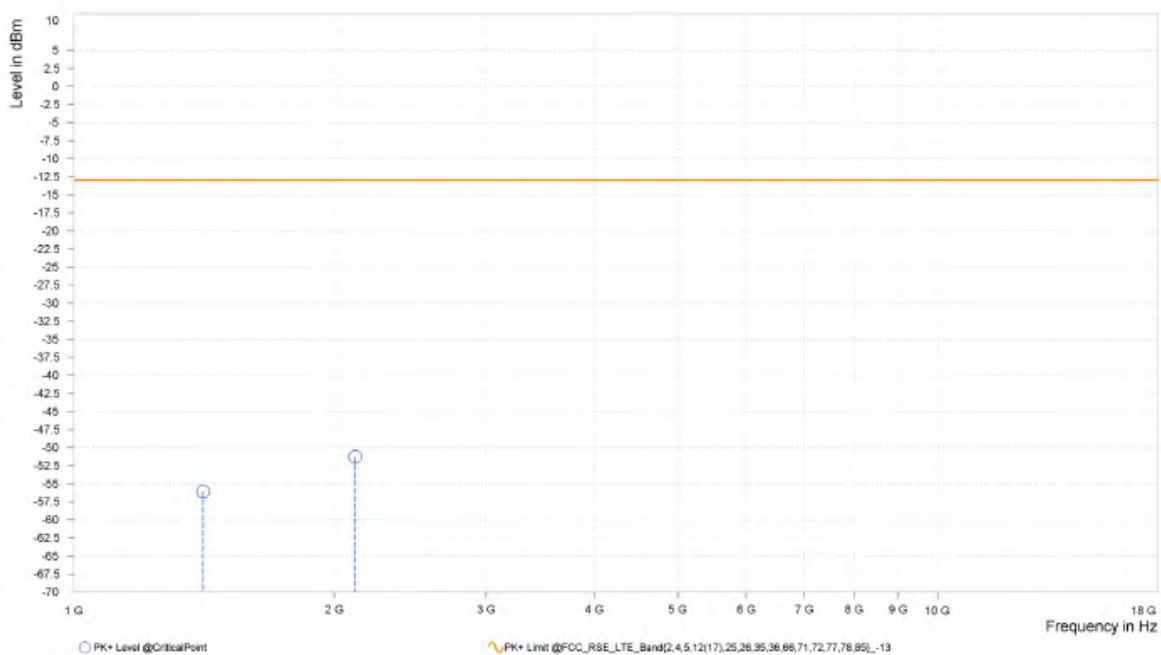

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,410.500	-54.50	-13.00	41.50	3.26	V	5.2	1.00
1	2,115.750	-51.67	-13.00	38.67	10.38	V	354.9	2.00

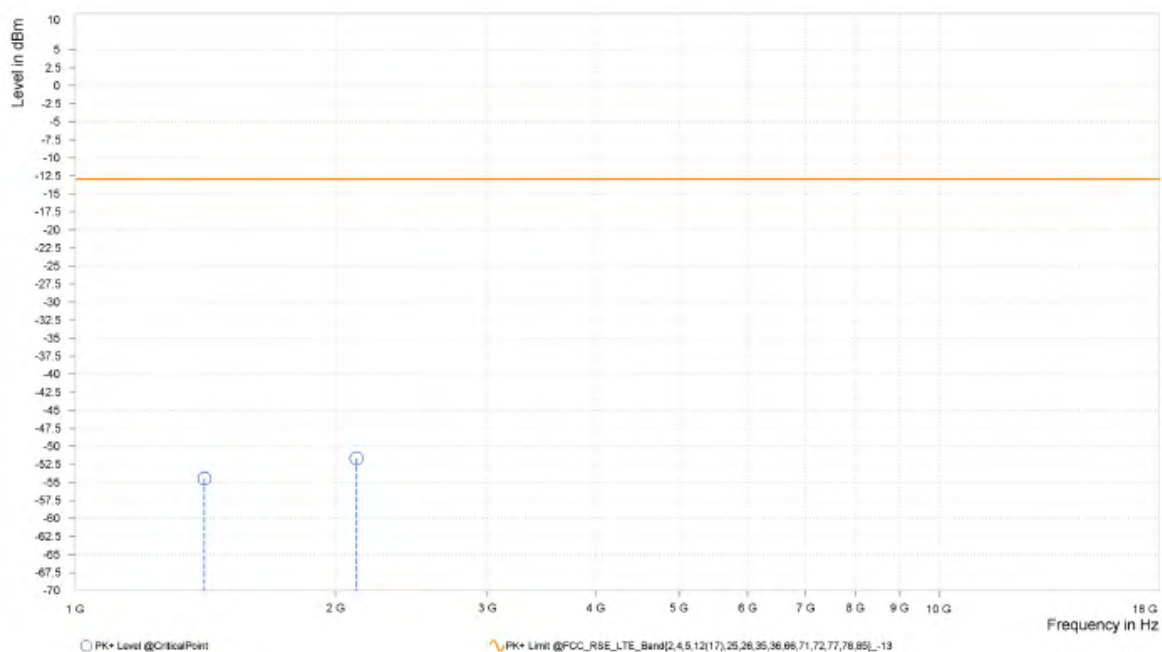


CHANNEL BANDWIDTH: 10MHz / QPSK

CH 23060


MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,399.000	-54.91	-13.00	41.91	4.97	H	135.8	2.00
1	2,098.500	-51.77	-13.00	38.77	9.95	H	229.2	1.00

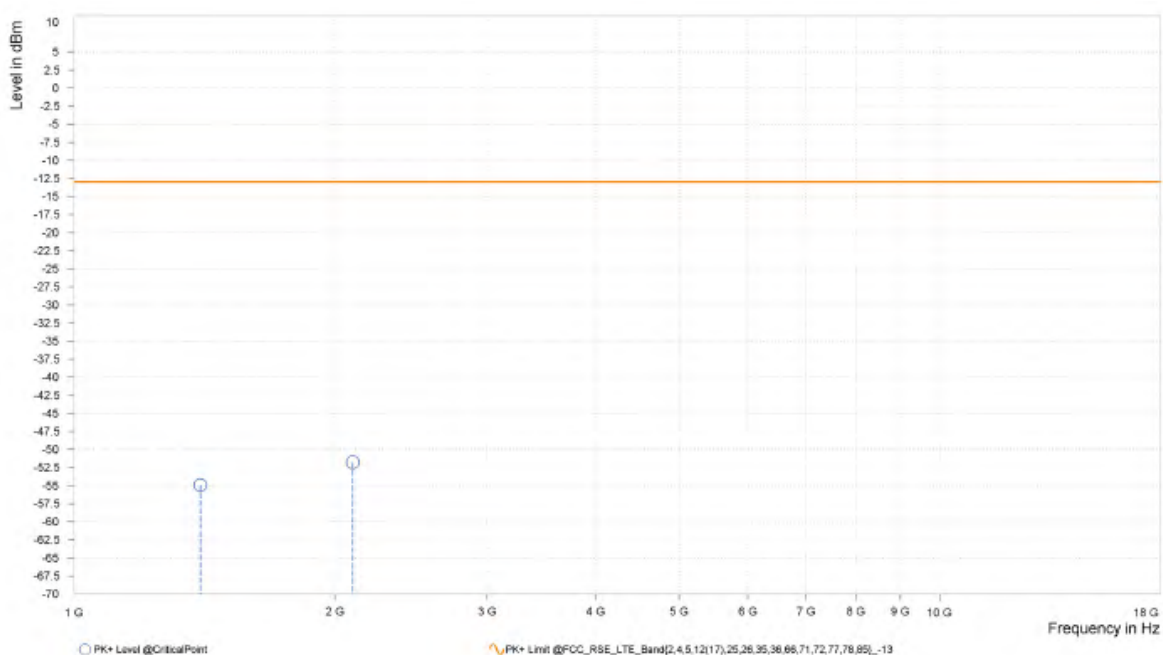

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,399.000	-54.68	-13.00	41.68	4.96	V	1	1.00
1	2,098.500	-51.80	-13.00	38.80	9.85	V	358.1	1.00

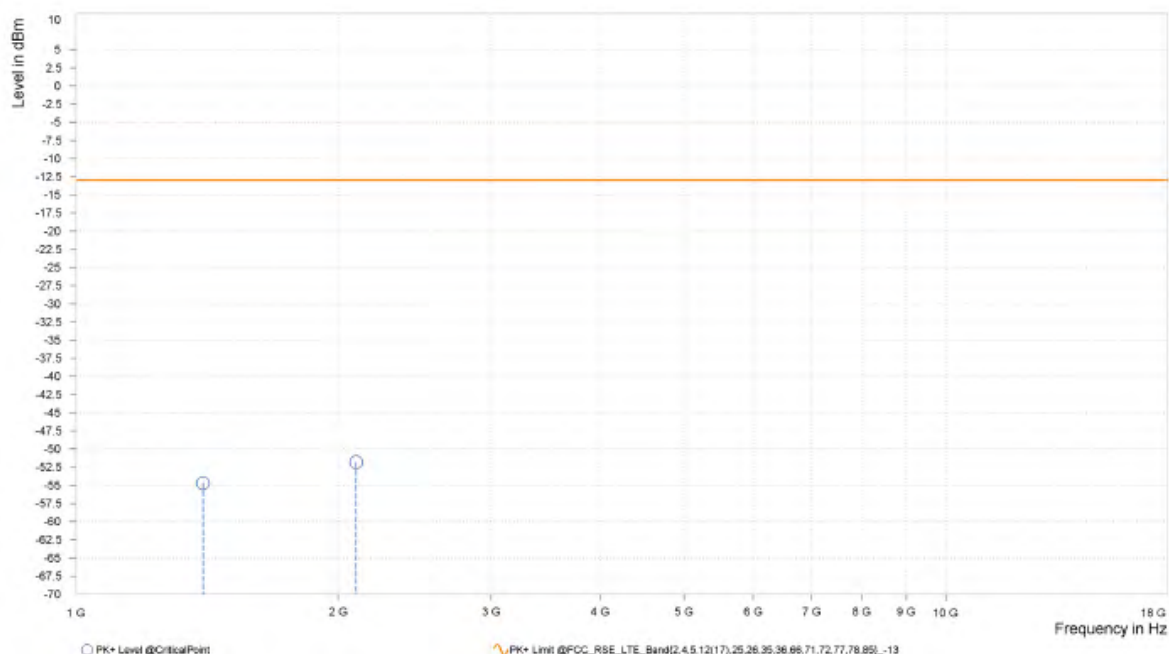

CH 23095


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,406.000	-56.86	-13.00	43.86	3.97	H	359	2.00
1	2,109.000	-51.27	-13.00	38.27	10.40	H	134.6	2.00

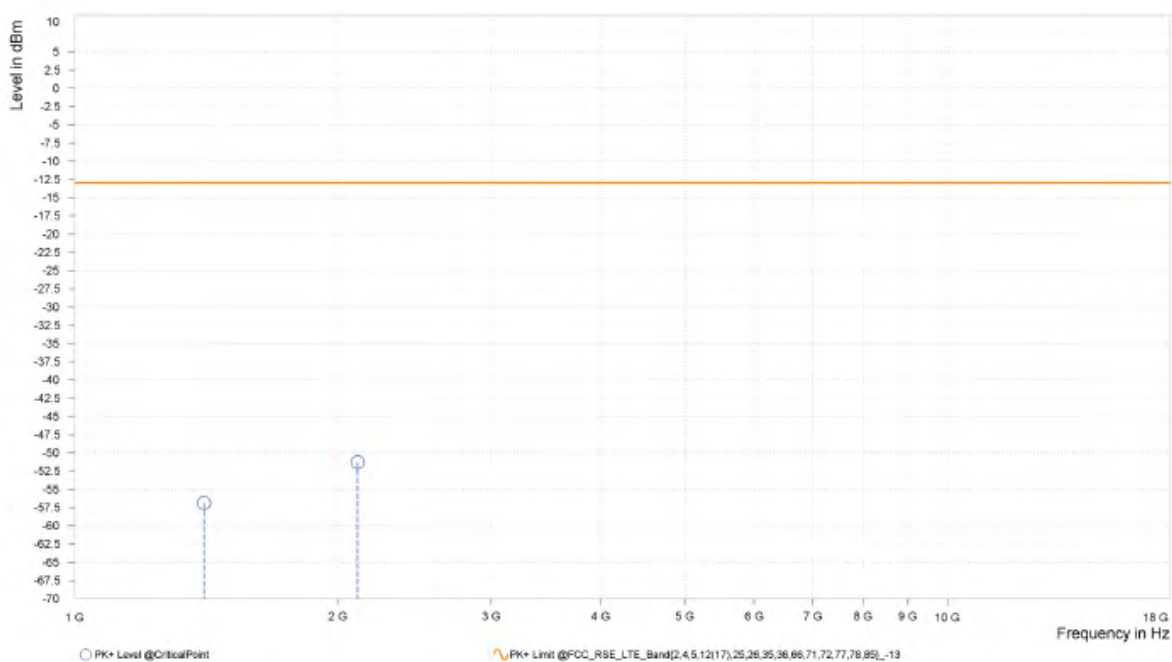

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,406.000	-56.21	-13.00	43.21	3.92	V	2.9	2.00
1	2,109.000	-51.81	-13.00	38.81	10.17	V	5	1.00

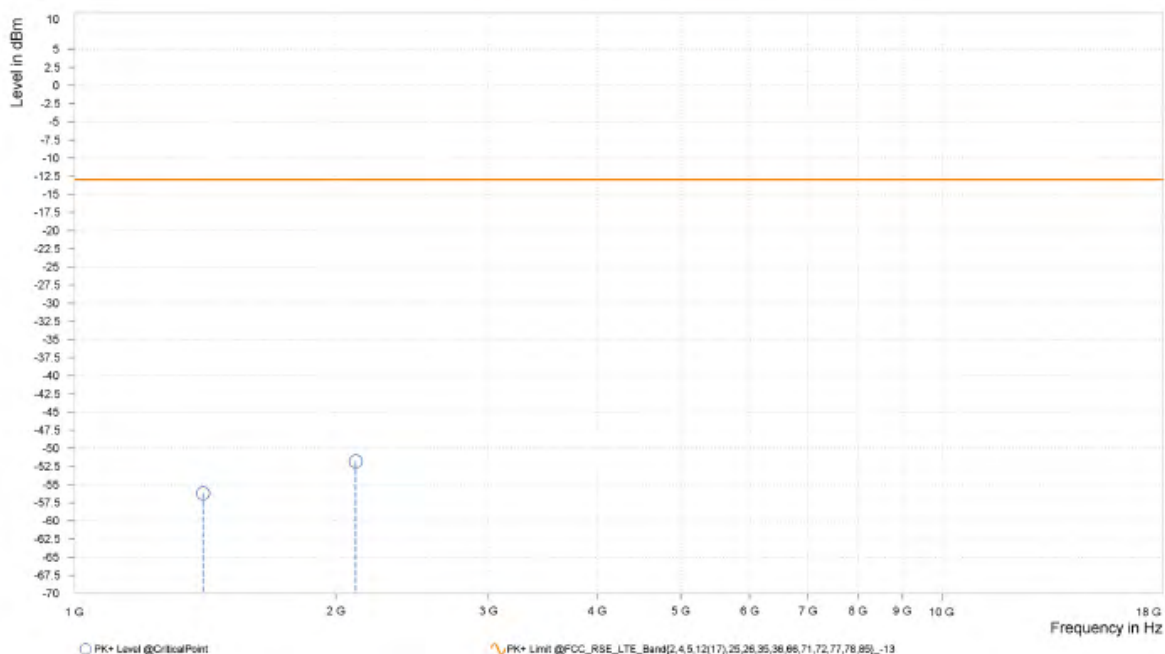

CH 23130


MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,413.000	-58.44	-13.00	45.44	2.98	H	355.4	2.00
1	2,119.500	-50.56	-13.00	37.56	10.84	H	355.4	2.00

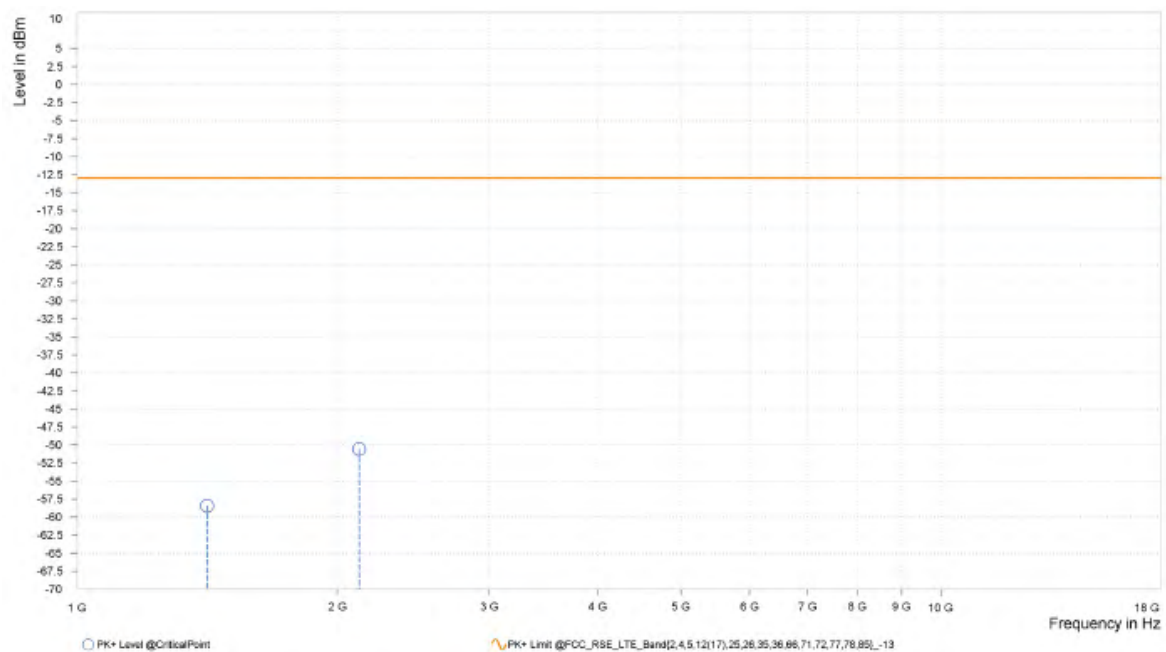

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,413.000	-56.90	-13.00	43.90	2.89	V	357.6	1.00
1	2,119.500	-51.62	-13.00	38.62	10.50	V	133.4	2.00

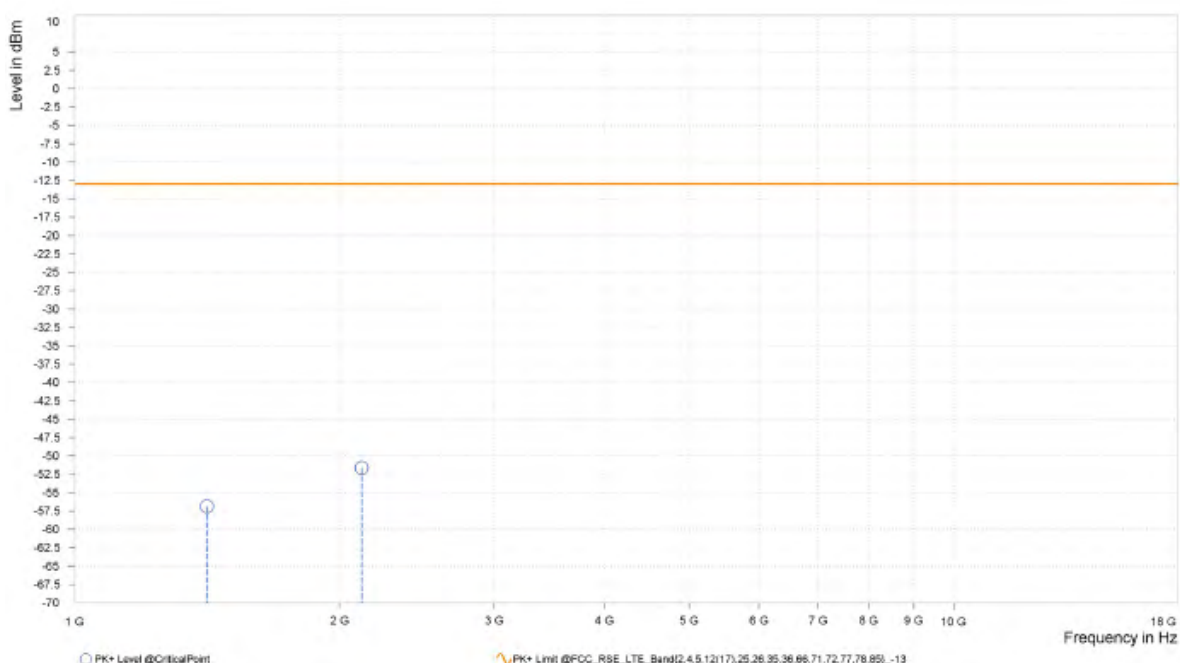


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205


MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,554.500	-55.40	-13.00	42.40	5.29	H	2.4	2.00
1	2,331.750	-49.70	-13.00	36.70	13.06	H	2.4	2.00

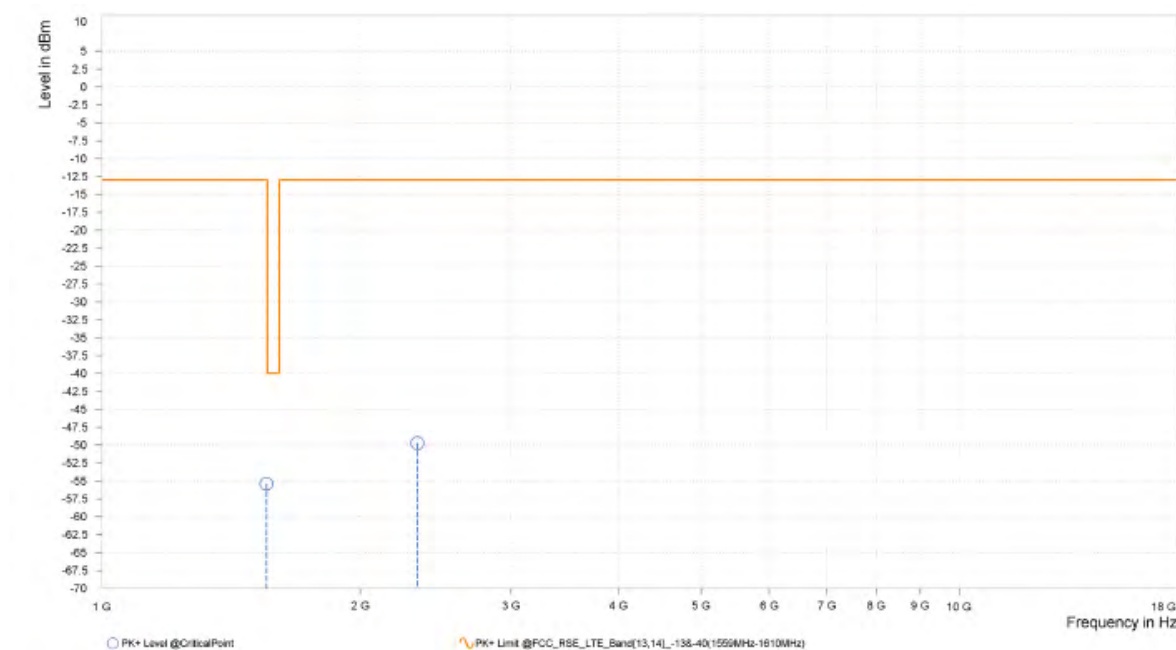

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,554.500	-55.83	-13.00	42.83	4.93	V	1	1.00
1	2,331.750	-49.00	-13.00	36.00	12.57	V	5.2	1.00

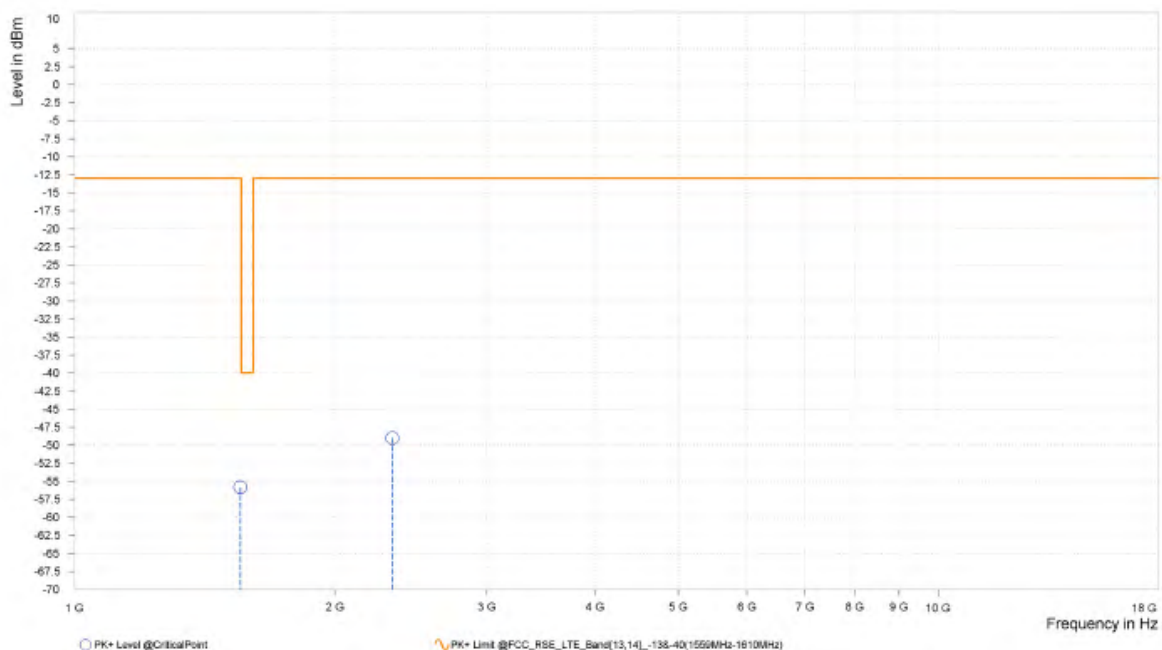

CH23230


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,559.500	-54.36	-40.00	14.36	5.35	H	1	1.00
1	2,339.250	-48.63	-13.00	35.63	13.06	H	359	2.00

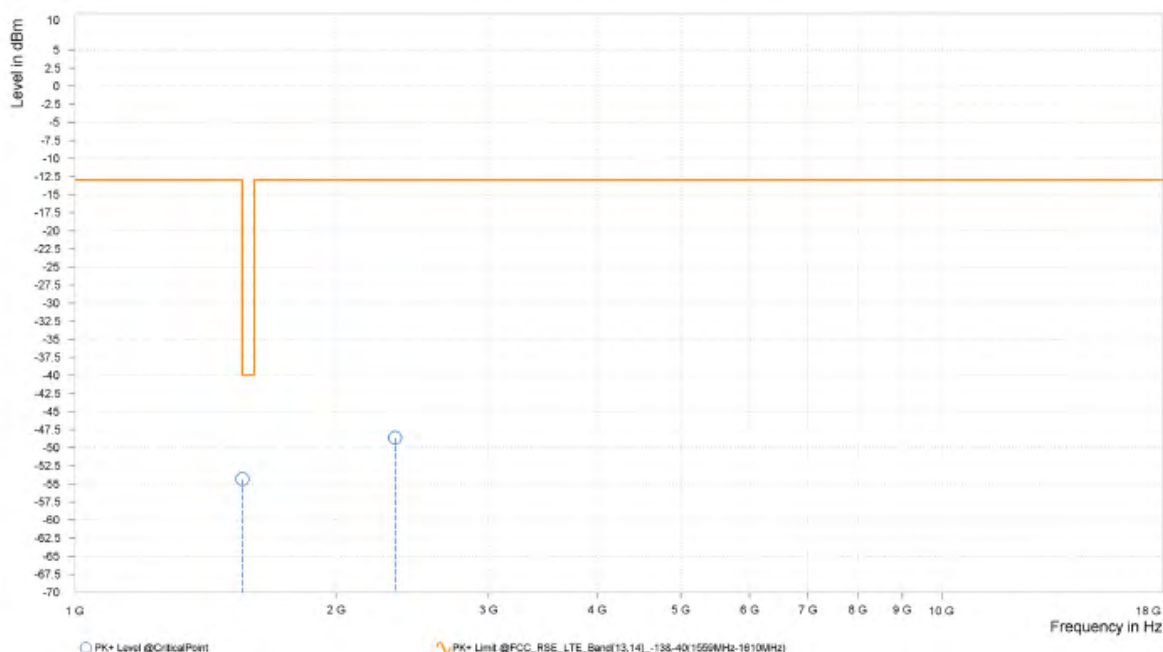

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,559.500	-55.75	-40.00	15.75	5.02	V	132.2	2.00
1	2,339.250	-49.47	-13.00	36.47	12.62	V	132.2	2.00

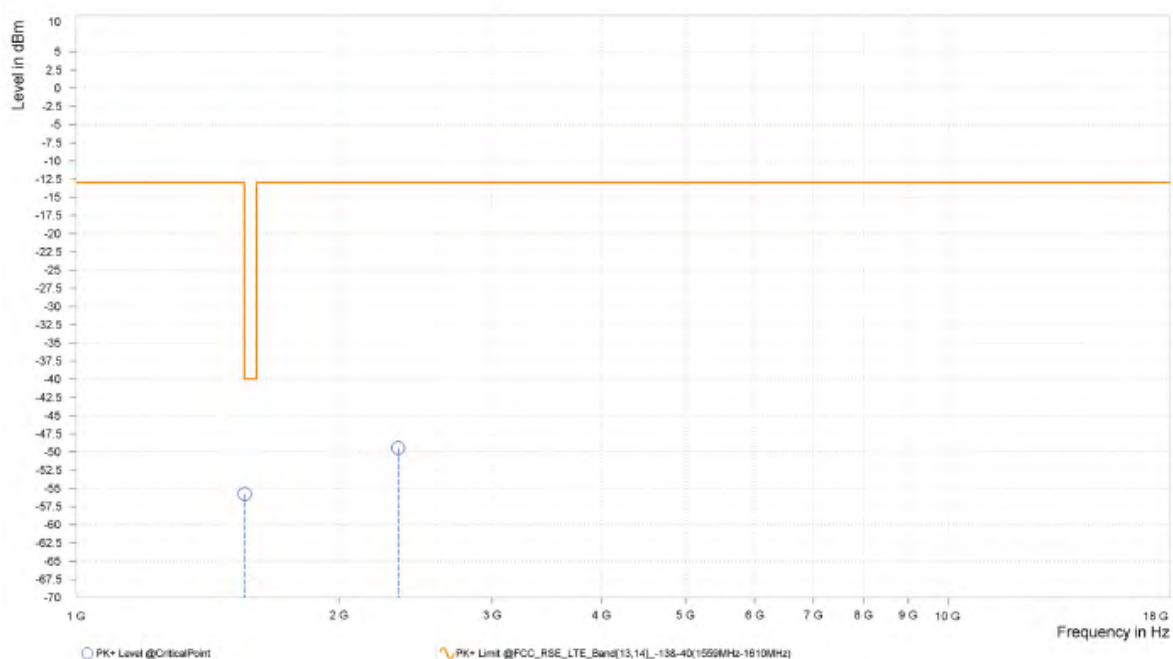

CH23255


MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,566.000	-49.05	-40.00	9.05	5.33	H	4.5	1.00
1	2,346.750	-48.23	-13.00	35.23	13.06	H	224.2	1.00

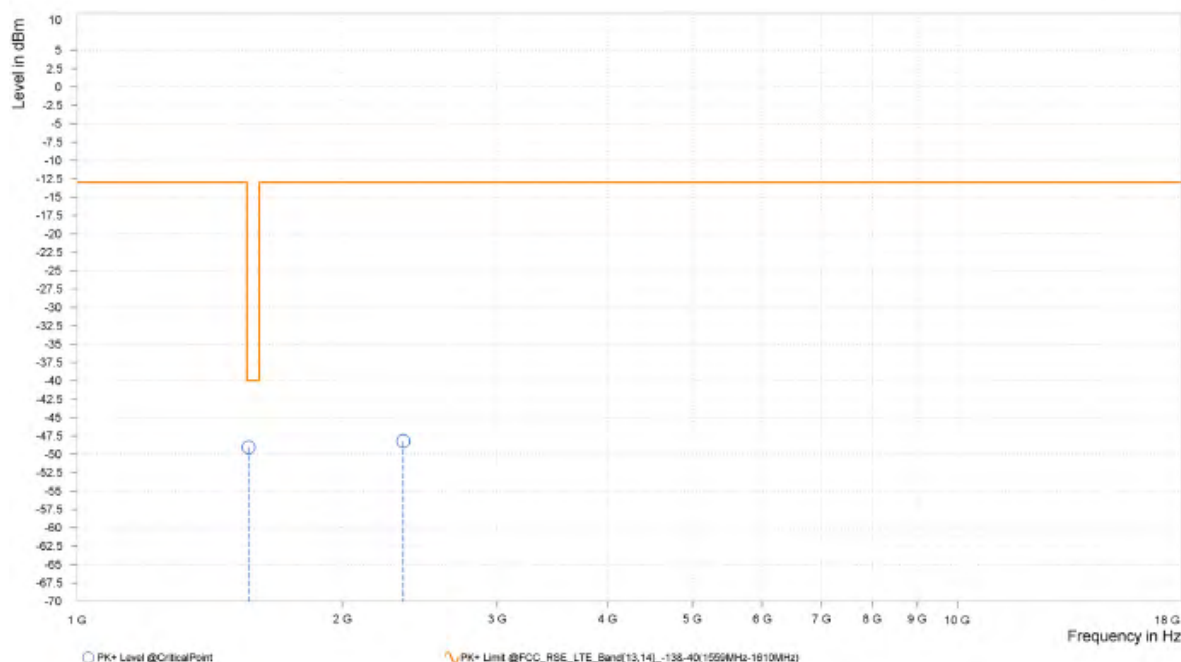

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,564.500	-54.92	-40.00	14.92	5.04	V	359	2.00
1	2,346.750	-50.16	-13.00	37.16	12.66	V	355	2.00

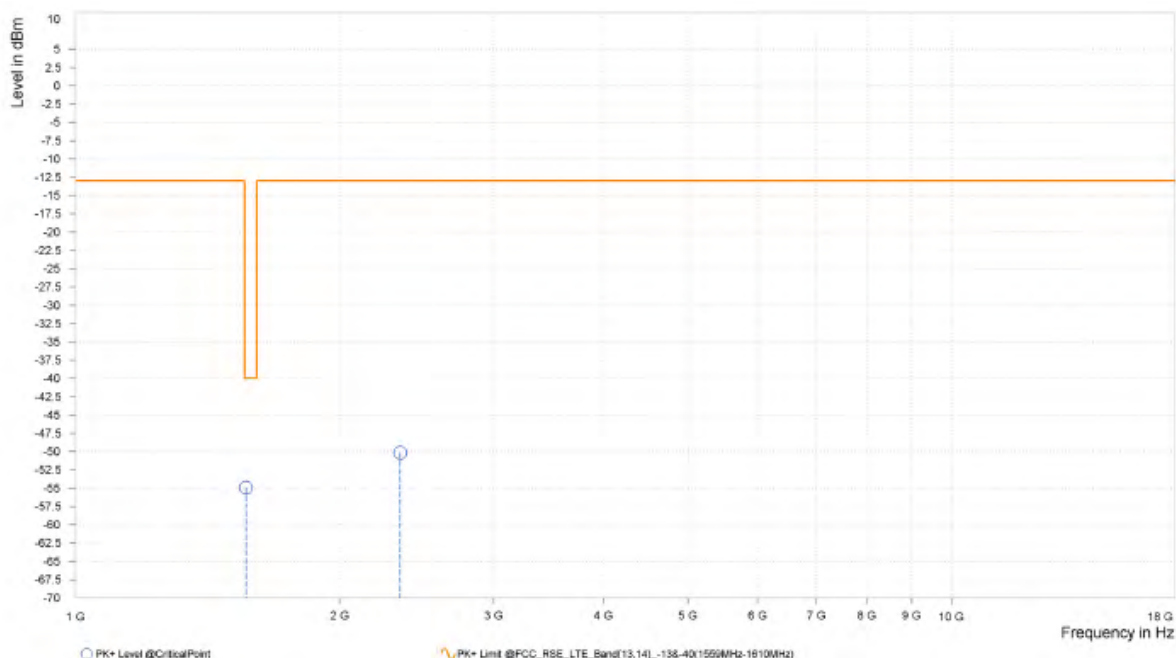

CHANNEL BANDWIDTH: 10MHz /QPSK


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,555.000	-55.08	-13.00	42.08	5.31	H	1	1.00
1	2,335.000	-45.28	-13.00	32.28	13.06	H	3.9	1.00

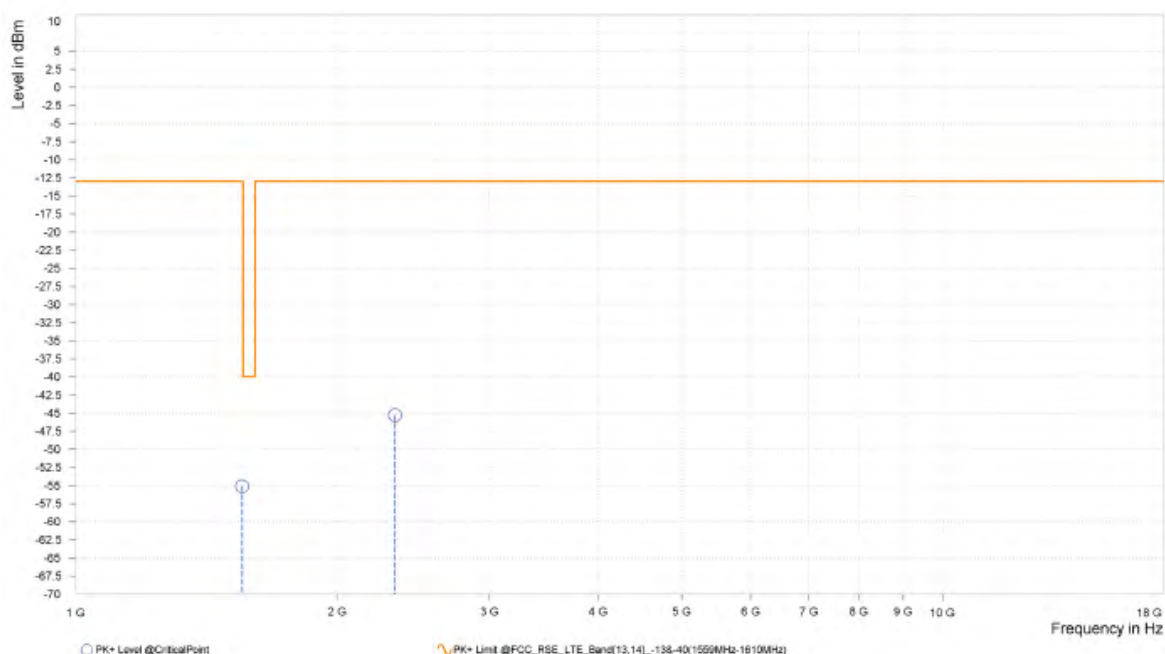

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,555.000	-55.57	-13.00	42.57	4.95	V	49.6	2.00
1	2,332.500	-49.84	-13.00	36.84	12.58	V	226.7	1.00

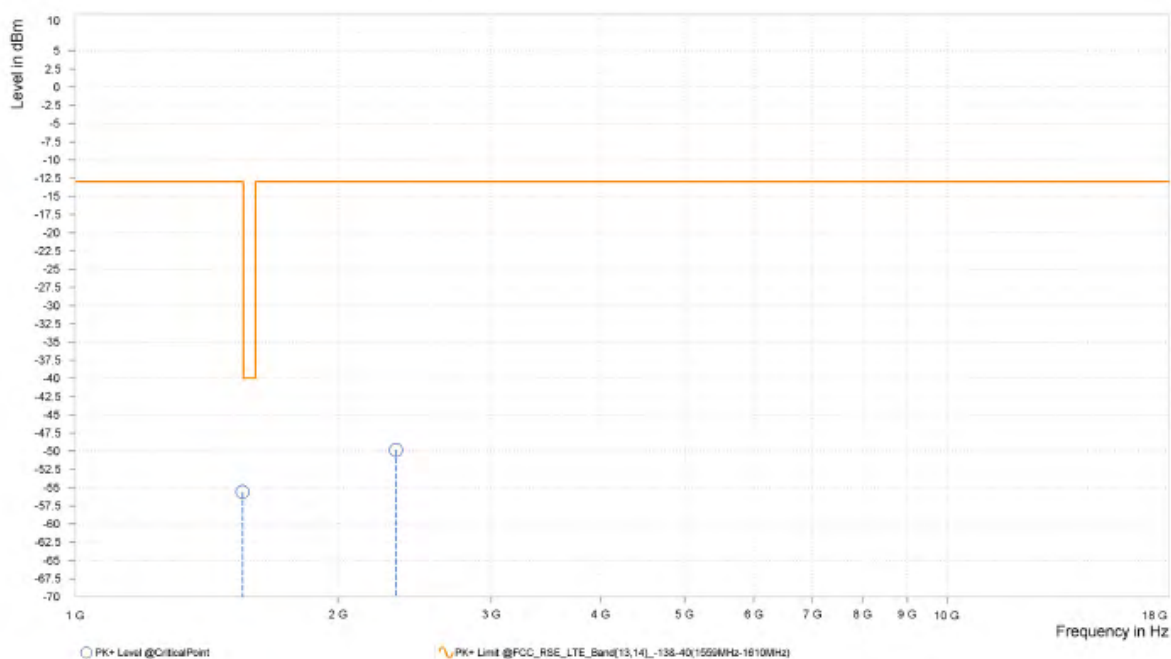


LTE Band 71

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,356.500	-55.14	-13.00	42.14	6.95	H	354.9	2.00
1	2,034.750	-52.15	-13.00	39.15	11.39	H	2.1	2.00

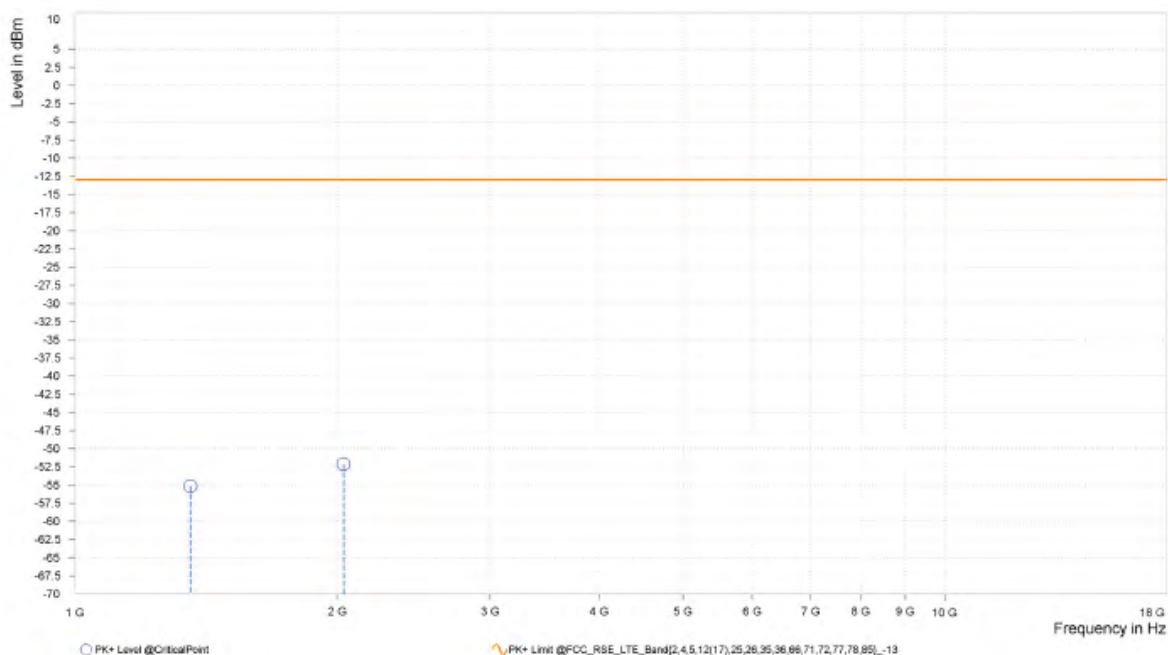

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,356.500	-54.67	-13.00	41.67	7.03	V	358.8	1.00
1	2,034.750	-51.31	-13.00	38.31	11.93	V	1	1.00

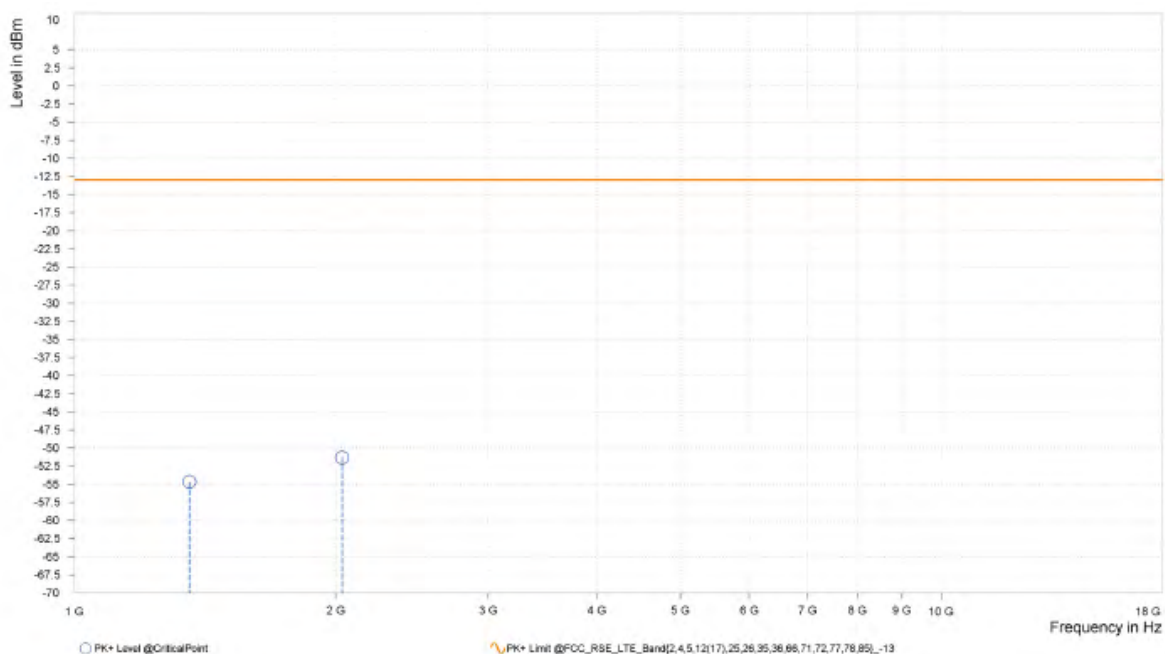


CHANNEL BANDWIDTH: 10MHz / QPSK

CH:133172


MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,327.000	-57.05	-13.00	44.05	4.45	H	4.5	1.00
1	1,990.500	-54.34	-13.00	41.34	9.58	H	1.2	2.00

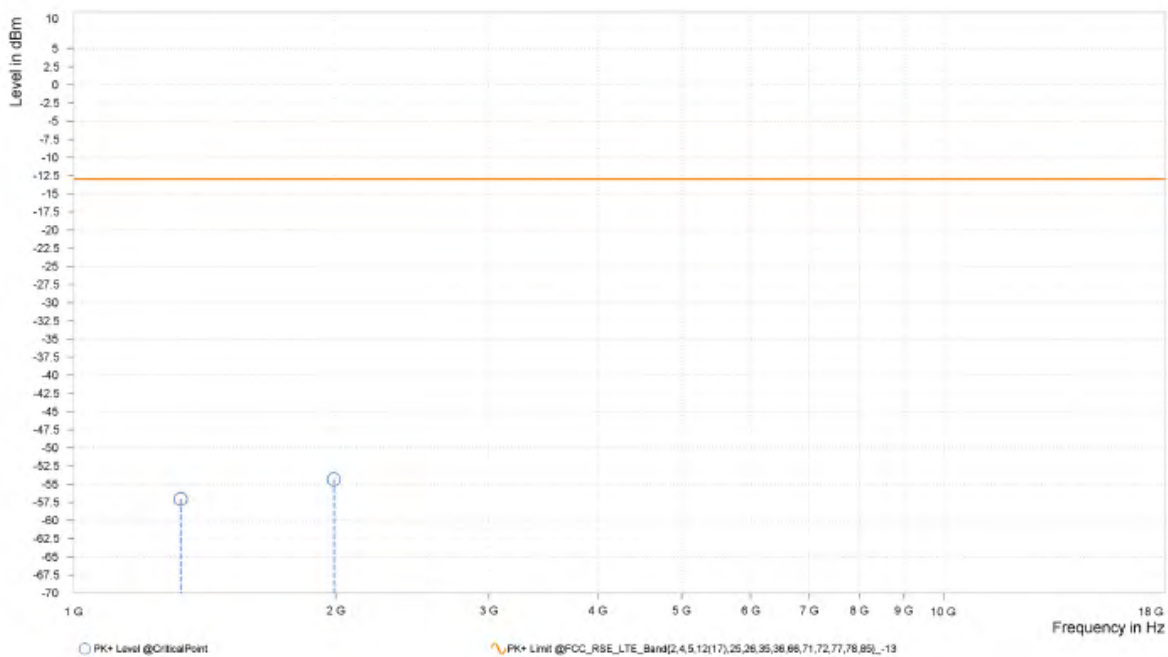

MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,327.000	-56.97	-13.00	43.97	4.51	V	359	2.00
1	1,990.500	-54.08	-13.00	41.08	9.54	V	359	1.00

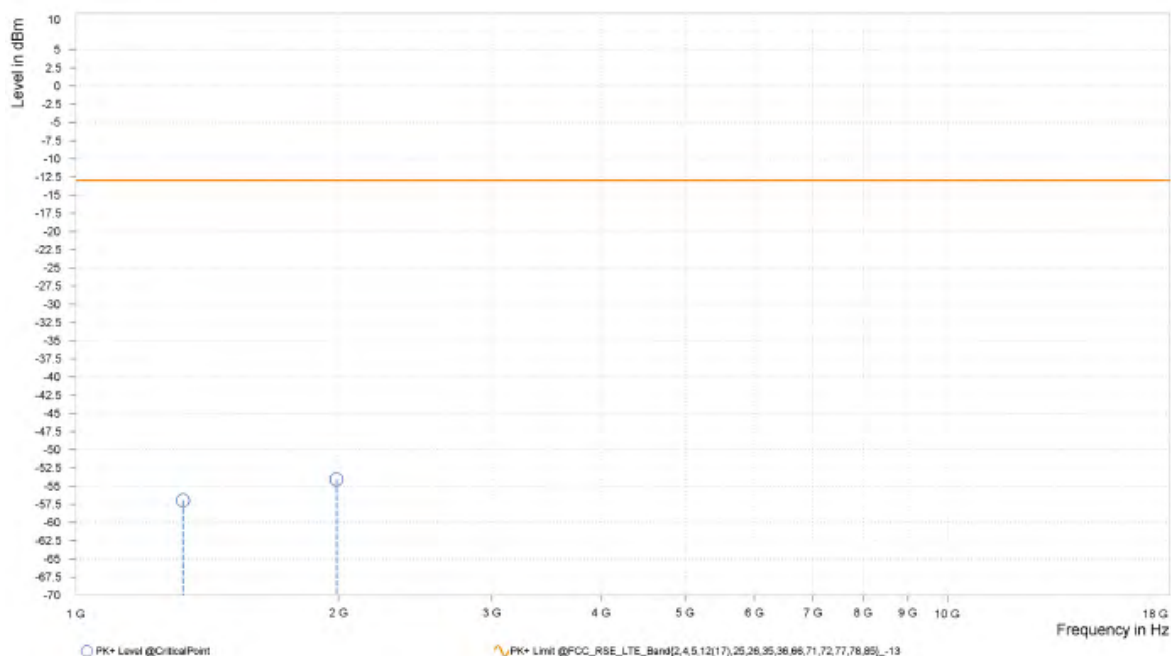

CH133297


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,352.000	-55.55	-13.00	42.55	6.90	H	1	1.00
1	2,028.000	-52.11	-13.00	39.11	11.48	H	355.6	2.00

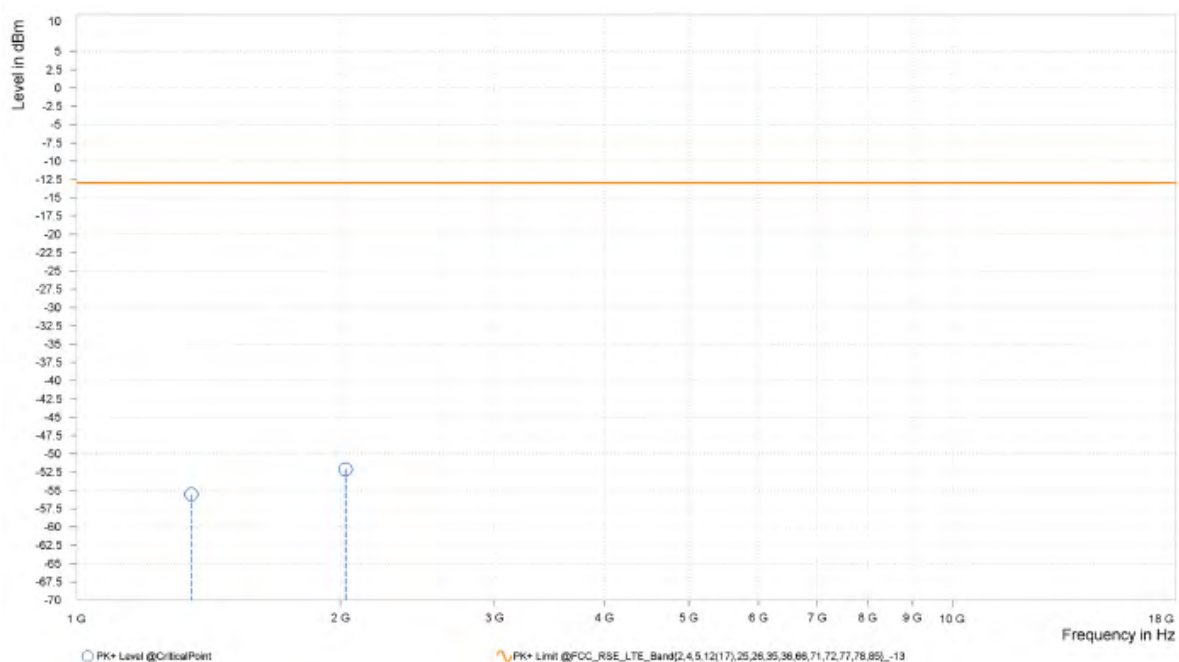

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,352.000	-53.69	-13.00	40.69	6.97	V	2.2	2.00
1	2,028.000	-51.29	-13.00	38.29	12.05	V	4.6	1.00

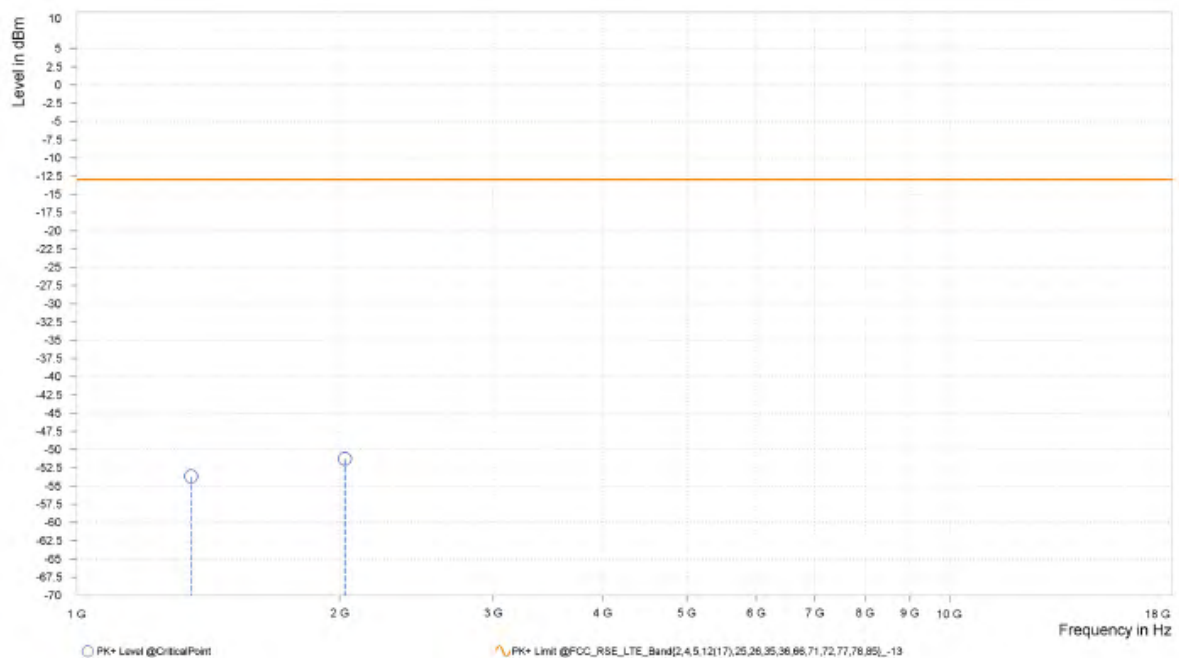

CH:133422


MODE	TX channel 133422	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,377.000	-54.88	-13.00	41.88	7.20	H	1	1.00
1	2,065.500	-51.16	-13.00	38.16	10.31	H	243.5	1.00

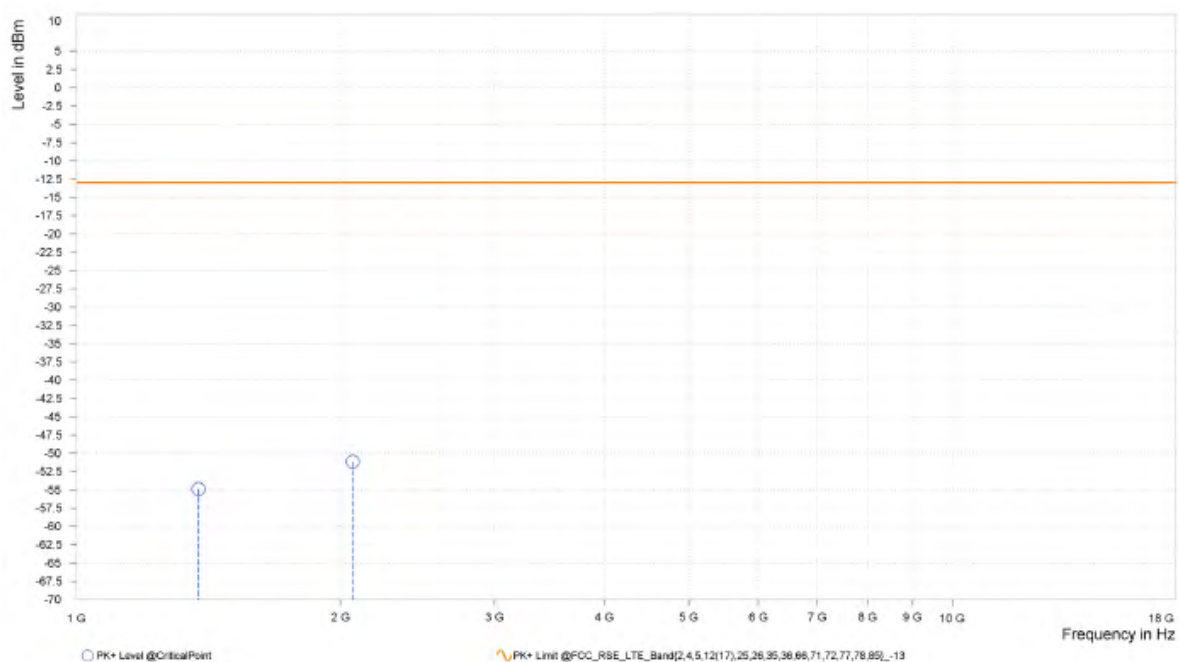

MODE	TX channel 133422	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,377.000	-54.83	-13.00	41.83	7.29	V	354.9	2.00
1	2,065.500	-52.80	-13.00	39.80	10.55	V	121.4	2.00

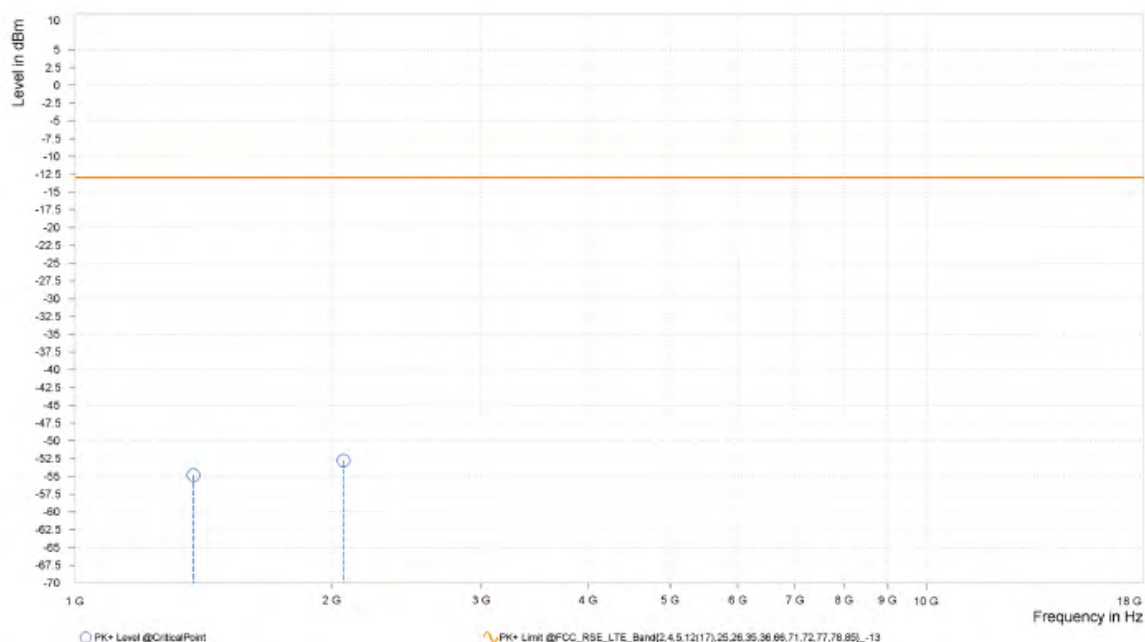

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,347.500	-55.34	-13.00	42.34	6.85	H	1	1.00
1	2,021.250	-52.10	-13.00	39.10	11.13	H	129.8	2.00

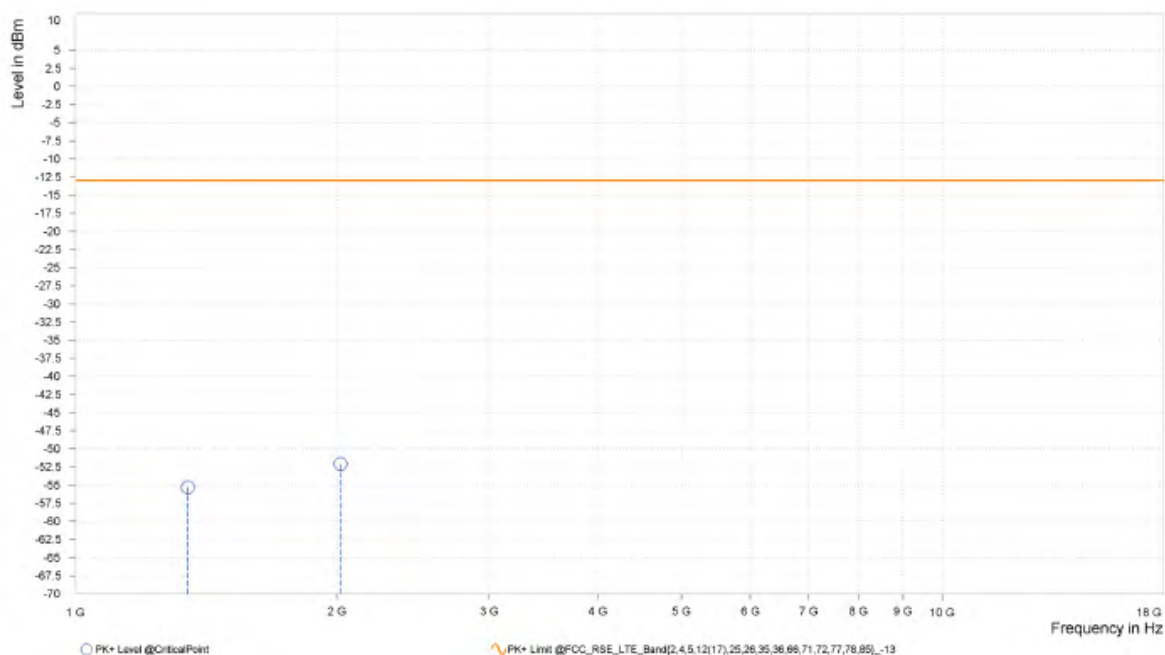

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,347.500	-54.93	-13.00	41.93	6.91	V	354.9	2.00
1	2,021.250	-52.64	-13.00	39.64	11.58	V	262.5	1.00

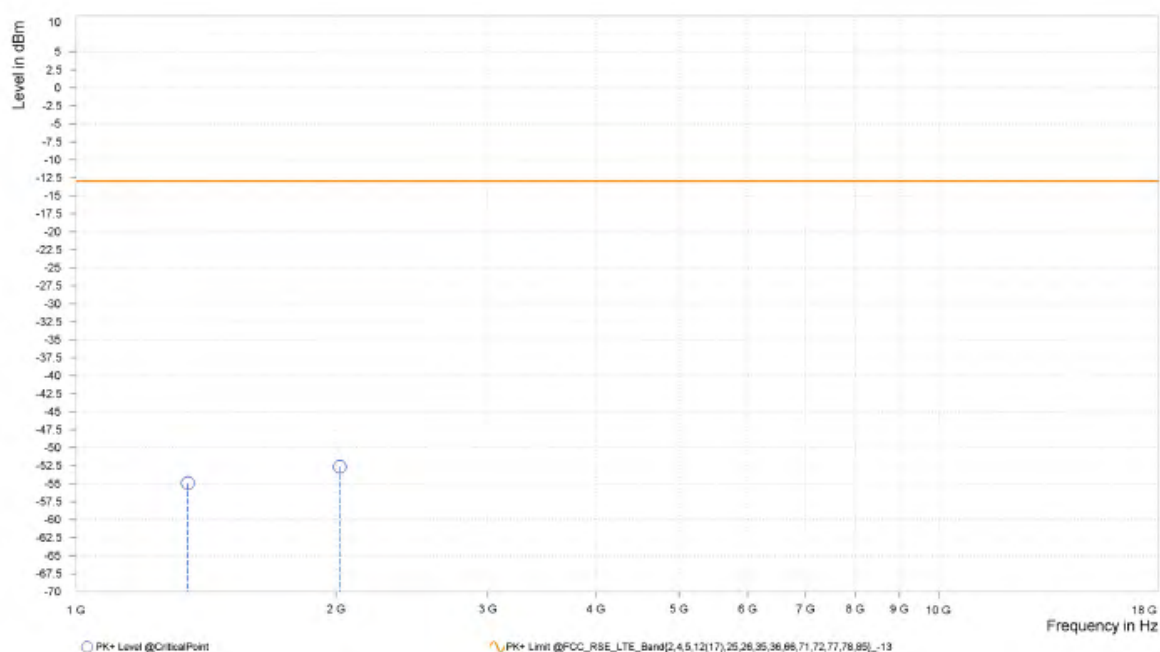


CHANNEL BANDWIDTH: 20MHz / QPSK

CH:133297


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,348.000	-54.69	-13.00	41.69	6.85	H	117.8	2.00
1	2,022.000	-52.35	-13.00	39.35	11.18	H	117.8	2.00

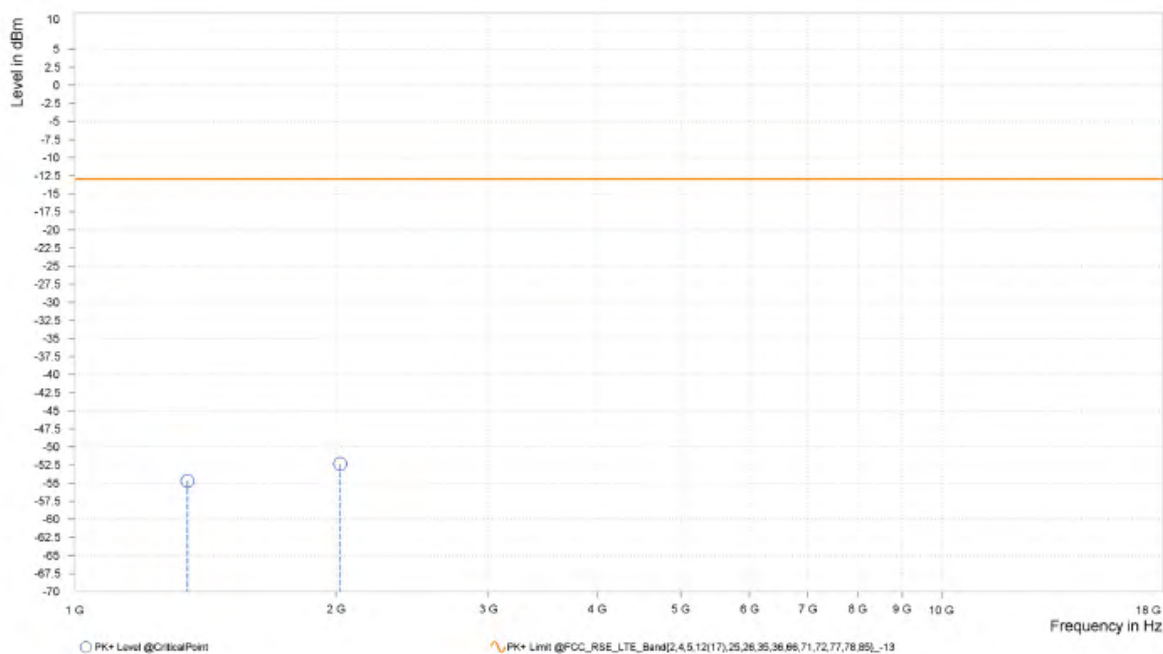

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,348.000	-55.55	-13.00	42.55	6.91	V	0.9	2.00
1	2,022.000	-51.54	-13.00	38.54	11.65	V	350.2	2.00

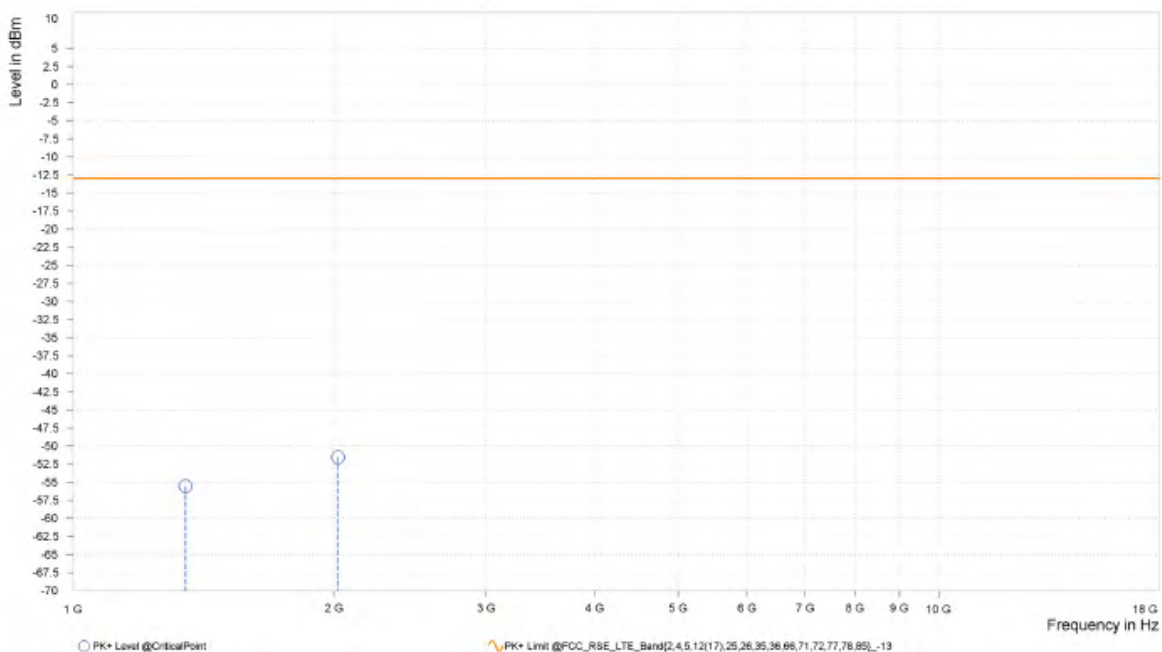


LTE Band 85

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-57.31	-13.00	44.31	2.84	H	121.4	2.00
1	2,121.000	-51.51	-13.00	38.51	10.91	H	355.5	2.00

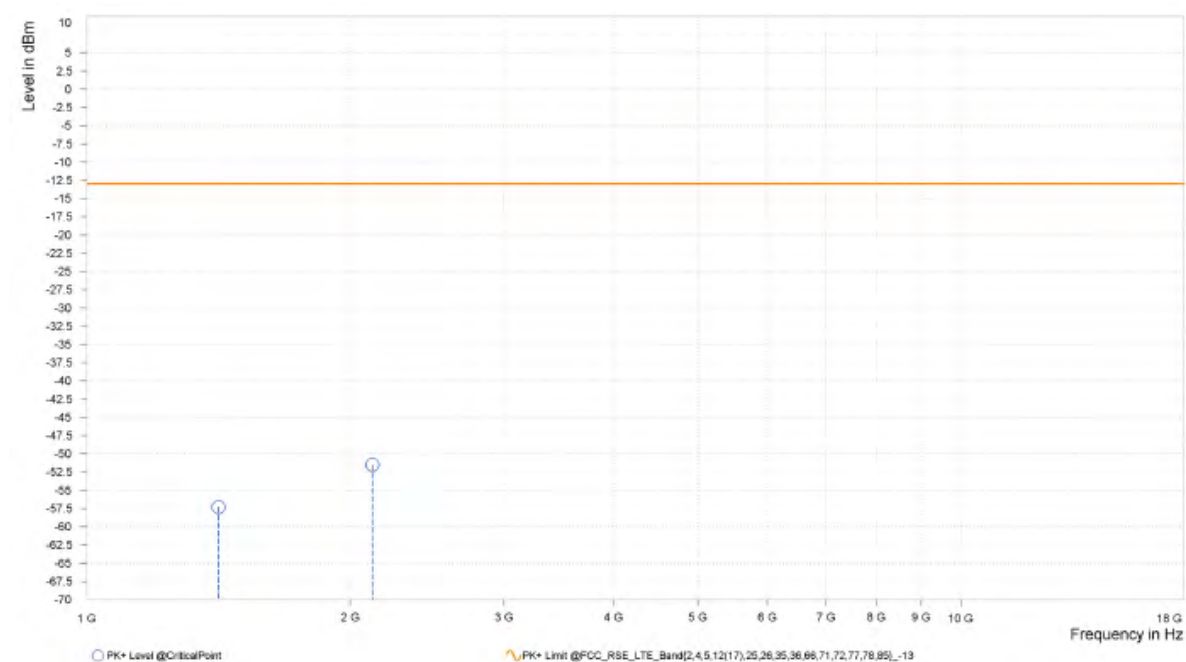

MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-57.70	-13.00	44.70	2.74	V	1	1.00
1	2,121.000	-51.17	-13.00	38.17	10.55	V	119	2.00

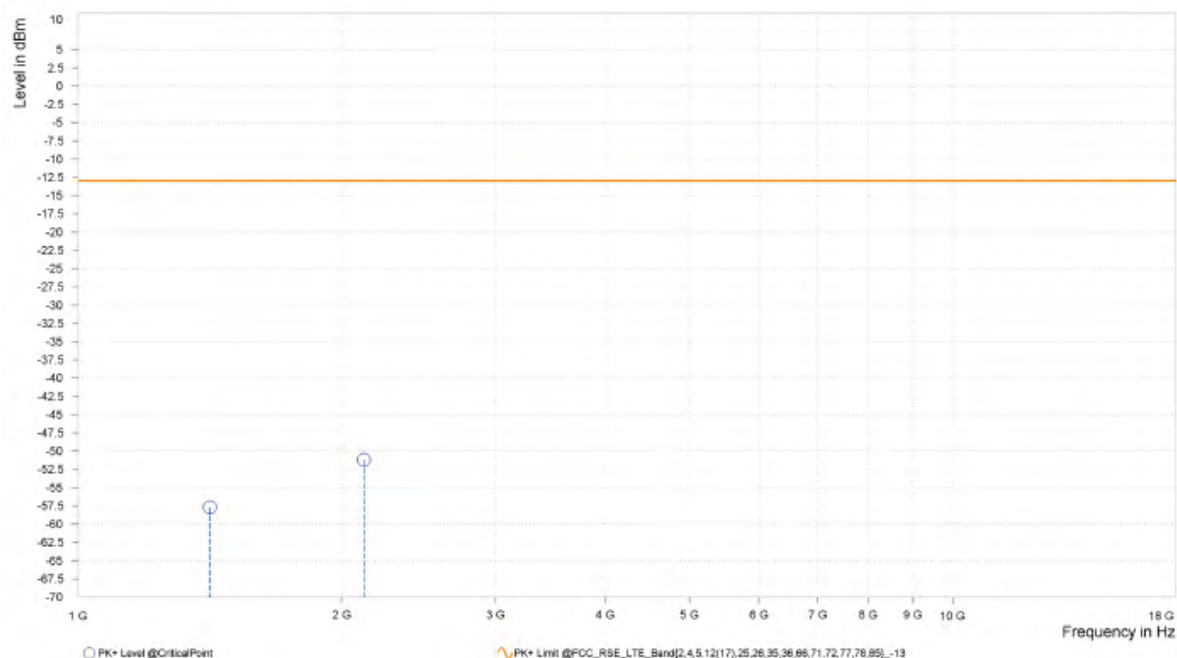


CHANNEL BANDWIDTH: 10MHz / QPSK

CH:134052


MODE	TX channel 134052	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,401.000	-55.02	-13.00	42.02	4.68	H	359	2.00
1	2,101.500	-51.54	-13.00	38.54	10.08	H	1	2.00

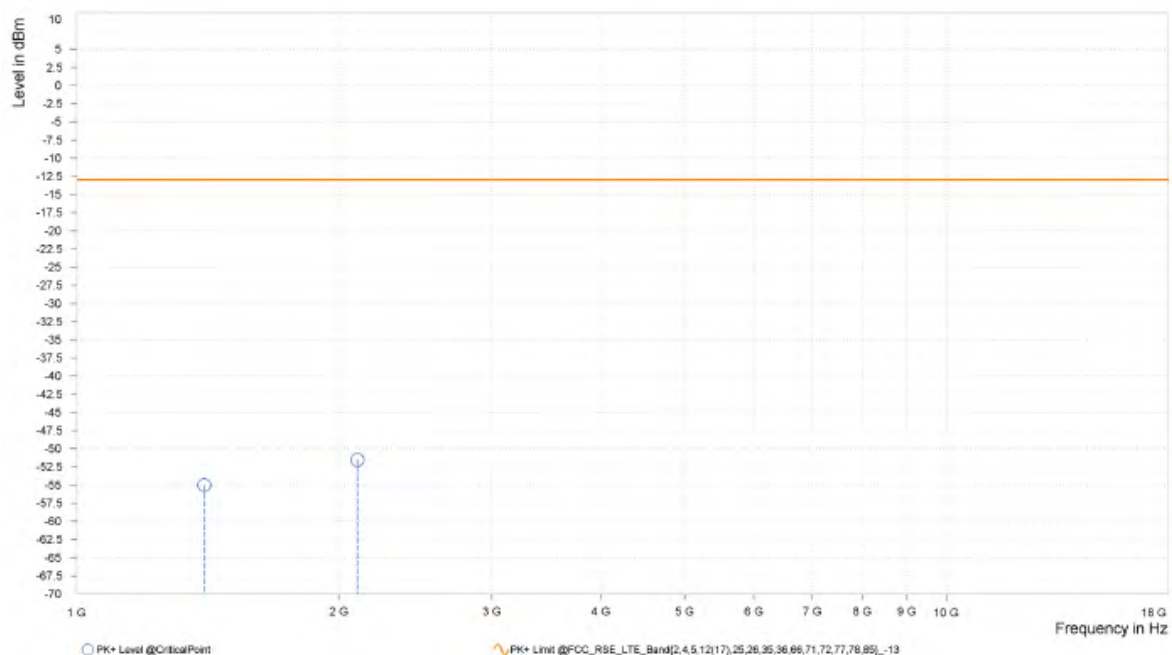

MODE	TX channel 134052	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,401.000	-55.55	-13.00	42.55	4.66	V	114.3	2.00
1	2,101.500	-52.79	-13.00	39.79	9.94	V	359	2.00

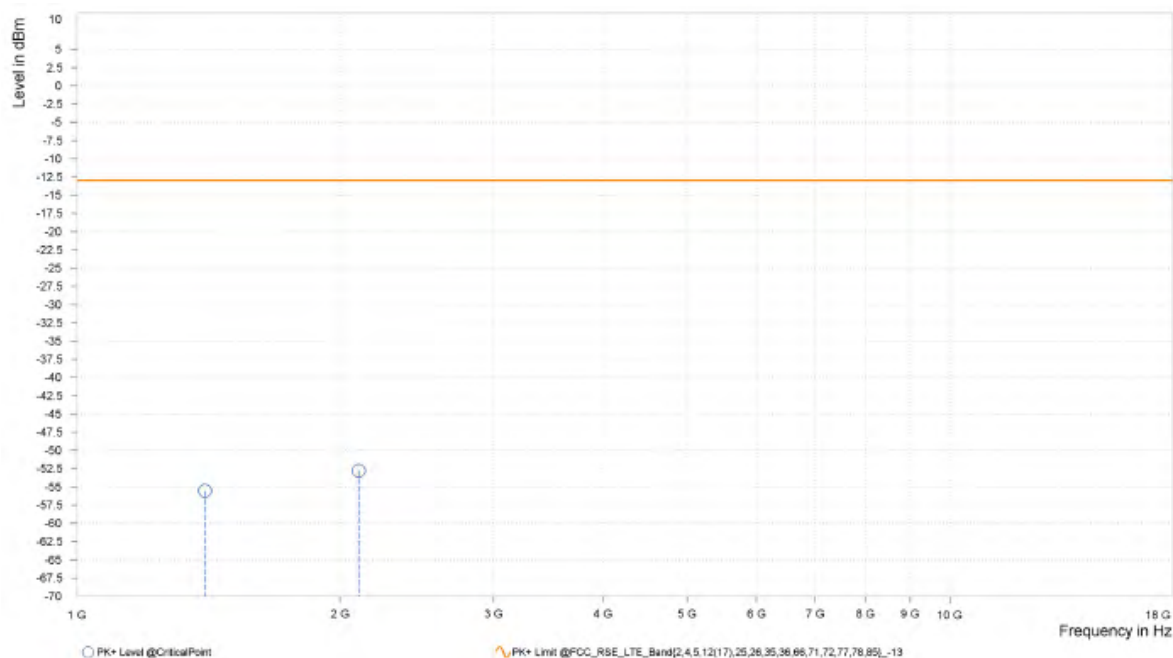

CH134092


MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-57.14	-13.00	44.14	2.84	H	242.2	1.00
1	2,121.000	-49.75	-13.00	36.75	10.91	H	0.9	2.00

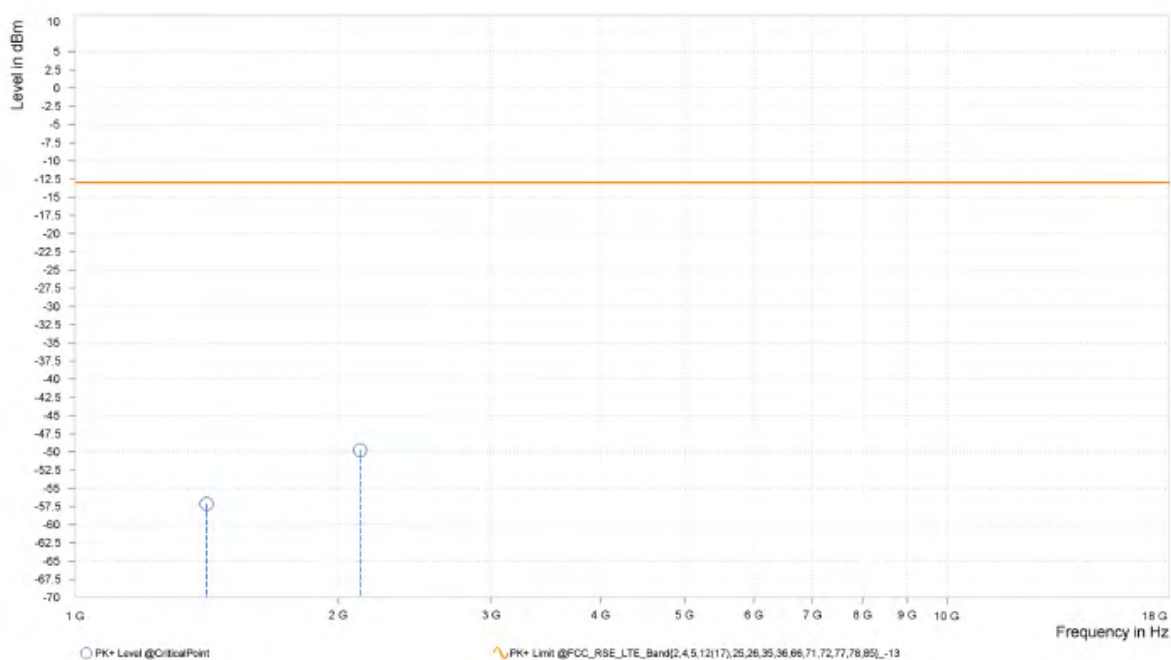

MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-57.33	-13.00	44.33	2.74	V	1	2.00
1	2,121.000	-50.76	-13.00	37.76	10.55	V	354.8	2.00

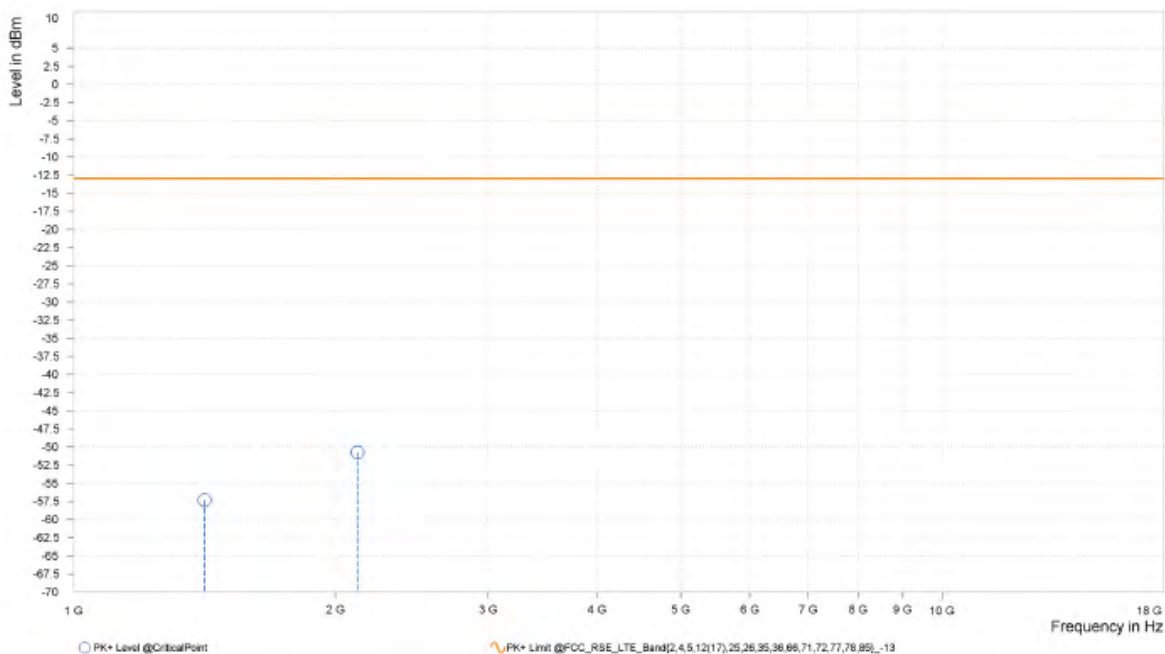

CH:134132


MODE	TX channel 134132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,427.000	-57.99	-13.00	44.99	1.64	H	354.2	2.00
1	2,140.500	-50.69	-13.00	37.69	11.73	H	290	1.00

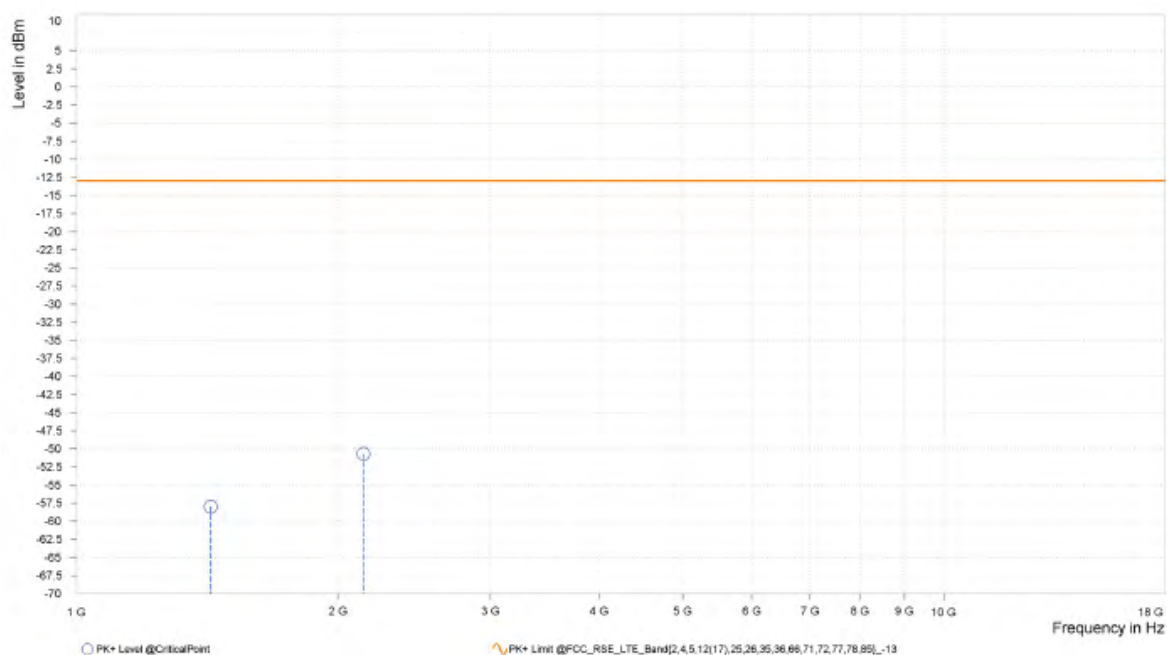

MODE	TX channel 134132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,427.000	-59.42	-13.00	46.42	1.48	V	359	1.00
1	2,140.500	-50.50	-13.00	37.50	11.15	V	359	2.00

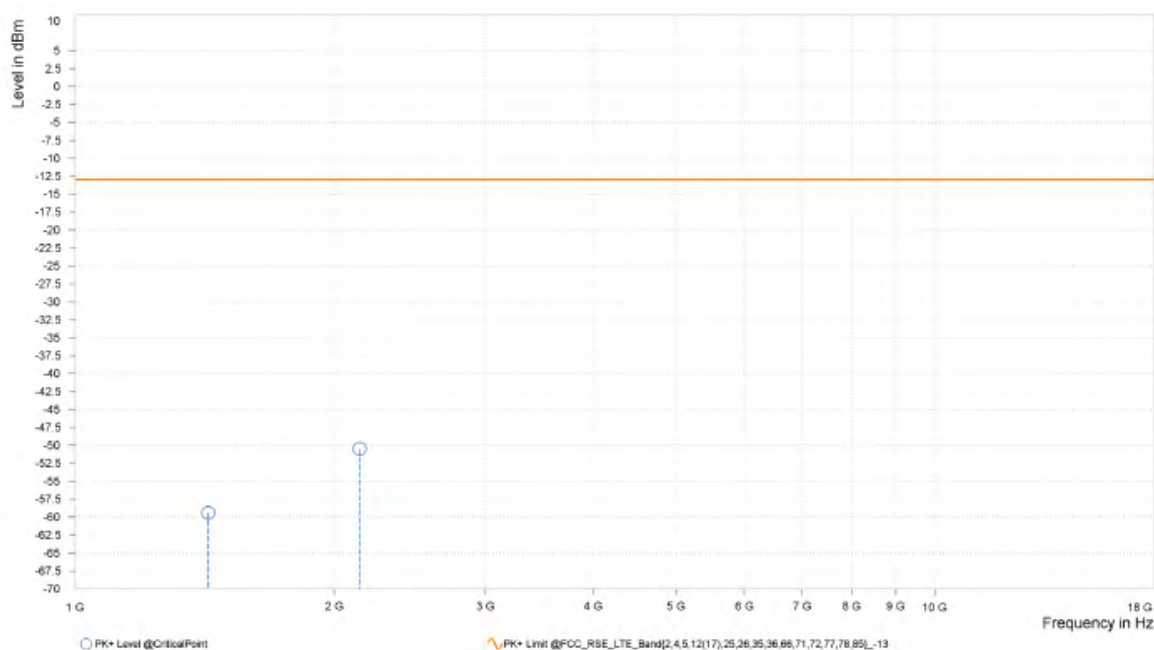


LTE BAND 8

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 21640


MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,797.000	-51.17	-13.00	38.17	9.16	H	125	2.00
1	2,695.000	-49.89	-13.00	36.89	13.32	H	355.5	2.00

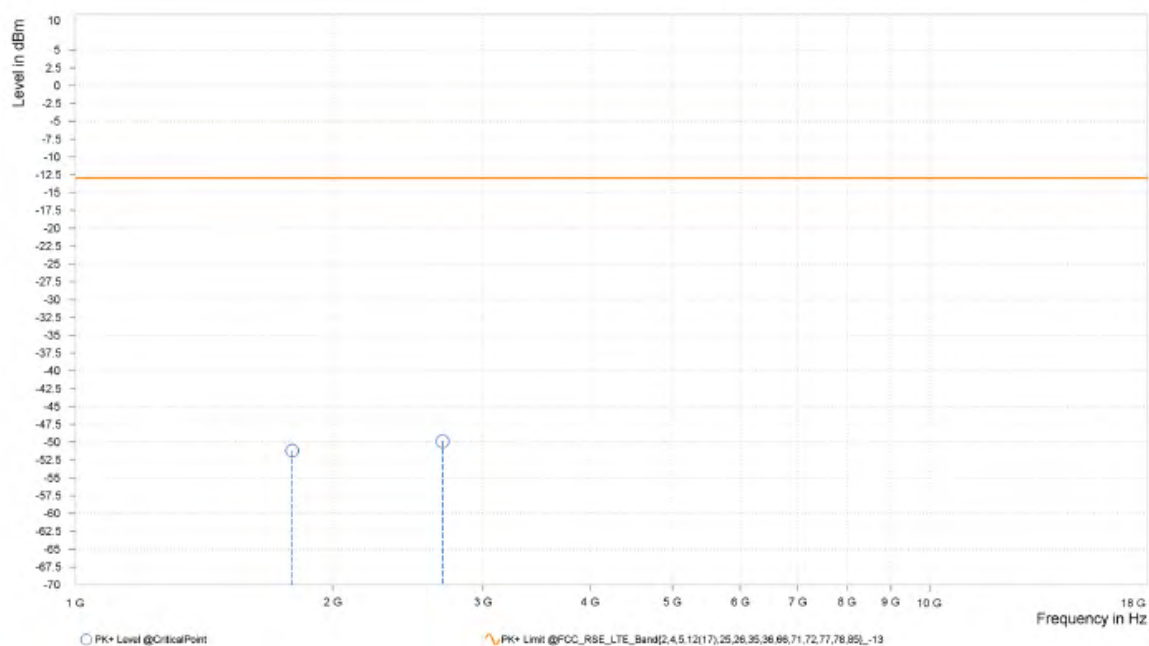

MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,797.000	-52.17	-13.00	39.17	9.19	V	1.9	2.00
1	2,695.000	-49.07	-13.00	36.07	13.13	V	359	2.00

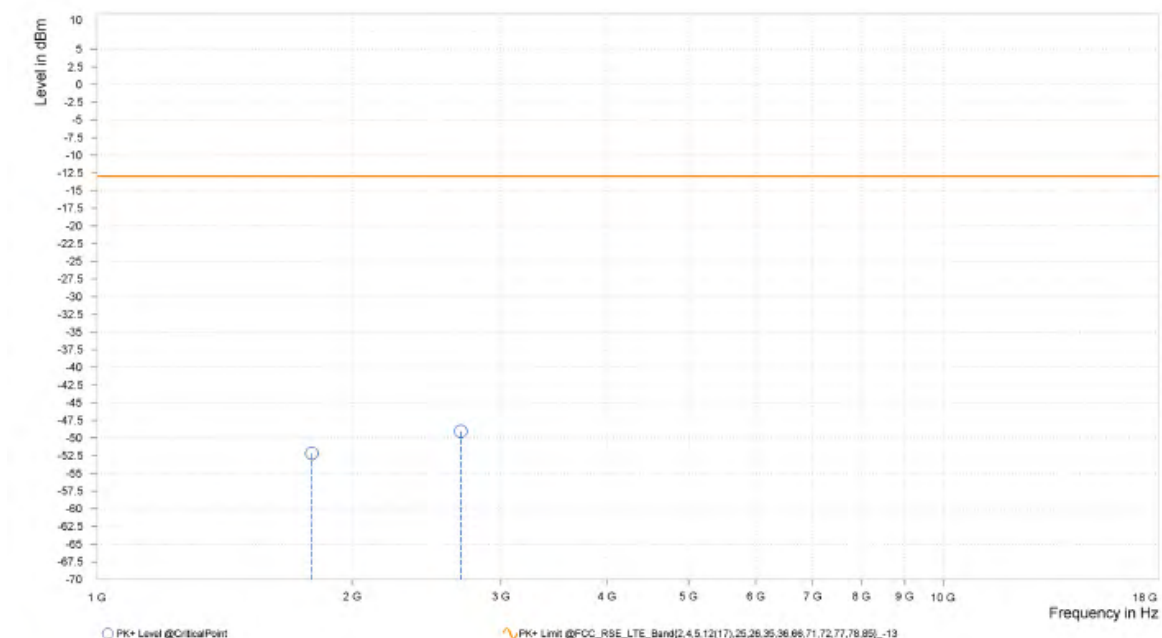

**CHANNEL BANDWIDTH: 3MHz / QPSK
CH21640**


MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,795.000	-48.38	-13.00	35.38	9.19	H	5.2	1.00
1	2,693.000	-48.89	-13.00	35.89	13.54	H	123.8	2.00

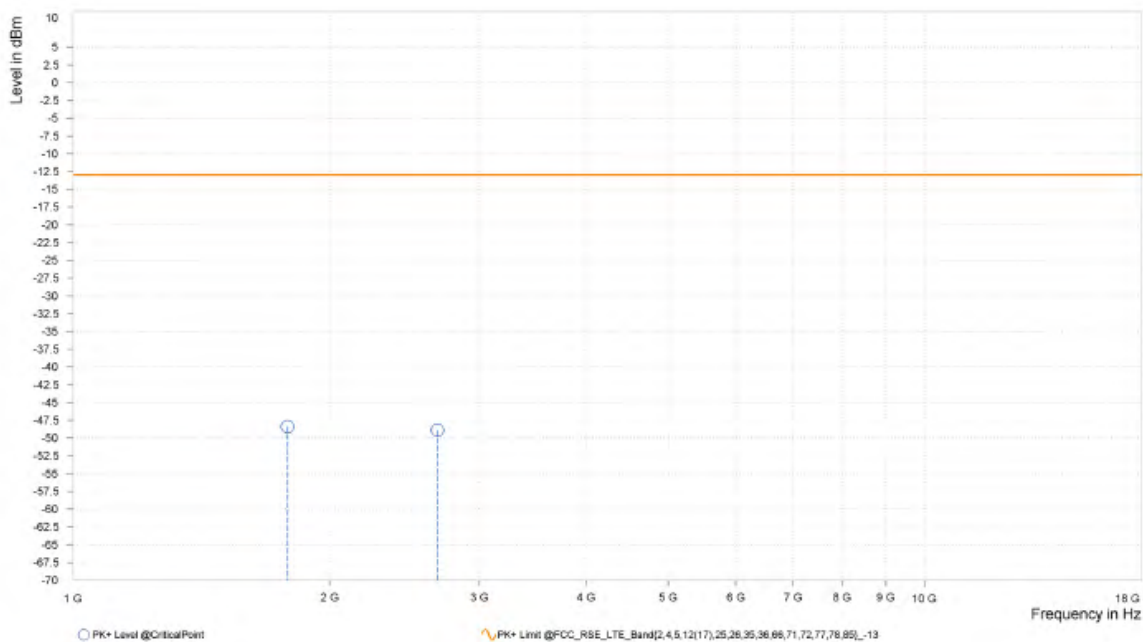

MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,795.000	-52.30	-13.00	39.30	9.17	V	359	2.00
1	2,693.000	-49.38	-13.00	36.38	13.17	V	359	1.00

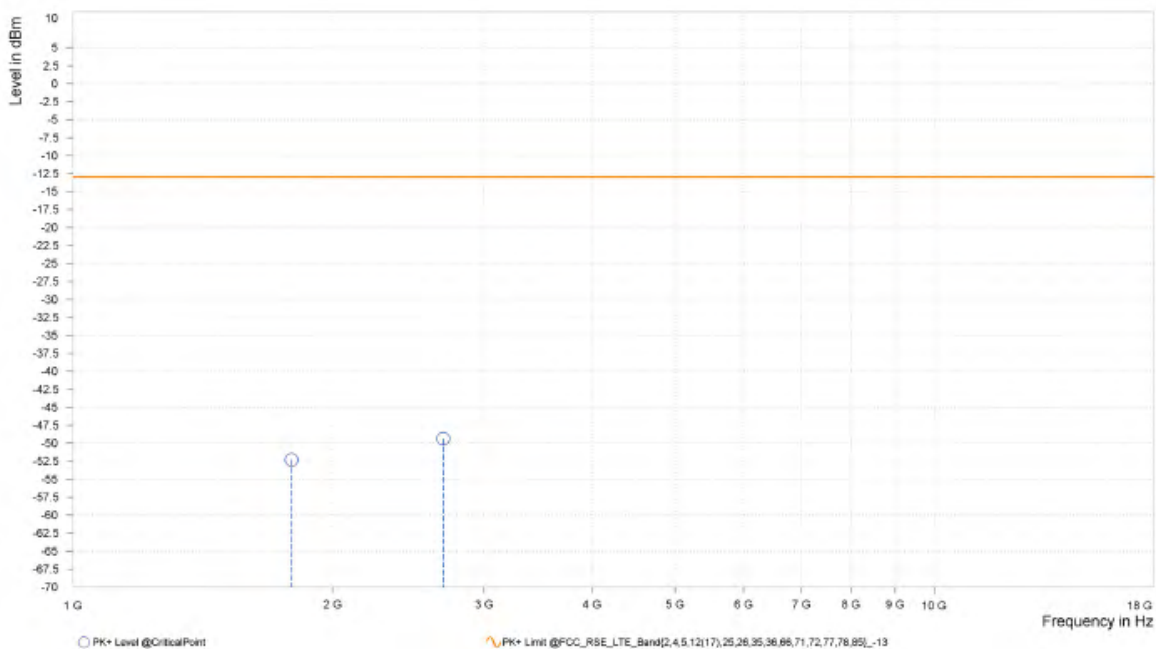

NB-IOT LTE Band 12
CHANNEL BANDWIDTH: QPSK


MODE	TX channel 23012	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,398.200	-55.24	-13.00	42.24	5.11	H	354.9	2.00
1	2,097.300	-51.87	-13.00	38.87	9.91	H	1	1.00

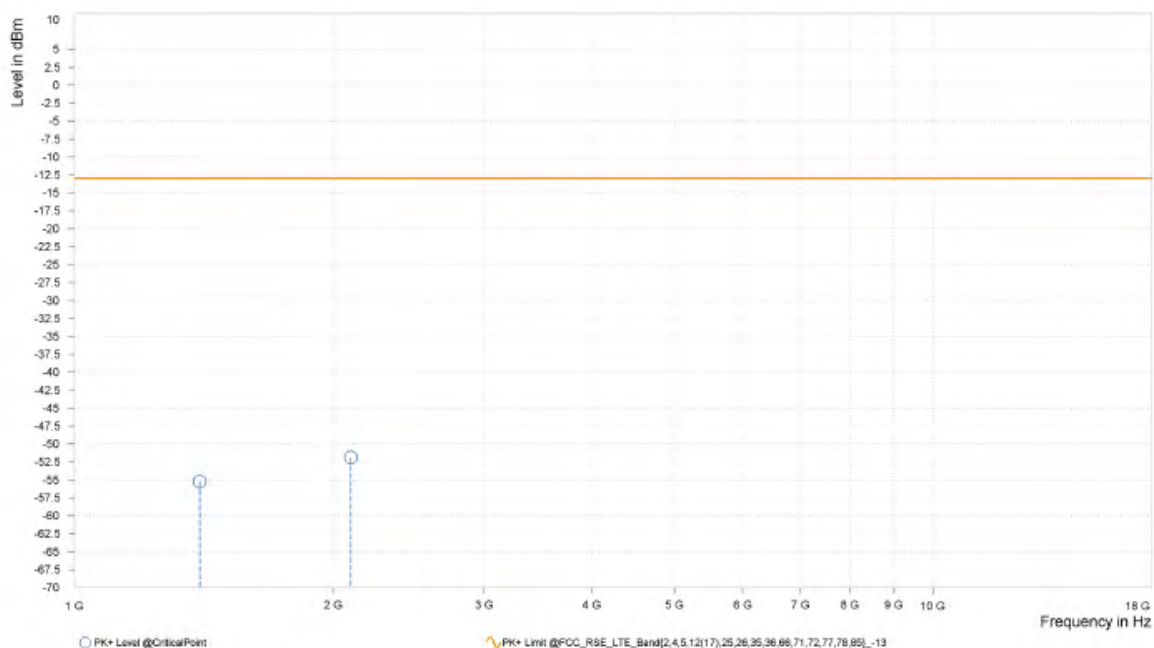

MODE	TX channel 23012	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,398.200	-55.85	-13.00	42.85	5.11	V	9	1.00
1	2,097.300	-52.26	-13.00	39.26	9.81	V	1	1.00

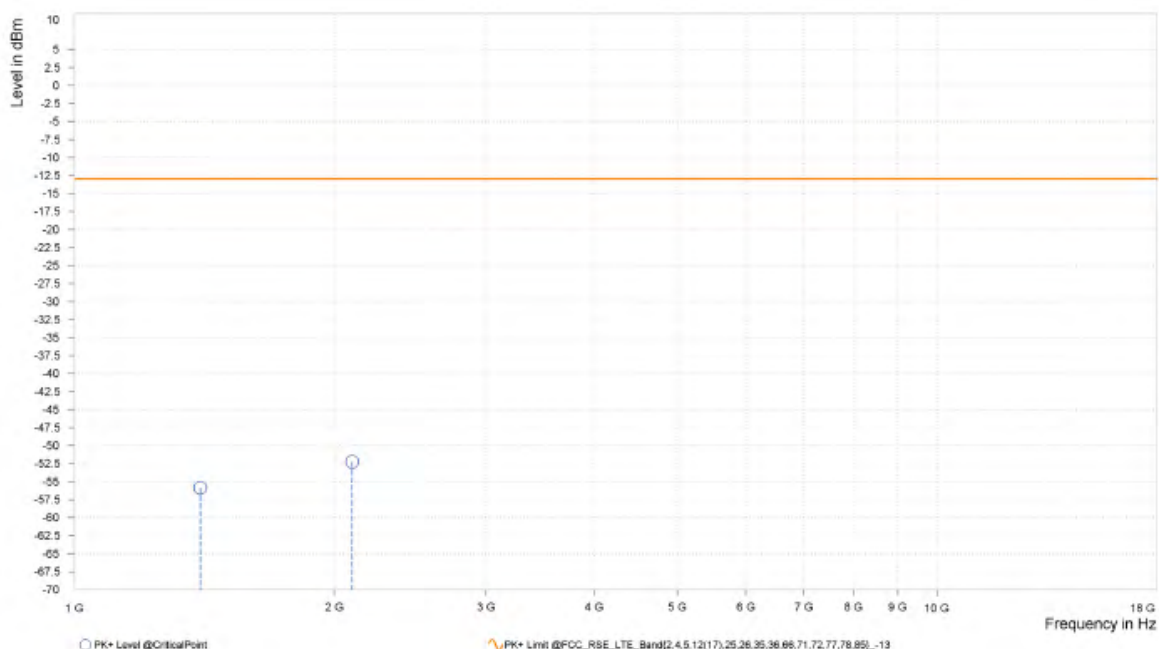

CH 23095


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,415.000	-57.13	-13.00	44.13	2.70	H	5	1.00
1	2,122.500	-49.96	-13.00	36.96	10.97	H	5	1.00

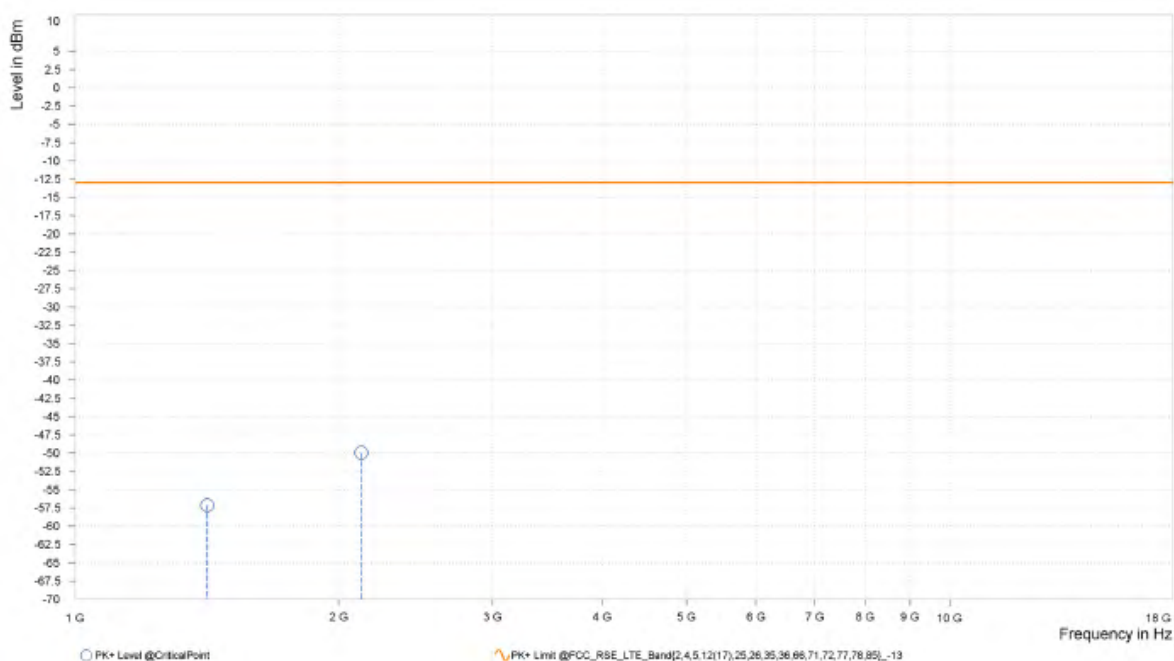

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,415.000	-56.52	-13.00	43.52	2.59	V	359	2.00
1	2,122.500	-51.07	-13.00	38.07	10.59	V	358.2	1.00

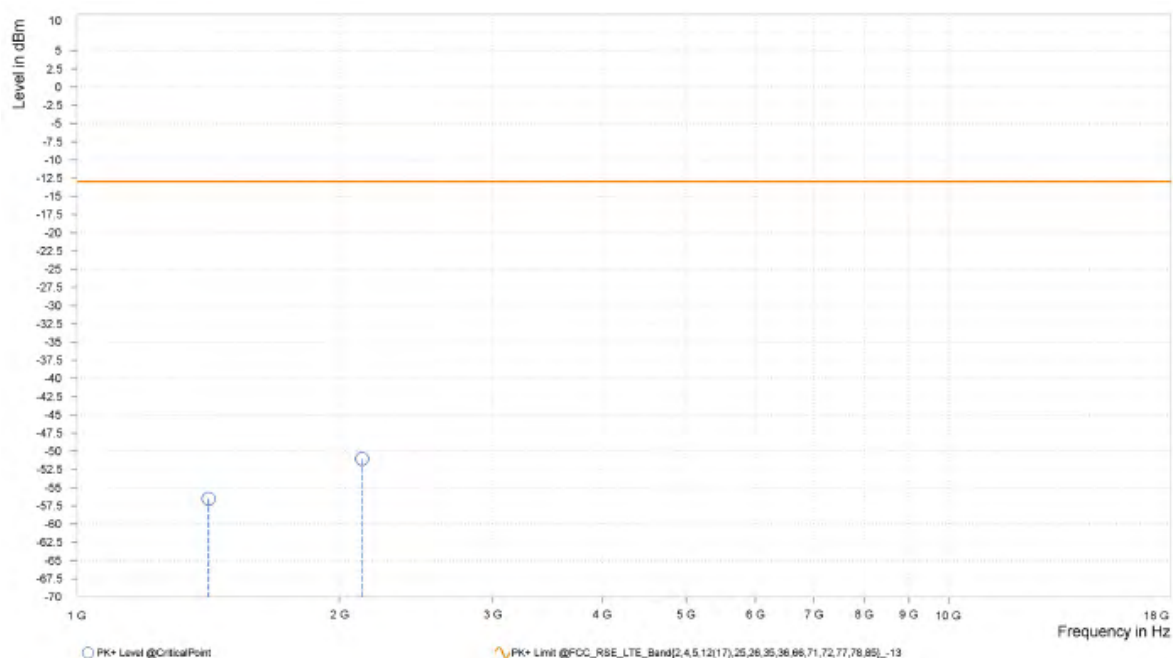

CH23178


MODE	TX channel 23178	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,431.800	-58.81	-13.00	45.81	2.28	H	2.6	2.00
1	2,147.700	-49.84	-13.00	36.84	12.02	H	359	2.00

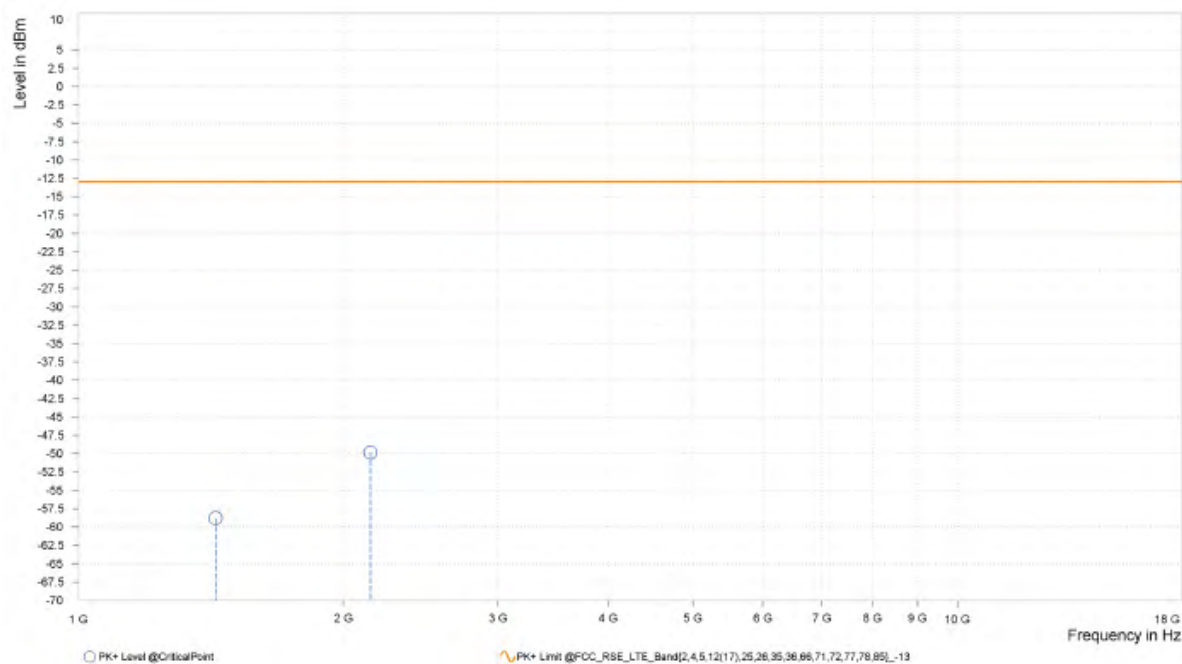

MODE	TX channel 23178	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,431.800	-58.04	-13.00	45.04	2.15	V	255.3	1.00
1	2,147.700	-51.13	-13.00	38.13	11.36	V	359	1.00

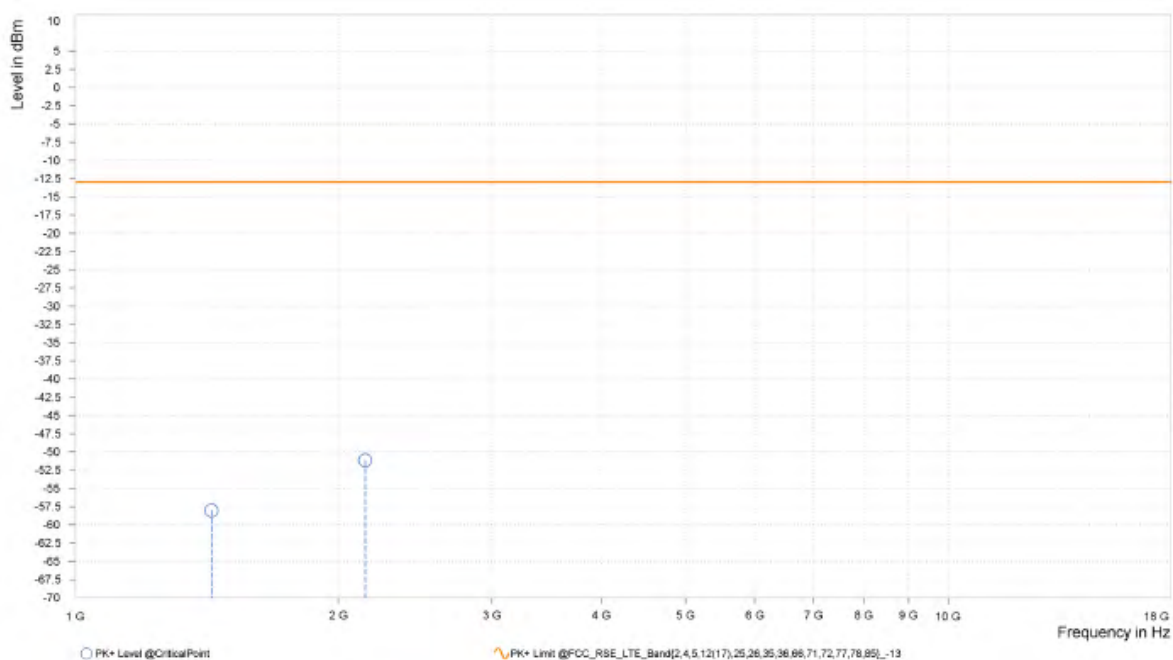

NB-IOT LTE Band 13
CHANNEL BANDWIDTH: QPSK


MODE	TX channel 23182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,554.200	-55.92	-13.00	42.92	5.28	H	357.4	1.00
1	2,331.300	-49.45	-13.00	36.45	13.06	H	354.9	2.00

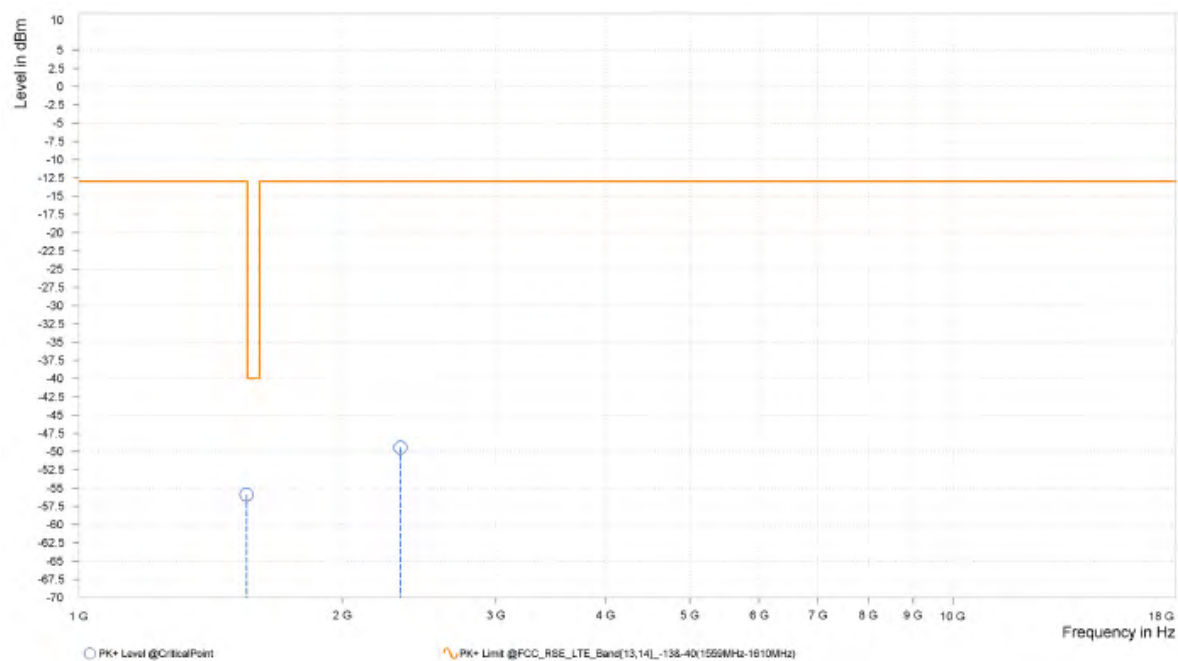

MODE	TX channel 23182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,554.200	-56.32	-13.00	43.32	4.91	V	1	1.00
1	2,331.300	-48.67	-13.00	35.67	12.57	V	243.4	1.00

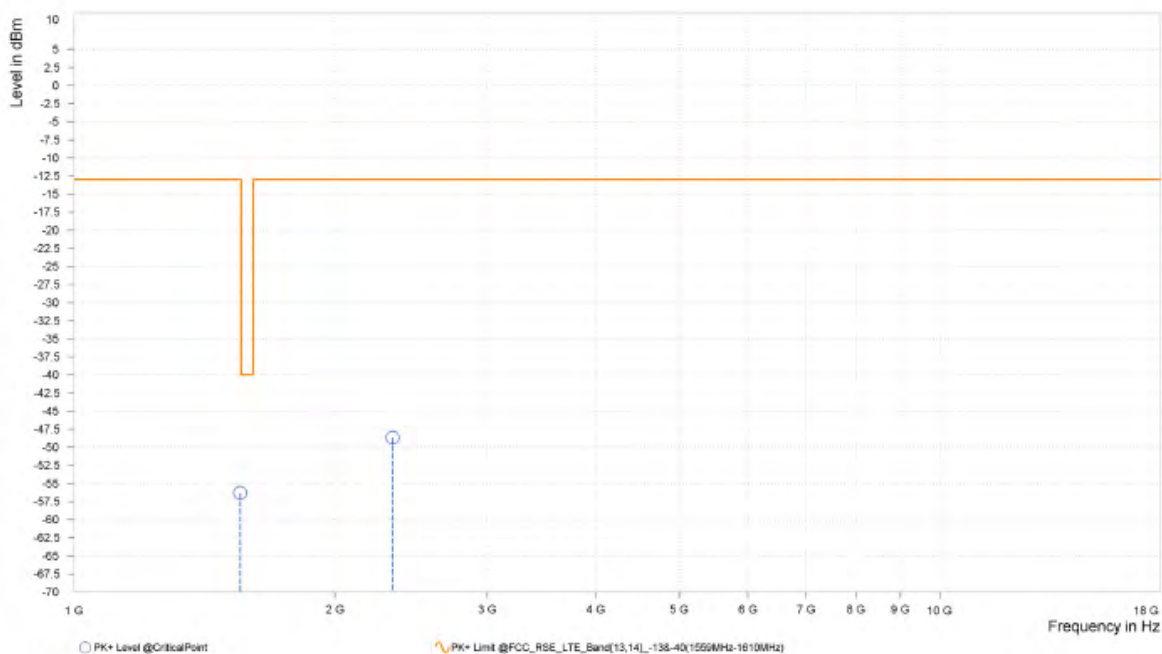

CH 23230


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,564.000	-50.74	-40.00	10.74	5.33	H	359	2.00
1	2,346.000	-50.02	-13.00	37.02	13.06	H	134.6	2.00

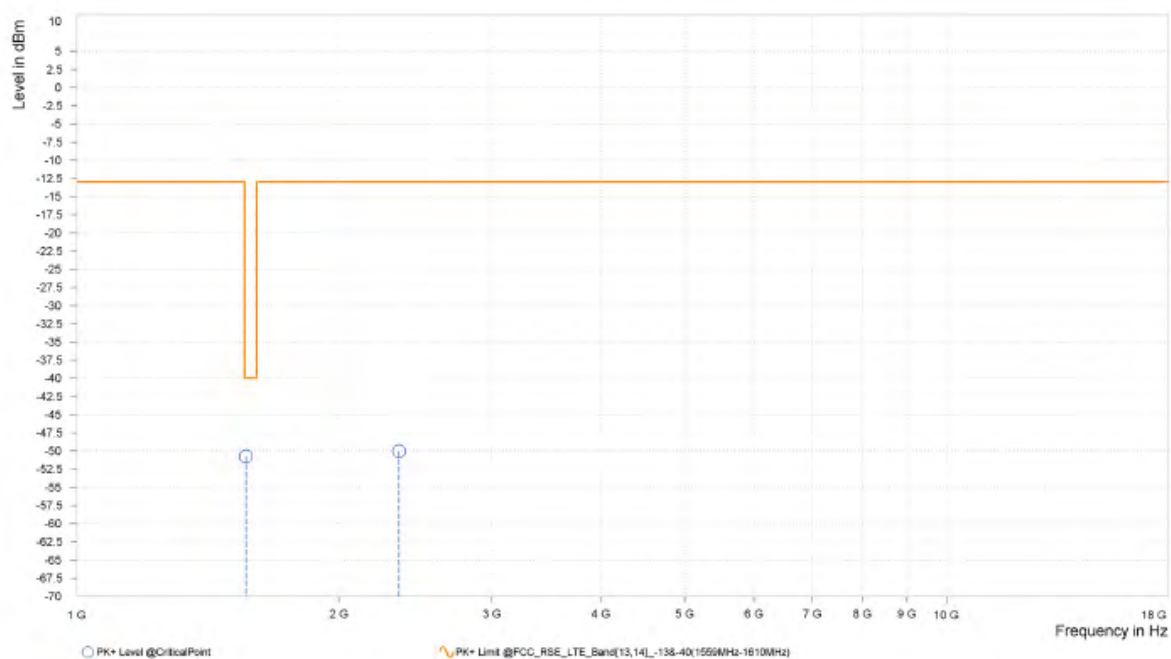

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,564.000	-56.32	-40.00	16.32	5.04	V	359	2.00
1	2,346.000	-50.16	-13.00	37.16	12.66	V	12.9	1.00

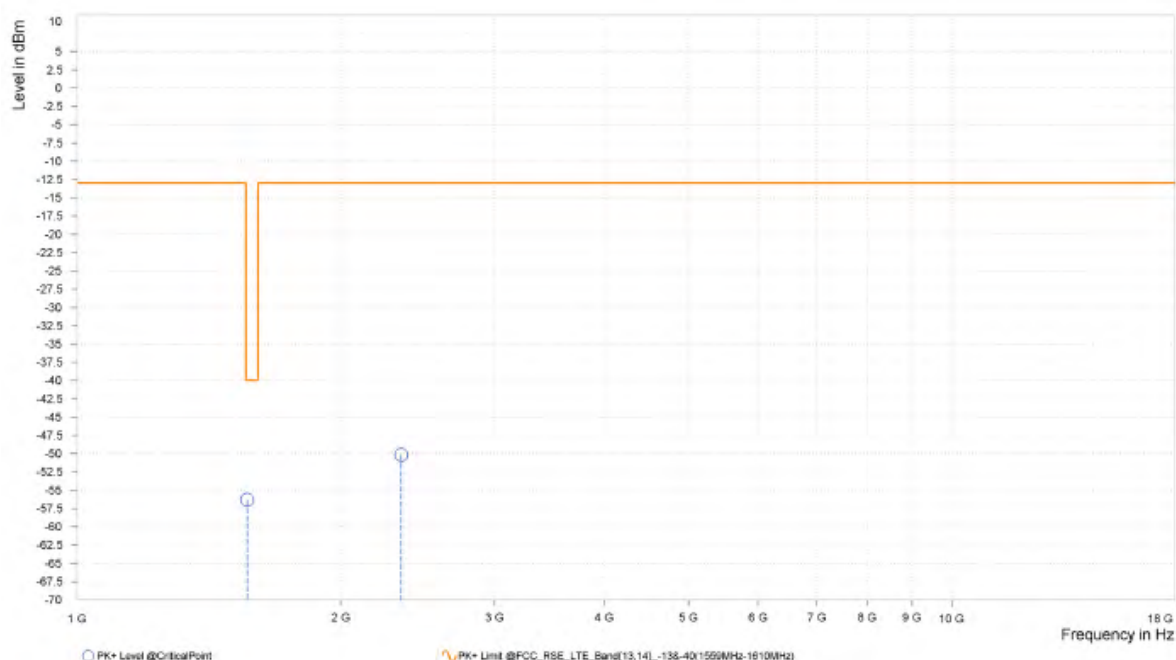

CH23178


MODE	TX channel 23278	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,573.800	-55.77	-40.00	15.77	5.30	H	134.6	2.00
1	2,360.700	-49.58	-13.00	36.58	12.98	H	354.9	2.00

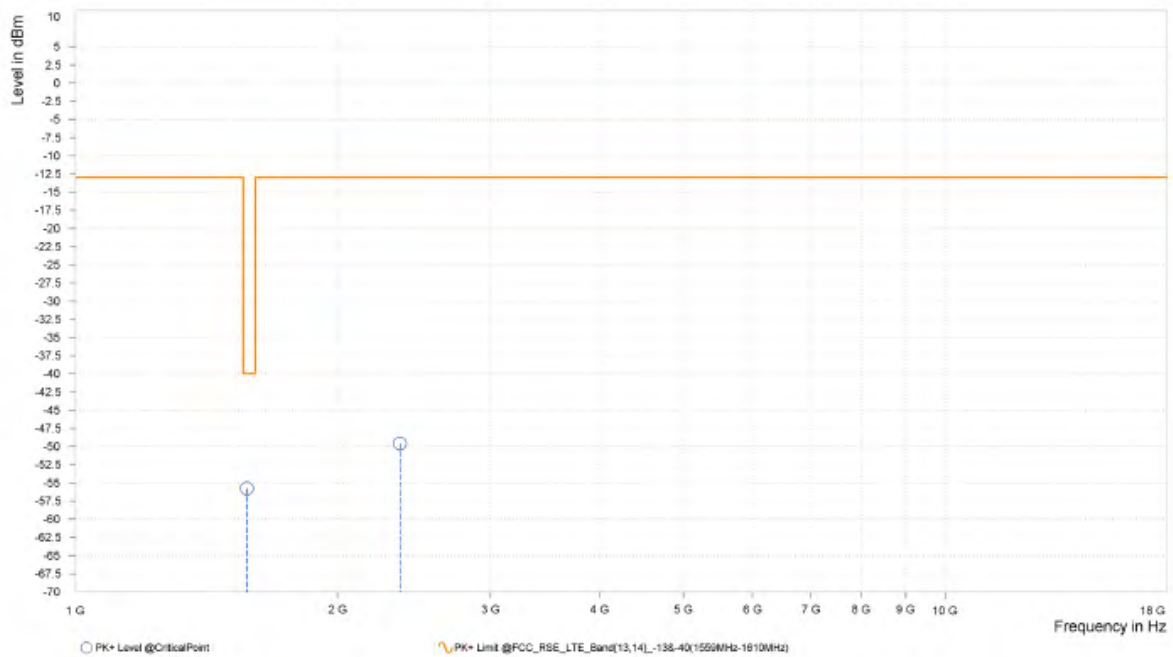

MODE	TX channel 23278	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,573.800	-55.58	-40.00	15.58	5.09	V	2.3	2.00
1	2,360.700	-49.73	-13.00	36.73	12.65	V	2.3	2.00

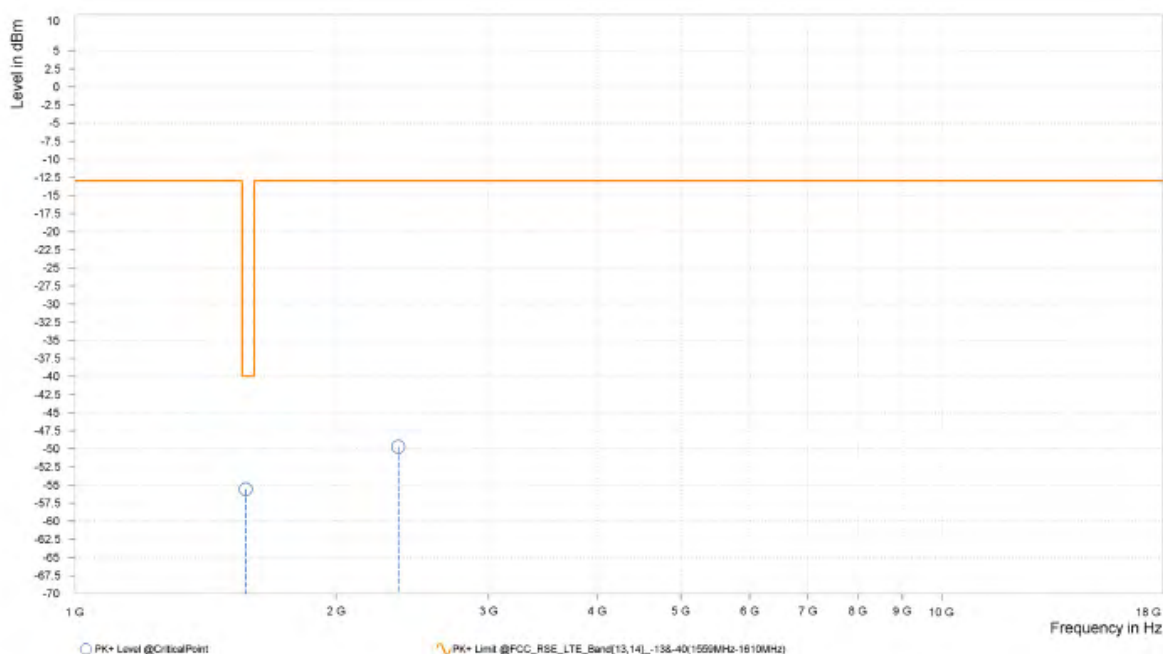

NB-IOT LTE Band 71
CHANNEL BANDWIDTH: QPSK
CH 133124


MODE	TX channel 133124	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,326.200	-56.50	-13.00	43.50	4.30	H	1	1.00
1	1,989.300	-52.02	-13.00	39.02	9.53	H	1.4	2.00

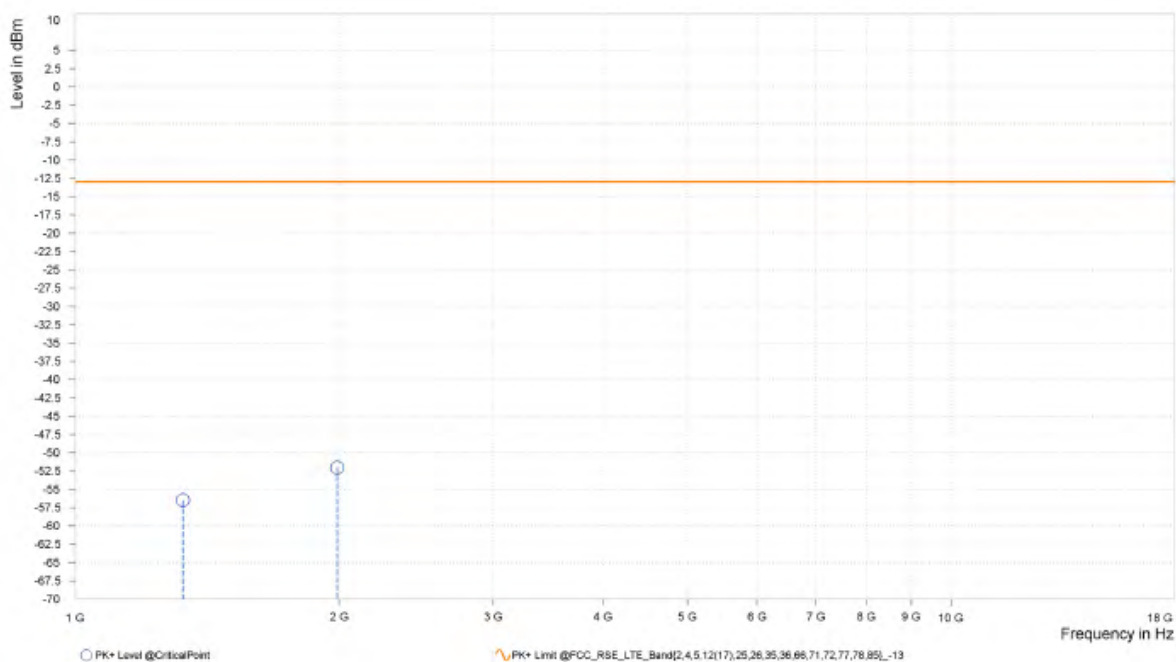

MODE	TX channel 133124	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,326.200	-55.11	-13.00	42.11	4.37	V	3.6	1.00
1	1,989.500	-51.97	-13.00	38.97	9.47	V	357.5	1.00

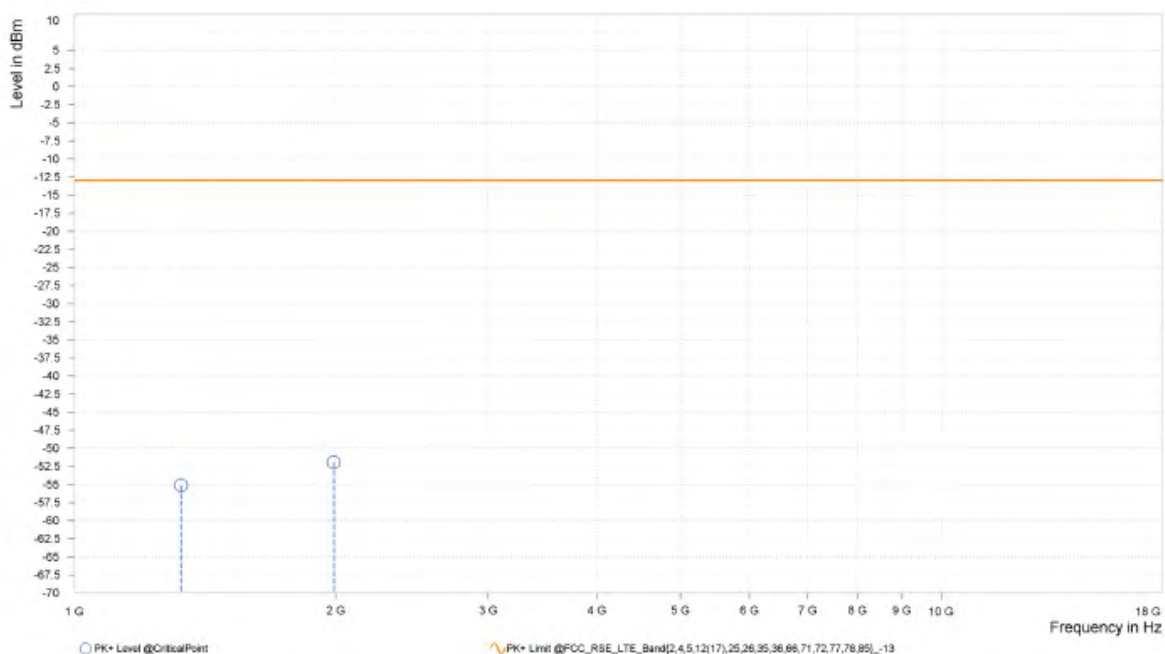

CH 133297


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,361.000	-52.97	-13.00	39.97	7.01	H	354.9	2.00
1	2,041.500	-51.46	-13.00	38.46	11.14	H	134.6	2.00

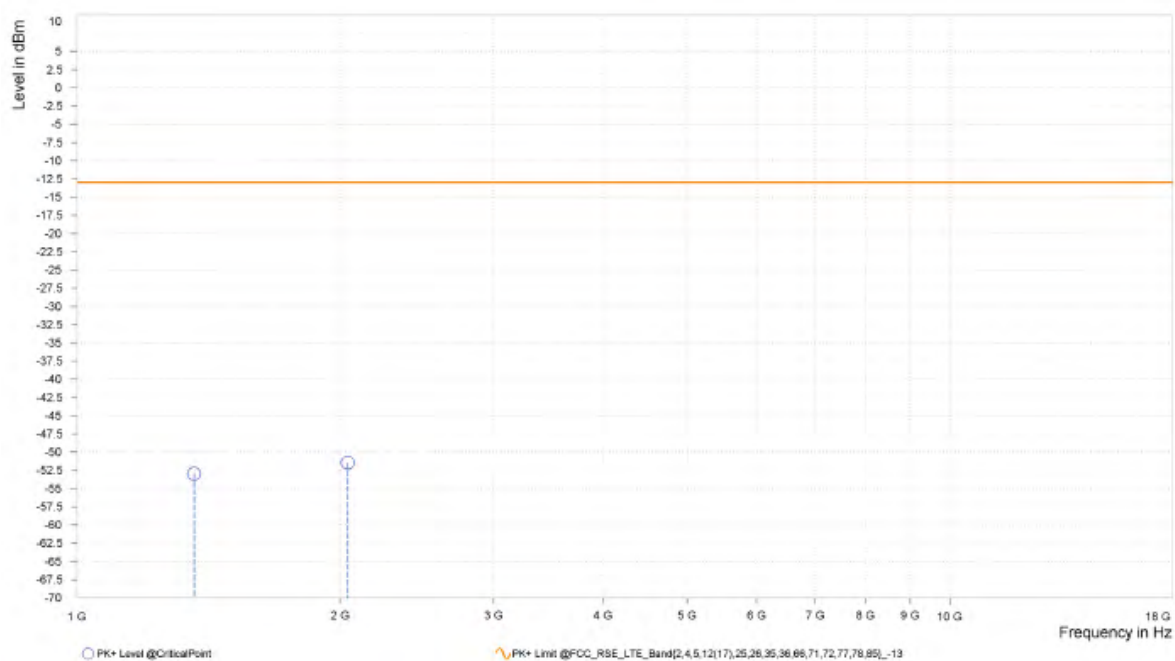

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,361.000	-53.36	-13.00	40.36	7.09	V	2.5	2.00
1	2,041.500	-50.88	-13.00	37.88	11.62	V	1	1.00

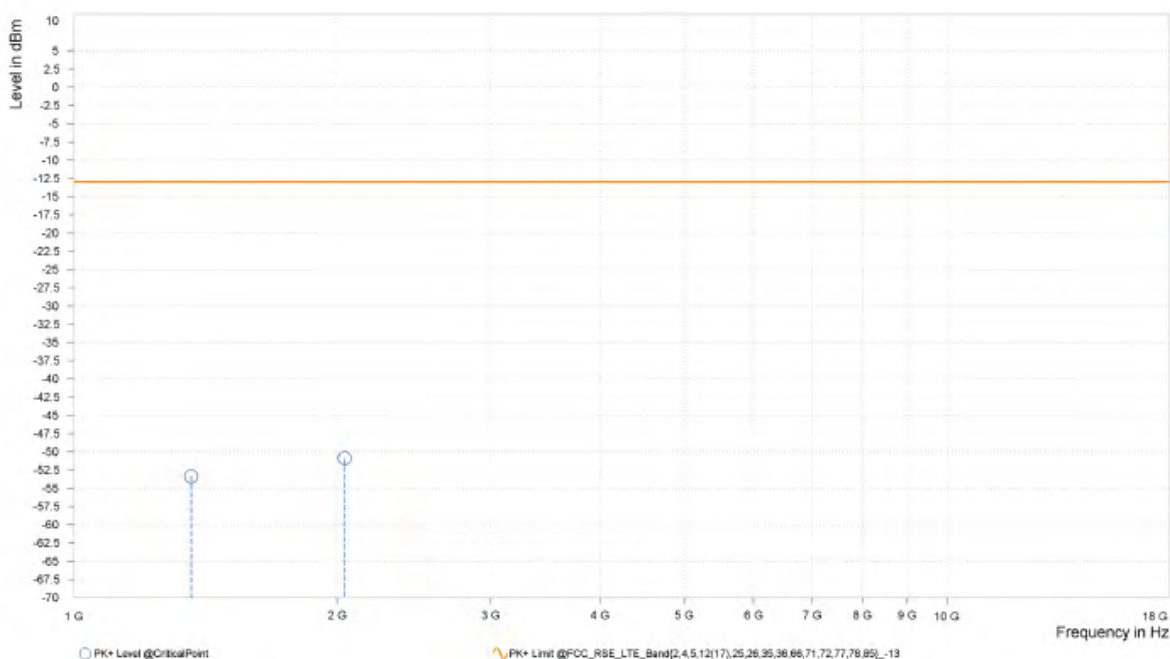

CH 133470


MODE	TX channel 133470	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,395.800	-55.84	-13.00	42.84	5.39	H	5.1	1.00
1	2,093.700	-52.50	-13.00	39.50	9.74	H	354.9	2.00

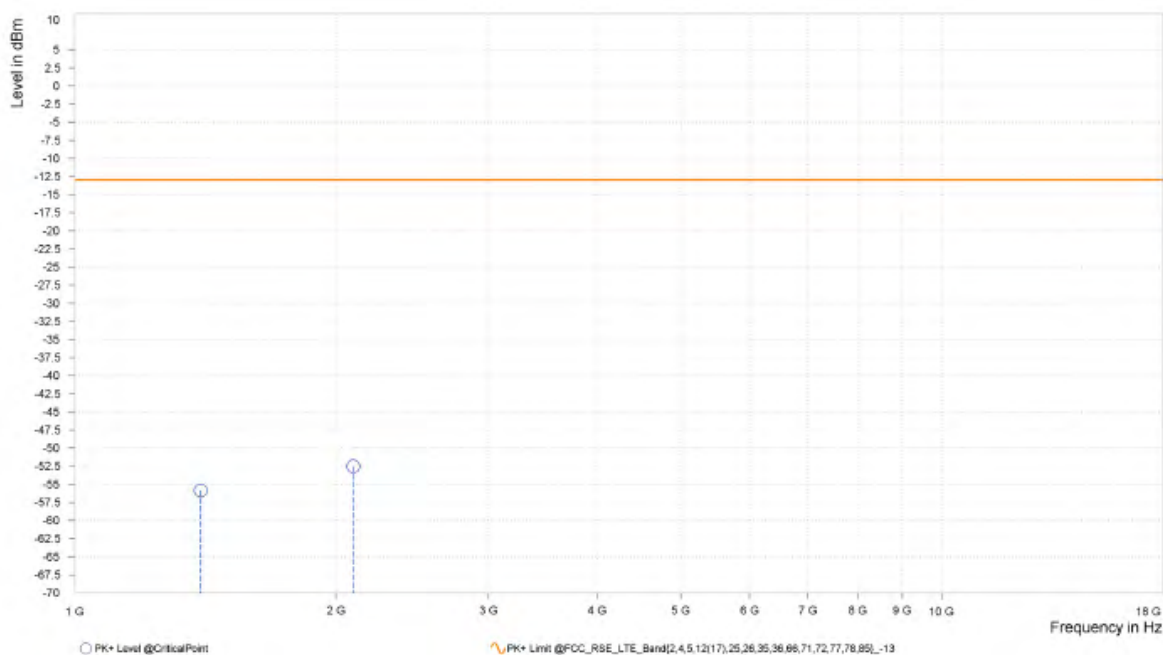

MODE	TX channel 133470	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,395.800	-56.04	-13.00	43.04	5.41	V	133.4	2.00
1	2,093.700	-51.12	-13.00	38.12	9.69	V	359	2.00

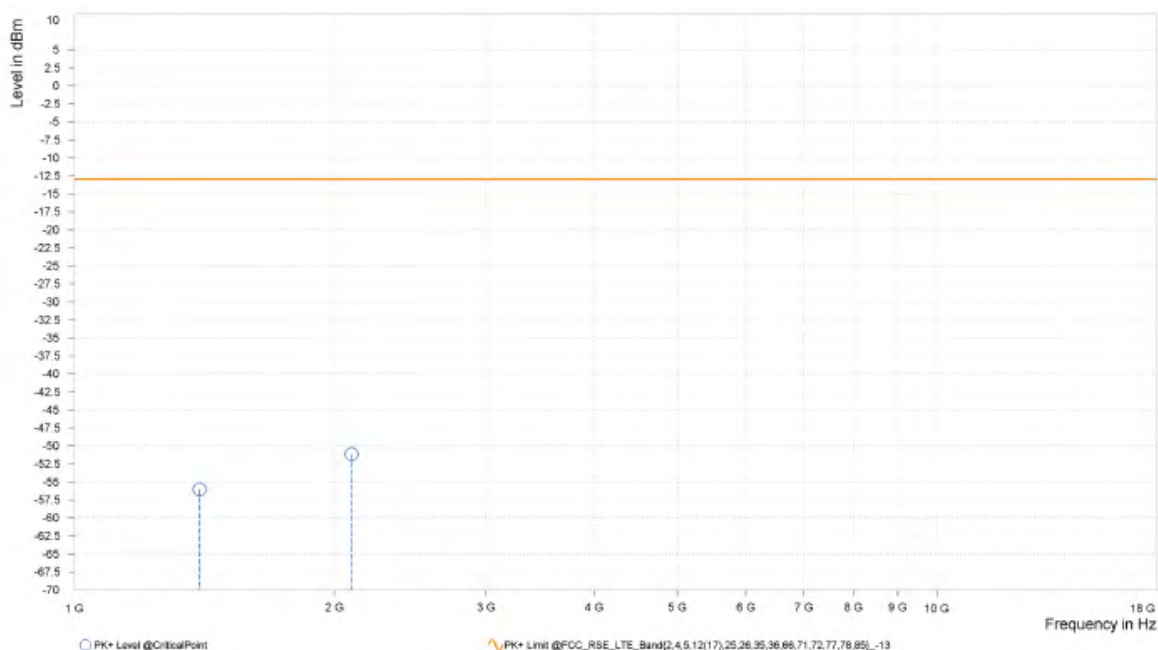

NB-IOT LTE Band 85
CHANNEL BANDWIDTH: QPSK
CH 134004


MODE	TX channel 134004	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,396.400	-55.66	-13.00	42.66	5.32	H	126.2	2.00
1	2,094.600	-51.89	-13.00	38.89	9.78	H	4.5	1.00

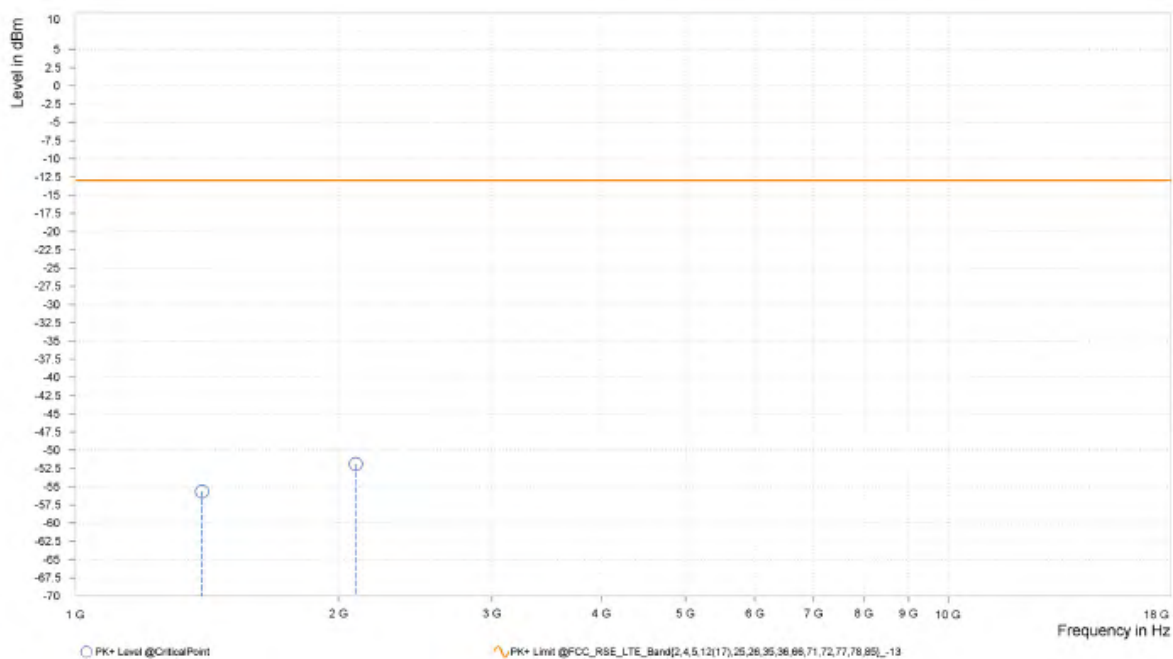

MODE	TX channel 134004	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,396.400	-54.72	-13.00	41.72	5.33	V	1	1.00
1	2,094.600	-52.65	-13.00	39.65	9.72	V	359.1	1.00

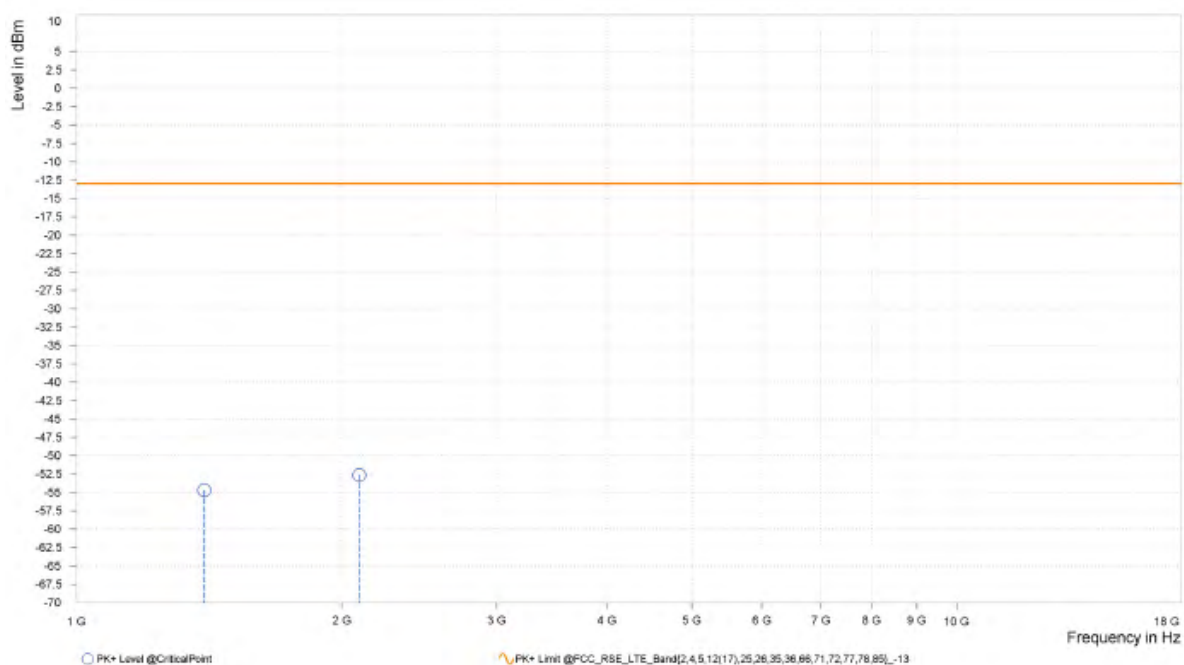

CH 134092


MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-58.07	-13.00	45.07	2.84	H	128.6	2.00
1	2,121.000	-50.13	-13.00	37.13	10.91	H	354.8	2.00

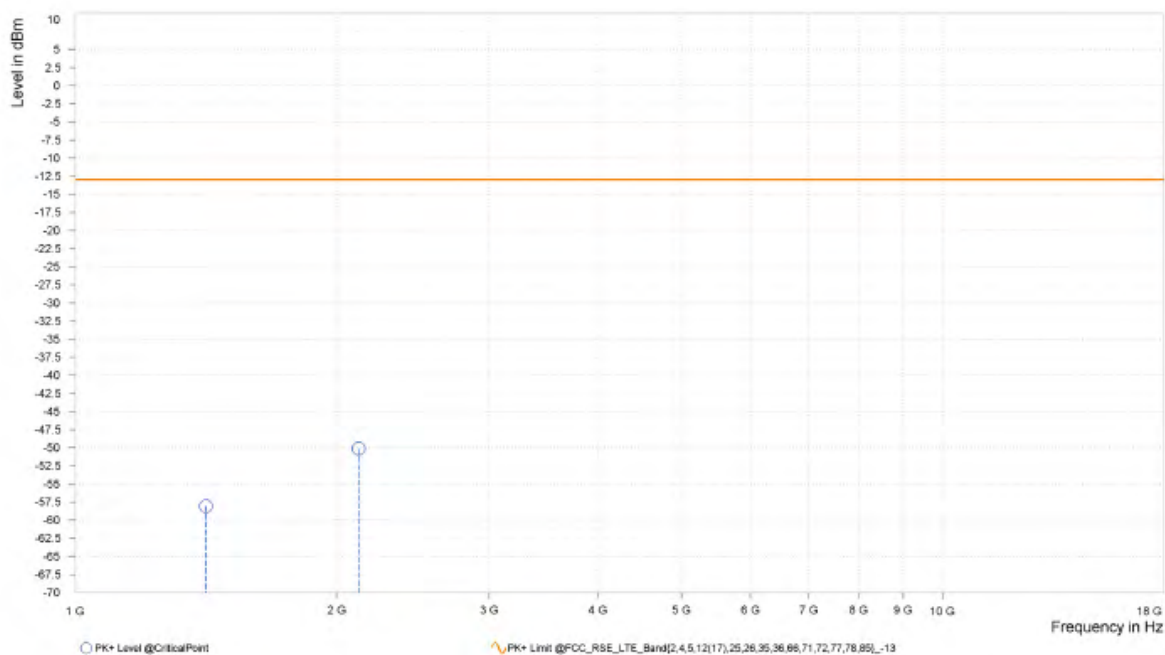

MODE	TX channel 134092	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,414.000	-58.27	-13.00	45.27	2.74	V	10.9	1.00
1	2,121.000	-50.83	-13.00	37.83	10.55	V	129.8	2.00

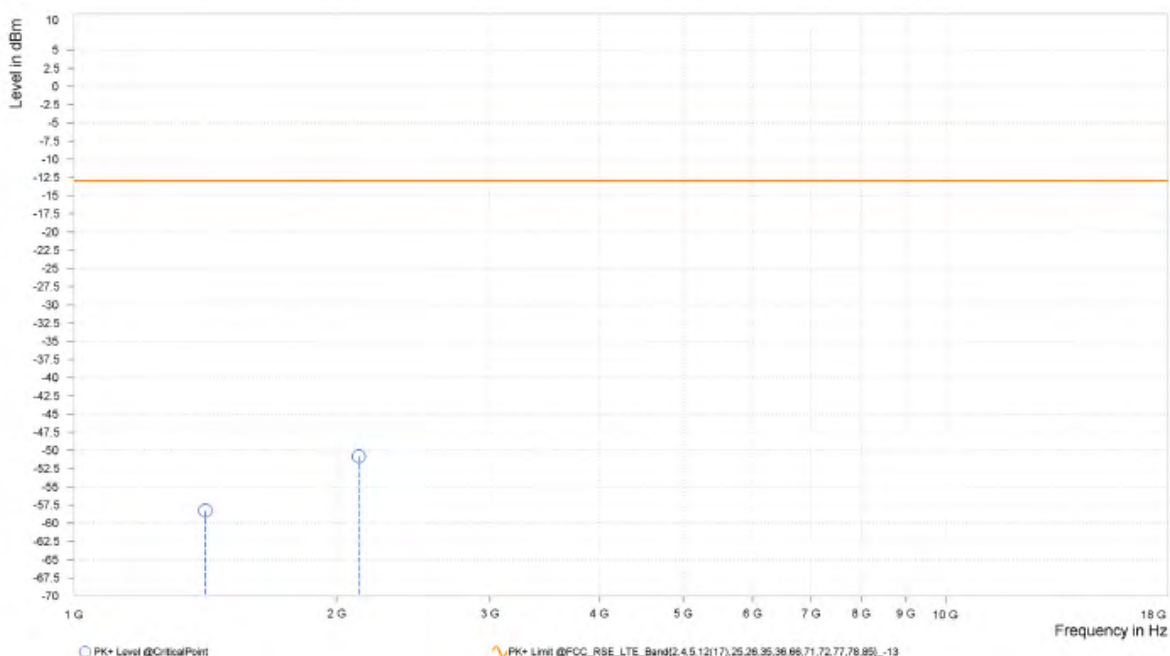

CH 134180


MODE	TX channel 134180	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,431.600	-58.40	-13.00	45.40	2.22	H	358.2	1.00
1	2,147.400	-50.51	-13.00	37.51	12.02	H	1.8	2.00

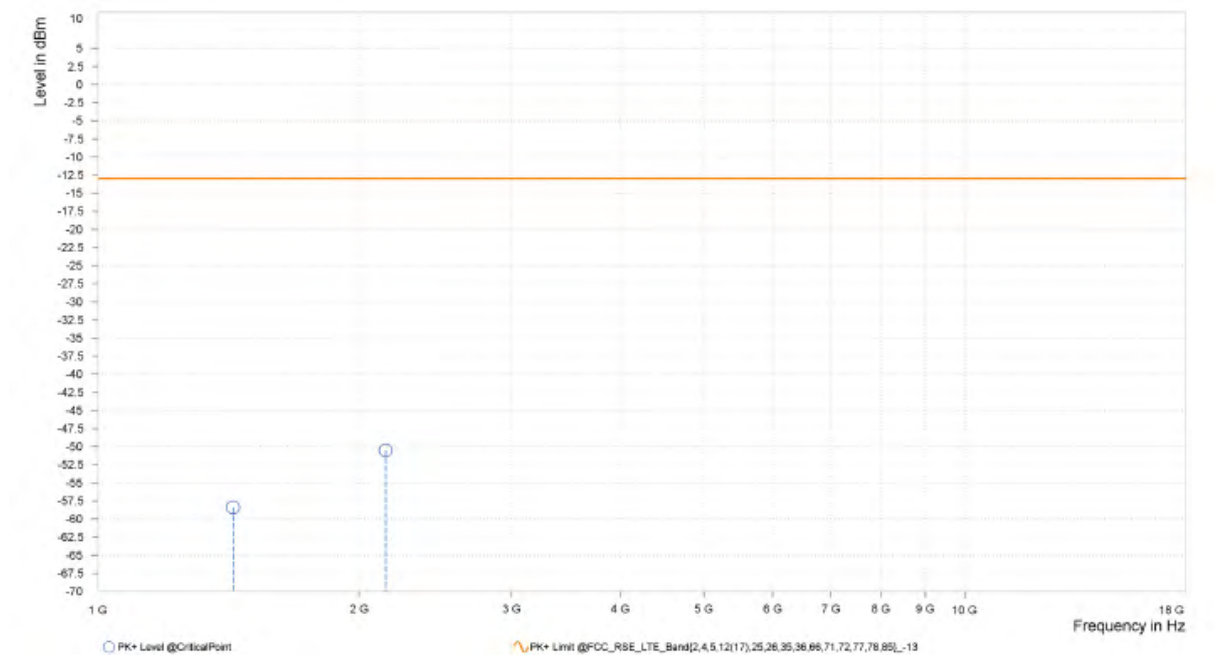

MODE	TX channel 134180	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,431.600	-58.38	-13.00	45.38	2.09	V	359	2.00
1	2,147.400	-50.30	-13.00	37.30	11.36	V	126.2	2.00

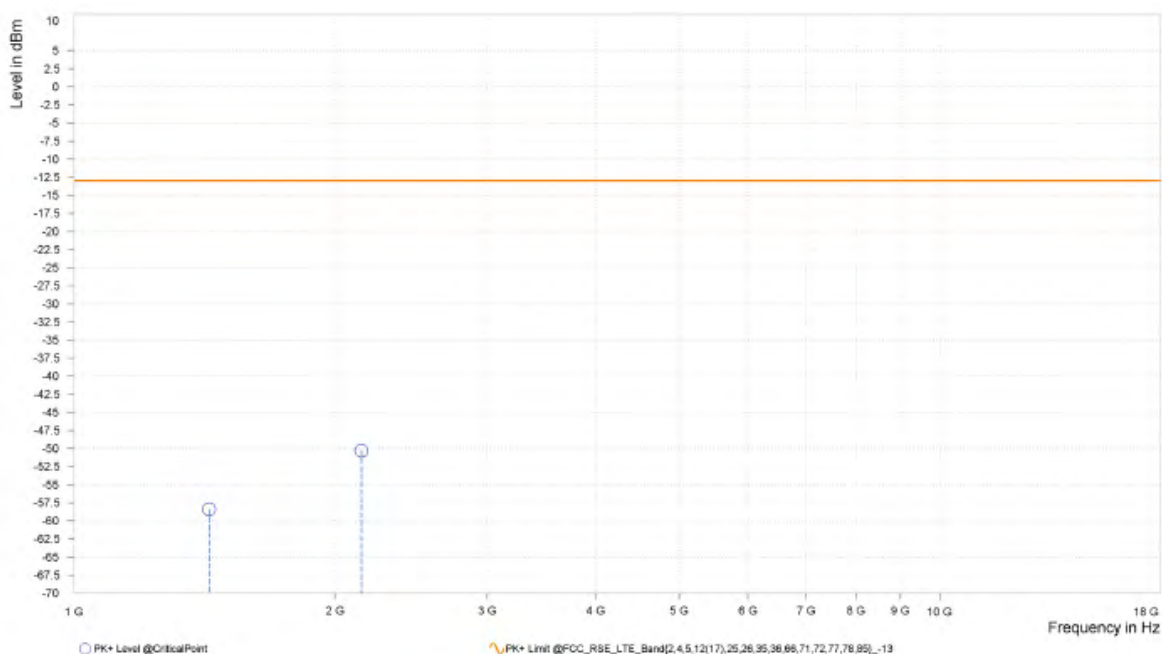


NB-IOT LTE Band 8

CHANNEL BANDWIDTH: QPSK


MODE	TX channel 21627	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,795.500	-44.84	-13.00	31.84	9.30	H	357.5	1.00
1	2,693.100	-47.49	-13.00	34.49	13.27	H	355.5	2.00

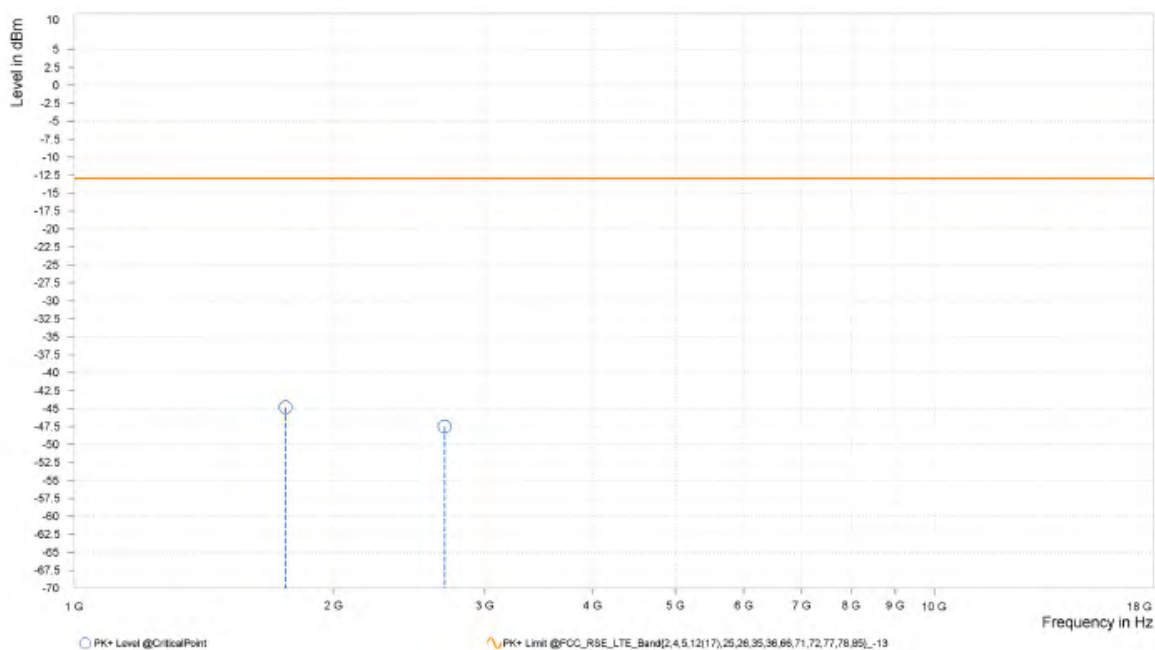

MODE	TX channel 21627	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,795.400	-52.69	-13.00	39.69	9.21	V	359	2.00
1	2,693.100	-50.07	-13.00	37.07	13.08	V	356.1	2.00

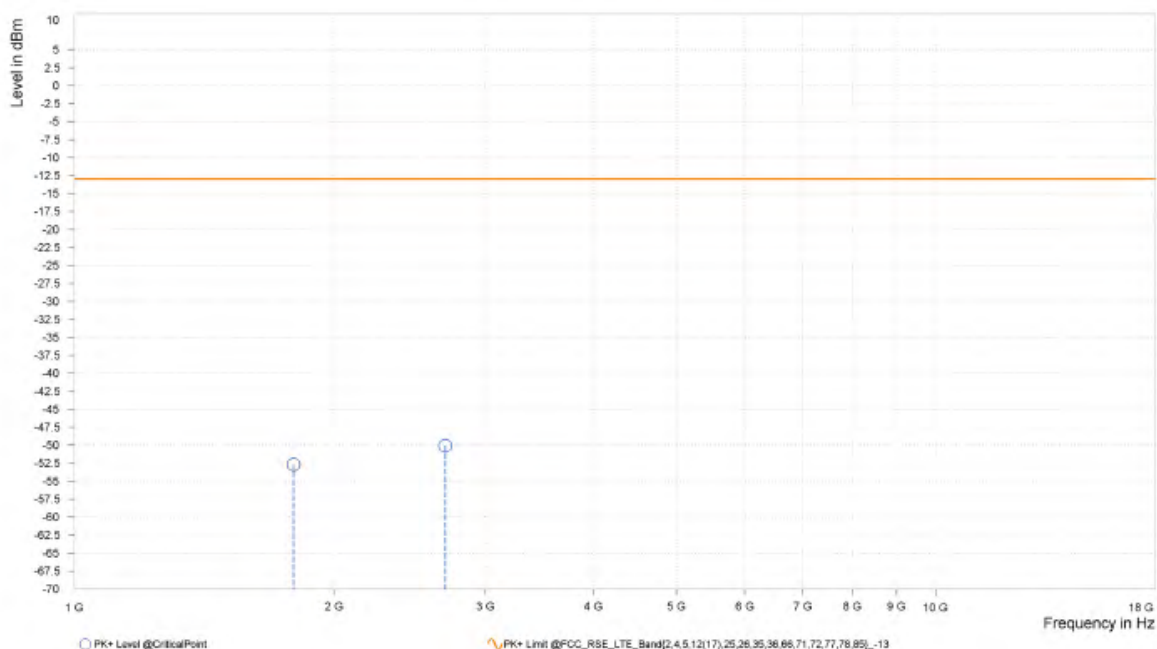

CH 21640


MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,794.500	-42.52	-13.00	29.52	9.16	H	230.2	1.00
1	2,697.000	-50.31	-13.00	37.31	13.19	H	2.2	2.00

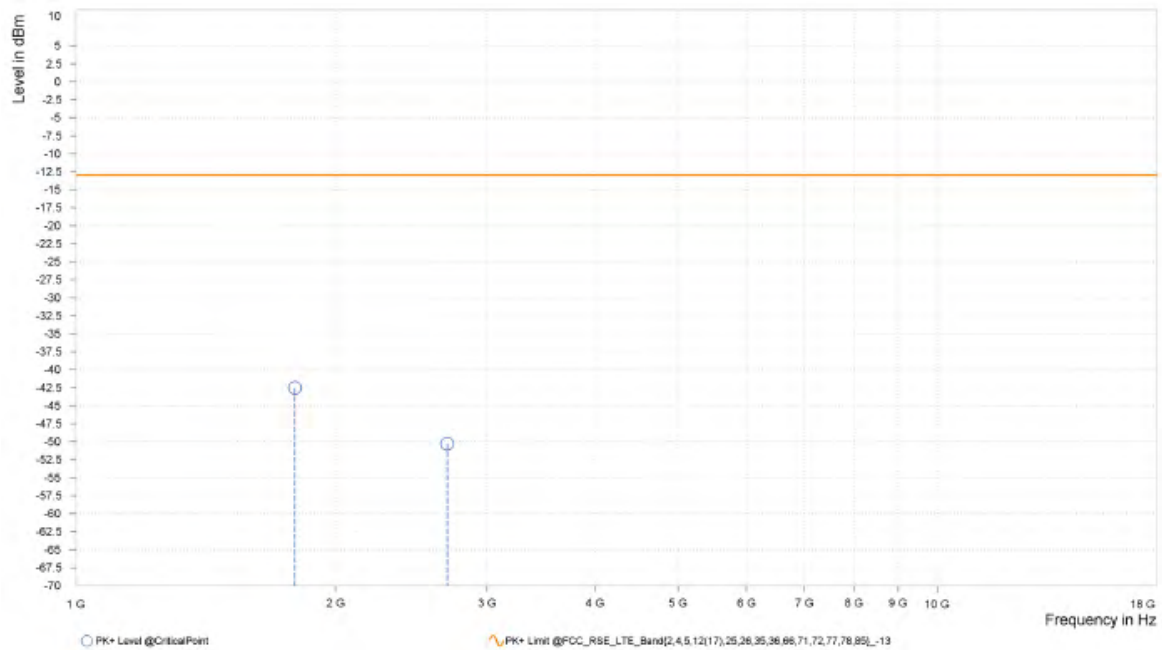

MODE	TX channel 21640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,795.000	-47.37	-13.00	34.37	9.21	V	355.5	2.00
1	2,697.000	-49.37	-13.00	36.37	12.99	V	4.4	1.00

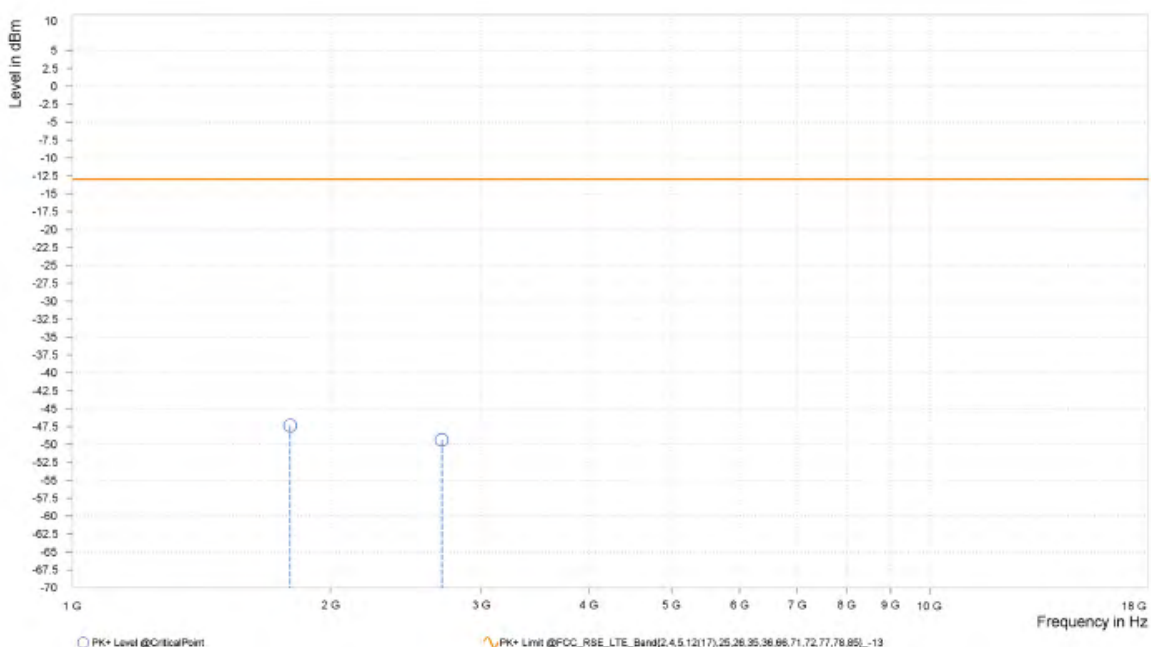

CH21653


MODE	TX channel 21653	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,800.600	-52.34	-13.00	39.34	9.13	H	355	2.00
1	2,700.900	-49.71	-13.00	36.71	13.11	H	355	2.00

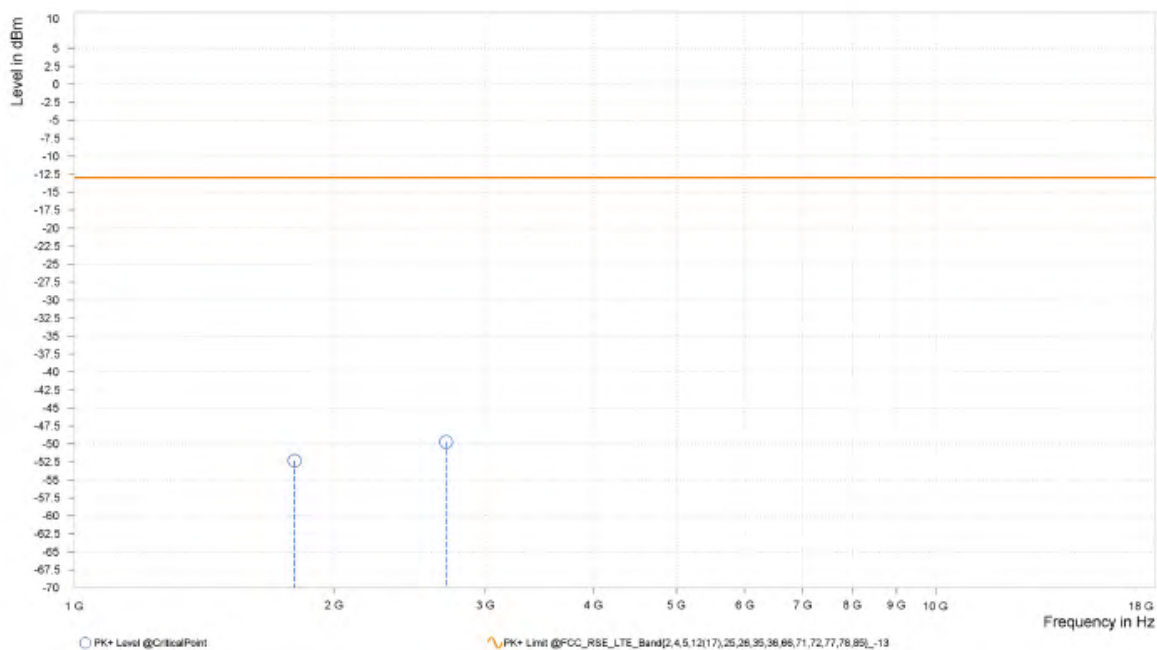

MODE	TX channel 21653	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,800.600	-49.58	-13.00	36.58	9.27	V	355.6	2.00
1	2,700.900	-49.93	-13.00	36.93	12.91	V	5	1.00

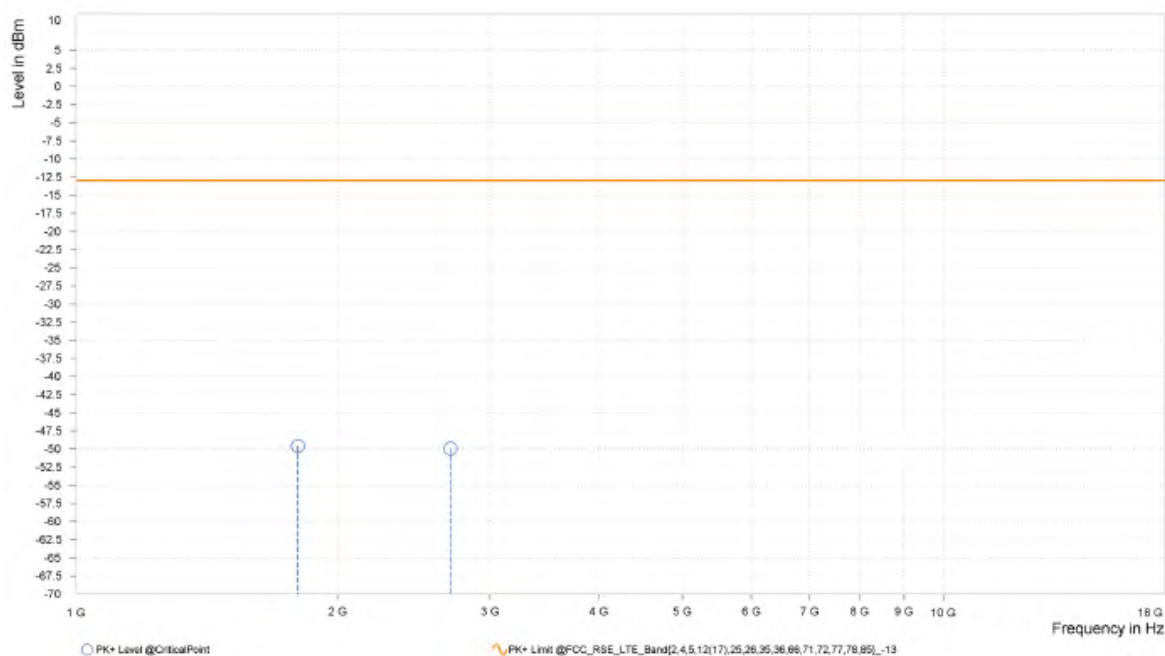


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

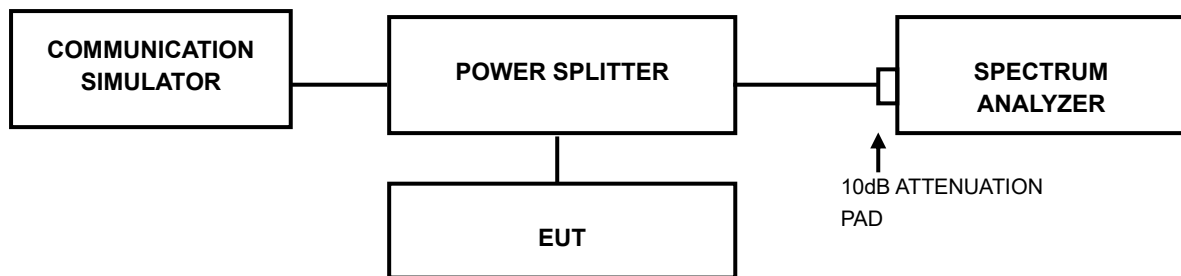

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.