


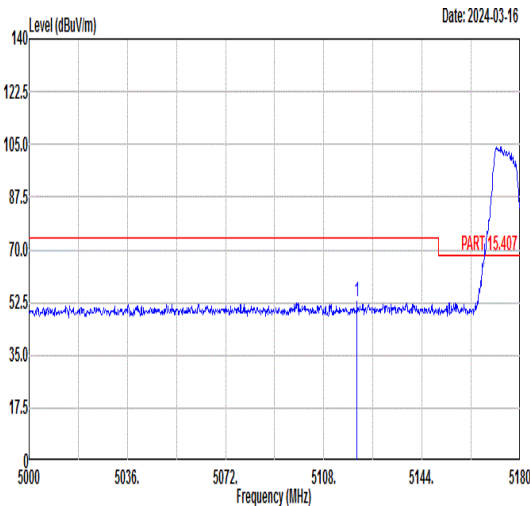


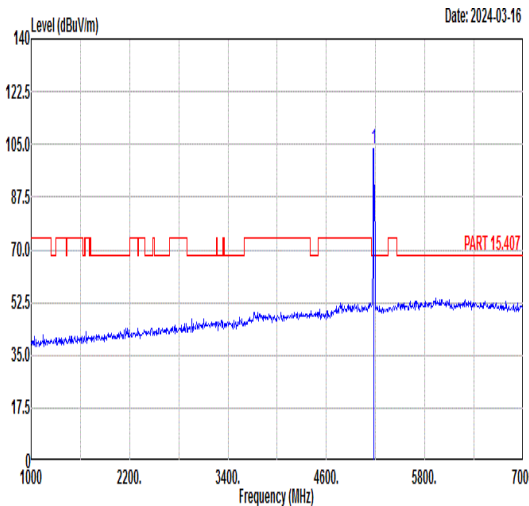

		59																																																																				
Mode		Band Edge																																																																				
		U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 106/53_5180MHz																																																																				
ANT		5+7																																																																				
Pol.		Vertical					Fundamental																																																															
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-03-16. The plot shows a blue line representing the spectrum with a sharp peak at 5180 MHz. A red horizontal line at 70.0 dBuV/m is labeled 'PART 15.407'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-03-16. The plot shows a blue line representing the spectrum with a sharp peak at 5180 MHz. A red horizontal line at 70.0 dBuV/m is labeled 'PART 15.407'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.																																																																
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1 5120.24	52.58	74.00	-21.42	40.50	36.13	8.48	32.53	399	267	PEAK	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5180.00</td><td>103.41</td><td>-----</td><td>-----</td><td>91.20</td><td>36.10</td><td>8.57</td><td>32.46</td><td>399</td><td>267</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1 5180.00	103.41	-----	-----	91.20	36.10	8.57	32.46	399	267
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																													
1 5120.24	52.58	74.00	-21.42	40.50	36.13	8.48	32.53	399	267	PEAK																																																												
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																													
1 5180.00	103.41	-----	-----	91.20	36.10	8.57	32.46	399	267	PEAK																																																												
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-03-16. The plot shows a blue line representing the average spectrum with a peak at 5180 MHz. A red horizontal line at 52.5 dBuV/m is labeled 'PART 15.407 AVG'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-03-16. The plot shows a blue line representing the average spectrum with a peak at 5180 MHz. A red horizontal line at 52.5 dBuV/m is labeled 'PART 15.407 AVG'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.																																																																
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1 5125.82	43.09	54.00	-10.91	31.00	36.12	8.49	32.52	399	267	AVERAGE	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5180.00</td><td>96.23</td><td>-----</td><td>-----</td><td>84.02</td><td>36.10</td><td>8.57</td><td>32.46</td><td>399</td><td>267</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1 5180.00	96.23	-----	-----	84.02	36.10	8.57	32.46	399	267
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																													
1 5125.82	43.09	54.00	-10.91	31.00	36.12	8.49	32.52	399	267	AVERAGE																																																												
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																													
1 5180.00	96.23	-----	-----	84.02	36.10	8.57	32.46	399	267	AVERAGE																																																												

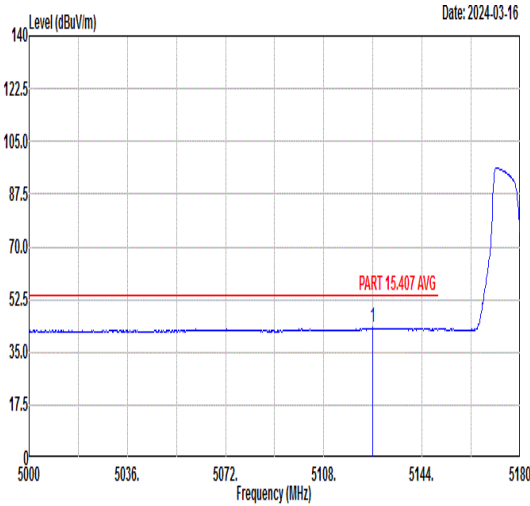

		60									
Mode		Band Edge									
		U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU26/8_5320MHz									
ANT		5+7									
Pol.		Horizontal					Fundamental				
Peak	Level (dBuV/m) Date: 2024-03-16 </										

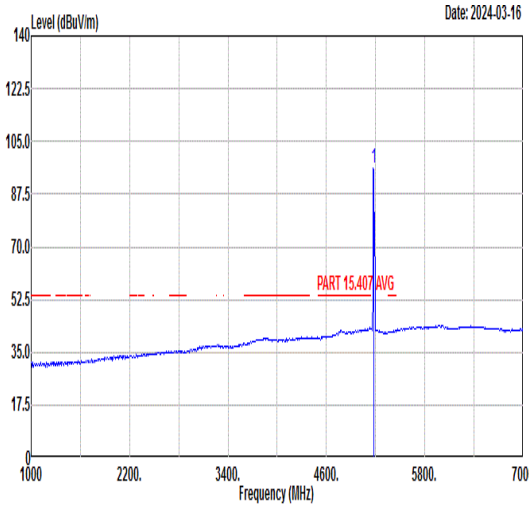

Mode	60																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU26/8_5320MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348 5376 5404 5432 5460 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5431.86</td><td>52.26</td><td>74.00</td><td>-21.74</td><td>38.75</td><td>35.94</td><td>9.67</td><td>32.10</td><td>100</td><td>4 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5431.86	52.26	74.00	-21.74	38.75	35.94	9.67	32.10	100	4 PEAK	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>90.35</td><td>-----</td><td>-----</td><td>77.35</td><td>36.00</td><td>9.24</td><td>32.24</td><td>100</td><td>4 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	90.35	-----	-----	77.35	36.00	9.24	32.24	100	4 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5431.86	52.26	74.00	-21.74	38.75	35.94	9.67	32.10	100	4 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	90.35	-----	-----	77.35	36.00	9.24	32.24	100	4 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348 5376 5404 5432 5460 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5454.68</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>29.27</td><td>35.93</td><td>9.68</td><td>32.06</td><td>100</td><td>4 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5454.68	42.82	54.00	-11.18	29.27	35.93	9.68	32.06	100	4 AVERAGE	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>83.63</td><td>-----</td><td>-----</td><td>70.63</td><td>36.00</td><td>9.24</td><td>32.24</td><td>100</td><td>4 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	83.63	-----	-----	70.63	36.00	9.24	32.24	100	4 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5454.68	42.82	54.00	-11.18	29.27	35.93	9.68	32.06	100	4 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	83.63	-----	-----	70.63	36.00	9.24	32.24	100	4 AVERAGE																																																																									



Mode	61																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU52/37_5500MHz																																																																																											
ANT	5+7																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5459.05</td><td>52.65</td><td>74.00</td><td>-21.35</td><td>39.10</td><td>35.92</td><td>9.69</td><td>32.06</td><td>106</td><td>57 PEAK</td></tr><tr><td>2 5462.95</td><td>53.57</td><td>68.30</td><td>-14.73</td><td>40.01</td><td>35.92</td><td>9.69</td><td>32.05</td><td>106</td><td>57 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5459.05	52.65	74.00	-21.35	39.10	35.92	9.69	32.06	106	57 PEAK	2 5462.95	53.57	68.30	-14.73	40.01	35.92	9.69	32.05	106	57 PEAK	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5500.00</td><td>106.96</td><td>-----</td><td>-----</td><td>93.37</td><td>35.90</td><td>9.70</td><td>32.01</td><td>106</td><td>57 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5500.00	106.96	-----	-----	93.37	35.90	9.70	32.01	106	57 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5459.05	52.65	74.00	-21.35	39.10	35.92	9.69	32.06	106	57 PEAK																																																																																			
2 5462.95	53.57	68.30	-14.73	40.01	35.92	9.69	32.05	106	57 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5500.00	106.96	-----	-----	93.37	35.90	9.70	32.01	106	57 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5458.15</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>29.92</td><td>35.93</td><td>9.69</td><td>32.06</td><td>106</td><td>57 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5458.15	43.48	54.00	-10.52	29.92	35.93	9.69	32.06	106	57 AVERAGE	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5500.00</td><td>99.59</td><td>-----</td><td>-----</td><td>86.00</td><td>35.90</td><td>9.70</td><td>32.01</td><td>106</td><td>57 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5500.00	99.59	-----	-----	86.00	35.90	9.70	32.01	106	57 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5458.15	43.48	54.00	-10.52	29.92	35.93	9.69	32.06	106	57 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5500.00	99.59	-----	-----	86.00	35.90	9.70	32.01	106	57 AVERAGE																																																																																			



		61																																																																																																		
Mode		Band Edge																																																																																																		
		U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU52/37_5500MHz																																																																																																		
ANT		5+7																																																																																																		
Pol.		Vertical					Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5454.40</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>39.04</td><td>35.93</td><td>9.68</td><td>32.06</td><td>313</td><td>263 PEAK</td></tr><tr><td>2 5461.75</td><td>53.42</td><td>68.30</td><td>-14.88</td><td>39.86</td><td>35.92</td><td>9.69</td><td>32.05</td><td>313</td><td>263 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5500.00</td><td>109.97</td><td>-----</td><td>-----</td><td>96.38</td><td>35.90</td><td>9.70</td><td>32.01</td><td>313</td><td>263 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5454.40	52.59	74.00	-21.41	39.04	35.93	9.68	32.06	313	263 PEAK	2 5461.75	53.42	68.30	-14.88	39.86	35.92	9.69	32.05	313	263 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5500.00	109.97	-----	-----	96.38	35.90	9.70	32.01	313	263 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5454.40	52.59	74.00	-21.41	39.04	35.93	9.68	32.06	313	263 PEAK																																																																																											
2 5461.75	53.42	68.30	-14.88	39.86	35.92	9.69	32.05	313	263 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5500.00	109.97	-----	-----	96.38	35.90	9.70	32.01	313	263 PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5459.65</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>29.92</td><td>35.92</td><td>9.69</td><td>32.06</td><td>313</td><td>263 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5500.00</td><td>101.35</td><td>-----</td><td>-----</td><td>87.76</td><td>35.90</td><td>9.70</td><td>32.01</td><td>313</td><td>263 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5459.65	43.47	54.00	-10.53	29.92	35.92	9.69	32.06	313	263 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5500.00	101.35	-----	-----	87.76	35.90	9.70	32.01	313	263 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5459.65	43.47	54.00	-10.53	29.92	35.92	9.69	32.06	313	263 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5500.00	101.35	-----	-----	87.76	35.90	9.70	32.01	313	263 AVERAGE																																																																																											



Mode	62																																																																																		
	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU52/40_5700MHz																																																																																		
ANT	5+7																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5728.99</td><td>53.07</td><td>68.30</td><td>-15.23</td><td>39.05</td><td>36.22</td><td>10.03</td><td>32.23</td><td>181</td><td>0 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5728.99	53.07	68.30	-15.23	39.05	36.22	10.03	32.23	181	0 PEAK	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>100.55</td><td>-----</td><td>86.58</td><td>36.19</td><td>9.99</td><td>32.21</td><td>181</td><td>0 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	100.55	-----	86.58	36.19	9.99	32.21	181	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5728.99	53.07	68.30	-15.23	39.05	36.22	10.03	32.23	181	0 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	100.55	-----	86.58	36.19	9.99	32.21	181	0 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>92.99</td><td>-----</td><td>79.02</td><td>36.19</td><td>9.99</td><td>32.21</td><td>181</td><td>0 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	92.99	-----	79.02	36.19	9.99	32.21	181	0 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	92.99	-----	79.02	36.19	9.99	32.21	181	0 AVERAGE																																																																										



Mode	62																																																																																														
	Band Edge																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU52/40_5700MHz																																																																																														
ANT	5+7																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5700 5713 5726 5739 5752 5765 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5730.94</td><td>54.35</td><td>68.30</td><td>-13.95</td><td>40.33</td><td>36.22</td><td>10.03</td><td>32.23</td><td>284</td><td>227</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5730.94	54.35	68.30	-13.95	40.33	36.22	10.03	32.23	284	227	PEAK	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>107.52</td><td>-----</td><td>93.56</td><td>36.19</td><td>9.97</td><td>32.20</td><td>284</td><td>227</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	107.52	-----	93.56	36.19	9.97	32.20	284	227	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5730.94	54.35	68.30	-13.95	40.33	36.22	10.03	32.23	284	227	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	107.52	-----	93.56	36.19	9.97	32.20	284	227	PEAK																																																																																					
Avg	Blank						Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>99.30</td><td>-----</td><td>85.34</td><td>36.19</td><td>9.97</td><td>32.20</td><td>284</td><td>227</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.30	-----	85.34	36.19	9.97	32.20	284	227	AVERAGE																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	99.30	-----	85.34	36.19	9.97	32.20	284	227	AVERAGE																																																																																					



Mode	63																																																				
	Band Edge																																																				
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																				
ANT	5+7																																																				
Pol.	Horizontal																																																				
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5147.78</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>42.60</td><td>36.11</td><td>8.53</td><td>32.49</td><td>100</td><td>301</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5147.78	54.75	74.00	-19.25	42.60	36.11	8.53	32.49	100	301	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5147.78	54.75	74.00	-19.25	42.60	36.11	8.53	32.49	100	301	PEAK																																										
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.14</td><td>44.35</td><td>54.00</td><td>-9.65</td><td>32.20</td><td>36.11</td><td>8.53</td><td>32.49</td><td>100</td><td>301</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.14	44.35	54.00	-9.65	32.20	36.11	8.53	32.49	100	301	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5148.14	44.35	54.00	-9.65	32.20	36.11	8.53	32.49	100	301	AVERAGE																																										
Fundamental	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>106.57</td><td>-----</td><td>-----</td><td>94.31</td><td>36.09</td><td>8.61</td><td>32.44</td><td>100</td><td>301</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	106.57	-----	-----	94.31	36.09	8.61	32.44	100	301	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5180.00	106.57	-----	-----	94.31	36.09	8.61	32.44	100	301	PEAK																																										
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>98.41</td><td>-----</td><td>-----</td><td>86.15</td><td>36.09</td><td>8.61</td><td>32.44</td><td>100</td><td>301</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	98.41	-----	-----	86.15	36.09	8.61	32.44	100	301	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5180.00	98.41	-----	-----	86.15	36.09	8.61	32.44	100	301	AVERAGE																																										



		63																																																																																												
Mode		Band Edge																																																																																												
		U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Full RU_5180MHz																																																																																												
ANT		5+7																																																																																												
Pol.		Vertical					Fundamental																																																																																							
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5148.50</td><td>59.06</td><td>74.00</td><td>-14.94</td><td>46.91</td><td>36.11</td><td>8.53</td><td>32.49</td><td>346</td><td>257</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.50	59.06	74.00	-14.94	46.91	36.11	8.53	32.49	346	257	PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>110.77</td><td>-----</td><td>-----</td><td>98.56</td><td>36.10</td><td>8.57</td><td>32.46</td><td>346</td><td>257</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	110.77	-----	-----	98.56	36.10	8.57	32.46	346	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5148.50	59.06	74.00	-14.94	46.91	36.11	8.53	32.49	346	257	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5180.00	110.77	-----	-----	98.56	36.10	8.57	32.46	346	257	PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.22</td><td>46.51</td><td>54.00</td><td>-7.49</td><td>34.36</td><td>36.11</td><td>8.53</td><td>32.49</td><td>346</td><td>257</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.22	46.51	54.00	-7.49	34.36	36.11	8.53	32.49	346	257	AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>101.84</td><td>-----</td><td>-----</td><td>89.63</td><td>36.10</td><td>8.57</td><td>32.46</td><td>346</td><td>257</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	101.84	-----	-----	89.63	36.10	8.57	32.46	346	257	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5149.22	46.51	54.00	-7.49	34.36	36.11	8.53	32.49	346	257	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5180.00	101.84	-----	-----	89.63	36.10	8.57	32.46	346	257	AVERAGE																																																																																			





Mode	63																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Full RU_5180MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10360.00</td><td>47.23</td><td>68.30</td><td>-21.07</td><td>60.09</td><td>38.74</td><td>12.06</td><td>63.66</td><td>---</td><td>--- Peak</td></tr><tr><td>2 15540.00</td><td>49.65</td><td>74.00</td><td>-24.35</td><td>58.33</td><td>40.73</td><td>14.58</td><td>63.99</td><td>---</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	47.23	68.30	-21.07	60.09	38.74	12.06	63.66	---	--- Peak	2 15540.00	49.65	74.00	-24.35	58.33	40.73	14.58	63.99	---	--- Peak	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10360.00</td><td>47.08</td><td>68.30</td><td>-21.22</td><td>59.94</td><td>38.74</td><td>12.06</td><td>63.66</td><td>---</td><td>--- Peak</td></tr><tr><td>2 15540.00</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>58.17</td><td>40.73</td><td>14.58</td><td>63.99</td><td>---</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	47.08	68.30	-21.22	59.94	38.74	12.06	63.66	---	--- Peak	2 15540.00	49.49	74.00	-24.51	58.17	40.73	14.58	63.99	---	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10360.00	47.23	68.30	-21.07	60.09	38.74	12.06	63.66	---	--- Peak																																																																																									
2 15540.00	49.65	74.00	-24.35	58.33	40.73	14.58	63.99	---	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10360.00	47.08	68.30	-21.22	59.94	38.74	12.06	63.66	---	--- Peak																																																																																									
2 15540.00	49.49	74.00	-24.51	58.17	40.73	14.58	63.99	---	--- Peak																																																																																									





Mode	64																																																																																																													
	Harmonic																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT 20_CH44_Full RU_5220MHz																																																																																																													
ANT	5+7																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)					Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>47.12</td><td>68.30</td><td>-21.18</td><td>59.85</td><td>38.78</td><td>12.12</td><td>63.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15660.00</td><td>50.99</td><td>74.00</td><td>-23.01</td><td>59.55</td><td>40.83</td><td>14.64</td><td>64.03</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	47.12	68.30	-21.18	59.85	38.78	12.12	63.63	---	---	Peak	2 15660.00	50.99	74.00	-23.01	59.55	40.83	14.64	64.03	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>47.35</td><td>68.30</td><td>-20.95</td><td>60.08</td><td>38.78</td><td>12.12</td><td>63.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15660.00</td><td>49.71</td><td>74.00</td><td>-24.29</td><td>58.27</td><td>40.83</td><td>14.64</td><td>64.03</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	47.35	68.30	-20.95	60.08	38.78	12.12	63.63	---	---	Peak	2 15660.00	49.71	74.00	-24.29	58.27	40.83	14.64	64.03	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10440.00	47.12	68.30	-21.18	59.85	38.78	12.12	63.63	---	---	Peak																																																																																																				
2 15660.00	50.99	74.00	-23.01	59.55	40.83	14.64	64.03	---	---	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10440.00	47.35	68.30	-20.95	60.08	38.78	12.12	63.63	---	---	Peak																																																																																																				
2 15660.00	49.71	74.00	-24.29	58.27	40.83	14.64	64.03	---	---	Peak																																																																																																				

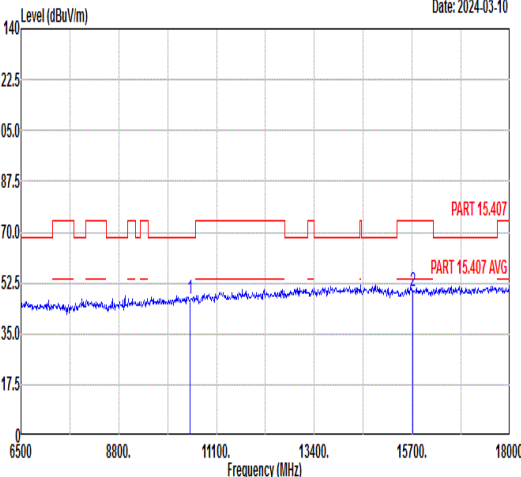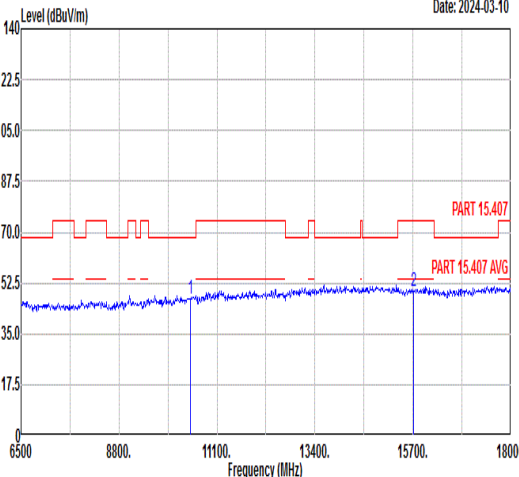

Mode	65																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT 20_CH48_Full RU_5240MHz																																																																																																																			
ANT	5+7																																																																																																																			
Pol.	Horizontal							Vertical																																																																																																												
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>46.77</td><td>68.30</td><td>-21.53</td><td>59.44</td><td>38.79</td><td>12.15</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>58.43</td><td>40.88</td><td>14.66</td><td>64.05</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit	Read	Ant	Cable Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.77	68.30	-21.53	59.44	38.79	12.15	63.61	---	---	Peak	2	15720.00	49.92	74.00	-24.08	58.43	40.88	14.66	64.05	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.21</td><td>68.30</td><td>-21.09</td><td>59.88</td><td>38.79</td><td>12.15</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>58.42</td><td>40.88</td><td>14.66</td><td>64.05</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit	Read	Ant	Cable Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.21	68.30	-21.09	59.88	38.79	12.15	63.61	---	---	Peak	2	15720.00	49.91	74.00	-24.09	58.42	40.88	14.66	64.05	---	---	Peak
		Limit	Read	Ant	Cable Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	46.77	68.30	-21.53	59.44	38.79	12.15	63.61	---	---	Peak																																																																																																									
2	15720.00	49.92	74.00	-24.08	58.43	40.88	14.66	64.05	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	47.21	68.30	-21.09	59.88	38.79	12.15	63.61	---	---	Peak																																																																																																									
2	15720.00	49.91	74.00	-24.09	58.42	40.88	14.66	64.05	---	---	Peak																																																																																																									



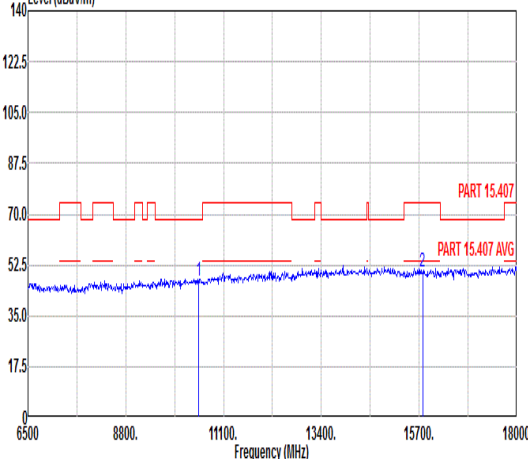
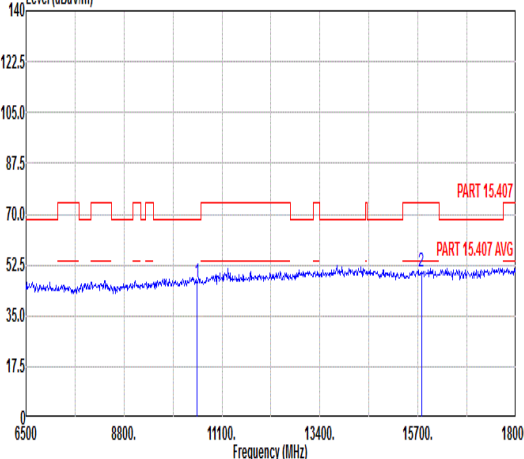


Mode	66																																																																																																													
	Harmonic																																																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH52_Full RU_5280MHz																																																																																																													
ANT	5+7																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-10  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-10  Frequency (MHz)																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10520.00</td><td>46.86</td><td>68.30</td><td>-21.44</td><td>59.47</td><td>38.81</td><td>12.18</td><td>63.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>49.93</td><td>74.00</td><td>-24.07</td><td>58.39</td><td>40.92</td><td>14.69</td><td>64.07</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	46.86	68.30	-21.44	59.47	38.81	12.18	63.60	---	---	Peak	2 15780.00	49.93	74.00	-24.07	58.39	40.92	14.69	64.07	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10520.00</td><td>46.50</td><td>68.30</td><td>-21.80</td><td>59.11</td><td>38.81</td><td>12.18</td><td>63.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>58.40</td><td>40.92</td><td>14.69</td><td>64.07</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	46.50	68.30	-21.80	59.11	38.81	12.18	63.60	---	---	Peak	2 15780.00	49.94	74.00	-24.06	58.40	40.92	14.69	64.07	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10520.00	46.86	68.30	-21.44	59.47	38.81	12.18	63.60	---	---	Peak																																																																																																				
2 15780.00	49.93	74.00	-24.07	58.39	40.92	14.69	64.07	---	---	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10520.00	46.50	68.30	-21.80	59.11	38.81	12.18	63.60	---	---	Peak																																																																																																				
2 15780.00	49.94	74.00	-24.06	58.40	40.92	14.69	64.07	---	---	Peak																																																																																																				



Mode	67																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH60_Full RU_5300MHz																																																																																											
ANT	5+7																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>47.32</td><td>74.00</td><td>-26.68</td><td>59.82</td><td>38.84</td><td>12.23</td><td>63.57</td><td>--- Peak</td></tr><tr><td>2 15900.00</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>56.95</td><td>41.02</td><td>14.75</td><td>64.11</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10600.00	47.32	74.00	-26.68	59.82	38.84	12.23	63.57	--- Peak	2 15900.00	48.61	74.00	-25.39	56.95	41.02	14.75	64.11	--- Peak	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>59.85</td><td>38.84</td><td>12.23</td><td>63.57</td><td>--- Peak</td></tr><tr><td>2 15900.00</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>57.85</td><td>41.02</td><td>14.75</td><td>64.11</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10600.00	47.35	74.00	-26.65	59.85	38.84	12.23	63.57	--- Peak	2 15900.00	49.51	74.00	-24.49	57.85	41.02	14.75	64.11	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10600.00	47.32	74.00	-26.68	59.82	38.84	12.23	63.57	--- Peak																																																																																				
2 15900.00	48.61	74.00	-25.39	56.95	41.02	14.75	64.11	--- Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10600.00	47.35	74.00	-26.65	59.85	38.84	12.23	63.57	--- Peak																																																																																				
2 15900.00	49.51	74.00	-24.49	57.85	41.02	14.75	64.11	--- Peak																																																																																				

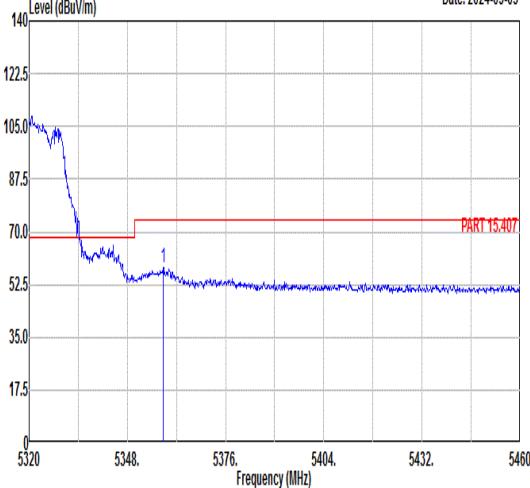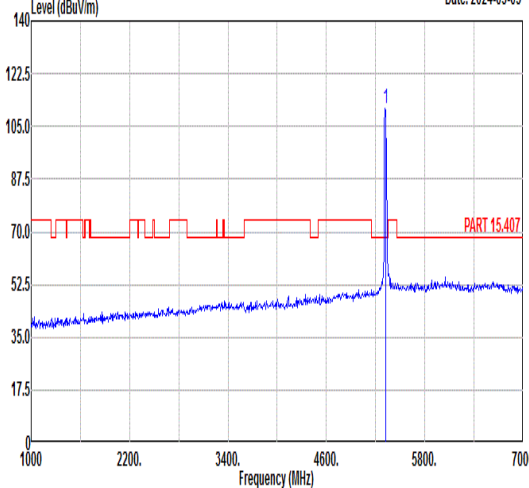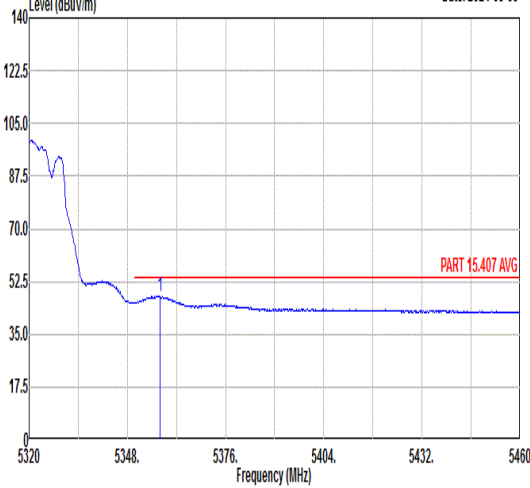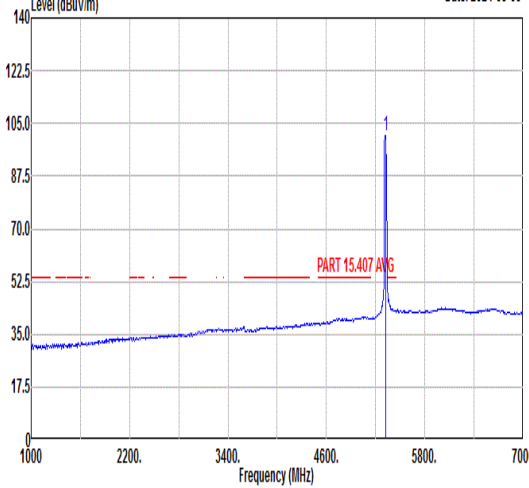

		68																																																																																							
Mode		Band Edge																																																																																							
		U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Full RU_5320MHz																																																																																							
ANT		5+7																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-03-03 					Level (dBuV/m) Date: 2024-03-03 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5358.22</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>45.18</td><td>35.99</td><td>9.41</td><td>32.20</td><td>100</td><td>59 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5358.22	58.38	74.00	-15.62	45.18	35.99	9.41	32.20	100	59 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5320.00</td><td>110.94</td><td>-----</td><td>-----</td><td>98.01</td><td>36.01</td><td>9.18</td><td>32.26</td><td>100</td><td>59 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	110.94	-----	-----	98.01	36.01	9.18	32.26	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5358.22	58.38	74.00	-15.62	45.18	35.99	9.41	32.20	100	59 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5320.00	110.94	-----	-----	98.01	36.01	9.18	32.26	100	59 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-03-03 					Level (dBuV/m) Date: 2024-03-03 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5357.24</td><td>47.69</td><td>54.00</td><td>-6.31</td><td>34.50</td><td>35.99</td><td>9.40</td><td>32.20</td><td>100</td><td>59 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5357.24	47.69	54.00	-6.31	34.50	35.99	9.40	32.20	100	59 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5320.00</td><td>101.03</td><td>-----</td><td>-----</td><td>88.10</td><td>36.01</td><td>9.18</td><td>32.26</td><td>100</td><td>59 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5320.00	101.03	-----	-----	88.10	36.01	9.18	32.26	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5357.24	47.69	54.00	-6.31	34.50	35.99	9.40	32.20	100	59 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5320.00	101.03	-----	-----	88.10	36.01	9.18	32.26	100	59 AVERAGE																																																																																







Mode	68																																																
	Band Edge																																																
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Full RU_5320MHz																																																
ANT	5+7																																																
Pol.	Vertical					Fundamental																																											
Peak	Level (dBuV/m) Date: 2024-03-03 1 5354.72 59.96 74.00 -14.04 46.78 35.99 9.39 32.20 335 256 PEAK					Level (dBuV/m) Date: 2024-03-03 1 5320.00 108.03 ----- 95.03 36.00 9.24 32.24 335 256 PEAK																																											
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5354.72</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>46.78</td><td>35.99</td><td>9.39</td><td>32.20</td><td>335</td><td>256 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5354.72	59.96	74.00	-14.04	46.78	35.99	9.39	32.20	335	256 PEAK	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>108.03</td><td>-----</td><td>95.03</td><td>36.00</td><td>9.24</td><td>32.24</td><td>335</td><td>256</td><td>PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	108.03	-----	95.03	36.00	9.24	32.24	335	256
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5354.72	59.96	74.00	-14.04	46.78	35.99	9.39	32.20	335	256 PEAK																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5320.00	108.03	-----	95.03	36.00	9.24	32.24	335	256	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-03-03 1 5354.16 48.93 54.00 -5.07 35.75 35.99 9.39 32.20 335 256 AVERAGE					Level (dBuV/m) Date: 2024-03-03 1 5320.00 100.08 ----- 87.08 36.00 9.24 32.24 335 256 AVERAGE																																											
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5354.16</td><td>48.93</td><td>54.00</td><td>-5.07</td><td>35.75</td><td>35.99</td><td>9.39</td><td>32.20</td><td>335</td><td>256 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5354.16	48.93	54.00	-5.07	35.75	35.99	9.39	32.20	335	256 AVERAGE	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>100.08</td><td>-----</td><td>87.08</td><td>36.00</td><td>9.24</td><td>32.24</td><td>335</td><td>256</td><td>AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	100.08	-----	87.08	36.00	9.24	32.24	335	256
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5354.16	48.93	54.00	-5.07	35.75	35.99	9.39	32.20	335	256 AVERAGE																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5320.00	100.08	-----	87.08	36.00	9.24	32.24	335	256	AVERAGE																																								



Mode	68																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Full RU_5320MHz																																																																																																																											
ANT	5+7																																																																																																																											
Pol.	Horizontal								Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)								Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>48.30</td><td>74.00</td><td>-25.70</td><td>60.73</td><td>38.86</td><td>12.26</td><td>63.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>48.51</td><td>74.00</td><td>-25.49</td><td>56.80</td><td>41.07</td><td>14.77</td><td>64.13</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	48.30	74.00	-25.70	60.73	38.86	12.26	63.55	---	---	Peak	2	15960.00	48.51	74.00	-25.49	56.80	41.07	14.77	64.13	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>60.02</td><td>38.86</td><td>12.26</td><td>63.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>48.40</td><td>74.00</td><td>-25.60</td><td>56.69</td><td>41.07</td><td>14.77</td><td>64.13</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	47.59	74.00	-26.41	60.02	38.86	12.26	63.55	---	---	Peak	2	15960.00	48.40	74.00	-25.60	56.69	41.07	14.77	64.13	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	10640.00	48.30	74.00	-25.70	60.73	38.86	12.26	63.55	---	---	Peak																																																																																																																	
2	15960.00	48.51	74.00	-25.49	56.80	41.07	14.77	64.13	---	---	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	10640.00	47.59	74.00	-26.41	60.02	38.86	12.26	63.55	---	---	Peak																																																																																																																	
2	15960.00	48.40	74.00	-25.60	56.69	41.07	14.77	64.13	---	---	Peak																																																																																																																	

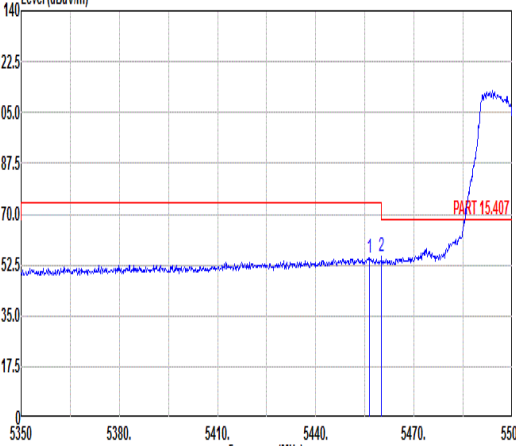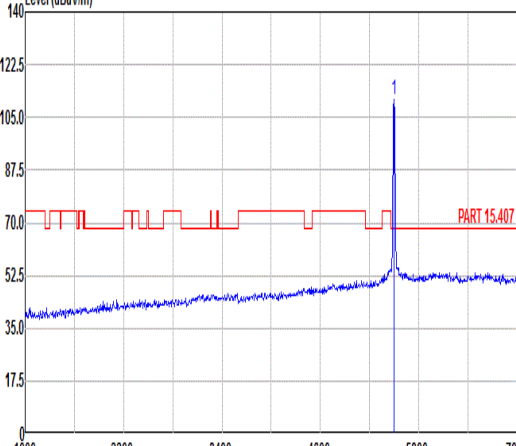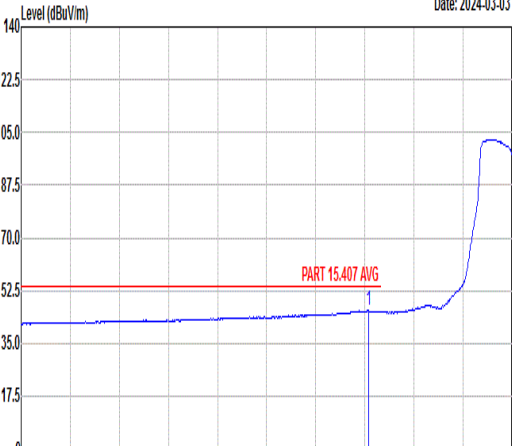
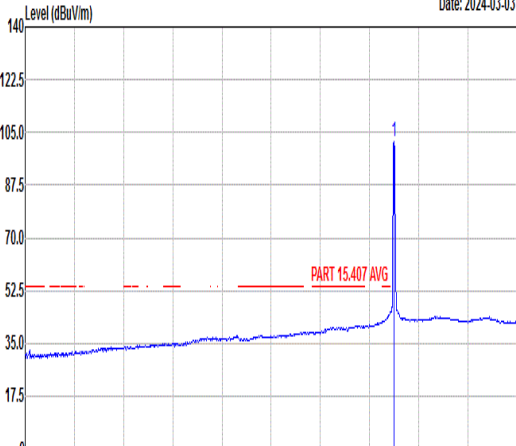


		69																																																																																																					
Mode		Band Edge																																																																																																					
		U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Full RU_5500MHz																																																																																																					
ANT		5+7																																																																																																					
Pol.		Horizontal					Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.50</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>41.41</td><td>35.93</td><td>9.69</td><td>32.06</td><td>100</td><td>298 PEAK</td></tr><tr><td>2</td><td>5460.10</td><td>55.25</td><td>68.30</td><td>-13.05</td><td>41.70</td><td>35.92</td><td>9.69</td><td>32.06</td><td>100</td><td>298 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5456.50	54.97	74.00	-19.03	41.41	35.93	9.69	32.06	100	298 PEAK	2	5460.10	55.25	68.30	-13.05	41.70	35.92	9.69	32.06	100	298 PEAK	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>110.70</td><td>-----</td><td>-----</td><td>97.11</td><td>35.90</td><td>9.70</td><td>32.01</td><td>100</td><td>298 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.70	-----	-----	97.11	35.90	9.70	32.01	100	298 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5456.50	54.97	74.00	-19.03	41.41	35.93	9.69	32.06	100	298 PEAK																																																																																													
2	5460.10	55.25	68.30	-13.05	41.70	35.92	9.69	32.06	100	298 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5500.00	110.70	-----	-----	97.11	35.90	9.70	32.01	100	298 PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.20</td><td>45.80</td><td>54.00</td><td>-8.20</td><td>32.24</td><td>35.93</td><td>9.69</td><td>32.06</td><td>100</td><td>298 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5456.20	45.80	54.00	-8.20	32.24	35.93	9.69	32.06	100	298 AVERAGE	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.14</td><td>-----</td><td>-----</td><td>88.55</td><td>35.90</td><td>9.70</td><td>32.01</td><td>100</td><td>298 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.14	-----	-----	88.55	35.90	9.70	32.01	100	298 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5456.20	45.80	54.00	-8.20	32.24	35.93	9.69	32.06	100	298 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5500.00	102.14	-----	-----	88.55	35.90	9.70	32.01	100	298 AVERAGE																																																																																													



		69																																																																																																		
Mode		Band Edge																																																																																																		
		U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Full RU_5500MHz																																																																																																		
ANT		5+7																																																																																																		
Pol.		Vertical					Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.05</td><td>55.30</td><td>-18.70</td><td>41.75</td><td>35.92</td><td>9.69</td><td>32.06</td><td>400</td><td>250 PEAK</td></tr><tr><td>2</td><td>5467.45</td><td>55.91</td><td>-12.39</td><td>42.35</td><td>35.92</td><td>9.69</td><td>32.05</td><td>400</td><td>250 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.05	55.30	-18.70	41.75	35.92	9.69	32.06	400	250 PEAK	2	5467.45	55.91	-12.39	42.35	35.92	9.69	32.05	400	250 PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>111.13</td><td>-----</td><td>97.54</td><td>35.90</td><td>9.70</td><td>32.01</td><td>400</td><td>250 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.13	-----	97.54	35.90	9.70	32.01	400	250 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5459.05	55.30	-18.70	41.75	35.92	9.69	32.06	400	250 PEAK																																																																																											
2	5467.45	55.91	-12.39	42.35	35.92	9.69	32.05	400	250 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5500.00	111.13	-----	97.54	35.90	9.70	32.01	400	250 PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.75</td><td>44.62</td><td>54.00</td><td>-9.38</td><td>31.07</td><td>35.92</td><td>9.69</td><td>32.06</td><td>400 250 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5458.75	44.62	54.00	-9.38	31.07	35.92	9.69	32.06	400 250 AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.00</td><td>-----</td><td>88.41</td><td>35.90</td><td>9.70</td><td>32.01</td><td>400</td><td>250 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.00	-----	88.41	35.90	9.70	32.01	400	250 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5458.75	44.62	54.00	-9.38	31.07	35.92	9.69	32.06	400 250 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5500.00	102.00	-----	88.41	35.90	9.70	32.01	400	250 AVERAGE																																																																																											

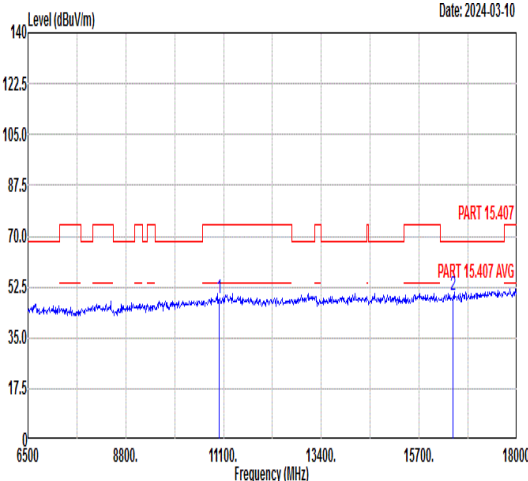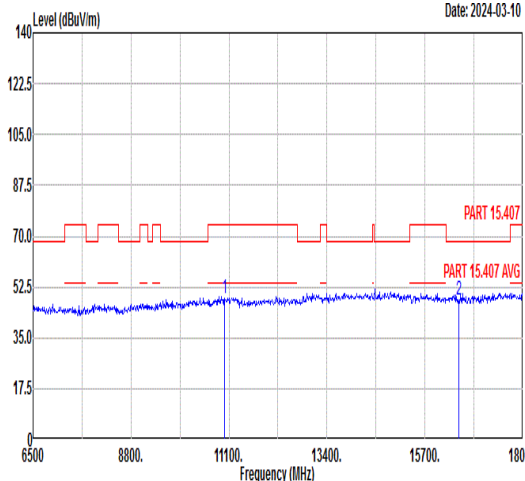

Mode	69																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Full RU_5500MHz																																																																															
ANT	5+7																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11000.00</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>60.46</td><td>39.00</td><td>12.52 63.42</td></tr><tr><td>2</td><td>16500.00</td><td>49.46</td><td>68.30</td><td>-18.84</td><td>57.60</td><td>41.35</td><td>15.17 64.66</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11000.00	48.56	74.00	-25.44	60.46	39.00	12.52 63.42	2	16500.00	49.46	68.30	-18.84	57.60	41.35	15.17 64.66	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11000.00</td><td>48.51</td><td>74.00</td><td>-25.49</td><td>60.41</td><td>39.00</td><td>12.52 63.42</td></tr><tr><td>2</td><td>16500.00</td><td>47.89</td><td>68.30</td><td>-20.41</td><td>56.03</td><td>41.35</td><td>15.17 64.66</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11000.00	48.51	74.00	-25.49	60.41	39.00	12.52 63.42	2	16500.00	47.89	68.30	-20.41	56.03	41.35	15.17 64.66
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11000.00	48.56	74.00	-25.44	60.46	39.00	12.52 63.42																																																																									
2	16500.00	49.46	68.30	-18.84	57.60	41.35	15.17 64.66																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11000.00	48.51	74.00	-25.49	60.41	39.00	12.52 63.42																																																																									
2	16500.00	47.89	68.30	-20.41	56.03	41.35	15.17 64.66																																																																									



Mode	70																																																																																																													
	Harmonic																																																																																																													
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH116_Full RU_5580MHz																																																																																																													
ANT	5+7																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)					Level (dBuV/m) Date: 2024-03-10 Frequency (MHz)																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>60.30</td><td>39.06</td><td>12.64</td><td>63.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 16740.00</td><td>50.07</td><td>68.30</td><td>-18.23</td><td>58.16</td><td>41.47</td><td>15.35</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	48.57	74.00	-25.43	60.30	39.06	12.64	63.43	---	---	Peak	2 16740.00	50.07	68.30	-18.23	58.16	41.47	15.35	64.91	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>48.52</td><td>74.00</td><td>-25.48</td><td>60.25</td><td>39.06</td><td>12.64</td><td>63.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 16740.00</td><td>48.79</td><td>68.30</td><td>-19.51</td><td>56.88</td><td>41.47</td><td>15.35</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	48.52	74.00	-25.48	60.25	39.06	12.64	63.43	---	---	Peak	2 16740.00	48.79	68.30	-19.51	56.88	41.47	15.35	64.91	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 11160.00	48.57	74.00	-25.43	60.30	39.06	12.64	63.43	---	---	Peak																																																																																																				
2 16740.00	50.07	68.30	-18.23	58.16	41.47	15.35	64.91	---	---	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 11160.00	48.52	74.00	-25.48	60.25	39.06	12.64	63.43	---	---	Peak																																																																																																				
2 16740.00	48.79	68.30	-19.51	56.88	41.47	15.35	64.91	---	---	Peak																																																																																																				





Mode	71																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Full RU_5700MHz																																																																									
ANT	5+7																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5725.35</td><td>65.04</td><td>68.30</td><td>-3.26</td><td>51.03</td><td>36.22</td><td>10.02</td><td>32.23</td><td>100 299 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5725.35	65.04	68.30	-3.26	51.03	36.22	10.02	32.23	100 299 PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>111.06</td><td>-----</td><td>-----</td><td>97.12</td><td>36.18</td><td>9.96</td><td>32.20</td><td>100 299 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	111.06	-----	-----	97.12	36.18	9.96	32.20	100 299 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5725.35	65.04	68.30	-3.26	51.03	36.22	10.02	32.23	100 299 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	111.06	-----	-----	97.12	36.18	9.96	32.20	100 299 PEAK																																																																		
Avg	Blank	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>102.06</td><td>-----</td><td>-----</td><td>88.12</td><td>36.18</td><td>9.96</td><td>32.20</td><td>100 299 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	102.06	-----	-----	88.12	36.18	9.96	32.20	100 299 AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	102.06	-----	-----	88.12	36.18	9.96	32.20	100 299 AVERAGE																																																																		



Mode	71																																																																																		
	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Full RU_5700MHz																																																																																		
ANT	5+7																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.55</td><td>63.00</td><td>68.30</td><td>-5.30</td><td>48.99</td><td>36.22</td><td>10.02</td><td>32.23</td><td>312</td><td>250 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.55	63.00	68.30	-5.30	48.99	36.22	10.02	32.23	312	250 PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>109.88</td><td>-----</td><td>95.95</td><td>36.17</td><td>9.95</td><td>32.19</td><td>312</td><td>250 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	109.88	-----	95.95	36.17	9.95	32.19	312	250 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5725.55	63.00	68.30	-5.30	48.99	36.22	10.02	32.23	312	250 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	109.88	-----	95.95	36.17	9.95	32.19	312	250 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.62</td><td>-----</td><td>87.65</td><td>36.19</td><td>9.99</td><td>32.21</td><td>312</td><td>250 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.62	-----	87.65	36.19	9.99	32.21	312	250 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	101.62	-----	87.65	36.19	9.99	32.21	312	250 AVERAGE																																																																										

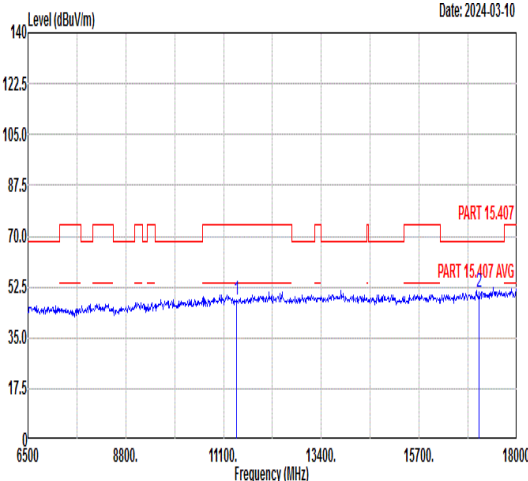
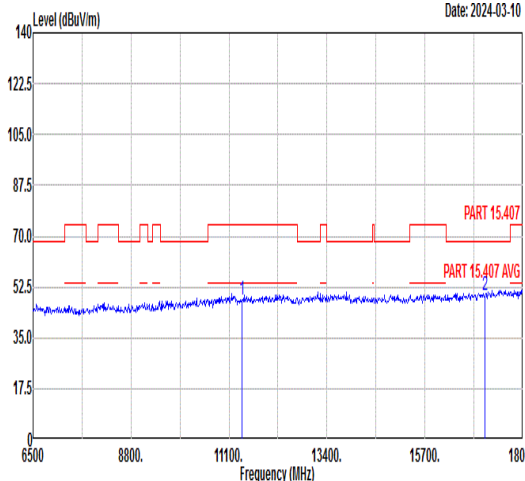


Mode	71																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Full RU_5700MHz																																																																																																																			
ANT	5+7																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>59.72</td><td>39.16</td><td>12.81</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>50.56</td><td>68.30</td><td>-17.74</td><td>58.46</td><td>41.71</td><td>15.62</td><td>65.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	48.25	74.00	-25.75	59.72	39.16	12.81	63.44	---	---	Peak	2	17100.00	50.56	68.30	-17.74	58.46	41.71	15.62	65.23	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>48.29</td><td>74.00</td><td>-25.71</td><td>59.76</td><td>39.16</td><td>12.81</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>49.81</td><td>68.30</td><td>-18.49</td><td>57.71</td><td>41.71</td><td>15.62</td><td>65.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	48.29	74.00	-25.71	59.76	39.16	12.81	63.44	---	---	Peak	2	17100.00	49.81	68.30	-18.49	57.71	41.71	15.62	65.23	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11400.00	48.25	74.00	-25.75	59.72	39.16	12.81	63.44	---	---	Peak																																																																																																									
2	17100.00	50.56	68.30	-17.74	58.46	41.71	15.62	65.23	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11400.00	48.29	74.00	-25.71	59.76	39.16	12.81	63.44	---	---	Peak																																																																																																									
2	17100.00	49.81	68.30	-18.49	57.71	41.71	15.62	65.23	---	---	Peak																																																																																																									



		72																																																																																													
Mode	Band Edge - L																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT 40_CH38_Full RU_5190MHz																																																																																														
ANT	5+7																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5144.21</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>43.85</td><td>36.11</td><td>8.52</td><td>32.50</td><td>100</td><td>55</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5144.21	55.98	74.00	-18.02	43.85	36.11	8.52	32.50	100	55	PEAK	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>105.32</td><td>-----</td><td>-----</td><td>93.01</td><td>36.08</td><td>8.64</td><td>32.41</td><td>100</td><td>55</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	105.32	-----	-----	93.01	36.08	8.64	32.41	100	55	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5144.21	55.98	74.00	-18.02	43.85	36.11	8.52	32.50	100	55	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5190.00	105.32	-----	-----	93.01	36.08	8.64	32.41	100	55	PEAK																																																																																				
Avg	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5148.39</td><td>47.43</td><td>54.00</td><td>-6.57</td><td>35.28</td><td>36.11</td><td>8.53</td><td>32.49</td><td>100</td><td>55</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.39	47.43	54.00	-6.57	35.28	36.11	8.53	32.49	100	55	AVERAGE	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>95.73</td><td>-----</td><td>-----</td><td>83.42</td><td>36.08</td><td>8.64</td><td>32.41</td><td>100</td><td>55</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	95.73	-----	-----	83.42	36.08	8.64	32.41	100	55	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5148.39	47.43	54.00	-6.57	35.28	36.11	8.53	32.49	100	55	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5190.00	95.73	-----	-----	83.42	36.08	8.64	32.41	100	55	AVERAGE																																																																																				

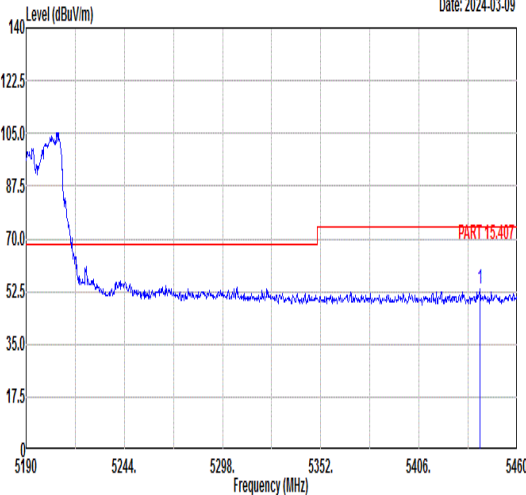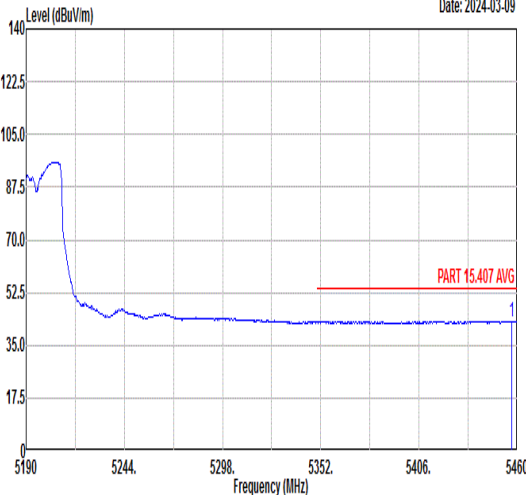

Mode	72																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11be EHT 40_CH38_Full RU_5190MHz																																																		
ANT	5+7																																																		
Pol.	Horizontal							Fundamental																																											
Peak	Date: 2024-03-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.48</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>39.66</td><td>35.94</td><td>9.68</td><td>32.08</td><td>100</td><td>55</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5439.48	53.20	74.00	-20.80	39.66	35.94	9.68	32.08	100	55	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5439.48	53.20	74.00	-20.80	39.66	35.94	9.68	32.08	100	55	PEAK																																								
Avg	Date: 2024-03-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.76</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>29.37</td><td>35.93</td><td>9.69</td><td>32.06</td><td>100</td><td>55</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.76	42.93	54.00	-11.07	29.37	35.93	9.69	32.06	100	55	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5456.76	42.93	54.00	-11.07	29.37	35.93	9.69	32.06	100	55	AVERAGE																																								



Mode	72																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT 40_CH38_Full RU_5190MHz																																																																																															
ANT	5+7																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5143.45</td><td>58.00</td><td>74.00</td><td>-16.00</td><td>45.87</td><td>36.11</td><td>8.52</td><td>32.50</td><td>372</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5143.45	58.00	74.00	-16.00	45.87	36.11	8.52	32.50	372	251	PEAK	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>103.03</td><td>-----</td><td>-----</td><td>90.80</td><td>36.09</td><td>8.59</td><td>32.45</td><td>372</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	103.03	-----	-----	90.80	36.09	8.59	32.45	372	251	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5143.45	58.00	74.00	-16.00	45.87	36.11	8.52	32.50	372	251	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	103.03	-----	-----	90.80	36.09	8.59	32.45	372	251	PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5142.12</td><td>48.48</td><td>54.00</td><td>-5.52</td><td>36.35</td><td>36.11</td><td>8.52</td><td>32.50</td><td>372</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5142.12	48.48	54.00	-5.52	36.35	36.11	8.52	32.50	372	251	AVERAGE	Level (dBuV/m) Date: 2024-03-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>95.18</td><td>-----</td><td>-----</td><td>82.95</td><td>36.09</td><td>8.59</td><td>32.45</td><td>372</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	95.18	-----	-----	82.95	36.09	8.59	32.45	372	251	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5142.12	48.48	54.00	-5.52	36.35	36.11	8.52	32.50	372	251	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	95.18	-----	-----	82.95	36.09	8.59	32.45	372	251	AVERAGE																																																																																					







Mode	72																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11be EHT 40_CH38_Full RU_5190MHz																																																		
ANT	5+7																																																		
Pol.	Vertical						Fundamental																																												
Peak	Date: 2024-03-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.40</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>39.74</td><td>35.94</td><td>9.68</td><td>32.09</td><td>372</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5438.40	53.27	74.00	-20.73	39.74	35.94	9.68	32.09	372	251	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5438.40	53.27	74.00	-20.73	39.74	35.94	9.68	32.09	372	251	PEAK																																								
Avg	Date: 2024-03-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5427.06</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>29.52</td><td>35.94</td><td>9.67</td><td>32.10</td><td>372</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5427.06	43.03	54.00	-10.97	29.52	35.94	9.67	32.10	372	251	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5427.06	43.03	54.00	-10.97	29.52	35.94	9.67	32.10	372	251	AVERAGE																																								



Mode	73																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11be EHT 40_CH46_Full RU_5230MHz																																																																																											
ANT	5+7																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.05</td><td>62.04</td><td>74.00</td><td>-11.96</td><td>49.90</td><td>36.11</td><td>8.53</td><td>32.50</td><td>100</td><td>302</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.05	62.04	74.00	-11.96	49.90	36.11	8.53	32.50	100	302	PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>104.67</td><td>-----</td><td>-----</td><td>92.17</td><td>36.05</td><td>8.81</td><td>32.36</td><td>100</td><td>302</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	104.67	-----	-----	92.17	36.05	8.81	32.36	100	302	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5146.05	62.04	74.00	-11.96	49.90	36.11	8.53	32.50	100	302	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5230.00	104.67	-----	-----	92.17	36.05	8.81	32.36	100	302	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.05</td><td>49.57</td><td>54.00</td><td>-4.43</td><td>37.43</td><td>36.11</td><td>8.53</td><td>32.50</td><td>100</td><td>302</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.05	49.57	54.00	-4.43	37.43	36.11	8.53	32.50	100	302	AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>95.89</td><td>-----</td><td>-----</td><td>83.53</td><td>36.07</td><td>8.68</td><td>32.39</td><td>100</td><td>302</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	95.89	-----	-----	83.53	36.07	8.68	32.39	100	302	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5146.05	49.57	54.00	-4.43	37.43	36.11	8.53	32.50	100	302	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5230.00	95.89	-----	-----	83.53	36.07	8.68	32.39	100	302	AVERAGE																																																																																	

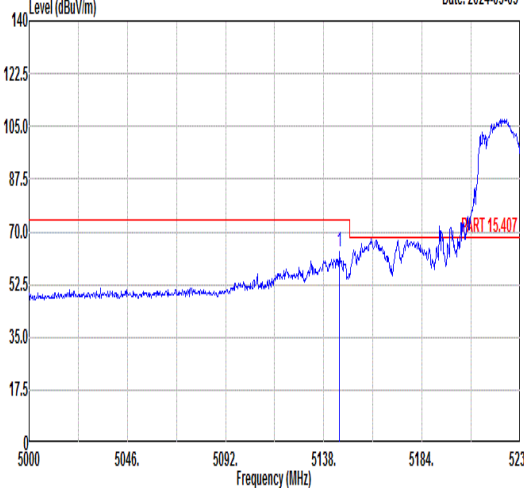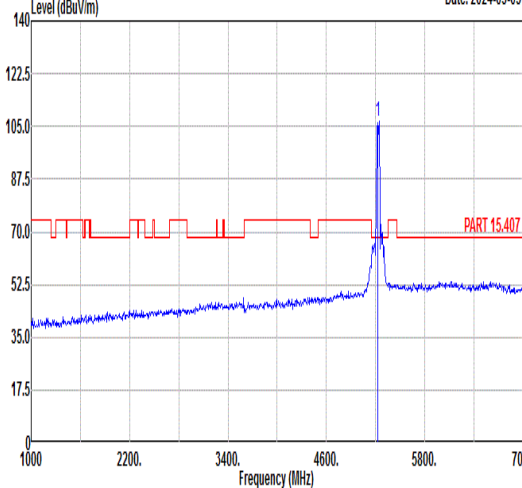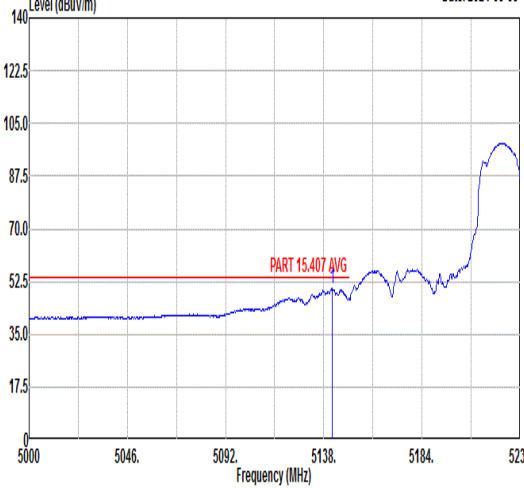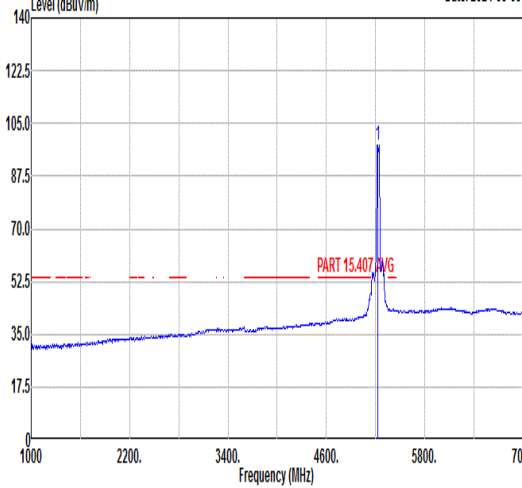

		73																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-1_5.15-5.25_802.11be EHT 40_CH46_Full RU_5230MHz																																																																																							
ANT		5+7																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.36</td><td>63.36</td><td>74.00</td><td>-10.64</td><td>51.22</td><td>36.11</td><td>8.53</td><td>32.50</td><td>345</td><td>255</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.36	63.36	74.00	-10.64	51.22	36.11	8.53	32.50	345	255	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>106.54</td><td>-----</td><td>-----</td><td>94.04</td><td>36.05</td><td>8.81</td><td>32.36</td><td>345</td><td>255</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	106.54	-----	-----	94.04	36.05	8.81	32.36	345	255
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5145.36	63.36	74.00	-10.64	51.22	36.11	8.53	32.50	345	255	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	106.54	-----	-----	94.04	36.05	8.81	32.36	345	255	PEAK																																																																														
Avg	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5141.91</td><td>50.39</td><td>54.00</td><td>-3.61</td><td>38.26</td><td>36.11</td><td>8.52</td><td>32.50</td><td>345</td><td>255</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.91	50.39	54.00	-3.61	38.26	36.11	8.52	32.50	345	255	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>97.90</td><td>-----</td><td>-----</td><td>85.51</td><td>36.07</td><td>8.71</td><td>32.39</td><td>345</td><td>255</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	97.90	-----	-----	85.51	36.07	8.71	32.39	345	255
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5141.91	50.39	54.00	-3.61	38.26	36.11	8.52	32.50	345	255	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	97.90	-----	-----	85.51	36.07	8.71	32.39	345	255	AVERAGE																																																																														



Mode	74	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT 40_CH54_Full RU_5270MHz	
ANT	5+7	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-03-03 1 5037.26 51.19 74.00 -22.81 39.33 36.18 8.33 32.65 100 60 PEAK	Level (dBuV/m) Date: 2024-03-03 1 5270.00 108.10 ----- 95.31 36.03 9.05 32.29 100 60 PEAK
Avg	Level (dBuV/m) Date: 2024-03-03 1 5147.96 41.43 54.00 -12.57 29.28 36.11 8.53 32.49 100 60 AVERAGE	Level (dBuV/m) Date: 2024-03-03 1 5270.00 98.16 ----- 85.41 36.03 9.02 32.30 100 60 AVERAGE



Mode	74																																																																													
	Band Edge - L																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT 40_CH54_Full RU_5270MHz																																																																													
ANT	5+7																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5147.42</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>41.61</td><td>36.11</td><td>8.53</td><td>32.49</td><td>352</td><td>255 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5147.42	53.76	74.00	-20.24	41.61	36.11	8.53	32.49	352	255 PEAK	Level (dBuV/m) Date: 2024-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5270.00</td><td>106.48</td><td>-----</td><td>-----</td><td>93.88</td><td>36.04</td><td>8.90</td><td>32.34</td><td>352</td><td>255 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	106.48	-----	-----	93.88	36.04	8.90	32.34	352	255 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5147.42	53.76	74.00	-20.24	41.61	36.11	8.53	32.49	352	255 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5270.00	106.48	-----	-----	93.88	36.04	8.90	32.34	352	255 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5122.31</td><td>42.01</td><td>54.00</td><td>-11.99</td><td>29.93</td><td>36.13</td><td>8.48</td><td>32.53</td><td>352</td><td>255 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5122.31	42.01	54.00	-11.99	29.93	36.13	8.48	32.53	352	255 AVERAGE	Level (dBuV/m) Date: 2024-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5270.00</td><td>98.70</td><td>-----</td><td>-----</td><td>86.10</td><td>36.04</td><td>8.90</td><td>32.34</td><td>352</td><td>255 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	98.70	-----	-----	86.10	36.04	8.90	32.34	352	255 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5122.31	42.01	54.00	-11.99	29.93	36.13	8.48	32.53	352	255 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5270.00	98.70	-----	-----	86.10	36.04	8.90	32.34	352	255 AVERAGE																																																																					



Mode	74										
	Band Edge - R										
	U-NII-2A_5.25-5.35_802.11be EHT 40_CH54_Full RU_5270MHz										
ANT	5+7										
Pol.	Vertical										Fundamental
Peak	<										







Mode	75																																																																																													
	Band Edge - L																																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT 40_CH62_Full RU_5310MHz																																																																																													
ANT	5+7																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak	Date: 2024-03-03						Date: 2024-03-03																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5065.72</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>38.92</td><td>36.16</td><td>8.38</td><td>32.61</td><td>100</td><td></td><td>301 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5065.72	50.85	74.00	-23.15	38.92	36.16	8.38	32.61	100		301 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>102.09</td><td>-----</td><td>-----</td><td>89.23</td><td>36.02</td><td>9.12</td><td>32.28</td><td>100</td><td></td><td>301 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5310.00	102.09	-----	-----	89.23	36.02	9.12	32.28	100	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5065.72	50.85	74.00	-23.15	38.92	36.16	8.38	32.61	100		301 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5310.00	102.09	-----	-----	89.23	36.02	9.12	32.28	100		301 PEAK																																																																																			
Avg	Date: 2024-03-03						Date: 2024-03-03																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5070.37</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>29.04</td><td>36.16</td><td>8.39</td><td>32.60</td><td>100</td><td></td><td>301 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5070.37	40.99	54.00	-13.01	29.04	36.16	8.39	32.60	100		301 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>93.87</td><td>-----</td><td>-----</td><td>81.01</td><td>36.02</td><td>9.12</td><td>32.28</td><td>100</td><td></td><td>301 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5310.00	93.87	-----	-----	81.01	36.02	9.12	32.28	100	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5070.37	40.99	54.00	-13.01	29.04	36.16	8.39	32.60	100		301 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5310.00	93.87	-----	-----	81.01	36.02	9.12	32.28	100		301 AVERAGE																																																																																			



Mode	75										
	Band Edge - L										
	U-NII-2A_5.25-5.35_802.11be EHT 40_CH62_Full RU_5310MHz										
ANT	5+7										
Pol.	Vertical										
Peak	Fundamental										

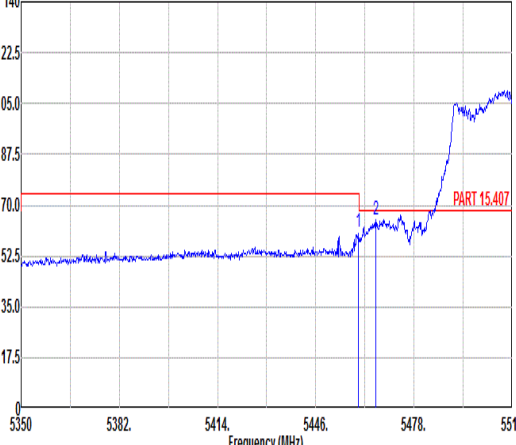
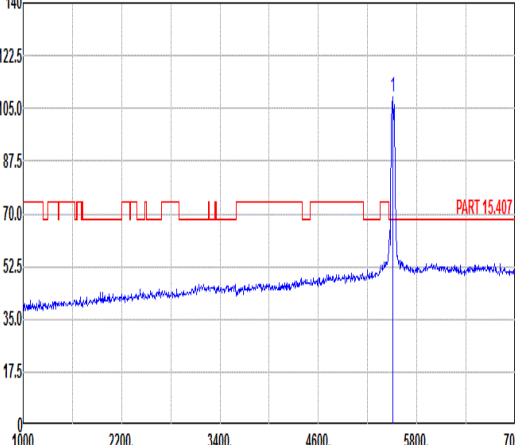
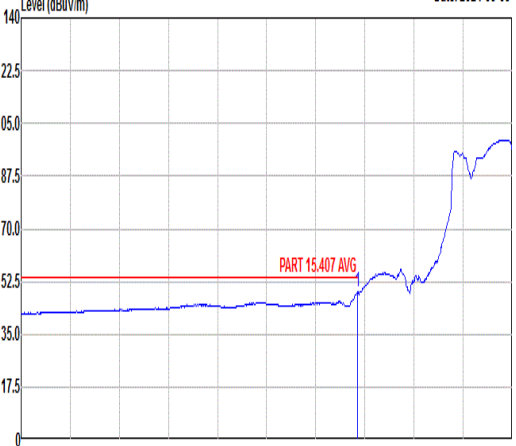
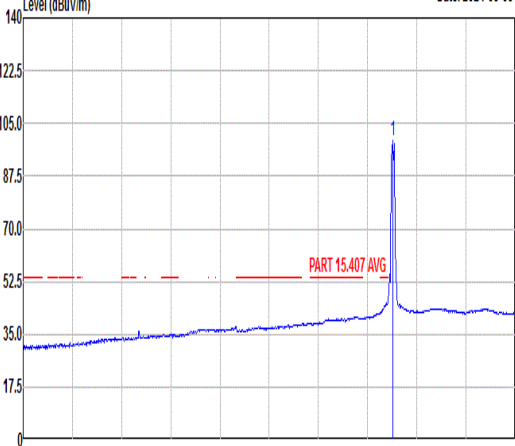


		76																																																																																																					
Mode		Band Edge - L																																																																																																					
		U-NII-2C_5.47-5.725_802.11be EHT 40_CH102_Full RU_5510MHz																																																																																																					
ANT		5+7																																																																																																					
Pol.		Horizontal					Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.76</td><td>60.86</td><td>74.00</td><td>-13.14</td><td>47.31</td><td>35.92</td><td>9.69</td><td>32.06</td><td>100</td><td>58</td><td>PEAK</td></tr><tr><td>2</td><td>5465.52</td><td>64.92</td><td>68.30</td><td>-3.38</td><td>51.36</td><td>35.92</td><td>9.69</td><td>32.05</td><td>100</td><td>58</td><td>PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>108.84</td><td>-----</td><td>-----</td><td>95.22</td><td>35.92</td><td>9.71</td><td>32.01</td><td>100</td><td>58</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	60.86	74.00	-13.14	47.31	35.92	9.69	32.06	100	58	PEAK	2	5465.52	64.92	68.30	-3.38	51.36	35.92	9.69	32.05	100	58	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	108.84	-----	-----	95.22	35.92	9.71	32.01	100	58	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.76	60.86	74.00	-13.14	47.31	35.92	9.69	32.06	100	58	PEAK																																																																																												
2	5465.52	64.92	68.30	-3.38	51.36	35.92	9.69	32.05	100	58	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	108.84	-----	-----	95.22	35.92	9.71	32.01	100	58	PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.60</td><td>49.05</td><td>54.00</td><td>-4.95</td><td>35.50</td><td>35.92</td><td>9.69</td><td>32.06</td><td>100</td><td>58</td><td>AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>99.14</td><td>-----</td><td>-----</td><td>85.53</td><td>35.91</td><td>9.71</td><td>32.01</td><td>100</td><td>58</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	49.05	54.00	-4.95	35.50	35.92	9.69	32.06	100	58	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.14	-----	-----	85.53	35.91	9.71	32.01	100	58	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.60	49.05	54.00	-4.95	35.50	35.92	9.69	32.06	100	58	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	99.14	-----	-----	85.53	35.91	9.71	32.01	100	58	AVERAGE																																																																																												







Mode	76																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH102_Full RU_5510MHz																																												
ANT	5+7																																												
Pol.	Horizontal	Fundamental																																											
Peak	Date: 2024-03-03 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5739.25</td><td>52.40</td><td>68.30</td><td>-15.90</td><td>38.36</td><td>36.23</td><td>10.05</td><td>32.24</td><td>100</td><td>58 PEAK</td></tr></table>			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	cm	deg		1	5739.25	52.40	68.30	-15.90	38.36	36.23	10.05	32.24	100	58 PEAK	Blank
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	dB	dB	cm	deg																																				
1	5739.25	52.40	68.30	-15.90	38.36	36.23	10.05	32.24	100	58 PEAK																																			

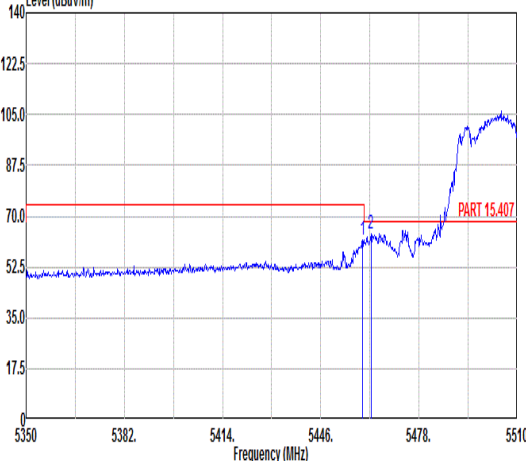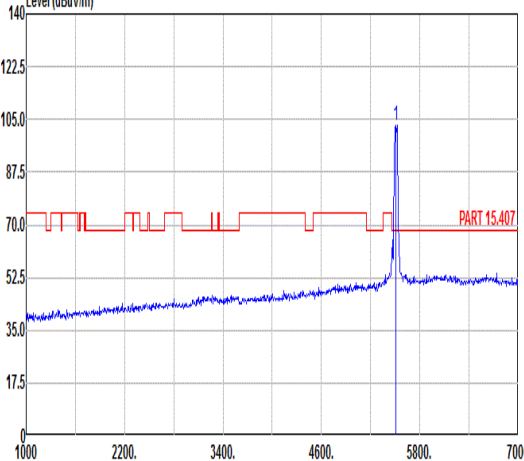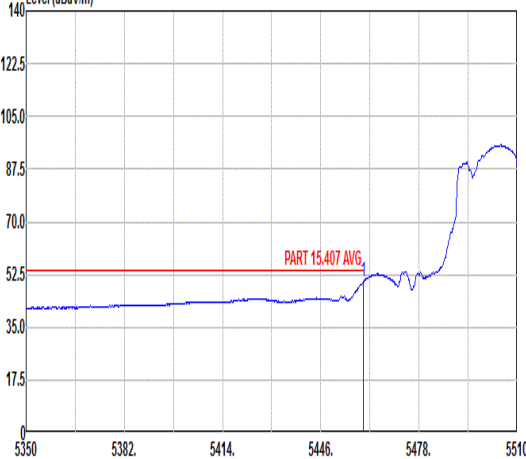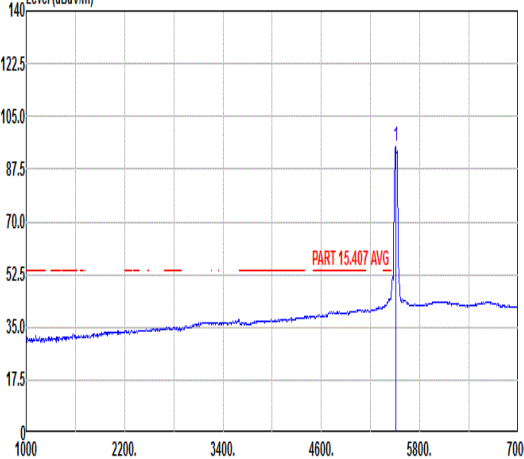

Mode	76																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH102_Full RU_5510MHz																																																																																																						
ANT	5+7																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2024-03-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.60</td><td>61.83</td><td>74.00</td><td>-12.17</td><td>48.28</td><td>35.92</td><td>9.69</td><td>32.06</td><td>309</td><td>257</td><td>PEAK</td></tr><tr><td>2</td><td>5462.32</td><td>64.02</td><td>68.30</td><td>-4.28</td><td>50.46</td><td>35.92</td><td>9.69</td><td>32.05</td><td>309</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	61.83	74.00	-12.17	48.28	35.92	9.69	32.06	309	257	PEAK	2	5462.32	64.02	68.30	-4.28	50.46	35.92	9.69	32.05	309	257	PEAK	Level (dBuV/m) Date: 2024-03-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>103.22</td><td>-----</td><td>-----</td><td>89.61</td><td>35.91</td><td>9.71</td><td>32.01</td><td>309</td><td>257</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	103.22	-----	-----	89.61	35.91	9.71	32.01	309	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.60	61.83	74.00	-12.17	48.28	35.92	9.69	32.06	309	257	PEAK																																																																																												
2	5462.32	64.02	68.30	-4.28	50.46	35.92	9.69	32.05	309	257	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	103.22	-----	-----	89.61	35.91	9.71	32.01	309	257	PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2024-03-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.76</td><td>50.14</td><td>54.00</td><td>-3.86</td><td>36.59</td><td>35.92</td><td>9.69</td><td>32.06</td><td>309</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	50.14	54.00	-3.86	36.59	35.92	9.69	32.06	309	257	AVERAGE	Level (dBuV/m) Date: 2024-03-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>95.00</td><td>-----</td><td>-----</td><td>81.39</td><td>35.91</td><td>9.71</td><td>32.01</td><td>309</td><td>257</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	95.00	-----	-----	81.39	35.91	9.71	32.01	309	257	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.76	50.14	54.00	-3.86	36.59	35.92	9.69	32.06	309	257	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	95.00	-----	-----	81.39	35.91	9.71	32.01	309	257	AVERAGE																																																																																												

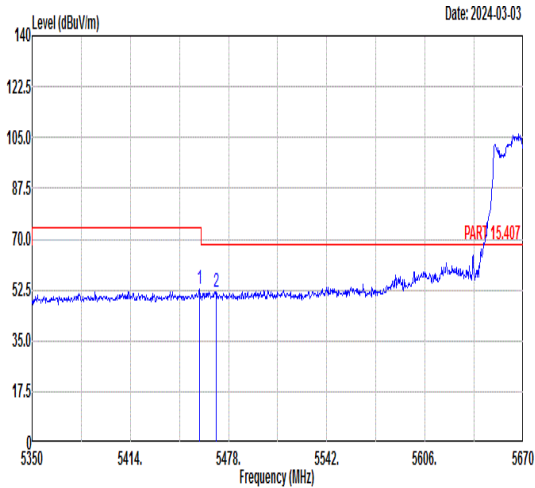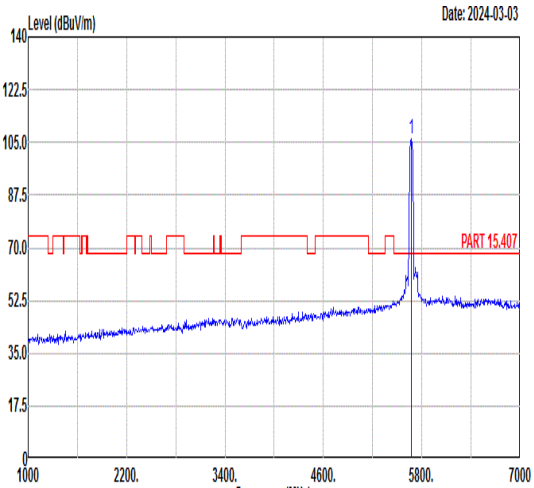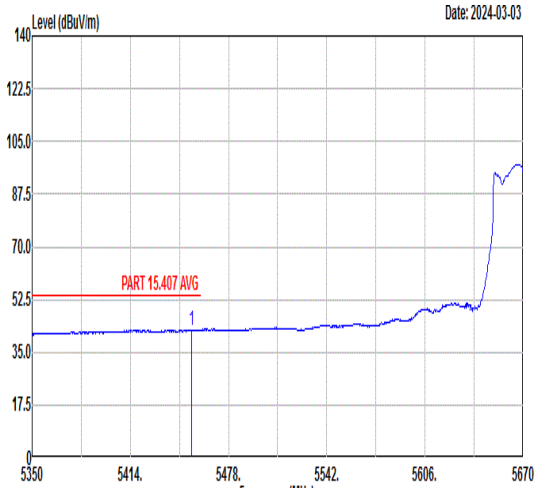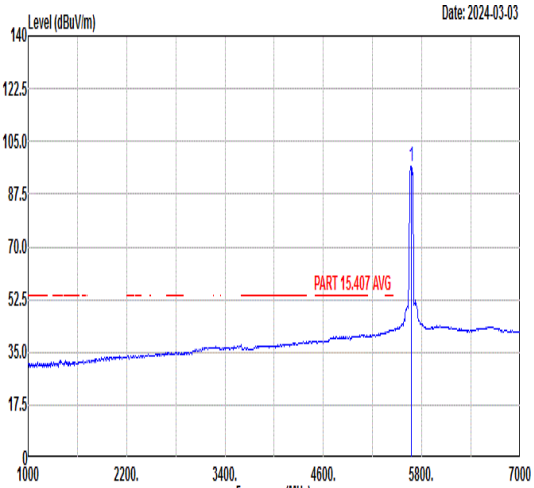

Mode	77																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH134_Full RU_5670MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.12</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>39.26</td><td>35.92</td><td>9.69</td><td>32.06</td><td>100</td><td>300 PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>51.91</td><td>68.30</td><td>-16.39</td><td>38.34</td><td>35.92</td><td>9.69</td><td>32.04</td><td>100</td><td>300 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	52.81	74.00	-21.19	39.26	35.92	9.69	32.06	100	300 PEAK	2	5470.00	51.91	68.30	-16.39	38.34	35.92	9.69	32.04	100	300 PEAK	 Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>106.02</td><td>-----</td><td>-----</td><td>92.15</td><td>36.14</td><td>9.90</td><td>32.17</td><td>100</td><td>300 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	106.02	-----	-----	92.15	36.14	9.90	32.17	100	300 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.12	52.81	74.00	-21.19	39.26	35.92	9.69	32.06	100	300 PEAK																																																																																									
2	5470.00	51.91	68.30	-16.39	38.34	35.92	9.69	32.04	100	300 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	106.02	-----	-----	92.15	36.14	9.90	32.17	100	300 PEAK																																																																																									
Avg	 Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5454.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>28.83</td><td>35.93</td><td>9.68</td><td>32.06</td><td>100</td><td>300 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.00	42.38	54.00	-11.62	28.83	35.93	9.68	32.06	100	300 AVERAGE	 Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>96.86</td><td>-----</td><td>-----</td><td>82.99</td><td>36.14</td><td>9.90</td><td>32.17</td><td>100</td><td>300 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	96.86	-----	-----	82.99	36.14	9.90	32.17	100	300 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5454.00	42.38	54.00	-11.62	28.83	35.93	9.68	32.06	100	300 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	96.86	-----	-----	82.99	36.14	9.90	32.17	100	300 AVERAGE																																																																																									



Mode	77																																											
	Band Edge - R																																											
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH134_Full RU_5670MHz																																											
ANT	5+7																																											
Pol.	Horizontal	Fundamental																																										
Peak	Date: 2024-03-03 Level (dBuV/m) Frequency (MHz) PART 15.407 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5726.53</td><td>64.44</td><td>68.30</td><td>-3.86</td><td>50.43</td><td>36.22</td><td>10.02</td><td>32.23</td><td>100</td><td>300</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5726.53	64.44	68.30	-3.86	50.43	36.22	10.02	32.23	100	300	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5726.53	64.44	68.30	-3.86	50.43	36.22	10.02	32.23	100	300	PEAK																																	





Mode	77																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH134_Full RU_5670MHz																																																																																																							
ANT	5+7																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.72</td><td>52.99</td><td>74.00</td><td>-21.01</td><td>39.48</td><td>35.95</td><td>9.67</td><td>32.11</td><td>325</td><td>255</td><td>PEAK</td></tr><tr><td>2</td><td>5463.60</td><td>51.99</td><td>68.30</td><td>-16.31</td><td>38.43</td><td>35.92</td><td>9.69</td><td>32.05</td><td>325</td><td>255</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5420.72	52.99	74.00	-21.01	39.48	35.95	9.67	32.11	325	255	PEAK	2	5463.60	51.99	68.30	-16.31	38.43	35.92	9.69	32.05	325	255	PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>107.39</td><td>-----</td><td>-----</td><td>93.53</td><td>36.13</td><td>9.89</td><td>32.16</td><td>325</td><td>255</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	107.39	-----	-----	93.53	36.13	9.89	32.16	325	255	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5420.72	52.99	74.00	-21.01	39.48	35.95	9.67	32.11	325	255	PEAK																																																																																													
2	5463.60	51.99	68.30	-16.31	38.43	35.92	9.69	32.05	325	255	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5670.00	107.39	-----	-----	93.53	36.13	9.89	32.16	325	255	PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.48</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>29.48</td><td>35.92</td><td>9.69</td><td>32.06</td><td>325</td><td>255</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.48	43.03	54.00	-10.97	29.48	35.92	9.69	32.06	325	255	AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>98.40</td><td>-----</td><td>-----</td><td>84.54</td><td>36.13</td><td>9.89</td><td>32.16</td><td>325</td><td>255</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	98.40	-----	-----	84.54	36.13	9.89	32.16	325	255	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5458.48	43.03	54.00	-10.97	29.48	35.92	9.69	32.06	325	255	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5670.00	98.40	-----	-----	84.54	36.13	9.89	32.16	325	255	AVERAGE																																																																																													



Mode	77																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH134_Full RU_5670MHz																																										
ANT	5+7																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-03-03 Level (dBuV/m) Frequency (MHz) PART 15.407 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.86</td><td>65.28</td><td>68.30</td><td>-3.02</td><td>51.27</td><td>36.22</td><td>10.02</td><td>32.23</td><td>325</td><td>255</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.86	65.28	68.30	-3.02	51.27	36.22	10.02	32.23	325	255	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5727.86	65.28	68.30	-3.02	51.27	36.22	10.02	32.23	325	255	PEAK																																

Note: The higher Signals which are no mark are within frequency band can be ignored

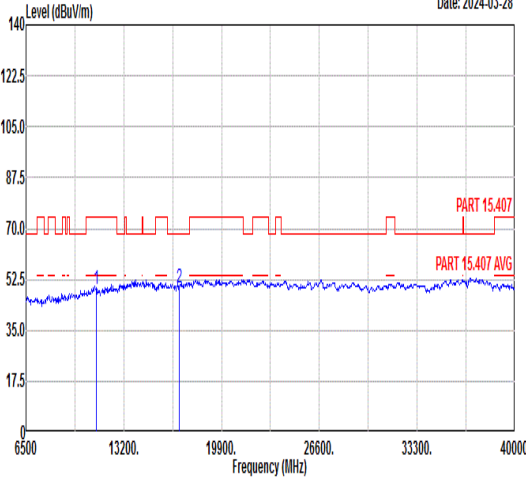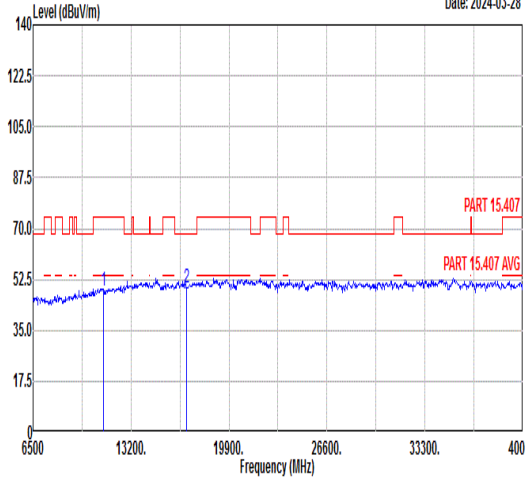

Mode	77																																																																																																				
	Harmonic																																																																																																				
	U-NII-2C_5.47-5.725_802.11be EHT 40_CH134_Full RU_5670MHz																																																																																																				
ANT	5+7																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 11340.00</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>60.66</td><td>39.14</td><td>12.77</td><td>63.44</td><td>--- --- Peak</td></tr><tr><td>2 17010.00</td><td>49.44</td><td>68.30</td><td>-18.86</td><td>57.47</td><td>41.61</td><td>15.55</td><td>65.19</td><td>--- --- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 11340.00	49.13	74.00	-24.87	60.66	39.14	12.77	63.44	--- --- Peak	2 17010.00	49.44	68.30	-18.86	57.47	41.61	15.55	65.19	--- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 11340.00</td><td>48.63</td><td>74.00</td><td>-25.37</td><td>60.16</td><td>39.14</td><td>12.77</td><td>63.44</td><td>--- --- Peak</td></tr><tr><td>2 17010.00</td><td>49.69</td><td>68.30</td><td>-18.61</td><td>57.72</td><td>41.61</td><td>15.55</td><td>65.19</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 11340.00	48.63	74.00	-25.37	60.16	39.14	12.77	63.44	--- --- Peak	2 17010.00	49.69	68.30	-18.61	57.72	41.61	15.55	65.19	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 11340.00	49.13	74.00	-24.87	60.66	39.14	12.77	63.44	--- --- Peak																																																																																													
2 17010.00	49.44	68.30	-18.86	57.47	41.61	15.55	65.19	--- --- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 11340.00	48.63	74.00	-25.37	60.16	39.14	12.77	63.44	--- --- Peak																																																																																													
2 17010.00	49.69	68.30	-18.61	57.72	41.61	15.55	65.19	--- --- Peak																																																																																													

Note: Only the worst case has assessed 18G ~40GHz to test







Mode	78																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11be EHT 80_CH42_Full RU_5210MHz																																																																																											
ANT	5+7																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.21</td><td>60.34</td><td>74.00</td><td>-13.66</td><td>48.19</td><td>36.11</td><td>8.53</td><td>32.49</td><td>100</td><td>300</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.21	60.34	74.00	-13.66	48.19	36.11	8.53	32.49	100	300	PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>100.70</td><td>-----</td><td>-----</td><td>88.48</td><td>36.09</td><td>8.58</td><td>32.45</td><td>100</td><td>300</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	100.70	-----	-----	88.48	36.09	8.58	32.45	100	300	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5147.21	60.34	74.00	-13.66	48.19	36.11	8.53	32.49	100	300	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5210.00	100.70	-----	-----	88.48	36.09	8.58	32.45	100	300	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.11</td><td>48.79</td><td>54.00</td><td>-5.21</td><td>36.70</td><td>36.13</td><td>8.49</td><td>32.53</td><td>100</td><td>300</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5124.11	48.79	54.00	-5.21	36.70	36.13	8.49	32.53	100	300	AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>92.28</td><td>-----</td><td>-----</td><td>80.01</td><td>36.08</td><td>8.62</td><td>32.43</td><td>100</td><td>300</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	92.28	-----	-----	80.01	36.08	8.62	32.43	100	300	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5124.11	48.79	54.00	-5.21	36.70	36.13	8.49	32.53	100	300	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5210.00	92.28	-----	-----	80.01	36.08	8.62	32.43	100	300	AVERAGE																																																																																	



Mode	78										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11be EHT 80_CH42_Full RU_5210MHz										
ANT	5+7										
Pol.	Horizontal							Fundamental			
Peak											

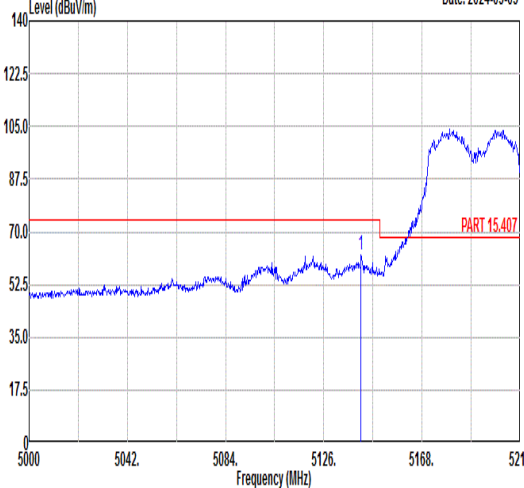
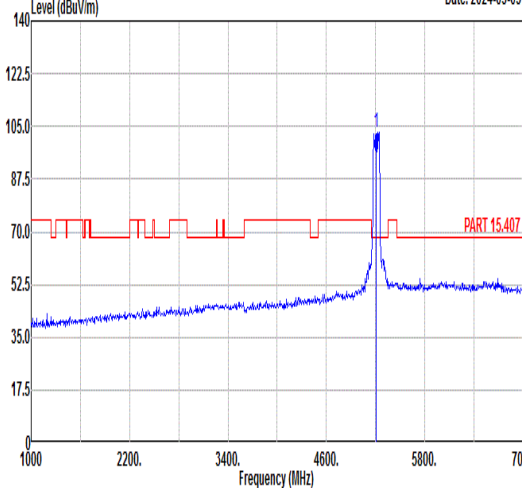
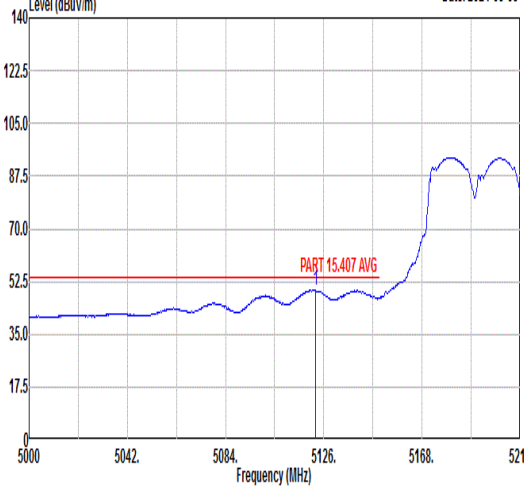
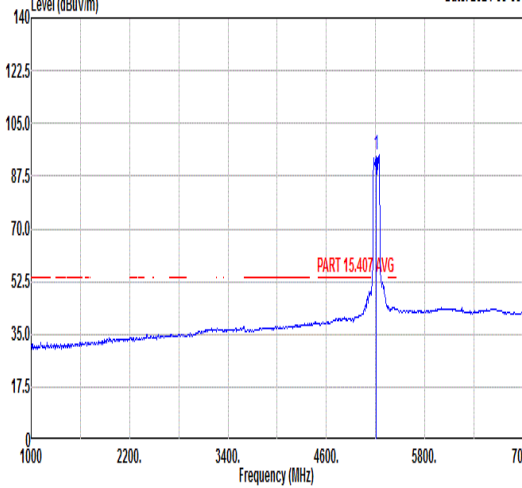


		78																																																																																																		
Mode		Band Edge - L																																																																																																		
		U-NII-1_5.15-5.25_802.11be EHT 80_CH42_Full RU_5210MHz																																																																																																		
ANT		5+7																																																																																																		
Pol.		Vertical					Fundamental																																																																																													
Peak		Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)										Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)																																																																																								
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.96</td><td>62.22</td><td>74.00</td><td>-11.78</td><td>50.09</td><td>36.11</td><td>8.52</td><td>32.50</td><td>327</td><td>255</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.96	62.22	74.00	-11.78	50.09	36.11	8.52	32.50	327	255	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>103.17</td><td>-----</td><td>-----</td><td>90.67</td><td>36.05</td><td>8.81</td><td>32.36</td><td>327</td><td>255</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	103.17	-----	-----	90.67	36.05	8.81	32.36	327	255
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5141.96	62.22	74.00	-11.78	50.09	36.11	8.52	32.50	327	255	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5210.00	103.17	-----	-----	90.67	36.05	8.81	32.36	327	255	PEAK																																																																																									
Avg		Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)										Level (dBuV/m) Date: 2024-03-03  Frequency (MHz)																																																																																								
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.43</td><td>49.60</td><td>54.00</td><td>-4.40</td><td>37.52</td><td>36.13</td><td>8.48</td><td>32.53</td><td>327</td><td>255</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5122.43	49.60	54.00	-4.40	37.52	36.13	8.48	32.53	327	255	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>94.58</td><td>-----</td><td>-----</td><td>82.08</td><td>36.05</td><td>8.81</td><td>32.36</td><td>327</td><td>255</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	94.58	-----	-----	82.08	36.05	8.81	32.36	327	255
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5122.43	49.60	54.00	-4.40	37.52	36.13	8.48	32.53	327	255	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5210.00	94.58	-----	-----	82.08	36.05	8.81	32.36	327	255	AVERAGE																																																																																									



Mode	78																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11be EHT 80_CH42_Full RU_5210MHz																																																			
ANT	5+7																																																			
Pol.	Vertical						Fundamental																																													
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5431.75</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>40.15</td><td>35.94</td><td>9.67</td><td>32.10</td><td>327</td><td>255</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5431.75	53.66	74.00	-20.34	40.15	35.94	9.67	32.10	327	255	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5431.75	53.66	74.00	-20.34	40.15	35.94	9.67	32.10	327	255	PEAK																																									
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.75</td><td>43.86</td><td>54.00</td><td>-10.14</td><td>30.35</td><td>35.94</td><td>9.67</td><td>32.10</td><td>327</td><td>255</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5425.75	43.86	54.00	-10.14	30.35	35.94	9.67	32.10	327	255	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5425.75	43.86	54.00	-10.14	30.35	35.94	9.67	32.10	327	255	AVERAGE																																									

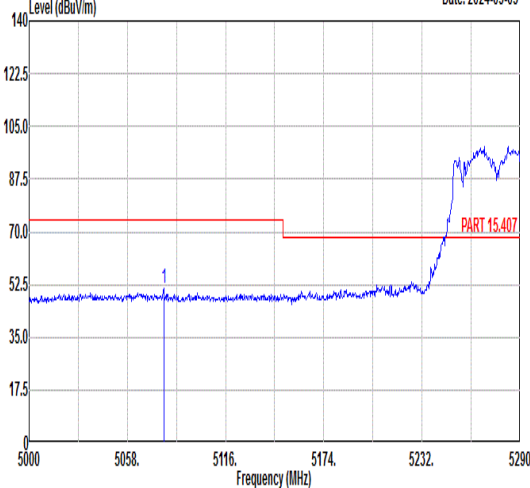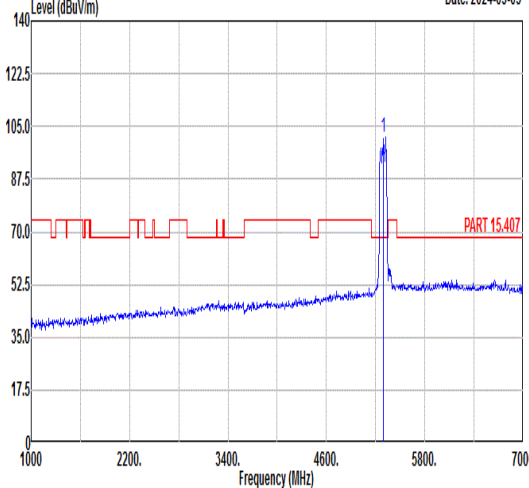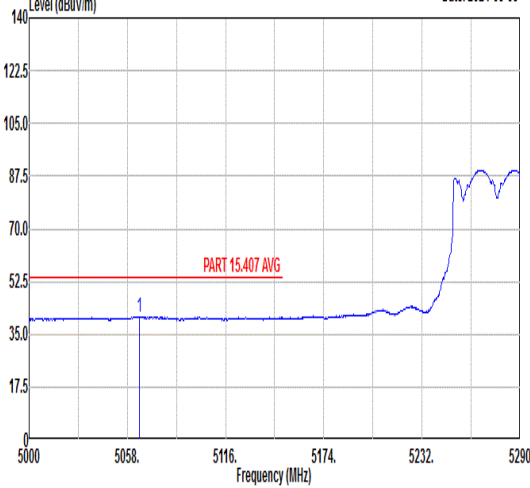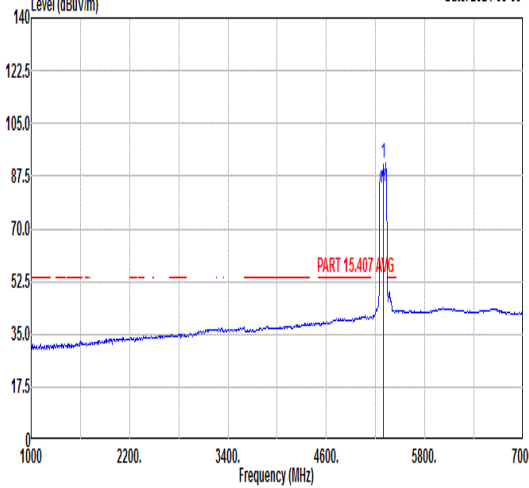

		79																																																																																									
Mode		Band Edge - L																																																																																									
		U-NII-2A_5.25-5.35_802.11be EHT 80_CH58_Full RU_5290MHz																																																																																									
ANT		5+7																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5079.46</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>39.25</td><td>36.15</td><td>8.41</td><td>32.59</td><td>300</td><td>62</td><td>PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>101.63</td><td>-----</td><td>-----</td><td>88.63</td><td>36.00</td><td>9.24</td><td>32.24</td><td>300</td><td>62</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5079.46	51.22	74.00	-22.78	39.25	36.15	8.41	32.59	300	62	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	101.63	-----	-----	88.63	36.00	9.24	32.24	300	62	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5079.46	51.22	74.00	-22.78	39.25	36.15	8.41	32.59	300	62	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5290.00	101.63	-----	-----	88.63	36.00	9.24	32.24	300	62	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5064.96</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>28.83</td><td>36.16</td><td>8.38</td><td>32.61</td><td>300</td><td>62</td><td>AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-03-03  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>91.84</td><td>-----</td><td>-----</td><td>78.84</td><td>36.00</td><td>9.24</td><td>32.24</td><td>300</td><td>62</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5064.96	40.76	54.00	-13.24	28.83	36.16	8.38	32.61	300	62	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	91.84	-----	-----	78.84	36.00	9.24	32.24	300	62	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5064.96	40.76	54.00	-13.24	28.83	36.16	8.38	32.61	300	62	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5290.00	91.84	-----	-----	78.84	36.00	9.24	32.24	300	62	AVERAGE																																																																																



Mode	79	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT 80_CH58_Full RU_5290MHz	
ANT	5+7	
Pol.	Vertical	Fundamental
Peak	<	



Mode	79																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11be EHT 80_CH58_Full RU_5290MHz																																																		
ANT	5+7																																																		
Pol.	Vertical						Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5383.50</td><td>61.52</td><td>74.00</td><td>-12.48</td><td>48.17</td><td>35.97</td><td>9.54</td><td>32.16</td><td>334</td><td>254</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5383.50	61.52	74.00	-12.48	48.17	35.97	9.54	32.16	334	254	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5383.50	61.52	74.00	-12.48	48.17	35.97	9.54	32.16	334	254	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5363.27</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>37.45</td><td>35.98</td><td>9.43</td><td>32.19</td><td>334</td><td>254</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5363.27	50.67	54.00	-3.33	37.45	35.98	9.43	32.19	334	254	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5363.27	50.67	54.00	-3.33	37.45	35.98	9.43	32.19	334	254	AVERAGE																																								



Mode	80																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH106_Full RU_5530MHz																																																																																													
ANT	5+7																																																																																													
Pol.	Horizontal					Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5447.92</td><td>62.47</td><td>74.00</td><td>-11.53</td><td>48.93</td><td>35.93</td><td>9.68</td><td>32.07</td><td>100 59 PEAK</td></tr><tr><td>2</td><td>5469.52</td><td>60.06</td><td>68.30</td><td>-8.24</td><td>46.49</td><td>35.92</td><td>9.69</td><td>32.04</td><td>100 59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5447.92	62.47	74.00	-11.53	48.93	35.93	9.68	32.07	100 59 PEAK	2	5469.52	60.06	68.30	-8.24	46.49	35.92	9.69	32.04	100 59 PEAK	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5530.00</td><td>106.02</td><td>-----</td><td>-----</td><td>92.36</td><td>35.99</td><td>9.74</td><td>32.07</td><td>100 59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	106.02	-----	-----	92.36	35.99	9.74	32.07	100 59 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5447.92	62.47	74.00	-11.53	48.93	35.93	9.68	32.07	100 59 PEAK																																																																																					
2	5469.52	60.06	68.30	-8.24	46.49	35.92	9.69	32.04	100 59 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5530.00	106.02	-----	-----	92.36	35.99	9.74	32.07	100 59 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5446.30</td><td>50.25</td><td>54.00</td><td>-3.75</td><td>36.72</td><td>35.93</td><td>9.68</td><td>32.08</td><td>100 59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5446.30	50.25	54.00	-3.75	36.72	35.93	9.68	32.08	100 59 AVERAGE	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5530.00</td><td>95.11</td><td>-----</td><td>-----</td><td>81.45</td><td>35.99</td><td>9.74</td><td>32.07</td><td>100 59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	95.11	-----	-----	81.45	35.99	9.74	32.07	100 59 AVERAGE										
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5446.30	50.25	54.00	-3.75	36.72	35.93	9.68	32.08	100 59 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5530.00	95.11	-----	-----	81.45	35.99	9.74	32.07	100 59 AVERAGE																																																																																					







Mode	80																																																														
	Band Edge - L																																																														
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH106_Full RU_5530MHz																																																														
ANT	5+7																																																														
Pol.	Vertical																																																														
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.06</td><td>61.93</td><td>74.00</td><td>-12.07</td><td>48.40</td><td>35.93</td><td>9.68</td><td>32.08</td><td>323</td><td>257</td><td>PEAK</td></tr><tr><td>2</td><td>5460.52</td><td>60.29</td><td>68.30</td><td>-8.01</td><td>46.74</td><td>35.92</td><td>9.69</td><td>32.06</td><td>323</td><td>257</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5443.06	61.93	74.00	-12.07	48.40	35.93	9.68	32.08	323	257	PEAK	2	5460.52	60.29	68.30	-8.01	46.74	35.92	9.69	32.06	323	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5443.06	61.93	74.00	-12.07	48.40	35.93	9.68	32.08	323	257	PEAK																																																				
2	5460.52	60.29	68.30	-8.01	46.74	35.92	9.69	32.06	323	257	PEAK																																																				
Fundamental	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>105.78</td><td>-----</td><td>-----</td><td>92.17</td><td>35.90</td><td>9.71</td><td>32.00</td><td>323</td><td>257</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	105.78	-----	-----	92.17	35.90	9.71	32.00	323	257	PEAK												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5530.00	105.78	-----	-----	92.17	35.90	9.71	32.00	323	257	PEAK																																																				
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.78</td><td>50.85</td><td>54.00</td><td>-3.15</td><td>37.32</td><td>35.93</td><td>9.68</td><td>32.08</td><td>323</td><td>257</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5443.78	50.85	54.00	-3.15	37.32	35.93	9.68	32.08	323	257	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5443.78	50.85	54.00	-3.15	37.32	35.93	9.68	32.08	323	257	AVERAGE																																																				
Fundamental	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>95.17</td><td>-----</td><td>-----</td><td>81.56</td><td>35.91</td><td>9.71</td><td>32.01</td><td>323</td><td>257</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	95.17	-----	-----	81.56	35.91	9.71	32.01	323	257	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5530.00	95.17	-----	-----	81.56	35.91	9.71	32.01	323	257	AVERAGE																																																				



Mode	80																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH106_Full RU_5530MHz																																												
ANT	5+7																																												
Pol.	Vertical	Fundamental																																											
Peak	Date: 2024-03-03 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.05</td><td>53.61</td><td>68.30</td><td>-14.69</td><td>39.60</td><td>36.22</td><td>10.02</td><td>32.23</td><td>323</td><td>257 PEAK</td></tr></table>			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.05	53.61	68.30	-14.69	39.60	36.22	10.02	32.23	323	257 PEAK	Blank
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5725.05	53.61	68.30	-14.69	39.60	36.22	10.02	32.23	323	257 PEAK																																			

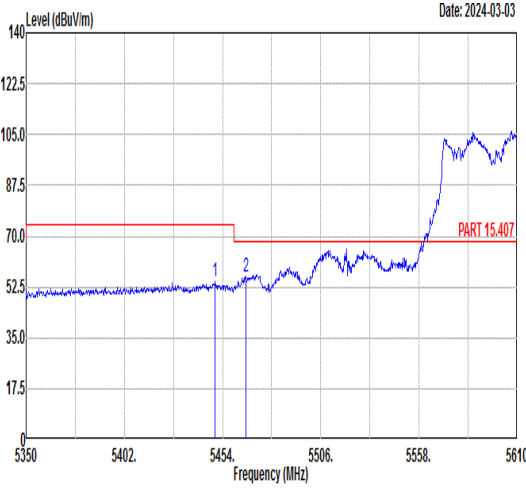
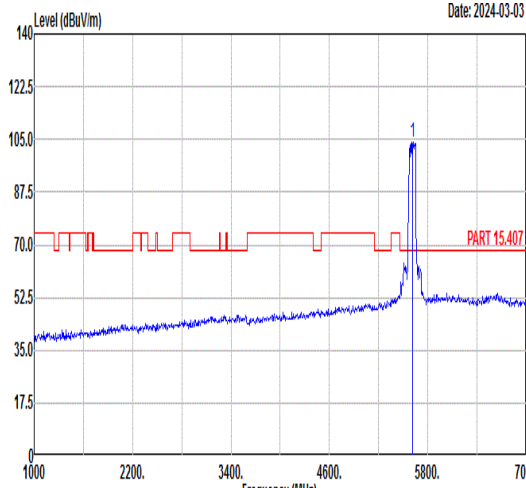
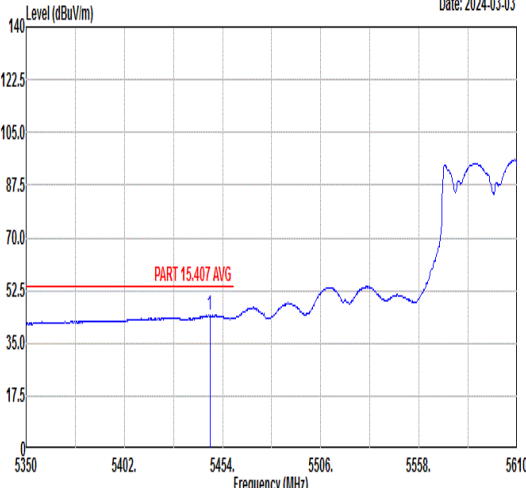
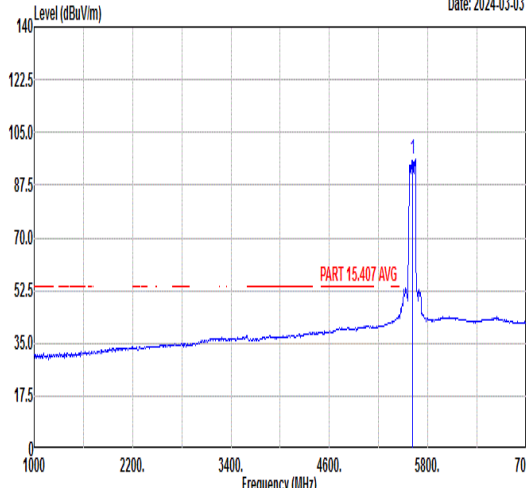


Mode	81																																																																																									
	Band Edge - L																																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH122_Full RU_5610MHz																																																																																									
ANT	5+7																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5450.10</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>40.64</td><td>35.93</td><td>9.68</td><td>32.07</td><td>103</td></tr><tr><td>2 5466.22</td><td>56.12</td><td>68.30</td><td>-12.18</td><td>42.56</td><td>35.92</td><td>9.69</td><td>32.05</td><td>103</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5450.10	54.18	74.00	-19.82	40.64	35.93	9.68	32.07	103	2 5466.22	56.12	68.30	-12.18	42.56	35.92	9.69	32.05	103	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5610.00</td><td>104.12</td><td>-----</td><td>-----</td><td>90.41</td><td>36.05</td><td>9.77</td><td>32.11</td><td>103</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5610.00	104.12	-----	-----	90.41	36.05	9.77	32.11
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5450.10	54.18	74.00	-19.82	40.64	35.93	9.68	32.07	103																																																																																		
2 5466.22	56.12	68.30	-12.18	42.56	35.92	9.69	32.05	103																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5610.00	104.12	-----	-----	90.41	36.05	9.77	32.11	103																																																																																		
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5447.24</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>30.75</td><td>35.93</td><td>9.68</td><td>32.07</td><td>103</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5447.24	44.29	54.00	-9.71	30.75	35.93	9.68	32.07	103	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5610.00</td><td>95.97</td><td>-----</td><td>-----</td><td>82.15</td><td>36.11</td><td>9.86</td><td>32.15</td><td>103</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5610.00	95.97	-----	-----	82.15	36.11	9.86	32.15	103								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5447.24	44.29	54.00	-9.71	30.75	35.93	9.68	32.07	103																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5610.00	95.97	-----	-----	82.15	36.11	9.86	32.15	103																																																																																		



Mode	81																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH122_Full RU_5610MHz																																									
ANT	5+7																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2024-03-03 <table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.56</td><td>55.65</td><td>68.30</td><td>-12.65</td><td>41.64</td><td>36.22</td><td>10.02</td><td>32.23</td><td>103</td><td>58 PEAK</td></tr></table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.56	55.65	68.30	-12.65	41.64	36.22	10.02	32.23	103	58 PEAK	Blank
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5726.56	55.65	68.30	-12.65	41.64	36.22	10.02	32.23	103	58 PEAK																																

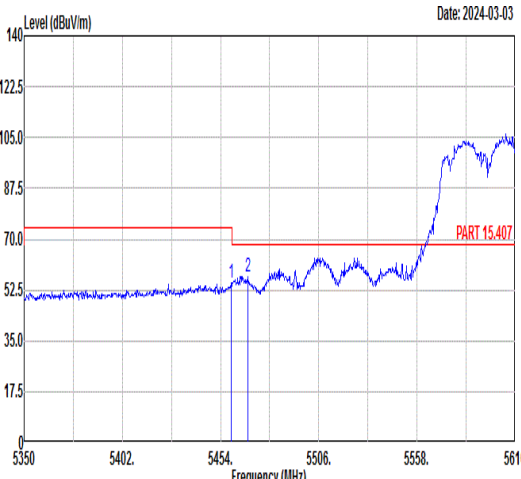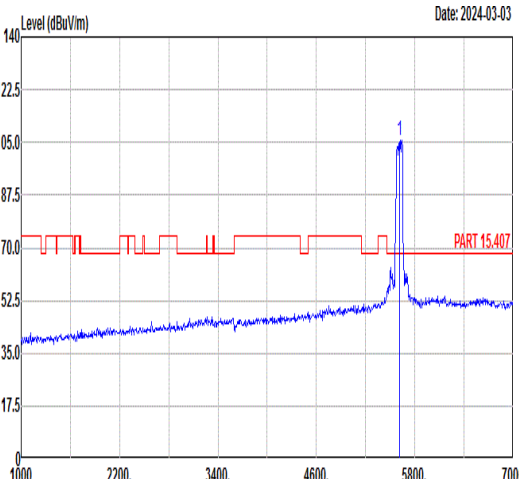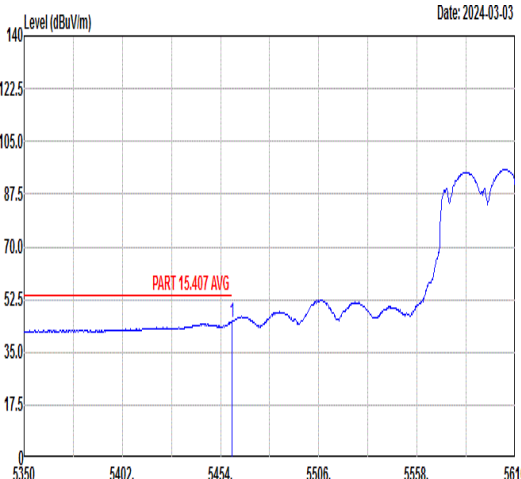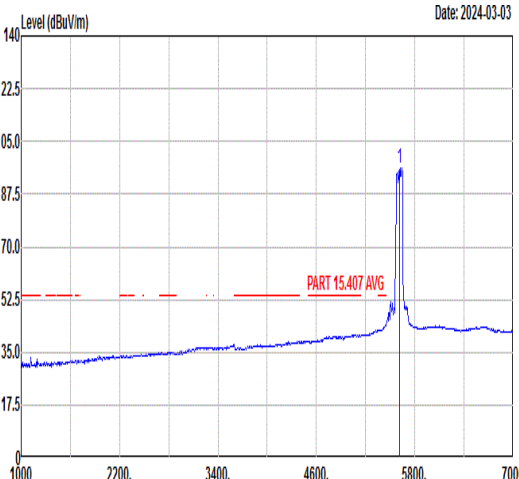

Mode	81																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11be EHT 80_CH122_Full RU_5610MHz																																																																																																							
ANT	5+7																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.72</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>41.58</td><td>35.92</td><td>9.69</td><td>32.06</td><td>341</td><td>253</td><td>PEAK</td></tr><tr><td>2</td><td>5468.56</td><td>57.29</td><td>68.30</td><td>-11.01</td><td>43.72</td><td>35.92</td><td>9.69</td><td>32.04</td><td>341</td><td>253</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.72	55.13	74.00	-18.87	41.58	35.92	9.69	32.06	341	253	PEAK	2	5468.56	57.29	68.30	-11.01	43.72	35.92	9.69	32.04	341	253	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>105.69</td><td>-----</td><td>-----</td><td>91.88</td><td>36.10</td><td>9.85</td><td>32.14</td><td>341</td><td>253</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	105.69	-----	-----	91.88	36.10	9.85	32.14	341	253
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.72	55.13	74.00	-18.87	41.58	35.92	9.69	32.06	341	253	PEAK																																																																																													
2	5468.56	57.29	68.30	-11.01	43.72	35.92	9.69	32.04	341	253	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5610.00	105.69	-----	-----	91.88	36.10	9.85	32.14	341	253	PEAK																																																																																													
Avg																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.98</td><td>45.14</td><td>54.00</td><td>-8.86</td><td>31.59</td><td>35.92</td><td>9.69</td><td>32.06</td><td>341</td><td>253</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.98	45.14	54.00	-8.86	31.59	35.92	9.69	32.06	341	253	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>96.24</td><td>-----</td><td>-----</td><td>82.48</td><td>36.08</td><td>9.81</td><td>32.13</td><td>341</td><td>253</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	96.24	-----	-----	82.48	36.08	9.81	32.13	341	253	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.98	45.14	54.00	-8.86	31.59	35.92	9.69	32.06	341	253	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5610.00	96.24	-----	-----	82.48	36.08	9.81	32.13	341	253	AVERAGE																																																																																													



Mode	82										
	Band Edge - L										
	U-NII-2A_5.25-5.35_802.11be EHT 160_CH50_Full RU_5250MHz										
ANT	5+7										
Pol.	Horizontal										
Peak	Fundamental										



Mode	82																																																			
	Band Edge - R																																																			
	U-NII-2A_5.25-5.35_802.11be EHT 160_CH50_Full RU_5250MHz																																																			
ANT	5+7																																																			
Pol.	Horizontal						Fundamental																																													
Peak	Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.36</td><td>58.25</td><td>74.00</td><td>-15.75</td><td>45.06</td><td>35.98</td><td>9.41</td><td>32.20</td><td>100</td><td>302</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5358.36	58.25	74.00	-15.75	45.06	35.98	9.41	32.20	100	302	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5358.36	58.25	74.00	-15.75	45.06	35.98	9.41	32.20	100	302	PEAK																																									
Avg	Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5423.88</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>29.38</td><td>35.95</td><td>9.67</td><td>32.11</td><td>100</td><td>302</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5423.88	42.89	54.00	-11.11	29.38	35.95	9.67	32.11	100	302	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5423.88	42.89	54.00	-11.11	29.38	35.95	9.67	32.11	100	302	AVERAGE																																									



		82																																																																															
Mode		Band Edge - L																																																																															
		U-NII-2A_5.25-5.35_802.11be EHT 160_CH50_Full RU_5250MHz																																																																															
ANT		5+7																																																																															
Pol.		Vertical						Fundamental																																																																									
Peak	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz)						Level (dBuV/m) Date: 2024-03-03 Frequency (MHz)																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.75</td><td>61.00</td><td>74.00</td><td>-13.00</td><td>48.85</td><td>36.11</td><td>8.53</td><td>32.49</td><td>312</td><td>254</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.75	61.00	74.00	-13.00	48.85	36.11	8.53	32.49	312	254	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>99.62</td><td>-----</td><td>-----</td><td>87.12</td><td>36.05</td><td>8.81</td><td>32.36</td><td>312</td><td>254</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	99.62	-----	-----	87.12	36.05	8.81	32.36	312	254
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5147.75	61.00	74.00	-13.00	48.85	36.11	8.53	32.49	312	254	PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5250.00	99.62	-----	-----	87.12	36.05	8.81	32.36	312	254	PEAK																																																																						
Avg	Level (dBuV/m) Date: 2024-03-03 Frequency (MHz)						Level (dBuV/m) Date: 2024-03-03 Frequency (MHz)																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.25</td><td>49.68</td><td>54.00</td><td>-4.32</td><td>37.60</td><td>36.13</td><td>8.48</td><td>32.53</td><td>312</td><td>254</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5122.25	49.68	54.00	-4.32	37.60	36.13	8.48	32.53	312	254	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>91.04</td><td>-----</td><td>-----</td><td>78.54</td><td>36.05</td><td>8.81</td><td>32.36</td><td>312</td><td>254</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	91.04	-----	-----	78.54	36.05	8.81	32.36	312	254
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5122.25	49.68	54.00	-4.32	37.60	36.13	8.48	32.53	312	254	AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5250.00	91.04	-----	-----	78.54	36.05	8.81	32.36	312	254	AVERAGE																																																																						



Mode	82											
	Band Edge - R											
	U-NII-2A_5.25-5.35_802.11be EHT 160_CH50_Full RU_5250MHz											
ANT	5+7											
Pol.	Vertical						Fundamental					
Peak												



Mode	83																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT 160_CH114_Full RU_5570MHz																																																																																		
ANT	5+7																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5418.20</td><td>60.12</td><td>74.00</td><td>-13.88</td><td>46.61</td><td>35.95</td><td>9.67</td><td>32.11</td></tr><tr><td>2</td><td>5464.62</td><td>60.87</td><td>68.30</td><td>-7.43</td><td>47.31</td><td>35.92</td><td>9.69</td><td>32.05</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5418.20	60.12	74.00	-13.88	46.61	35.95	9.67	32.11	2	5464.62	60.87	68.30	-7.43	47.31	35.92	9.69	32.05	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5570.00</td><td>99.35</td><td>-----</td><td>-----</td><td>85.66</td><td>36.02</td><td>9.75</td><td>32.08</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5570.00	99.35	-----	-----	85.66	36.02	9.75	32.08
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5418.20	60.12	74.00	-13.88	46.61	35.95	9.67	32.11																																																																											
2	5464.62	60.87	68.30	-7.43	47.31	35.92	9.69	32.05																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5570.00	99.35	-----	-----	85.66	36.02	9.75	32.08																																																																											
Avg	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5442.40</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>34.37</td><td>35.93</td><td>9.68</td><td>32.08</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5442.40	47.90	54.00	-6.10	34.37	35.93	9.68	32.08	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5570.00</td><td>89.90</td><td>-----</td><td>-----</td><td>76.21</td><td>36.02</td><td>9.75</td><td>32.08</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5570.00	89.90	-----	-----	76.21	36.02	9.75	32.08									
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5442.40	47.90	54.00	-6.10	34.37	35.93	9.68	32.08																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5570.00	89.90	-----	-----	76.21	36.02	9.75	32.08																																																																											



Mode	83																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11be EHT 160_CH114_Full RU_5570MHz																																							
ANT	5+7																																							
Pol.	Horizontal	Fundamental																																						
Peak	Date: 2024-03-04 <table><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.81</td><td>63.05</td><td>68.30</td><td>-5.25</td><td>49.04</td><td>36.22</td><td>10.02</td><td>32.23</td><td>100</td><td>299 PEAK</td></tr></table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.81	63.05	68.30	-5.25	49.04	36.22	10.02	32.23	100	299 PEAK	Blank
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1	5725.81	63.05	68.30	-5.25	49.04	36.22	10.02	32.23	100	299 PEAK																														



Mode	83																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT 160_CH114_Full RU_5570MHz																																																																																		
ANT	5+7																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5431.84</td><td>61.99</td><td>74.00</td><td>-12.01</td><td>48.48</td><td>35.94</td><td>9.67</td><td>32.10</td></tr><tr><td>2</td><td>5467.70</td><td>63.05</td><td>68.30</td><td>-5.25</td><td>49.49</td><td>35.92</td><td>9.69</td><td>32.05</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5431.84	61.99	74.00	-12.01	48.48	35.94	9.67	32.10	2	5467.70	63.05	68.30	-5.25	49.49	35.92	9.69	32.05	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5570.00</td><td>100.95</td><td>-----</td><td>-----</td><td>87.26</td><td>36.02</td><td>9.75</td><td>32.08</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5570.00	100.95	-----	-----	87.26	36.02	9.75	32.08
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5431.84	61.99	74.00	-12.01	48.48	35.94	9.67	32.10																																																																											
2	5467.70	63.05	68.30	-5.25	49.49	35.92	9.69	32.05																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5570.00	100.95	-----	-----	87.26	36.02	9.75	32.08																																																																											
Avg	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5442.40</td><td>49.94</td><td>54.00</td><td>-4.06</td><td>36.41</td><td>35.93</td><td>9.68</td><td>32.08</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5442.40	49.94	54.00	-4.06	36.41	35.93	9.68	32.08	Level (dBuV/m) Date: 2024-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5570.00</td><td>91.45</td><td>-----</td><td>-----</td><td>77.79</td><td>35.99</td><td>9.74</td><td>32.07</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5570.00	91.45	-----	-----	77.79	35.99	9.74	32.07									
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5442.40	49.94	54.00	-4.06	36.41	35.93	9.68	32.08																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																											
1	5570.00	91.45	-----	-----	77.79	35.99	9.74	32.07																																																																											



Mode	83										
	Band Edge - R										
	U-NII-2C_5.47-5.725_802.11be EHT 160_CH114_Full RU_5570MHz										
ANT	5+7										
Pol.	Vertical						Fundamental				
Peak	Level (dBuV/m)										





Mode	84																																																																																					
	Band Edge																																																																																					
	Straddle channels_5.47-5.85_802.11be EHT20_CH144_Full RU_5720MHz																																																																																					
ANT	5+7																																																																																					
Pol.	Horizontal					Fundamental																																																																																
Peak	Blank					Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5450.65</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>37.89</td><td>35.93</td><td>9.68</td><td>32.61</td><td>100</td><td>57</td><td>Peak</td></tr><tr><td>2</td><td>5466.05</td><td>50.28</td><td>68.30</td><td>-18.02</td><td>37.28</td><td>35.92</td><td>9.69</td><td>32.61</td><td>100</td><td>57</td><td>Peak</td></tr><tr><td>3</td><td>5720.00</td><td>109.77</td><td>68.30</td><td>41.47</td><td>96.24</td><td>36.21</td><td>10.01</td><td>32.69</td><td>100</td><td>57</td><td>Peak</td></tr><tr><td>4</td><td>5857.10</td><td>51.41</td><td>68.30</td><td>-16.89</td><td>37.45</td><td>36.40</td><td>10.30</td><td>32.74</td><td>100</td><td>57</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5450.65	50.89	74.00	-23.11	37.89	35.93	9.68	32.61	100	57	Peak	2	5466.05	50.28	68.30	-18.02	37.28	35.92	9.69	32.61	100	57	Peak	3	5720.00	109.77	68.30	41.47	96.24	36.21	10.01	32.69	100	57	Peak	4	5857.10	51.41	68.30	-16.89	37.45	36.40	10.30	32.74	100	57	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																														
1	5450.65	50.89	74.00	-23.11	37.89	35.93	9.68	32.61	100	57	Peak																																																																											
2	5466.05	50.28	68.30	-18.02	37.28	35.92	9.69	32.61	100	57	Peak																																																																											
3	5720.00	109.77	68.30	41.47	96.24	36.21	10.01	32.69	100	57	Peak																																																																											
4	5857.10	51.41	68.30	-16.89	37.45	36.40	10.30	32.74	100	57	Peak																																																																											
Avg	Blank					Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5460.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>27.76</td><td>35.92</td><td>9.69</td><td>32.61</td><td>100</td><td>57</td><td>Average</td></tr><tr><td>2</td><td>5720.00</td><td>102.10</td><td>68.30</td><td>33.80</td><td>88.57</td><td>36.21</td><td>10.01</td><td>32.69</td><td>100</td><td>57</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5460.00	40.76	54.00	-13.24	27.76	35.92	9.69	32.61	100	57	Average	2	5720.00	102.10	68.30	33.80	88.57	36.21	10.01	32.69	100	57	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																														
1	5460.00	40.76	54.00	-13.24	27.76	35.92	9.69	32.61	100	57	Average																																																																											
2	5720.00	102.10	68.30	33.80	88.57	36.21	10.01	32.69	100	57	Average																																																																											



Mode	84																																																																																						
	Band Edge																																																																																						
	Straddle channels_5.47-5.85_802.11be EHT20_CH144_Full RU_5720MHz																																																																																						
ANT	5+7																																																																																						
Pol.	Vertical						Fundamental																																																																																
Peak	Blank						Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5436.90</td><td>50.91</td><td>74.00</td><td>-23.09</td><td>37.90</td><td>35.94</td><td>9.68</td><td>32.61</td><td>334</td><td>252</td><td>Peak</td></tr><tr><td>2</td><td>5467.70</td><td>50.82</td><td>68.30</td><td>-17.48</td><td>37.82</td><td>35.92</td><td>9.69</td><td>32.61</td><td>334</td><td>252</td><td>Peak</td></tr><tr><td>3</td><td>5720.00</td><td>109.31</td><td>-----</td><td>-----</td><td>95.78</td><td>36.21</td><td>10.01</td><td>32.69</td><td>334</td><td>252</td><td>Peak</td></tr><tr><td>4</td><td>5891.20</td><td>51.24</td><td>68.30</td><td>-17.06</td><td>37.18</td><td>36.45</td><td>10.37</td><td>32.76</td><td>334</td><td>252</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5436.90	50.91	74.00	-23.09	37.90	35.94	9.68	32.61	334	252	Peak	2	5467.70	50.82	68.30	-17.48	37.82	35.92	9.69	32.61	334	252	Peak	3	5720.00	109.31	-----	-----	95.78	36.21	10.01	32.69	334	252	Peak	4	5891.20	51.24	68.30	-17.06	37.18	36.45	10.37	32.76	334	252	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																															
1	5436.90	50.91	74.00	-23.09	37.90	35.94	9.68	32.61	334	252	Peak																																																																												
2	5467.70	50.82	68.30	-17.48	37.82	35.92	9.69	32.61	334	252	Peak																																																																												
3	5720.00	109.31	-----	-----	95.78	36.21	10.01	32.69	334	252	Peak																																																																												
4	5891.20	51.24	68.30	-17.06	37.18	36.45	10.37	32.76	334	252	Peak																																																																												
Avg	Blank						Date: 2024-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5459.45</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>27.67</td><td>35.92</td><td>9.69</td><td>32.61</td><td>334</td><td>252</td><td>Average</td></tr><tr><td>2</td><td>5720.00</td><td>101.44</td><td>-----</td><td>-----</td><td>87.91</td><td>36.21</td><td>10.01</td><td>32.69</td><td>334</td><td>252</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.45	40.67	54.00	-13.33	27.67	35.92	9.69	32.61	334	252	Average	2	5720.00	101.44	-----	-----	87.91	36.21	10.01	32.69	334	252	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																															
1	5459.45	40.67	54.00	-13.33	27.67	35.92	9.69	32.61	334	252	Average																																																																												
2	5720.00	101.44	-----	-----	87.91	36.21	10.01	32.69	334	252	Average																																																																												

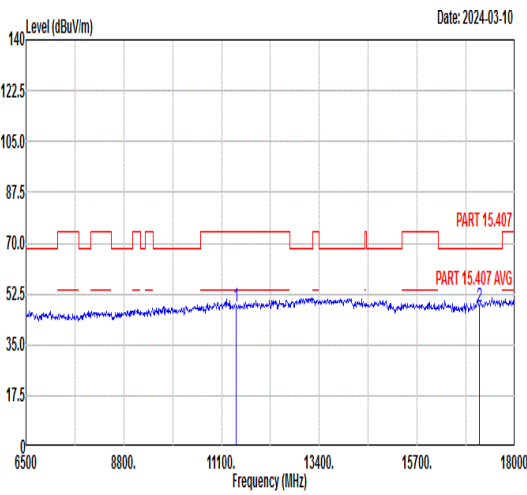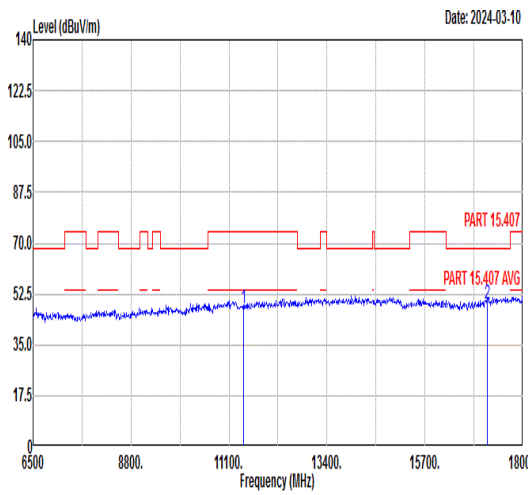

Mode	84																																																																																																																													
	Harmonic																																																																																																																													
	Straddle channels_5.47-5.85_802.11be EHT20_CH144_Full RU_5720MHz																																																																																																																													
ANT	5+7																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11440.00</td><td>48.09</td><td>74.00</td><td>-25.91</td><td>59.51</td><td>39.18</td><td>12.84</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17160.00</td><td>48.11</td><td>68.30</td><td>-20.19</td><td>55.93</td><td>41.78</td><td>15.66</td><td>65.26</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11440.00	48.09	74.00	-25.91	59.51	39.18	12.84	63.44	---	---	Peak	2 17160.00	48.11	68.30	-20.19	55.93	41.78	15.66	65.26	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11440.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>59.09</td><td>39.18</td><td>12.84</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17160.00</td><td>49.23</td><td>68.30</td><td>-19.07</td><td>57.05</td><td>41.78</td><td>15.66</td><td>65.26</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11440.00	47.67	74.00	-26.33	59.09	39.18	12.84	63.44	---	---	Peak	2 17160.00	49.23	68.30	-19.07	57.05	41.78	15.66	65.26	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1 11440.00	48.09	74.00	-25.91	59.51	39.18	12.84	63.44	---	---	Peak																																																																																																																				
2 17160.00	48.11	68.30	-20.19	55.93	41.78	15.66	65.26	---	---	Peak																																																																																																																				
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1 11440.00	47.67	74.00	-26.33	59.09	39.18	12.84	63.44	---	---	Peak																																																																																																																				
2 17160.00	49.23	68.30	-19.07	57.05	41.78	15.66	65.26	---	---	Peak																																																																																																																				



Mode	85									
	Band Edge									
	Straddle channels_5.47-5.85_802.11be EHT40_CH142_Full RU_5710MHz									
ANT	5+7									
Pol.	Horizontal					Fundamental				
Peak	Blank					<				



Mode	85										
	Band Edge										
	Straddle channels_5.47-5.85_802.11be EHT40_CH142_Full RU_5710MHz										
ANT	5+7										
Pol.	Vertical					Fundamental					
Peak	Blank										



Mode	86											
	Band Edge											
	Straddle channels_5.47-5.85_802.11be EHT80_CH138_Full RU_5690MHz											
ANT	5+7											
Pol.	Horizontal						Fundamental					
Peak	Blank						Level (dBuV/m) <					



Mode	86									
	Band Edge									
	Straddle channels_5.47-5.85_802.11be EHT80_CH138_Full RU_5690MHz									
ANT	5+7									
Pol.	Vertical					Fundamental				
Peak	Blank									



Mode	87																																																																																					
	Band Edge																																																																																					
	U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Single RU106/53_5180MHz																																																																																					
ANT	5+7																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5036.54</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>40.82</td><td>36.18</td><td>8.33</td><td>32.65</td><td>314</td><td>360</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5036.54	52.68	74.00	-21.32	40.82	36.18	8.33	32.65	314	360	PEAK	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>93.01</td><td>-----</td><td>-----</td><td>80.79</td><td>36.09</td><td>8.58</td><td>32.45</td><td>314</td><td>360</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	93.01	-----	-----	80.79	36.09	8.58	32.45	314	360	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5036.54	52.68	74.00	-21.32	40.82	36.18	8.33	32.65	314	360	PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5180.00	93.01	-----	-----	80.79	36.09	8.58	32.45	314	360	PEAK																																																																											
Avg	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5098.82</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>30.66</td><td>36.14</td><td>8.44</td><td>32.56</td><td>314</td><td>360</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5098.82	42.68	54.00	-11.32	30.66	36.14	8.44	32.56	314	360	AVERAGE	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>85.57</td><td>-----</td><td>-----</td><td>73.35</td><td>36.09</td><td>8.58</td><td>32.45</td><td>314</td><td>360</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	85.57	-----	-----	73.35	36.09	8.58	32.45	314	360	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5098.82	42.68	54.00	-11.32	30.66	36.14	8.44	32.56	314	360	AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5180.00	85.57	-----	-----	73.35	36.09	8.58	32.45	314	360	AVERAGE																																																																											



Mode	87																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Single RU106/53_5180MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5036 5072 5108 5144 5180 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5142.56</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>41.18</td><td>36.11</td><td>8.52</td><td>32.50</td><td>371</td><td>279 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5142.56	53.31	74.00	-20.69	41.18	36.11	8.52	32.50	371	279 PEAK	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>107.81</td><td>-----</td><td>-----</td><td>95.60</td><td>36.10</td><td>8.57</td><td>32.46</td><td>371</td><td>279 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	107.81	-----	-----	95.60	36.10	8.57	32.46	371	279 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5142.56	53.31	74.00	-20.69	41.18	36.11	8.52	32.50	371	279 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5180.00	107.81	-----	-----	95.60	36.10	8.57	32.46	371	279 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5036 5072 5108 5144 5180 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5148.14</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>30.94</td><td>36.11</td><td>8.53</td><td>32.49</td><td>371</td><td>279 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5148.14	43.09	54.00	-10.91	30.94	36.11	8.53	32.49	371	279 AVERAGE	Level (dBuV/m) Date: 2024-03-16 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>100.12</td><td>-----</td><td>-----</td><td>87.91</td><td>36.10</td><td>8.57</td><td>32.46</td><td>371</td><td>279 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	100.12	-----	-----	87.91	36.10	8.57	32.46	371	279 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5148.14	43.09	54.00	-10.91	30.94	36.11	8.53	32.49	371	279 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5180.00	100.12	-----	-----	87.91	36.10	8.57	32.46	371	279 AVERAGE																																																																									







Mode	88									
	Band Edge									
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Single RU52/40_5320MHz									
ANT	5+7									
Pol.	Horizontal					Fundamental				
Peak	Level (dBuV/m) Date: 2024-03-16									



		88																																															
Mode		Band Edge																																															
		U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Single RU52/40_5320MHz																																															
ANT		5+7																																															
Pol.		Vertical					Fundamental																																										
Peak	Level (dBuV/m) Date: 2024-03-16 1 5452.72 52.78 74.00 -21.22 39.24 35.93 9.68 32.07 400 273 PEAK					Level (dBuV/m) Date: 2024-03-16 1 5320.00 96.26 ----- 83.26 36.00 9.24 32.24 400 273 PEAK																																											
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5452.72</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>39.24</td><td>35.93</td><td>9.68</td><td>32.07</td><td>400</td><td>273 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5452.72	52.78	74.00	-21.22	39.24	35.93	9.68	32.07	400	273 PEAK	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>96.26</td><td>-----</td><td>83.26</td><td>36.00</td><td>9.24</td><td>32.24</td><td>400</td><td>273</td><td>PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	96.26	-----	83.26	36.00	9.24	32.24	400	273
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5452.72	52.78	74.00	-21.22	39.24	35.93	9.68	32.07	400	273 PEAK																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5320.00	96.26	-----	83.26	36.00	9.24	32.24	400	273	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-03-16 1 5447.96 42.64 54.00 -11.36 29.10 35.93 9.68 32.07 400 273 AVERAGE					Level (dBuV/m) Date: 2024-03-16 1 5320.00 88.71 ----- 75.71 36.00 9.24 32.24 400 273 AVERAGE																																											
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5447.96</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>29.10</td><td>35.93</td><td>9.68</td><td>32.07</td><td>400</td><td>273 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5447.96	42.64	54.00	-11.36	29.10	35.93	9.68	32.07	400	273 AVERAGE	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>88.71</td><td>-----</td><td>75.71</td><td>36.00</td><td>9.24</td><td>32.24</td><td>400</td><td>273</td><td>AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	88.71	-----	75.71	36.00	9.24	32.24	400	273
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5447.96	42.64	54.00	-11.36	29.10	35.93	9.68	32.07	400	273 AVERAGE																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 5320.00	88.71	-----	75.71	36.00	9.24	32.24	400	273	AVERAGE																																								

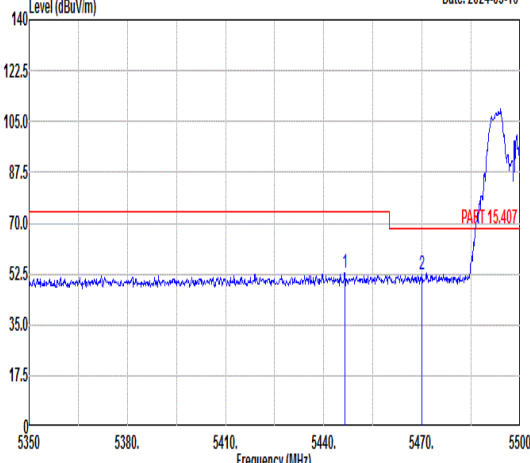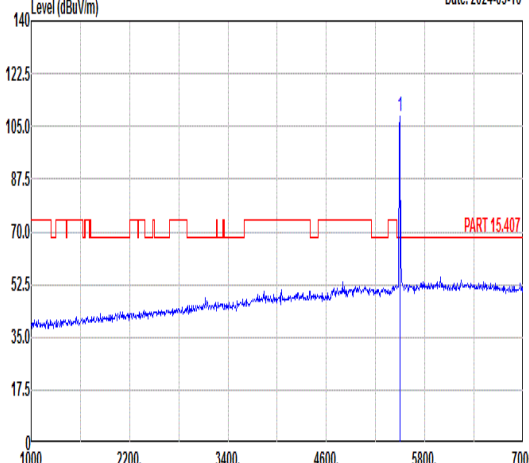
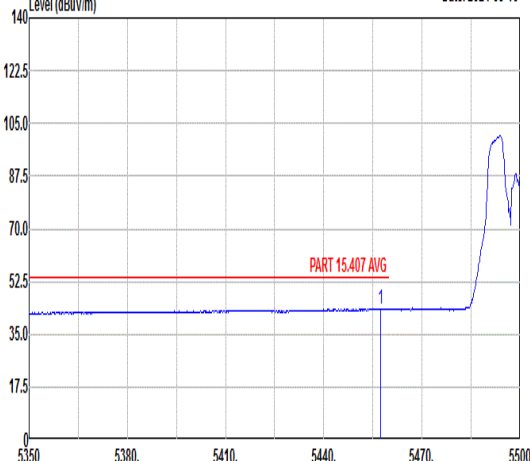
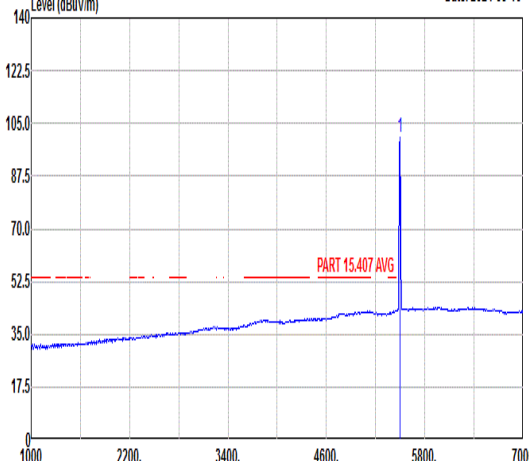


		89																																																																																																			
Mode		Band Edge																																																																																																			
		U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Single RU52/37_5500MHz																																																																																																			
ANT		5+7																																																																																																			
Pol.		Horizontal					Fundamental																																																																																														
Peak	Level (dBuV/m) Date: 2024-03-16  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-16  Frequency (MHz)																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5446.45</td><td>53.08</td><td>74.00</td><td>-20.92</td><td>39.54</td><td>35.93</td><td>9.68</td><td>32.07</td><td>112</td><td>66 PEAK</td></tr><tr><td>2</td><td>5469.85</td><td>52.44</td><td>68.30</td><td>-15.86</td><td>38.87</td><td>35.92</td><td>9.69</td><td>32.04</td><td>112</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5446.45	53.08	74.00	-20.92	39.54	35.93	9.68	32.07	112	66 PEAK	2	5469.85	52.44	68.30	-15.86	38.87	35.92	9.69	32.04	112	66 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>108.16</td><td>-----</td><td>94.57</td><td>35.90</td><td>9.70</td><td>32.01</td><td>112</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	108.16	-----	94.57	35.90	9.70	32.01	112
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5446.45	53.08	74.00	-20.92	39.54	35.93	9.68	32.07	112	66 PEAK																																																																																											
2	5469.85	52.44	68.30	-15.86	38.87	35.92	9.69	32.04	112	66 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	108.16	-----	94.57	35.90	9.70	32.01	112	66 PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2024-03-16  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-16  Frequency (MHz)																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.40</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>29.98</td><td>35.93</td><td>9.69</td><td>32.06</td><td>112</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.40	43.54	54.00	-10.46	29.98	35.93	9.69	32.06	112	66 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>100.63</td><td>-----</td><td>87.04</td><td>35.90</td><td>9.70</td><td>32.01</td><td>112</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.63	-----	87.04	35.90	9.70	32.01	112	66 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5457.40	43.54	54.00	-10.46	29.98	35.93	9.69	32.06	112	66 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	100.63	-----	87.04	35.90	9.70	32.01	112	66 AVERAGE																																																																																												






Mode	89																																																																																														
	Band Edge																																																																																														
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Single RU52/37_5500MHz																																																																																														
ANT	5+7																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.75</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>39.13</td><td>35.93</td><td>9.68</td><td>32.07</td><td>314</td><td>268 PEAK</td></tr><tr><td>2</td><td>5463.40</td><td>52.73</td><td>68.30</td><td>-15.57</td><td>39.17</td><td>35.92</td><td>9.69</td><td>32.05</td><td>314</td><td>268 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5452.75	52.67	74.00	-21.33	39.13	35.93	9.68	32.07	314	268 PEAK	2	5463.40	52.73	68.30	-15.57	39.17	35.92	9.69	32.05	314	268 PEAK	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>109.47</td><td>-----</td><td>-----</td><td>95.88</td><td>35.90</td><td>9.70</td><td>32.01</td><td>314</td><td>268 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	109.47	-----	-----	95.88	35.90	9.70	32.01	314	268 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5452.75	52.67	74.00	-21.33	39.13	35.93	9.68	32.07	314	268 PEAK																																																																																					
2	5463.40	52.73	68.30	-15.57	39.17	35.92	9.69	32.05	314	268 PEAK																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5500.00	109.47	-----	-----	95.88	35.90	9.70	32.01	314	268 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.50</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>29.98</td><td>35.92</td><td>9.69</td><td>32.06</td><td>314</td><td>268 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.50	43.53	54.00	-10.47	29.98	35.92	9.69	32.06	314	268 AVERAGE	Level (dBuV/m) Date: 2024-03-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>101.32</td><td>-----</td><td>-----</td><td>87.73</td><td>35.90</td><td>9.70</td><td>32.01</td><td>314</td><td>268 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	101.32	-----	-----	87.73	35.90	9.70	32.01	314	268 AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5459.50	43.53	54.00	-10.47	29.98	35.92	9.69	32.06	314	268 AVERAGE																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5500.00	101.32	-----	-----	87.73	35.90	9.70	32.01	314	268 AVERAGE																																																																																					

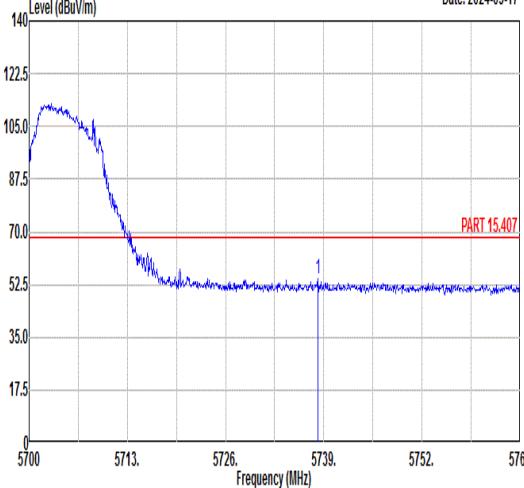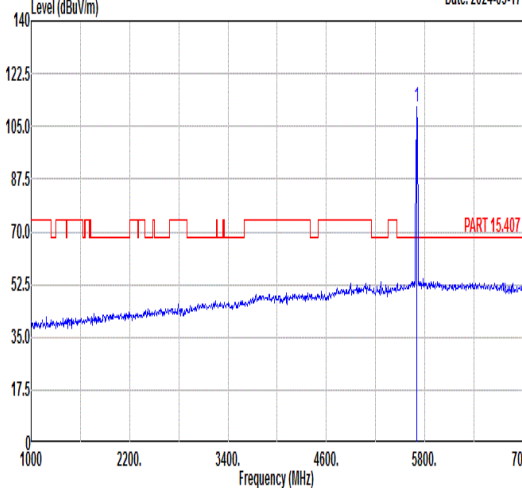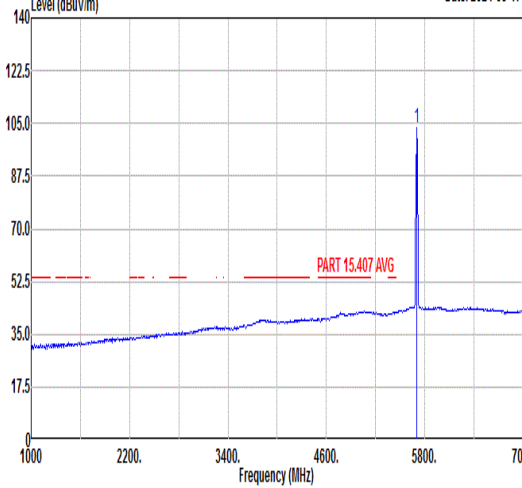

Mode	90																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Single RU106/54_5700MHz																																																																																									
ANT	5+7																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-17  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5738.22</td><td>54.33</td><td>68.30</td><td>-13.97</td><td>40.29</td><td>36.23</td><td>10.05</td><td>32.24</td><td>100 59 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5738.22	54.33	68.30	-13.97	40.29	36.23	10.05	32.24	100 59 PEAK	Level (dBuV/m) Date: 2024-03-17  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>111.44</td><td>-----</td><td>97.48</td><td>36.19</td><td>9.97</td><td>32.20</td><td>100</td><td>59 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	111.44	-----	97.48	36.19	9.97	32.20	100	59 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5738.22	54.33	68.30	-13.97	40.29	36.23	10.05	32.24	100 59 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	111.44	-----	97.48	36.19	9.97	32.20	100	59 PEAK																																																																																	
Avg	Blank					Level (dBuV/m) Date: 2024-03-17  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>103.71</td><td>-----</td><td>89.75</td><td>36.19</td><td>9.97</td><td>32.20</td><td>100</td><td>59 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	103.71	-----	89.75	36.19	9.97	32.20	100	59 AVERAGE																																								
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	103.71	-----	89.75	36.19	9.97	32.20	100	59 AVERAGE																																																																																	

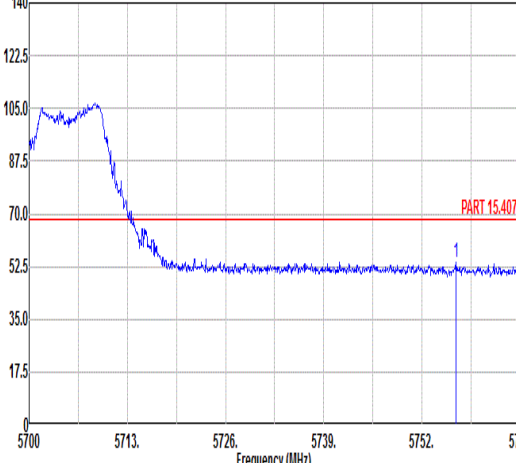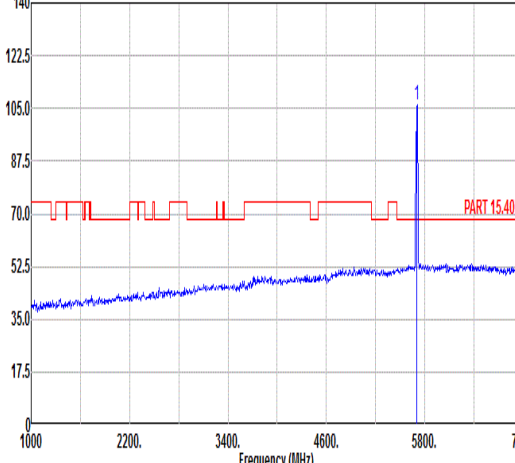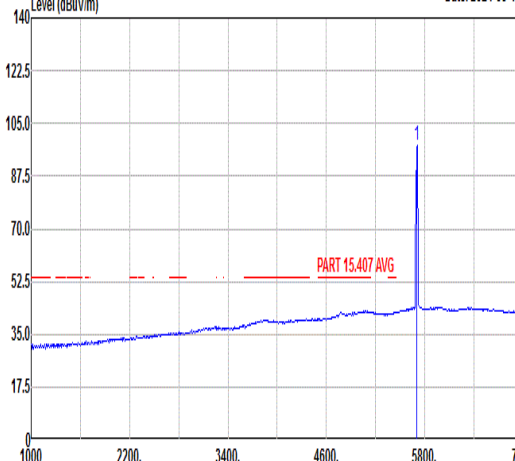

Mode	90																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Single RU106/54_5700MHz																																																																																									
ANT	5+7																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-17  1 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5756.49</td><td>53.93</td><td>68.30</td><td>-14.37</td><td>39.85</td><td>36.26</td><td>10.08</td><td>32.26</td><td>317 265 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5756.49	53.93	68.30	-14.37	39.85	36.26	10.08	32.26	317 265 PEAK	Level (dBuV/m) Date: 2024-03-17  1 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>106.04</td><td>-----</td><td>92.07</td><td>36.19</td><td>9.99</td><td>32.21</td><td>317</td><td>265 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	106.04	-----	92.07	36.19	9.99	32.21	317	265 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5756.49	53.93	68.30	-14.37	39.85	36.26	10.08	32.26	317 265 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	106.04	-----	92.07	36.19	9.99	32.21	317	265 PEAK																																																																																	
Avg	Blank					Level (dBuV/m) Date: 2024-03-17  1 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>97.92</td><td>-----</td><td>83.95</td><td>36.19</td><td>9.99</td><td>32.21</td><td>317</td><td>265 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	97.92	-----	83.95	36.19	9.99	32.21	317	265 AVERAGE																																								
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.00	97.92	-----	83.95	36.19	9.99	32.21	317	265 AVERAGE																																																																																	



Mode	91	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Small RU52+26_5180MHz	
ANT	5+7	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-03-16 1 5136.26 52.70 74.00 -21.30 40.58 36.12 8.51 32.51 100 304 PEAK	Level (dBuV/m) Date: 2024-03-16 1 5180.00 104.34 ----- 92.12 36.09 8.58 32.45 100 304 PEAK
	Level (dBuV/m) Date: 2024-03-16 1 5147.24 43.22 54.00 -10.78 31.07 36.11 8.53 32.49 100 304 AVERAGE	Level (dBuV/m) Date: 2024-03-16 1 5180.00 98.09 ----- 85.87 36.09 8.58 32.45 100 304 AVERAGE



		91																																																																										
Mode		Band Edge																																																																										
		U-NII-1_5.15-5.25_802.11be EHT 20_CH36_Small RU52+26_5180MHz																																																																										
ANT		5+7																																																																										
Pol.		Vertical					Fundamental																																																																					
Peak	Level (dBuV/m) Date: 2024-03-16 500050365072510851445180 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5137.88</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>41.54</td><td>36.12</td><td>8.51</td><td>32.51</td><td>371</td><td>266</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5137.88	53.66	74.00	-20.34	41.54	36.12	8.51	32.51	371	266	PEAK	Level (dBuV/m) Date: 2024-03-16 100022003400460058007000 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5180.00</td><td>108.11</td><td>-----</td><td>-----</td><td>95.89</td><td>36.09</td><td>8.58</td><td>32.45</td><td>371</td><td>266</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5180.00	108.11	-----	-----	95.89	36.09	8.58	32.45	371	266	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5137.88	53.66	74.00	-20.34	41.54	36.12	8.51	32.51	371	266	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5180.00	108.11	-----	-----	95.89	36.09	8.58	32.45	371	266	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-03-16 500050365072510851445180 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5147.06</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>32.04</td><td>36.11</td><td>8.53</td><td>32.49</td><td>371</td><td>266</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5147.06	44.19	54.00	-9.81	32.04	36.11	8.53	32.49	371	266	AVERAGE	Level (dBuV/m) Date: 2024-03-16 100022003400460058007000 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5180.00</td><td>102.20</td><td>-----</td><td>-----</td><td>89.98</td><td>36.09</td><td>8.58</td><td>32.45</td><td>371</td><td>266</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5180.00	102.20	-----	-----	89.98	36.09	8.58	32.45	371	266	AVERAGE
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5147.06	44.19	54.00	-9.81	32.04	36.11	8.53	32.49	371	266	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5180.00	102.20	-----	-----	89.98	36.09	8.58	32.45	371	266	AVERAGE																																																																		







		92																																																																																
Mode		Band Edge																																																																																
		U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Small RU52+26_5320MHz																																																																																
ANT		5+7																																																																																
Pol.		Horizontal					Fundamental																																																																											
Peak	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5443.06</td><td>52.85</td><td>74.00</td><td>-21.15</td><td>39.32</td><td>35.93</td><td>9.68</td><td>32.08</td><td>100 69 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5443.06	52.85	74.00	-21.15	39.32	35.93	9.68	32.08	100 69 PEAK	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>103.71</td><td>-----</td><td>-----</td><td>90.74</td><td>36.01</td><td>9.21</td><td>32.25</td><td>100 69 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	103.71	-----	-----	90.74	36.01	9.21	32.25	100 69 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 5443.06	52.85	74.00	-21.15	39.32	35.93	9.68	32.08	100 69 PEAK																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 5320.00	103.71	-----	-----	90.74	36.01	9.21	32.25	100 69 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5356.96</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>30.18</td><td>35.99</td><td>9.40</td><td>32.20</td><td>100 69 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5356.96	43.37	54.00	-10.63	30.18	35.99	9.40	32.20	100 69 AVERAGE	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>96.64</td><td>-----</td><td>-----</td><td>83.67</td><td>36.01</td><td>9.21</td><td>32.25</td><td>100 69 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	96.64	-----	-----	83.67	36.01	9.21	32.25	100 69 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 5356.96	43.37	54.00	-10.63	30.18	35.99	9.40	32.20	100 69 AVERAGE																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 5320.00	96.64	-----	-----	83.67	36.01	9.21	32.25	100 69 AVERAGE																																																																										



Mode	92																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT 20_CH64_Small RU52+26_5320MHz																																																																																									
ANT	5+7																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348 5376 5404 5432 5460 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.94</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>40.02</td><td>35.95</td><td>9.67</td><td>32.11</td><td>400 259 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5420.94	53.53	74.00	-20.47	40.02	35.95	9.67	32.11	400 259 PEAK	Level (dBuV/m) Date: 2024-03-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.12</td><td>-----</td><td>89.12</td><td>36.00</td><td>9.24</td><td>32.24</td><td>400</td><td>259 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	102.12	-----	89.12	36.00	9.24	32.24	400	259 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5420.94	53.53	74.00	-20.47	40.02	35.95	9.67	32.11	400 259 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	102.12	-----	89.12	36.00	9.24	32.24	400	259 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-03-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348 5376 5404 5432 5460 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5371.38</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>30.05</td><td>35.98</td><td>9.48</td><td>32.18</td><td>400 259 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5371.38	43.33	54.00	-10.67	30.05	35.98	9.48	32.18	400 259 AVERAGE	Level (dBuV/m) Date: 2024-03-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.17</td><td>-----</td><td>82.17</td><td>36.00</td><td>9.24</td><td>32.24</td><td>400</td><td>259 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	95.17	-----	82.17	36.00	9.24	32.24	400	259 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5371.38	43.33	54.00	-10.67	30.05	35.98	9.48	32.18	400 259 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	95.17	-----	82.17	36.00	9.24	32.24	400	259 AVERAGE																																																																																	

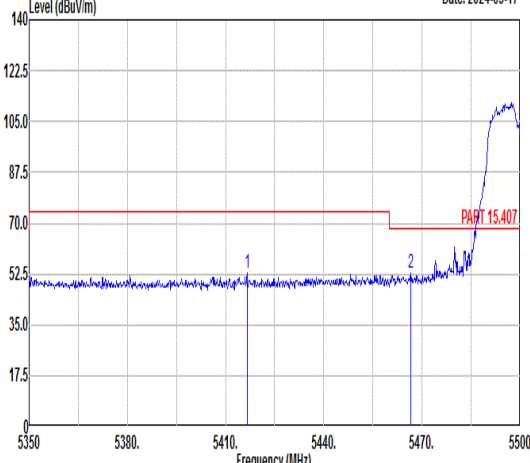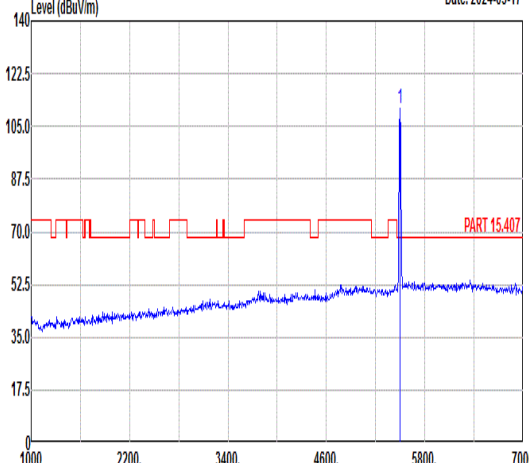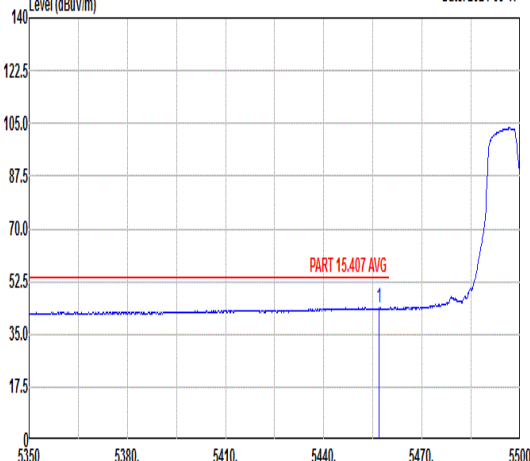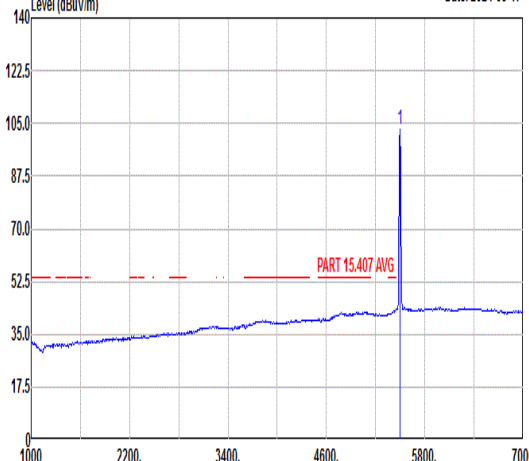

		93																																																																																																	
Mode		Band Edge																																																																																																	
		U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Small RU106+26_5500MHz																																																																																																	
ANT		5+7																																																																																																	
Pol.		Horizontal					Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2024-03-17  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-17  Frequency (MHz)																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5416.60</td><td>52.61</td><td>74.00</td><td>-21.39</td><td>39.12</td><td>35.95</td><td>9.66</td><td>32.12</td><td>100 68 PEAK</td></tr><tr><td>2</td><td>5466.55</td><td>52.76</td><td>68.30</td><td>-15.54</td><td>39.20</td><td>35.92</td><td>9.69</td><td>32.05</td><td>100 68 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5416.60	52.61	74.00	-21.39	39.12	35.95	9.66	32.12	100 68 PEAK	2	5466.55	52.76	68.30	-15.54	39.20	35.92	9.69	32.05	100 68 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>110.98</td><td>-----</td><td>-----</td><td>97.39</td><td>35.90</td><td>9.70</td><td>32.01</td><td>100 68 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.98	-----	-----	97.39	35.90	9.70	32.01
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5416.60	52.61	74.00	-21.39	39.12	35.95	9.66	32.12	100 68 PEAK																																																																																										
2	5466.55	52.76	68.30	-15.54	39.20	35.92	9.69	32.05	100 68 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	110.98	-----	-----	97.39	35.90	9.70	32.01	100 68 PEAK																																																																																										
Avg	Level (dBuV/m) Date: 2024-03-17  Frequency (MHz)					Level (dBuV/m) Date: 2024-03-17  Frequency (MHz)																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.95</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>30.28</td><td>35.93</td><td>9.69</td><td>32.06</td><td>100 68 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5456.95	43.84	54.00	-10.16	30.28	35.93	9.69	32.06	100 68 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>103.15</td><td>-----</td><td>-----</td><td>89.56</td><td>35.90</td><td>9.70</td><td>32.01</td><td>100 68 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.15	-----	-----	89.56	35.90	9.70	32.01	100 68 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5456.95	43.84	54.00	-10.16	30.28	35.93	9.69	32.06	100 68 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	103.15	-----	-----	89.56	35.90	9.70	32.01	100 68 AVERAGE																																																																																										



Mode	93																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH100_Small RU106+26_5500MHz																																																																																											
ANT	5+7																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5430.25</td><td>52.39</td><td>74.00</td><td>-21.61</td><td>38.88</td><td>35.94</td><td>9.67</td><td>32.10</td><td>325 244 PEAK</td></tr><tr><td>2</td><td>5467.45</td><td>51.44</td><td>68.30</td><td>-16.86</td><td>37.88</td><td>35.92</td><td>9.69</td><td>32.05</td><td>325 244 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5430.25	52.39	74.00	-21.61	38.88	35.94	9.67	32.10	325 244 PEAK	2	5467.45	51.44	68.30	-16.86	37.88	35.92	9.69	32.05	325 244 PEAK	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>110.63</td><td>-----</td><td>97.04</td><td>35.90</td><td>9.70</td><td>32.01</td><td>325</td><td>244 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.63	-----	97.04	35.90	9.70	32.01	325	244 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5430.25	52.39	74.00	-21.61	38.88	35.94	9.67	32.10	325 244 PEAK																																																																																			
2	5467.45	51.44	68.30	-16.86	37.88	35.92	9.69	32.05	325 244 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	110.63	-----	97.04	35.90	9.70	32.01	325	244 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.95</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>30.20</td><td>35.93</td><td>9.69</td><td>32.06</td><td>325 244 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.95	43.76	54.00	-10.24	30.20	35.93	9.69	32.06	325 244 AVERAGE	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>102.86</td><td>-----</td><td>89.27</td><td>35.90</td><td>9.70</td><td>32.01</td><td>325</td><td>244 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.86	-----	89.27	35.90	9.70	32.01	325	244 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5456.95	43.76	54.00	-10.24	30.20	35.93	9.69	32.06	325 244 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	102.86	-----	89.27	35.90	9.70	32.01	325	244 AVERAGE																																																																																			





Mode	94																																																																																		
	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Small RU106+26_5700MHz																																																																																		
ANT	5+7																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5732.96</td><td>54.05</td><td>68.30</td><td>-14.25</td><td>40.01</td><td>36.23</td><td>10.04</td><td>32.23</td><td>103</td><td>298 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5732.96	54.05	68.30	-14.25	40.01	36.23	10.04	32.23	103	298 PEAK	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>109.85</td><td>-----</td><td>95.89</td><td>36.19</td><td>9.97</td><td>32.20</td><td>103</td><td>298 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	109.85	-----	95.89	36.19	9.97	32.20	103	298 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5732.96	54.05	68.30	-14.25	40.01	36.23	10.04	32.23	103	298 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	109.85	-----	95.89	36.19	9.97	32.20	103	298 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>101.50</td><td>-----</td><td>87.56</td><td>36.18</td><td>9.96</td><td>32.20</td><td>103</td><td>298 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.50	-----	87.56	36.18	9.96	32.20	103	298 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	101.50	-----	87.56	36.18	9.96	32.20	103	298 AVERAGE																																																																										



Mode	94																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT 20_CH140_Small RU106+26_5700MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.72</td><td>54.74</td><td>68.30</td><td>-13.56</td><td>40.73</td><td>36.22</td><td>10.02</td><td>32.23</td><td>369 236 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.72	54.74	68.30	-13.56	40.73	36.22	10.02	32.23	369 236 PEAK	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>110.53</td><td>-----</td><td>-----</td><td>96.56</td><td>36.19</td><td>9.99</td><td>32.21</td><td>369 236 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	110.53	-----	-----	96.56	36.19	9.99	32.21	369 236 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5726.72	54.74	68.30	-13.56	40.73	36.22	10.02	32.23	369 236 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5700.00	110.53	-----	-----	96.56	36.19	9.99	32.21	369 236 PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2024-03-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.73</td><td>-----</td><td>-----</td><td>87.76</td><td>36.19</td><td>9.99</td><td>32.21</td><td>369 236 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.73	-----	-----	87.76	36.19	9.99	32.21	369 236 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5700.00	101.73	-----	-----	87.76	36.19	9.99	32.21	369 236 AVERAGE																																																																									

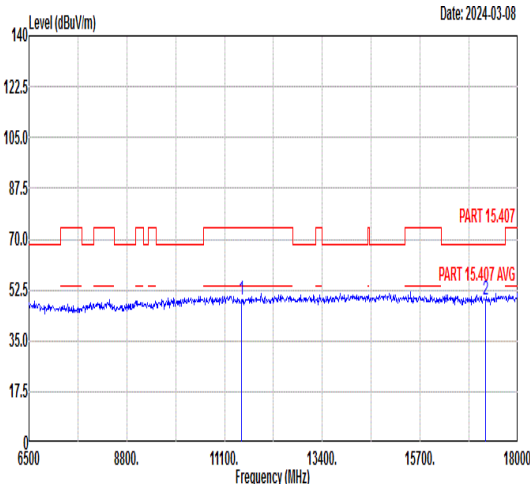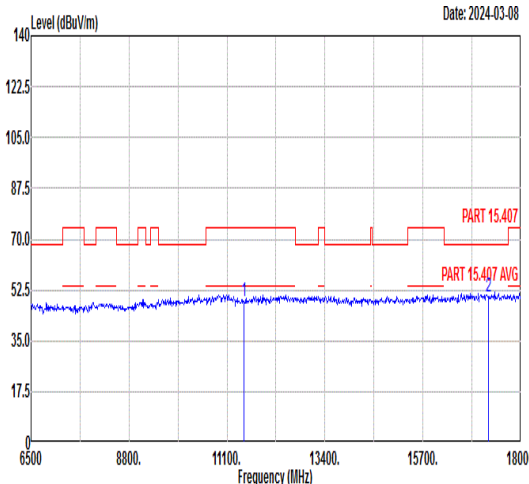

Mode	95																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																													
ANT	5+7																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>49.02</td><td>74.00</td><td>-24.98</td><td>60.39</td><td>39.20</td><td>12.87</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17235.00</td><td>49.08</td><td>68.30</td><td>-19.22</td><td>56.80</td><td>41.86</td><td>15.72</td><td>65.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	49.02	74.00	-24.98	60.39	39.20	12.87	63.44	---	---	Peak	2 17235.00	49.08	68.30	-19.22	56.80	41.86	15.72	65.30	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>48.74</td><td>74.00</td><td>-25.26</td><td>60.11</td><td>39.20</td><td>12.87</td><td>63.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17235.00</td><td>50.31</td><td>68.30</td><td>-17.99</td><td>58.03</td><td>41.86</td><td>15.72</td><td>65.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	48.74	74.00	-25.26	60.11	39.20	12.87	63.44	---	---	Peak	2 17235.00	50.31	68.30	-17.99	58.03	41.86	15.72	65.30	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 11490.00	49.02	74.00	-24.98	60.39	39.20	12.87	63.44	---	---	Peak																																																																																																				
2 17235.00	49.08	68.30	-19.22	56.80	41.86	15.72	65.30	---	---	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 11490.00	48.74	74.00	-25.26	60.11	39.20	12.87	63.44	---	---	Peak																																																																																																				
2 17235.00	50.31	68.30	-17.99	58.03	41.86	15.72	65.30	---	---	Peak																																																																																																				



Mode	96																																																																																																									
	Harmonic																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																									
ANT	5+7																																																																																																									
Pol.	Horizontal					Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2024-03-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11570.00</td><td>50.38</td><td>74.00</td><td>-23.62</td><td>61.67</td><td>39.23</td><td>12.93</td><td>63.45</td><td>---</td><td>--- Peak</td></tr><tr><td>2 17355.00</td><td>50.34</td><td>68.30</td><td>-17.96</td><td>57.90</td><td>41.99</td><td>15.81</td><td>65.36</td><td>---</td><td>--- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	50.38	74.00	-23.62	61.67	39.23	12.93	63.45	---	--- Peak	2 17355.00	50.34	68.30	-17.96	57.90	41.99	15.81	65.36	---	--- Peak	Level (dBuV/m) Date: 2024-03-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11570.00</td><td>49.20</td><td>74.00</td><td>-24.80</td><td>60.49</td><td>39.23</td><td>12.93</td><td>63.45</td><td>---</td><td>--- Peak</td></tr><tr><td>2 17355.00</td><td>49.73</td><td>68.30</td><td>-18.57</td><td>57.29</td><td>41.99</td><td>15.81</td><td>65.36</td><td>---</td><td>--- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	49.20	74.00	-24.80	60.49	39.23	12.93	63.45	---	--- Peak	2 17355.00	49.73	68.30	-18.57	57.29	41.99	15.81	65.36	---	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11570.00	50.38	74.00	-23.62	61.67	39.23	12.93	63.45	---	--- Peak																																																																																																	
2 17355.00	50.34	68.30	-17.96	57.90	41.99	15.81	65.36	---	--- Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11570.00	49.20	74.00	-24.80	60.49	39.23	12.93	63.45	---	--- Peak																																																																																																	
2 17355.00	49.73	68.30	-18.57	57.29	41.99	15.81	65.36	---	--- Peak																																																																																																	



Mode	97																																																																			
	Harmonic																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																			
ANT	5+7																																																																			
Pol.	Horizontal							Vertical																																																												
Peak Avg	Date: 2024-03-08							Date: 2024-03-08																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
<table><tr><td>1</td><td>11650.00</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>60.41</td><td>39.26</td><td>12.99</td><td>63.45</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>50.51</td><td>68.30</td><td>-17.79</td><td>57.92</td><td>42.12</td><td>15.90</td><td>65.43</td><td>---</td><td>---</td><td>Peak</td></tr></table>							1	11650.00	49.21	74.00	-24.79	60.41	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.51	68.30	-17.79	57.92	42.12	15.90	65.43	---	---	Peak	<table><tr><td>1</td><td>11650.00</td><td>48.12</td><td>74.00</td><td>-25.88</td><td>59.32</td><td>39.26</td><td>12.99</td><td>63.45</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>50.26</td><td>68.30</td><td>-18.04</td><td>57.67</td><td>42.12</td><td>15.90</td><td>65.43</td><td>---</td><td>---</td><td>Peak</td></tr></table>							1	11650.00	48.12	74.00	-25.88	59.32	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.26	68.30	-18.04	57.67	42.12	15.90	65.43	---	---	Peak							
1	11650.00	49.21	74.00	-24.79	60.41	39.26	12.99	63.45	---	---	Peak																																																									
2	17475.00	50.51	68.30	-17.79	57.92	42.12	15.90	65.43	---	---	Peak																																																									
1	11650.00	48.12	74.00	-25.88	59.32	39.26	12.99	63.45	---	---	Peak																																																									
2	17475.00	50.26	68.30	-18.04	57.67	42.12	15.90	65.43	---	---	Peak																																																									





Mode	98																																																																																																																														
	Band Edge																																																																																																																														
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																														
ANT	5+7																																																																																																																														
Pol.	Horizontal										Fundamental																																																																																																																				
Peak	Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5633.79</td><td>53.39</td><td>68.30</td><td>-14.91</td><td>39.60</td><td>36.09</td><td>9.83</td><td>32.13</td><td>100</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5651.48</td><td>53.80</td><td>69.39</td><td>-15.59</td><td>39.98</td><td>36.11</td><td>9.86</td><td>32.15</td><td>100</td><td>62</td><td>PEAK</td></tr><tr><td>3</td><td>5701.21</td><td>55.30</td><td>105.54</td><td>-50.24</td><td>41.35</td><td>36.18</td><td>9.97</td><td>32.20</td><td>100</td><td>62</td><td>PEAK</td></tr><tr><td>4</td><td>5720.50</td><td>60.81</td><td>111.93</td><td>-51.12</td><td>46.81</td><td>36.21</td><td>10.01</td><td>32.22</td><td>100</td><td>62</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5633.79	53.39	68.30	-14.91	39.60	36.09	9.83	32.13	100	62	PEAK	2	5651.48	53.80	69.39	-15.59	39.98	36.11	9.86	32.15	100	62	PEAK	3	5701.21	55.30	105.54	-50.24	41.35	36.18	9.97	32.20	100	62	PEAK	4	5720.50	60.81	111.93	-51.12	46.81	36.21	10.01	32.22	100	62	PEAK	Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>109.06</td><td>-----</td><td>-----</td><td>95.01</td><td>36.24</td><td>10.06</td><td>32.25</td><td>100</td><td>62</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	109.06	-----	-----	95.01	36.24	10.06	32.25	100	62	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5633.79	53.39	68.30	-14.91	39.60	36.09	9.83	32.13	100	62	PEAK																																																																																																																				
2	5651.48	53.80	69.39	-15.59	39.98	36.11	9.86	32.15	100	62	PEAK																																																																																																																				
3	5701.21	55.30	105.54	-50.24	41.35	36.18	9.97	32.20	100	62	PEAK																																																																																																																				
4	5720.50	60.81	111.93	-51.12	46.81	36.21	10.01	32.22	100	62	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5745.00	109.06	-----	-----	95.01	36.24	10.06	32.25	100	62	PEAK																																																																																																																				
Avg	Blank										Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>101.95</td><td>-----</td><td>-----</td><td>87.90</td><td>36.24</td><td>10.06</td><td>32.25</td><td>100</td><td>62</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.95	-----	-----	87.90	36.24	10.06	32.25	100	62	AVERAGE																																																																												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5745.00	101.95	-----	-----	87.90	36.24	10.06	32.25	100	62	AVERAGE																																																																																																																				



Mode	98																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																			
ANT	5+7																																																																																																																			
Pol.	Vertical					Fundamental																																																																																																														
Peak	Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5614.50</td><td>53.03</td><td>68.30</td><td>-15.27</td><td>39.29</td><td>36.06</td><td>9.79</td><td>32.11</td><td>346</td><td>253 PEAK</td></tr><tr><td>2 5650.17</td><td>52.06</td><td>68.43</td><td>-16.37</td><td>38.24</td><td>36.11</td><td>9.86</td><td>32.15</td><td>346</td><td>253 PEAK</td></tr><tr><td>3 5700.78</td><td>53.14</td><td>105.42</td><td>-52.28</td><td>39.19</td><td>36.18</td><td>9.97</td><td>32.20</td><td>346</td><td>253 PEAK</td></tr><tr><td>4 5720.06</td><td>56.79</td><td>110.94</td><td>-54.15</td><td>42.79</td><td>36.21</td><td>10.01</td><td>32.22</td><td>346</td><td>253 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5614.50	53.03	68.30	-15.27	39.29	36.06	9.79	32.11	346	253 PEAK	2 5650.17	52.06	68.43	-16.37	38.24	36.11	9.86	32.15	346	253 PEAK	3 5700.78	53.14	105.42	-52.28	39.19	36.18	9.97	32.20	346	253 PEAK	4 5720.06	56.79	110.94	-54.15	42.79	36.21	10.01	32.22	346	253 PEAK	Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>108.98</td><td>-----</td><td>-----</td><td>94.93</td><td>36.24</td><td>10.05</td><td>32.24</td><td>346</td><td>253 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.00	108.98	-----	-----	94.93	36.24	10.05	32.24	346	253 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1 5614.50	53.03	68.30	-15.27	39.29	36.06	9.79	32.11	346	253 PEAK																																																																																																											
2 5650.17	52.06	68.43	-16.37	38.24	36.11	9.86	32.15	346	253 PEAK																																																																																																											
3 5700.78	53.14	105.42	-52.28	39.19	36.18	9.97	32.20	346	253 PEAK																																																																																																											
4 5720.06	56.79	110.94	-54.15	42.79	36.21	10.01	32.22	346	253 PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1 5745.00	108.98	-----	-----	94.93	36.24	10.05	32.24	346	253 PEAK																																																																																																											
Avg	Blank					Date: 2024-03-04 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>101.42</td><td>-----</td><td>-----</td><td>87.37</td><td>36.24</td><td>10.05</td><td>32.24</td><td>346</td><td>253 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.00	101.42	-----	-----	87.37	36.24	10.05	32.24	346	253 AVERAGE																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1 5745.00	101.42	-----	-----	87.37	36.24	10.05	32.24	346	253 AVERAGE																																																																																																											

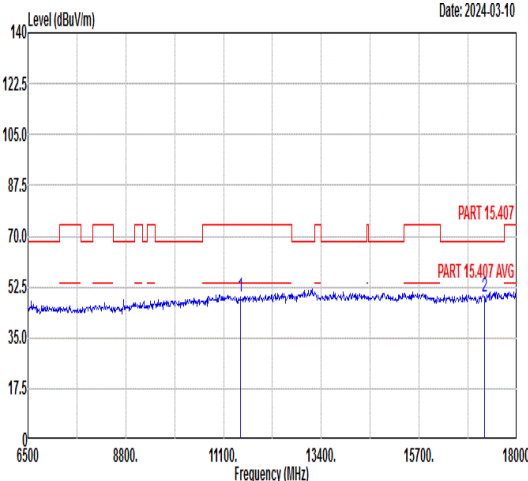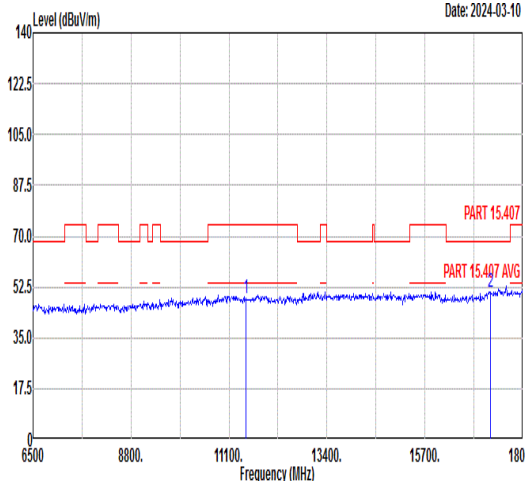

Mode	98																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																	
ANT	5+7																																																																																																																	
Pol.	Horizontal								Vertical																																																																																																									
Peak Avg																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>60.41</td><td>39.20</td><td>12.87</td><td>63.44</td><td>--- --- Peak</td></tr><tr><td>2</td><td>17235.00</td><td>49.03</td><td>68.30</td><td>-19.27</td><td>56.75</td><td>41.86</td><td>15.72</td><td>65.30</td><td>--- --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11490.00	49.04	74.00	-24.96	60.41	39.20	12.87	63.44	--- --- Peak	2	17235.00	49.03	68.30	-19.27	56.75	41.86	15.72	65.30	--- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>48.73</td><td>74.00</td><td>-25.27</td><td>60.10</td><td>39.20</td><td>12.87</td><td>63.44</td><td>--- --- Peak</td></tr><tr><td>2</td><td>17235.00</td><td>50.49</td><td>68.30</td><td>-17.81</td><td>58.21</td><td>41.86</td><td>15.72</td><td>65.30</td><td>--- --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11490.00	48.73	74.00	-25.27	60.10	39.20	12.87	63.44	--- --- Peak	2	17235.00	50.49	68.30	-17.81	58.21	41.86	15.72	65.30	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	11490.00	49.04	74.00	-24.96	60.41	39.20	12.87	63.44	--- --- Peak																																																																																																									
2	17235.00	49.03	68.30	-19.27	56.75	41.86	15.72	65.30	--- --- Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	11490.00	48.73	74.00	-25.27	60.10	39.20	12.87	63.44	--- --- Peak																																																																																																									
2	17235.00	50.49	68.30	-17.81	58.21	41.86	15.72	65.30	--- --- Peak																																																																																																									



Mode	99																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11570.00</td><td>46.57</td><td>74.00</td><td>-27.43</td><td>57.86</td><td>39.23</td><td>12.93</td><td>63.45</td><td>---</td><td>--- Peak</td></tr><tr><td>2 17355.00</td><td>49.98</td><td>68.30</td><td>-18.32</td><td>57.54</td><td>41.99</td><td>15.81</td><td>65.36</td><td>---</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	46.57	74.00	-27.43	57.86	39.23	12.93	63.45	---	--- Peak	2 17355.00	49.98	68.30	-18.32	57.54	41.99	15.81	65.36	---	--- Peak	Level (dBuV/m) Date: 2024-03-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11570.00</td><td>46.37</td><td>74.00</td><td>-27.63</td><td>57.66</td><td>39.23</td><td>12.93</td><td>63.45</td><td>---</td><td>--- Peak</td></tr><tr><td>2 17355.00</td><td>49.11</td><td>68.30</td><td>-19.19</td><td>56.67</td><td>41.99</td><td>15.81</td><td>65.36</td><td>---</td><td>--- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	46.37	74.00	-27.63	57.66	39.23	12.93	63.45	---	--- Peak	2 17355.00	49.11	68.30	-19.19	56.67	41.99	15.81	65.36	---	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11570.00	46.57	74.00	-27.43	57.86	39.23	12.93	63.45	---	--- Peak																																																																																									
2 17355.00	49.98	68.30	-18.32	57.54	41.99	15.81	65.36	---	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11570.00	46.37	74.00	-27.63	57.66	39.23	12.93	63.45	---	--- Peak																																																																																									
2 17355.00	49.11	68.30	-19.19	56.67	41.99	15.81	65.36	---	--- Peak																																																																																									



Mode	100																																																																																																																																									
	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																									
ANT	5+7																																																																																																																																									
Pol.	Horizontal																																																																																																																																									
Peak	Level (dBuV/m) Date: 2024-03-04 PEAK_BE(B4)_16-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.63</td><td>55.88</td><td>111.65</td><td>-55.77</td><td>41.54</td><td>36.40</td><td>10.29</td><td>32.35</td><td>100</td><td>300</td><td>PEAK</td></tr><tr><td>2</td><td>5873.75</td><td>54.72</td><td>105.55</td><td>-50.83</td><td>40.34</td><td>36.42</td><td>10.33</td><td>32.37</td><td>100</td><td>300</td><td>PEAK</td></tr><tr><td>3</td><td>5924.13</td><td>51.99</td><td>68.94</td><td>-16.95</td><td>37.48</td><td>36.49</td><td>10.44</td><td>32.42</td><td>100</td><td>300</td><td>PEAK</td></tr><tr><td>4</td><td>5949.50</td><td>54.02</td><td>68.30</td><td>-14.28</td><td>39.45</td><td>36.53</td><td>10.49</td><td>32.45</td><td>100</td><td>300</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.63	55.88	111.65	-55.77	41.54	36.40	10.29	32.35	100	300	PEAK	2	5873.75	54.72	105.55	-50.83	40.34	36.42	10.33	32.37	100	300	PEAK	3	5924.13	51.99	68.94	-16.95	37.48	36.49	10.44	32.42	100	300	PEAK	4	5949.50	54.02	68.30	-14.28	39.45	36.53	10.49	32.45	100	300	PEAK	Level (dBuV/m) Date: 2024-03-04 PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>109.26</td><td>-----</td><td>-----</td><td>95.00</td><td>36.35</td><td>10.23</td><td>32.32</td><td>100</td><td>300</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.26	-----	-----	95.00	36.35	10.23	32.32	100	300	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5854.63	55.88	111.65	-55.77	41.54	36.40	10.29	32.35	100	300	PEAK																																																																																																																															
2	5873.75	54.72	105.55	-50.83	40.34	36.42	10.33	32.37	100	300	PEAK																																																																																																																															
3	5924.13	51.99	68.94	-16.95	37.48	36.49	10.44	32.42	100	300	PEAK																																																																																																																															
4	5949.50	54.02	68.30	-14.28	39.45	36.53	10.49	32.45	100	300	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	109.26	-----	-----	95.00	36.35	10.23	32.32	100	300	PEAK																																																																																																																															
Avg	Blank																																																																																																																																									
	Level (dBuV/m) Date: 2024-03-04 PART 15.407 AVG Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>102.12</td><td>-----</td><td>-----</td><td>87.86</td><td>36.35</td><td>10.23</td><td>32.32</td><td>100</td><td>300</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	102.12	-----	-----	87.86	36.35	10.23	32.32	100	300	AVERAGE																																																																																							
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	102.12	-----	-----	87.86	36.35	10.23	32.32	100	300	AVERAGE																																																																																																																															



Mode	100																																																																																																																												
	Band Edge																																																																																																																												
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																												
ANT	5+7																																																																																																																												
Pol.	Vertical					Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2024-03-04 PEAK_BE(B4)_16-24					Level (dBuV/m) Date: 2024-03-04 PART 15.407																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>54.78</td><td>110.80</td><td>-56.02</td><td>40.44</td><td>36.40</td><td>10.29</td><td>32.35</td><td>291</td><td>252</td><td>PEAK</td></tr><tr><td>2</td><td>5873.38</td><td>54.63</td><td>105.65</td><td>-51.02</td><td>40.25</td><td>36.42</td><td>10.33</td><td>32.37</td><td>291</td><td>252</td><td>PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>51.23</td><td>68.30</td><td>-17.07</td><td>36.72</td><td>36.49</td><td>10.44</td><td>32.42</td><td>291</td><td>252</td><td>PEAK</td></tr><tr><td>4</td><td>5942.13</td><td>53.70</td><td>68.30</td><td>-14.60</td><td>39.14</td><td>36.52</td><td>10.48</td><td>32.44</td><td>291</td><td>252</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	54.78	110.80	-56.02	40.44	36.40	10.29	32.35	291	252	PEAK	2	5873.38	54.63	105.65	-51.02	40.25	36.42	10.33	32.37	291	252	PEAK	3	5925.00	51.23	68.30	-17.07	36.72	36.49	10.44	32.42	291	252	PEAK	4	5942.13	53.70	68.30	-14.60	39.14	36.52	10.48	32.44	291	252	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>108.68</td><td>-----</td><td>-----</td><td>94.44</td><td>36.35</td><td>10.21</td><td>32.32</td><td>291</td><td>252</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	108.68	-----	-----	94.44	36.35	10.21	32.32	291	252
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5855.00	54.78	110.80	-56.02	40.44	36.40	10.29	32.35	291	252	PEAK																																																																																																																		
2	5873.38	54.63	105.65	-51.02	40.25	36.42	10.33	32.37	291	252	PEAK																																																																																																																		
3	5925.00	51.23	68.30	-17.07	36.72	36.49	10.44	32.42	291	252	PEAK																																																																																																																		
4	5942.13	53.70	68.30	-14.60	39.14	36.52	10.48	32.44	291	252	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5825.00	108.68	-----	-----	94.44	36.35	10.21	32.32	291	252	PEAK																																																																																																																		
Avg	Blank					Level (dBuV/m) Date: 2024-03-04 PART 15.407 AVG																																																																																																																							
					<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>101.60</td><td>-----</td><td>-----</td><td>87.36</td><td>36.35</td><td>10.21</td><td>32.32</td><td>291</td><td>252</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.60	-----	-----	87.36	36.35	10.21	32.32	291	252	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5825.00	101.60	-----	-----	87.36	36.35	10.21	32.32	291	252	AVERAGE																																																																																																																		