



FCC RADIO TEST REPORT

FCC ID : BEJNT- 15Z80T
Equipment : Notebook Computer
Brand Name : LG
Model Name : 15Z80T
Series Model Name : 15ZD80T, 15ZB80T, 15ZG80T, 15ZS80T, 15Z80T*(* can be 0 to 9 or A to Z or blank denoting buyer request)
Applicant : LG Electronics USA, Inc.
111 Sylvan Avenue North Building Englewood Cliffs, NJ 07632 United States
Manufacturer : LG ELECTRONICS INC.
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 08, 2025 and testing was performed from Jan. 22, 2025 to Mar. 07, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	13
3.3 Power Spectral Density Measurement	14
3.4 Unwanted Emissions Measurement.....	16
3.5 AC Conducted Emission Measurement.....	21
3.6 Antenna Requirements.....	23
4 List of Measuring Equipment.....	24
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4O0149-01E	01	Initial issue of report	Mar. 12, 2025
FR4O0149-01E	02	1. Revise section 1.1, 2.2 and 3.3 2. Revise appendix A This report is an updated version, replacing the report issued on Mar. 12, 2025.	Apr. 09, 2025
FR4O0149-01E	03	Revise section 2.2 This report is an updated version, replacing the report issued on Apr. 09, 2025.	Apr. 10, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different series model name is for marketing segmentation.

Reviewed by: Sheng Kuo

Report Producer: Michelle Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11a/ax.	
Antenna Type WLAN <Main>: PIFA Antenna <Aux.>: PIFA Antenna	
Sample 1	EUT with INPAQ Antenna
Sample 2	EUT with Pulse Antenna
Integrated WLAN module	Brand Name: MediaTek Model Name: MT7922A12L

Antenna Information			
Antenna 1	Manufacturer	INPAQ	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Model number	DQ6WAPLEL33 (WA-P-LELE-02-018)	DQ6WAPLEL33 (WA-P-LELE-02-018)
	Peak gain (dBi)	Main Antenna:	Aux. Antenna:
		WLAN (5GHz) Band 4: 3.87	WLAN (5GHz) Band 4: 3.94
Antenna 2	Manufacturer	Pulse	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Model number	DQ602701000 (TQ27010)	DQ602701000 (TQ27010)
	Peak gain (dBi)	Main Antenna:	Aux. Antenna:
		WLAN (5GHz) Band 4: 3.64	WLAN (5GHz) Band 4: 3.76

Remark:

1. All test items were performed with 15Z80T.
2. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Chain 0 (dBi)	Chain 1 (dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	3.87	3.94	3.94	6.92	0.00	0.92

Calculation example:

If a device has two antenna, $G_{Chain0} = 3.87$ dBi; $G_{Chain1} = 3.94$ dBi

Directional gain of power measurement = $\max(3.87, 3.94) + 0 = 3.94$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(3.87 \text{ dBi} / 20)} + 10^{(3.94 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 6.92 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.



2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

Full testing for nominal bandwidths (Full_RU).

Perform additional testing on Partial_RU modes for band edge, spurious emissions, output power and PSD.


The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Earphone + USB HD + Monitor + Adapter for Sample 1
Remark: 1. The detailed Radiated test modes are shown in Appendix C. 2. For Radiated Test Cases, the tests were performed with Sample 1. 3. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

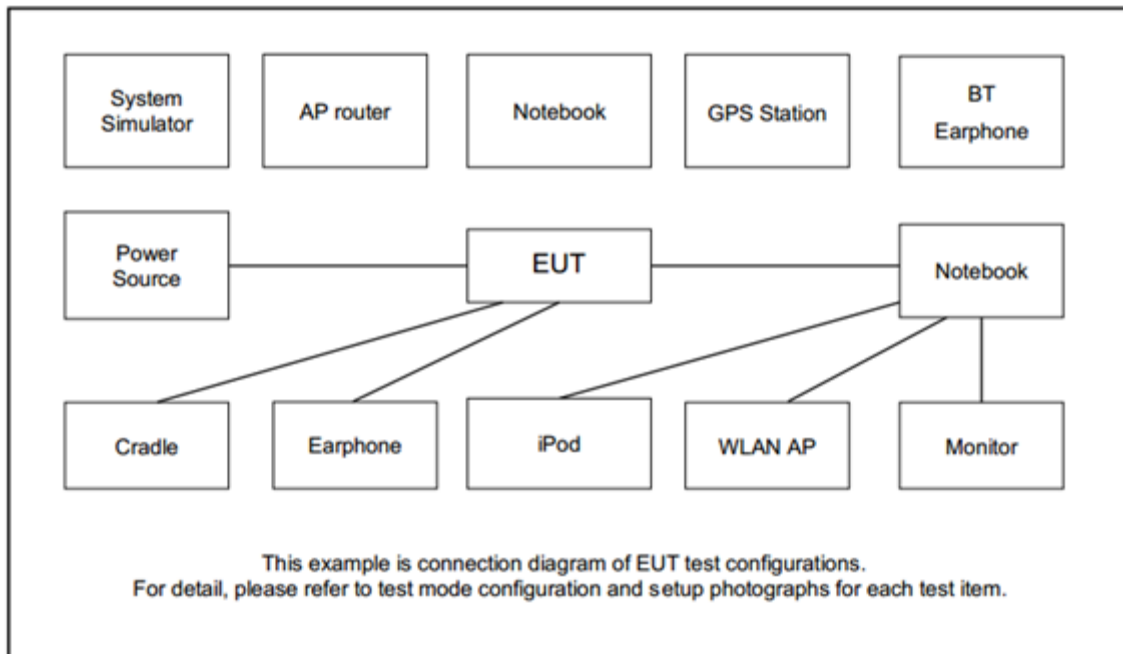

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LCD Monitor	Dell	ST2220LB	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m
2.	Earphone + Mic	Samsung	Ecouteur	N/A	nonshielded 1.8m	N/A
3.	USB HD	ADATA	HV620S-1T	FCC DoC	Shielded, 0.5m	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "MT7922 QA 0.0.2.73" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

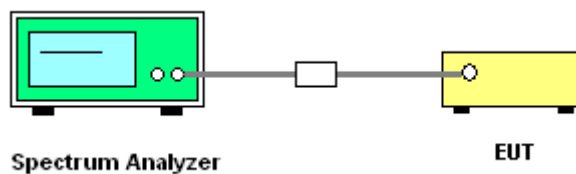

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

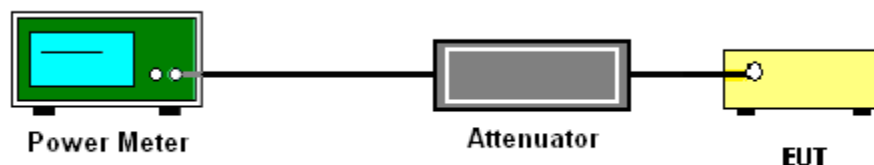

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500kHz.
 - Set VBW $\geq$ 3MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

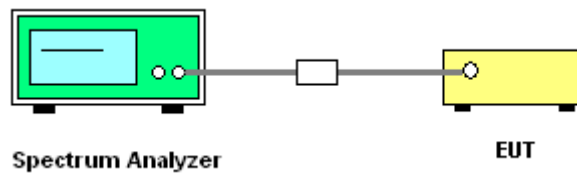

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

- (3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

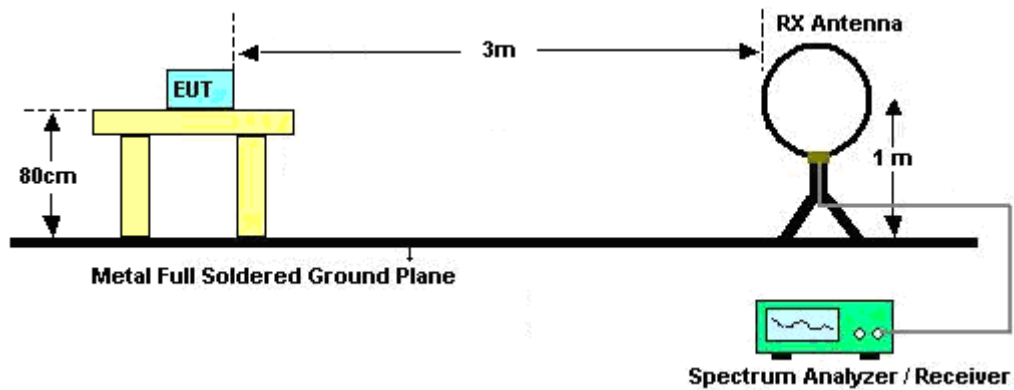


For radiated emissions from 30MHz to 1GHz

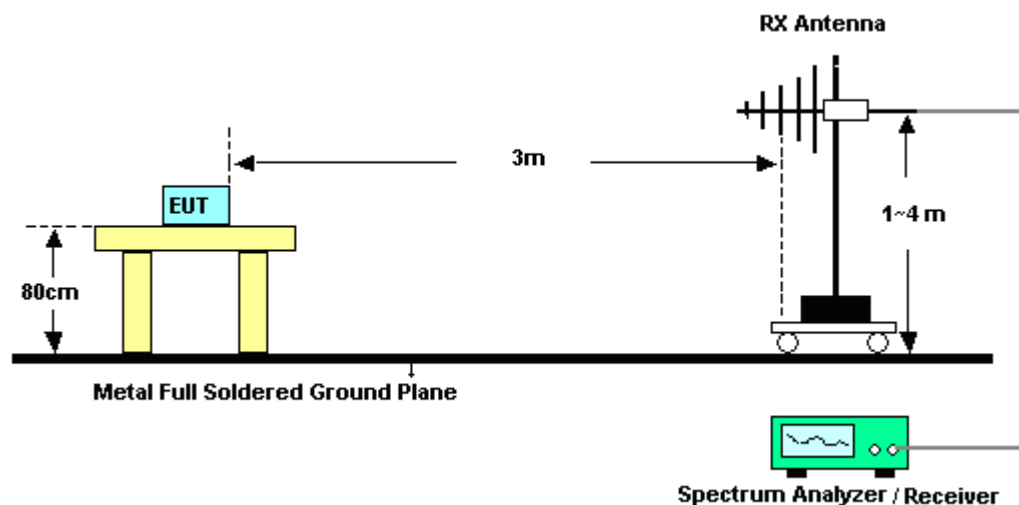

For radiated test from 1GHz to 18GHz

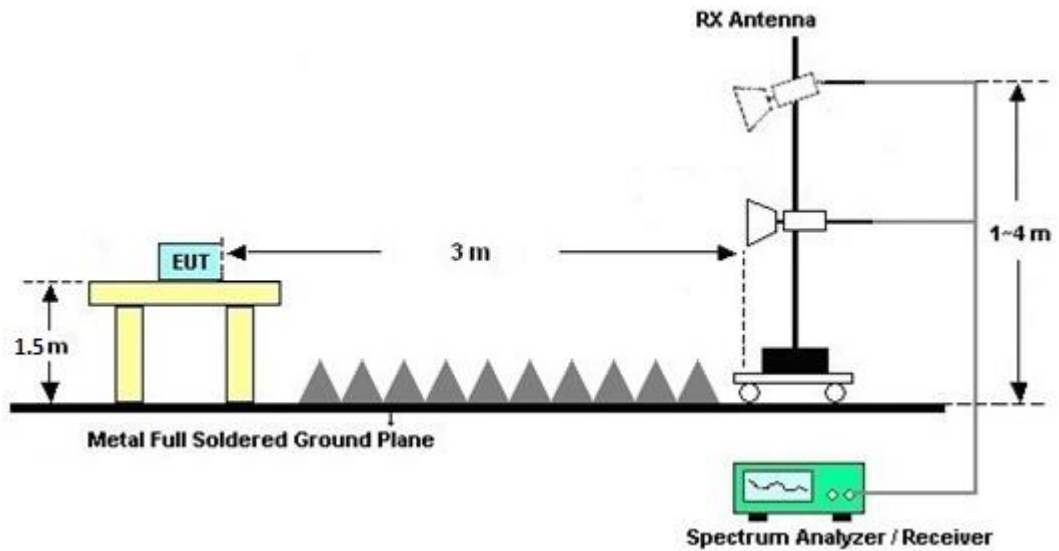

For radiated test above 18GHz

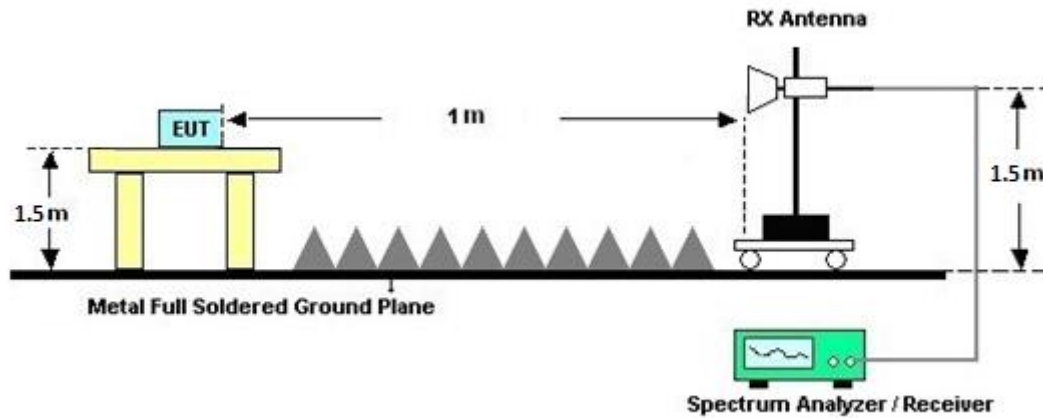



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

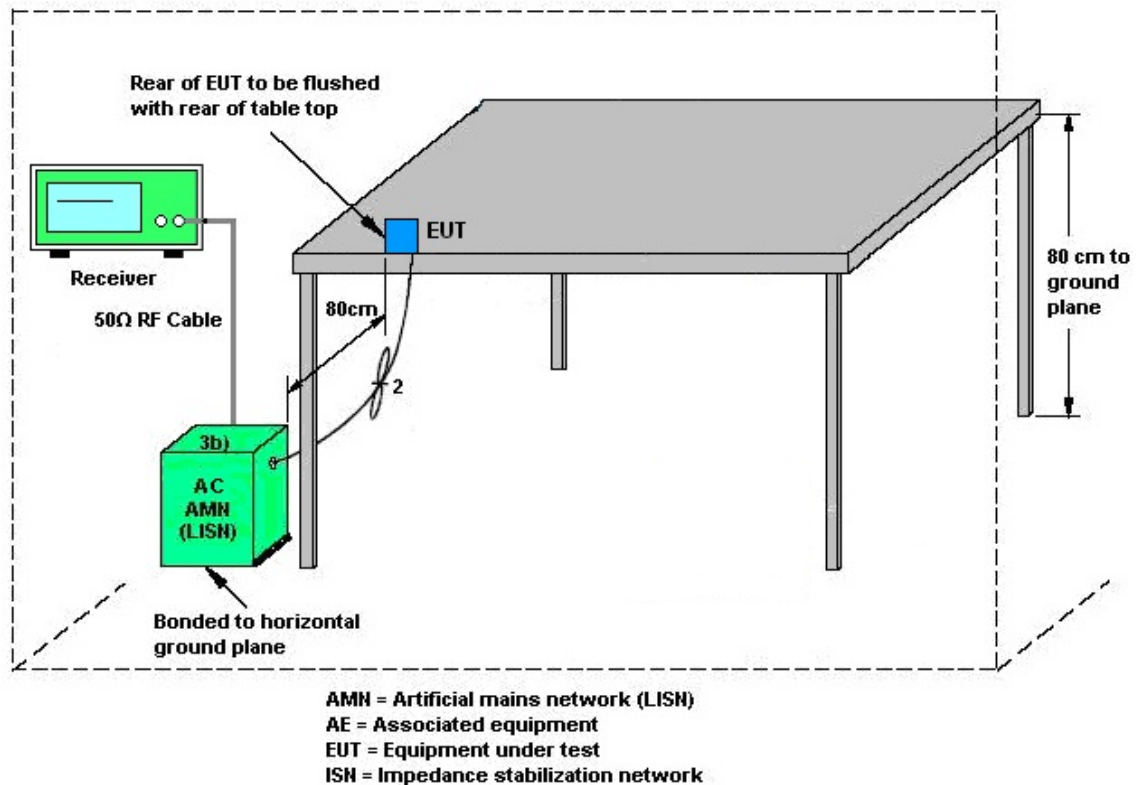

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 04, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 04, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Feb. 04, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Feb. 04, 2025	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Feb. 04, 2025	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Feb. 04, 2025	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Feb. 04, 2025	Sep. 22, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 20, 2024	Feb. 04, 2025	Feb. 19, 2025	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Feb. 07, 2025~Mar. 07, 2025	Aug. 28, 2025	Radiation (03CH23-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 27, 2024	Feb. 07, 2025~Mar. 07, 2025	Nov. 26, 2025	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 14, 2024	Feb. 07, 2025~Mar. 07, 2025	Jul. 13, 2025	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 27, 2024	Feb. 07, 2025~Mar. 07, 2025	Sep. 26, 2025	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18 EN	1GHz~18GHz	Jun. 20, 2024	Feb. 07, 2025~Mar. 07, 2025	Jun. 19, 2025	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Feb. 07, 2025~Mar. 07, 2025	Jun. 23, 2025	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Feb. 07, 2025~Mar. 07, 2025	Aug. 22, 2025	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 21, 2024	Feb. 07, 2025~Mar. 07, 2025	Aug. 20, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303B	TP211542	N/A	Oct. 21, 2024	Feb. 07, 2025~Mar. 07, 2025	Oct. 20, 2025	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 07, 2025~Mar. 07, 2025	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 07, 2025~Mar. 07, 2025	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 07, 2025~Mar. 07, 2025	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019122	RK-002348	N/A	N/A	Feb. 07, 2025~Mar. 07, 2025	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 26, 2024	Feb. 07, 2025~Mar. 07, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119/231122	N/A	Nov. 26, 2024	Feb. 07, 2025~Mar. 07, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jan. 22, 2025~Feb. 14, 2025	Oct. 31, 2025	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-23 010013 (NO:100)	10MHz~8GHz	Jul. 26, 2024	Jan. 22, 2025~Feb. 14, 2025	Jul. 25, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Aug. 14, 2024	Jan. 22, 2025~Feb. 14, 2025	Aug. 13, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jan. 22, 2025~Feb. 14, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Jan. 22, 2025~Feb. 14, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.60 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.40 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70 dB
--	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2025/01/22~2025/02/14	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	17.170	16.917	26.936	26.744	16.305	16.325	0.5	Pass
11a	6Mbps	2	157	5785	16.986	16.778	27.536	23.856	16.065	16.330	0.5	Pass
11a	6Mbps	2	165	5825	17.075	16.795	28.024	26.536	16.295	16.330	0.5	Pass
VHT20	MCS0	2	149	5745	18.365	18.154	29.208	30.112	17.530	17.585	0.5	Pass
VHT20	MCS0	2	157	5785	17.934	17.789	26.256	22.256	17.530	17.580	0.5	Pass
VHT20	MCS0	2	165	5825	18.793	18.140	31.280	30.232	16.925	17.570	0.5	Pass
VHT40	MCS0	2	151	5755	37.025	36.955	58.640	53.536	35.136	35.244	0.5	Pass
VHT40	MCS0	2	159	5795	36.506	36.584	41.808	44.144	35.145	35.316	0.5	Pass
VHT80	MCS0	2	155	5775	75.054	74.394	80.032	79.552	75.136	63.808	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	20.80	20.70	23.76	30.00		3.94		Pass
11a	6Mbps	2	157	5785	20.90	20.90	23.91	30.00		3.94		Pass
11a	6Mbps	2	165	5825	20.50	20.50	23.51	30.00		3.94		Pass
HT20	MCS0	2	149	5745	20.00	20.00	23.01	30.00		3.94		Pass
HT20	MCS0	2	157	5785	19.80	19.60	22.71	30.00		3.94		Pass
HT20	MCS0	2	165	5825	19.80	19.70	22.76	30.00		3.94		Pass
HT40	MCS0	2	151	5755	19.60	19.50	22.56	30.00		3.94		Pass
HT40	MCS0	2	159	5795	19.50	19.60	22.56	30.00		3.94		Pass
VHT20	MCS0	2	149	5745	20.10	20.10	23.11	30.00		3.94		Pass
VHT20	MCS0	2	157	5785	19.90	19.70	22.81	30.00		3.94		Pass
VHT20	MCS0	2	165	5825	19.90	19.80	22.86	30.00		3.94		Pass
VHT40	MCS0	2	151	5755	19.60	19.60	22.61	30.00		3.94		Pass
VHT40	MCS0	2	159	5795	19.60	19.70	22.66	30.00		3.94		Pass
VHT80	MCS0	2	155	5775	18.60	18.70	21.66	30.00		3.94		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.11	0.11	6.22	6.25	9.26	29.08		6.92		Pass
11a	6Mbps	2	157	5785	0.11	0.11	6.86	6.13	9.87	29.08		6.92		Pass
11a	6Mbps	2	165	5825	0.11	0.11	6.34	6.31	9.35	29.08		6.92		Pass
VHT20	MCS0	2	149	5745	0.11	0.11	5.43	5.19	8.44	29.08		6.92		Pass
VHT20	MCS0	2	157	5785	0.11	0.11	4.87	4.70	7.88	29.08		6.92		Pass
VHT20	MCS0	2	165	5825	0.11	0.11	5.31	5.06	8.32	29.08		6.92		Pass
VHT40	MCS0	2	151	5755	0.21	0.21	2.57	2.77	5.78	29.08		6.92		Pass
VHT40	MCS0	2	159	5795	0.21	0.21	2.21	2.40	5.41	29.08		6.92		Pass
VHT80	MCS0	2	155	5775	0.43	0.43	-1.74	-0.60	2.41	29.08		6.92		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	149	5745	Full	19.189	19.150	29.968	30.088	18.675	18.445	0.5	Pass
HE20	MCS0	2	157	5785	Full	19.110	19.036	23.168	22.504	17.965	18.930	0.5	Pass
HE20	MCS0	2	165	5825	Full	19.180	19.121	28.760	25.008	18.870	18.305	0.5	Pass
HE40	MCS0	2	151	5755	Full	38.050	38.036	51.872	48.272	36.522	35.145	0.5	Pass
HE40	MCS0	2	159	5795	Full	37.768	37.780	40.560	43.552	36.216	36.333	0.5	Pass
HE80	MCS0	2	155	5775	Full	76.907	76.228	80.224	79.872	75.136	63.792	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	20.20	20.20	23.21	30.00		3.94		Pass
HE20	MCS0	2	149	5745	26/0	20.20	19.90	23.06	30.00		3.94		Pass
HE20	MCS0	2	149	5745	106/53	20.00	19.70	22.86	30.00		3.94		Pass
HE20	MCS0	2	157	5785	Full	20.00	19.80	22.91	30.00		3.94		Pass
HE20	MCS0	2	165	5825	Full	20.00	19.90	22.96	30.00		3.94		Pass
HE20	MCS0	2	165	5825	26/8	19.30	19.90	22.62	30.00		3.94		Pass
HE20	MCS0	2	165	5825	52/40	19.50	19.90	22.71	30.00		3.94		Pass
HE20	MCS0	2	165	5825	106/54	19.50	19.70	22.61	30.00		3.94		Pass
HE40	MCS0	2	151	5755	Full	19.80	19.70	22.76	30.00		3.94		Pass
HE40	MCS0	2	159	5795	Full	19.70	19.80	22.76	30.00		3.94		Pass
HE80	MCS0	2	155	5775	Full	18.70	18.80	21.76	30.00		3.94		Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-3 MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	149	5745	Full	0.15	0.15	5.46	5.37	8.47	29.08		6.92		Pass
HE20	MCS0	2	149	5745	26/0	0.24	0.24	13.74	13.21	16.75	29.08		6.92		Pass
HE20	MCS0	2	149	5745	106/53	0.33	0.33	7.27	6.93	10.28	29.08		6.92		Pass
HE20	MCS0	2	157	5785	Full	0.15	0.15	5.01	4.74	8.02	29.08		6.92		Pass
HE20	MCS0	2	165	5825	Full	0.15	0.15	5.25	5.23	8.26	29.08		6.92		Pass
HE20	MCS0	2	165	5825	26/8	0.24	0.24	11.85	12.63	15.64	29.08		6.92		Pass
HE20	MCS0	2	165	5825	52/40	0.29	0.29	9.00	9.61	12.62	29.08		6.92		Pass
HE20	MCS0	2	165	5825	106/54	0.33	0.33	6.48	6.68	9.69	29.08		6.92		Pass
HE40	MCS0	2	151	5755	Full	0.45	0.45	2.76	2.60	5.77	29.08		6.92		Pass
HE40	MCS0	2	159	5795	Full	0.45	0.45	2.71	2.82	5.83	29.08		6.92		Pass
HE80	MCS0	2	155	5775	Full	0.47	0.47	-1.06	-0.08	2.93	29.08		6.92		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

**Test Result of 6dB and 26dB and 99% Occupied Bandwidth**


MIMO <Ant. 1+2>

<802.11a>

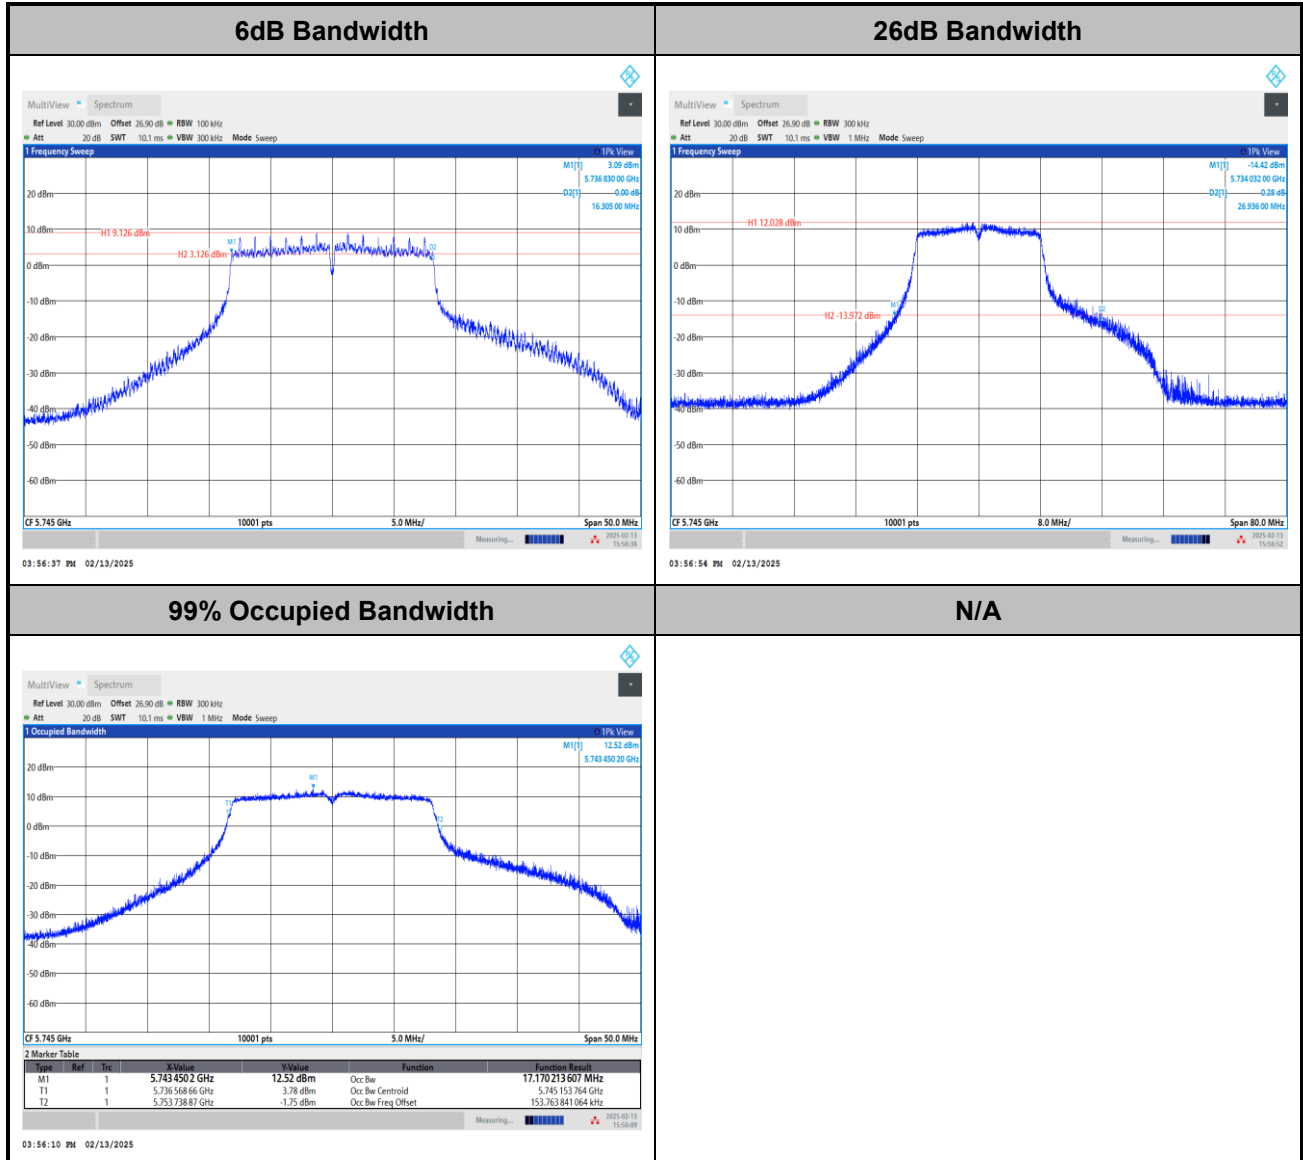




<802.11ac VHT20>

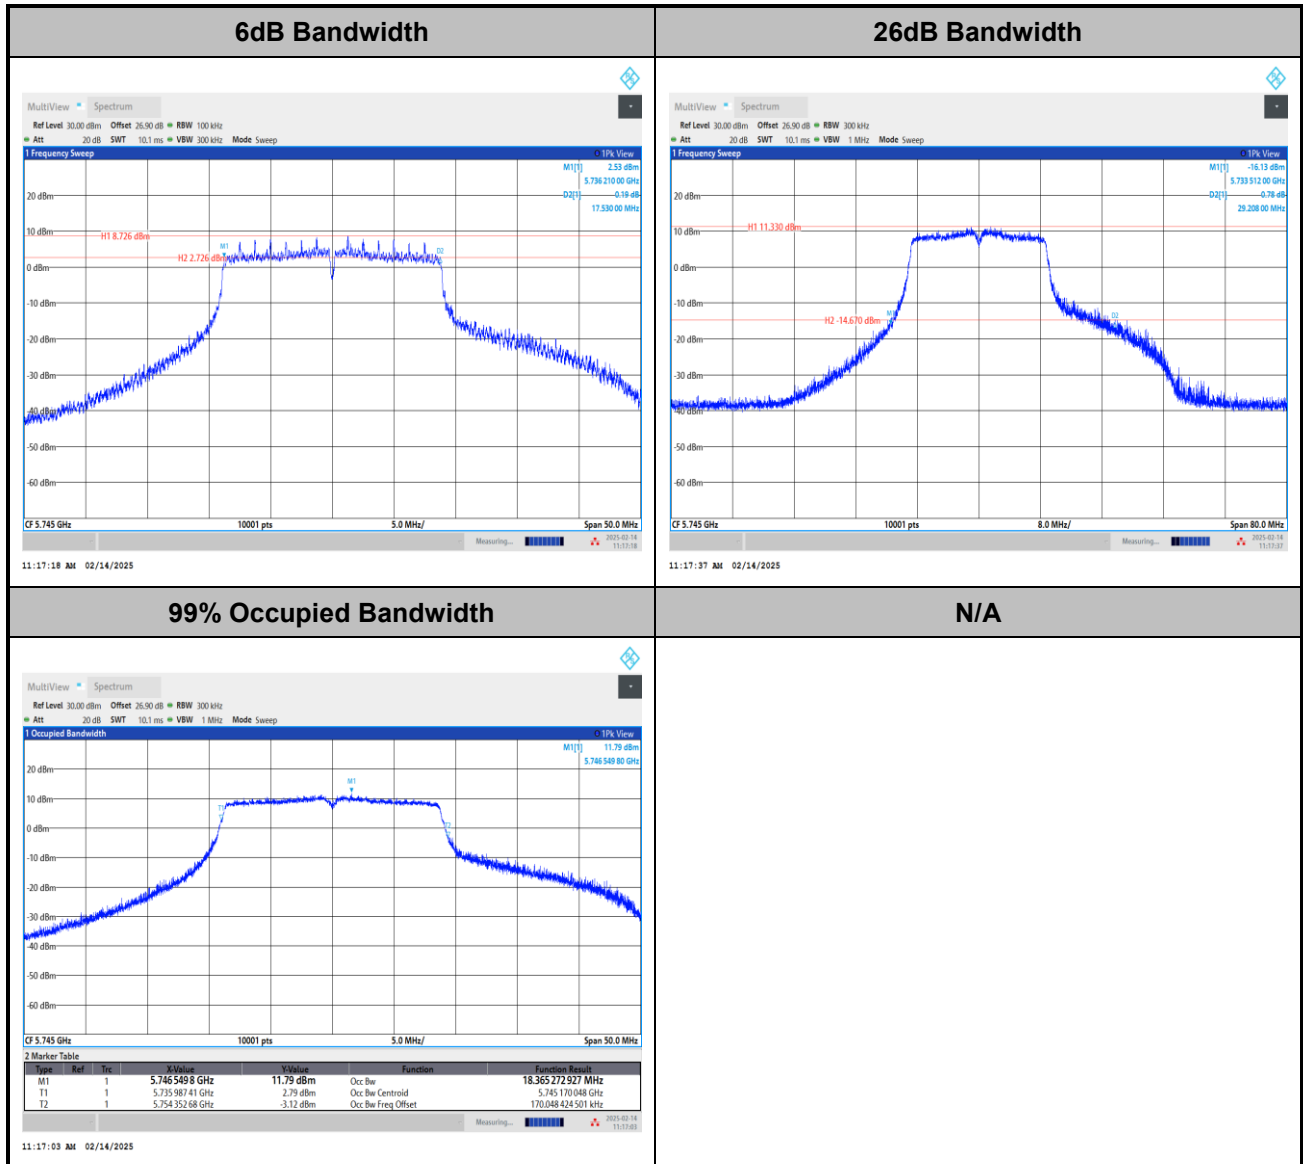




<802.11ac VHT40>


6dB Bandwidth

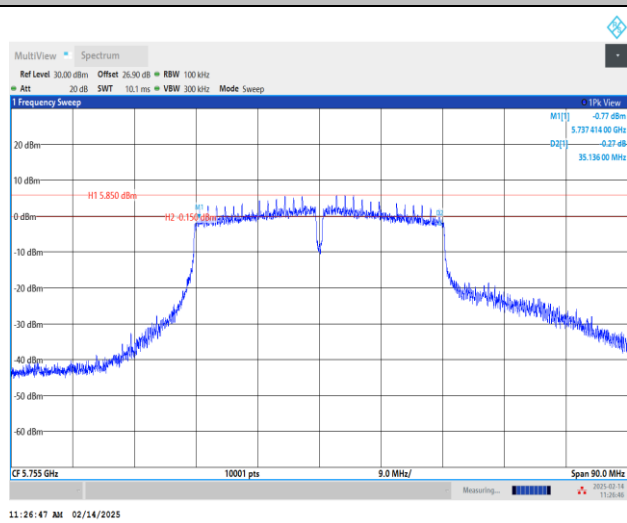

26dB Bandwidth

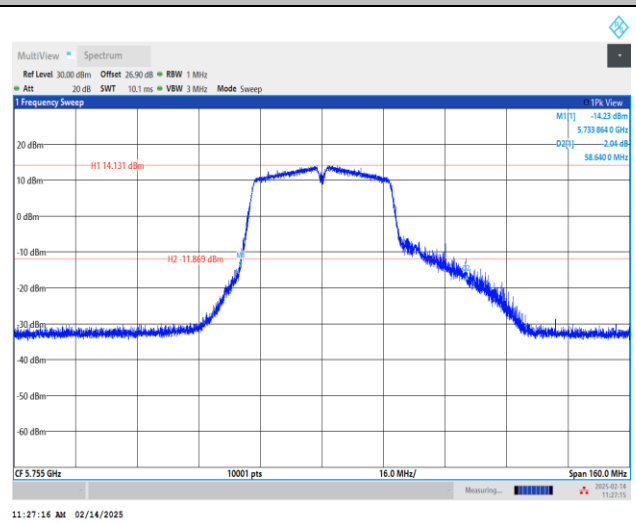

99% Occupied Bandwidth

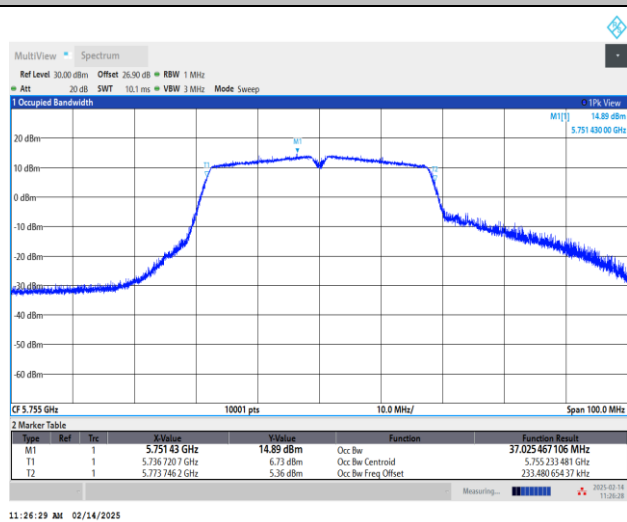


N/A




<802.11ac VHT80>

6dB Bandwidth

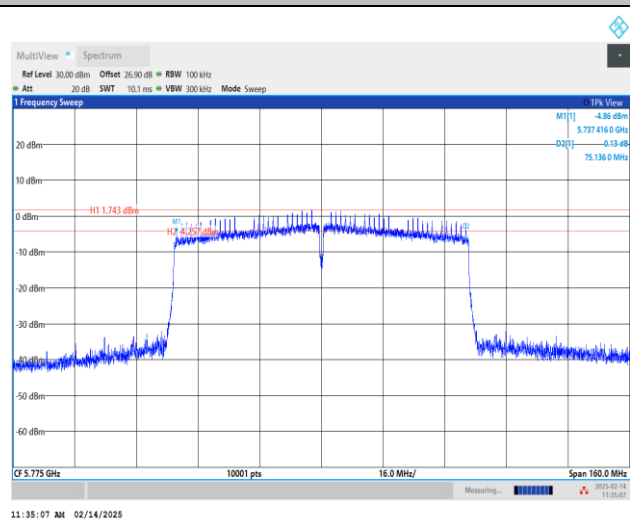


11:35:07 AM 02/14/2025

26dB Bandwidth

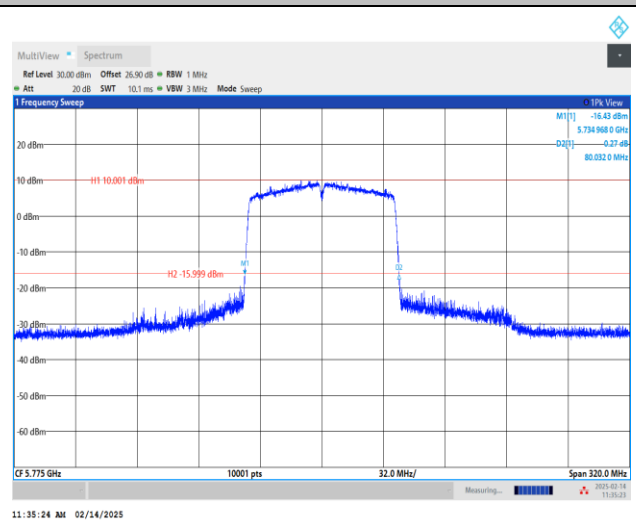

11:35:24 AM 02/14/2025

99% Occupied Bandwidth

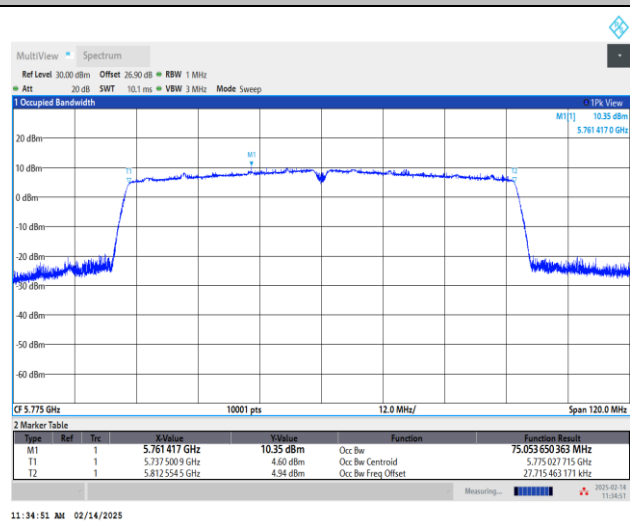


11:34:51 AM 02/14/2025

N/A




<802.11ax HE20>


6dB Bandwidth

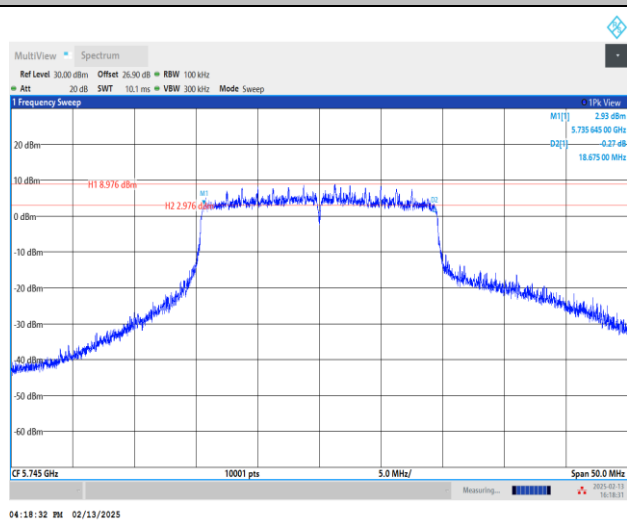

26dB Bandwidth

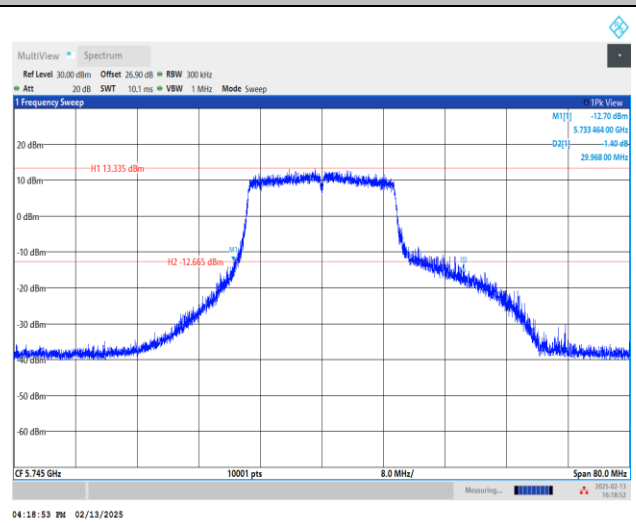

99% Occupied Bandwidth

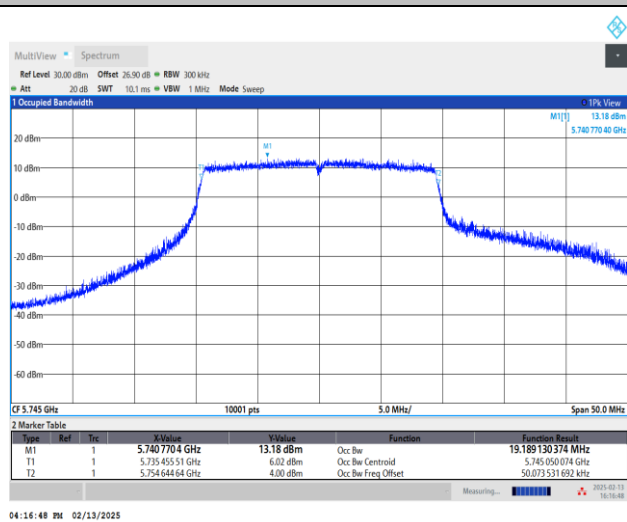


N/A




<802.11ax HE40>


6dB Bandwidth

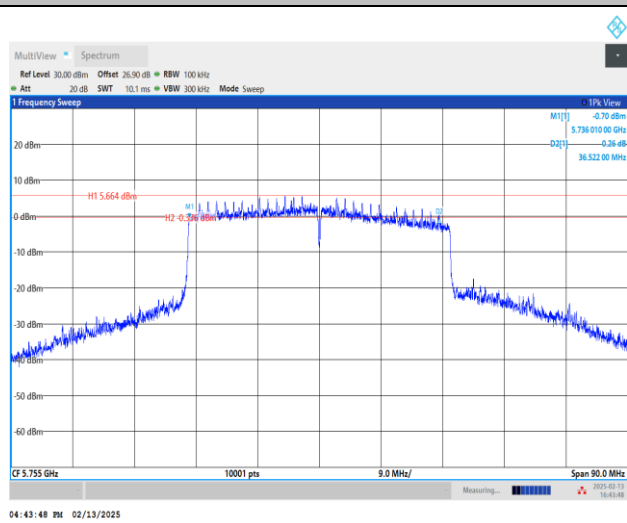

26dB Bandwidth

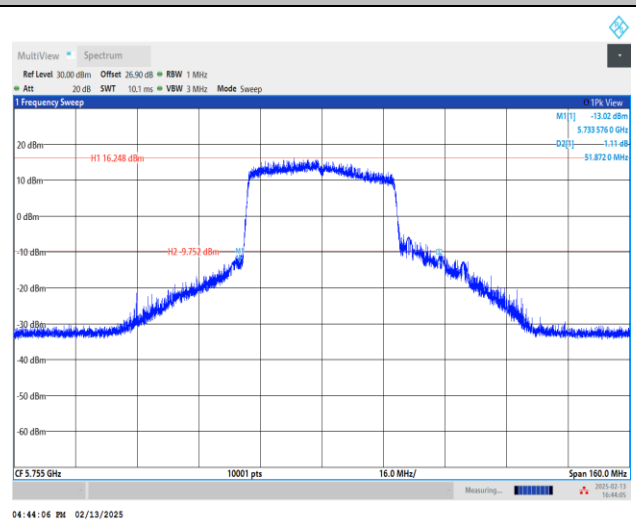

99% Occupied Bandwidth

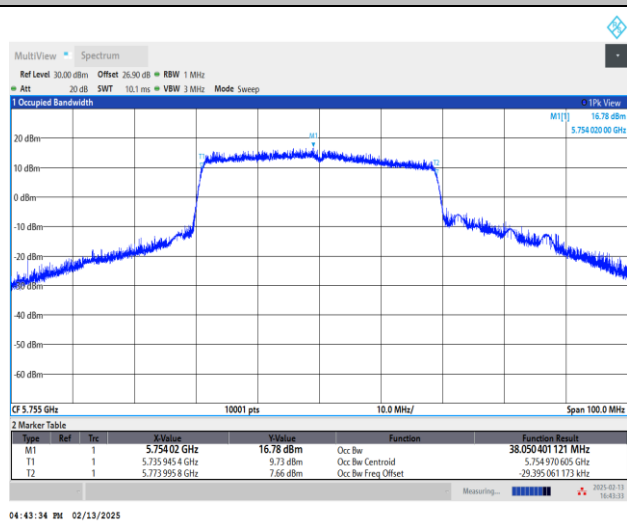


N/A




<802.11ax HE80>


6dB Bandwidth

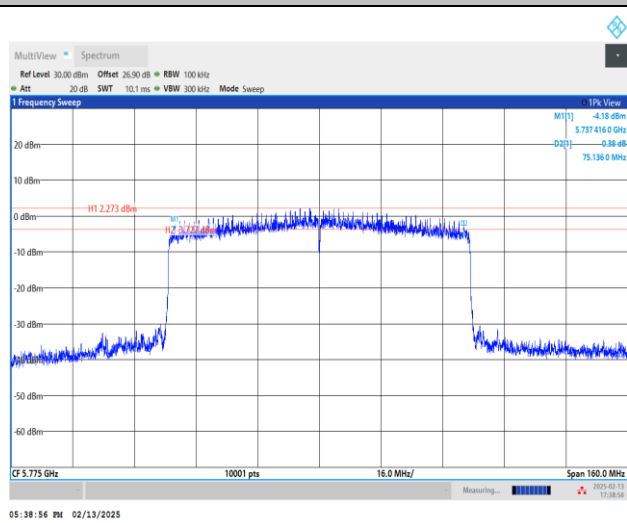

26dB Bandwidth

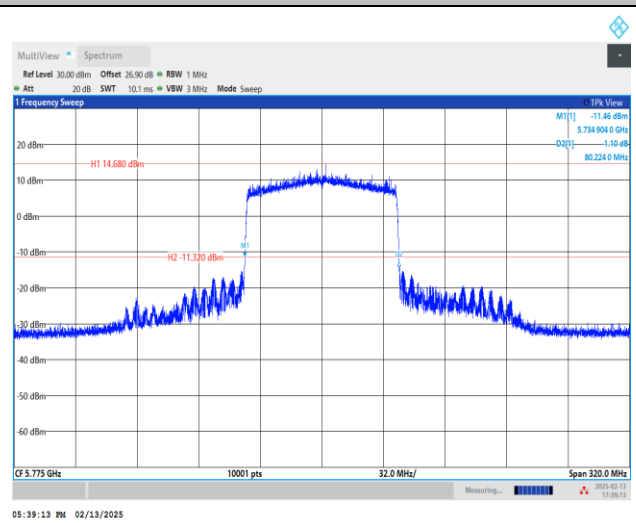


99% Occupied Bandwidth

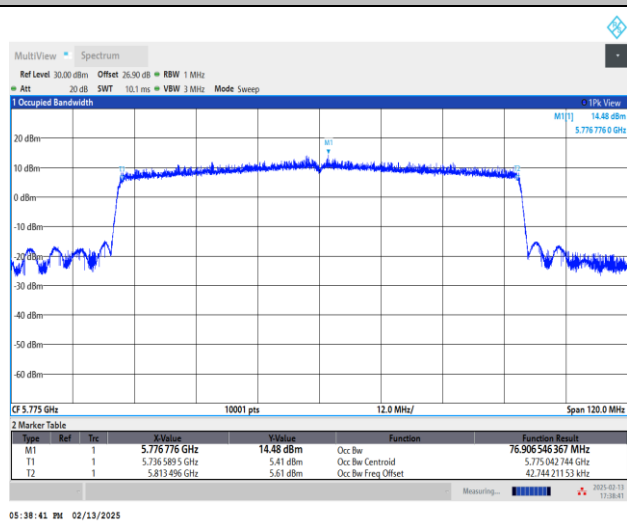


N/A

**Test Result of Power Spectral Density**

<802.11a>

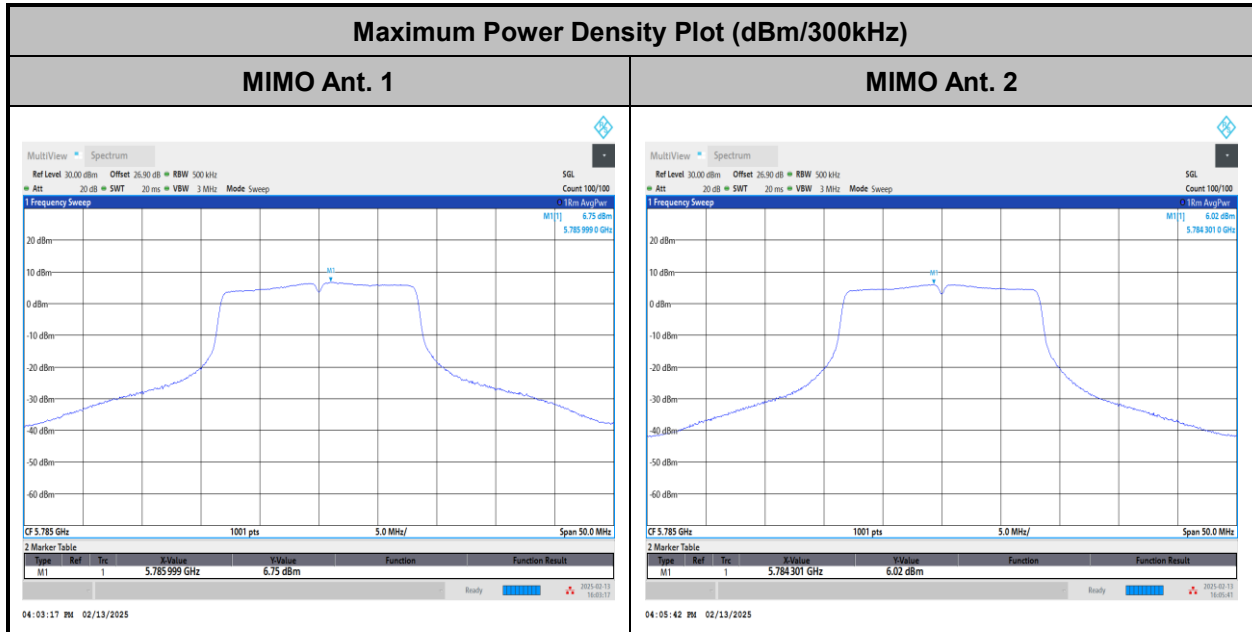


<802.11ac VHT20>

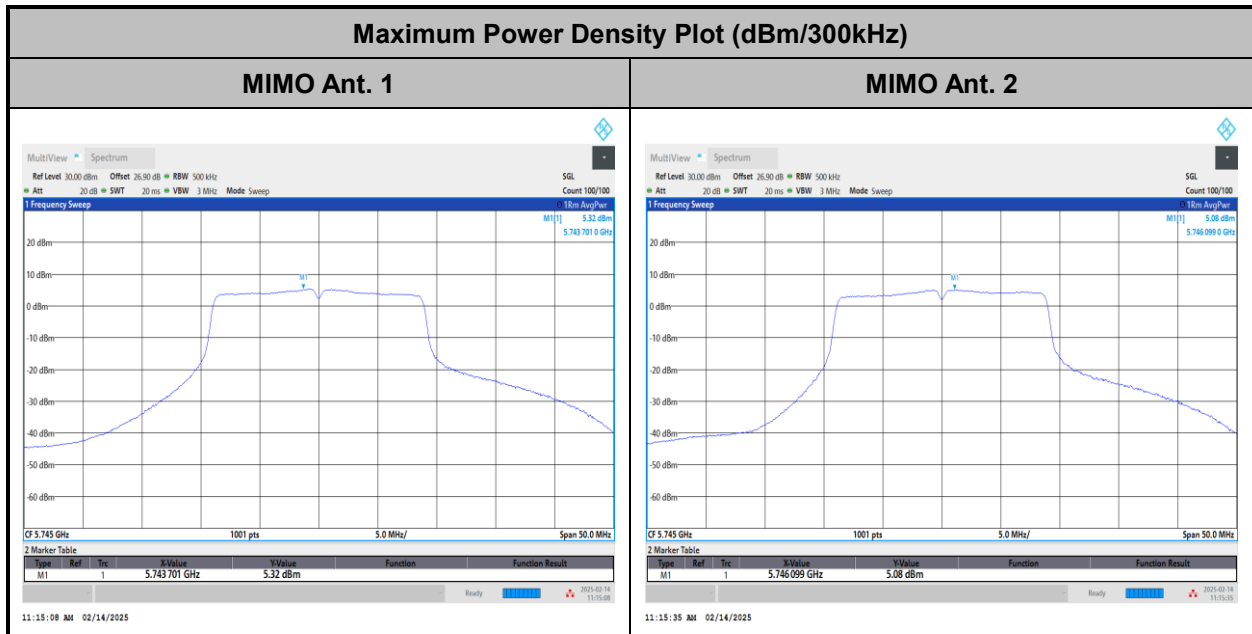




<802.11ac VHT40>

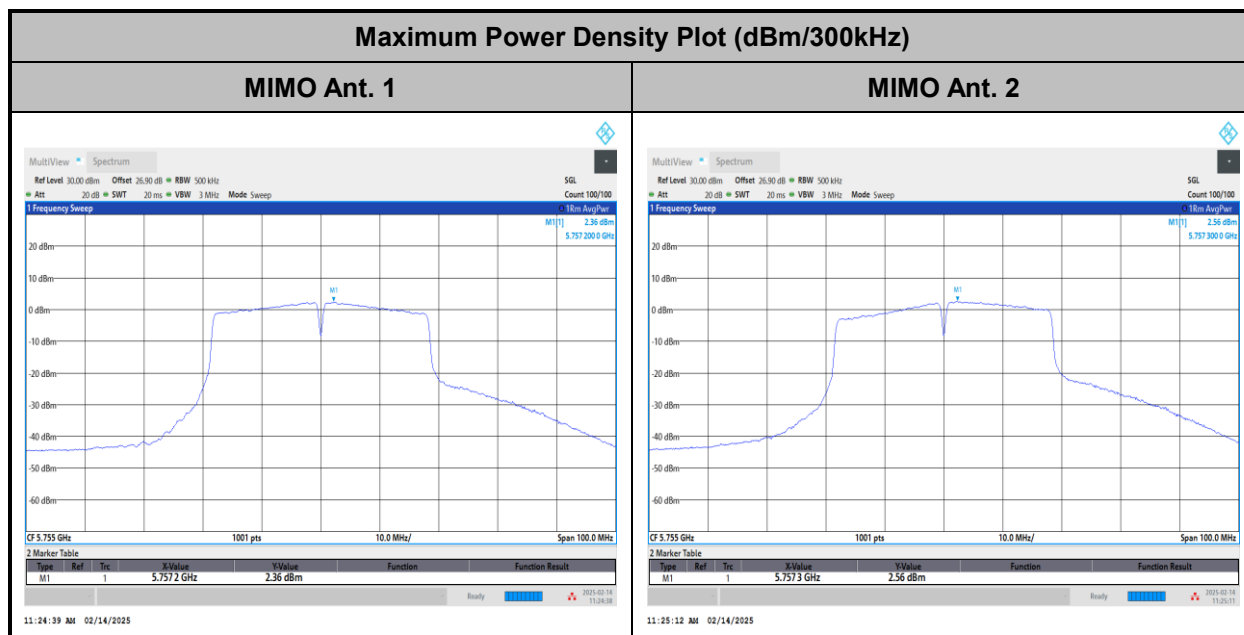


<802.11ac VHT80>

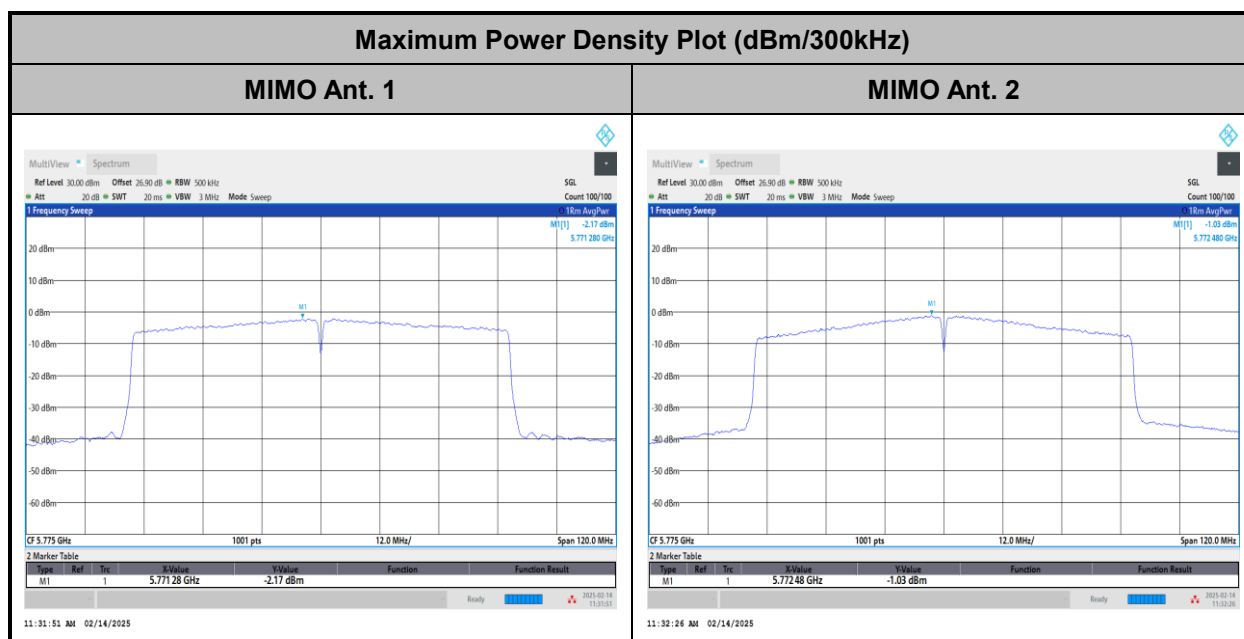




<802.11ax HE20>

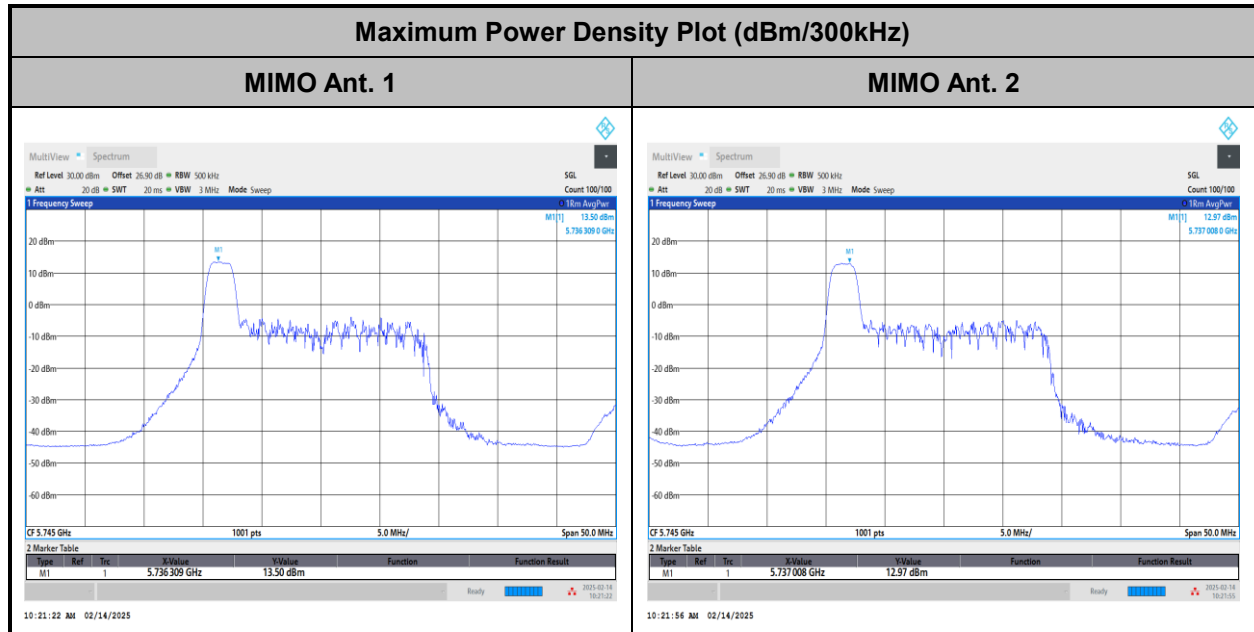


<802.11ax HE40>

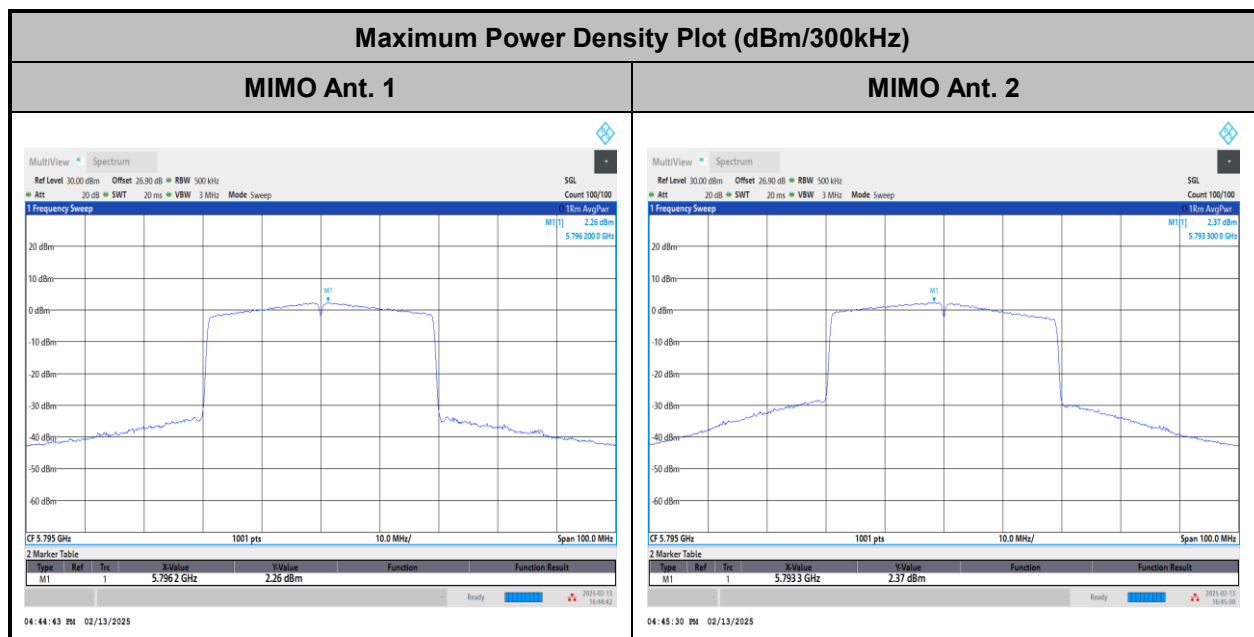



<802.11ax HE80>

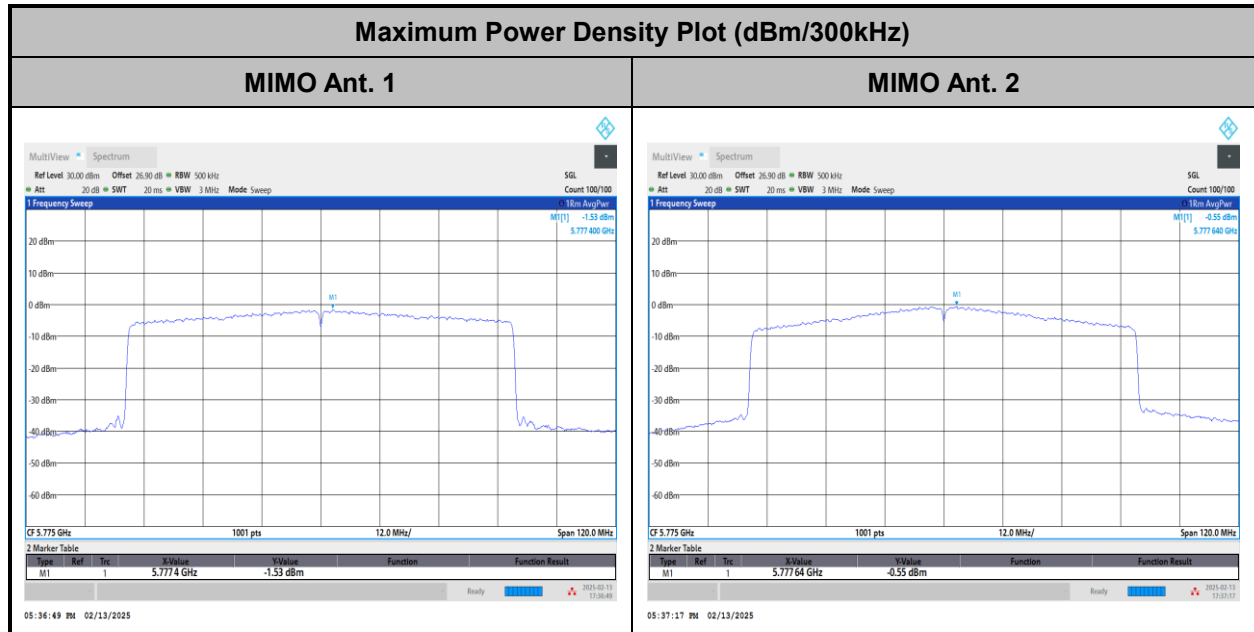




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	19.2~22.3°C
		Relative Humidity :	45.4~52.1%

EUT Information

Report NO : 400149-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

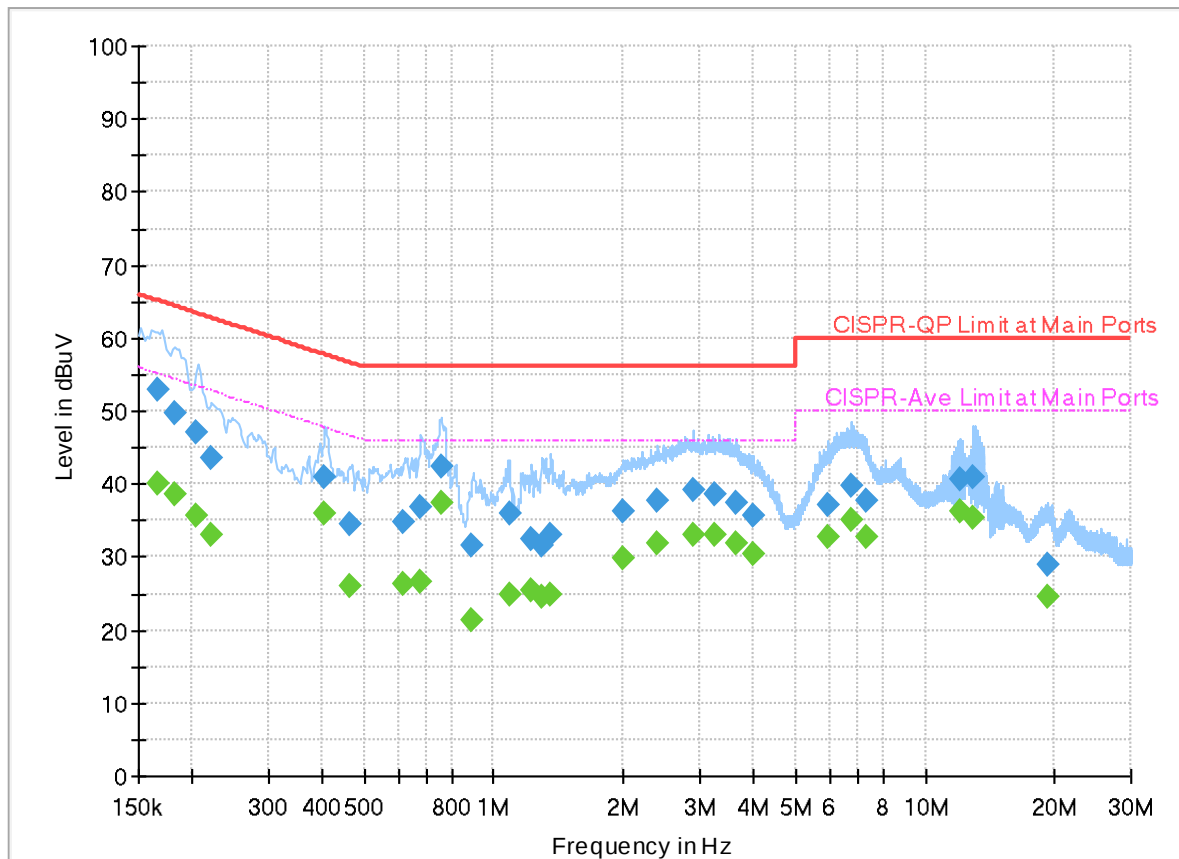

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.165750	---	40.16	55.17	15.01	L1	FLO	19.9
0.165750	53.03	---	65.17	12.14	L1	FLO	19.9
0.181500	---	38.55	54.42	15.87	L1	FLO	19.9
0.181500	49.68	---	64.42	14.74	L1	FLO	19.9
0.204720	---	35.70	53.42	17.72	L1	FLO	19.9
0.204720	47.14	---	63.42	16.28	L1	FLO	19.9
0.219750	---	33.01	52.83	19.82	L1	FLO	19.9
0.219750	43.43	---	62.83	19.40	L1	FLO	19.9
0.403890	---	36.07	47.77	11.70	L1	FLO	19.9
0.403890	41.00	---	57.77	16.77	L1	FLO	19.9
0.464010	---	25.95	46.62	20.67	L1	FLO	19.9
0.464010	34.47	---	56.62	22.15	L1	FLO	19.9
0.618720	---	26.20	46.00	19.80	L1	FLO	19.9
0.618720	34.68	---	56.00	21.32	L1	FLO	19.9
0.674250	---	26.47	46.00	19.53	L1	FLO	19.9
0.674250	36.86	---	56.00	19.14	L1	FLO	19.9
0.753720	---	37.36	46.00	8.64	L1	FLO	19.9
0.753720	42.38	---	56.00	13.62	L1	FLO	19.9
0.889530	---	21.33	46.00	24.67	L1	FLO	19.9

0.889530	31.55	---	56.00	24.45	L1	FLO	19.9
1.083390	---	24.90	46.00	21.10	L1	FLO	19.9
1.083390	35.89	---	56.00	20.11	L1	FLO	19.9
1.225500	---	25.55	46.00	20.45	L1	FLO	19.9
1.225500	32.36	---	56.00	23.64	L1	FLO	19.9
1.295250	---	24.51	46.00	21.49	L1	FLO	19.9
1.295250	31.56	---	56.00	24.44	L1	FLO	19.9
1.354650	---	24.83	46.00	21.17	L1	FLO	20.0
1.354650	32.99	---	56.00	23.01	L1	FLO	20.0
2.003730	---	29.81	46.00	16.19	L1	FLO	20.0
2.003730	36.17	---	56.00	19.83	L1	FLO	20.0
2.404230	---	31.83	46.00	14.17	L1	FLO	20.0
2.404230	37.59	---	56.00	18.41	L1	FLO	20.0
2.888970	---	32.97	46.00	13.03	L1	FLO	20.0
2.888970	39.24	---	56.00	16.76	L1	FLO	20.0
3.267600	---	33.14	46.00	12.86	L1	FLO	20.0
3.267600	38.63	---	56.00	17.37	L1	FLO	20.0
3.661800	---	31.93	46.00	14.07	L1	FLO	20.0
3.661800	37.52	---	56.00	18.48	L1	FLO	20.0
3.998760	---	30.32	46.00	15.68	L1	FLO	20.0
3.998760	35.61	---	56.00	20.39	L1	FLO	20.0
5.961750	---	32.84	50.00	17.16	L1	FLO	20.0
5.961750	37.28	---	60.00	22.72	L1	FLO	20.0
6.719730	---	35.08	50.00	14.92	L1	FLO	20.1
6.719730	39.71	---	60.00	20.29	L1	FLO	20.1
7.308420	---	32.84	50.00	17.16	L1	FLO	20.1
7.308420	37.86	---	60.00	22.14	L1	FLO	20.1
12.040080	---	36.28	50.00	13.72	L1	FLO	20.1
12.040080	40.78	---	60.00	19.22	L1	FLO	20.1
12.968970	---	35.52	50.00	14.48	L1	FLO	20.1
12.968970	40.95	---	60.00	19.05	L1	FLO	20.1
19.184640	---	24.63	50.00	25.37	L1	FLO	20.1
19.184640	28.85	---	60.00	31.15	L1	FLO	20.1

EUT Information

Report NO : 4O0149-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

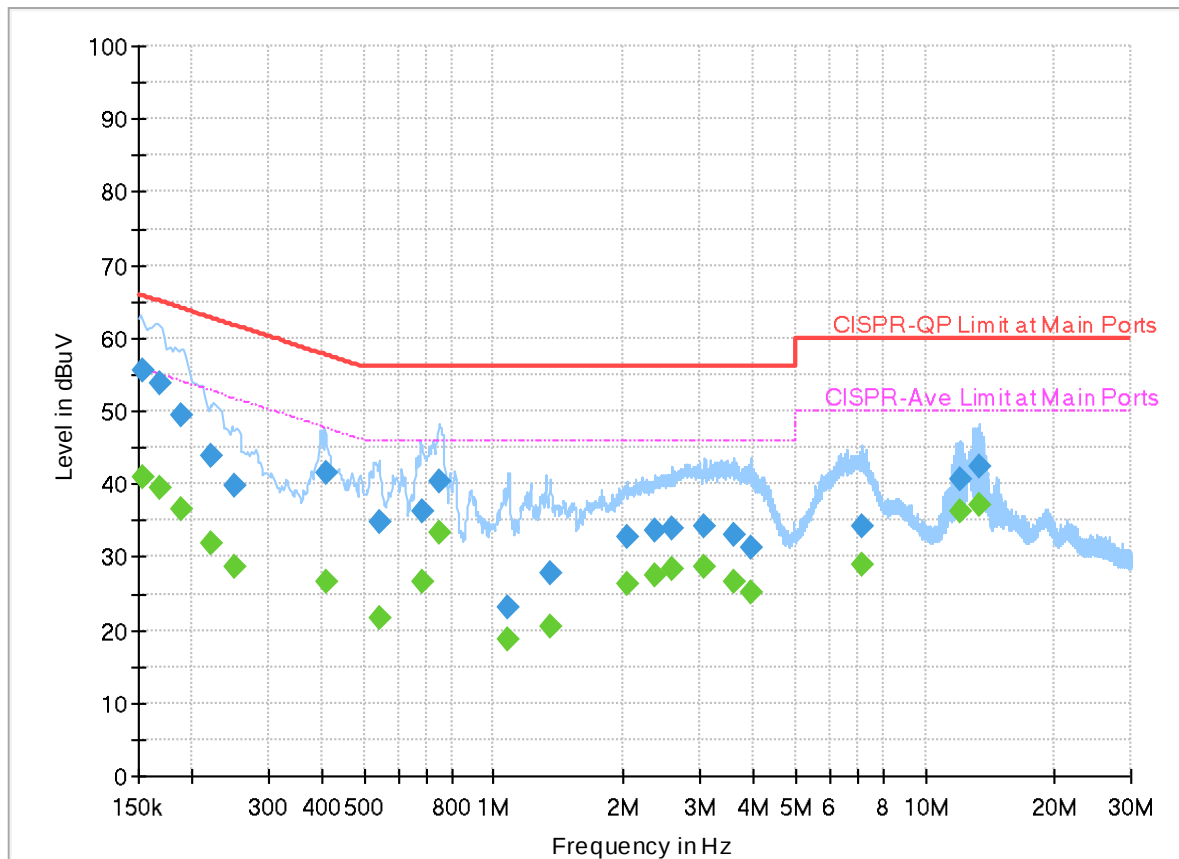

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152633	---	40.82	55.86	15.04	N	FLO	20.0
0.152633	55.53	---	65.86	10.33	N	FLO	20.0
0.167820	---	39.55	55.07	15.52	N	FLO	19.9
0.167820	53.84	---	65.07	11.23	N	FLO	19.9
0.189330	---	36.51	54.07	17.56	N	FLO	19.9
0.189330	49.50	---	64.07	14.57	N	FLO	19.9
0.222000	---	31.74	52.74	21.00	N	FLO	19.9
0.222000	43.79	---	62.74	18.95	N	FLO	19.9
0.251610	---	28.54	51.70	23.16	N	FLO	19.9
0.251610	39.83	---	61.70	21.87	N	FLO	19.9
0.409290	---	26.53	47.66	21.13	N	FLO	19.9
0.409290	41.59	---	57.66	16.07	N	FLO	19.9
0.546000	---	21.76	46.00	24.24	N	FLO	19.9
0.546000	34.67	---	56.00	21.33	N	FLO	19.9
0.681630	---	26.58	46.00	19.42	N	FLO	19.9
0.681630	36.31	---	56.00	19.69	N	FLO	19.9
0.746520	---	33.26	46.00	12.74	N	FLO	19.9
0.746520	40.46	---	56.00	15.54	N	FLO	19.9
1.080240	---	18.76	46.00	27.24	N	FLO	20.0

1.080240	23.23	---	56.00	32.77	N	FLO	20.0
1.352670	---	20.58	46.00	25.42	N	FLO	20.0
1.352670	27.92	---	56.00	28.08	N	FLO	20.0
2.037750	---	26.30	46.00	19.70	N	FLO	20.0
2.037750	32.62	---	56.00	23.38	N	FLO	20.0
2.372010	---	27.55	46.00	18.45	N	FLO	20.0
2.372010	33.49	---	56.00	22.51	N	FLO	20.0
2.593500	---	28.47	46.00	17.53	N	FLO	20.0
2.593500	33.90	---	56.00	22.10	N	FLO	20.0
3.084000	---	28.66	46.00	17.34	N	FLO	20.0
3.084000	34.22	---	56.00	21.78	N	FLO	20.0
3.601140	---	26.70	46.00	19.30	N	FLO	20.0
3.601140	33.06	---	56.00	22.94	N	FLO	20.0
3.936750	---	25.12	46.00	20.88	N	FLO	20.0
3.936750	31.28	---	56.00	24.72	N	FLO	20.0
7.139040	---	28.84	50.00	21.16	N	FLO	20.1
7.139040	34.24	---	60.00	25.76	N	FLO	20.1
12.039000	---	36.36	50.00	13.64	N	FLO	20.1
12.039000	40.59	---	60.00	19.41	N	FLO	20.1
13.346160	---	37.19	50.00	12.81	N	FLO	20.1
13.346160	42.42	---	60.00	17.58	N	FLO	20.1



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li, Karl Hou, Lucifer Jiang	Relative Humidity(%):	50 ~ 57 %
		Temperature(°C):	20.7 ~ 21.5 °C

Remark: For Radiated Spurious Emission Test Data, Ant. 1 means Chain 0 (Main) and Ant. 2 means Chain 1 (Aux.).

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 46	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	-
Mode 47	U-NII-3	5.725-5.85	1+2	802.11a	157	5785	6Mbps	-	-
Mode 48	U-NII-3	5.725-5.85	1+2	802.11a	165	5825	6Mbps	-	-
Mode 49	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 50	U-NII-3	5.725-5.85	1+2	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 51	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 52	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	26/0	-
Mode 53	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	106/53	-
Mode 54	U-NII-3	5.725-5.85	1+2	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 55	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 56	U-NII-3	5.725-5.85	1+2	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 57	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	LF
Mode 58	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	SHF






C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
46	802.11a	149	5648.58	55.62	68.20	-12.58	H	Peak	Pass	-	Band Edge
	802.11a	149	11490.00	48.95	54.00	-5.05	V	Avg.	Pass	-	Harmonic
47	802.11a	157	5927.56	54.20	68.20	-14.00	H	Peak	Pass	-	Band Edge
	802.11a	157	11570.00	48.73	54.00	-5.27	V	Avg.	Pass	-	Harmonic
48	802.11a	165	5927.50	55.45	68.20	-12.75	V	Peak	Pass	-	Band Edge
	802.11a	165	11650.00	47.06	54.00	-6.94	V	Avg.	Pass	-	Harmonic
49	802.11ax HE20	149	5640.02	53.65	68.20	-14.55	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	149	11490.00	48.28	54.00	-5.72	V	Avg.	Pass	Full RU	Harmonic
50	802.11ax HE20	157	5928.22	54.94	68.20	-13.26	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	157	11570.00	47.26	54.00	-6.74	V	Avg.	Pass	Full RU	Harmonic
51	802.11ax HE20	165	5947.00	56.78	68.20	-11.42	V	Peak	Pass	Full RU	Band Edge






Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
51	802.11ax HE20	165	11650.00	47.00	54.00	-7.00	V	Avg.	Pass	Full RU	Harmonic
52	802.11ax HE20	149	5626.68	53.06	68.20	-15.14	V	Peak	Pass	26/0	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	26/0	Harmonic
53	802.11ax HE20	149	5647.85	54.00	68.20	-14.20	V	Peak	Pass	106/53	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	106/53	Harmonic
54	802.11ax HE40	151	5649.14	56.69	68.20	-11.51	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	151	11510.00	42.28	54.00	-11.72	V	Avg.	Pass	Full RU	Harmonic
55	802.11ax HE40	159	5927.37	54.44	68.20	-13.76	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	159	11590.00	41.67	54.00	-12.33	H	Avg.	Pass	Full RU	Harmonic
56	802.11ax HE80	155	5640.43	58.73	68.20	-9.47	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE80	155	11550.00	41.72	54.00	-12.28	V	Avg.	Pass	Full RU	Harmonic
57	LF	149	33.88	33.45	40.00	-6.55	V	Peak	Pass	-	LF
58	SHF	149	39601.86	38.75	54.00	-15.25	V	Avg.	Pass	-	SHF

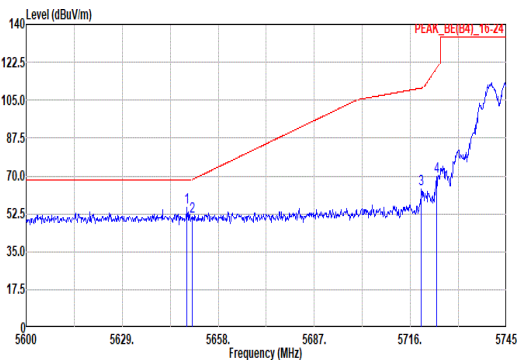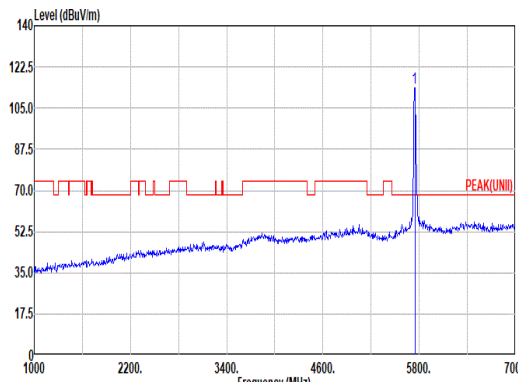
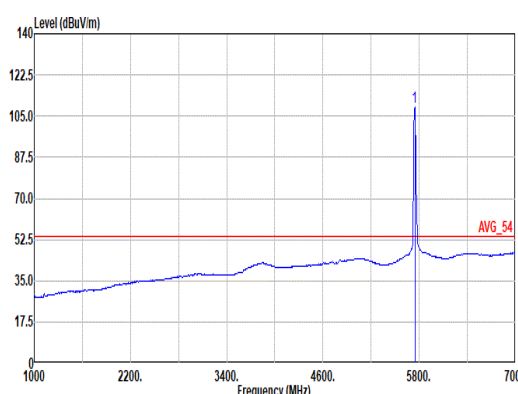


	46																																																																																																																																										
Mode	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.58</td><td>55.62</td><td>68.20</td><td>-12.58</td><td>41.50</td><td>33.49</td><td>11.18</td><td>34.45</td><td>3.90</td><td>391</td><td>115</td><td>PEAK</td></tr><tr><td>2</td><td>5658.17</td><td>51.48</td><td>68.33</td><td>-16.85</td><td>37.34</td><td>33.58</td><td>11.18</td><td>34.45</td><td>3.91</td><td>391</td><td>115</td><td>PEAK</td></tr><tr><td>3</td><td>5719.34</td><td>63.69</td><td>110.61</td><td>-46.92</td><td>49.19</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>391</td><td>115</td><td>PEAK</td></tr><tr><td>4</td><td>5723.98</td><td>69.88</td><td>119.86</td><td>-49.98</td><td>55.37</td><td>33.85</td><td>11.20</td><td>34.45</td><td>3.91</td><td>391</td><td>115</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.58	55.62	68.20	-12.58	41.50	33.49	11.18	34.45	3.90	391	115	PEAK	2	5658.17	51.48	68.33	-16.85	37.34	33.58	11.18	34.45	3.91	391	115	PEAK	3	5719.34	63.69	110.61	-46.92	49.19	33.84	11.20	34.45	3.91	391	115	PEAK	4	5723.98	69.88	119.86	-49.98	55.37	33.85	11.20	34.45	3.91	391	115	PEAK	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>113.43</td><td>-----</td><td>-----</td><td>98.86</td><td>33.90</td><td>11.21</td><td>34.46</td><td>3.92</td><td>391</td><td>115</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	113.43	-----	-----	98.86	33.90	11.21	34.46	3.92	391	115	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5648.58	55.62	68.20	-12.58	41.50	33.49	11.18	34.45	3.90	391	115	PEAK																																																																																																																															
2	5658.17	51.48	68.33	-16.85	37.34	33.58	11.18	34.45	3.91	391	115	PEAK																																																																																																																															
3	5719.34	63.69	110.61	-46.92	49.19	33.84	11.20	34.45	3.91	391	115	PEAK																																																																																																																															
4	5723.98	69.88	119.86	-49.98	55.37	33.85	11.20	34.45	3.91	391	115	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	113.43	-----	-----	98.86	33.90	11.21	34.46	3.92	391	115	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>108.73</td><td>-----</td><td>-----</td><td>94.17</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>391</td><td>115</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	108.73	-----	-----	94.17	33.89	11.21	34.45	3.91	391	115	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	108.73	-----	-----	94.17	33.89	11.21	34.45	3.91	391	115	AVERAGE																																																																																																																															

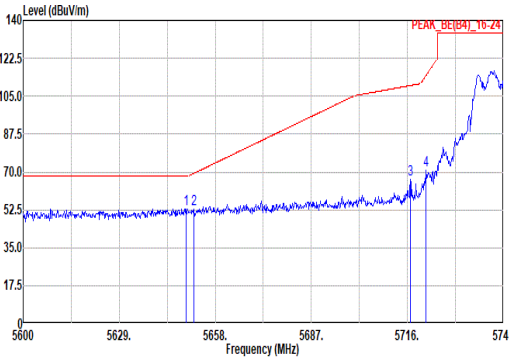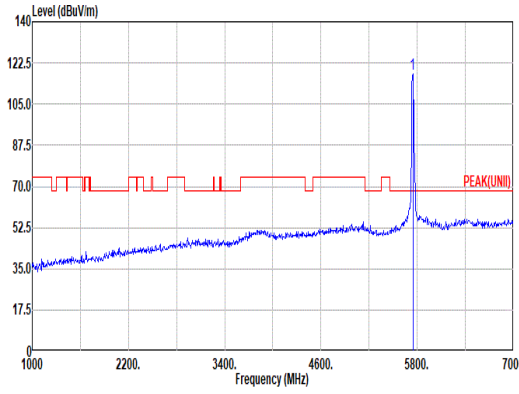
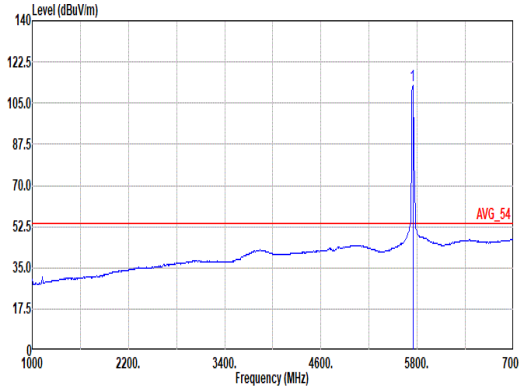


Mode	46																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 12 3 4 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.16</td><td>52.94</td><td>68.20</td><td>-15.26</td><td>38.82</td><td>33.49</td><td>11.18</td><td>34.45</td><td>3.90</td><td>265</td><td>222</td><td>PEAK</td></tr><tr><td>2</td><td>5651.48</td><td>52.94</td><td>69.30</td><td>-16.36</td><td>38.79</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>265</td><td>222</td><td>PEAK</td></tr><tr><td>3</td><td>5716.87</td><td>66.37</td><td>109.92</td><td>-43.55</td><td>51.88</td><td>33.83</td><td>11.20</td><td>34.45</td><td>3.91</td><td>265</td><td>222</td><td>PEAK</td></tr><tr><td>4</td><td>5721.66</td><td>70.55</td><td>114.57</td><td>-44.02</td><td>56.05</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>265</td><td>222</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.16	52.94	68.20	-15.26	38.82	33.49	11.18	34.45	3.90	265	222	PEAK	2	5651.48	52.94	69.30	-16.36	38.79	33.51	11.18	34.45	3.91	265	222	PEAK	3	5716.87	66.37	109.92	-43.55	51.88	33.83	11.20	34.45	3.91	265	222	PEAK	4	5721.66	70.55	114.57	-44.02	56.05	33.84	11.20	34.45	3.91	265	222	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNI) Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>117.73</td><td>-----</td><td>-----</td><td>103.17</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>265</td><td>222</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	117.73	-----	-----	103.17	33.89	11.21	34.45	3.91	265	222	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5649.16	52.94	68.20	-15.26	38.82	33.49	11.18	34.45	3.90	265	222	PEAK																																																																																																																															
2	5651.48	52.94	69.30	-16.36	38.79	33.51	11.18	34.45	3.91	265	222	PEAK																																																																																																																															
3	5716.87	66.37	109.92	-43.55	51.88	33.83	11.20	34.45	3.91	265	222	PEAK																																																																																																																															
4	5721.66	70.55	114.57	-44.02	56.05	33.84	11.20	34.45	3.91	265	222	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	117.73	-----	-----	103.17	33.89	11.21	34.45	3.91	265	222	PEAK																																																																																																																															
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>112.37</td><td>-----</td><td>-----</td><td>97.81</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>265</td><td>222</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	112.37	-----	-----	97.81	33.89	11.21	34.45	3.91	265	222	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	112.37	-----	-----	97.81	33.89	11.21	34.45	3.91	265	222	AVERAGE																																																																																																																															


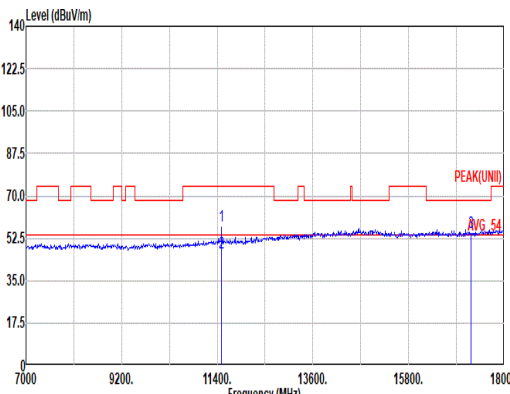
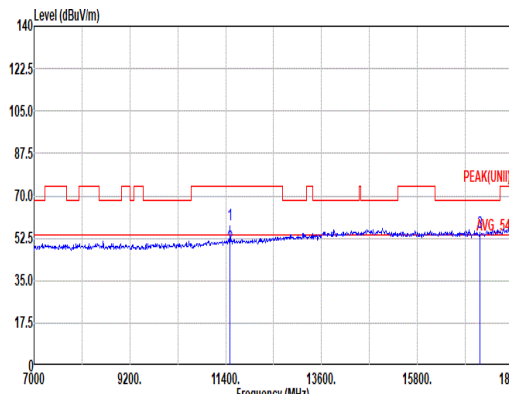


Mode	46																																																																																																																																																																				
	Harmonic																																																																																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																																				
ANT	1+2																																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																																														
Peak Avg																																																																																																																																																																					
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>40.90</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>335</td><td>262</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>46.56</td><td>54.00</td><td>-7.44</td><td>30.05</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>335</td><td>262</td><td>Average</td></tr><tr><td>3</td><td>17235.00</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>38.90</td><td>40.02</td><td>19.23</td><td>46.36</td><td>2.99</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	57.41	74.00	-16.59	40.90	38.70	15.70	40.15	2.26	335	262	PEAK	2	11490.00	46.56	54.00	-7.44	30.05	38.70	15.70	40.15	2.26	335	262	Average	3	17235.00	54.78	68.20	-13.42	38.90	40.02	19.23	46.36	2.99	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>57.87</td><td>74.00</td><td>-16.13</td><td>41.36</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>269</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>48.95</td><td>54.00</td><td>-5.05</td><td>32.44</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>269</td><td>250</td><td>Average</td></tr><tr><td>3</td><td>17235.00</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>38.84</td><td>40.06</td><td>19.25</td><td>46.37</td><td>3.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	57.87	74.00	-16.13	41.36	38.70	15.70	40.15	2.26	269	250	PEAK	2	11490.00	48.95	54.00	-5.05	32.44	38.70	15.70	40.15	2.26	269	250	Average	3	17235.00	54.78	68.20	-13.42	38.84	40.06	19.25	46.37	3.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	11490.00	57.41	74.00	-16.59	40.90	38.70	15.70	40.15	2.26	335	262	PEAK																																																																																																																																																									
2	11490.00	46.56	54.00	-7.44	30.05	38.70	15.70	40.15	2.26	335	262	Average																																																																																																																																																									
3	17235.00	54.78	68.20	-13.42	38.90	40.02	19.23	46.36	2.99	--	--	PEAK																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	11490.00	57.87	74.00	-16.13	41.36	38.70	15.70	40.15	2.26	269	250	PEAK																																																																																																																																																									
2	11490.00	48.95	54.00	-5.05	32.44	38.70	15.70	40.15	2.26	269	250	Average																																																																																																																																																									
3	17235.00	54.78	68.20	-13.42	38.84	40.06	19.25	46.37	3.00	--	--	PEAK																																																																																																																																																									

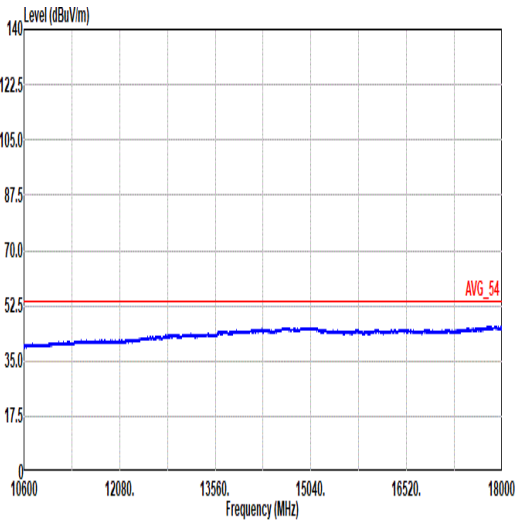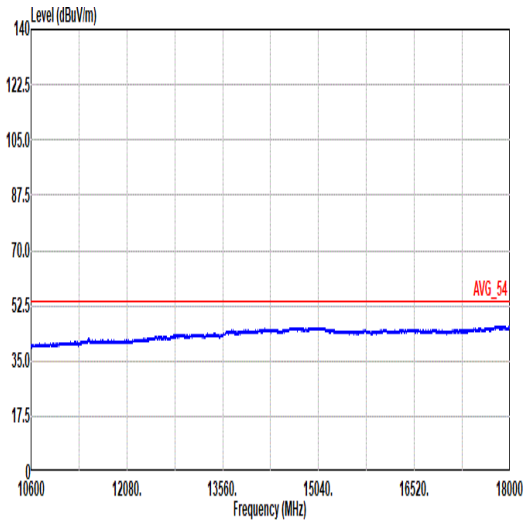


Mode	46	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

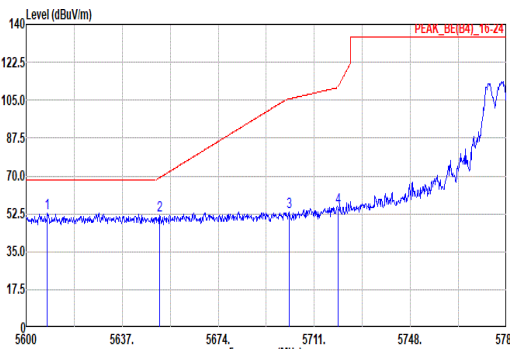
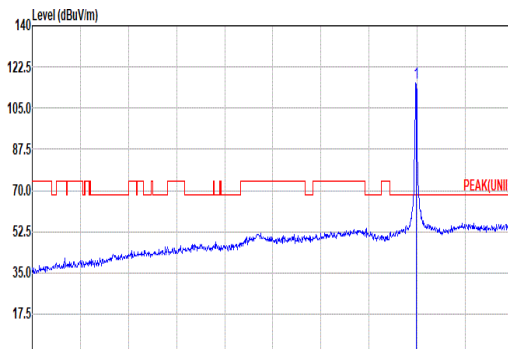
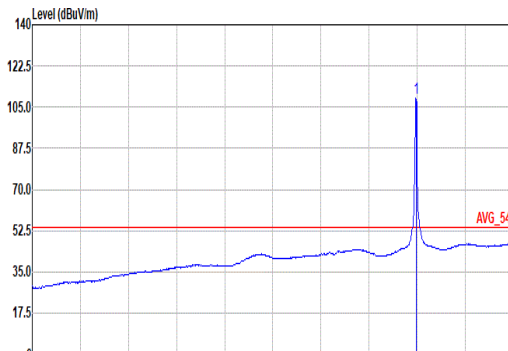


Mode	47																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5600.14</td><td>52.64</td><td>68.20</td><td>-15.56</td><td>38.78</td><td>33.25</td><td>11.16</td><td>34.45</td><td>3.90</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>2</td><td>5651.43</td><td>51.88</td><td>69.26</td><td>-17.38</td><td>37.73</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>3</td><td>5701.20</td><td>53.32</td><td>105.54</td><td>-52.22</td><td>38.06</td><td>33.80</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>55.55</td><td>110.95</td><td>-55.40</td><td>41.05</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5600.14	52.64	68.20	-15.56	38.78	33.25	11.16	34.45	3.90	400	114	PEAK	2	5651.43	51.88	69.26	-17.38	37.73	33.51	11.18	34.45	3.91	400	114	PEAK	3	5701.20	53.32	105.54	-52.22	38.06	33.80	11.20	34.45	3.91	400	114	PEAK	4	5720.07	55.55	110.95	-55.40	41.05	33.84	11.20	34.45	3.91	400	114	PEAK	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>115.51</td><td>-----</td><td>-----</td><td>100.93</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>400</td><td>114</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	115.51	-----	-----	100.93	33.90	11.22	34.46	3.92	400	114	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5600.14	52.64	68.20	-15.56	38.78	33.25	11.16	34.45	3.90	400	114	PEAK																																																																																																																															
2	5651.43	51.88	69.26	-17.38	37.73	33.51	11.18	34.45	3.91	400	114	PEAK																																																																																																																															
3	5701.20	53.32	105.54	-52.22	38.06	33.80	11.20	34.45	3.91	400	114	PEAK																																																																																																																															
4	5720.07	55.55	110.95	-55.40	41.05	33.84	11.20	34.45	3.91	400	114	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	115.51	-----	-----	100.93	33.90	11.22	34.46	3.92	400	114	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG 54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>108.83</td><td>-----</td><td>-----</td><td>94.25</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>400</td><td>114</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	108.83	-----	-----	94.25	33.90	11.22	34.46	3.92	400	114	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	108.83	-----	-----	94.25	33.90	11.22	34.46	3.92	400	114	AVERAGE																																																																																																																															

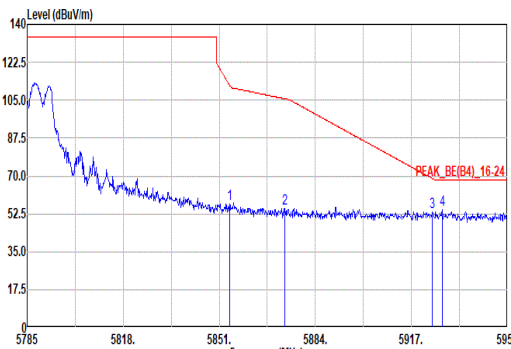


Mode	47																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH10-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.47</td><td>57.12</td><td>112.02</td><td>-54.90</td><td>42.40</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>2</td><td>5873.61</td><td>55.05</td><td>105.59</td><td>-50.54</td><td>40.32</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>3</td><td>5924.26</td><td>53.54</td><td>68.75</td><td>-15.21</td><td>38.78</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>400</td><td>114</td><td>PEAK</td></tr><tr><td>4</td><td>5927.56</td><td>54.20</td><td>68.20</td><td>-14.00</td><td>39.44</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>400</td><td>114</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5854.47	57.12	112.02	-54.90	42.40	34.00	11.28	34.46	3.90	400	114	PEAK	2	5873.61	55.05	105.59	-50.54	40.32	34.00	11.30	34.46	3.89	400	114	PEAK	3	5924.26	53.54	68.75	-15.21	38.78	34.00	11.35	34.47	3.88	400	114	PEAK	4	5927.56	54.20	68.20	-14.00	39.44	34.00	11.35	34.47	3.88	400	114	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																											
1	5854.47	57.12	112.02	-54.90	42.40	34.00	11.28	34.46	3.90	400	114	PEAK																																																																								
2	5873.61	55.05	105.59	-50.54	40.32	34.00	11.30	34.46	3.89	400	114	PEAK																																																																								
3	5924.26	53.54	68.75	-15.21	38.78	34.00	11.35	34.47	3.88	400	114	PEAK																																																																								
4	5927.56	54.20	68.20	-14.00	39.44	34.00	11.35	34.47	3.88	400	114	PEAK																																																																								

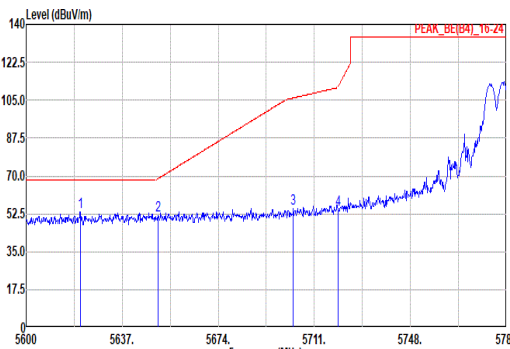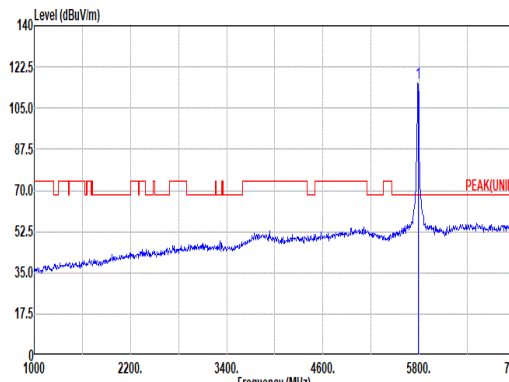
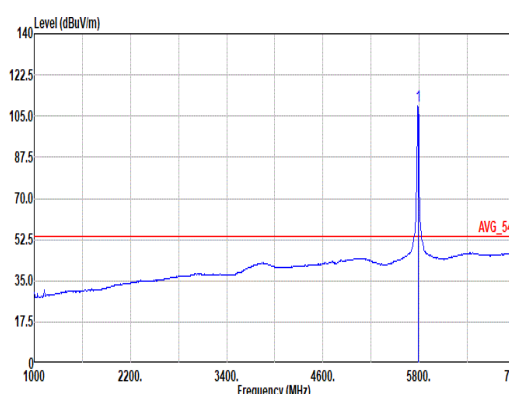


	47																																																																																																																																										
Mode	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5620.91</td><td>53.27</td><td>68.20</td><td>-14.93</td><td>39.32</td><td>33.33</td><td>11.17</td><td>34.45</td><td>3.90</td><td>329</td><td>230</td><td>PEAK</td></tr><tr><td>2</td><td>5650.69</td><td>51.96</td><td>68.71</td><td>-16.75</td><td>37.82</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>329</td><td>230</td><td>PEAK</td></tr><tr><td>3</td><td>5702.86</td><td>55.18</td><td>106.00</td><td>-50.82</td><td>40.71</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>329</td><td>230</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.17</td><td>110.95</td><td>-56.78</td><td>39.67</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>329</td><td>230</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5620.91	53.27	68.20	-14.93	39.32	33.33	11.17	34.45	3.90	329	230	PEAK	2	5650.69	51.96	68.71	-16.75	37.82	33.50	11.18	34.45	3.91	329	230	PEAK	3	5702.86	55.18	106.00	-50.82	40.71	33.81	11.20	34.45	3.91	329	230	PEAK	4	5720.07	54.17	110.95	-56.78	39.67	33.84	11.20	34.45	3.91	329	230	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII) Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>115.46</td><td>-----</td><td>-----</td><td>100.88</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>329</td><td>230</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	115.46	-----	-----	100.88	33.90	11.22	34.46	3.92	329	230	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5620.91	53.27	68.20	-14.93	39.32	33.33	11.17	34.45	3.90	329	230	PEAK																																																																																																																															
2	5650.69	51.96	68.71	-16.75	37.82	33.50	11.18	34.45	3.91	329	230	PEAK																																																																																																																															
3	5702.86	55.18	106.00	-50.82	40.71	33.81	11.20	34.45	3.91	329	230	PEAK																																																																																																																															
4	5720.07	54.17	110.95	-56.78	39.67	33.84	11.20	34.45	3.91	329	230	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	115.46	-----	-----	100.88	33.90	11.22	34.46	3.92	329	230	PEAK																																																																																																																															
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>109.16</td><td>-----</td><td>-----</td><td>94.58</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>329</td><td>230</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	109.16	-----	-----	94.58	33.90	11.22	34.46	3.92	329	230	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	109.16	-----	-----	94.58	33.90	11.22	34.46	3.92	329	230	AVERAGE																																																																																																																															


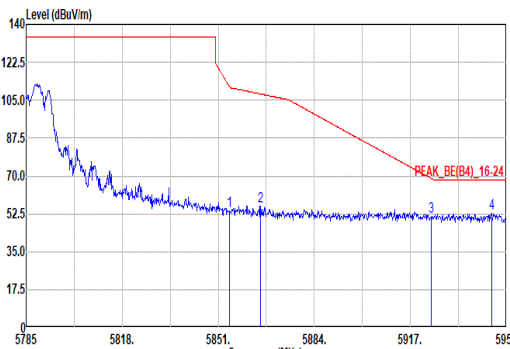


Mode	47																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																							
ANT	1+2																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5854.96</td><td>53.93</td><td>110.89</td><td>-56.96</td><td>39.21</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>329 230 PEAK</td></tr><tr><td>2 5865.52</td><td>56.14</td><td>107.85</td><td>-51.71</td><td>41.41</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td><td>329 230 PEAK</td></tr><tr><td>3 5924.26</td><td>51.46</td><td>68.75</td><td>-17.29</td><td>36.70</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>329 230 PEAK</td></tr><tr><td>4 5945.05</td><td>52.95</td><td>68.20</td><td>-15.25</td><td>38.18</td><td>34.00</td><td>11.37</td><td>34.47</td><td>3.87</td><td>329 230 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5854.96	53.93	110.89	-56.96	39.21	34.00	11.28	34.46	3.90	329 230 PEAK	2 5865.52	56.14	107.85	-51.71	41.41	34.00	11.29	34.46	3.90	329 230 PEAK	3 5924.26	51.46	68.75	-17.29	36.70	34.00	11.35	34.47	3.88	329 230 PEAK	4 5945.05	52.95	68.20	-15.25	38.18	34.00	11.37	34.47	3.87	329 230 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																															
1 5854.96	53.93	110.89	-56.96	39.21	34.00	11.28	34.46	3.90	329 230 PEAK																																																															
2 5865.52	56.14	107.85	-51.71	41.41	34.00	11.29	34.46	3.90	329 230 PEAK																																																															
3 5924.26	51.46	68.75	-17.29	36.70	34.00	11.35	34.47	3.88	329 230 PEAK																																																															
4 5945.05	52.95	68.20	-15.25	38.18	34.00	11.37	34.47	3.87	329 230 PEAK																																																															


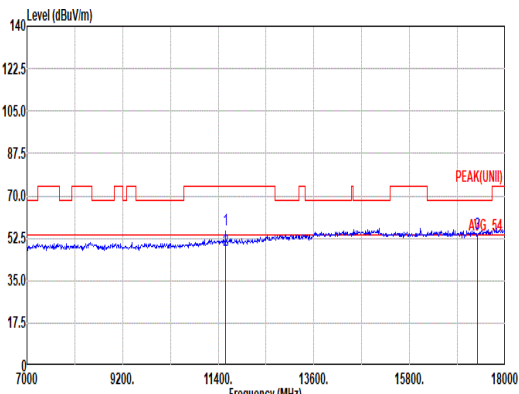
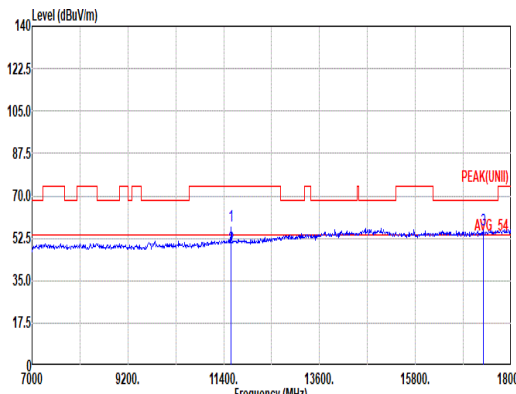


Mode	47																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																													
ANT	1+2																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>39.46</td><td>38.60</td><td>15.75</td><td>40.24</td><td>2.26</td><td>336</td><td>262</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>47.29</td><td>54.00</td><td>-6.71</td><td>30.92</td><td>38.60</td><td>15.75</td><td>40.24</td><td>2.26</td><td>336</td><td>262</td><td>Average</td></tr><tr><td>3</td><td>17355.00</td><td>54.41</td><td>68.20</td><td>-13.79</td><td>38.30</td><td>40.14</td><td>19.32</td><td>46.38</td><td>3.03</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	55.83	74.00	-18.17	39.46	38.60	15.75	40.24	2.26	336	262	PEAK	2	11570.00	47.29	54.00	-6.71	30.92	38.60	15.75	40.24	2.26	336	262	Average	3	17355.00	54.41	68.20	-13.79	38.30	40.14	19.32	46.38	3.03	--	--	PEAK	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>41.47</td><td>38.60</td><td>15.75</td><td>40.24</td><td>2.26</td><td>271</td><td>248</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>48.73</td><td>54.00</td><td>-5.27</td><td>32.36</td><td>38.60</td><td>15.75</td><td>40.24</td><td>2.26</td><td>271</td><td>248</td><td>Average</td></tr><tr><td>3</td><td>17355.00</td><td>56.18</td><td>68.20</td><td>-12.02</td><td>40.09</td><td>40.10</td><td>19.34</td><td>46.39</td><td>3.04</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	57.84	74.00	-16.16	41.47	38.60	15.75	40.24	2.26	271	248	PEAK	2	11570.00	48.73	54.00	-5.27	32.36	38.60	15.75	40.24	2.26	271	248	Average	3	17355.00	56.18	68.20	-12.02	40.09	40.10	19.34	46.39	3.04	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11570.00	55.83	74.00	-18.17	39.46	38.60	15.75	40.24	2.26	336	262	PEAK																																																																																																																																		
2	11570.00	47.29	54.00	-6.71	30.92	38.60	15.75	40.24	2.26	336	262	Average																																																																																																																																		
3	17355.00	54.41	68.20	-13.79	38.30	40.14	19.32	46.38	3.03	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11570.00	57.84	74.00	-16.16	41.47	38.60	15.75	40.24	2.26	271	248	PEAK																																																																																																																																		
2	11570.00	48.73	54.00	-5.27	32.36	38.60	15.75	40.24	2.26	271	248	Average																																																																																																																																		
3	17355.00	56.18	68.20	-12.02	40.09	40.10	19.34	46.39	3.04	--	--	PEAK																																																																																																																																		


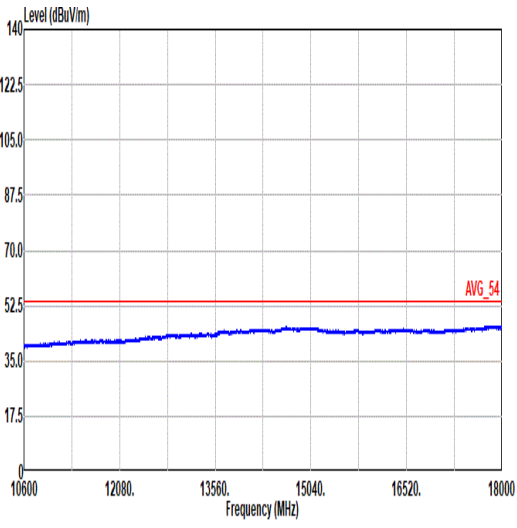
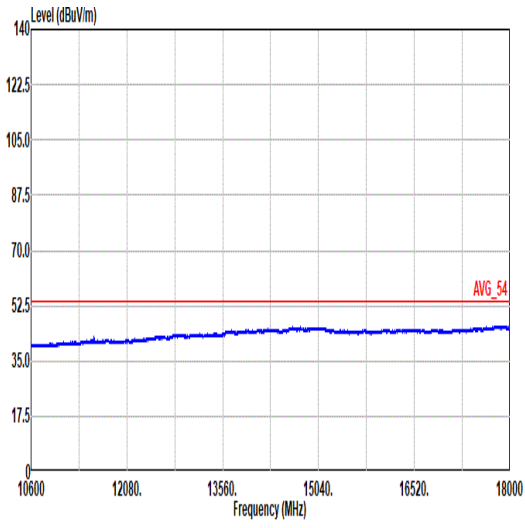


Mode	47	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

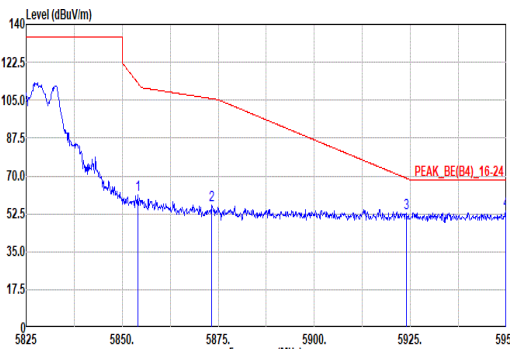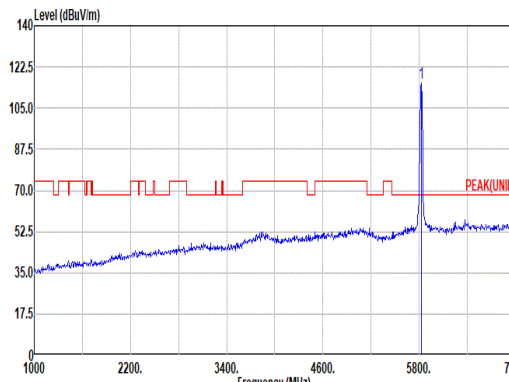
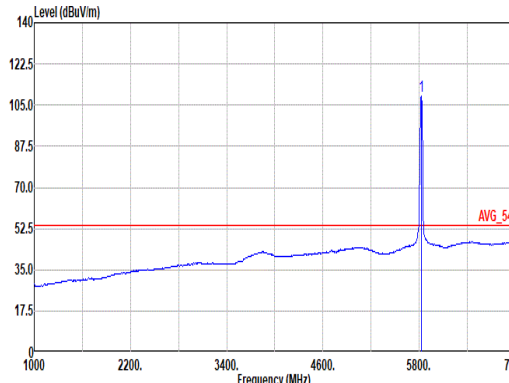


	48																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																															
ANT	1+2																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5854.00</td><td>61.26</td><td>113.00</td><td>-51.82</td><td>46.54</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>387 113 PEAK</td></tr><tr><td>2 5873.25</td><td>56.53</td><td>105.69</td><td>-49.16</td><td>41.00</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>387 113 PEAK</td></tr><tr><td>3 5924.00</td><td>53.06</td><td>68.94</td><td>-15.88</td><td>38.30</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>387 113 PEAK</td></tr><tr><td>4 5949.88</td><td>53.66</td><td>68.20</td><td>-14.54</td><td>38.89</td><td>34.00</td><td>11.37</td><td>34.47</td><td>3.87</td><td>387 113 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5854.00	61.26	113.00	-51.82	46.54	34.00	11.28	34.46	3.90	387 113 PEAK	2 5873.25	56.53	105.69	-49.16	41.00	34.00	11.30	34.46	3.89	387 113 PEAK	3 5924.00	53.06	68.94	-15.88	38.30	34.00	11.35	34.47	3.88	387 113 PEAK	4 5949.88	53.66	68.20	-14.54	38.89	34.00	11.37	34.47	3.87	387 113 PEAK	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5825.00</td><td>115.71</td><td>-----</td><td>-----</td><td>101.06</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>387 113 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5825.00	115.71	-----	-----	101.06	33.95	11.25	34.46	3.91	387 113 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5854.00	61.26	113.00	-51.82	46.54	34.00	11.28	34.46	3.90	387 113 PEAK																																																																																																							
2 5873.25	56.53	105.69	-49.16	41.00	34.00	11.30	34.46	3.89	387 113 PEAK																																																																																																							
3 5924.00	53.06	68.94	-15.88	38.30	34.00	11.35	34.47	3.88	387 113 PEAK																																																																																																							
4 5949.88	53.66	68.20	-14.54	38.89	34.00	11.37	34.47	3.87	387 113 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5825.00	115.71	-----	-----	101.06	33.95	11.25	34.46	3.91	387 113 PEAK																																																																																																							
Avg	Blank	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5825.00</td><td>108.81</td><td>-----</td><td>-----</td><td>94.16</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>387 113 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5825.00	108.81	-----	-----	94.16	33.95	11.25	34.46	3.91	387 113 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5825.00	108.81	-----	-----	94.16	33.95	11.25	34.46	3.91	387 113 AVERAGE																																																																																																							

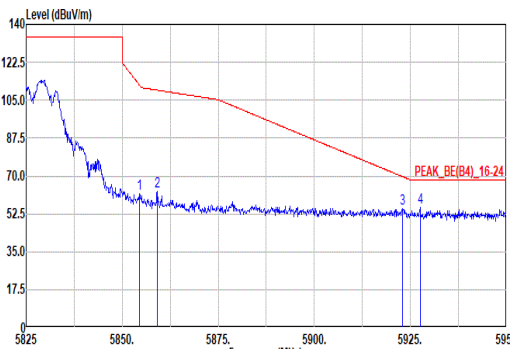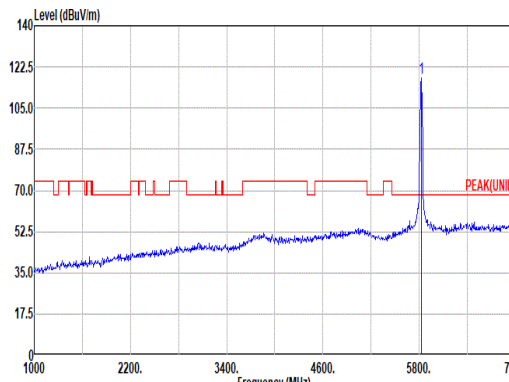
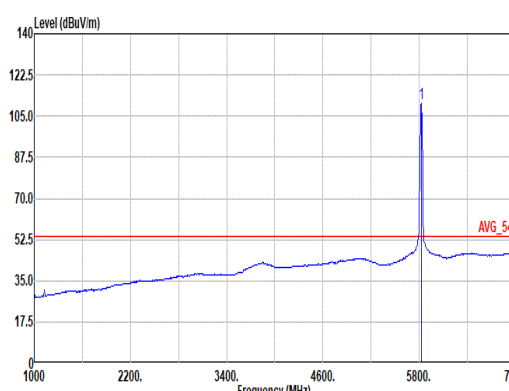


Mode	48																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.50</td><td>61.87</td><td>111.94</td><td>-50.07</td><td>47.15</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>277</td><td>221</td><td>PEAK</td></tr><tr><td>2</td><td>5859.13</td><td>62.72</td><td>109.64</td><td>-46.92</td><td>47.99</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td><td>277</td><td>221</td><td>PEAK</td></tr><tr><td>3</td><td>5923.00</td><td>54.92</td><td>69.67</td><td>-14.75</td><td>40.16</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>277</td><td>221</td><td>PEAK</td></tr><tr><td>4</td><td>5927.50</td><td>55.45</td><td>68.20</td><td>-12.75</td><td>40.69</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>277</td><td>221</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.50	61.87	111.94	-50.07	47.15	34.00	11.28	34.46	3.90	277	221	PEAK	2	5859.13	62.72	109.64	-46.92	47.99	34.00	11.29	34.46	3.90	277	221	PEAK	3	5923.00	54.92	69.67	-14.75	40.16	34.00	11.35	34.47	3.88	277	221	PEAK	4	5927.50	55.45	68.20	-12.75	40.69	34.00	11.35	34.47	3.88	277	221	PEAK	 Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>117.58</td><td>-----</td><td>-----</td><td>102.93</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>277</td><td>221</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	117.58	-----	-----	102.93	33.95	11.25	34.46	3.91	277	221	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5854.50	61.87	111.94	-50.07	47.15	34.00	11.28	34.46	3.90	277	221	PEAK																																																																																																																															
2	5859.13	62.72	109.64	-46.92	47.99	34.00	11.29	34.46	3.90	277	221	PEAK																																																																																																																															
3	5923.00	54.92	69.67	-14.75	40.16	34.00	11.35	34.47	3.88	277	221	PEAK																																																																																																																															
4	5927.50	55.45	68.20	-12.75	40.69	34.00	11.35	34.47	3.88	277	221	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	117.58	-----	-----	102.93	33.95	11.25	34.46	3.91	277	221	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>110.61</td><td>-----</td><td>-----</td><td>95.96</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>277</td><td>221</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	110.61	-----	-----	95.96	33.95	11.25	34.46	3.91	277	221	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5825.00	110.61	-----	-----	95.96	33.95	11.25	34.46	3.91	277	221	AVERAGE																																																																																																																															


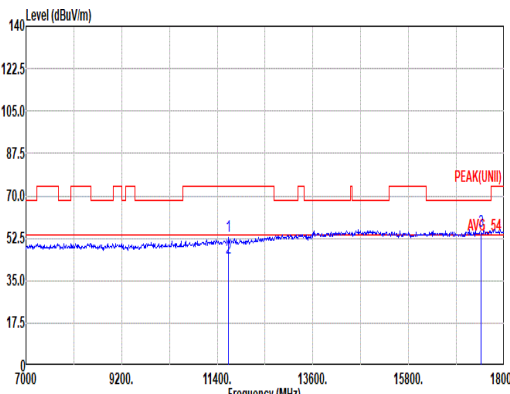
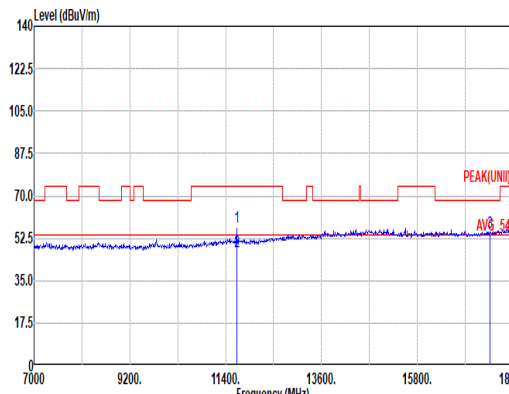


Mode	48																																																																																
	Harmonic																																																																																
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																
ANT	1+2																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg																																																																																	
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>36.93</td><td>38.60</td><td>15.81</td><td>40.32</td><td>2.26</td><td>336</td><td>147</td><td>PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>27.91</td><td>38.60</td><td>15.81</td><td>40.32</td><td>2.26</td><td>336</td><td>147</td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>39.31</td><td>40.15</td><td>19.42</td><td>46.41</td><td>3.09</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	53.28	74.00	-20.72	36.93	38.60	15.81	40.32	2.26	336	147	PEAK	2	11650.00	44.26	54.00	-9.74	27.91	38.60	15.81	40.32	2.26	336	147	Average	3	17475.00	55.56	68.20	-12.64	39.31	40.15	19.42	46.41	3.09	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11650.00	53.28	74.00	-20.72	36.93	38.60	15.81	40.32	2.26	336	147	PEAK																																																																					
2	11650.00	44.26	54.00	-9.74	27.91	38.60	15.81	40.32	2.26	336	147	Average																																																																					
3	17475.00	55.56	68.20	-12.64	39.31	40.15	19.42	46.41	3.09	--	--	PEAK																																																																					


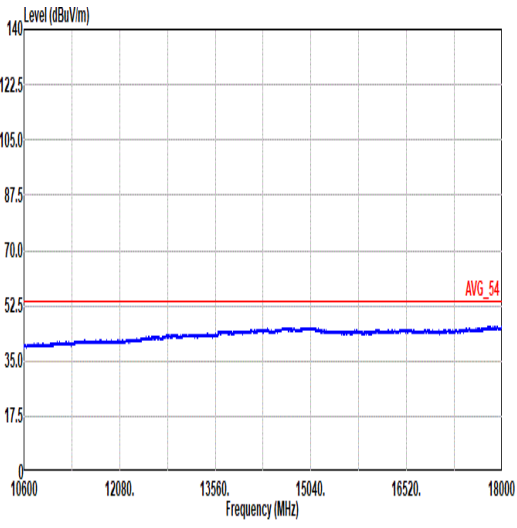
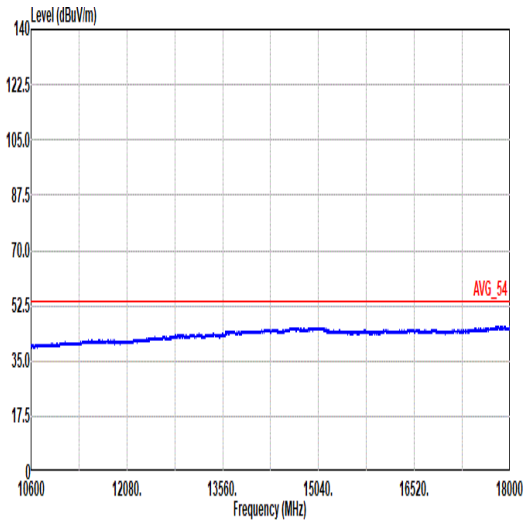


Mode	48	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

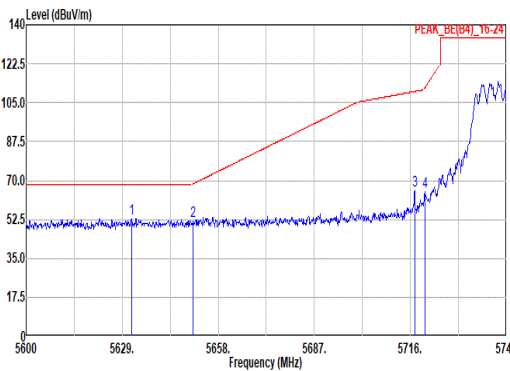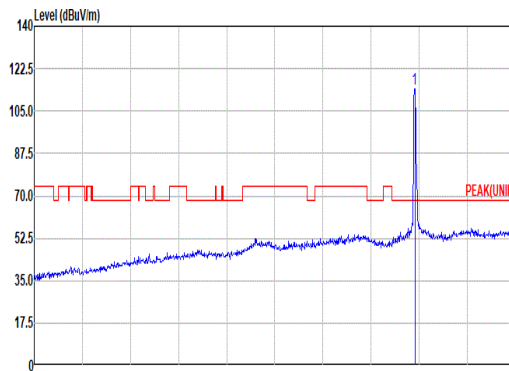
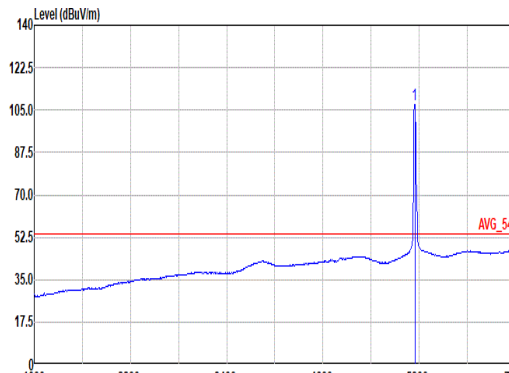


Mode	49																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5631.76</td><td>52.90</td><td>68.20</td><td>-15.30</td><td>38.89</td><td>33.39</td><td>11.17</td><td>34.45</td><td>3.90</td><td>367</td></tr><tr><td>2 5658.46</td><td>51.99</td><td>68.54</td><td>-16.55</td><td>37.85</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>367</td></tr><tr><td>3 5717.31</td><td>65.67</td><td>110.05</td><td>-44.38</td><td>51.18</td><td>33.83</td><td>11.20</td><td>34.45</td><td>3.91</td><td>367</td></tr><tr><td>4 5720.35</td><td>64.90</td><td>111.60</td><td>-46.70</td><td>50.40</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>367</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5631.76	52.90	68.20	-15.30	38.89	33.39	11.17	34.45	3.90	367	2 5658.46	51.99	68.54	-16.55	37.85	33.50	11.18	34.45	3.91	367	3 5717.31	65.67	110.05	-44.38	51.18	33.83	11.20	34.45	3.91	367	4 5720.35	64.90	111.60	-46.70	50.40	33.84	11.20	34.45	3.91	367	 Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5745.00</td><td>113.88</td><td>-----</td><td>-----</td><td>99.32</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>367</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5745.00	113.88	-----	-----	99.32	33.89	11.21	34.45	3.91	367
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																															
1 5631.76	52.90	68.20	-15.30	38.89	33.39	11.17	34.45	3.90	367																																																																																																															
2 5658.46	51.99	68.54	-16.55	37.85	33.50	11.18	34.45	3.91	367																																																																																																															
3 5717.31	65.67	110.05	-44.38	51.18	33.83	11.20	34.45	3.91	367																																																																																																															
4 5720.35	64.90	111.60	-46.70	50.40	33.84	11.20	34.45	3.91	367																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																															
1 5745.00	113.88	-----	-----	99.32	33.89	11.21	34.45	3.91	367																																																																																																															
Avg	Blank					 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5745.00</td><td>107.29</td><td>-----</td><td>-----</td><td>92.74</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>367</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5745.00	107.29	-----	-----	92.74	33.88	11.21	34.45	3.91	367																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																															
1 5745.00	107.29	-----	-----	92.74	33.88	11.21	34.45	3.91	367																																																																																																															

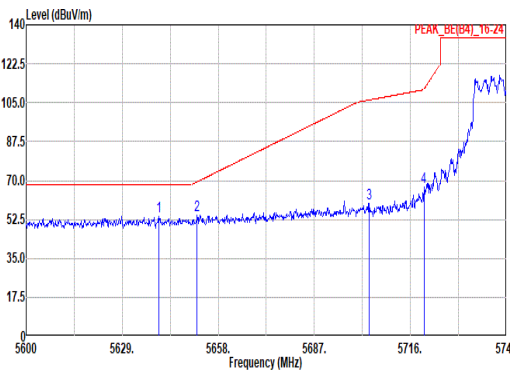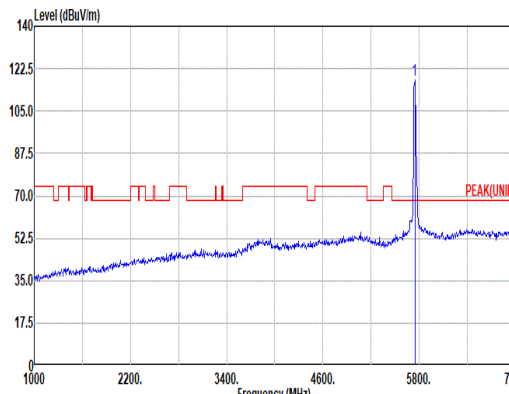
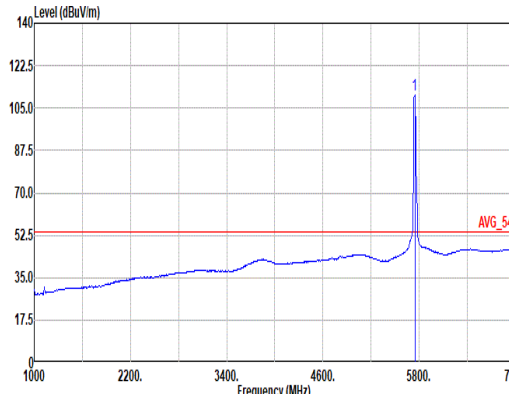


	49																																																																																																																																										
Mode	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5640.02</td><td>53.65</td><td>68.20</td><td>-14.55</td><td>39.59</td><td>33.44</td><td>11.17</td><td>34.45</td><td>3.90</td><td>275</td><td>222</td><td>Peak</td></tr><tr><td>2</td><td>5651.62</td><td>54.20</td><td>69.40</td><td>-15.20</td><td>40.05</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>275</td><td>222</td><td>Peak</td></tr><tr><td>3</td><td>5703.53</td><td>59.92</td><td>106.19</td><td>-46.27</td><td>45.45</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>275</td><td>222</td><td>Peak</td></tr><tr><td>4</td><td>5720.06</td><td>66.85</td><td>110.94</td><td>-44.09</td><td>52.35</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>275</td><td>222</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.02	53.65	68.20	-14.55	39.59	33.44	11.17	34.45	3.90	275	222	Peak	2	5651.62	54.20	69.40	-15.20	40.05	33.51	11.18	34.45	3.91	275	222	Peak	3	5703.53	59.92	106.19	-46.27	45.45	33.81	11.20	34.45	3.91	275	222	Peak	4	5720.06	66.85	110.94	-44.09	52.35	33.84	11.20	34.45	3.91	275	222	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>117.94</td><td>-----</td><td>-----</td><td>103.38</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>275</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	117.94	-----	-----	103.38	33.89	11.21	34.45	3.91	275	222	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5640.02	53.65	68.20	-14.55	39.59	33.44	11.17	34.45	3.90	275	222	Peak																																																																																																																															
2	5651.62	54.20	69.40	-15.20	40.05	33.51	11.18	34.45	3.91	275	222	Peak																																																																																																																															
3	5703.53	59.92	106.19	-46.27	45.45	33.81	11.20	34.45	3.91	275	222	Peak																																																																																																																															
4	5720.06	66.85	110.94	-44.09	52.35	33.84	11.20	34.45	3.91	275	222	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	117.94	-----	-----	103.38	33.89	11.21	34.45	3.91	275	222	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>110.26</td><td>-----</td><td>-----</td><td>95.70</td><td>33.89</td><td>11.21</td><td>34.45</td><td>3.91</td><td>275</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	110.26	-----	-----	95.70	33.89	11.21	34.45	3.91	275	222	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5745.00	110.26	-----	-----	95.70	33.89	11.21	34.45	3.91	275	222	AVERAGE																																																																																																																															


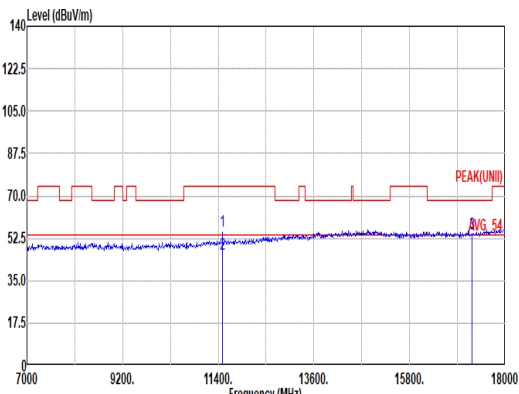
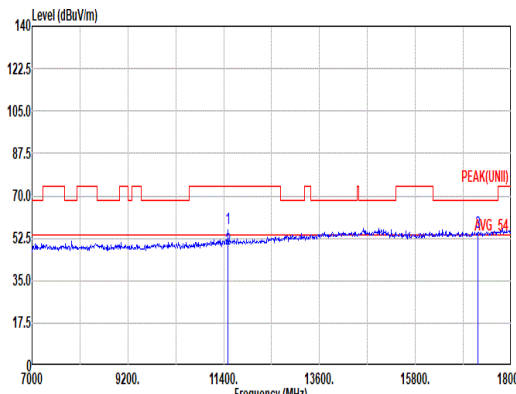


Mode	49																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																																													
ANT	1+2																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>38.98</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>332</td><td>261</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>45.76</td><td>54.00</td><td>-8.24</td><td>29.25</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>332</td><td>261</td><td>Average</td></tr><tr><td>3</td><td>17235.00</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>38.39</td><td>40.06</td><td>19.25</td><td>46.37</td><td>3.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	55.49	74.00	-18.51	38.98	38.70	15.70	40.15	2.26	332	261	PEAK	2	11490.00	45.76	54.00	-8.24	29.25	38.70	15.70	40.15	2.26	332	261	Average	3	17235.00	54.33	68.20	-13.87	38.39	40.06	19.25	46.37	3.00	--	--	PEAK	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>56.67</td><td>74.00</td><td>-17.33</td><td>40.16</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>255</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>11490.00</td><td>48.28</td><td>54.00</td><td>-5.72</td><td>31.77</td><td>38.70</td><td>15.70</td><td>40.15</td><td>2.26</td><td>255</td><td>250</td><td>Average</td></tr><tr><td>3</td><td>17235.00</td><td>55.12</td><td>68.20</td><td>-13.08</td><td>39.13</td><td>40.10</td><td>19.26</td><td>46.37</td><td>3.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	56.67	74.00	-17.33	40.16	38.70	15.70	40.15	2.26	255	250	PEAK	2	11490.00	48.28	54.00	-5.72	31.77	38.70	15.70	40.15	2.26	255	250	Average	3	17235.00	55.12	68.20	-13.08	39.13	40.10	19.26	46.37	3.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11490.00	55.49	74.00	-18.51	38.98	38.70	15.70	40.15	2.26	332	261	PEAK																																																																																																																																		
2	11490.00	45.76	54.00	-8.24	29.25	38.70	15.70	40.15	2.26	332	261	Average																																																																																																																																		
3	17235.00	54.33	68.20	-13.87	38.39	40.06	19.25	46.37	3.00	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11490.00	56.67	74.00	-17.33	40.16	38.70	15.70	40.15	2.26	255	250	PEAK																																																																																																																																		
2	11490.00	48.28	54.00	-5.72	31.77	38.70	15.70	40.15	2.26	255	250	Average																																																																																																																																		
3	17235.00	55.12	68.20	-13.08	39.13	40.10	19.26	46.37	3.00	--	--	PEAK																																																																																																																																		

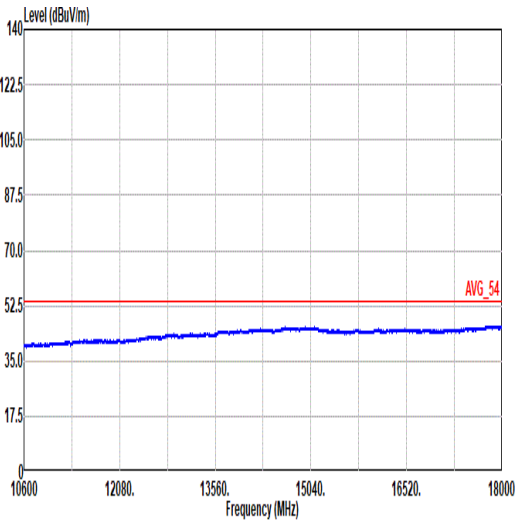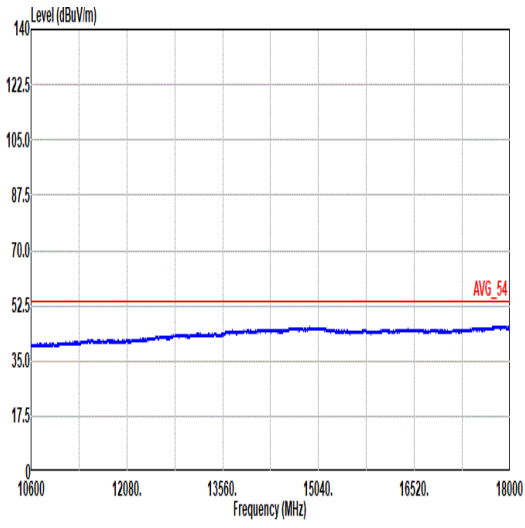


Mode	49	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL


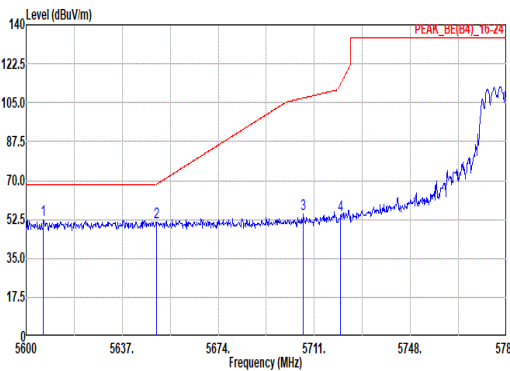
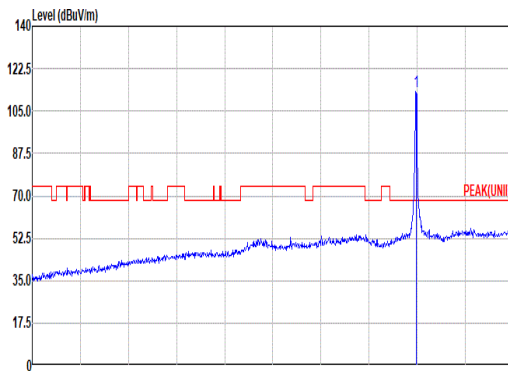
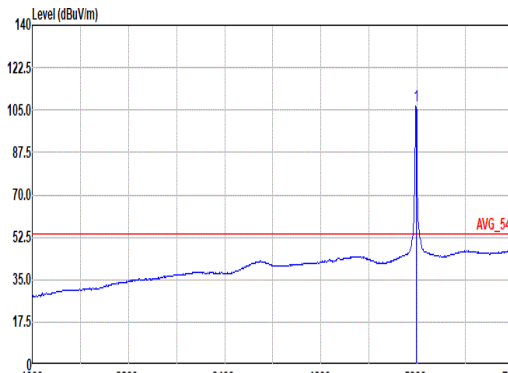


Mode	50																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																																																									
ANT	1+2																																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																																			
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5606.66</td><td>52.44</td><td>68.20</td><td>-15.76</td><td>38.59</td><td>33.24</td><td>11.16</td><td>34.45</td><td>3.90</td><td>367</td><td>114</td><td>Peak</td></tr><tr><td>2</td><td>5658.14</td><td>51.20</td><td>68.30</td><td>-17.10</td><td>37.06</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>367</td><td>114</td><td>Peak</td></tr><tr><td>3</td><td>5706.75</td><td>54.70</td><td>107.09</td><td>-52.39</td><td>40.23</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>367</td><td>114</td><td>Peak</td></tr><tr><td>4</td><td>5721.18</td><td>54.63</td><td>113.48</td><td>-58.85</td><td>40.13</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>367</td><td>114</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5606.66	52.44	68.20	-15.76	38.59	33.24	11.16	34.45	3.90	367	114	Peak	2	5658.14	51.20	68.30	-17.10	37.06	33.50	11.18	34.45	3.91	367	114	Peak	3	5706.75	54.70	107.09	-52.39	40.23	33.81	11.20	34.45	3.91	367	114	Peak	4	5721.18	54.63	113.48	-58.85	40.13	33.84	11.20	34.45	3.91	367	114	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>112.97</td><td>-----</td><td>-----</td><td>98.39</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>367</td><td>114</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	112.97	-----	-----	98.39	33.90	11.22	34.46	3.92	367	114	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5606.66	52.44	68.20	-15.76	38.59	33.24	11.16	34.45	3.90	367	114	Peak																																																																																																																														
2	5658.14	51.20	68.30	-17.10	37.06	33.50	11.18	34.45	3.91	367	114	Peak																																																																																																																														
3	5706.75	54.70	107.09	-52.39	40.23	33.81	11.20	34.45	3.91	367	114	Peak																																																																																																																														
4	5721.18	54.63	113.48	-58.85	40.13	33.84	11.20	34.45	3.91	367	114	Peak																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	112.97	-----	-----	98.39	33.90	11.22	34.46	3.92	367	114	PEAK																																																																																																																														
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>106.49</td><td>-----</td><td>-----</td><td>91.91</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>367</td><td>114</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5785.00	106.49	-----	-----	91.91	33.90	11.22	34.46	3.92	367	114	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5785.00	106.49	-----	-----	91.91	33.90	11.22	34.46	3.92	367	114	AVERAGE																																																																																																																														

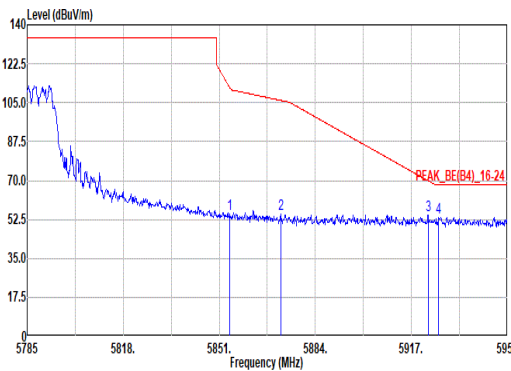


Mode	50																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																							
ANT	1+2																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5854.63</td><td>54.99</td><td>111.64</td><td>-56.65</td><td>40.27</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>367 114 Peak</td></tr><tr><td>2 5872.12</td><td>54.99</td><td>106.01</td><td>-51.02</td><td>40.26</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>367 114 Peak</td></tr><tr><td>3 5922.78</td><td>54.22</td><td>69.84</td><td>-15.62</td><td>39.46</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>367 114 Peak</td></tr><tr><td>4 5926.41</td><td>53.36</td><td>68.20</td><td>-14.84</td><td>38.60</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>367 114 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5854.63	54.99	111.64	-56.65	40.27	34.00	11.28	34.46	3.90	367 114 Peak	2 5872.12	54.99	106.01	-51.02	40.26	34.00	11.30	34.46	3.89	367 114 Peak	3 5922.78	54.22	69.84	-15.62	39.46	34.00	11.35	34.47	3.88	367 114 Peak	4 5926.41	53.36	68.20	-14.84	38.60	34.00	11.35	34.47	3.88	367 114 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																															
1 5854.63	54.99	111.64	-56.65	40.27	34.00	11.28	34.46	3.90	367 114 Peak																																																															
2 5872.12	54.99	106.01	-51.02	40.26	34.00	11.30	34.46	3.89	367 114 Peak																																																															
3 5922.78	54.22	69.84	-15.62	39.46	34.00	11.35	34.47	3.88	367 114 Peak																																																															
4 5926.41	53.36	68.20	-14.84	38.60	34.00	11.35	34.47	3.88	367 114 Peak																																																															

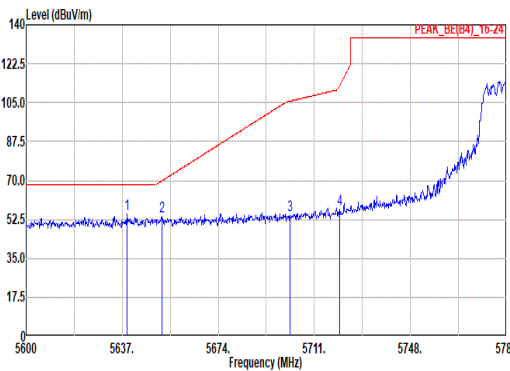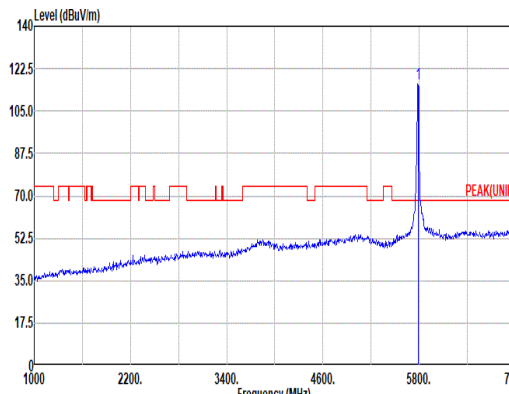
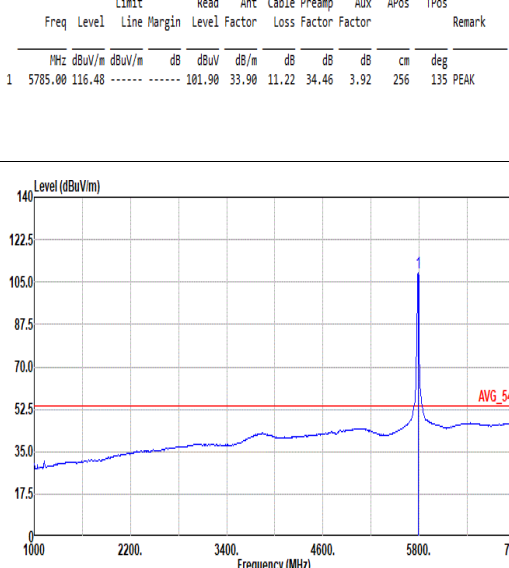


Mode	50																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5638.05</td><td>54.71</td><td>68.20</td><td>-13.49</td><td>40.66</td><td>33.43</td><td>11.17</td><td>34.45</td><td>3.90</td><td>256</td><td>135</td><td>Peak</td></tr><tr><td>2</td><td>5652.17</td><td>53.97</td><td>69.81</td><td>-15.84</td><td>39.82</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>256</td><td>135</td><td>Peak</td></tr><tr><td>3</td><td>5701.57</td><td>54.45</td><td>105.64</td><td>-51.19</td><td>39.99</td><td>33.80</td><td>11.20</td><td>34.45</td><td>3.91</td><td>256</td><td>135</td><td>Peak</td></tr><tr><td>4</td><td>5720.62</td><td>57.02</td><td>112.21</td><td>-55.19</td><td>42.52</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>256</td><td>135</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5638.05	54.71	68.20	-13.49	40.66	33.43	11.17	34.45	3.90	256	135	Peak	2	5652.17	53.97	69.81	-15.84	39.82	33.51	11.18	34.45	3.91	256	135	Peak	3	5701.57	54.45	105.64	-51.19	39.99	33.80	11.20	34.45	3.91	256	135	Peak	4	5720.62	57.02	112.21	-55.19	42.52	33.84	11.20	34.45	3.91	256	135	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>116.48</td><td>-----</td><td>-----</td><td>101.90</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>256</td><td>135</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	116.48	-----	-----	101.90	33.90	11.22	34.46	3.92	256	135	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5638.05	54.71	68.20	-13.49	40.66	33.43	11.17	34.45	3.90	256	135	Peak																																																																																																																															
2	5652.17	53.97	69.81	-15.84	39.82	33.51	11.18	34.45	3.91	256	135	Peak																																																																																																																															
3	5701.57	54.45	105.64	-51.19	39.99	33.80	11.20	34.45	3.91	256	135	Peak																																																																																																																															
4	5720.62	57.02	112.21	-55.19	42.52	33.84	11.20	34.45	3.91	256	135	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	116.48	-----	-----	101.90	33.90	11.22	34.46	3.92	256	135	PEAK																																																																																																																															
Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>108.72</td><td>-----</td><td>-----</td><td>94.13</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>256</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	108.72	-----	-----	94.13	33.90	11.23	34.46	3.92	256	135	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5785.00</td><td>108.72</td><td>-----</td><td>-----</td><td>94.13</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>256</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	108.72	-----	-----	94.13	33.90	11.23	34.46	3.92	256	135	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	108.72	-----	-----	94.13	33.90	11.23	34.46	3.92	256	135	AVERAGE																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5785.00	108.72	-----	-----	94.13	33.90	11.23	34.46	3.92	256	135	AVERAGE																																																																																																																															


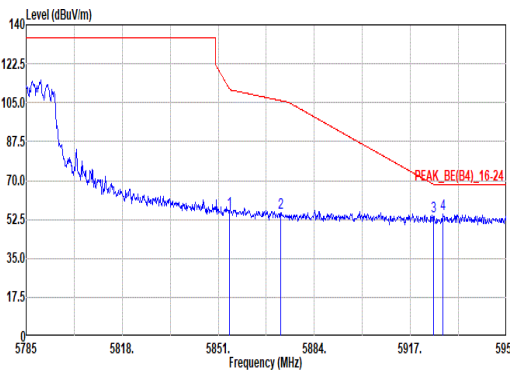


Mode	50																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																							
ANT	1+2																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5854.96</td><td>56.15</td><td>110.89</td><td>-54.74</td><td>41.43</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>256 135 Peak</td></tr><tr><td>2 5872.45</td><td>55.63</td><td>105.91</td><td>-50.28</td><td>40.90</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>256 135 Peak</td></tr><tr><td>3 5924.92</td><td>53.93</td><td>68.26</td><td>-14.33</td><td>39.17</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>256 135 Peak</td></tr><tr><td>4 5928.22</td><td>54.94</td><td>68.20</td><td>-13.26</td><td>40.18</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>256 135 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5854.96	56.15	110.89	-54.74	41.43	34.00	11.28	34.46	3.90	256 135 Peak	2 5872.45	55.63	105.91	-50.28	40.90	34.00	11.30	34.46	3.89	256 135 Peak	3 5924.92	53.93	68.26	-14.33	39.17	34.00	11.35	34.47	3.88	256 135 Peak	4 5928.22	54.94	68.20	-13.26	40.18	34.00	11.35	34.47	3.88	256 135 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																															
1 5854.96	56.15	110.89	-54.74	41.43	34.00	11.28	34.46	3.90	256 135 Peak																																																															
2 5872.45	55.63	105.91	-50.28	40.90	34.00	11.30	34.46	3.89	256 135 Peak																																																															
3 5924.92	53.93	68.26	-14.33	39.17	34.00	11.35	34.47	3.88	256 135 Peak																																																															
4 5928.22	54.94	68.20	-13.26	40.18	34.00	11.35	34.47	3.88	256 135 Peak																																																															


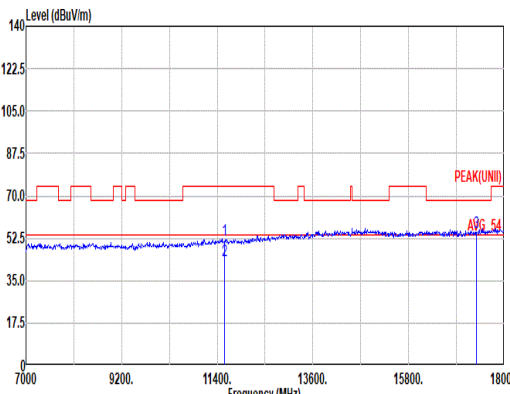
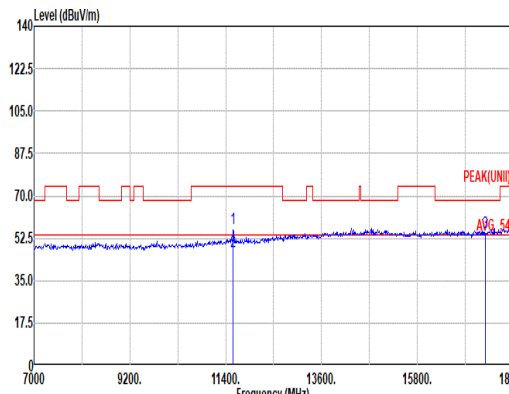


Mode	50																																																																																	
	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11570.00</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>35.19</td><td>38.60</td><td>15.76</td><td>40.25</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11570.00</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>27.11</td><td>38.60</td><td>15.75</td><td>40.24</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17355.00</td><td>55.06</td><td>68.20</td><td>-13.14</td><td>38.95</td><td>40.10</td><td>19.35</td><td>46.39</td><td>3.05</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	51.56	74.00	-22.44	35.19	38.60	15.76	40.25	2.26	--	--	PEAK	2	11570.00	43.48	54.00	-10.52	27.11	38.60	15.75	40.24	2.26	--	--	Average	3	17355.00	55.06	68.20	-13.14	38.95	40.10	19.35	46.39	3.05	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	11570.00	51.56	74.00	-22.44	35.19	38.60	15.76	40.25	2.26	--	--	PEAK																																																																						
2	11570.00	43.48	54.00	-10.52	27.11	38.60	15.75	40.24	2.26	--	--	Average																																																																						
3	17355.00	55.06	68.20	-13.14	38.95	40.10	19.35	46.39	3.05	--	--	PEAK																																																																						



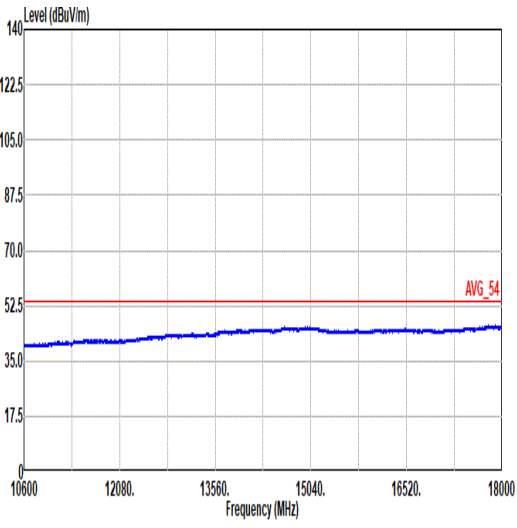
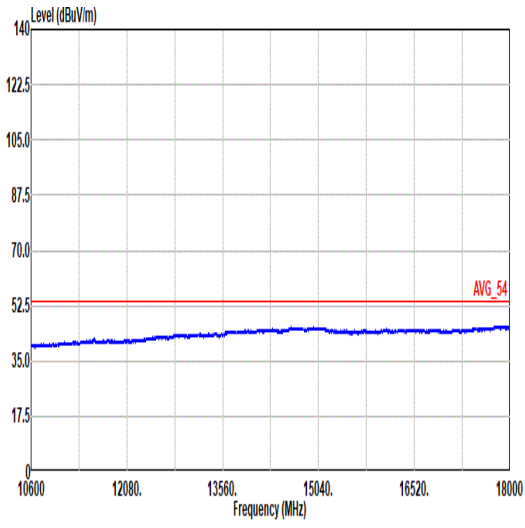


Mode	50	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

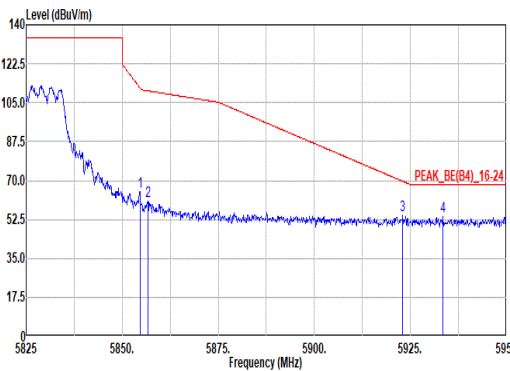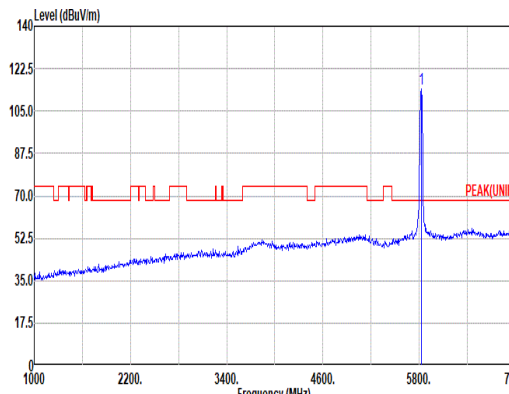
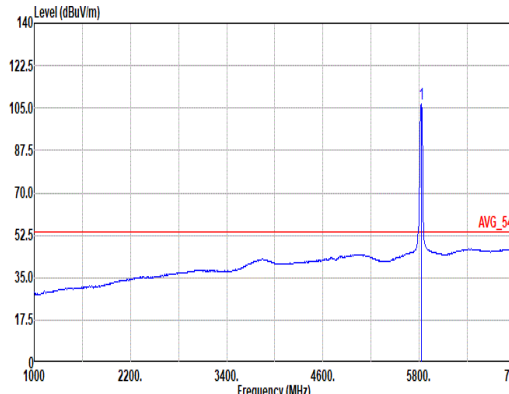


	51																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5854.63</td><td>64.75</td><td>111.65</td><td>-46.90</td><td>50.03</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>368</td></tr><tr><td>2 5856.75</td><td>60.84</td><td>110.31</td><td>-49.47</td><td>46.12</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>368</td></tr><tr><td>3 5923.00</td><td>54.40</td><td>69.67</td><td>-15.27</td><td>39.64</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>368</td></tr><tr><td>4 5933.50</td><td>54.11</td><td>68.20</td><td>-14.09</td><td>39.35</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>368</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5854.63	64.75	111.65	-46.90	50.03	34.00	11.28	34.46	3.90	368	2 5856.75	60.84	110.31	-49.47	46.12	34.00	11.28	34.46	3.90	368	3 5923.00	54.40	69.67	-15.27	39.64	34.00	11.35	34.47	3.88	368	4 5933.50	54.11	68.20	-14.09	39.35	34.00	11.36	34.47	3.87	368	 Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5825.00</td><td>113.89</td><td>-----</td><td>-----</td><td>99.24</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>368</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5825.00	113.89	-----	-----	99.24	33.95	11.25	34.46	3.91	368
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5854.63	64.75	111.65	-46.90	50.03	34.00	11.28	34.46	3.90	368																																																																																																							
2 5856.75	60.84	110.31	-49.47	46.12	34.00	11.28	34.46	3.90	368																																																																																																							
3 5923.00	54.40	69.67	-15.27	39.64	34.00	11.35	34.47	3.88	368																																																																																																							
4 5933.50	54.11	68.20	-14.09	39.35	34.00	11.36	34.47	3.87	368																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5825.00	113.89	-----	-----	99.24	33.95	11.25	34.46	3.91	368																																																																																																							
Avg	Blank	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5825.00</td><td>106.71</td><td>-----</td><td>-----</td><td>92.06</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>368</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5825.00	106.71	-----	-----	92.06	33.95	11.25	34.46	3.91	368																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5825.00	106.71	-----	-----	92.06	33.95	11.25	34.46	3.91	368																																																																																																							

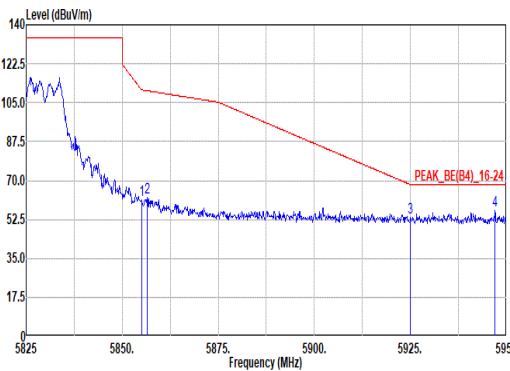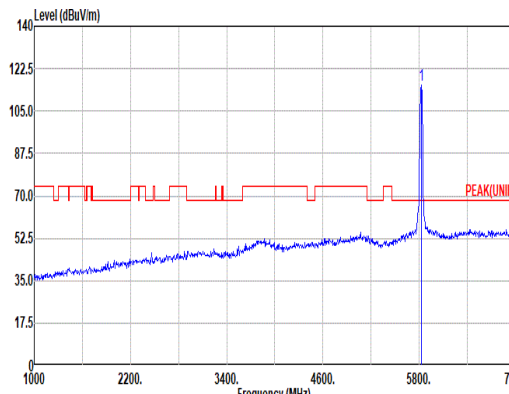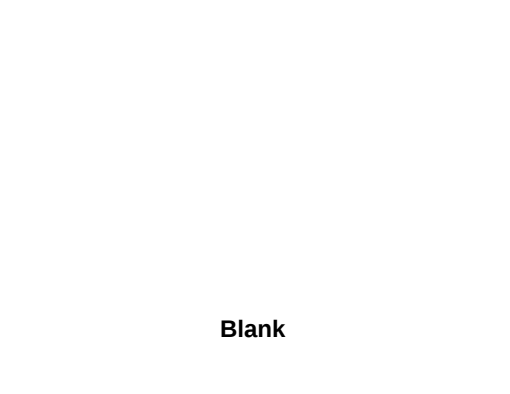
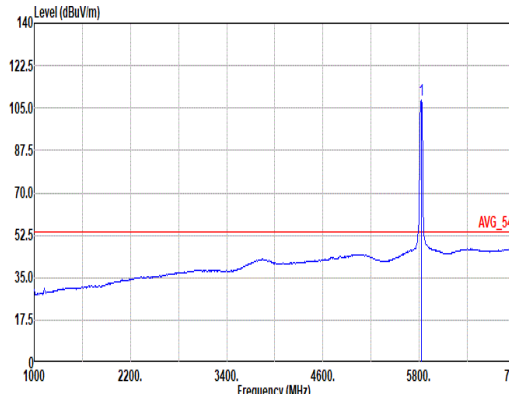


	51																																																																																																																																			
Mode	Band Edge																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																			
ANT	1+2																																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5855.00</td><td>61.38</td><td>110.80</td><td>-49.42</td><td>46.66</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>274</td><td>132 Peak</td></tr><tr><td>2 5856.50</td><td>62.11</td><td>110.30</td><td>-48.27</td><td>47.39</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>274</td><td>132 Peak</td></tr><tr><td>3 5925.00</td><td>53.21</td><td>68.20</td><td>-14.99</td><td>38.45</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>274</td><td>132 Peak</td></tr><tr><td>4 5947.00</td><td>56.78</td><td>68.20</td><td>-11.42</td><td>42.01</td><td>34.00</td><td>11.37</td><td>34.47</td><td>3.87</td><td>274</td><td>132 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5855.00	61.38	110.80	-49.42	46.66	34.00	11.28	34.46	3.90	274	132 Peak	2 5856.50	62.11	110.30	-48.27	47.39	34.00	11.28	34.46	3.90	274	132 Peak	3 5925.00	53.21	68.20	-14.99	38.45	34.00	11.35	34.47	3.88	274	132 Peak	4 5947.00	56.78	68.20	-11.42	42.01	34.00	11.37	34.47	3.87	274	132 Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNI) Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>115.78</td><td>-----</td><td>-----</td><td>101.11</td><td>33.96</td><td>11.26</td><td>34.46</td><td>3.91</td><td>274</td><td>132 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	115.78	-----	-----	101.11	33.96	11.26	34.46	3.91	274	132 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5855.00	61.38	110.80	-49.42	46.66	34.00	11.28	34.46	3.90	274	132 Peak																																																																																																																										
2 5856.50	62.11	110.30	-48.27	47.39	34.00	11.28	34.46	3.90	274	132 Peak																																																																																																																										
3 5925.00	53.21	68.20	-14.99	38.45	34.00	11.35	34.47	3.88	274	132 Peak																																																																																																																										
4 5947.00	56.78	68.20	-11.42	42.01	34.00	11.37	34.47	3.87	274	132 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5825.00	115.78	-----	-----	101.11	33.96	11.26	34.46	3.91	274	132 PEAK																																																																																																																										
Avg	 Level (dBuV/m) Frequency (MHz) Blank Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>108.51</td><td>-----</td><td>-----</td><td>93.86</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>274</td><td>132 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	108.51	-----	-----	93.86	33.95	11.25	34.46	3.91	274	132 AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>108.51</td><td>-----</td><td>-----</td><td>93.86</td><td>33.95</td><td>11.25</td><td>34.46</td><td>3.91</td><td>274</td><td>132 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	108.51	-----	-----	93.86	33.95	11.25	34.46	3.91	274	132 AVERAGE																																	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5825.00	108.51	-----	-----	93.86	33.95	11.25	34.46	3.91	274	132 AVERAGE																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5825.00	108.51	-----	-----	93.86	33.95	11.25	34.46	3.91	274	132 AVERAGE																																																																																																																										


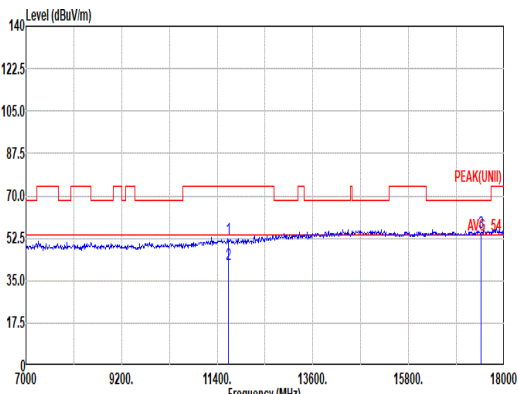
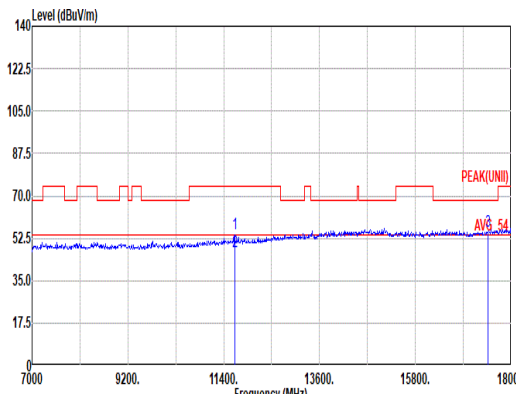


		51																																																																															
Mode	Harmonic																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																
ANT	1+2																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg																																																																																	
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL																																																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>35.98</td><td>38.60</td><td>15.80</td><td>40.31</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>25.54</td><td>38.60</td><td>15.81</td><td>40.32</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>54.96</td><td>68.20</td><td>-13.24</td><td>38.72</td><td>40.13</td><td>19.43</td><td>46.41</td><td>3.09</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	52.33	74.00	-21.67	35.98	38.60	15.80	40.31	2.26	--	--	PEAK	2	11650.00	41.89	54.00	-12.11	25.54	38.60	15.81	40.32	2.26	--	--	Average	3	17475.00	54.96	68.20	-13.24	38.72	40.13	19.43	46.41	3.09	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11650.00	52.33	74.00	-21.67	35.98	38.60	15.80	40.31	2.26	--	--	PEAK																																																																					
2	11650.00	41.89	54.00	-12.11	25.54	38.60	15.81	40.32	2.26	--	--	Average																																																																					
3	17475.00	54.96	68.20	-13.24	38.72	40.13	19.43	46.41	3.09	--	--	PEAK																																																																					
Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>38.25</td><td>38.60</td><td>15.81</td><td>40.32</td><td>2.26</td><td>285</td><td>190</td><td>PEAK</td></tr><tr><td>2</td><td>11650.00</td><td>47.00</td><td>54.00</td><td>-7.00</td><td>30.65</td><td>38.60</td><td>15.81</td><td>40.32</td><td>2.26</td><td>285</td><td>190</td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>55.36</td><td>68.20</td><td>-12.84</td><td>39.12</td><td>40.13</td><td>19.43</td><td>46.41</td><td>3.09</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	54.60	74.00	-19.40	38.25	38.60	15.81	40.32	2.26	285	190	PEAK	2	11650.00	47.00	54.00	-7.00	30.65	38.60	15.81	40.32	2.26	285	190	Average	3	17475.00	55.36	68.20	-12.84	39.12	40.13	19.43	46.41	3.09	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11650.00	54.60	74.00	-19.40	38.25	38.60	15.81	40.32	2.26	285	190	PEAK																																																																					
2	11650.00	47.00	54.00	-7.00	30.65	38.60	15.81	40.32	2.26	285	190	Average																																																																					
3	17475.00	55.36	68.20	-12.84	39.12	40.13	19.43	46.41	3.09	--	--	PEAK																																																																					


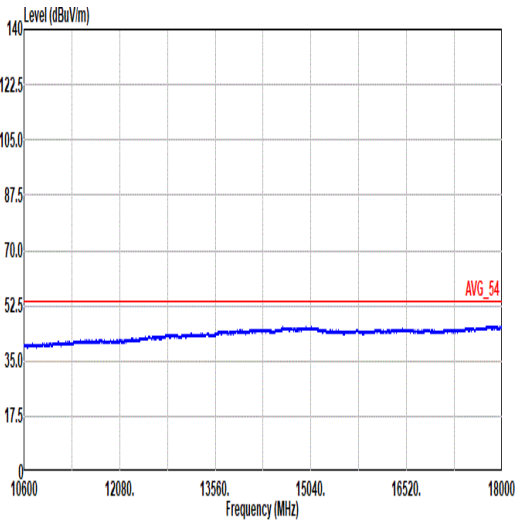
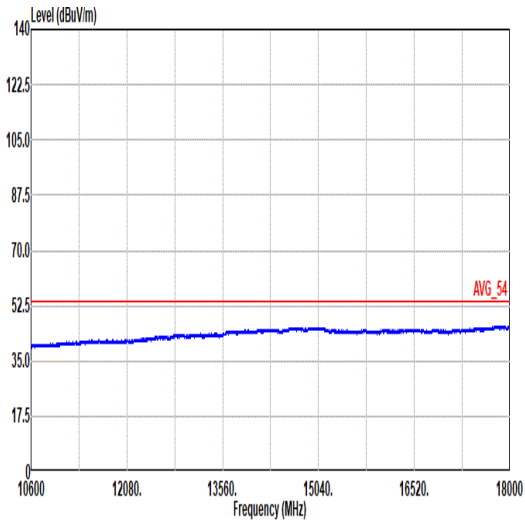


Mode	51	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

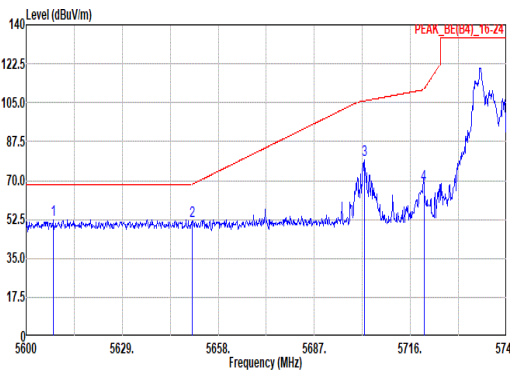
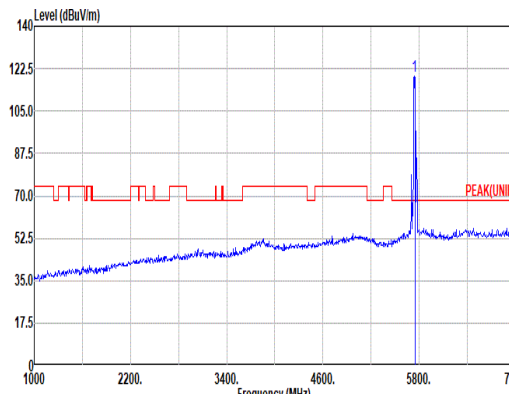
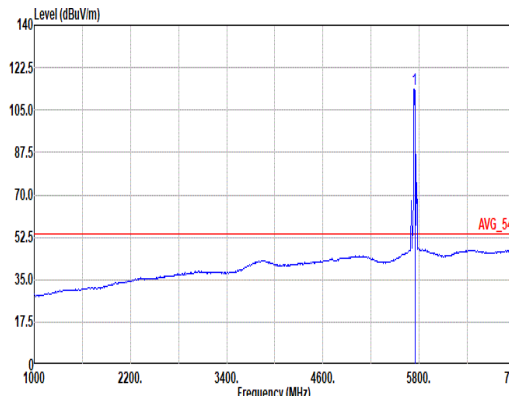


Mode	52																																																																																																																																					
	Band Edge																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial_26/0RU_5745MHz																																																																																																																																					
ANT	1+2																																																																																																																																					
Pol.	Horizontal						Fundamental																																																																																																																															
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5600.27</td><td>52.28</td><td>68.20</td><td>-15.92</td><td>38.42</td><td>33.25</td><td>11.16</td><td>34.45</td><td>3.90</td><td>400</td><td>114</td><td>Peak</td></tr><tr><td>2 5658.03</td><td>51.83</td><td>68.22</td><td>-16.39</td><td>37.69</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>Peak</td></tr><tr><td>3 5702.23</td><td>79.07</td><td>105.82</td><td>-26.75</td><td>64.61</td><td>33.80</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>Peak</td></tr><tr><td>4 5720.06</td><td>68.36</td><td>110.94</td><td>-42.58</td><td>53.86</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5600.27	52.28	68.20	-15.92	38.42	33.25	11.16	34.45	3.90	400	114	Peak	2 5658.03	51.83	68.22	-16.39	37.69	33.50	11.18	34.45	3.91	400	114	Peak	3 5702.23	79.07	105.82	-26.75	64.61	33.80	11.20	34.45	3.91	400	114	Peak	4 5720.06	68.36	110.94	-42.58	53.86	33.84	11.20	34.45	3.91	400	114	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>119.27</td><td>-----</td><td>-----</td><td>104.72</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	119.27	-----	-----	104.72	33.88	11.21	34.45	3.91	400	114	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5600.27	52.28	68.20	-15.92	38.42	33.25	11.16	34.45	3.90	400	114	Peak																																																																																																																											
2 5658.03	51.83	68.22	-16.39	37.69	33.50	11.18	34.45	3.91	400	114	Peak																																																																																																																											
3 5702.23	79.07	105.82	-26.75	64.61	33.80	11.20	34.45	3.91	400	114	Peak																																																																																																																											
4 5720.06	68.36	110.94	-42.58	53.86	33.84	11.20	34.45	3.91	400	114	Peak																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5745.00	119.27	-----	-----	104.72	33.88	11.21	34.45	3.91	400	114	PEAK																																																																																																																											
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>113.74</td><td>-----</td><td>-----</td><td>99.19</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>400</td><td>114</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	113.74	-----	-----	99.19	33.88	11.21	34.45	3.91	400	114	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5745.00	113.74	-----	-----	99.19	33.88	11.21	34.45	3.91	400	114	AVERAGE																																																																																																																											

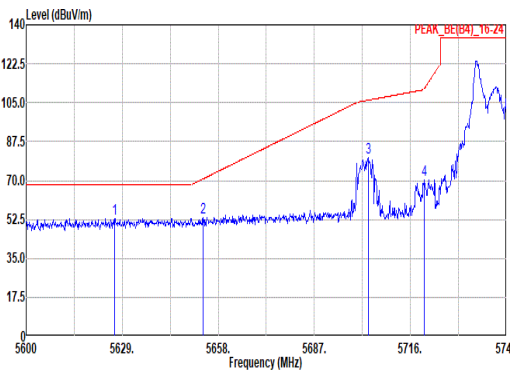
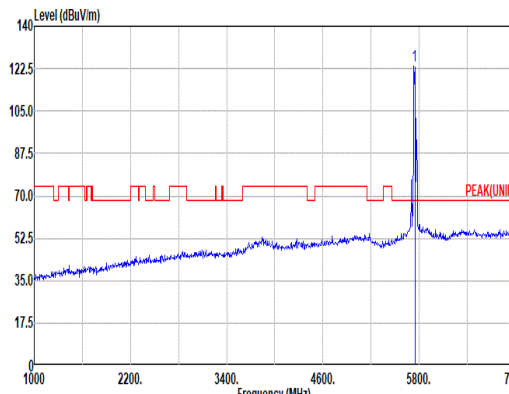
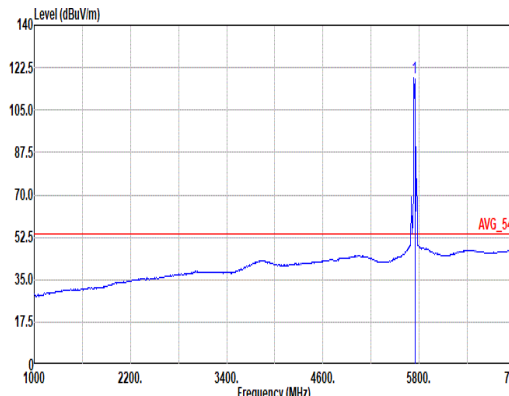


Mode	52																																																																																																																																				
	Band Edge																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial_26/0RU_5745MHz																																																																																																																																				
ANT	1+2																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5626.68</td><td>53.06</td><td>68.20</td><td>-15.14</td><td>39.08</td><td>33.36</td><td>11.17</td><td>34.45</td><td>3.90</td><td>267</td><td>222</td><td>Peak</td></tr><tr><td>2 5653.36</td><td>53.25</td><td>70.70</td><td>-17.45</td><td>39.09</td><td>33.52</td><td>11.18</td><td>34.45</td><td>3.91</td><td>267</td><td>222</td><td>Peak</td></tr><tr><td>3 5703.24</td><td>80.44</td><td>106.11</td><td>-25.67</td><td>65.97</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>267</td><td>222</td><td>Peak</td></tr><tr><td>4 5720.21</td><td>70.47</td><td>111.27</td><td>-40.80</td><td>55.97</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>267</td><td>222</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5626.68	53.06	68.20	-15.14	39.08	33.36	11.17	34.45	3.90	267	222	Peak	2 5653.36	53.25	70.70	-17.45	39.09	33.52	11.18	34.45	3.91	267	222	Peak	3 5703.24	80.44	106.11	-25.67	65.97	33.81	11.20	34.45	3.91	267	222	Peak	4 5720.21	70.47	111.27	-40.80	55.97	33.84	11.20	34.45	3.91	267	222	Peak	 Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>123.77</td><td>-----</td><td>-----</td><td>109.23</td><td>33.87</td><td>11.21</td><td>34.45</td><td>3.91</td><td>267</td><td>222</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	123.77	-----	-----	109.23	33.87	11.21	34.45	3.91	267	222	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																											
1 5626.68	53.06	68.20	-15.14	39.08	33.36	11.17	34.45	3.90	267	222	Peak																																																																																																																										
2 5653.36	53.25	70.70	-17.45	39.09	33.52	11.18	34.45	3.91	267	222	Peak																																																																																																																										
3 5703.24	80.44	106.11	-25.67	65.97	33.81	11.20	34.45	3.91	267	222	Peak																																																																																																																										
4 5720.21	70.47	111.27	-40.80	55.97	33.84	11.20	34.45	3.91	267	222	Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																											
1 5745.00	123.77	-----	-----	109.23	33.87	11.21	34.45	3.91	267	222	PEAK																																																																																																																										
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>118.36</td><td>-----</td><td>-----</td><td>103.82</td><td>33.87</td><td>11.21</td><td>34.45</td><td>3.91</td><td>267</td><td>222</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	118.36	-----	-----	103.82	33.87	11.21	34.45	3.91	267	222	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																											
1 5745.00	118.36	-----	-----	103.82	33.87	11.21	34.45	3.91	267	222	AVERAGE																																																																																																																										

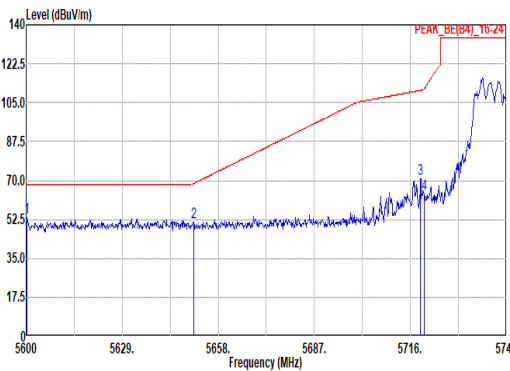
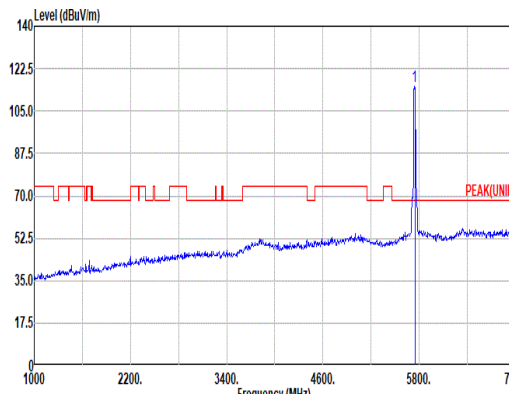
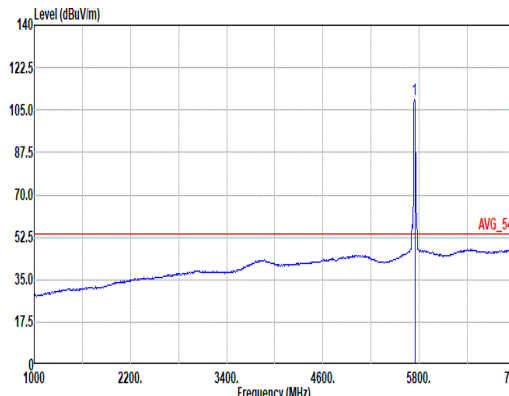


Mode	53																																																																																																																																			
	Band Edge																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial_106/53RU_5745MHz																																																																																																																																			
ANT	1+2																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5600.15</td><td>53.29</td><td>68.20</td><td>-14.91</td><td>39.48</td><td>33.20</td><td>11.16</td><td>34.45</td><td>3.90</td><td>400</td><td>114 Peak</td></tr><tr><td>2 5658.61</td><td>51.39</td><td>68.65</td><td>-17.26</td><td>37.25</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>400</td><td>114 Peak</td></tr><tr><td>3 5719.05</td><td>70.55</td><td>110.53</td><td>-39.98</td><td>56.05</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114 Peak</td></tr><tr><td>4 5720.21</td><td>63.77</td><td>111.27</td><td>-47.50</td><td>49.27</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>400</td><td>114 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5600.15	53.29	68.20	-14.91	39.48	33.20	11.16	34.45	3.90	400	114 Peak	2 5658.61	51.39	68.65	-17.26	37.25	33.50	11.18	34.45	3.91	400	114 Peak	3 5719.05	70.55	110.53	-39.98	56.05	33.84	11.20	34.45	3.91	400	114 Peak	4 5720.21	63.77	111.27	-47.50	49.27	33.84	11.20	34.45	3.91	400	114 Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>115.43</td><td>-----</td><td>-----</td><td>100.88</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>400</td><td>114 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	115.43	-----	-----	100.88	33.88	11.21	34.45	3.91	400	114 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5600.15	53.29	68.20	-14.91	39.48	33.20	11.16	34.45	3.90	400	114 Peak																																																																																																																										
2 5658.61	51.39	68.65	-17.26	37.25	33.50	11.18	34.45	3.91	400	114 Peak																																																																																																																										
3 5719.05	70.55	110.53	-39.98	56.05	33.84	11.20	34.45	3.91	400	114 Peak																																																																																																																										
4 5720.21	63.77	111.27	-47.50	49.27	33.84	11.20	34.45	3.91	400	114 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5745.00	115.43	-----	-----	100.88	33.88	11.21	34.45	3.91	400	114 PEAK																																																																																																																										
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:2.400kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5745.00</td><td>109.38</td><td>-----</td><td>-----</td><td>94.83</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>400</td><td>114 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5745.00	109.38	-----	-----	94.83	33.88	11.21	34.45	3.91	400	114 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5745.00	109.38	-----	-----	94.83	33.88	11.21	34.45	3.91	400	114 AVERAGE																																																																																																																										

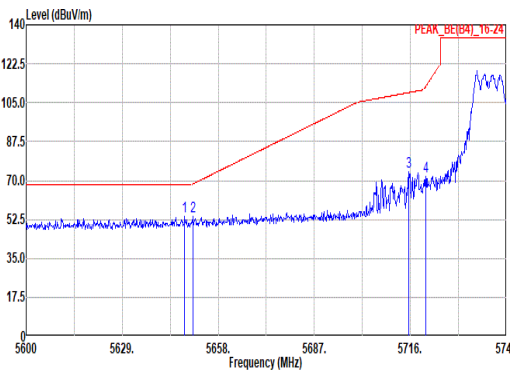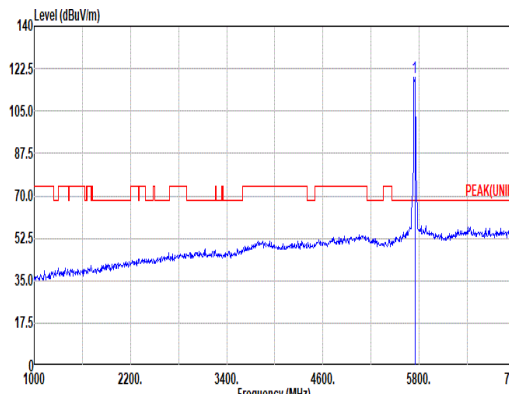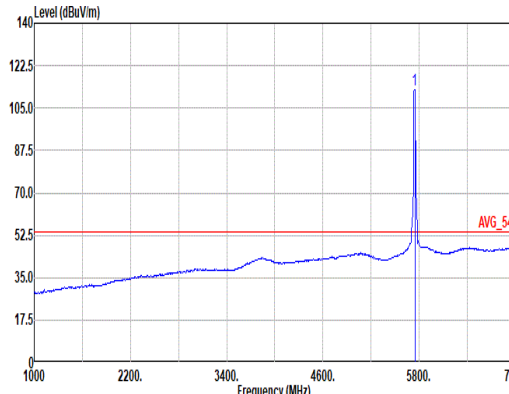


Mode	53																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial_106/53RU_5745MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.85</td><td>54.00</td><td>68.20</td><td>-14.20</td><td>39.88</td><td>33.49</td><td>11.18</td><td>34.45</td><td>3.90</td><td>273</td><td>222</td><td>Peak</td></tr><tr><td>2</td><td>5658.32</td><td>53.86</td><td>68.43</td><td>-14.57</td><td>39.72</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>273</td><td>222</td><td>Peak</td></tr><tr><td>3</td><td>5715.42</td><td>74.13</td><td>109.52</td><td>-35.39</td><td>59.64</td><td>33.83</td><td>11.20</td><td>34.45</td><td>3.91</td><td>273</td><td>222</td><td>Peak</td></tr><tr><td>4</td><td>5720.64</td><td>71.60</td><td>112.26</td><td>-40.66</td><td>57.10</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>273</td><td>222</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5647.85	54.00	68.20	-14.20	39.88	33.49	11.18	34.45	3.90	273	222	Peak	2	5658.32	53.86	68.43	-14.57	39.72	33.50	11.18	34.45	3.91	273	222	Peak	3	5715.42	74.13	109.52	-35.39	59.64	33.83	11.20	34.45	3.91	273	222	Peak	4	5720.64	71.60	112.26	-40.66	57.10	33.84	11.20	34.45	3.91	273	222	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>118.73</td><td>-----</td><td>-----</td><td>104.19</td><td>33.87</td><td>11.21</td><td>34.45</td><td>3.91</td><td>273</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	118.73	-----	-----	104.19	33.87	11.21	34.45	3.91	273	222	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5647.85	54.00	68.20	-14.20	39.88	33.49	11.18	34.45	3.90	273	222	Peak																																																																																																																															
2	5658.32	53.86	68.43	-14.57	39.72	33.50	11.18	34.45	3.91	273	222	Peak																																																																																																																															
3	5715.42	74.13	109.52	-35.39	59.64	33.83	11.20	34.45	3.91	273	222	Peak																																																																																																																															
4	5720.64	71.60	112.26	-40.66	57.10	33.84	11.20	34.45	3.91	273	222	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5745.00	118.73	-----	-----	104.19	33.87	11.21	34.45	3.91	273	222	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:2.400kHz SNT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>112.71</td><td>-----</td><td>-----</td><td>98.16</td><td>33.88</td><td>11.21</td><td>34.45</td><td>3.91</td><td>273</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	112.71	-----	-----	98.16	33.88	11.21	34.45	3.91	273	222	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5745.00	112.71	-----	-----	98.16	33.88	11.21	34.45	3.91	273	222	AVERAGE																																																																																																																															


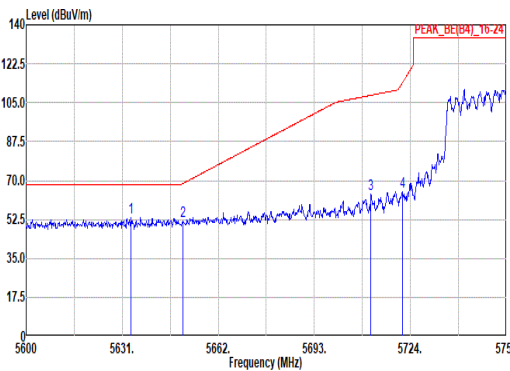
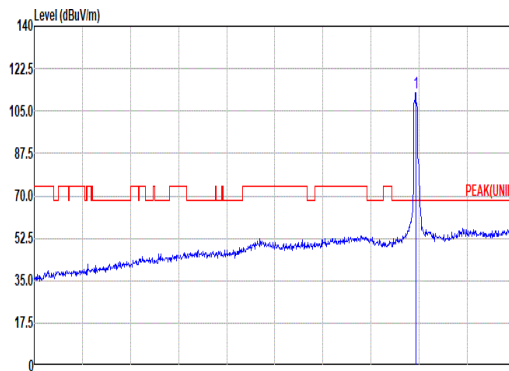
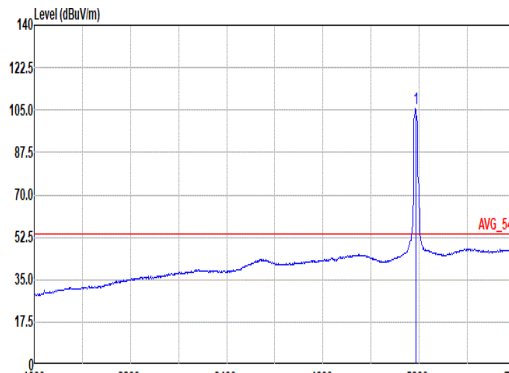


Mode	54																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																			
ANT	1+2																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5633.79</td><td>53.10</td><td>68.20</td><td>-15.10</td><td>39.08</td><td>33.40</td><td>11.17</td><td>34.45</td><td>3.90</td><td>370</td><td>114 Peak</td></tr><tr><td>2 5658.53</td><td>51.87</td><td>68.59</td><td>-16.72</td><td>37.73</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>370</td><td>114 Peak</td></tr><tr><td>3 5711.29</td><td>63.68</td><td>108.36</td><td>-44.68</td><td>49.20</td><td>33.82</td><td>11.20</td><td>34.45</td><td>3.91</td><td>370</td><td>114 Peak</td></tr><tr><td>4 5721.37</td><td>64.97</td><td>113.91</td><td>-48.94</td><td>50.47</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>370</td><td>114 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5633.79	53.10	68.20	-15.10	39.08	33.40	11.17	34.45	3.90	370	114 Peak	2 5658.53	51.87	68.59	-16.72	37.73	33.50	11.18	34.45	3.91	370	114 Peak	3 5711.29	63.68	108.36	-44.68	49.20	33.82	11.20	34.45	3.91	370	114 Peak	4 5721.37	64.97	113.91	-48.94	50.47	33.84	11.20	34.45	3.91	370	114 Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5755.00</td><td>112.48</td><td>-----</td><td>-----</td><td>97.90</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>370</td><td>114 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5755.00	112.48	-----	-----	97.90	33.90	11.22	34.46	3.92	370	114 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5633.79	53.10	68.20	-15.10	39.08	33.40	11.17	34.45	3.90	370	114 Peak																																																																																																																										
2 5658.53	51.87	68.59	-16.72	37.73	33.50	11.18	34.45	3.91	370	114 Peak																																																																																																																										
3 5711.29	63.68	108.36	-44.68	49.20	33.82	11.20	34.45	3.91	370	114 Peak																																																																																																																										
4 5721.37	64.97	113.91	-48.94	50.47	33.84	11.20	34.45	3.91	370	114 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5755.00	112.48	-----	-----	97.90	33.90	11.22	34.46	3.92	370	114 PEAK																																																																																																																										
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5755.00</td><td>105.44</td><td>-----</td><td>-----</td><td>90.87</td><td>33.90</td><td>11.21</td><td>34.46</td><td>3.92</td><td>370</td><td>114 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5755.00	105.44	-----	-----	90.87	33.90	11.21	34.46	3.92	370	114 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5755.00	105.44	-----	-----	90.87	33.90	11.21	34.46	3.92	370	114 AVERAGE																																																																																																																										

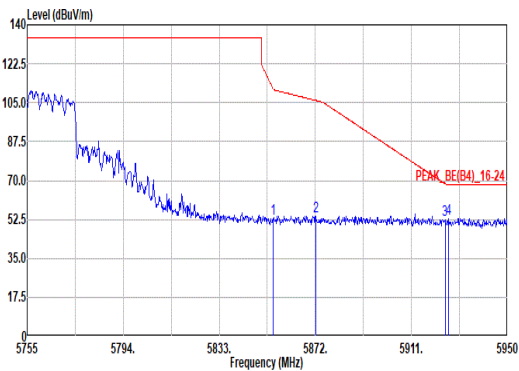


Mode	54																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH10-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5854.04</td><td>52.61</td><td>111.17</td><td>-58.56</td><td>37.89</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>370</td><td>114</td><td>Peak</td></tr><tr><td>2</td><td>5872.20</td><td>53.88</td><td>105.98</td><td>-52.10</td><td>39.15</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>370</td><td>114</td><td>Peak</td></tr><tr><td>3</td><td>5924.65</td><td>52.51</td><td>68.46</td><td>-15.95</td><td>37.75</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>370</td><td>114</td><td>Peak</td></tr><tr><td>4</td><td>5926.21</td><td>53.01</td><td>68.20</td><td>-15.19</td><td>38.25</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>370</td><td>114</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5854.04	52.61	111.17	-58.56	37.89	34.00	11.28	34.46	3.90	370	114	Peak	2	5872.20	53.88	105.98	-52.10	39.15	34.00	11.30	34.46	3.89	370	114	Peak	3	5924.65	52.51	68.46	-15.95	37.75	34.00	11.35	34.47	3.88	370	114	Peak	4	5926.21	53.01	68.20	-15.19	38.25	34.00	11.35	34.47	3.88	370	114	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																											
1	5854.04	52.61	111.17	-58.56	37.89	34.00	11.28	34.46	3.90	370	114	Peak																																																																								
2	5872.20	53.88	105.98	-52.10	39.15	34.00	11.30	34.46	3.89	370	114	Peak																																																																								
3	5924.65	52.51	68.46	-15.95	37.75	34.00	11.35	34.47	3.88	370	114	Peak																																																																								
4	5926.21	53.01	68.20	-15.19	38.25	34.00	11.35	34.47	3.88	370	114	Peak																																																																								

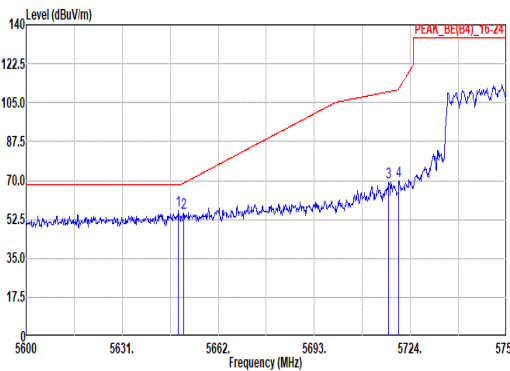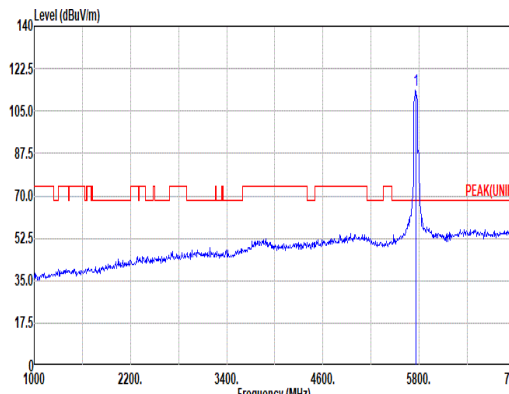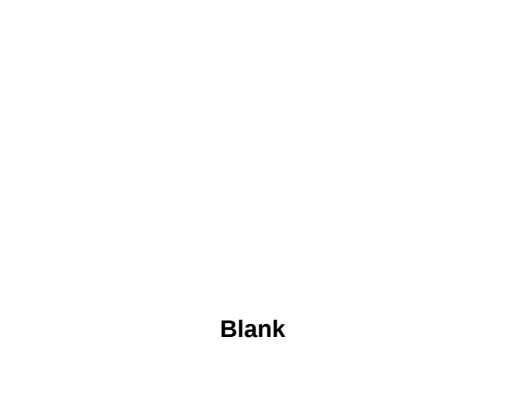
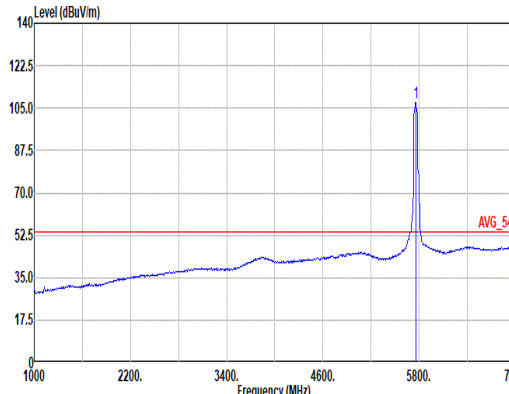


	54																																																																																																																																										
Mode	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 12 3 4 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.14</td><td>56.69</td><td>68.20</td><td>-11.51</td><td>42.57</td><td>33.49</td><td>11.18</td><td>34.45</td><td>3.90</td><td>300</td><td>131</td><td>Peak</td></tr><tr><td>2</td><td>5658.84</td><td>55.48</td><td>68.82</td><td>-13.34</td><td>41.33</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>300</td><td>131</td><td>Peak</td></tr><tr><td>3</td><td>5717.03</td><td>69.26</td><td>109.97</td><td>-40.71</td><td>54.77</td><td>33.83</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>131</td><td>Peak</td></tr><tr><td>4</td><td>5728.28</td><td>69.78</td><td>111.44</td><td>-41.66</td><td>55.28</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>131</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.14	56.69	68.20	-11.51	42.57	33.49	11.18	34.45	3.90	300	131	Peak	2	5658.84	55.48	68.82	-13.34	41.33	33.51	11.18	34.45	3.91	300	131	Peak	3	5717.03	69.26	109.97	-40.71	54.77	33.83	11.20	34.45	3.91	300	131	Peak	4	5728.28	69.78	111.44	-41.66	55.28	33.84	11.20	34.45	3.91	300	131	Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNI) Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>113.45</td><td>-----</td><td>-----</td><td>98.88</td><td>33.90</td><td>11.21</td><td>34.46</td><td>3.92</td><td>300</td><td>131</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	113.45	-----	-----	98.88	33.90	11.21	34.46	3.92	300	131	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5649.14	56.69	68.20	-11.51	42.57	33.49	11.18	34.45	3.90	300	131	Peak																																																																																																																															
2	5658.84	55.48	68.82	-13.34	41.33	33.51	11.18	34.45	3.91	300	131	Peak																																																																																																																															
3	5717.03	69.26	109.97	-40.71	54.77	33.83	11.20	34.45	3.91	300	131	Peak																																																																																																																															
4	5728.28	69.78	111.44	-41.66	55.28	33.84	11.20	34.45	3.91	300	131	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5755.00	113.45	-----	-----	98.88	33.90	11.21	34.46	3.92	300	131	PEAK																																																																																																																															
Avg	 Level (dBuV/m) Frequency (MHz) Blank Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>107.12</td><td>-----</td><td>-----</td><td>92.54</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>300</td><td>131</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	107.12	-----	-----	92.54	33.90	11.22	34.46	3.92	300	131	AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>107.12</td><td>-----</td><td>-----</td><td>92.54</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>300</td><td>131</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	107.12	-----	-----	92.54	33.90	11.22	34.46	3.92	300	131	AVERAGE																																							
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5755.00	107.12	-----	-----	92.54	33.90	11.22	34.46	3.92	300	131	AVERAGE																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5755.00	107.12	-----	-----	92.54	33.90	11.22	34.46	3.92	300	131	AVERAGE																																																																																																																															


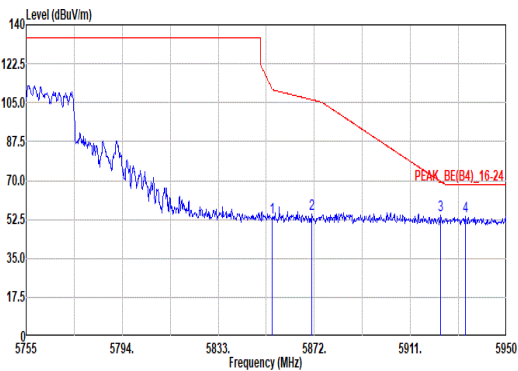


Mode	54																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																
ANT	1+2																																																																																
Pol.	Vertical						Fundamental																																																																										
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH10-E_LE2C05A10EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5854.84</td><td>53.43</td><td>111.17</td><td>-57.74</td><td>38.71</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>300</td></tr><tr><td>2 5870.83</td><td>55.11</td><td>106.37</td><td>-51.26</td><td>40.37</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.90</td><td>300</td></tr><tr><td>3 5923.29</td><td>54.27</td><td>69.46</td><td>-15.19</td><td>39.51</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>300</td></tr><tr><td>4 5933.23</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>39.30</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>300</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5854.84	53.43	111.17	-57.74	38.71	34.00	11.28	34.46	3.90	300	2 5870.83	55.11	106.37	-51.26	40.37	34.00	11.30	34.46	3.90	300	3 5923.29	54.27	69.46	-15.19	39.51	34.00	11.35	34.47	3.88	300	4 5933.23	54.06	68.20	-14.14	39.30	34.00	11.36	34.47	3.87	300	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																								
1 5854.84	53.43	111.17	-57.74	38.71	34.00	11.28	34.46	3.90	300																																																																								
2 5870.83	55.11	106.37	-51.26	40.37	34.00	11.30	34.46	3.90	300																																																																								
3 5923.29	54.27	69.46	-15.19	39.51	34.00	11.35	34.47	3.88	300																																																																								
4 5933.23	54.06	68.20	-14.14	39.30	34.00	11.36	34.47	3.87	300																																																																								



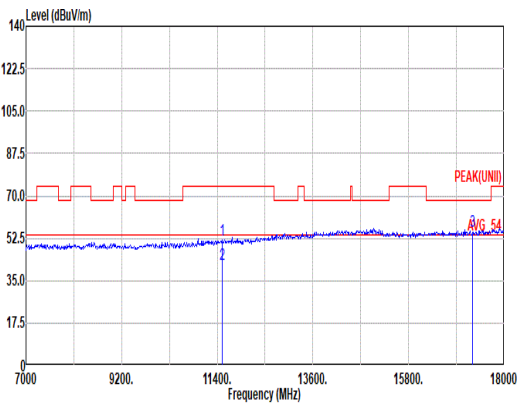
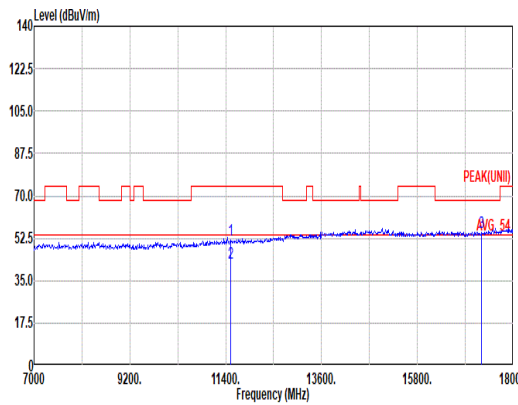


Mode	54																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																																													
ANT	1+2																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																														
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>51.90</td><td>74.00</td><td>-22.10</td><td>35.44</td><td>38.66</td><td>15.72</td><td>40.18</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>25.41</td><td>38.68</td><td>15.71</td><td>40.17</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17265.00</td><td>55.22</td><td>68.20</td><td>-12.98</td><td>39.32</td><td>40.04</td><td>19.24</td><td>46.37</td><td>2.99</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	51.90	74.00	-22.10	35.44	38.66	15.72	40.18	2.26	--	--	PEAK	2	11510.00	41.89	54.00	-12.11	25.41	38.68	15.71	40.17	2.26	--	--	Average	3	17265.00	55.22	68.20	-12.98	39.32	40.04	19.24	46.37	2.99	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>51.97</td><td>74.00</td><td>-22.03</td><td>35.49</td><td>38.68</td><td>15.71</td><td>40.17</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>25.80</td><td>38.68</td><td>15.71</td><td>40.17</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17265.00</td><td>55.01</td><td>68.20</td><td>-13.19</td><td>38.94</td><td>40.15</td><td>19.28</td><td>46.37</td><td>3.01</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	51.97	74.00	-22.03	35.49	38.68	15.71	40.17	2.26	--	--	PEAK	2	11510.00	42.28	54.00	-11.72	25.80	38.68	15.71	40.17	2.26	--	--	Average	3	17265.00	55.01	68.20	-13.19	38.94	40.15	19.28	46.37	3.01	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																				
1	11510.00	51.90	74.00	-22.10	35.44	38.66	15.72	40.18	2.26	--	--	PEAK																																																																																																																																																		
2	11510.00	41.89	54.00	-12.11	25.41	38.68	15.71	40.17	2.26	--	--	Average																																																																																																																																																		
3	17265.00	55.22	68.20	-12.98	39.32	40.04	19.24	46.37	2.99	--	--	PEAK																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																				
1	11510.00	51.97	74.00	-22.03	35.49	38.68	15.71	40.17	2.26	--	--	PEAK																																																																																																																																																		
2	11510.00	42.28	54.00	-11.72	25.80	38.68	15.71	40.17	2.26	--	--	Average																																																																																																																																																		
3	17265.00	55.01	68.20	-13.19	38.94	40.15	19.28	46.37	3.01	--	--	PEAK																																																																																																																																																		

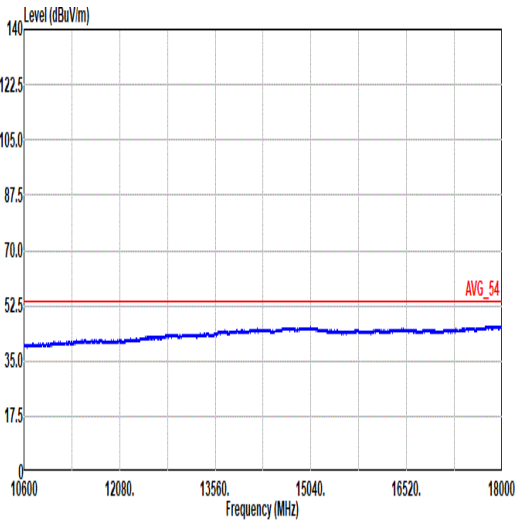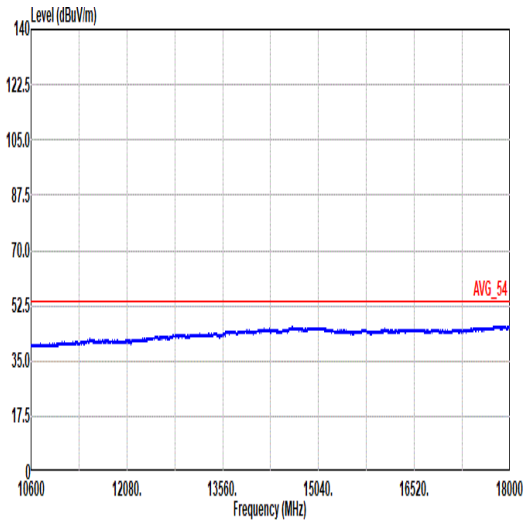


Mode	54	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

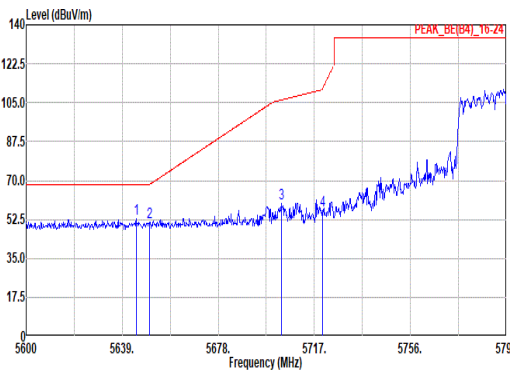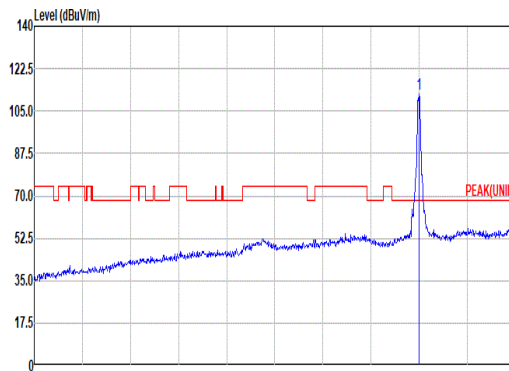
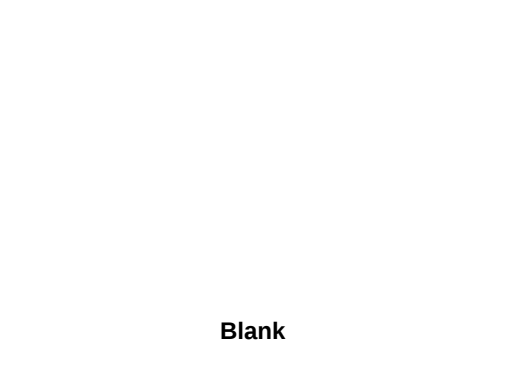
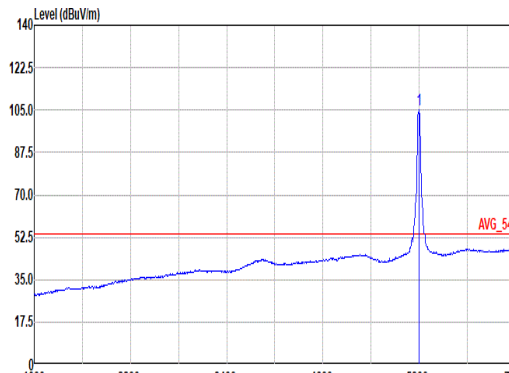


Mode	55																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5644.66</td><td>52.62</td><td>68.20</td><td>-15.58</td><td>38.52</td><td>33.47</td><td>11.18</td><td>34.45</td><td>3.90</td><td>368</td><td>115</td><td>Peak</td></tr><tr><td>2</td><td>5658.12</td><td>51.38</td><td>68.29</td><td>-16.91</td><td>37.24</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>368</td><td>115</td><td>Peak</td></tr><tr><td>3</td><td>5703.55</td><td>59.84</td><td>106.19</td><td>-46.35</td><td>45.37</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>368</td><td>115</td><td>Peak</td></tr><tr><td>4</td><td>5720.32</td><td>56.67</td><td>111.52</td><td>-54.85</td><td>42.17</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>368</td><td>115</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5644.66	52.62	68.20	-15.58	38.52	33.47	11.18	34.45	3.90	368	115	Peak	2	5658.12	51.38	68.29	-16.91	37.24	33.50	11.18	34.45	3.91	368	115	Peak	3	5703.55	59.84	106.19	-46.35	45.37	33.81	11.20	34.45	3.91	368	115	Peak	4	5720.32	56.67	111.52	-54.85	42.17	33.84	11.20	34.45	3.91	368	115	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>112.00</td><td>-----</td><td>-----</td><td>97.41</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>368</td><td>115</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	112.00	-----	-----	97.41	33.90	11.23	34.46	3.92	368	115	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5644.66	52.62	68.20	-15.58	38.52	33.47	11.18	34.45	3.90	368	115	Peak																																																																																																																															
2	5658.12	51.38	68.29	-16.91	37.24	33.50	11.18	34.45	3.91	368	115	Peak																																																																																																																															
3	5703.55	59.84	106.19	-46.35	45.37	33.81	11.20	34.45	3.91	368	115	Peak																																																																																																																															
4	5720.32	56.67	111.52	-54.85	42.17	33.84	11.20	34.45	3.91	368	115	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5795.00	112.00	-----	-----	97.41	33.90	11.23	34.46	3.92	368	115	PEAK																																																																																																																															
Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>105.29</td><td>-----</td><td>-----</td><td>90.70</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>368</td><td>115</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	105.29	-----	-----	90.70	33.90	11.23	34.46	3.92	368	115	AVERAGE	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>105.29</td><td>-----</td><td>-----</td><td>90.70</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>368</td><td>115</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	105.29	-----	-----	90.70	33.90	11.23	34.46	3.92	368	115	AVERAGE																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5795.00	105.29	-----	-----	90.70	33.90	11.23	34.46	3.92	368	115	AVERAGE																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5795.00	105.29	-----	-----	90.70	33.90	11.23	34.46	3.92	368	115	AVERAGE																																																																																																																															

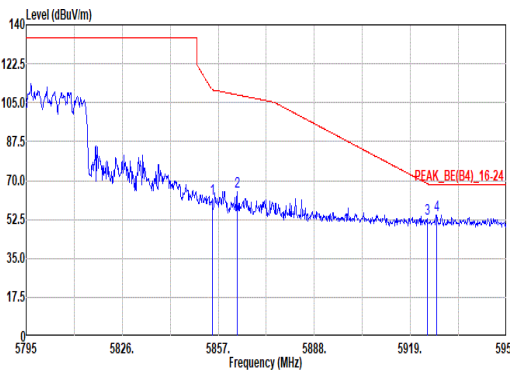


Mode	55																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																							
ANT	1+2																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH10-E_LE2C05A10EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5854.99</td><td>61.70</td><td>110.83</td><td>-49.13</td><td>46.98</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>368 115 Peak</td></tr><tr><td>2 5863.05</td><td>65.12</td><td>108.55</td><td>-43.43</td><td>50.39</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td><td>368 115 Peak</td></tr><tr><td>3 5924.43</td><td>52.93</td><td>68.62</td><td>-15.69</td><td>38.17</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>368 115 Peak</td></tr><tr><td>4 5927.37</td><td>54.44</td><td>68.20</td><td>-13.76</td><td>39.68</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>368 115 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5854.99	61.70	110.83	-49.13	46.98	34.00	11.28	34.46	3.90	368 115 Peak	2 5863.05	65.12	108.55	-43.43	50.39	34.00	11.29	34.46	3.90	368 115 Peak	3 5924.43	52.93	68.62	-15.69	38.17	34.00	11.35	34.47	3.88	368 115 Peak	4 5927.37	54.44	68.20	-13.76	39.68	34.00	11.35	34.47	3.88	368 115 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																															
1 5854.99	61.70	110.83	-49.13	46.98	34.00	11.28	34.46	3.90	368 115 Peak																																																															
2 5863.05	65.12	108.55	-43.43	50.39	34.00	11.29	34.46	3.90	368 115 Peak																																																															
3 5924.43	52.93	68.62	-15.69	38.17	34.00	11.35	34.47	3.88	368 115 Peak																																																															
4 5927.37	54.44	68.20	-13.76	39.68	34.00	11.35	34.47	3.88	368 115 Peak																																																															

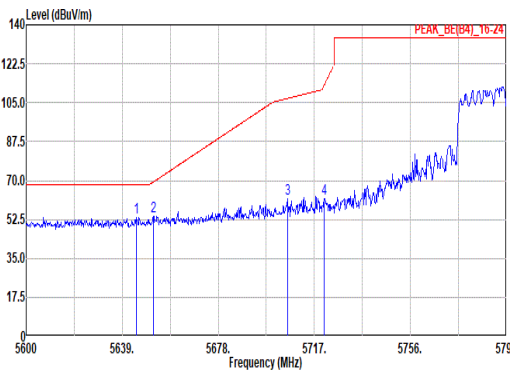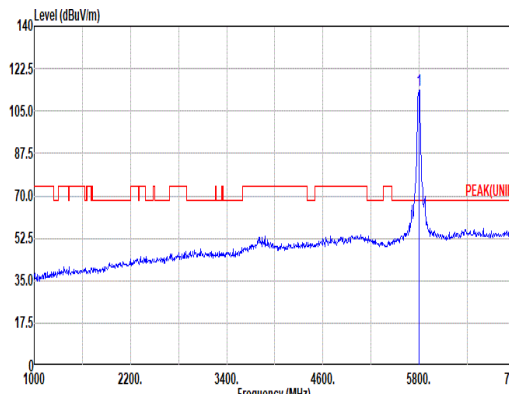
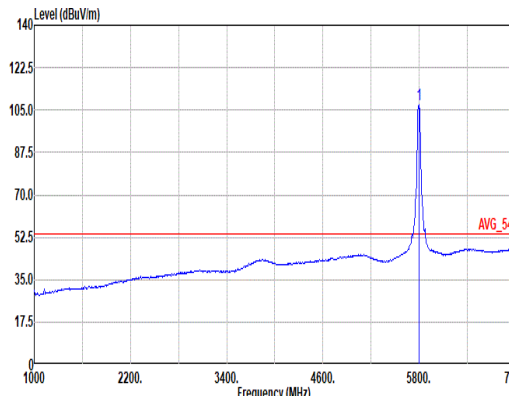


Mode	55																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5644.66</td><td>53.41</td><td>68.20</td><td>-14.79</td><td>39.31</td><td>33.47</td><td>11.18</td><td>34.45</td><td>3.90</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>2</td><td>5651.68</td><td>53.89</td><td>69.44</td><td>-15.55</td><td>39.74</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>3</td><td>5706.08</td><td>61.72</td><td>106.90</td><td>-45.18</td><td>47.25</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>4</td><td>5721.10</td><td>61.96</td><td>113.30</td><td>-51.34</td><td>47.46</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>132</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5644.66	53.41	68.20	-14.79	39.31	33.47	11.18	34.45	3.90	300	132	Peak	2	5651.68	53.89	69.44	-15.55	39.74	33.51	11.18	34.45	3.91	300	132	Peak	3	5706.08	61.72	106.90	-45.18	47.25	33.81	11.20	34.45	3.91	300	132	Peak	4	5721.10	61.96	113.30	-51.34	47.46	33.84	11.20	34.45	3.91	300	132	Peak	 Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>113.66</td><td>-----</td><td>-----</td><td>99.07</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>300</td><td>132</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	113.66	-----	-----	99.07	33.90	11.23	34.46	3.92	300	132	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5644.66	53.41	68.20	-14.79	39.31	33.47	11.18	34.45	3.90	300	132	Peak																																																																																																																															
2	5651.68	53.89	69.44	-15.55	39.74	33.51	11.18	34.45	3.91	300	132	Peak																																																																																																																															
3	5706.08	61.72	106.90	-45.18	47.25	33.81	11.20	34.45	3.91	300	132	Peak																																																																																																																															
4	5721.10	61.96	113.30	-51.34	47.46	33.84	11.20	34.45	3.91	300	132	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5795.00	113.66	-----	-----	99.07	33.90	11.23	34.46	3.92	300	132	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:2.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>107.17</td><td>-----</td><td>-----</td><td>92.58</td><td>33.90</td><td>11.23</td><td>34.46</td><td>3.92</td><td>300</td><td>132</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	107.17	-----	-----	92.58	33.90	11.23	34.46	3.92	300	132	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5795.00	107.17	-----	-----	92.58	33.90	11.23	34.46	3.92	300	132	AVERAGE																																																																																																																															


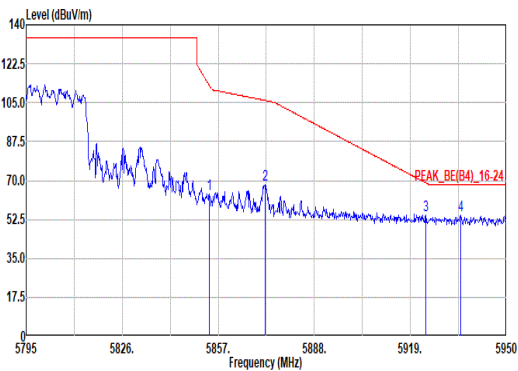


Mode	55																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH10-E_LE2C05A10EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5854.06</td><td>64.02</td><td>112.95</td><td>-48.93</td><td>49.30</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>2</td><td>5872.19</td><td>68.31</td><td>105.99</td><td>-37.68</td><td>53.58</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>3</td><td>5923.96</td><td>54.26</td><td>68.97</td><td>-14.71</td><td>39.50</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>300</td><td>132</td><td>Peak</td></tr><tr><td>4</td><td>5935.12</td><td>54.16</td><td>68.20</td><td>-14.04</td><td>39.40</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>300</td><td>132</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5854.06	64.02	112.95	-48.93	49.30	34.00	11.28	34.46	3.90	300	132	Peak	2	5872.19	68.31	105.99	-37.68	53.58	34.00	11.30	34.46	3.89	300	132	Peak	3	5923.96	54.26	68.97	-14.71	39.50	34.00	11.35	34.47	3.88	300	132	Peak	4	5935.12	54.16	68.20	-14.04	39.40	34.00	11.36	34.47	3.87	300	132	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																											
1	5854.06	64.02	112.95	-48.93	49.30	34.00	11.28	34.46	3.90	300	132	Peak																																																																								
2	5872.19	68.31	105.99	-37.68	53.58	34.00	11.30	34.46	3.89	300	132	Peak																																																																								
3	5923.96	54.26	68.97	-14.71	39.50	34.00	11.35	34.47	3.88	300	132	Peak																																																																								
4	5935.12	54.16	68.20	-14.04	39.40	34.00	11.36	34.47	3.87	300	132	Peak																																																																								


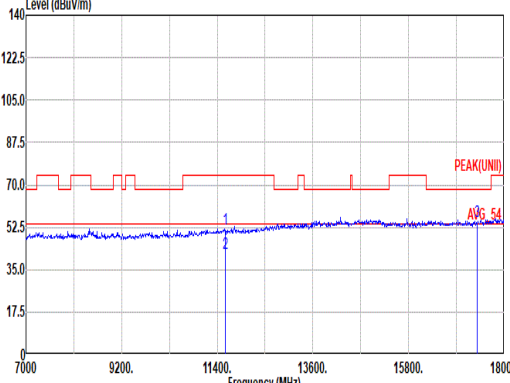
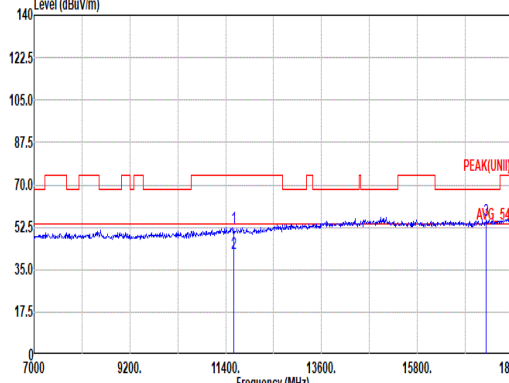


Mode	55																																																																																
	Harmonic																																																																																
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																
ANT	1+2																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg																																																																																	
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>35.33</td><td>38.60</td><td>15.75</td><td>40.23</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11590.00</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>25.30</td><td>38.60</td><td>15.77</td><td>40.26</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17385.00</td><td>54.84</td><td>68.20</td><td>-13.36</td><td>38.71</td><td>40.10</td><td>19.36</td><td>46.39</td><td>3.06</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	51.71	74.00	-22.29	35.33	38.60	15.75	40.23	2.26	--	--	PEAK	2	11590.00	41.67	54.00	-12.33	25.30	38.60	15.77	40.26	2.26	--	--	Average	3	17385.00	54.84	68.20	-13.36	38.71	40.10	19.36	46.39	3.06	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11590.00	51.71	74.00	-22.29	35.33	38.60	15.75	40.23	2.26	--	--	PEAK																																																																					
2	11590.00	41.67	54.00	-12.33	25.30	38.60	15.77	40.26	2.26	--	--	Average																																																																					
3	17385.00	54.84	68.20	-13.36	38.71	40.10	19.36	46.39	3.06	--	--	PEAK																																																																					

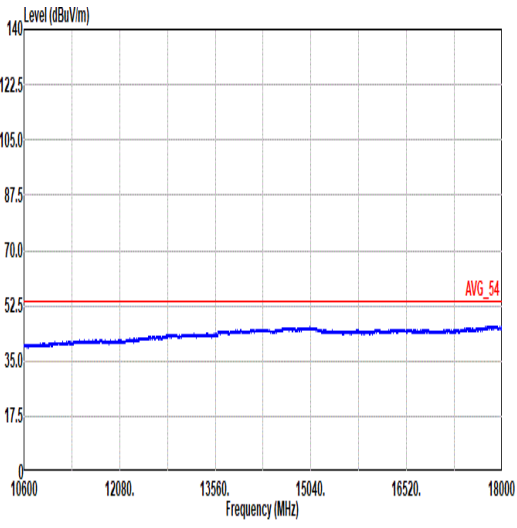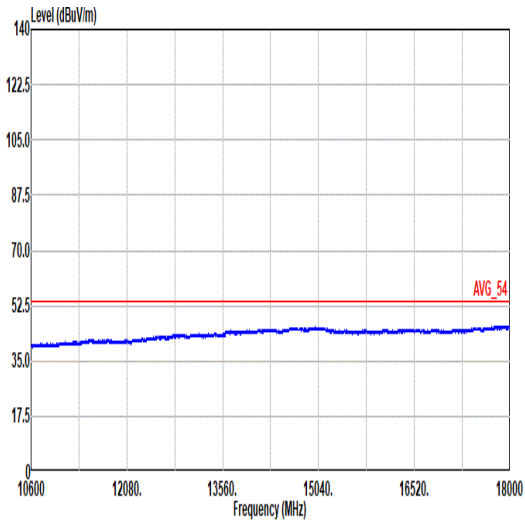

Mode	55	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

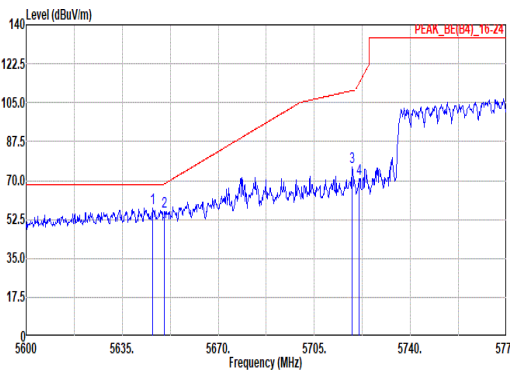
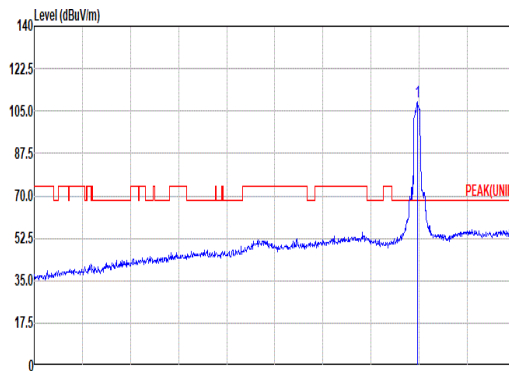
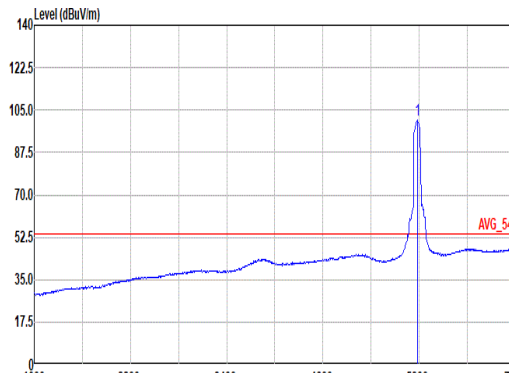


Mode	56																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.20</td><td>57.83</td><td>68.20</td><td>-10.37</td><td>43.72</td><td>33.48</td><td>11.18</td><td>34.45</td><td>3.90</td><td>390</td><td>118</td><td>Peak</td></tr><tr><td>2</td><td>5650.40</td><td>56.01</td><td>68.50</td><td>-12.49</td><td>41.87</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>390</td><td>118</td><td>Peak</td></tr><tr><td>3</td><td>5718.65</td><td>76.31</td><td>110.42</td><td>-34.11</td><td>61.81</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>390</td><td>118</td><td>Peak</td></tr><tr><td>4</td><td>5721.28</td><td>70.83</td><td>113.71</td><td>-42.88</td><td>56.33</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>390</td><td>118</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.20	57.83	68.20	-10.37	43.72	33.48	11.18	34.45	3.90	390	118	Peak	2	5650.40	56.01	68.50	-12.49	41.87	33.50	11.18	34.45	3.91	390	118	Peak	3	5718.65	76.31	110.42	-34.11	61.81	33.84	11.20	34.45	3.91	390	118	Peak	4	5721.28	70.83	113.71	-42.88	56.33	33.84	11.20	34.45	3.91	390	118	Peak	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>100.66</td><td>-----</td><td>-----</td><td>94.00</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>390</td><td>118</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.66	-----	-----	94.00	33.90	11.22	34.46	3.92	390	118	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5646.20	57.83	68.20	-10.37	43.72	33.48	11.18	34.45	3.90	390	118	Peak																																																																																																																															
2	5650.40	56.01	68.50	-12.49	41.87	33.50	11.18	34.45	3.91	390	118	Peak																																																																																																																															
3	5718.65	76.31	110.42	-34.11	61.81	33.84	11.20	34.45	3.91	390	118	Peak																																																																																																																															
4	5721.28	70.83	113.71	-42.88	56.33	33.84	11.20	34.45	3.91	390	118	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5775.00	100.66	-----	-----	94.00	33.90	11.22	34.46	3.92	390	118	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3.600kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>100.87</td><td>-----</td><td>-----</td><td>86.29</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>390</td><td>118</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.87	-----	-----	86.29	33.90	11.22	34.46	3.92	390	118	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5775.00	100.87	-----	-----	86.29	33.90	11.22	34.46	3.92	390	118	AVERAGE																																																																																																																															




Mode	56																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
ANT	1+2																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5853.58</td><td>72.75</td><td>114.05</td><td>-41.30</td><td>58.03</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td></tr><tr><td>2</td><td>5868.28</td><td>71.79</td><td>107.08</td><td>-35.29</td><td>57.06</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td></tr><tr><td>3</td><td>5924.98</td><td>52.47</td><td>68.22</td><td>-15.75</td><td>37.71</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td></tr><tr><td>4</td><td>5946.85</td><td>56.09</td><td>68.20</td><td>-12.11</td><td>41.32</td><td>34.00</td><td>11.37</td><td>34.47</td><td>3.87</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5853.58	72.75	114.05	-41.30	58.03	34.00	11.28	34.46	3.90	2	5868.28	71.79	107.08	-35.29	57.06	34.00	11.29	34.46	3.90	3	5924.98	52.47	68.22	-15.75	37.71	34.00	11.35	34.47	3.88	4	5946.85	56.09	68.20	-12.11	41.32	34.00	11.37	34.47	3.87	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																															
1	5853.58	72.75	114.05	-41.30	58.03	34.00	11.28	34.46	3.90																																																															
2	5868.28	71.79	107.08	-35.29	57.06	34.00	11.29	34.46	3.90																																																															
3	5924.98	52.47	68.22	-15.75	37.71	34.00	11.35	34.47	3.88																																																															
4	5946.85	56.09	68.20	-12.11	41.32	34.00	11.37	34.47	3.87																																																															

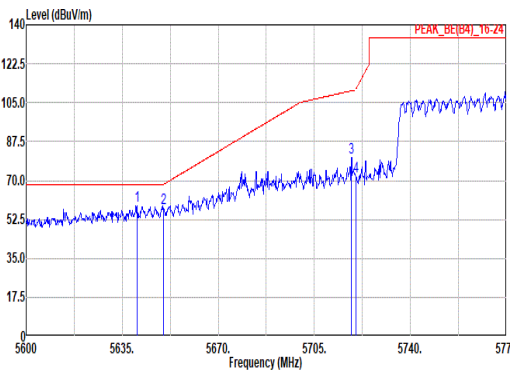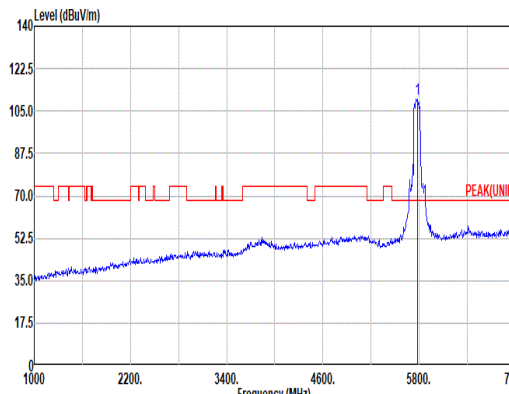
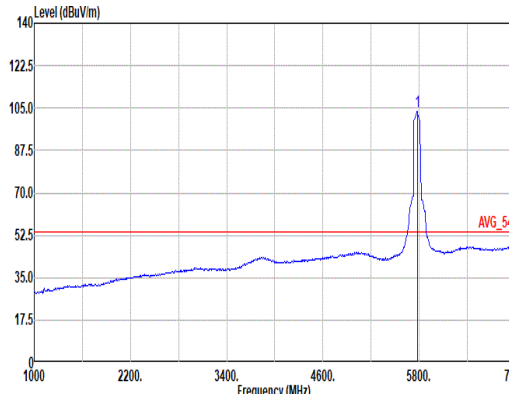


	56																																																																																																															
Mode	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5640.43</td><td>58.73</td><td>68.20</td><td>-9.47</td><td>44.67</td><td>33.44</td><td>11.17</td><td>34.45</td><td>3.90</td><td>276</td></tr><tr><td>2 5650.05</td><td>57.79</td><td>68.24</td><td>-10.45</td><td>43.65</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>276</td></tr><tr><td>3 5718.48</td><td>80.46</td><td>110.37</td><td>-29.91</td><td>65.96</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>276</td></tr><tr><td>4 5720.05</td><td>71.78</td><td>110.91</td><td>-39.13</td><td>57.28</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>276</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5640.43	58.73	68.20	-9.47	44.67	33.44	11.17	34.45	3.90	276	2 5650.05	57.79	68.24	-10.45	43.65	33.50	11.18	34.45	3.91	276	3 5718.48	80.46	110.37	-29.91	65.96	33.84	11.20	34.45	3.91	276	4 5720.05	71.78	110.91	-39.13	57.28	33.84	11.20	34.45	3.91	276	 Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5775.00</td><td>110.15</td><td>-----</td><td>-----</td><td>95.57</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>276</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5775.00	110.15	-----	-----	95.57	33.90	11.22	34.46	3.92	276
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5640.43	58.73	68.20	-9.47	44.67	33.44	11.17	34.45	3.90	276																																																																																																							
2 5650.05	57.79	68.24	-10.45	43.65	33.50	11.18	34.45	3.91	276																																																																																																							
3 5718.48	80.46	110.37	-29.91	65.96	33.84	11.20	34.45	3.91	276																																																																																																							
4 5720.05	71.78	110.91	-39.13	57.28	33.84	11.20	34.45	3.91	276																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5775.00	110.15	-----	-----	95.57	33.90	11.22	34.46	3.92	276																																																																																																							
Avg	Blank	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3.600kHz SNT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5775.00</td><td>103.45</td><td>-----</td><td>-----</td><td>88.87</td><td>33.90</td><td>11.22</td><td>34.46</td><td>3.92</td><td>276</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 5775.00	103.45	-----	-----	88.87	33.90	11.22	34.46	3.92	276																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																							
1 5775.00	103.45	-----	-----	88.87	33.90	11.22	34.46	3.92	276																																																																																																							


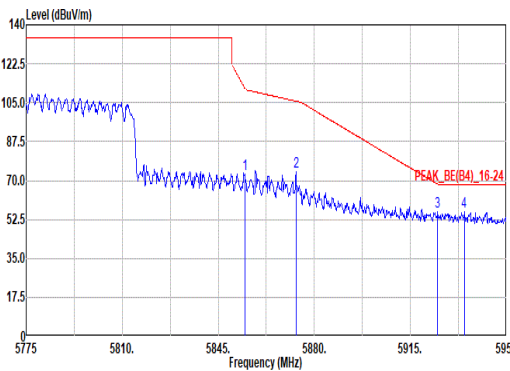


Mode	56																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
ANT	1+2																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5854.63</td><td>72.93</td><td>111.65</td><td>-38.72</td><td>58.21</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>276 222 Peak</td></tr><tr><td>2 5873.35</td><td>74.00</td><td>105.66</td><td>-31.66</td><td>59.27</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>276 222 Peak</td></tr><tr><td>3 5924.98</td><td>55.88</td><td>68.22</td><td>-12.34</td><td>41.12</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>276 222 Peak</td></tr><tr><td>4 5934.60</td><td>55.94</td><td>68.20</td><td>-12.26</td><td>41.18</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>276 222 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5854.63	72.93	111.65	-38.72	58.21	34.00	11.28	34.46	3.90	276 222 Peak	2 5873.35	74.00	105.66	-31.66	59.27	34.00	11.30	34.46	3.89	276 222 Peak	3 5924.98	55.88	68.22	-12.34	41.12	34.00	11.35	34.47	3.88	276 222 Peak	4 5934.60	55.94	68.20	-12.26	41.18	34.00	11.36	34.47	3.87	276 222 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																															
1 5854.63	72.93	111.65	-38.72	58.21	34.00	11.28	34.46	3.90	276 222 Peak																																																															
2 5873.35	74.00	105.66	-31.66	59.27	34.00	11.30	34.46	3.89	276 222 Peak																																																															
3 5924.98	55.88	68.22	-12.34	41.12	34.00	11.35	34.47	3.88	276 222 Peak																																																															
4 5934.60	55.94	68.20	-12.26	41.18	34.00	11.36	34.47	3.87	276 222 Peak																																																															

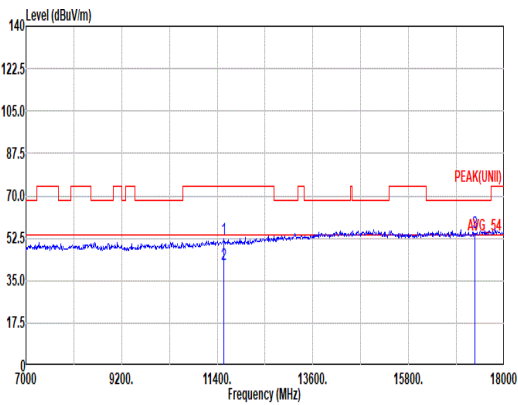
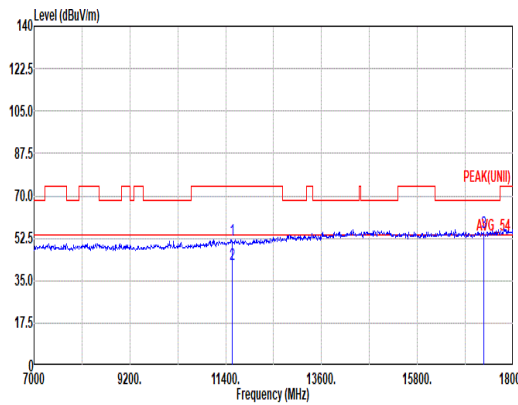


Mode	56																																																																													
	Harmonic																																																																													
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																													
ANT	1+2																																																																													
Pol.	Horizontal						Vertical																																																																							
Peak Avg																																																																														
	Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL						Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11550.00</td><td>52.09</td><td>74.00</td><td>-21.91</td><td>35.71</td><td>38.60</td><td>15.74</td><td>40.22</td><td>2.26</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2 11550.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>25.30</td><td>38.60</td><td>15.74</td><td>40.21</td><td>2.26</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 17325.00</td><td>54.86</td><td>68.20</td><td>-13.34</td><td>38.79</td><td>40.15</td><td>19.28</td><td>46.37</td><td>3.01</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11550.00	52.09	74.00	-21.91	35.71	38.60	15.74	40.22	2.26	--	--	PEAK	2 11550.00	41.69	54.00	-12.31	25.30	38.60	15.74	40.21	2.26	--	--	Average	3 17325.00	54.86	68.20	-13.34	38.79	40.15	19.28	46.37	3.01	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																				
1 11550.00	52.09	74.00	-21.91	35.71	38.60	15.74	40.22	2.26	--	--	PEAK																																																																			
2 11550.00	41.69	54.00	-12.31	25.30	38.60	15.74	40.21	2.26	--	--	Average																																																																			
3 17325.00	54.86	68.20	-13.34	38.79	40.15	19.28	46.37	3.01	--	--	PEAK																																																																			

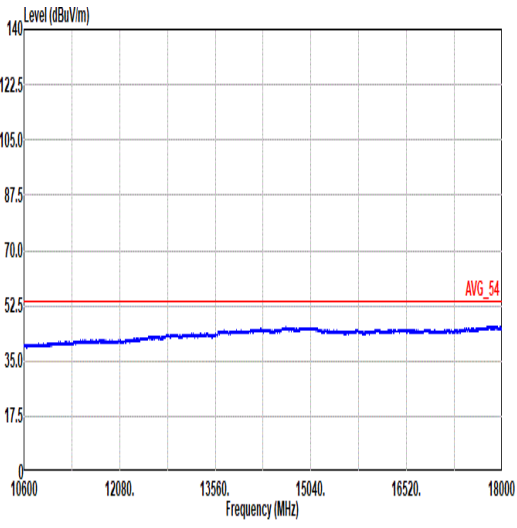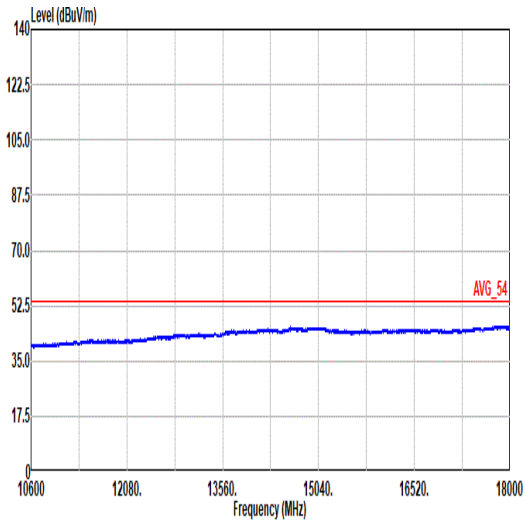

Mode	56	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

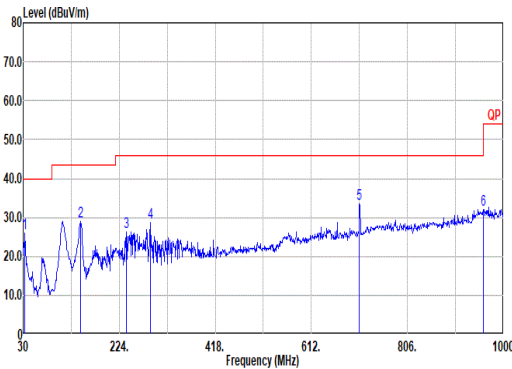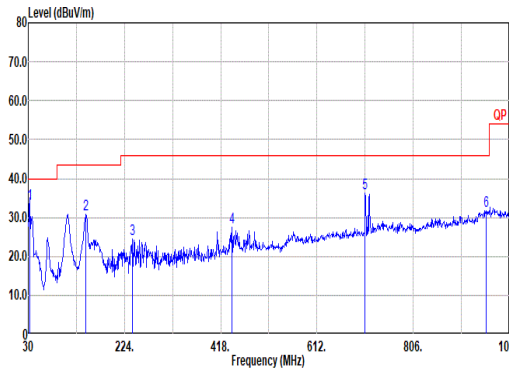

Mode	57																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																																																					
ANT	1+2																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	 Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_241127 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>33.88</td><td>26.00</td><td>40.00</td><td>-14.00</td><td>35.42</td><td>22.68</td><td>0.69</td><td>32.82</td><td>0.03 -- Peak</td></tr><tr><td>2</td><td>146.40</td><td>28.87</td><td>43.50</td><td>-14.63</td><td>42.69</td><td>17.30</td><td>1.56</td><td>32.74</td><td>0.06 -- Peak</td></tr><tr><td>3</td><td>238.55</td><td>26.30</td><td>46.00</td><td>-19.70</td><td>37.00</td><td>20.03</td><td>1.99</td><td>32.80</td><td>0.08 -- Peak</td></tr><tr><td>4</td><td>287.05</td><td>28.69</td><td>46.00</td><td>-17.31</td><td>40.22</td><td>19.07</td><td>2.19</td><td>32.86</td><td>0.07 -- Peak</td></tr><tr><td>5</td><td>709.00</td><td>33.63</td><td>46.00</td><td>-12.37</td><td>35.99</td><td>26.73</td><td>3.59</td><td>32.83</td><td>0.15 -- Peak</td></tr><tr><td>6</td><td>959.26</td><td>31.98</td><td>46.00</td><td>-14.02</td><td>27.79</td><td>31.16</td><td>4.26</td><td>31.43</td><td>0.20 -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	33.88	26.00	40.00	-14.00	35.42	22.68	0.69	32.82	0.03 -- Peak	2	146.40	28.87	43.50	-14.63	42.69	17.30	1.56	32.74	0.06 -- Peak	3	238.55	26.30	46.00	-19.70	37.00	20.03	1.99	32.80	0.08 -- Peak	4	287.05	28.69	46.00	-17.31	40.22	19.07	2.19	32.86	0.07 -- Peak	5	709.00	33.63	46.00	-12.37	35.99	26.73	3.59	32.83	0.15 -- Peak	6	959.26	31.98	46.00	-14.02	27.79	31.16	4.26	31.43	0.20 -- Peak	 Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_241127 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>33.88</td><td>33.45</td><td>40.00</td><td>-6.55</td><td>42.87</td><td>22.68</td><td>0.69</td><td>32.82</td><td>0.03 -- Peak</td></tr><tr><td>2</td><td>146.40</td><td>30.88</td><td>43.50</td><td>-12.62</td><td>44.70</td><td>17.30</td><td>1.56</td><td>32.74</td><td>0.06 -- Peak</td></tr><tr><td>3</td><td>240.49</td><td>24.00</td><td>46.00</td><td>-21.40</td><td>35.28</td><td>20.04</td><td>2.00</td><td>32.80</td><td>0.08 -- Peak</td></tr><tr><td>4</td><td>441.28</td><td>27.50</td><td>46.00</td><td>-18.50</td><td>34.57</td><td>22.95</td><td>2.78</td><td>32.89</td><td>0.09 -- Peak</td></tr><tr><td>5</td><td>709.00</td><td>36.08</td><td>46.00</td><td>-9.92</td><td>38.44</td><td>26.73</td><td>3.59</td><td>32.83</td><td>0.15 -- Peak</td></tr><tr><td>6</td><td>953.44</td><td>31.66</td><td>46.00</td><td>-14.34</td><td>27.71</td><td>30.98</td><td>4.27</td><td>31.49</td><td>0.19 -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	33.88	33.45	40.00	-6.55	42.87	22.68	0.69	32.82	0.03 -- Peak	2	146.40	30.88	43.50	-12.62	44.70	17.30	1.56	32.74	0.06 -- Peak	3	240.49	24.00	46.00	-21.40	35.28	20.04	2.00	32.80	0.08 -- Peak	4	441.28	27.50	46.00	-18.50	34.57	22.95	2.78	32.89	0.09 -- Peak	5	709.00	36.08	46.00	-9.92	38.44	26.73	3.59	32.83	0.15 -- Peak	6	953.44	31.66	46.00	-14.34	27.71	30.98	4.27	31.49	0.19 -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																														
1	33.88	26.00	40.00	-14.00	35.42	22.68	0.69	32.82	0.03 -- Peak																																																																																																																																																																													
2	146.40	28.87	43.50	-14.63	42.69	17.30	1.56	32.74	0.06 -- Peak																																																																																																																																																																													
3	238.55	26.30	46.00	-19.70	37.00	20.03	1.99	32.80	0.08 -- Peak																																																																																																																																																																													
4	287.05	28.69	46.00	-17.31	40.22	19.07	2.19	32.86	0.07 -- Peak																																																																																																																																																																													
5	709.00	33.63	46.00	-12.37	35.99	26.73	3.59	32.83	0.15 -- Peak																																																																																																																																																																													
6	959.26	31.98	46.00	-14.02	27.79	31.16	4.26	31.43	0.20 -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																														
1	33.88	33.45	40.00	-6.55	42.87	22.68	0.69	32.82	0.03 -- Peak																																																																																																																																																																													
2	146.40	30.88	43.50	-12.62	44.70	17.30	1.56	32.74	0.06 -- Peak																																																																																																																																																																													
3	240.49	24.00	46.00	-21.40	35.28	20.04	2.00	32.80	0.08 -- Peak																																																																																																																																																																													
4	441.28	27.50	46.00	-18.50	34.57	22.95	2.78	32.89	0.09 -- Peak																																																																																																																																																																													
5	709.00	36.08	46.00	-9.92	38.44	26.73	3.59	32.83	0.15 -- Peak																																																																																																																																																																													
6	953.44	31.66	46.00	-14.34	27.71	30.98	4.27	31.49	0.19 -- Peak																																																																																																																																																																													