


A. The installation flow chart is as follows:

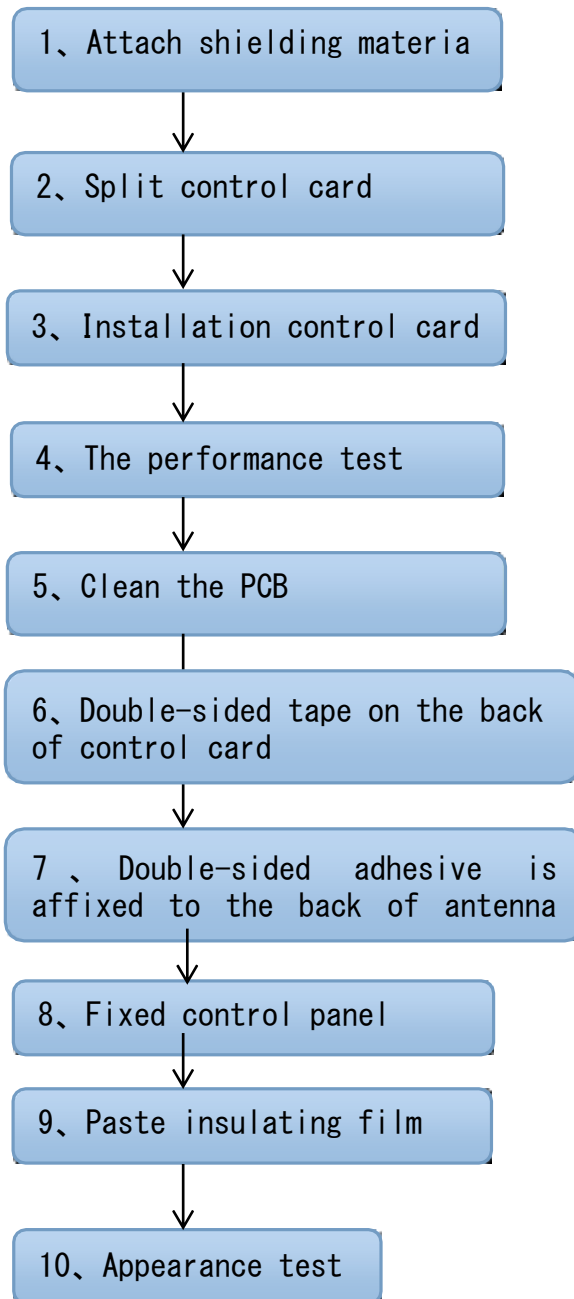

B. The detailed installation process is as follows :

1、 Attach shielding materia :

1.1. Use amorphous laminating machine, adjust the parameters

before use ;

- 1.2. Joint before must ensure the neatness of PCB, shielding materials, PCB, shielding materials and platform must be perfectly, can't offset, shielding material can't fold, not beyond the PCB edge, the intracrystalline shrinkage is less than 1.0 mm. Figure 1 and 2 :



Figure 1



Figure 2

- 2、 Split control card :

The control card is placed in the fixed slot, press the work button, and separate the control card. As shown in

figure 3:



figure 3

- 3、 Installation control card :

Insert the two gold finger ends of FPC at the connector opening at the same time and insert the connector flatly.

Push the line to the bottom of the connector and press down the connector cover,

4、 The performance test :

Test the electromagnetic panel to be tested by connecting the test equipment to the test equipment:

Observe whether there are bending, line breaking, cursor not in position, shake and other fault defects.

5、 Clean the PCB :

Wipe the front and back of the antenna plate with a dust-free cloth dipped in alcohol。

6、 Double-sided tape on the back of control card :

On the back of the control card, paste 30*20*0.1mm
double-sided adhesive,

- 7、 Double-sided adhesive is affixed to the back of antenna plate :
The antenna plate is folded down and pasted with black
3M double-sided adhesive,

- 8、 Fixed control panel :

The FPC of the antenna plate is folded by using the folding
tooling, and the control card is fixed on the back of the
antenna plate,

9 、 Paste insulating film :

Attach the yellow insulating film to the front of the control card to avoid the connector on the control

10、 Appearance test :

Inspect the appearance of the finished product, screen and label the defective products with defects such as the edge of PCB, the edge of the board and the dirty surface of the board.

C. inspection and packing

Send the good products to the inspection, after the inspection qualified, packaging into the warehouse.

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IMPORTANT NOTE:

This NFC devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product. Any other installation or use will violate FCC Part 15 regulations. Modifications not expressly approved by Getac could void your authority to operate the equipment.

This module apply limit module approval, and just only install in end product (Brand: Getac / Model: K120G2).

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

The product comply with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

End Product Labeling:

The final end product must be labeled in a visible area with the following: "Contains FCC ID: QYLGET125K". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Industry Canada statement:

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement:

The product comply with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

Déclaration d'exposition aux radiations:

Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé.

Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel. La réduction aux expositions RF peut être augmentée si l'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

The product can be kept as far as possible from the user body or set the device to lower output power if

such function is available. The final end product must be labeled in a visible area with the following:
"Contains IC: 10301A-GET125K".

Plaque signalétique du produit final

L'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 10301A-GET125K".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.
The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module. Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.

FCC ID : QYLGET125K
IC : 10301A-GET125K