

TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210V

TEST REPORT:

PAGE	1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....	TECHNICAL DESCRIPTION CONTINUED
PAGE	3.....	RF POWER OUTPUT
PAGE	4.....	MODULATION CHARACTERISTICS
PAGE	5-6....	OCCUPIED BANDWIDTH
PAGE	7.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	8.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	9.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	10.....	FREQUENCY STABILITY
PAGE	11-12...	TRANSIENT FREQUENCY STABILITY
PAGE	13.....	CERTIFICATION OF TECHNICAL DATA
PAGE	14.....	LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....	POWER OF ATTORNEY LETTER
EXHIBIT	2.....	FCC ID LABEL SAMPLE
EXHIBIT	3.....	SKETCH OF FCC ID LABEL LOCATION
EXHIBIT	4A-4B....	EXTERNAL FRONT VIEW PHOTOGRAPHS
EXHIBIT	4C-4D....	EXTERNAL REAR VIEW PHOTOGRAPHS
EXHIBIT	4E.....	EXTERNAL TOP VIEW PHOTOGRAPH
EXHIBIT	4F.....	INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT	4G.....	INTERNAL SOLDER SIDE PHOTOGRAPH
EXHIBIT	5.....	BLOCK DIAGRAM
EXHIBIT	6.....	PARTS LIST
EXHIBIT	7.....	SCHEMATICS
EXHIBIT	8A-8D....	USER'S MANUAL
EXHIBIT	9A-9C....	CIRCUIT DESCRIPTION
EXHIBIT	10A-10C...	TUNING PROCEDURE
EXHIBIT	11.....	AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	12A.....	MODULATION LIMITING -25 kHz CH SPACING -300 Hz
EXHIBIT	12B.....	MODULATION LIMITING -25 kHz CH SPACING -1000 Hz
EXHIBIT	12C.....	MODULATION LIMITING -25 kHz CH SPACING -3000 Hz
EXHIBIT	12D.....	MODULATION LIMITING -12.5kHz CH SPACING -300 Hz
EXHIBIT	12E.....	MODULATION LIMITING -12.5kHz CH SPACING-1000 Hz
EXHIBIT	12F.....	MODULATION LIMITING -12.5kHz CH SPACING-3000 Hz
EXHIBIT	13.....	AUDIO LOW PASS FILTER GRAPH
EXHIBIT	14.....	OCCUPIED BANDWIDTH CW PLOT-25KHz CH
EXHIBIT	15.....	OCCUPIED BANDWIDTH 2.5K TONE-25KHz PLOT
EXHIBIT	16.....	OCCUPIED BANDWIDTH CW PLOT-12.5KHz CH
EXHIBIT	17.....	OCCUPIED BANDWIDTH 2.5K TONE-12.5KHz PLOT
EXHIBIT	18A-18D...	TRANSIENT FREQUENCY RESPONSE PLOTS

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210V  
REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT  
PAGE: TABLE OF CONTENTS

GENERAL\_INFORMATION\_REQUIRED  
FOR\_TYPE\_ACCEPTANCE

2.983 (a,b,c) YAESU MUSEN CO., LTD. will sell the  
MODEL NO. K66VX-210V VHF transmitter in quantity,  
for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL\_DESCRIPTION

(1) Type of Emission: 12K8F3E For 25KHz  
9K6F3E For 12.5KHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 3.4\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(3.4K)(1) = 6.0K + 6.8K = 12.8K$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.8\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(1.8K)(1) = 6.0K + 3.6K = 9.6K$$

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 148-174 MHz

(3) Power Range and Controls: There are NO user Power  
controls.

(4) Maximum Output Power Rating:  
5.0 & 1.0 Watts ,  
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

POWER INPUT

FINAL AMPLIFIER ONLY

$$V_{ce} = 7.2 \text{ Volts}$$

$$I_{ce} = 1.50A.$$

$$P_{in} = 10.8 \text{ Watts}$$

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT

PAGE #: 1

- (6) Function of each electron tube or semiconductor device or other active circuit device:
- SEE EXHIBIT 6.
- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 7. The block diagram is included as EXHIBIT 5.
- (8) Instruction book. The instruction manual is included as EXHIBIT #8.
- (9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #8.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.
- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
- In addition to the interstage filtering the multi-section low pass filter made up of C1004, L1001, C1005, L1002, C1010, C1014 & C1015.
- Limiting Modulation:  
The transmitter audio limiting circuitry is contained in the loop filter IC01.
- Limiting Power: There is no provision for limiting power.
- (12) Digital modulation. This unit does NOT use digital modulation.
- 2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF\_power\_output.


RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 13.6VDC, and the transmitter properly adjusted the RF output measures:

POWER

INPUT POWER: (13.6V)(13.2A) = 179 Watts

OUTPUT POWER: 50.0 Watts Efficiency: 28%

METHOD OF MEASURING RF POWER OUTPUT

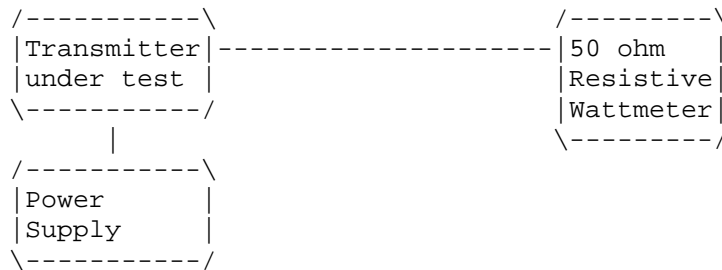

2.987(a) Voice Modulation\_characteristics:

(a) AUDIO\_FREQUENCY\_RESPONSE See the EXHIBIT #11.

2.987(a) AUDIO\_LOW\_PASS\_FILTER

The audio low pass filter is included and the plot is shown as EXHIBIT #13. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.

2.987(b) Audio\_input\_versus\_modulation A plot of the audio input versus deviation is shown in in EXHIBIT #12A-12F.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT

PAGE #: 3

2.989(c) Occupied\_bandwidth:

90.210(b,)

Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + \log(P)$ dB.

90.210( d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;


- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625kHz removed from  $f_{P0}$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency  $(f_d - 2.88\text{kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency  $(f_d \text{ in kHz } \log(P) \text{ or } 70\text{dB})$ , whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.

Test procedure diagram

#### OCCUPIED BANDWIDTH MEASUREMENT

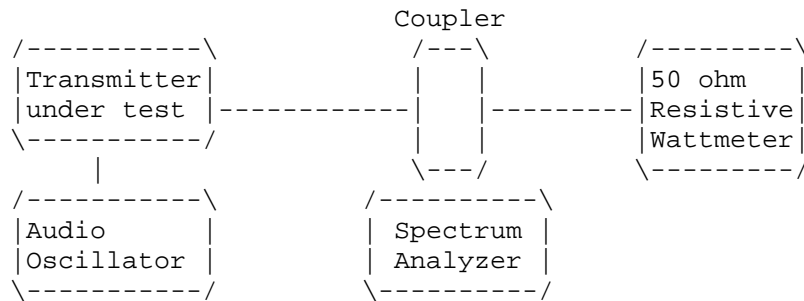

2.991 Spurious\_emissions\_at\_antenna\_terminals(conducted):

Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

APPLICANT: YAESU MUSEN CO., LTD.


FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT

PAGE #: 4

2.991 Continued      Spurious\_Emissions\_at\_the\_Antenna\_Terminals:  
 90.210(d)(3)

Method of Measuring Conducted Spurious Emissions

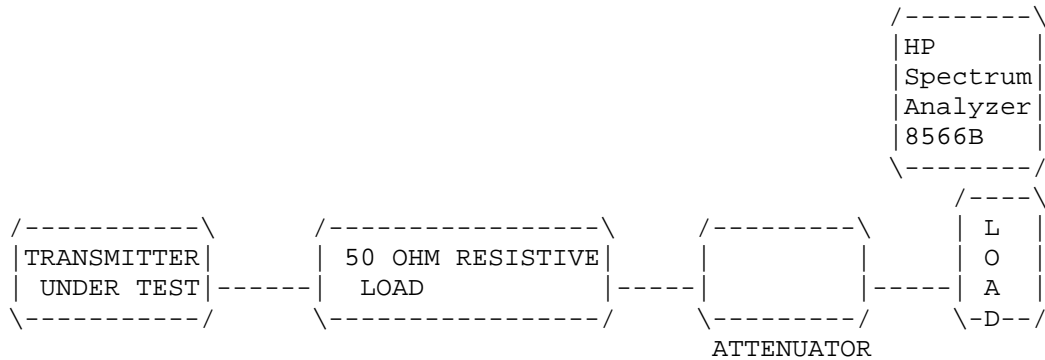

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

For 25KHz  $43 + 10\log(5.1) = 43 + 7.0 = 50.1\text{dB}$

For 12.5KHz  $50 + 10\log(5.0) = 50 + 7.0 = 57.0$

	EMISSION FREQUENCY MHz	dB BELOW CARRIER
HIGH POWER	160.05	00.0
	320.10	-74.7
	480.15	-105.6
	640.20	-94.0
	800.25	-79.1
	960.30	-84.1
	1120.35	-99.2
	1280.40	-98.2
	1440.45	-88.5
	1600.50	-86.4
LOW POWER	160.05	00.0
	320.10	-74.7
	480.15	-105.6
	640.20	-94.0
	800.25	-79.1
	960.30	-84.1
	1120.35	-99.2
	1280.40	-98.2
	1440.45	-88.5
	1600.50	-86.4

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY ROAD, NEWBERRY FLORIDA 32669.

2.993(a)(b) Field\_strength\_of\_spurious\_emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 50 +10log(Po) dB below the mean power output of the transmitter or 70dB, which ever is the lessor.

$$50 + 10\log(50) = 67.0 \text{ dB}$$

EMISSION FREQUENCY MHz	METER READING @ 3 METERS dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATT. dB	MARGIN dB	ANT
HIGH POWER							
160.05	116.40	0.90	16.61	133.91	0.0	0.0	H
320.07	40.90	1.40	14.98	57.28	76.63	19.30	H
480.20	39.10	1.60	18.84	59.54	74.37	17.37	H
640.20	43.80	1.60	20.98	66.38	67.53	10.53	H
800.15	27.10	2.90	22.01	52.01	81.90	24.90	H
960.17	31.30	2.90	24.71	58.91	75.00	18.00	H
1120.20	22.50	1.00	24.48	47.98	85.93	28.93	H
1280.20	28.10	1.00	25.12	54.22	79.05	22.05	V
1440.20	28.10	1.00	25.76	54.86	79.05	22.05	V
1600.28	24.80	1.00	26.40	52.20	81.71	24.71	V
LOW POWER							
160.05	103.60	0.90	16.61	121.11	0.0	0.0	H
320.07	41.90	1.40	14.98	58.28	62.83	12.83	H
480.20	40.20	1.60	18.84	60.64	60.47	10.47	H
640.20	45.90	1.60	20.98	67.48	53.63	3.63	H
800.15	27.10	2.90	22.01	52.01	69.10	19.10	H
960.17	31.30	2.90	24.71	58.91	62.20	12.20	H
1120.20	22.50	1.00	24.48	47.98	73.13	23.13	H
1280.20	28.10	1.00	25.12	54.22	66.89	16.89	V
1440.20	30.30	1.00	25.76	57.06	64.05	14.05	V
1600.28	26.90	1.00	26.40	54.30	66.81	16.81	V


METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210V  
REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT  
PAGE #: 6

2.993(a)(b)

2.993(a)(b) Continued Field\_strength\_of\_spurious\_emissions:

Method of Measuring Radiated Spurious Emissions

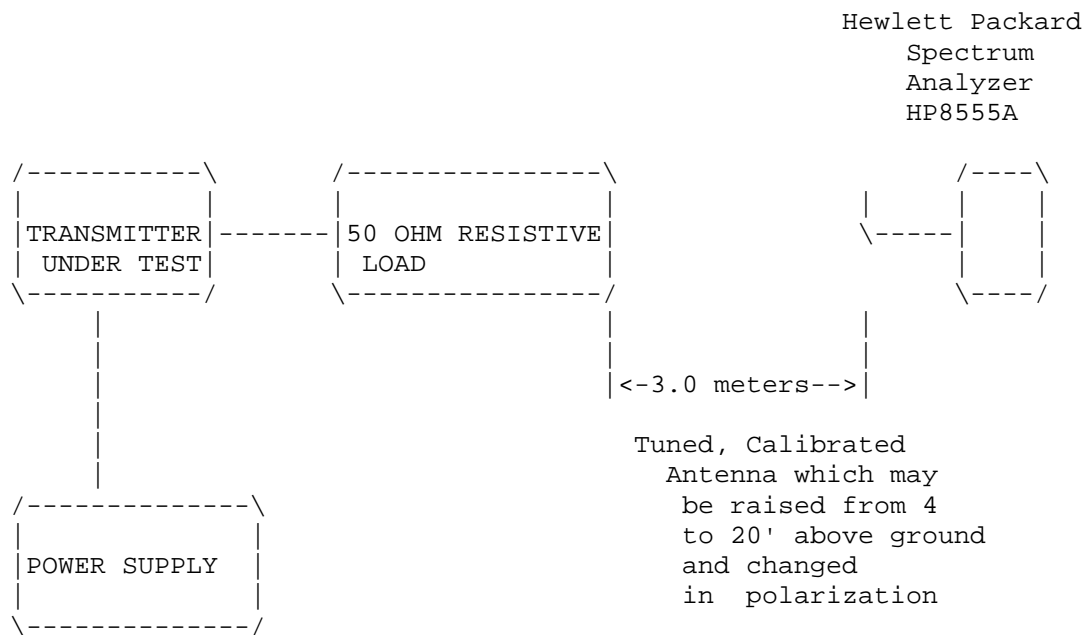

Equipment placed 4' above ground  
on a rotatable platform.



2.995(a)(b)(d) Frequency\_stability:

90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit, for 25KHz spacing & 0.00025% for 12.5KHz spacing and 0.0001% for 6.25KHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at minus 25% of the battery voltage of 5.4VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 160.025 000MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	160.025 000	00.0
-30_____	160.025 070	+0.43
-20_____	160.025 150	+0.94
-10_____	160.025 210	+1.31
0_____	160.025 200	+1.25
+10_____	160.025 160	1.00
+20_____	160.025 120	+0.75
+30_____	160.025 070	+0.43
+40_____	160.024 990	-0.06
+50_____	160.024 760	-1.50

20oC Battery End-Point 5.6VDC 160.024 760 -1.50

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.50 to 1.31 ppm. The maximum frequency variation over the voltage range was -1.50 ppm.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT

PAGE #: 8

2.995(a)(b)(d) Frequency\_stability:  
90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:


Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+6.25kHz	20.0ms
t3,t4	+12.5kHz	5.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210V  
REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT  
PAGE #: 9

2.995(a)(b)(d) Frequency\_stability:  
 90.214 Transient Frequency Behavior  
 (Continued)

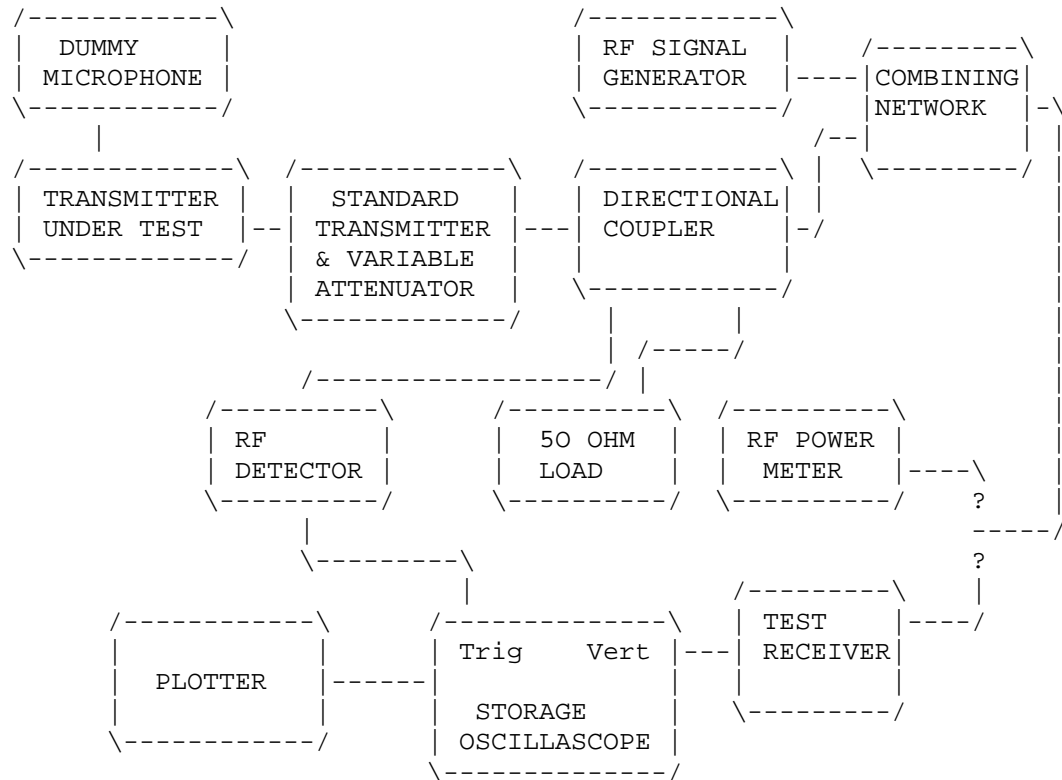

APPLICANT: YAESU MUSEN CO., LTD.  
 FCC ID: K66VX-210V  
 REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT  
 PAGE #: 10

- 2.983(f) Photo\_or\_Drawing\_of\_Label:  
See Page 2.
- 2.983(g) Photos\_of\_Equipment:  
See Pages 4A-4G.
- 2.999 Measurement\_Procedures\_for\_Type\_Acceptance:  
  
Measurement techniques have been in accordance  
with EIA specifications and the FCC requirements.
- 2.909 Certification\_of\_Technical\_Data\_by\_Engineers  
  
We, the undersigned, certify that the enclosed  
measurements and enclosed data are true and  
correct.

S. S. SANDERS  
S.S. Sanders  
Engineer

#### LIST\_OF\_TEST\_EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/  
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP  
8449B - OPT H02 Cal. 6/26/98
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 10/30/98
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal. 11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-210V  
REPORT #: F:\CUS\Y\YAE\YAE182A9.RPT  
PAGE #: 11