



TEST REPORT

Product Name: Super Console K9
FCC ID: 2BF6E-K9
Trademark: KINHANK
Model Number: K9
Prepared For: Shandong Yihang Electronic Technology Development Co., Ltd.
Address: Room 1703, Unit 1, Building 1, Fortune 1 Plaza, Huaiyin District, Jinan City, Shandong Province
Manufacturer: Shandong Yihang Electronic Technology Development Co., Ltd.
Address: Room 1703, Unit 1, Building 1, Fortune 1 Plaza, Huaiyin District, Jinan City, Shandong Province
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 15, 2025
Sample tested Date: Apr. 15, 2025 to May. 20, 2025
Issue Date: May. 20, 2025
Report No.: CTB25041507006RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit	51
8.3 Test procedure	51
8.4 Test Result	52
9. CONDUCTED OUTPUT POWER	76
9.1 Block Diagram Of Test Setup	76
9.2 Limit	76
9.3 Test procedure	76
9.4 Test Result	77
10. 6DB OCCUPIED BANDWIDTH	78
10.1 Block Diagram Of Test Setup	78
10.2 Limit	78
10.3 Test procedure	78
10.4 Test Result	79
11. POWER SPECTRAL DENSITY	93
11.1 Block Diagram Of Test Setup	93



11.2	Limit	93
11.3	Test procedure	93
11.4	Test Result	94
12.	ANTENNA REQUIREMENT	107
13.	EUT TEST SETUP PHOTOGRAPHS	108

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25041507006RF02	May. 20, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	K9
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.916dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM, OFDMA
Antenna installation:	WiFi (2.4G): Internal antenna
Antenna Gain:	WiFi (2.4G): ANT1: 2.56dBi ANT2: 2.56dBi
Ratings:	Input: 100-240V, 50/60Hz Output: 12.0V 2.0A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Monitor	DELL	SE2218HV	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 2.56dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 5.57dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 2.56dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M
802.11/ax20	65M
802.11/ax40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29

7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

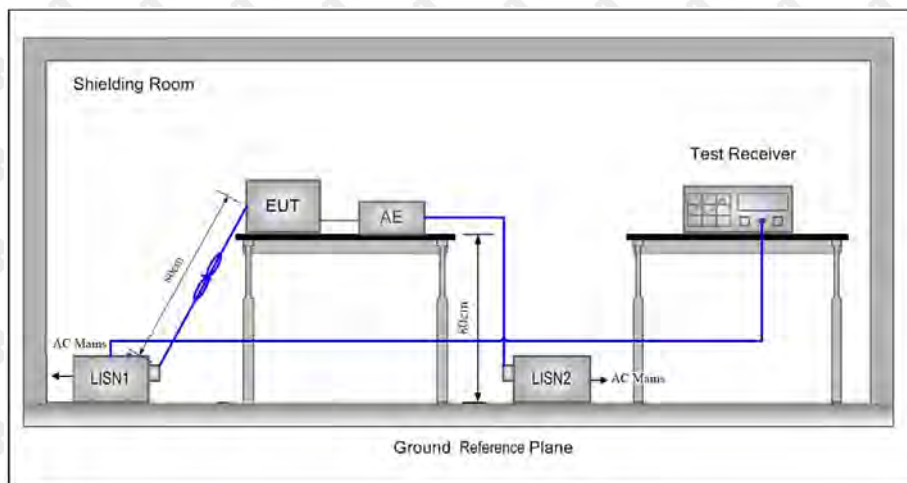

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

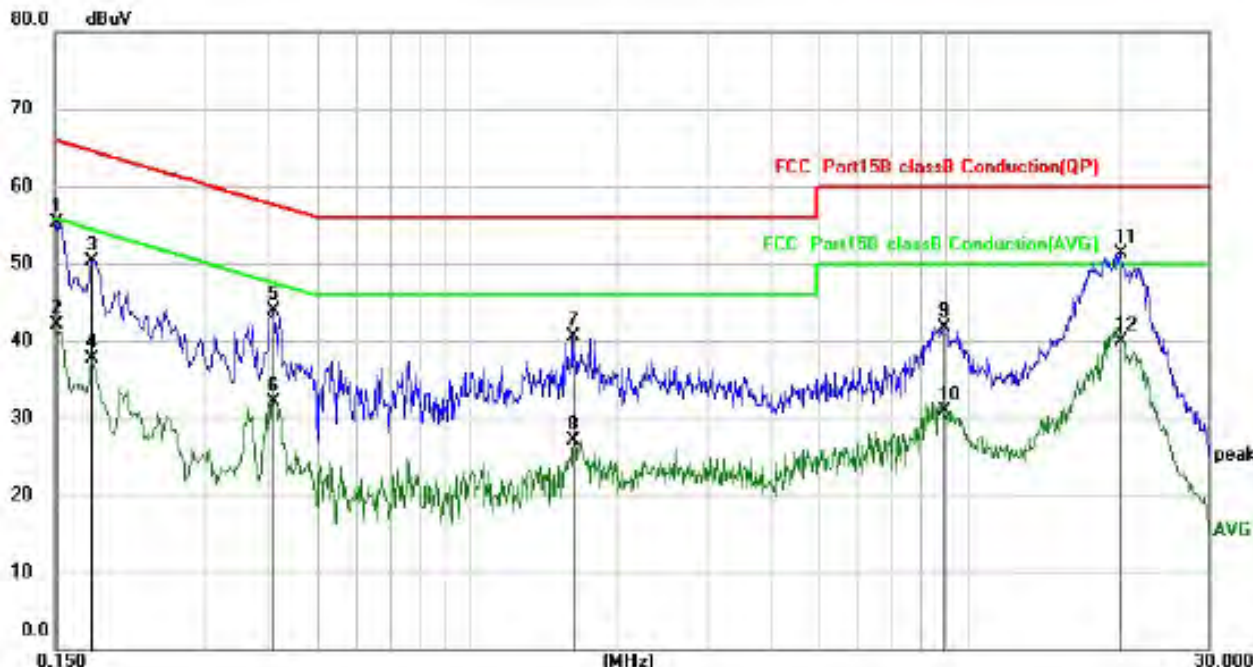

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1516	44.33	10.88	55.21	65.91	-10.70	QP
2		0.1516	31.23	10.88	42.11	55.91	-13.80	AVG
3		0.1779	39.59	10.79	50.38	64.58	-14.20	QP
4		0.1779	26.82	10.79	37.61	54.58	-16.97	AVG
5		0.4100	33.28	10.56	43.84	57.65	-13.81	QP
6		0.4100	21.64	10.56	32.20	47.65	-15.45	AVG
7		1.6220	29.25	11.34	40.59	56.00	-15.41	QP
8		1.6220	15.82	11.34	27.16	46.00	-18.84	AVG
9		8.9059	28.57	13.13	41.70	60.00	-18.30	QP
10		8.9059	17.80	13.13	30.93	50.00	-19.07	AVG
11	*	20.0138	37.62	13.59	51.21	60.00	-8.79	QP
12		20.0138	26.34	13.59	39.93	50.00	-10.07	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

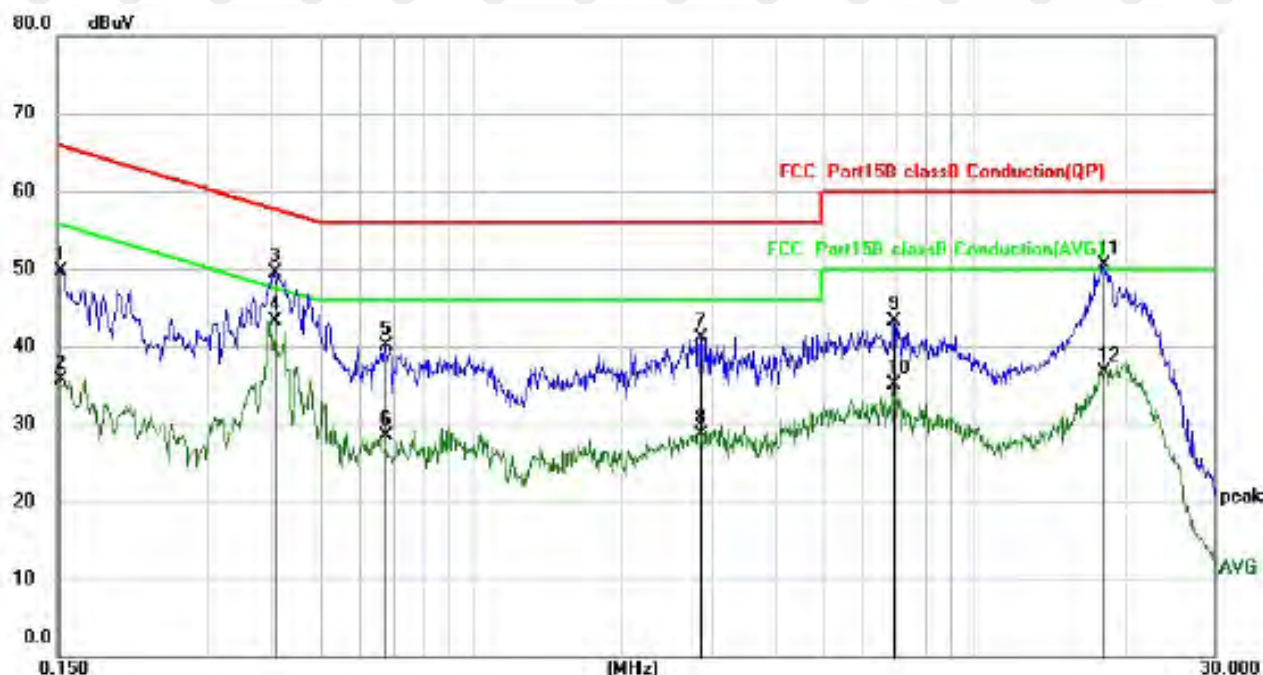

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1524	38.73	10.88	49.61	65.87	-16.26	QP
2		0.1524	24.85	10.88	35.73	55.87	-20.14	AVG
3		0.4060	38.96	10.57	49.53	57.73	-8.20	QP
4	*	0.4060	32.81	10.57	43.38	47.73	-4.35	AVG
5		0.6740	29.41	10.69	40.10	56.00	-15.90	QP
6		0.6740	17.89	10.69	28.58	46.00	-17.42	AVG
7		2.8660	29.43	11.77	41.20	56.00	-14.80	QP
8		2.8660	16.84	11.77	28.61	46.00	-17.39	AVG
9		6.8900	30.44	12.90	43.34	60.00	-16.66	QP
10		6.8900	22.21	12.90	35.11	50.00	-14.89	AVG
11		18.0100	36.97	13.49	50.46	60.00	-9.54	QP
12		18.0100	23.25	13.49	36.74	50.00	-13.26	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

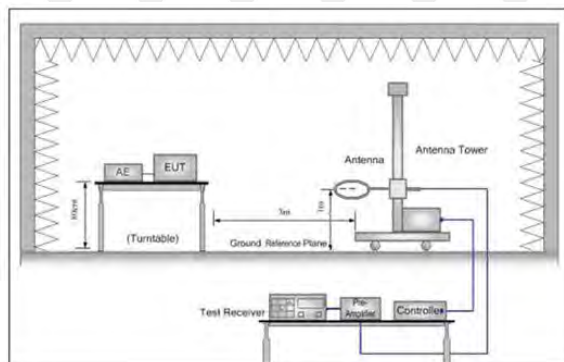


Figure 1. Below 30MHz

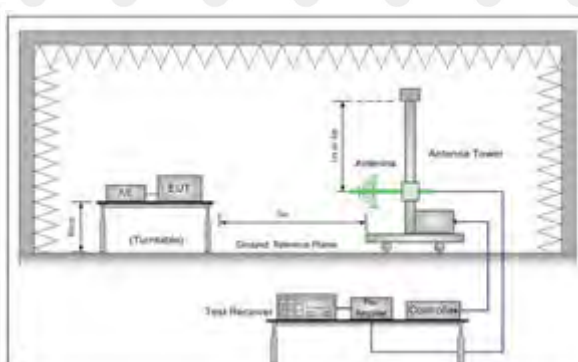


Figure 2. 30MHz to 1GHz

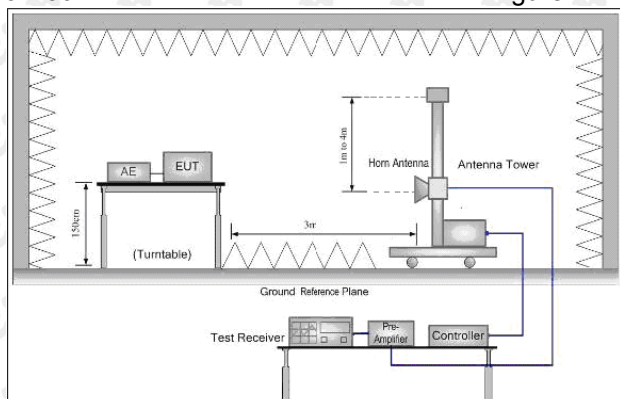


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.6946	28.73	-6.74	21.99	40.00	-18.01	QP
2		68.3906	27.79	-8.47	19.32	40.00	-20.68	QP
3		150.5377	29.81	-2.75	27.06	43.50	-16.44	QP
4		377.9211	26.36	-1.20	25.16	46.00	-20.84	QP
5	*	639.4886	26.69	4.29	30.98	46.00	-15.02	QP
6		1000.000	24.59	8.96	33.55	54.00	-20.45	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.5030	35.62	-6.72	28.90	40.00	-11.10	QP
2	*	140.3420	37.14	-4.26	32.88	43.50	-10.62	QP
3		192.4185	29.49	-4.65	24.84	43.50	-18.66	QP
4		300.8943	25.59	-2.88	22.71	46.00	-23.29	QP
5		483.0617	27.57	1.66	29.23	46.00	-16.77	QP
6		846.5707	25.94	7.80	33.74	46.00	-12.26	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.35	-3.64	61.71	74	-12.29	peak
4824	49.60	-3.64	45.96	54	-8.04	AVG
7236	57.97	-0.95	57.02	74	-16.98	peak
7236	44.71	-0.95	43.76	54	-10.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.58	-3.64	60.94	74	-13.06	peak
4824	49.07	-3.64	45.43	54	-8.57	AVG
7236	58.82	-0.95	57.87	74	-16.13	peak
7236	43.34	-0.95	42.39	54	-11.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.94	-3.51	62.43	74	-11.57	peak
4874	50.35	-3.51	46.84	54	-7.16	AVG
7311	59.99	-0.82	59.17	74	-14.83	peak
7311	44.14	-0.82	43.32	54	-10.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	47.62	-3.51	44.11	54	-9.89	AVG
7311	60.11	-0.82	59.29	74	-14.71	peak
7311	44.51	-0.82	43.69	54	-10.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.16	-3.43	59.73	74	-14.27	peak
4924	45.99	-3.43	42.56	54	-11.44	AVG
7386	58.28	-0.75	57.53	74	-16.47	peak
7386	44.20	-0.75	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.26	-3.43	60.83	74	-13.17	peak
4924	46.86	-3.43	43.43	54	-10.57	AVG
7386	58.44	-0.75	57.69	74	-16.31	peak
7386	43.04	-0.75	42.29	54	-11.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	49.35	-3.64	45.71	54	-8.29	AVG
7236	57.90	-0.95	56.95	74	-17.05	peak
7236	43.87	-0.95	42.92	54	-11.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.49	-3.64	62.85	74	-11.15	peak
4824	48.83	-3.64	45.19	54	-8.81	AVG
7236	58.66	-0.95	57.71	74	-16.29	peak
7236	45.78	-0.95	44.83	54	-9.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.04	-3.51	60.53	74	-13.47	peak
4874	50.46	-3.51	46.95	54	-7.05	AVG
7311	57.53	-0.82	56.71	74	-17.29	peak
7311	43.58	-0.82	42.76	54	-11.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.75	-3.51	60.24	74	-13.76	peak
4874	46.89	-3.51	43.38	54	-10.62	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	42.87	-0.82	42.05	54	-11.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.49	-3.43	60.06	74	-13.94	peak
4924	46.04	-3.43	42.61	54	-11.39	AVG
7386	58.95	-0.75	58.20	74	-15.80	peak
7386	43.05	-0.75	42.30	54	-11.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.65	-3.43	59.22	74	-14.78	peak
4924	46.22	-3.43	42.79	54	-11.21	AVG
7386	58.12	-0.75	57.37	74	-16.63	peak
7386	43.95	-0.75	43.20	54	-10.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.76	-3.64	61.12	74	-12.88	peak
4824	48.53	-3.64	44.89	54	-9.11	AVG
7236	57.01	-0.95	56.06	74	-17.94	peak
7236	44.01	-0.95	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.28	-3.64	61.64	74	-12.36	peak
4824	47.92	-3.64	44.28	54	-9.72	AVG
7236	56.74	-0.95	55.79	74	-18.21	peak
7236	43.76	-0.95	42.81	54	-11.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.82	-3.51	61.31	74	-12.69	peak
4874	47.93	-3.51	44.42	54	-9.58	AVG
7311	60.07	-0.82	59.25	74	-14.75	peak
7311	45.69	-0.82	44.87	54	-9.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.12	-3.51	61.61	74	-12.39	peak
4874	46.60	-3.51	43.09	54	-10.91	AVG
7311	59.55	-0.82	58.73	74	-15.27	peak
7311	43.86	-0.82	43.04	54	-10.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.88	-3.43	59.45	74	-14.55	peak
4924	47.86	-3.43	44.43	54	-9.57	AVG
7386	57.83	-0.75	57.08	74	-16.92	peak
7386	44.20	-0.75	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.08	-3.43	59.65	74	-14.35	peak
4924	46.59	-3.43	43.16	54	-10.84	AVG
7386	58.26	-0.75	57.51	74	-16.49	peak
7386	43.85	-0.75	43.10	54	-10.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.99	-3.63	60.36	74	-13.64	peak
4844	47.71	-3.63	44.08	54	-9.92	AVG
7266	59.79	-0.94	58.85	74	-15.15	peak
7266	45.99	-0.94	45.05	54	-8.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.37	-3.63	60.74	74	-13.26	peak
4844	48.88	-3.63	45.25	54	-8.75	AVG
7266	58.50	-0.94	57.56	74	-16.44	peak
7266	45.26	-0.94	44.32	54	-9.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.34	-3.51	59.83	74	-14.17	peak
4874	47.59	-3.51	44.08	54	-9.92	AVG
7311	59.56	-0.82	58.74	74	-15.26	peak
7311	44.63	-0.82	43.81	54	-10.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.70	-0.82	55.88	74	-18.12	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.11	-3.43	60.68	74	-13.32	peak
4904	49.41	-3.43	45.98	54	-8.02	AVG
7356	57.85	-0.75	57.10	74	-16.90	peak
7356	41.35	-0.75	40.60	54	-13.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.00	-3.43	58.57	74	-15.43	peak
4904	46.49	-3.43	43.06	54	-10.94	AVG
7356	57.97	-0.75	57.22	74	-16.78	peak
7356	43.67	-0.75	42.92	54	-11.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.41	-3.64	59.77	74	-14.23	peak
4824	48.41	-3.64	44.77	54	-9.23	AVG
7236	59.16	-0.95	58.21	74	-15.79	peak
7236	44.47	-0.95	43.52	54	-10.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.89	-3.64	63.25	74	-10.75	peak
4824	48.47	-3.64	44.83	54	-9.17	AVG
7236	60.80	-0.95	59.85	74	-14.15	peak
7236	44.87	-0.95	43.92	54	-10.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.52	-3.51	59.01	74.00	-14.99	peak
4874.00	48.80	-3.51	45.29	54.00	-8.71	AVG
7311.00	57.12	-0.82	56.30	74.00	-17.70	peak
7311.00	45.52	-0.82	44.70	54.00	-9.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	61.76	-3.51	58.25	74.00	-15.75	peak
4874.00	45.67	-3.51	42.16	54.00	-11.84	AVG
7311.00	58.17	-0.82	57.35	74.00	-16.65	peak
7311.00	43.51	-0.82	42.69	54.00	-11.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.53	-3.43	58.10	74	-15.90	peak
4924	46.01	-3.43	42.58	54	-11.42	AVG
7386	58.31	-0.75	57.56	74	-16.44	peak
7386	43.47	-0.75	42.72	54	-11.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.82	-3.43	61.39	74	-12.61	peak
4924	45.39	-3.43	41.96	54	-12.04	AVG
7386	56.36	-0.75	55.61	74	-18.39	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.47	-3.63	60.84	74	-13.16	peak
4844	48.65	-3.63	45.02	54	-8.98	AVG
7266	60.34	-0.94	59.40	74	-14.60	peak
7266	44.43	-0.94	43.49	54	-10.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.49	-3.63	60.86	74	-13.14	peak
4844	47.99	-3.63	44.36	54	-9.64	AVG
7266	58.90	-0.94	57.96	74	-16.04	peak
7266	44.53	-0.94	43.59	54	-10.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.05	-3.51	61.54	74	-12.46	peak
4874	49.06	-3.51	45.55	54	-8.45	AVG
7311	58.01	-0.82	57.19	74	-16.81	peak
7311	45.81	-0.82	44.99	54	-9.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.34	-0.82	42.52	54	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.23	-3.43	60.80	74	-13.20	peak
4904	48.88	-3.43	45.45	54	-8.55	AVG
7356	57.34	-0.75	56.59	74	-17.41	peak
7356	41.66	-0.75	40.91	54	-13.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.75	-3.43	59.32	74	-14.68	peak
4904	47.11	-3.43	43.68	54	-10.32	AVG
7356	57.63	-0.75	56.88	74	-17.12	peak
7356	43.03	-0.75	42.28	54	-11.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.58	-5.81	50.77	74	-23.23	peak
2390	/	-5.81	/	54	/	AVG
2399	63.86	-5.84	58.02	74	-15.98	peak
2399	49.76	-5.84	43.92	54	-10.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	63.55	-5.84	57.71	74	-16.29	peak
2399	45.94	-5.84	40.10	54	-13.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.73	-5.65	50.08	74	-23.92	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.88	-5.81	53.07	74	-20.93	peak
2390	/	-5.81	/	54	/	AVG
2399	63.26	-5.84	57.42	74	-16.58	peak
2399	47.20	-5.84	41.36	54	-12.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.82	-5.81	52.01	74	-21.99	peak
2390	/	-5.81	/	54	/	AVG
2399	62.17	-5.84	56.33	74	-17.67	peak
2399	46.89	-5.84	41.05	54	-12.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.38	-5.65	50.73	74	-23.27	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.43	-5.65	51.78	74	-22.22	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.86	-5.81	51.05	74	-22.95	peak
2390	/	-5.81	/	54	/	AVG
2399	63.78	-5.84	57.94	74	-16.06	peak
2399	48.31	-5.84	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.12	-5.81	51.31	74	-22.69	peak
2390	/	-5.81	/	54	/	AVG
2399	61.48	-5.84	55.64	74	-18.36	peak
2399	46.40	-5.84	40.56	54	-13.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.44	-5.65	50.79	74	-23.21	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.41	-5.65	49.76	74	-24.24	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.61	-5.81	52.80	74	-21.20	peak
2390	/	-5.81	/	54	/	AVG
2399	62.63	-5.84	56.79	74	-17.21	peak
2399	46.44	-5.84	40.60	54	-13.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.64	-5.81	52.83	74	-21.17	peak
2390	/	-5.81	/	54	/	AVG
2399	61.05	-5.84	55.21	74	-18.79	peak
2399	46.97	-5.84	41.13	54	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.93	-5.65	51.28	74	-22.72	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.87	-5.65	52.22	74	-21.78	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.03	-5.81	50.22	74	-23.78	peak
2390	/	-5.81	/	54	/	AVG
2399	63.00	-5.84	57.16	74	-16.84	peak
2399	48.00	-5.84	42.16	54	-11.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.54	-5.81	50.73	74	-23.27	peak
2390	/	-5.81	/	54	/	AVG
2399	60.93	-5.84	55.09	74	-18.91	peak
2399	47.90	-5.84	42.06	54	-11.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.81	-5.65	50.16	74	-23.84	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.68	-5.65	51.03	74	-22.97	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.08	-5.81	52.27	74	-21.73	peak
2390	/	-5.81	/	54	/	AVG
2399	63.98	-5.84	58.14	74	-15.86	peak
2399	47.18	-5.84	41.34	54	-12.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.11	-5.81	51.30	74	-22.70	peak
2390	/	-5.81	/	54	/	AVG
2399	62.06	-5.84	56.22	74	-17.78	peak
2399	45.65	-5.84	39.81	54	-14.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.97	-5.65	51.32	74	-22.68	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.99	-5.65	52.34	74	-21.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

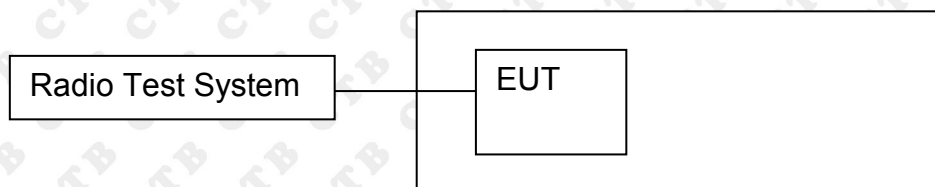

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

ANT1:




BAND EDGE Graphs

802.11g/LCH




802.11g/HCH

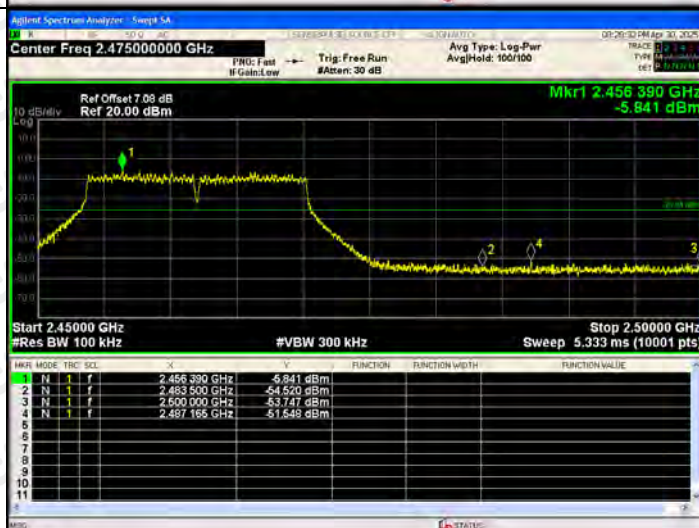


BAND EDGE Graphs

802.11n(HT20)/LCH

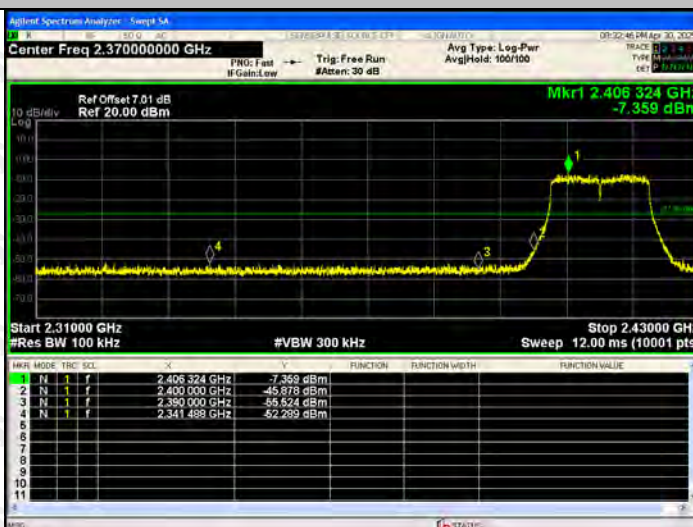


802.11n(HT20)/HCH

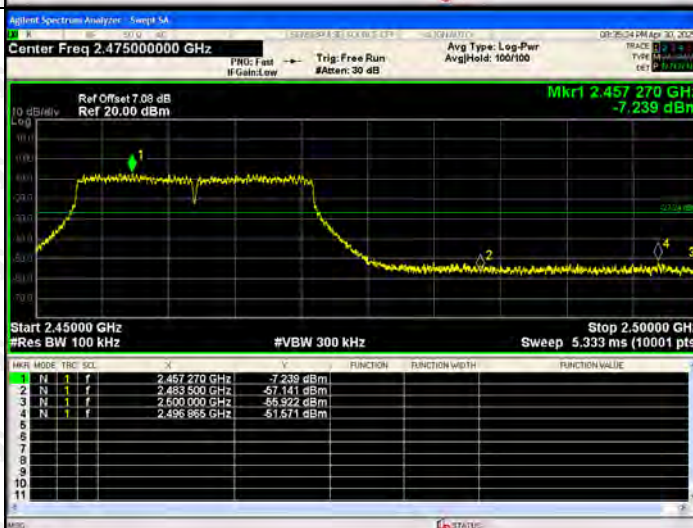

BAND EDGE Graphs

802.11n(HT40)/LCH

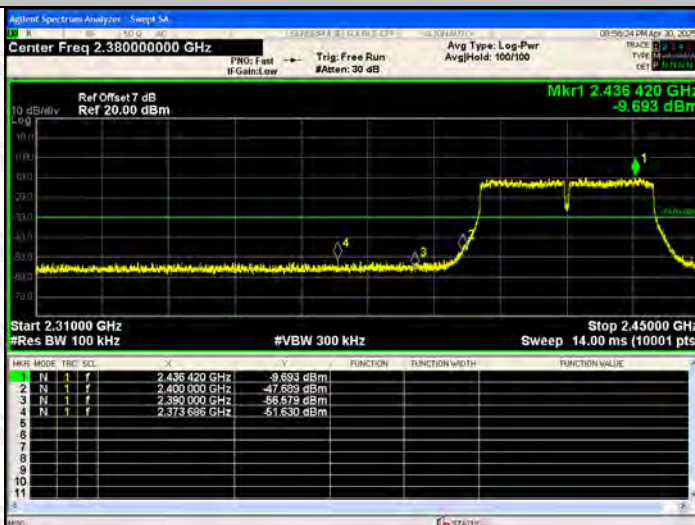

802.11n(HT40)/HCH



BAND EDGE Graphs

802.11ax(HT20)/
LCH




802.11ax(HT20)/
HCH



BAND EDGE Graphs

802.11ax(HT40)/
LCH

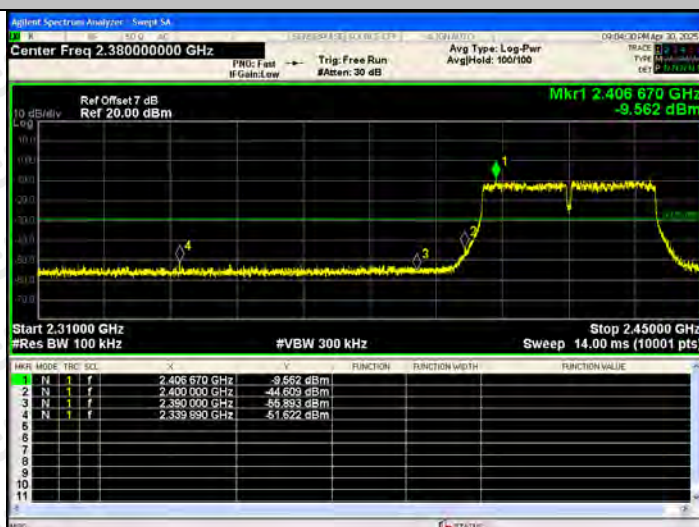


802.11ax(HT40)/
HCH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

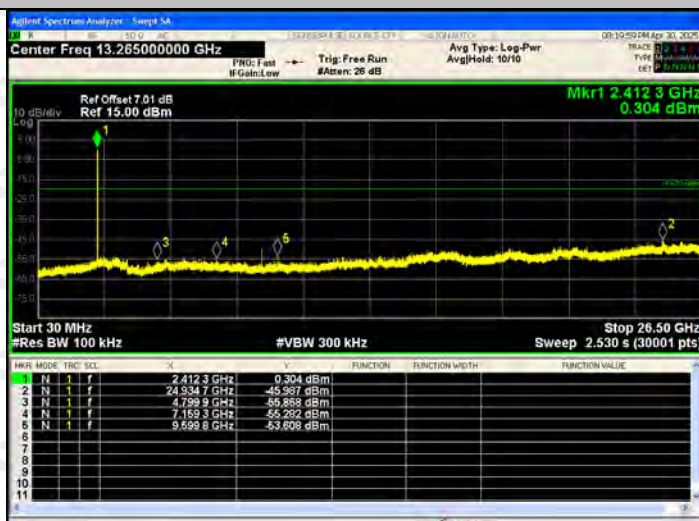

802.11b/MCH

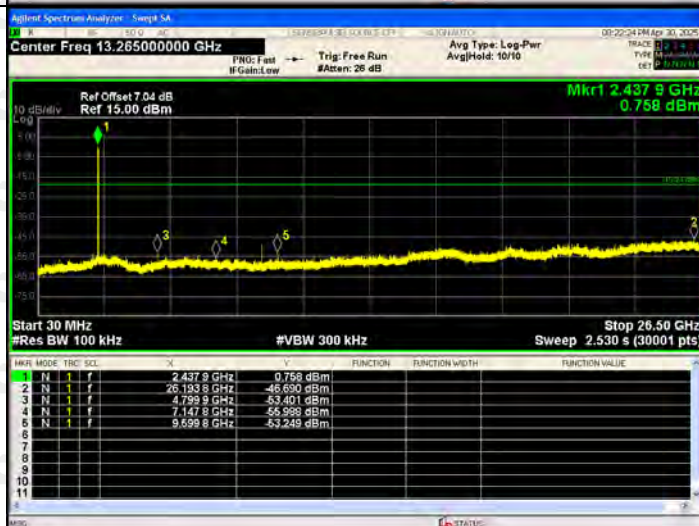


802.11b/HCH

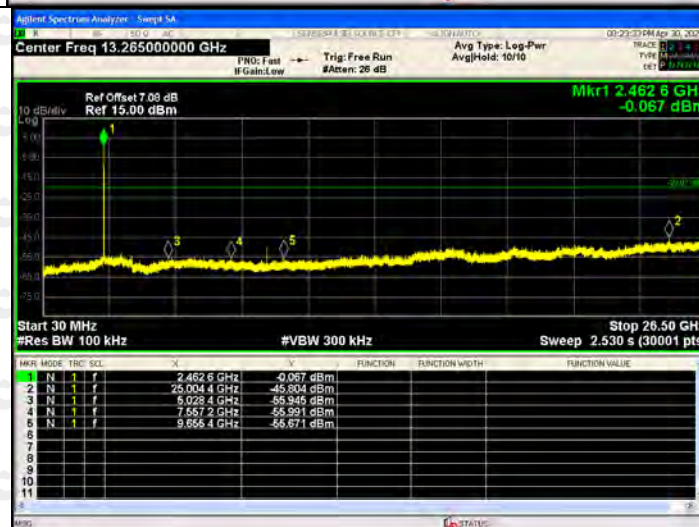


RF Conducted Spurious Emissions Graphs


802.11g/LCH

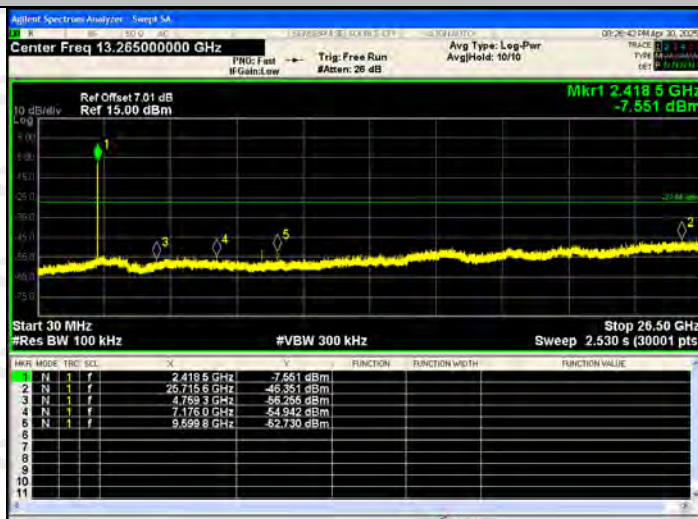


802.11g/MCH



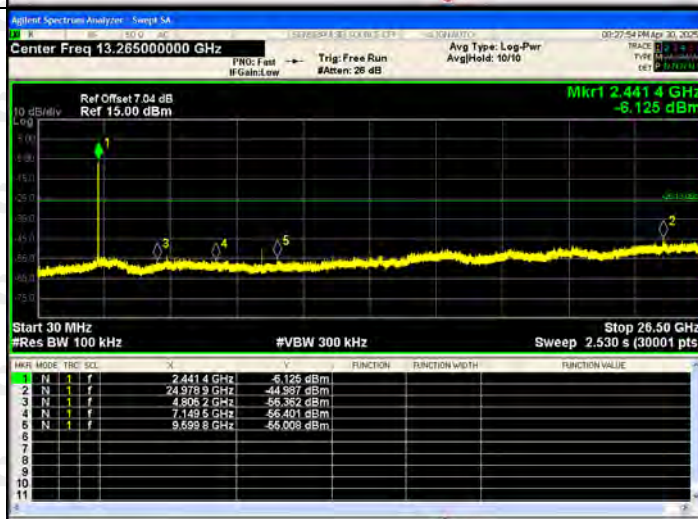


802.11g/HCH

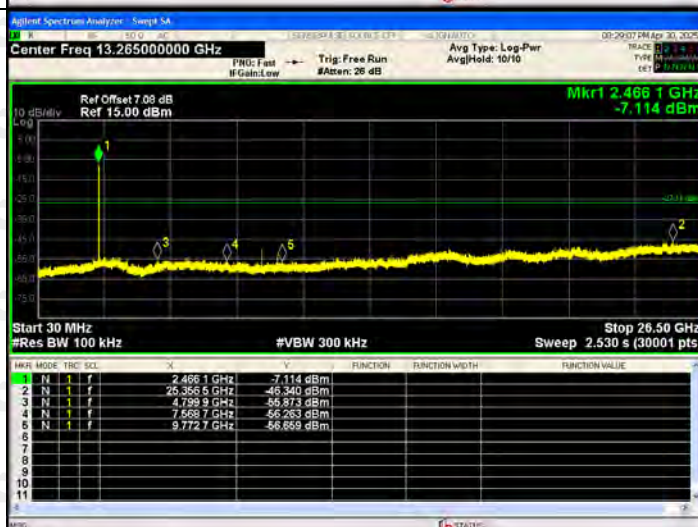


RF Conducted Spurious Emissions Graphs

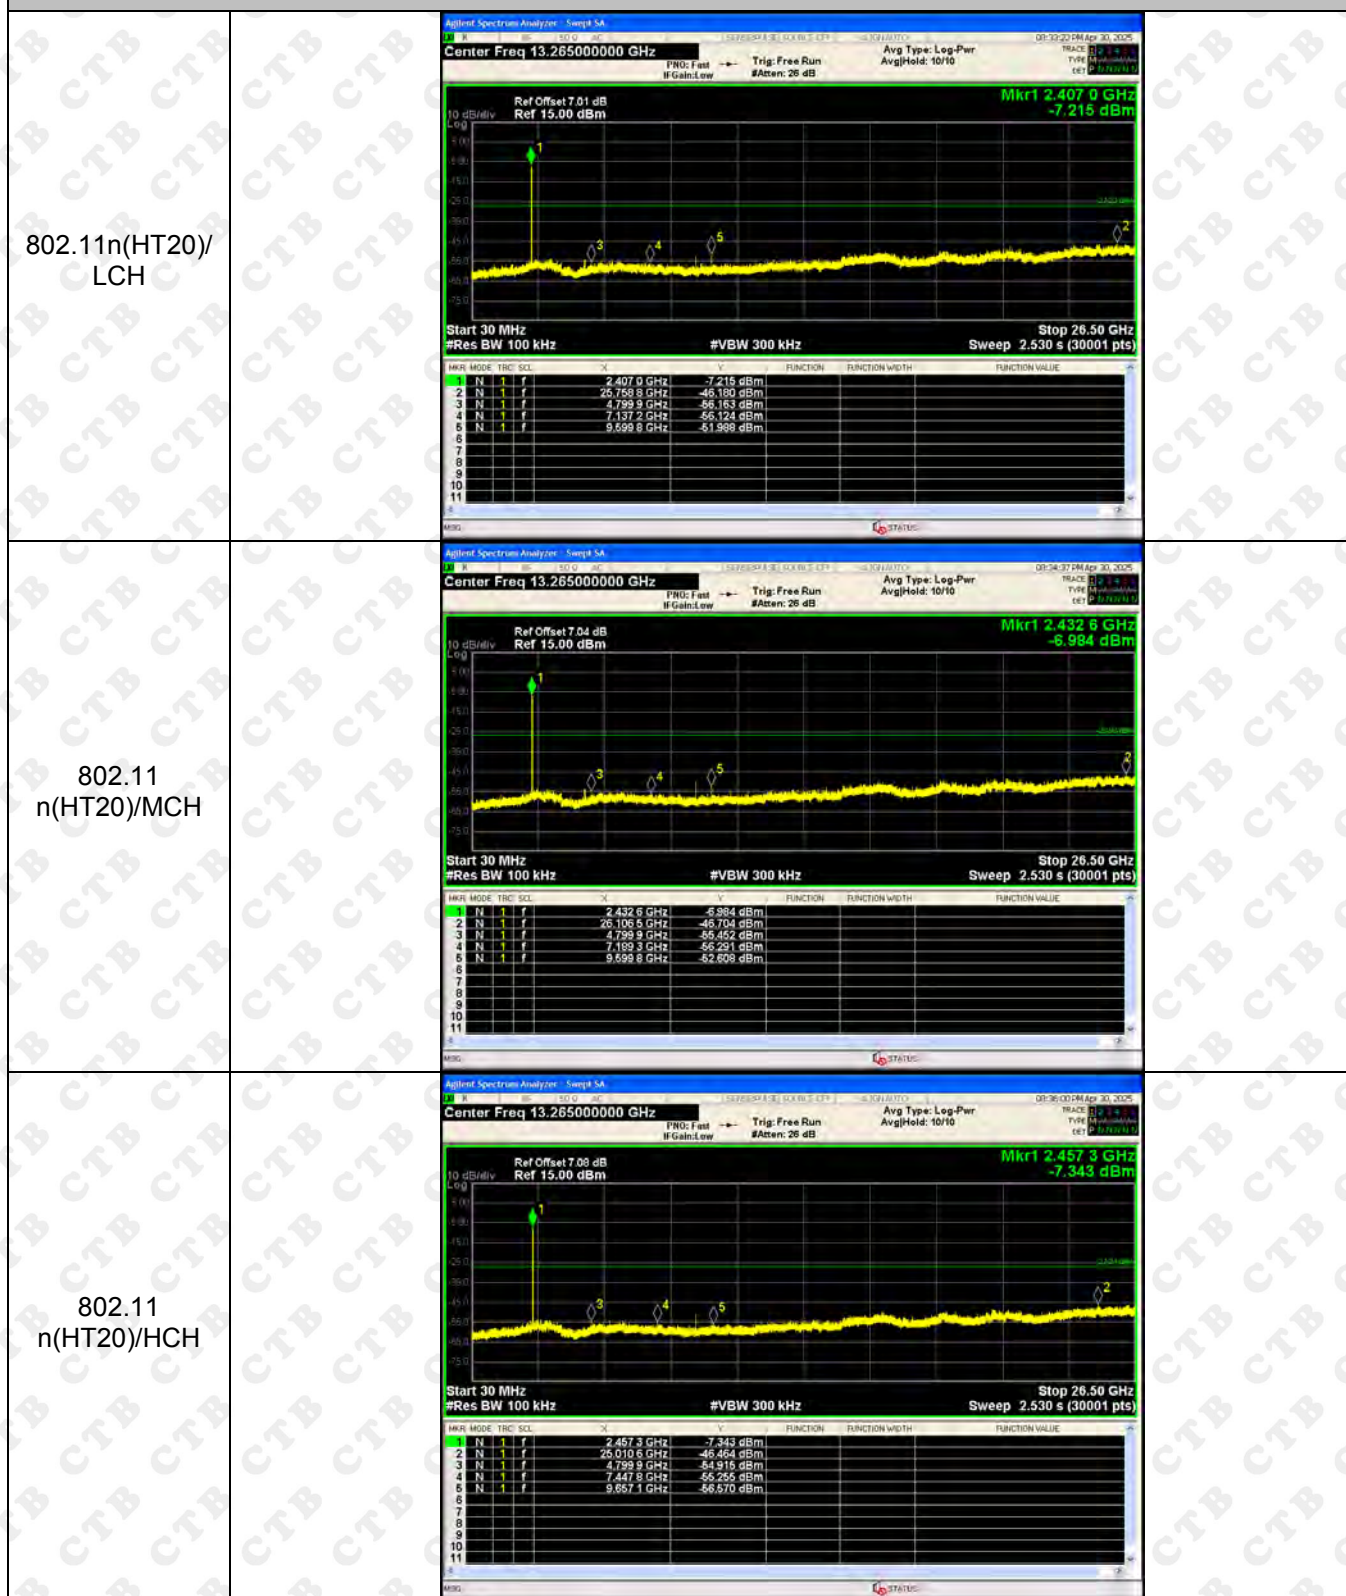

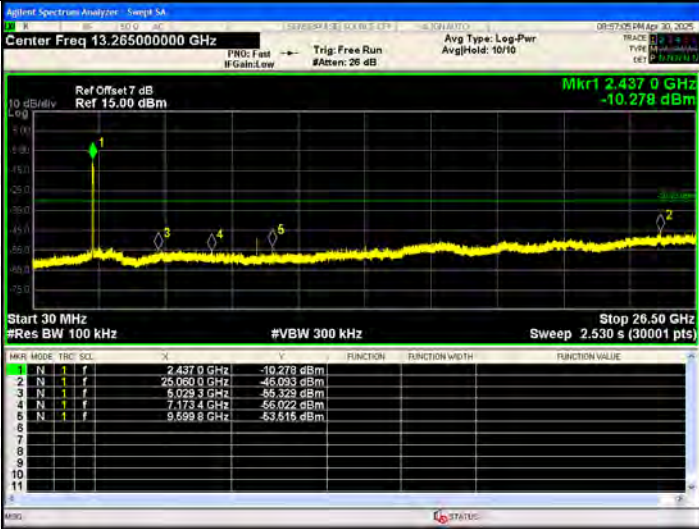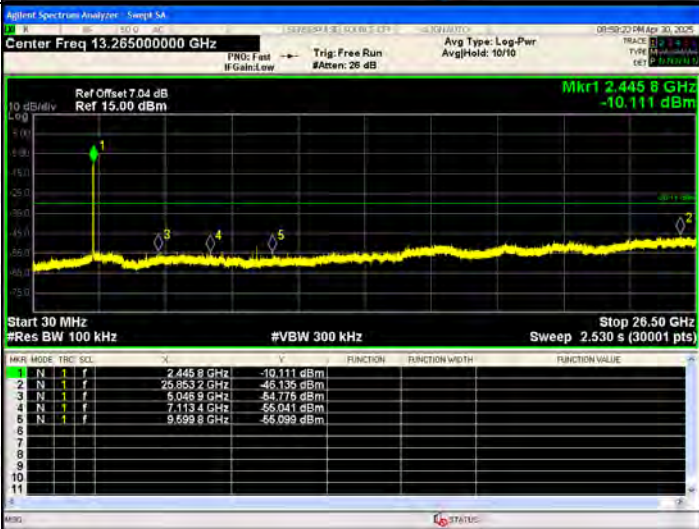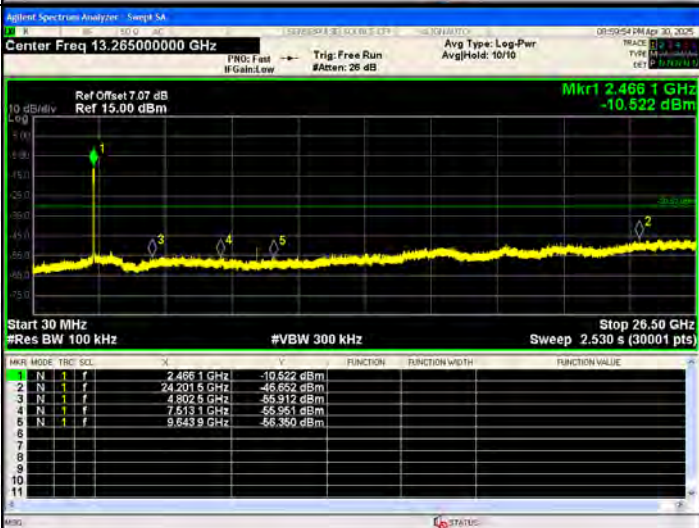
802.11n(HT40)/LCH	
802.11n(HT40)/MCH	
802.11n(HT40)/HCH	

RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH

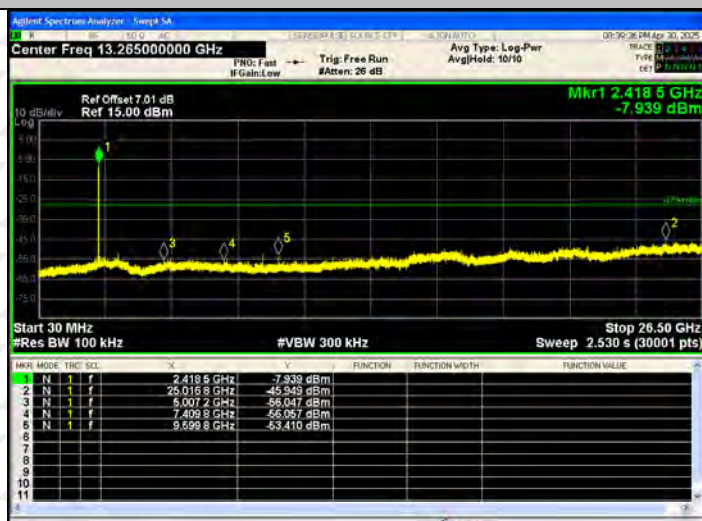

802.11 ax(HT20)/MCH

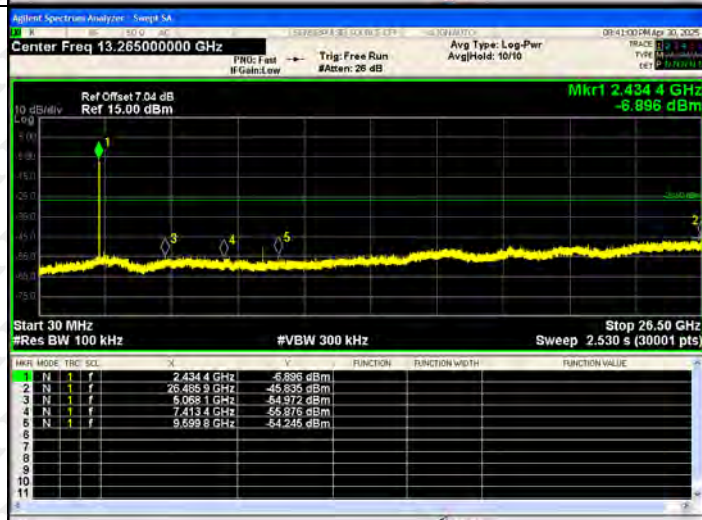


802.11 ax(HT20)/HCH

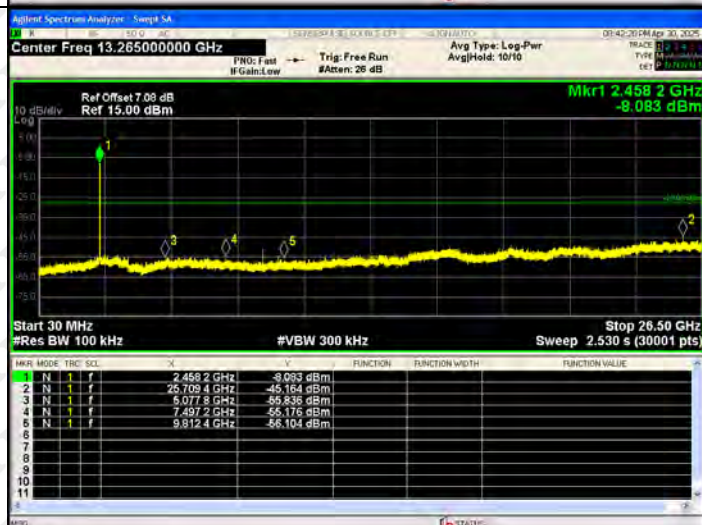


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

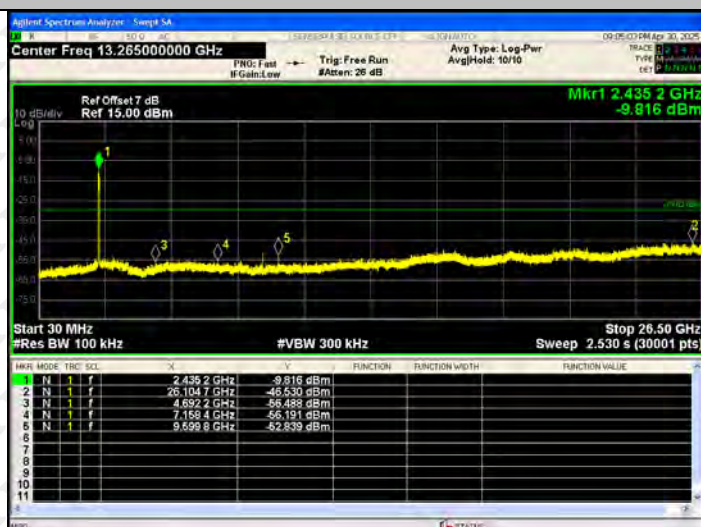

802.11 ax(HT40)/MCH

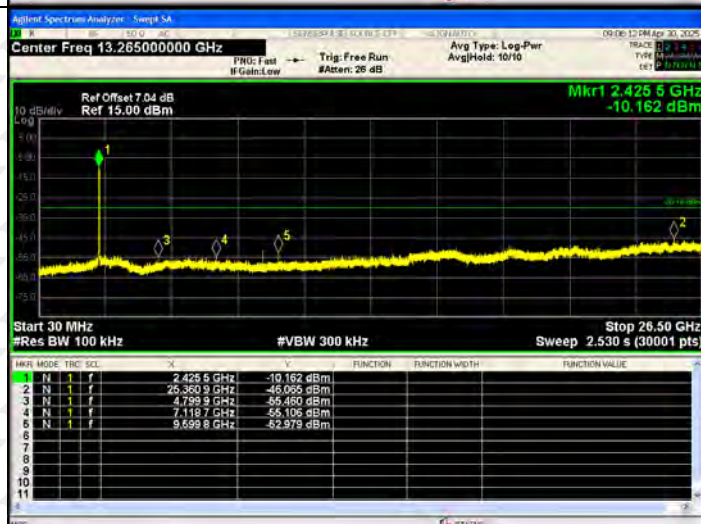


802.11 ax(HT40)/HCH

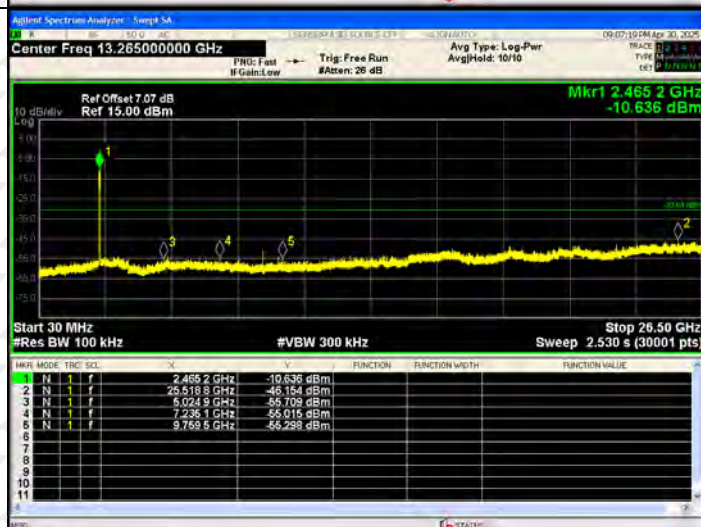

ANT2:

BAND EDGE Graphs

802.11b/LCH

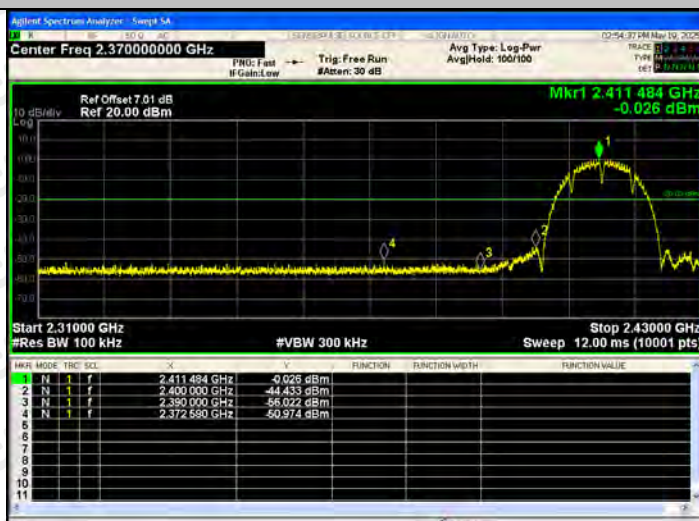


802.11b/HCH




BAND EDGE Graphs

802.11g/LCH

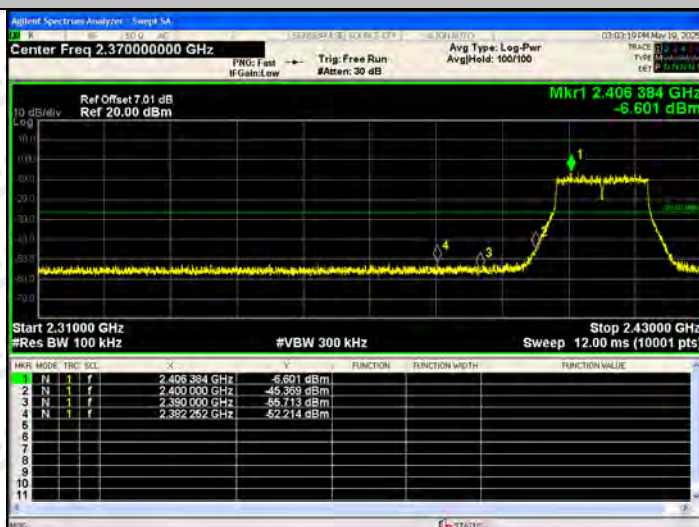

802.11g/HCH

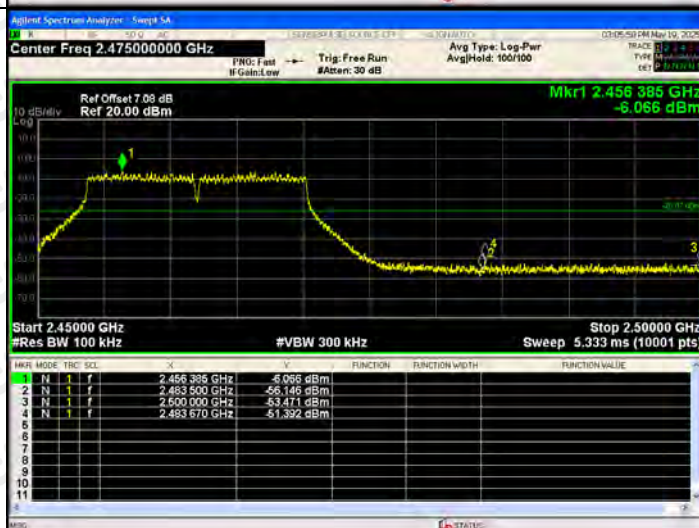

BAND EDGE Graphs

802.11n(HT20)/
LCH




802.11n(HT20)/
HCH



BAND EDGE Graphs

802.11n(HT40)/
LCH

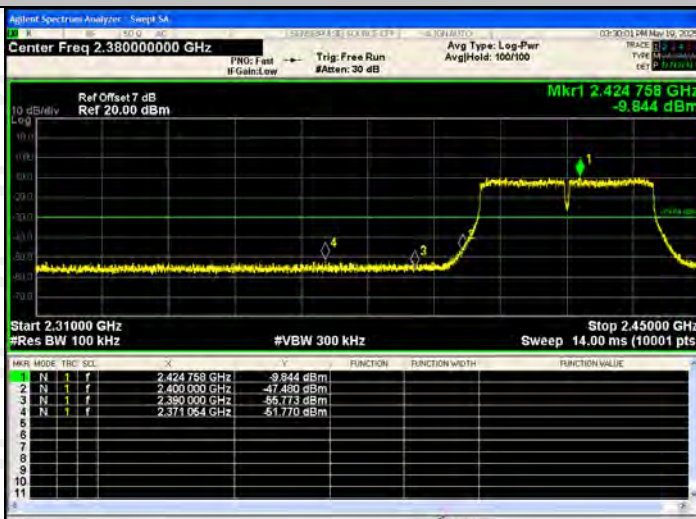

802.11n(HT40)/
HCH



BAND EDGE Graphs

802.11ax(HT20)/
LCH




802.11ax(HT20)/
HCH



BAND EDGE Graphs


802.11ax(HT40)/
LCH

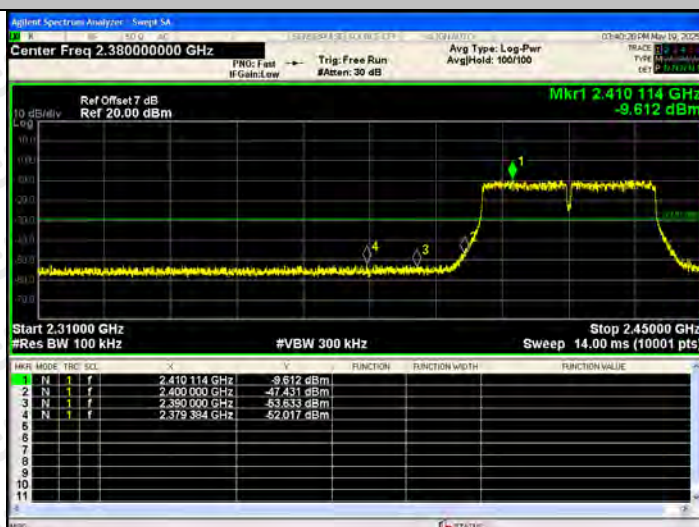

802.11ax(HT40)/
HCH






RF Conducted Spurious Emissions Graphs



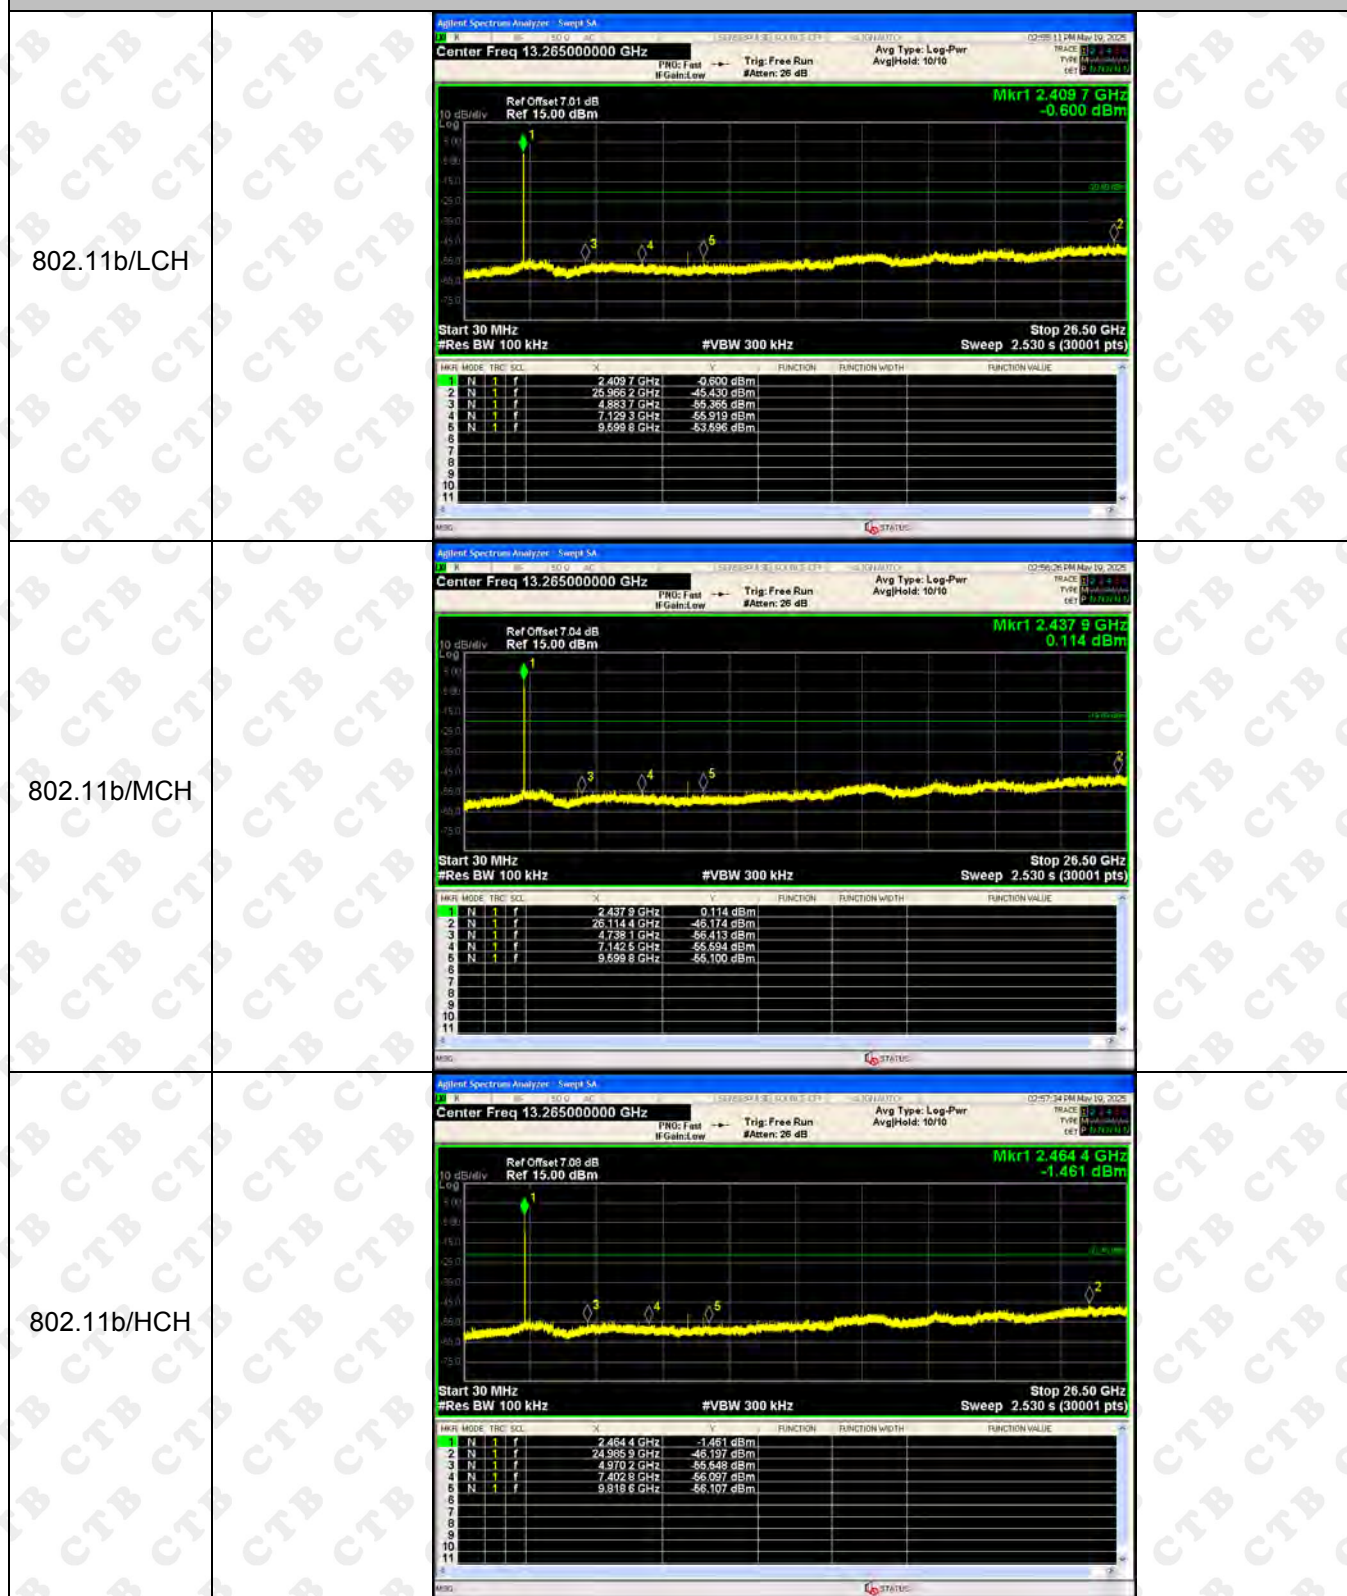


RF Conducted Spurious Emissions Graphs

802.11g/LCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.01 dB Ref 15.00 dBm Mkr1 2.409 7 GHz -9.383 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.409 7 GHz</td><td>-9.383 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.021 2 GHz</td><td>-45.994 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.740 8 GHz</td><td>-56.152 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.220 1 GHz</td><td>-56.136 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.599 8 GHz</td><td>-52.718 dBm</td><td></td><td></td><td></td></tr></table>	Marker	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.409 7 GHz	-9.383 dBm				2	N	25.021 2 GHz	-45.994 dBm				3	N	4.740 8 GHz	-56.152 dBm				4	N	7.220 1 GHz	-56.136 dBm				5	N	9.599 8 GHz	-52.718 dBm			
Marker	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.409 7 GHz	-9.383 dBm																																								
2	N	25.021 2 GHz	-45.994 dBm																																								
3	N	4.740 8 GHz	-56.152 dBm																																								
4	N	7.220 1 GHz	-56.136 dBm																																								
5	N	9.599 8 GHz	-52.718 dBm																																								
802.11g/MCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.441 4 GHz -7.242 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.441 4 GHz</td><td>-7.242 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.484 4 GHz</td><td>-45.482 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>5.004 6 GHz</td><td>-56.569 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.131 9 GHz</td><td>-56.304 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.599 8 GHz</td><td>-52.439 dBm</td><td></td><td></td><td></td></tr></table>	Marker	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.441 4 GHz	-7.242 dBm				2	N	25.484 4 GHz	-45.482 dBm				3	N	5.004 6 GHz	-56.569 dBm				4	N	7.131 9 GHz	-56.304 dBm				5	N	9.599 8 GHz	-52.439 dBm			
Marker	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.441 4 GHz	-7.242 dBm																																								
2	N	25.484 4 GHz	-45.482 dBm																																								
3	N	5.004 6 GHz	-56.569 dBm																																								
4	N	7.131 9 GHz	-56.304 dBm																																								
5	N	9.599 8 GHz	-52.439 dBm																																								
802.11g/HCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.08 dB Ref 15.00 dBm Mkr1 2.466 1 GHz -6.886 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.466 1 GHz</td><td>-6.886 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.937 4 GHz</td><td>-45.699 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>5.081 4 GHz</td><td>-56.208 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.426 6 GHz</td><td>-56.804 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.748 9 GHz</td><td>-56.299 dBm</td><td></td><td></td><td></td></tr></table>	Marker	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.466 1 GHz	-6.886 dBm				2	N	24.937 4 GHz	-45.699 dBm				3	N	5.081 4 GHz	-56.208 dBm				4	N	7.426 6 GHz	-56.804 dBm				5	N	9.748 9 GHz	-56.299 dBm			
Marker	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.466 1 GHz	-6.886 dBm																																								
2	N	24.937 4 GHz	-45.699 dBm																																								
3	N	5.081 4 GHz	-56.208 dBm																																								
4	N	7.426 6 GHz	-56.804 dBm																																								
5	N	9.748 9 GHz	-56.299 dBm																																								


RF Conducted Spurious Emissions Graphs

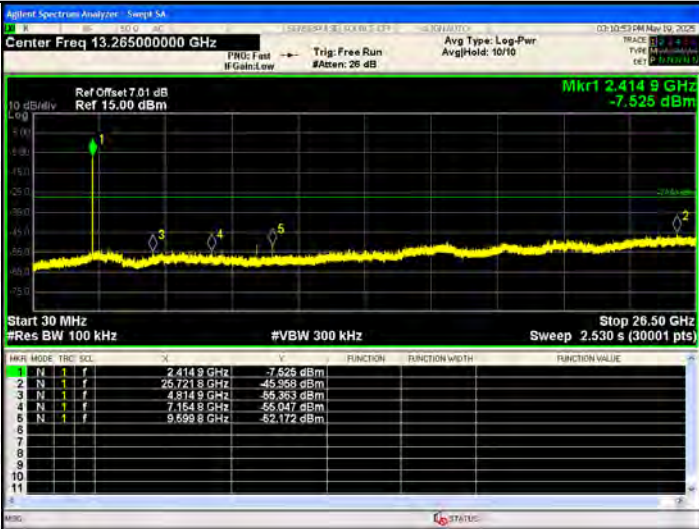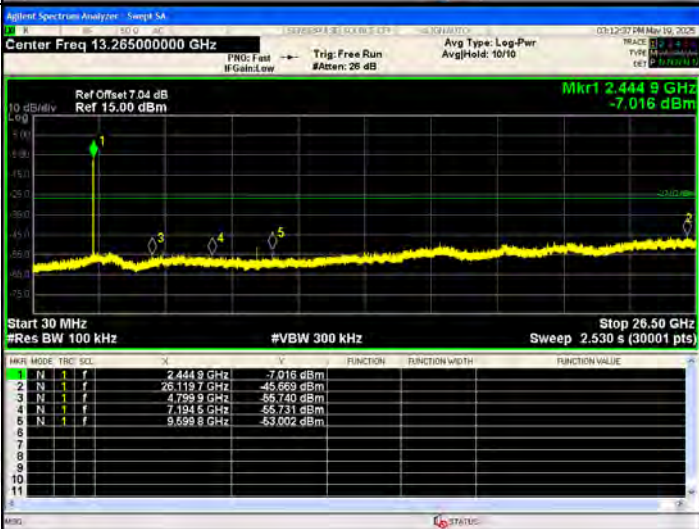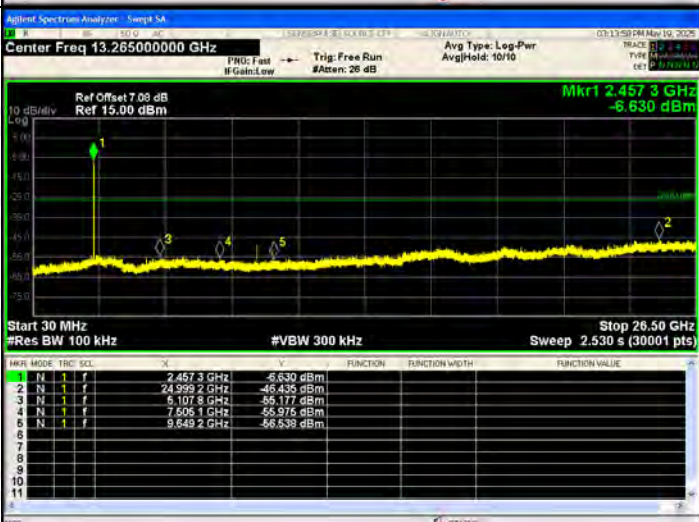802.11n(HT20)/LCH	
802.11n(HT20)/MCH	
802.11n(HT20)/HCH	

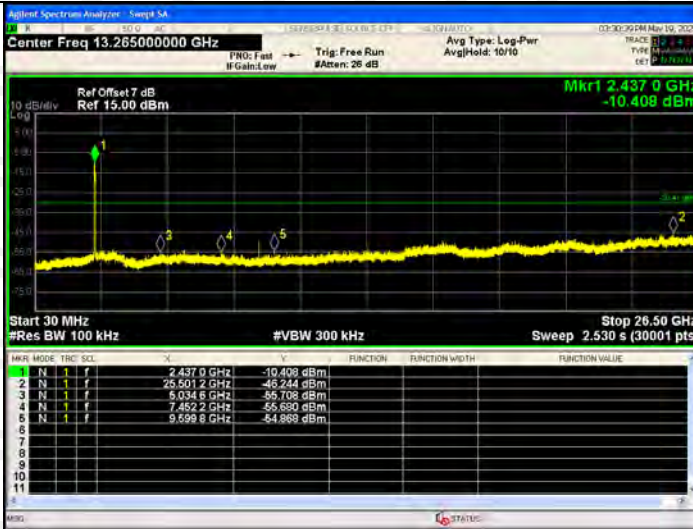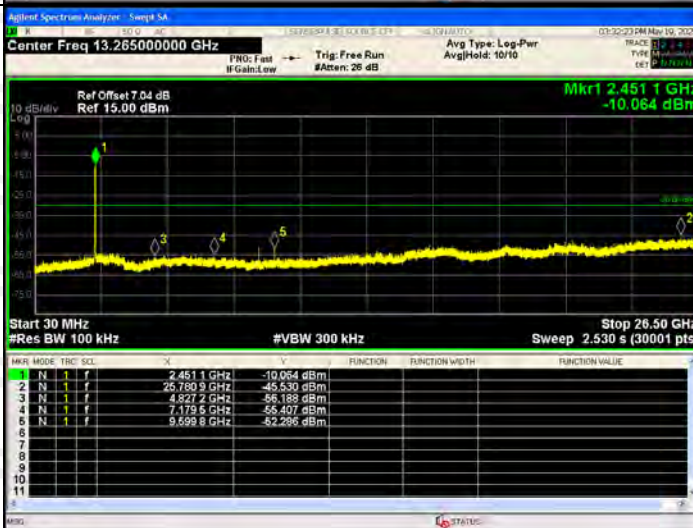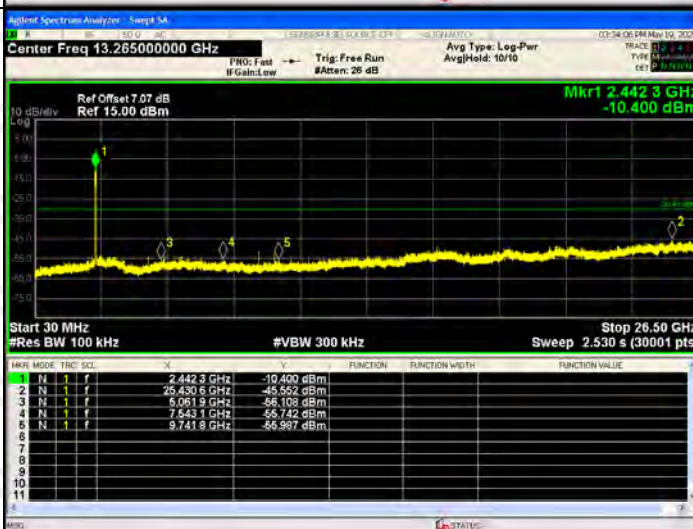
802.11n(HT40)/LCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-10.408 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.501 2 GHz</td><td>-45.244 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.034 5 GHz</td><td>-55.708 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.452 2 GHz</td><td>-55.690 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 8 GHz</td><td>-54.869 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-10.408 dBm				2	N	1	f	25.501 2 GHz	-45.244 dBm				3	N	1	f	5.034 5 GHz	-55.708 dBm				4	N	1	f	7.452 2 GHz	-55.690 dBm				5	N	1	f	9.599 8 GHz	-54.869 dBm			
HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-10.408 dBm																																																		
2	N	1	f	25.501 2 GHz	-45.244 dBm																																																		
3	N	1	f	5.034 5 GHz	-55.708 dBm																																																		
4	N	1	f	7.452 2 GHz	-55.690 dBm																																																		
5	N	1	f	9.599 8 GHz	-54.869 dBm																																																		
802.11n(HT40)/MCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.451 1 GHz</td><td>-10.064 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.780 9 GHz</td><td>-45.530 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.521 2 GHz</td><td>-55.183 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.175 5 GHz</td><td>-55.407 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 8 GHz</td><td>-52.236 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.451 1 GHz	-10.064 dBm				2	N	1	f	25.780 9 GHz	-45.530 dBm				3	N	1	f	4.521 2 GHz	-55.183 dBm				4	N	1	f	7.175 5 GHz	-55.407 dBm				5	N	1	f	9.599 8 GHz	-52.236 dBm			
HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.451 1 GHz	-10.064 dBm																																																		
2	N	1	f	25.780 9 GHz	-45.530 dBm																																																		
3	N	1	f	4.521 2 GHz	-55.183 dBm																																																		
4	N	1	f	7.175 5 GHz	-55.407 dBm																																																		
5	N	1	f	9.599 8 GHz	-52.236 dBm																																																		
802.11n(HT40)/HCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.442 3 GHz</td><td>-10.400 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.430 6 GHz</td><td>-45.552 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.061 9 GHz</td><td>-55.103 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.543 1 GHz</td><td>-55.742 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.741 9 GHz</td><td>-55.987 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.442 3 GHz	-10.400 dBm				2	N	1	f	25.430 6 GHz	-45.552 dBm				3	N	1	f	5.061 9 GHz	-55.103 dBm				4	N	1	f	7.543 1 GHz	-55.742 dBm				5	N	1	f	9.741 9 GHz	-55.987 dBm			
HR	MODE	TRF	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.442 3 GHz	-10.400 dBm																																																		
2	N	1	f	25.430 6 GHz	-45.552 dBm																																																		
3	N	1	f	5.061 9 GHz	-55.103 dBm																																																		
4	N	1	f	7.543 1 GHz	-55.742 dBm																																																		
5	N	1	f	9.741 9 GHz	-55.987 dBm																																																		

RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH

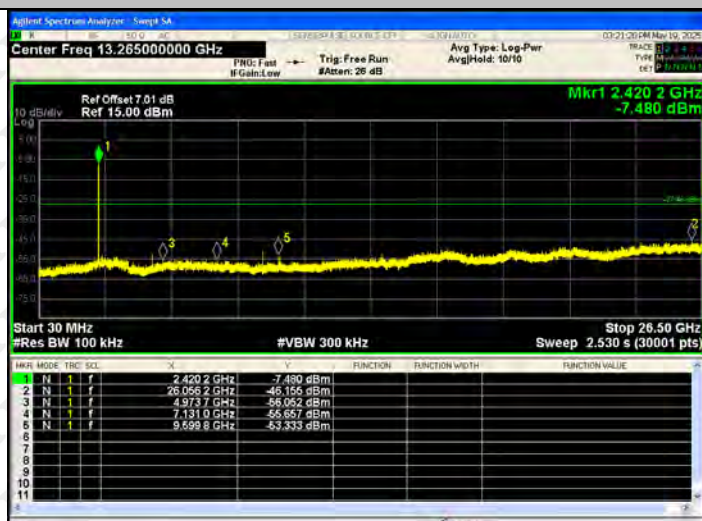

802.11 ax(HT20)/MCH

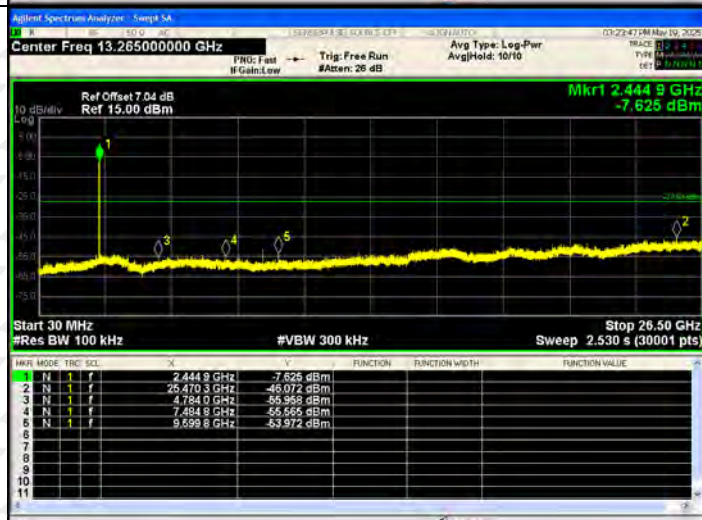


802.11 ax(HT20)/HCH

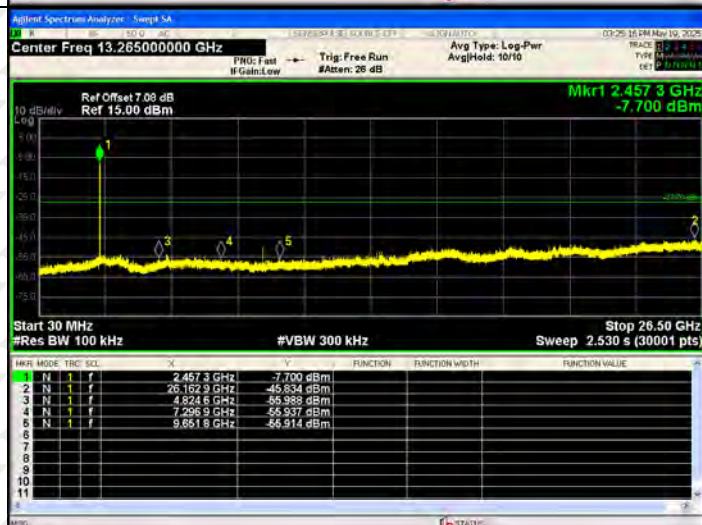


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

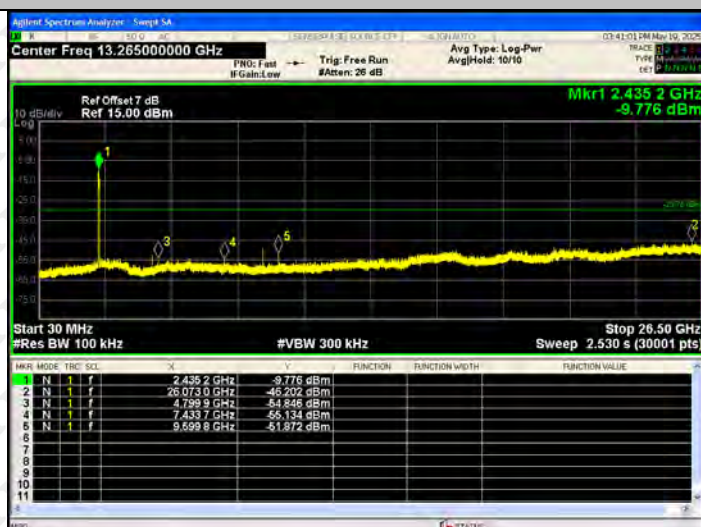

802.11 ax(HT40)/MCH

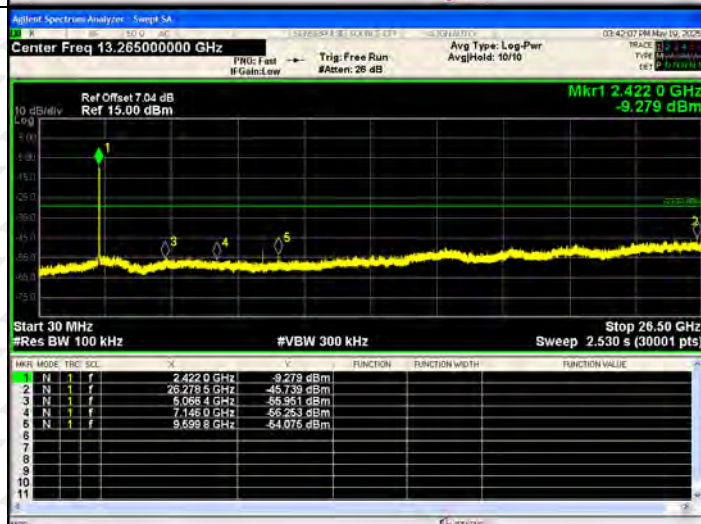


802.11 ax(HT40)/HCH

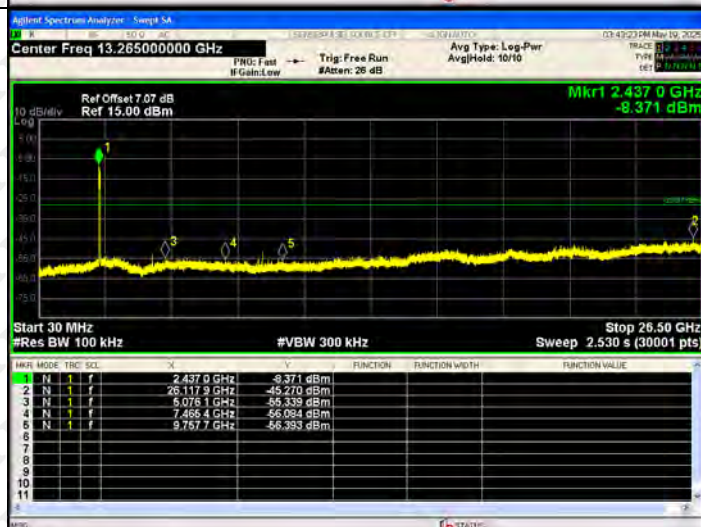

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

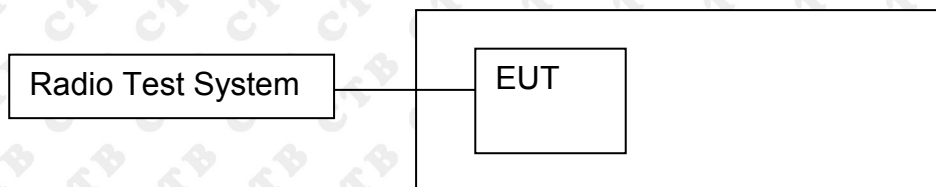

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.7	13.596	/	30
	MCH	14.136	13.497	/	30
	HCH	13.593	13.854	/	30
802.11g	LCH	13.625	13.244	/	30
	MCH	14.086	13.384	/	30
	HCH	13.579	13.821	/	30
802.11n(HT20)	LCH	13.159	13.713	16.455	30
	MCH	13.608	13.794	16.712	30
	HCH	13.111	13.343	16.239	30
802.11n(HT40)	LCH	13.513	13.911	16.727	30
	MCH	13.693	13.912	16.814	30
	HCH	13.591	13.807	16.711	30
802.11ax(HT20)	LCH	13.31	13.504	16.418	30
	MCH	13.697	13.585	16.652	30
	HCH	13.197	13.087	16.153	30
802.11ax(HT40)	LCH	13.44	13.875	16.673	30
	MCH	13.772	14.035	16.916	30
	HCH	13.651	14.001	16.840	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

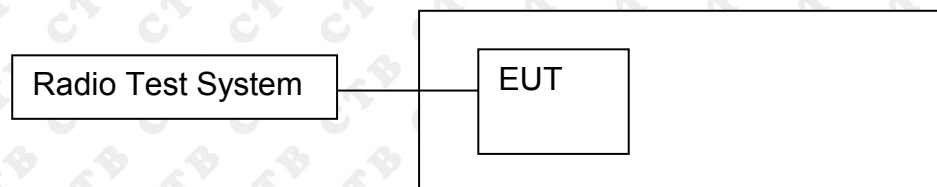

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.129	500	PASS
	MCH	10.113	500	PASS
	HCH	10.127	500	PASS
802.11g	LCH	16.536	500	PASS
	MCH	16.517	500	PASS
	HCH	16.51	500	PASS
802.11n(HT20)	LCH	17.779	500	PASS
	MCH	17.775	500	PASS
	HCH	17.753	500	PASS
802.11n(HT40)	LCH	36.46	500	PASS
	MCH	36.445	500	PASS
	HCH	36.465	500	PASS
802.11ax(HT20)	LCH	17.716	500	PASS
	MCH	17.747	500	PASS
	HCH	17.745	500	PASS
802.11ax(HT40)	LCH	36.475	500	PASS
	MCH	36.446	500	PASS
	HCH	36.435	500	PASS



ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.135	500	PASS
	MCH	10.124	500	PASS
	HCH	10.124	500	PASS
802.11g	LCH	16.517	500	PASS
	MCH	16.549	500	PASS
	HCH	16.518	500	PASS
802.11n(HT20)	LCH	17.748	500	PASS
	MCH	17.772	500	PASS
	HCH	17.76	500	PASS
802.11n(HT40)	LCH	36.464	500	PASS
	MCH	36.473	500	PASS
	HCH	36.458	500	PASS
802.11ax(HT20)	LCH	17.778	500	PASS
	MCH	17.765	500	PASS
	HCH	17.717	500	PASS
802.11ax(HT40)	LCH	36.485	500	PASS
	MCH	36.457	500	PASS
	HCH	36.46	500	PASS


ANT1:
Test Graph:


Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.417061 GHz -7.1902 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.975 MHz Total Power: 17.4 dBm Transmit Freq Error: -3.598 kHz OBW Power: 99.00 % x dB Bandwidth: 10.13 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.442057 GHz -6.5272 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.979 MHz Total Power: 17.8 dBm Transmit Freq Error: 354 Hz OBW Power: 99.00 % x dB Bandwidth: 10.11 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.06 dB Ref: 27.06 dBm Mkr3: 2.467013 GHz -4.3063 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.989 MHz Total Power: 17.2 dBm Transmit Freq Error: -50.822 kHz OBW Power: 99.00 % x dB Bandwidth: 10.13 MHz x dB: -6.00 dB

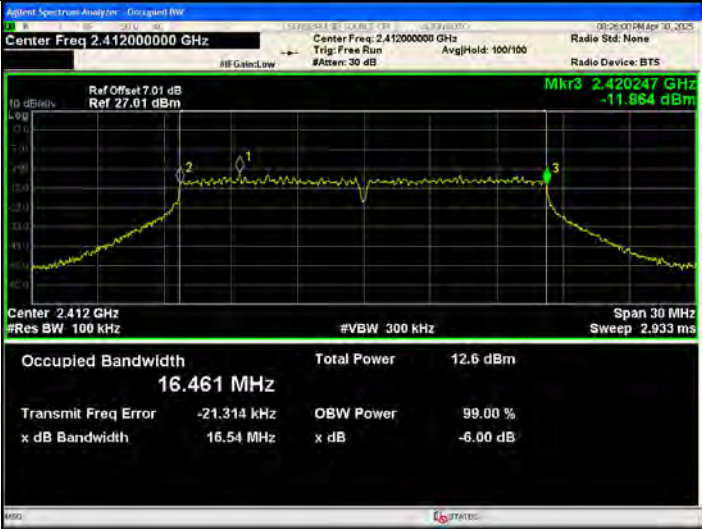802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

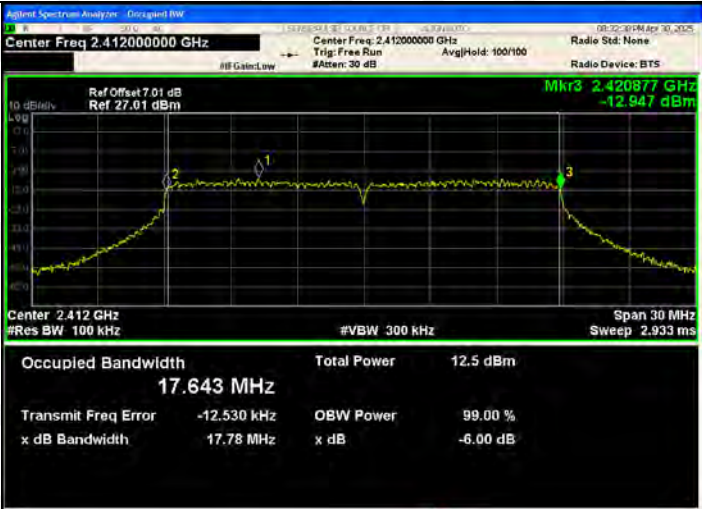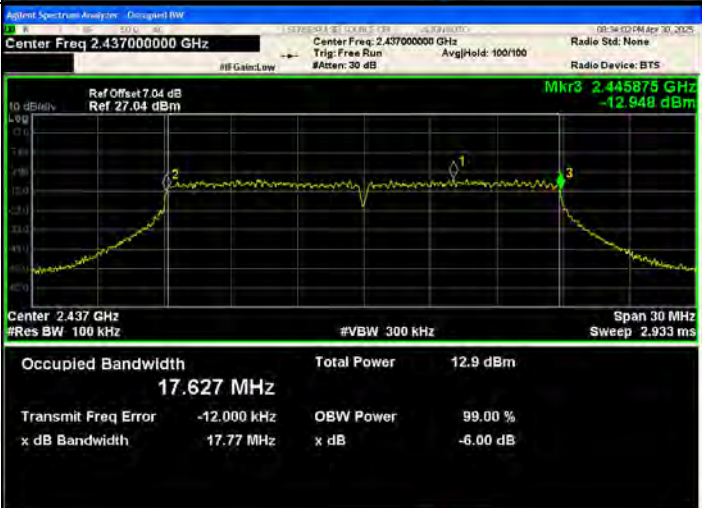802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Occupied Bandwidth: 17.643 MHz Total Power: 12.5 dBm Transmit Freq Error: -12.530 kHz x dB Bandwidth: 17.78 MHz OBW Power: 99.00 % x dB: -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Occupied Bandwidth: 17.627 MHz Total Power: 12.9 dBm Transmit Freq Error: -12.000 kHz x dB Bandwidth: 17.77 MHz OBW Power: 99.00 % x dB: -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 7.06 dB Ref: 27.06 dBm Occupied Bandwidth: 17.638 MHz Total Power: 12.4 dBm Transmit Freq Error: -26.076 kHz x dB Bandwidth: 17.75 MHz OBW Power: 99.00 % x dB: -6.00 dB

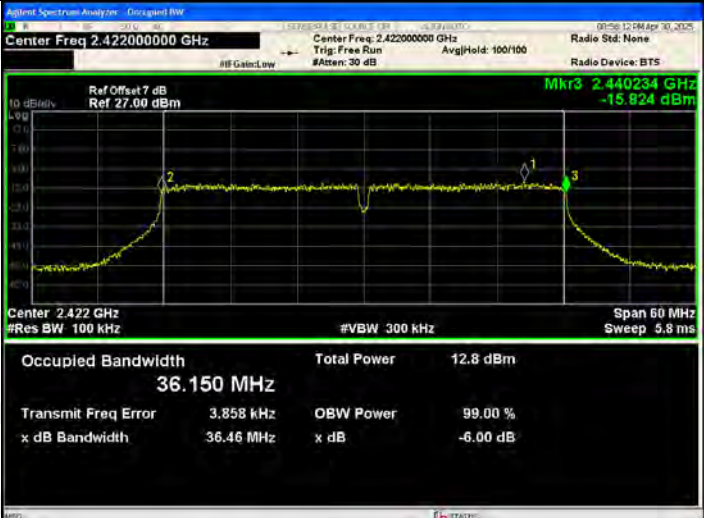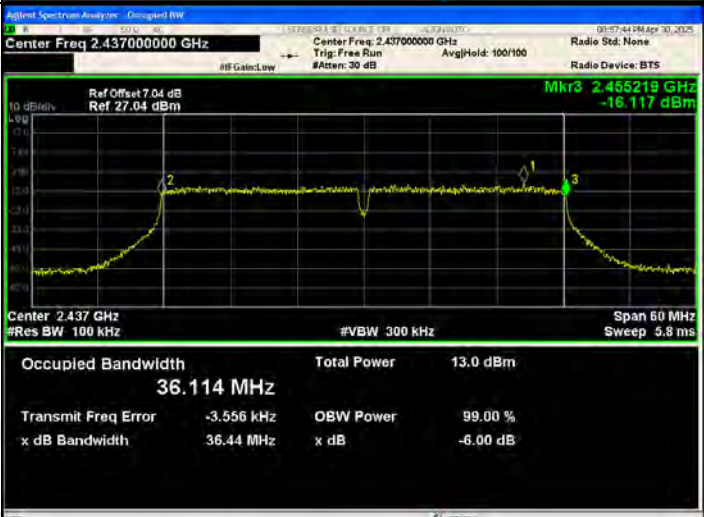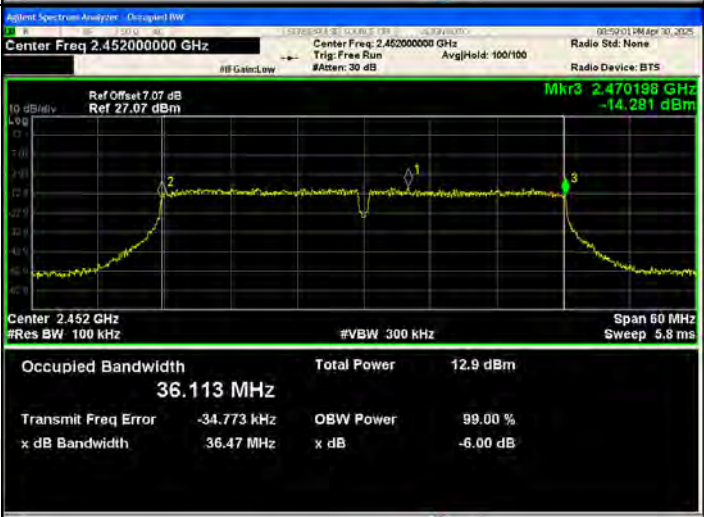
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 7.0 dB Ref: 27.00 dBm Mkr3: 2.440234 GHz -15.924 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.150 MHz Total Power: 12.8 dBm Transmit Freq Error: 3.858 kHz OBW Power: 99.00 % x dB Bandwidth: 36.46 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.455219 GHz -16.117 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.114 MHz Total Power: 13.0 dBm Transmit Freq Error: -3.556 kHz OBW Power: 99.00 % x dB Bandwidth: 36.44 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Mkr3: 2.470188 GHz -14.281 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.113 MHz Total Power: 12.9 dBm Transmit Freq Error: -34.773 kHz OBW Power: 99.00 % x dB Bandwidth: 36.47 MHz x dB: -6.00 dB



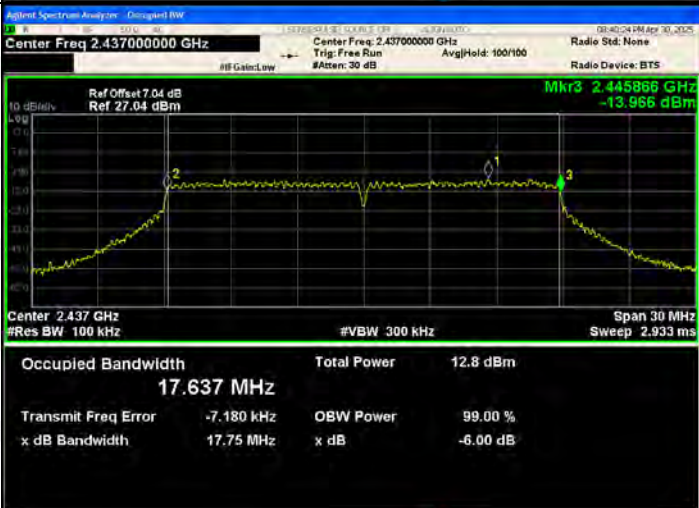
802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.42084 GHz -13.379 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.608 MHz Total Power: 12.5 dBm Transmit Freq Error: -17.889 kHz OBW Power: 99.00 % x dB Bandwidth: 17.72 MHz x dB: -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.445866 GHz -13.966 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.637 MHz Total Power: 12.8 dBm Transmit Freq Error: -7.180 kHz OBW Power: 99.00 % x dB Bandwidth: 17.75 MHz x dB: -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 7.08 dB Ref: 27.08 dBm Mkr3: 2.470851 GHz -12.772 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.636 MHz Total Power: 12.3 dBm Transmit Freq Error: -21.265 kHz OBW Power: 99.00 % x dB Bandwidth: 17.74 MHz x dB: -6.00 dB



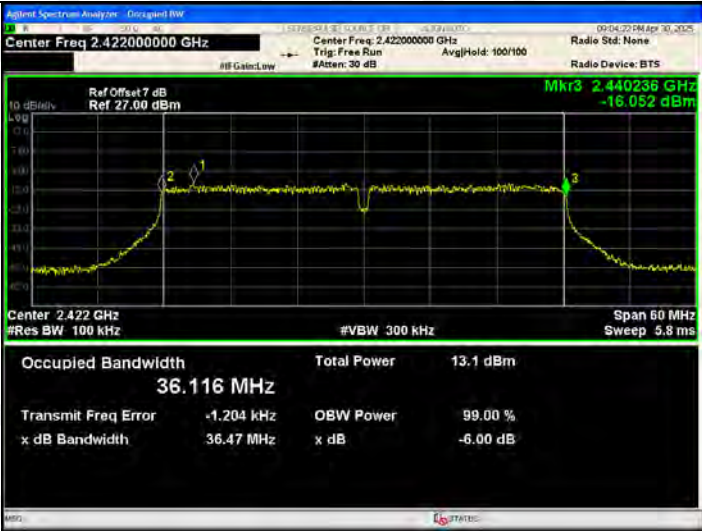
802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 7 dB Ref: 27.00 dBm Mkr3: 2.440236 GHz -16.052 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.116 MHz Total Power: 13.1 dBm Transmit Freq Error: -1.204 kHz OBW Power: 99.00 % x dB Bandwidth: 36.47 MHz x dB: -6.00 dB
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.455225 GHz -15.995 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.093 MHz Total Power: 13.4 dBm Transmit Freq Error: 2.336 kHz OBW Power: 99.00 % x dB Bandwidth: 36.45 MHz x dB: -6.00 dB
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Mkr3: 2.470175 GHz -15.004 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.071 MHz Total Power: 13.3 dBm Transmit Freq Error: -42.769 kHz OBW Power: 99.00 % x dB Bandwidth: 36.44 MHz x dB: -6.00 dB


ANT2:



Test Graph:



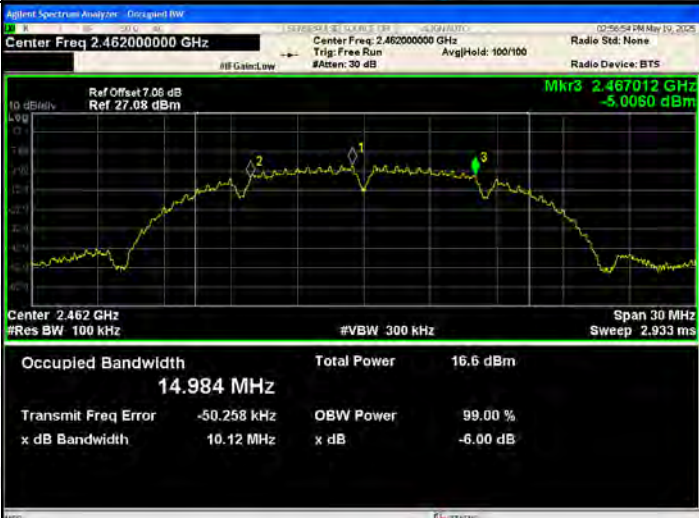
Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.417038 GHz -5.2087 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 15.003 MHz Total Power: 17.0 dBm Transmit Freq Error: -29.403 kHz OBW Power: 99.00 % x dB Bandwidth: 10.13 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.442059 GHz -7.8171 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.977 MHz Total Power: 17.1 dBm Transmit Freq Error: -2.577 kHz OBW Power: 99.00 % x dB Bandwidth: 10.12 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.06 dB Ref: 27.06 dBm Mkr3: 2.467012 GHz -5.0060 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.984 MHz Total Power: 16.6 dBm Transmit Freq Error: -50.258 kHz OBW Power: 99.00 % x dB Bandwidth: 10.12 MHz x dB: -6.00 dB

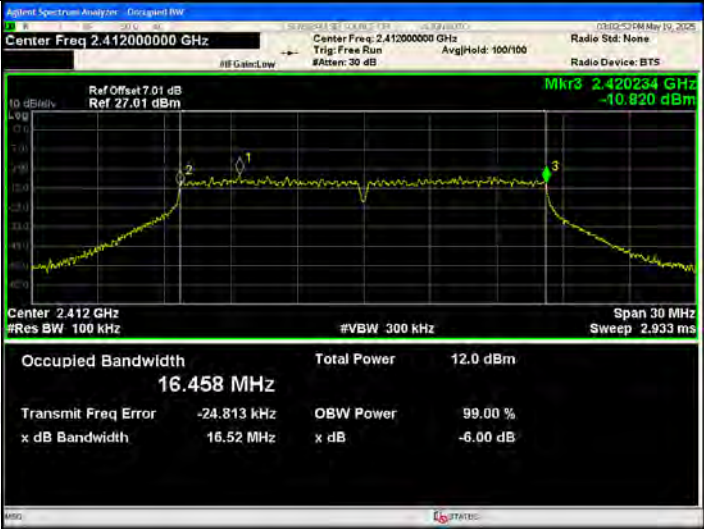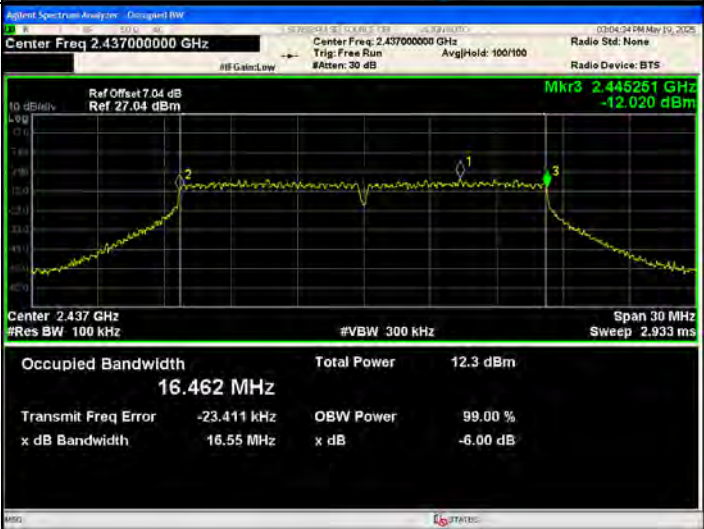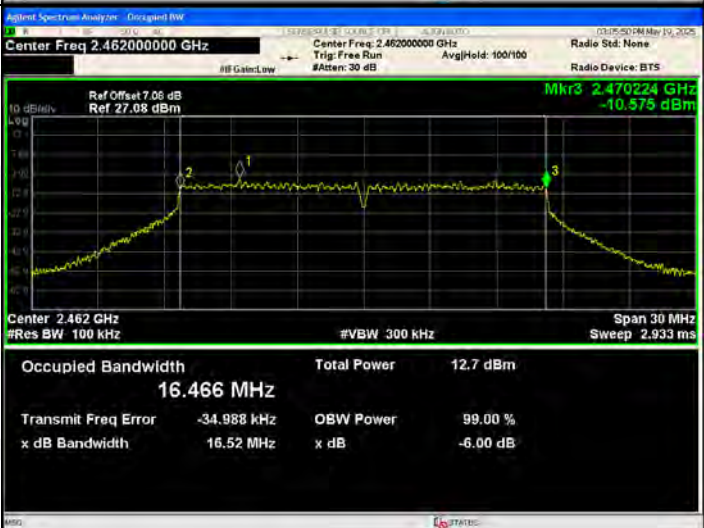802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

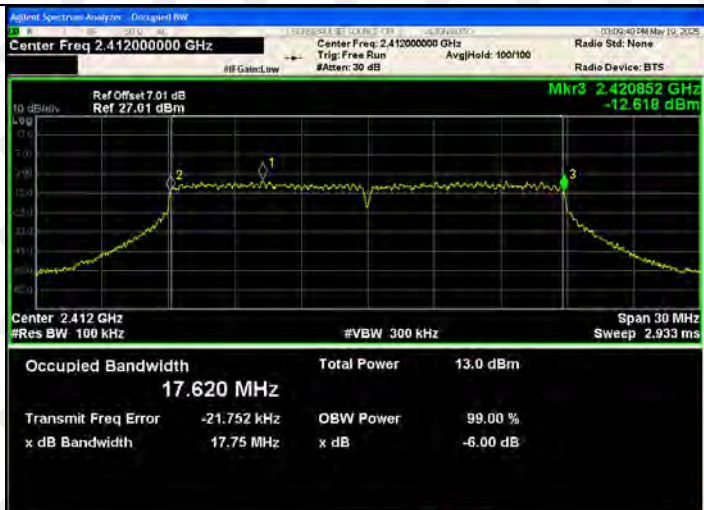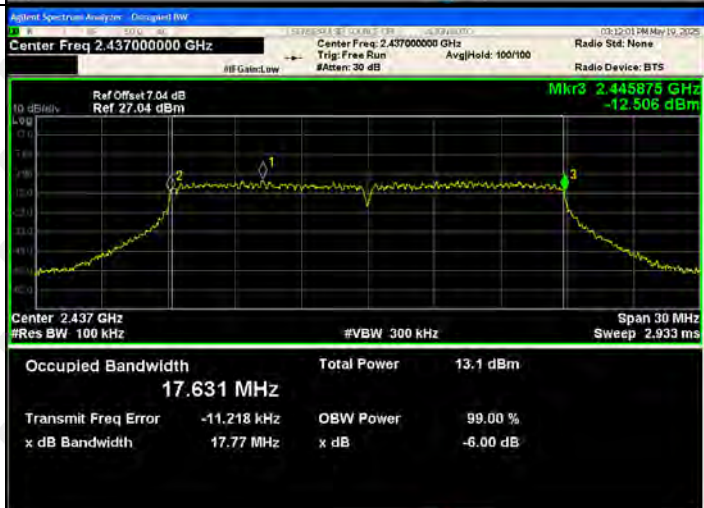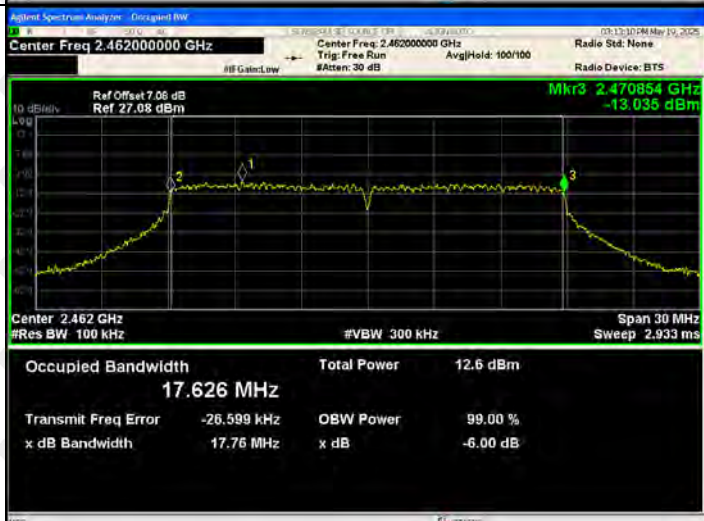802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.420852 GHz -12.618 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>13.0 dBm</td></tr><tr><td>17.620 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-21.752 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.75 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	13.0 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	-21.752 kHz	x dB	-6.00 dB	x dB Bandwidth			17.75 MHz		
Occupied Bandwidth	Total Power	13.0 dBm																	
17.620 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-21.752 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.75 MHz																			
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.445875 GHz -12.506 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>13.1 dBm</td></tr><tr><td>17.631 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-11.218 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.77 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	13.1 dBm	17.631 MHz			Transmit Freq Error	OBW Power	99.00 %	-11.218 kHz	x dB	-6.00 dB	x dB Bandwidth			17.77 MHz		
Occupied Bandwidth	Total Power	13.1 dBm																	
17.631 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-11.218 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.77 MHz																			
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 7.06 dB Ref: 27.06 dBm Mkr3: 2.470854 GHz -13.035 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.6 dBm</td></tr><tr><td>17.626 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-26.599 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.76 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.6 dBm	17.626 MHz			Transmit Freq Error	OBW Power	99.00 %	-26.599 kHz	x dB	-6.00 dB	x dB Bandwidth			17.76 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
17.626 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-26.599 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.76 MHz																			

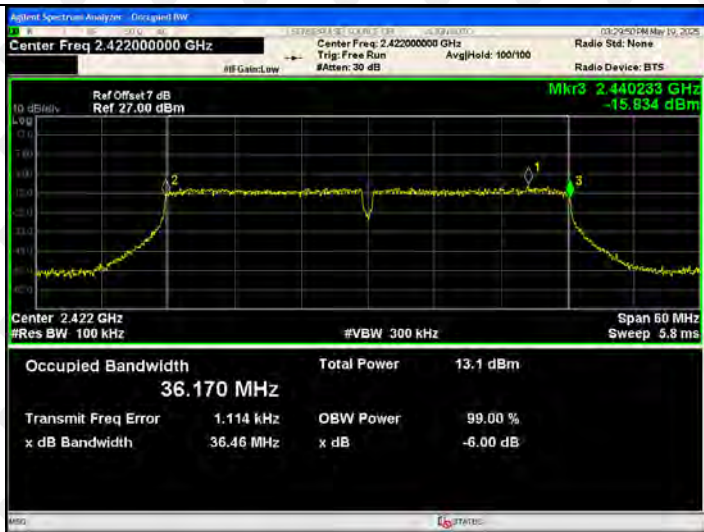
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.440233 GHz -15.834 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">36.170 MHz</td><td>Total Power</td><td>13.1 dBm</td></tr><tr><td>Transmit Freq Error</td><td>1.114 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>36.46 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	36.170 MHz		Total Power	13.1 dBm	Transmit Freq Error	1.114 kHz	OBW Power	99.00 %		x dB Bandwidth	36.46 MHz	x dB	-6.00 dB	
Occupied Bandwidth	36.170 MHz		Total Power	13.1 dBm												
Transmit Freq Error	1.114 kHz	OBW Power	99.00 %													
x dB Bandwidth	36.46 MHz	x dB	-6.00 dB													
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.455235 GHz -15.401 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">36.124 MHz</td><td>Total Power</td><td>13.3 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-1.371 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>36.47 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	36.124 MHz		Total Power	13.3 dBm	Transmit Freq Error	-1.371 kHz	OBW Power	99.00 %		x dB Bandwidth	36.47 MHz	x dB	-6.00 dB	
Occupied Bandwidth	36.124 MHz		Total Power	13.3 dBm												
Transmit Freq Error	-1.371 kHz	OBW Power	99.00 %													
x dB Bandwidth	36.47 MHz	x dB	-6.00 dB													
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.470188 GHz -14.180 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">36.109 MHz</td><td>Total Power</td><td>13.2 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-30.549 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>36.46 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	36.109 MHz		Total Power	13.2 dBm	Transmit Freq Error	-30.549 kHz	OBW Power	99.00 %		x dB Bandwidth	36.46 MHz	x dB	-6.00 dB	
Occupied Bandwidth	36.109 MHz		Total Power	13.2 dBm												
Transmit Freq Error	-30.549 kHz	OBW Power	99.00 %													
x dB Bandwidth	36.46 MHz	x dB	-6.00 dB													

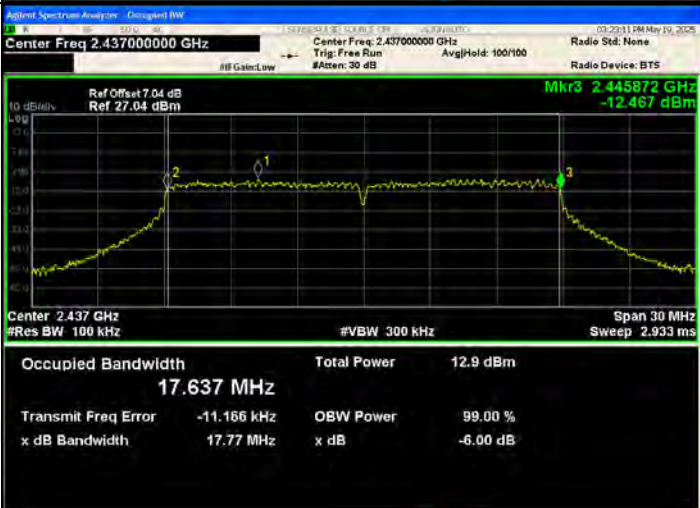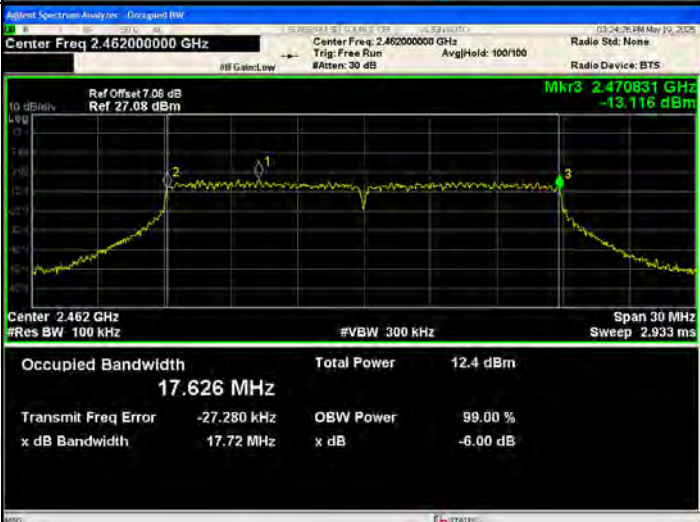802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420875 GHz -12.659 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.638 MHz Total Power 12.8 dBm Transmit Freq Error -14.039 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445872 GHz -12.467 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.637 MHz Total Power 12.9 dBm Transmit Freq Error -11.166 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.06 dB Ref 27.06 dBm Mkr3 2.470831 GHz -13.116 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.626 MHz Total Power 12.4 dBm Transmit Freq Error -27.280 kHz OBW Power 99.00 % x dB Bandwidth 17.72 MHz x dB -6.00 dB

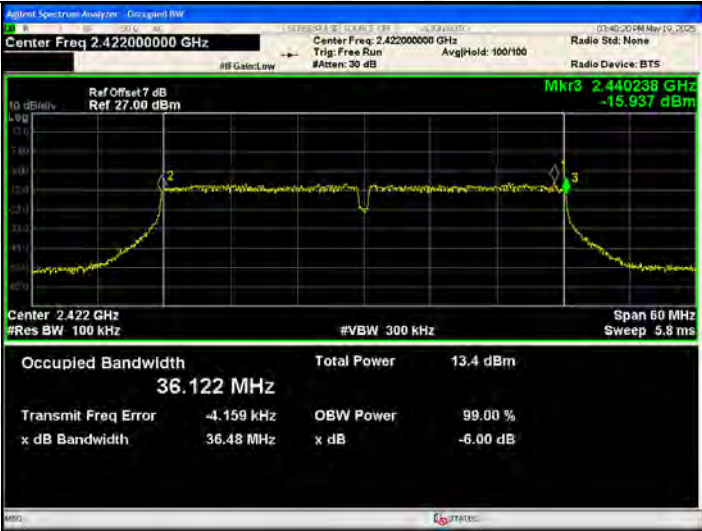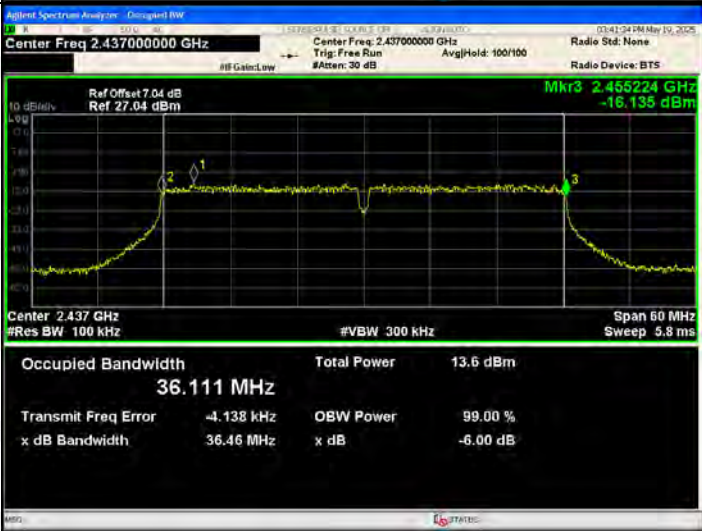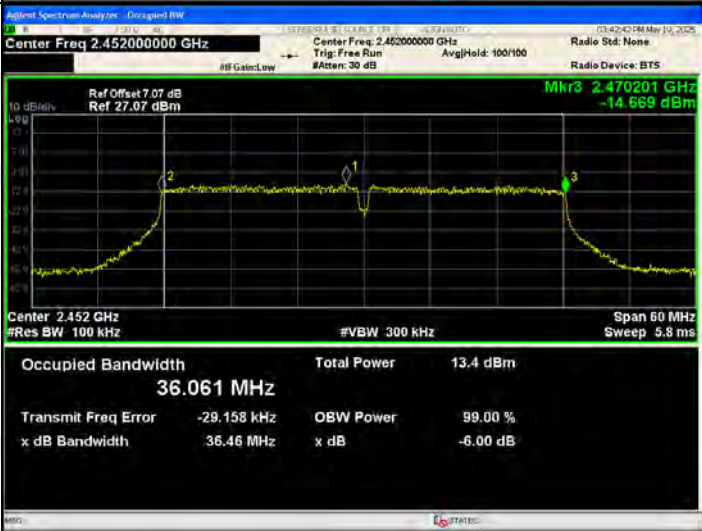802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 7 dB Ref: 27.00 dBm Mkr3: 2.440238 GHz -15.937 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.122 MHz Total Power: 13.4 dBm Transmit Freq Error: -4.159 kHz OBW Power: 99.00 % x dB Bandwidth: 36.48 MHz x dB: -6.00 dB
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.455224 GHz -16.135 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.111 MHz Total Power: 13.5 dBm Transmit Freq Error: -4.138 kHz OBW Power: 99.00 % x dB Bandwidth: 36.46 MHz x dB: -6.00 dB
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Mkr3: 2.470201 GHz -14.669 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.061 MHz Total Power: 13.4 dBm Transmit Freq Error: -29.158 kHz OBW Power: 99.00 % x dB Bandwidth: 36.46 MHz x dB: -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

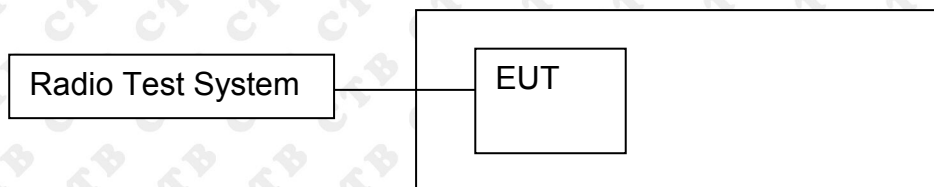

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz] ANT 1	Power Spectral Density [dBm /3kHz] ANT 2	Power Spectral Density [dBm /3kHz] Total	Limit(dBm)
802.11b	LCH	-19.65	-20.029	/	8
	MCH	-19.278	-19.894	/	8
	HCH	-19.88	-20.52	/	8
802.11g	LCH	-20.227	-20.861	/	8
	MCH	-19.766	-20.671	/	8
	HCH	-20.068	-20.136	/	8
802.11n(H T20)	LCH	-20.972	-20.501	-17.720	8
	MCH	-20.6	-19.792	-17.167	8
	HCH	-21.254	-20.914	-18.070	8
802.11n(H T40)	LCH	-22.711	-22.02	-19.341	8
	MCH	-22.564	-22.236	-19.387	8
	HCH	-22.398	-22.066	-19.219	8
802.11ax(HT20)	LCH	-19.324	-20.446	-16.839	8
	MCH	-19.248	-20.583	-16.854	8
	HCH	-19.665	-21.007	-17.274	8
802.11ax(HT40)	LCH	-23.161	-22.388	-19.747	8
	MCH	-22.636	-22.327	-19.468	8
	HCH	-22.845	-22.707	-19.765	8

ANT1:
Test Graph

Graphs

802.11b /LCH




802.11b /MCH





802.11b/HCH





802.11g/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.417 91 GHz -20.227 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.441 35 GHz -19.786 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.456 78 GHz -20.068 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

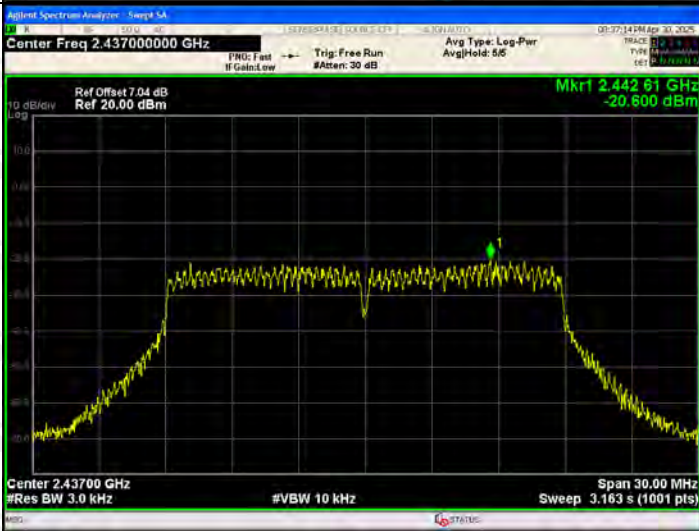802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41788 GHz -20.972 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44261 GHz -20.800 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.45414 GHz -21.254 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

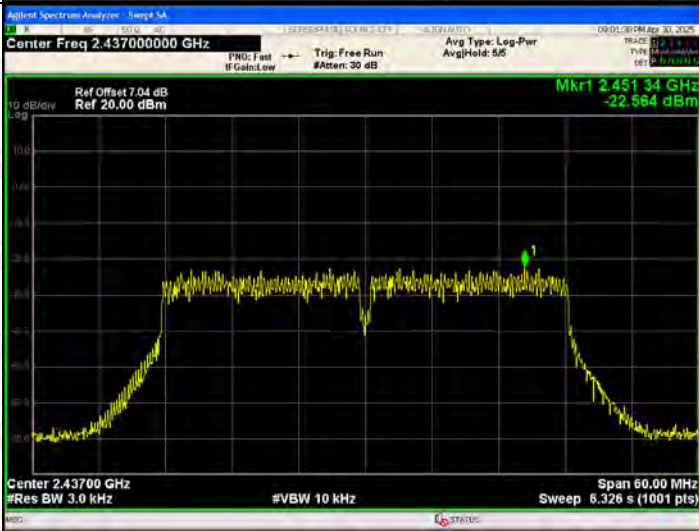802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.418 52 GHz -22.711 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.451 34 GHz -22.564 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.448 52 GHz -22.398 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

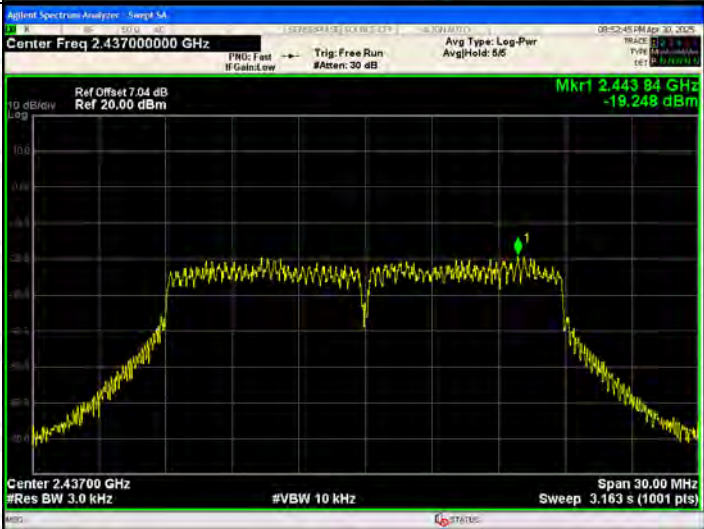802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41884 GHz -19.324 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44384 GHz -19.248 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.45732 GHz -19.665 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

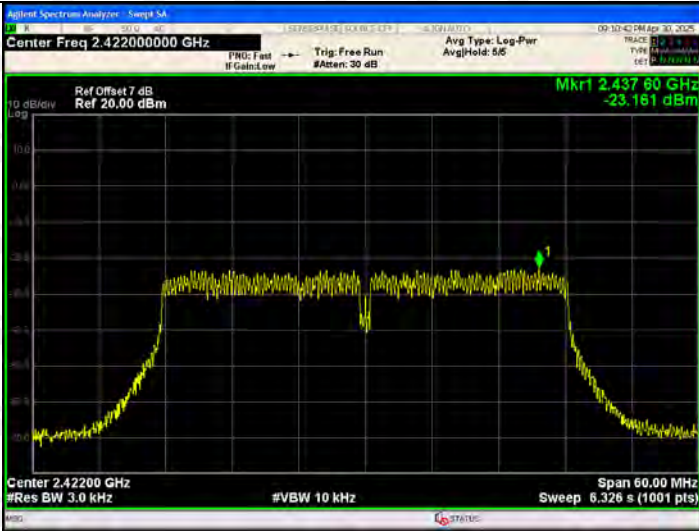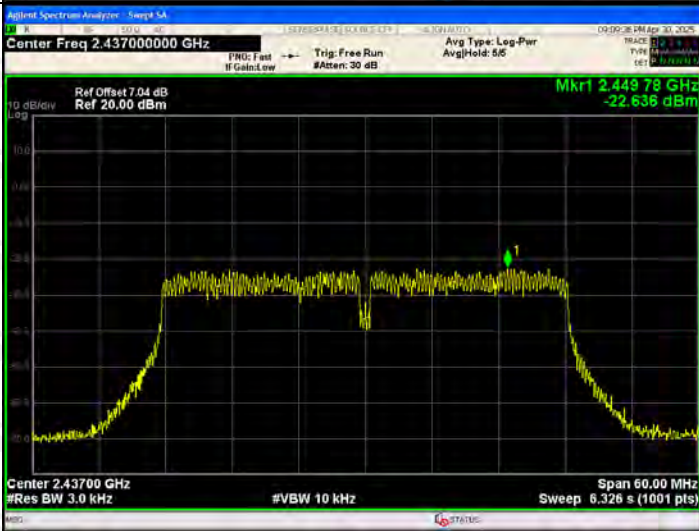802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.43760 GHz -23.161 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44978 GHz -22.636 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.43976 GHz -22.845 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

ANT 2:
Test Graph

Graphs

802.11b /LCH




802.11b /MCH





802.11b/HCH





802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

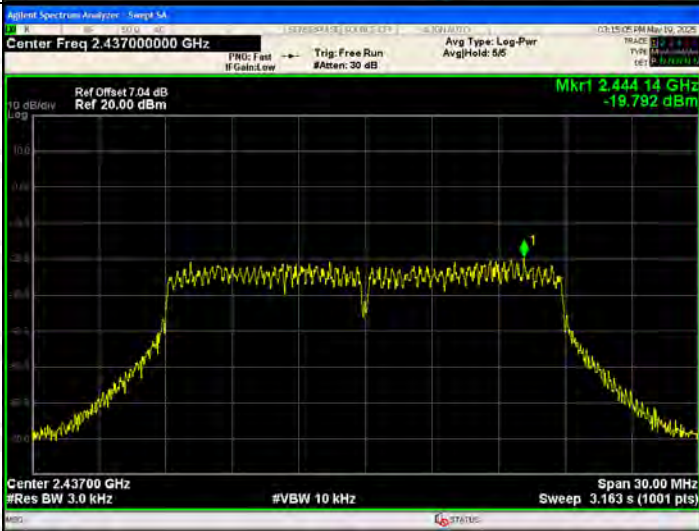802.11n(HT20)/LCH	
802.11n(HT20)/MCH	
802.11n(HT20)/HCH	

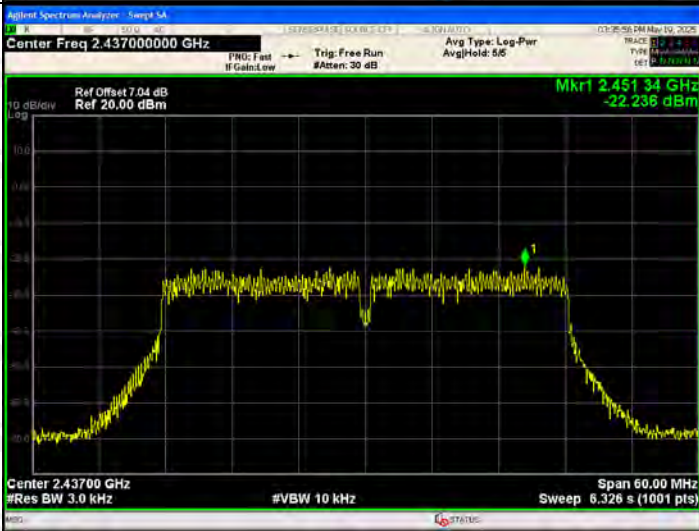802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.41882 GHz -22.020 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.45134 GHz -22.236 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.44882 GHz -22.066 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

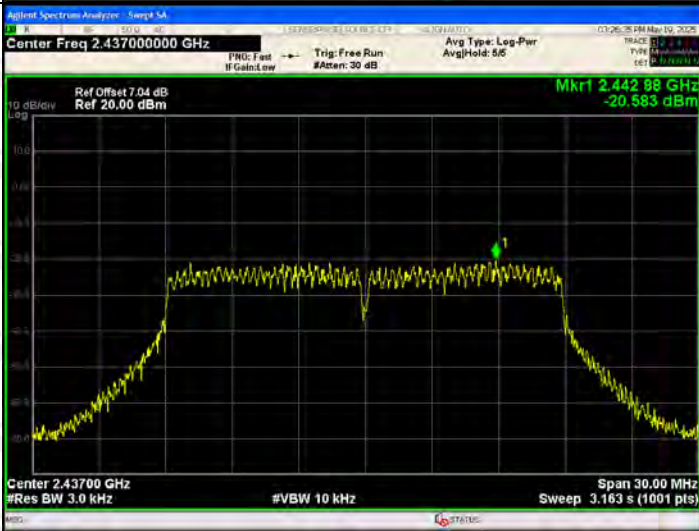802.11ax(HT20)/LC H	
802.11ax(HT20)/MC H	
802.11ax(HT20)/HC H	

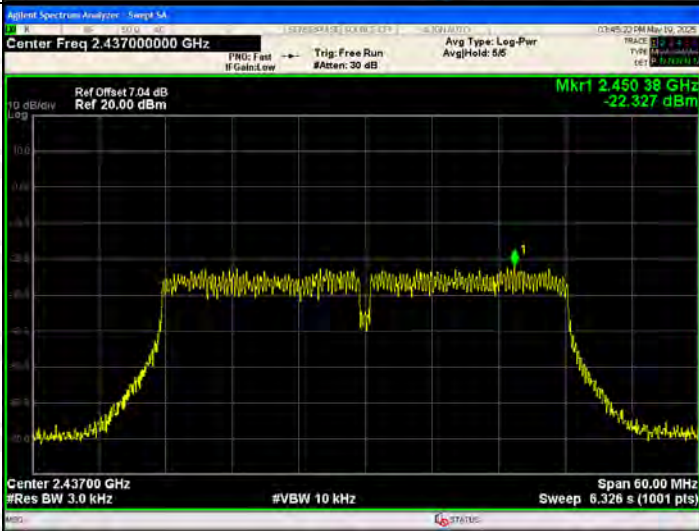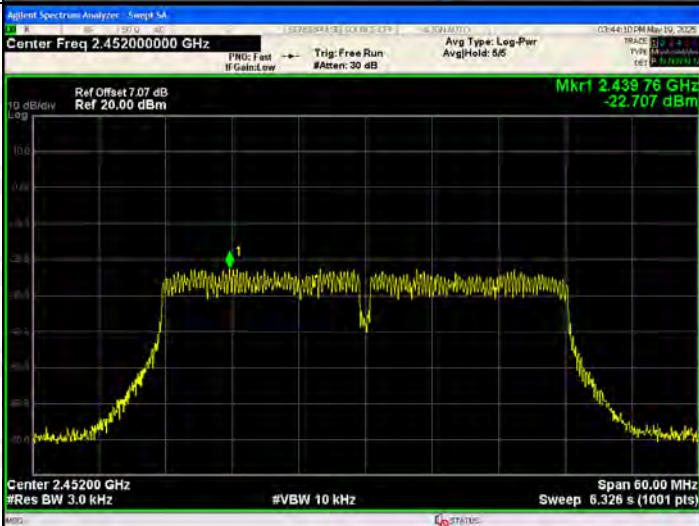802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.43538 GHz -22.398 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.45038 GHz -22.327 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.43976 GHz -22.707 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is ANT1: 2.56dBi, ANT2: 2.56dBi


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

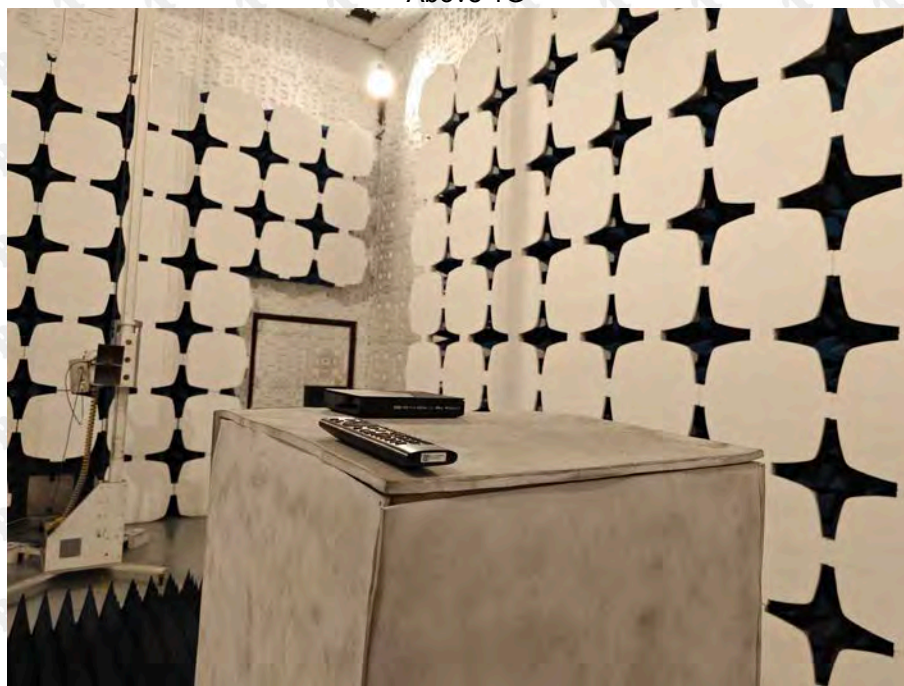

Conducted Emission



***** END OF REPORT *****