

**Radio Systems Corporation
FCC Part 15, Certification Application
Model PG-1010**

November 1, 2000

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: **Radio Systems Corporation**

MODEL: **PG-1010**

FCC ID: **KE3TXPG1010**

DATE: **November 1, 2000**

This report concerns (check one): Original grant X
Class II change

Equipment type: **Low Frequency, Low Power Transmitter**

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No X

If yes, defer until:
date

N.A. agrees to notify the Commission by NA
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

AGENCY AGREEMENT

SECTION 1

GENERAL INFORMATION

Product Description
Related Submittal(s) Grant(s)

SECTION 2

TESTS AND MEASUREMENTS

Configuration of Tested
Test Facility
Test Equipment
Modifications
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Radiated Emissions
Power Line Conducted Emissions

SECTION 3

LABELING INFORMATION

SECTION 4

BLOCK DIAGRAM/SCHEMATICS

SECTION 5

PHOTOGRAPHS

SECTION 6

USER'S MANUAL

LIST OF FIGURES AND TABLES

FIGURES

Test Configuration
Photograph(s) for Spurious and Fundamental Emissions

TABLES

EUT And Peripherals
Test Instruments
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Power Line Conducted Emissions

SECTION 1

GENERAL INFORMATION

GENERAL INFORMATION

Product Description

The Equipment Under Test (EUT) is a Radio Systems Corporation Low Frequency, Low Power Petsafe Guardian Transmitter, Model PG-1010. The EUT consists of a 10.65 kHz dog fence transmitter. This report covers only the transmitter (dog fence) portion of the device.

Related Submittal(s) Grant(s)

The EUT is subject to the following authorizations:

- a) Certification as a low power transmitter (10.65 kHz)

The information contained in this report is presented for the Certification authorization for the transmitter portion of the EUT.

SECTION 2

TESTS AND MEASUREMENTS

TESTS AND MEASUREMENTS

Configuration of Tested System

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 30 MHz -1 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 100 Hz (9 kHz – 150 kHz), 9kHz (150 kHz - 30 MHz), and 120 kHz (30 MHz - 1 GHz) respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2.

The EUT was set up with a 320' length of wire connected to it, to simulate a typical installation. The wire was not buried, as it would be in a typical installation (approximately 2 -3 inches). Measurements were taken at all three antenna polarities on each side of the rectangle and intervals in between, at a distance of 3 meters. The side with the worst case results was re-measured at a distance of 10 meters. Results between 100 kHz and 30 MHz were corrected to 30 meters by the following $40 \log (300/10) = 59.1 \text{ dB}$. Those results below 100 kHz were corrected to 300 meters by the following $60 \log (300/10) = 88.6 \text{ dB}$ (which has been applied to other submittals and is allowed per previous discussions with Greg Czumak at the FCC).

Test Facility

Conducted and digital device testing was performed at US Tech's measurement facility as described to the FCC and acknowledged in their letter marked 31040/SIT/USTECH.

Additional radiated testing was performed at a vacant area that would allow measurements to be made 10 meters away from the EUT with the 320' length of wire connected to it.


Test Equipment

Table 2 describes test equipment used to evaluate this product.

Modifications

No modifications were made to bring the EUT into compliance with FCC Part 15, Class B Requirements:

FIGURE 1
TEST CONFIGURATION

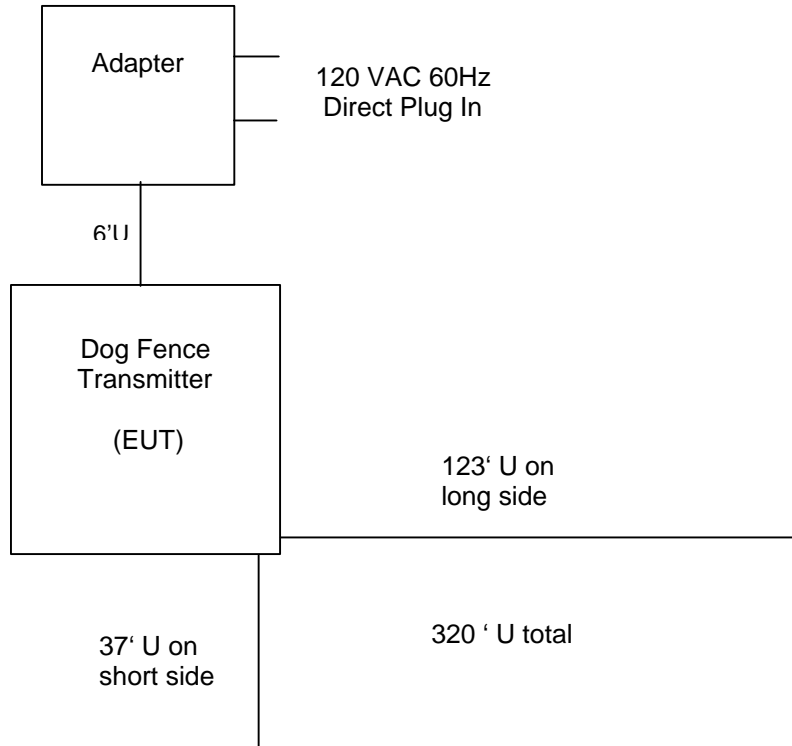

EUT and Peripherals

| PERIPHERAL MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | FCC ID: | CABLES P/D |
|--|----------------------------|------------------|------------------------|---------------|
| Dog Fence Transmitter Radio Systems Corporation (EUT) | PG-1010 | None | KE3PG1010 (pending) | 320' U |
| Adapter Radio Systems Corporation | 41A-12-830 P/N: 300-006 | None | None | 6' U |

TABLE 2
TEST INSTRUMENTS

| TYPE | MANUFACTURER | MODEL | SN. |
|----------------------|-----------------|------------|---------------|
| SPECTRUM ANALYZER | HEWLETT-PACKARD | 8593E | 3205A00124 |
| SPECTRUM ANALYZER | HEWLETT-PACKARD | 8558B | 2332A09900 |
| S A DISPLAY | HEWLETT-PACKARD | 853A | 2404A02387 |
| COMB GENERATOR | HEWLETT-PACKARD | 8406A | 1632A01519 |
| RF PREAMP | HEWLETT-PACKARD | 8447D | 1937A03355 |
| RF PREAMP | HEWLETT-PACKARD | 8449B | 3008A00480 |
| HORN ANTENNA | EMCO | 3115 | 3723 |
| BICONICAL ANTENNA | EMCO | 3110 | 9307-1431 |
| LOOP ANTENNA | AH SYSTEMS | SAS200/562 | 142 |
| LOG PERIODIC ANTENNA | EMCO | 3146 | 9110-3600 |
| BILOG | CHASE | CBL6112A | 2238 |
| LISN | SOLAR ELE. | 8028 | N/A |
| THERMOMETER | FLUKE | 52 | 5215250 |
| MULTIMETER | FLUKE | 85 | 53710469 |
| FUNCTION GENERATOR | TEKTRONIX | CFG250 | CFG250TW15059 |
| PLOTTER | HEWLETT-PACKARD | 7475A | 2325A65394 |

Field Strength of Fundamental Emission (47 CFR 15.209)


Measurements were made using a peak detector. Field strength of the peak fundamental emission is shown in Tables 3 and 4.

Duty Cycle Correction During 100 msec:

The EUT has only one type of transmit cycle which consists of 20.5 ms of transmit time every 35.6 ms (57.6% Duty Cycle). Figure 3 shows the characteristics of the pulse train for this cycle.

$$\text{Duty Cycle Correction} = 20 \log (0.576) = - 4.8 \text{ dB}$$

FIGURE 3

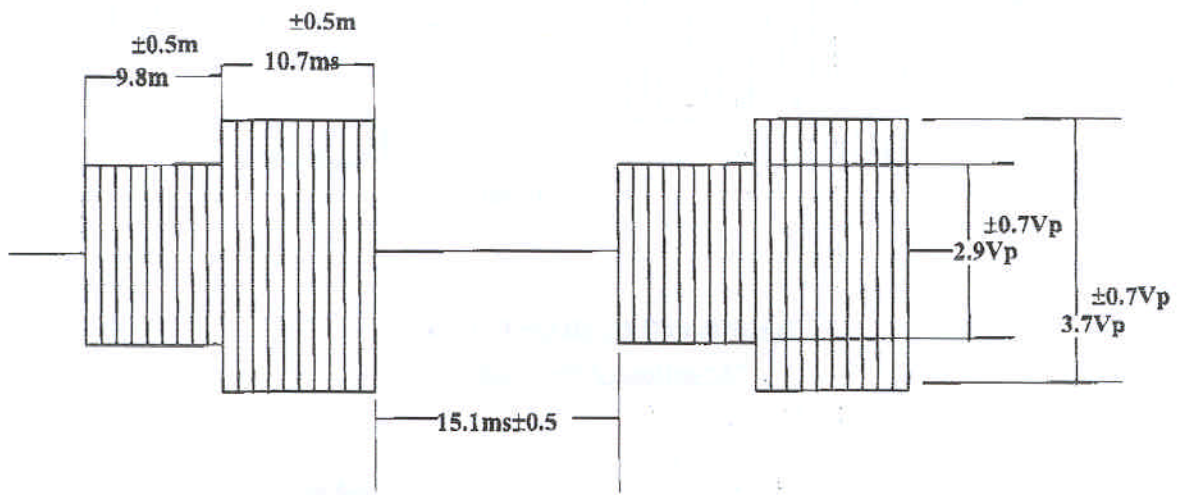

PG1010 Out put Signal

TABLE 3a

FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: October 19, 2000
 UST Project: 00-0479
 Customer: Radio Systems Corporation
 Model: PG-1010

| FREQ. (kHz) | TEST DATA (dBm) @ 10m | ANTENNA FACTOR + CABLE ATTENUATION | PEAK RESULTS (uV/m) @ 300m | PEAK FCC LIMITS (uV/m) @ 300m |
|----------------|-----------------------------|--|-------------------------------------|--|
| 10.65 | -75.2 | 78.2 | 11.7 | 2253.5 |

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-75.2 + 78.2 + 107 - 88.6)/20)$ = 11.7

CONVERSION FROM dBm TO dBuV = 107 dB

CORRECTION FROM 10m TO 300m = -88.6 dB

Test Results

Reviewed By: _____

Name: Tim R. Johnson

TABLE 3b**FIELD STRENGTH OF FUNDAMENTAL EMISSION**

Test Date: October 19, 2000
UST Project: 00-0479
Customer: Radio Systems Corporation
Model: PG-1010

| FREQ. (kHz) | TEST DATA* (dBm) @ 10m | ANTENNA FACTOR + CABLE ATTENUATION | AVERAGE RESULTS (uV/m) @ 300m | AVERAGE FCC LIMITS (uV/m) @ 300m |
|------------------------|---|---|--|---|
| 10.65 | -80.0 | 78.2 | 6.8 | 225.4 |

* = Corrected for worse case duty cycle, $20 \log (0.576) = -4.8 \text{ dB}$

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-80.0 + 78.2 + 107 - 88.6)/20) = 6.8$

CONVERSION FROM dBm TO dBuV = 107 dB

CORRECTION FROM 10m TO 300m = -88.6 dB

Test Results

Reviewed By: _____

Name: Tim R. Johnson

Field Strength Of Spurious Emissions (47 CFR 15.209)

Measurements were made using a peak detector. Field strength of Spurious Emissions are shown in Table 4. For all emission measurements made the limits given in 15.209 were applied.

TABLE 4a

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: October 19, 2000
 UST Project: 00-0479
 Customer: Radio Systems Corporation
 Model: PG-1010

Peak Readings (< 30 MHz)

| FREQ. (kHz.) | TEST DATA (dBm) @ 10m | ANTENNA FACTOR + CABLE ATTENUATION | PEAK RESULTS (uV/m) @ 300m | PEAK FCC LIMITS (uV/m) @ 300m |
|-----------------|-----------------------------|--|-------------------------------------|--|
| 21.3 | -80.7 | 71.2 | 8.9 | 1126.7 |
| 31.8 | -88.3 | 68.9 | 0.9 | 754.7 |
| 42.6 | -72.9 | 65.7 | 3.6 | 563.4 |

** = Ground Floor

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-80.7 + 71.2 + 107 - 88.6)/20) = 8.9$

CONVERSION FROM dBm TO dBuV = 107 dB

CORRECTION FROM 10m TO 300m = -88.6 dB

Test Results

Reviewed By: _____

Name: Tim R. Johnson

TABLE 4b

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: October 19, 2000
 UST Project: 00-0479
 Customer: Radio Systems Corporation
 Model: PG-1010

Average Readings (< 30 MHz)

| FREQ. (kHz.) | TEST DATA* (dBm) @ 10m | ANTENNA FACTOR + CABLE ATTENUATION | AVERAGE RESULTS (uV/m) @ 300m | AVERAGE FCC LIMITS (uV/m) @ 300m |
|-----------------|---------------------------------|--|--|---|
| 21.3 | -85.5 | 71.2 | 4.1 | 112.6 |
| 31.8 | -93.1 | 68.9 | 0.5 | 75.5 |
| 42.6 | -77.7 | 65.7 | 2.1 | 56.3 |

* = Corrected for worse case duty cycle, $20 \log (0.577) = -4.8 \text{ dB}$

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = $\text{Antilog} ((-85.5 + 71.9 + 107 - 88.6)/20) = 0.22$

CONVERSION FROM dBm TO dBuV = 107 dB

CORRECTION FROM 10m TO 300m = -88.6 dB

Test Results

Reviewed By: _____

Name: Tim R. Johnson

Radiated Emissions (47 CFR 15.109a)

Radiated emissions were evaluated from 30 to 1000 MHz. Measurements were made with the analyzer's bandwidth set to 120 kHz. These results are shown Table 5.

TABLE 5**FIELD STRENGTH OF SPURIOUS EMISSIONS (47 CFR 15.209)****CLASS B**

Test Date: October 24, 2000
UST Project: 00-0479
Customer: Radio Systems Corporation
Model: Model PG-1010

Digital Device Emissions actually tested while in TX Mode

| Frequency (MHz) | Test Data (dBm) @3m | Ant. Factor + Cable Atten. - Amp Gain | Results (uV/m) | FCC Limits (uV/m) @3m | Margin Below FCC Limit (dB) |
|--|------------------------------------|--|---------------------------|--------------------------------------|--|
| No emissions signals were seen from the EUT between the range of 30 MHz to 1 GHz | | | | | |

Test Results

Reviewed By: _____

Name: Tim R. Johnson

Power Line Conducted Emissions (47 CFR 15.107a)

Conducted Emissions were evaluated from 450 kHz to 30 MHz. Measurements were made with the analyzer's bandwidth set to 9 kHz, emissions are shown in Table 6. The EUT was checked with a 320' fence length.

TABLE 6 CONDUCTED EMISSIONS DATA**CLASS B**

Test Date: October 24, 2000
UST Project: 00-0479
Customer: Radio Systems Corporation
Model: PG-1010

| FREQUENCY (MHz) | TEST DATA (dBm) | | RESULTS (uV) | | FCC LIMITS (uV) |
|--------------------|--------------------|---------|-----------------|---------|-----------------------|
| | PHASE | NEUTRAL | PHASE | NEUTRAL | |
| 0.47 | -72.0 | -73.0 | 56.1 | 50.1 | 250 |
| 0.97 | -72.0 | -73.0 | 56.1 | 50.1 | 250 |
| 1.26 | -81.0 | -89.0 | 20.0 | 7.9 | 250 |
| 9.55 | -77.0 | -78.0 | 31.6 | 28.2 | 250 |
| 9.99 | -88.0 | -87.0 | 8.9 | 10.0 | 250 |
| 11.76 | -86.0 | -88.0 | 11.2 | 8.9 | 250 |

SAMPLE CALCULATIONS:

RESULTS uV = Antilog $((-72.0 + 107)/20)$ = 50.1

CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed By: _____ **Name:** Tim R. Johnson