

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2255-3
FCC ID : IHDT56AF8
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	8
5. Proximity Sensor Triggering Test	11
6. RF Exposure Limits	13
6.1 Uncontrolled Environment	13
6.2 Controlled Environment	13
7. Specific Absorption Rate (SAR)	14
7.1 Introduction	14
7.2 SAR Definition	14
8. System Description and Setup	15
8.1 E-Field Probe	16
8.2 Data Acquisition Electronics (DAE)	16
8.3 Phantom	17
8.4 Device Holder	18
9. Measurement Procedures	19
9.1 Spatial Peak SAR Evaluation	19
9.2 Power Reference Measurement	20
9.3 Area Scan	20
9.4 Zoom Scan	21
9.5 Volume Scan Procedures	21
9.6 Power Drift Monitoring	21
10. Test Equipment List	22
11. System Verification	23
11.1 Tissue Simulating Liquids	23
11.2 Tissue Verification	24
11.3 System Performance Check Results	25
12. RF Exposure Positions	27
12.1 Ear and handset reference point	27
12.2 Definition of the cheek position	28
12.3 Definition of the tilt position	29
12.4 Body Worn Accessory	30
12.5 Product Specific 10g SAR Exposure	31
12.6 Wireless Router	31
13. Conducted RF Output Power (Unit: dBm)	32
14. Antenna Location	45
15. SAR Test Results	46
15.1 Head SAR	49
15.2 Hotspot SAR	52
15.3 Body Worn Accessory SAR	56
15.4 Product Specific SAR	60
15.5 Repeated SAR Measurement	64
16. Simultaneous Transmission Analysis	65
16.1 Head Exposure Conditions	66
16.2 Hotspot Exposure Conditions	67
16.3 Body-Worn Accessory Exposure Conditions	69
16.4 Product Specific Exposure Conditions	70
16.5 SPLSR Evaluation and Analysis	71
17. Uncertainty Assessment	82
18. References	83
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	



Sporton International Inc. (Kunshan)

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2255-3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.51	1.43	1.43	1.59
		GSM1900	0.20	1.43	1.35	
	WCDMA	Band II	0.27	1.35	1.26	
		Band IV	0.28	1.31	1.30	
		Band V	0.34	1.27	1.27	
	LTE	Band 2	0.22	1.34	1.42	
		Band 7	0.65	1.33	1.33	
		Band 12	0.25	0.80	0.80	
		Band 13	0.24	0.71	0.71	
		Band 26/Band 5	0.31	1.13	1.13	
		Band 41/Band 38	0.45	1.31	1.31	
		Band 66/Band 4	0.21	1.34	1.38	
DTS	WLAN	2.4GHz WLAN	0.79	0.97	0.97	1.58
NII		5GHz WLAN	1.13	1.17	1.18	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.10	0.16	0.16	1.59

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
License	GSM	GSM850	2.63	3.95
		GSM1900	3.40	
	WCDMA	Band II	3.21	
		Band IV	3.36	
		Band V	2.16	
	LTE	Band 2	3.24	
		Band 7	3.21	
		Band 41/Band 38	3.10	
		Band 66/Band 4	3.28	
NII	WLAN	5GHz WLAN	2.20	3.95

Date of Testing:

2022/6/29 ~ 2022/7/11

Remark: This device supports both LTE B4/B5/B38 and B66/B26/B41. Since the supported frequency span for LTE B4/B5/B38 falls completely within the supports frequency span for LTE B66/B26/B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66/B26/B41.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR02-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 447498 D04 Interim General RF Exposure Guidance v01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2255-3
FCC ID	IHDT56AF8
IMEI Code	Sample 1: IMEI 1: 356510960012712 IMEI 2: 356510960012720 Sample 2: 351523820005383
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA/HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM(Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	DVT2
SW Version	S3SV32.14
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.	

5. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level, which are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
6. For some WWAN bands, sensor on reduced power level is higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
7. There are two different types of EUT. They are single SIM card mobile and dual SIM card mobile. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose single dual SIM mobile to perform all tests.
8. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
9. There are two samples. The difference between them could be referred to the XT2255-3_Operational Description of Product Equality Declaration which is exhibited separately. According to the difference, we choose sample 1 for full testing and sample 2 for worst case verification.
10. The device has two headsets. Only suppliers are different. So we chose headset 1 to perform full SAR testing only.
11. The device has two batteries. For battery 1/2 only suppliers are different, so we only choose battery 1 to perform full SAR testing.
12. This device has NFC function and the NFC SAR report will be separately submitted.

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	IHDT56AF8							
Equipment Name	Mobile Cellular Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R12, Cat13							
CA Support	Yes, Downlink only							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.							
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.							
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535		
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5		
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595		
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				

LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:


Band	Antenna	Head DSI 2 Standalone Tune-up Limit	Body Worn DSI 3 Standalone Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremely DSI 6 Standalone Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
LTE Band 5	Ant 0	24.00	24.00	24.00	24.00	24.00	24.00
LTE Band 26	Ant 0	24.00	24.00	24.00	24.00	24.00	24.00
LTE Band 4	Ant 0	24.00	16.50	16.00	19.50	24.00	24.00
LTE Band 66	Ant 0	24.00	16.50	16.00	19.50	24.00	24.00

Band	Antenna	Head DSI 2 Standalone Tune-up Limit	Body Worn DSI 3 Standalone Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremely DSI 6 Standalone Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
LTE Band 38	Ant 1	24.00	22.00	22.00	24.00	24.00	24.00
LTE Band 41	Ant 1	24.00	22.00	22.00	24.00	24.00	24.00

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5825MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/bottom/left/right sides of the device. When front/back/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

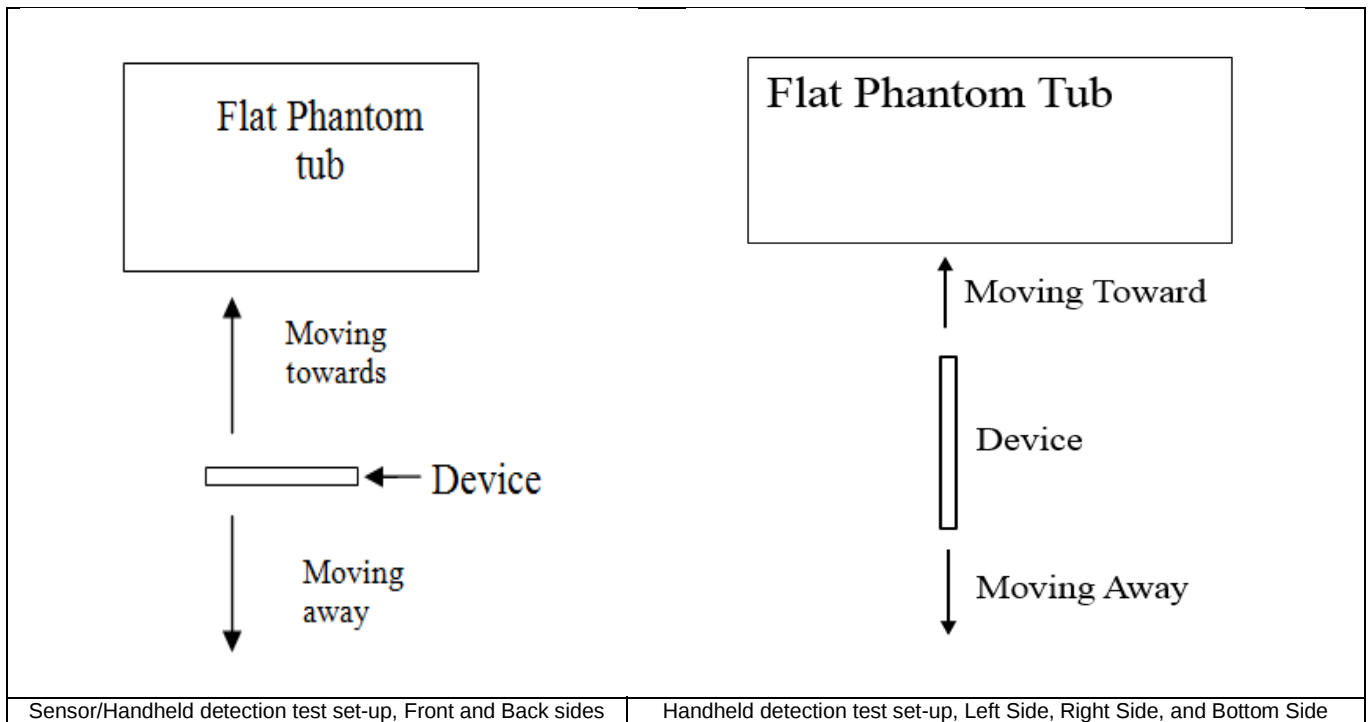

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	15	19	20

<Handheld for ANT0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	9	12	13	2	4	10	11

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	6	10	10	4	5	10	10

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

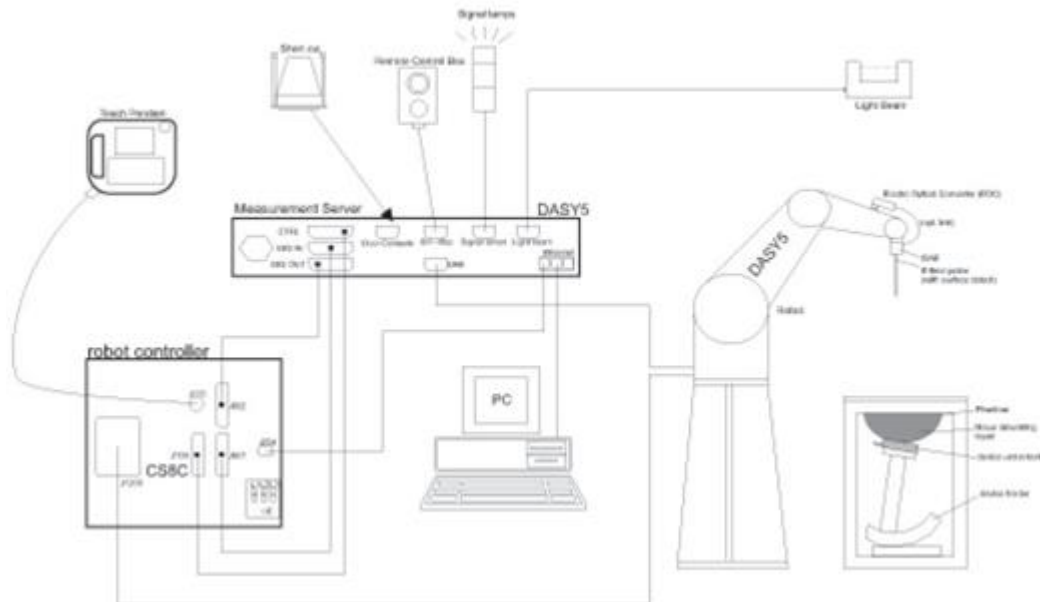

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2023/2/23
SPEAG	835MHz System Validation Kit	D835V2	4d162	2021/12/17	2022/12/16
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2023/2/23
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	2021/12/20	2022/12/19
SPEAG	2450MHz System Validation Kit	D2450V2	924	2020/9/2	2023/9/1
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/25
SPEAG	5000MHz System Validation Kit	D5GHZV2	1113	2019/9/24	2022/9/22
SPEAG	Data Acquisition Electronics	DAE4	1338	2021/12/1	2022/11/30
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2021/8/24	2022/8/23
SPEAG	Dosimetric E-Field Probe	EX3DV4	7729	2022/5/30	2023/5/29
SPEAG	SAM Twin Phantom	SAM Twin	TP-1842	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6262306173	2021/7/15	2022/7/14
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2021/7/31	2022/7/30
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2022/1/24	2023/1/23
Anritsu	Vector Signal Generator	MG3710A	6201682672	2022/1/6	2023/1/5
Rohde & Schwarz	Power Meter	NRVD	102081	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2021/8/12	2022/8/11
R&S	CBT BLUETOOTH TESTER	CBT	100641	2022/1/5	2023/1/4
EXA	Spectrum Analyzer	FSV7	101631	2021/10/14	2022/10/13
FLUKE	DIGITAC THERMOMETER	51II	97240029	2021/10/23	2022/10/22
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/1/6	2023/1/5
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

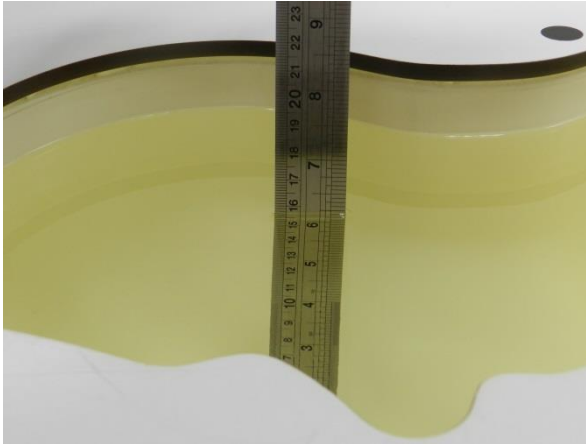


Fig 11.1 Photo of Liquid Height for Head SAR

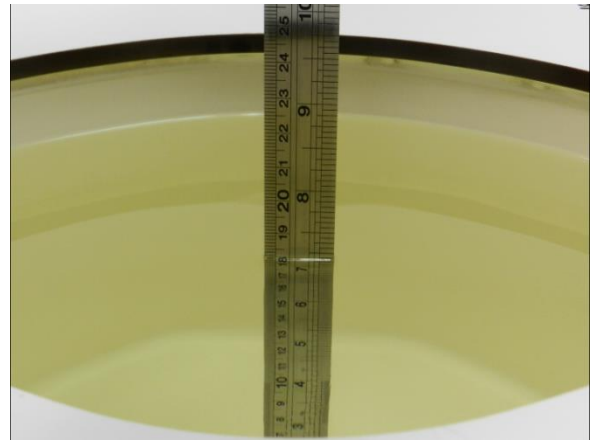


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.5	0.923	43.747	0.89	41.90	3.71	4.41	±5	2022/6/29
835	Head	22.7	0.926	41.056	0.90	41.50	2.89	-1.07	±5	2022/7/1
1750	Head	22.6	1.351	40.006	1.37	40.10	-1.39	-0.23	±5	2022/7/3
1900	Head	22.8	1.432	39.770	1.40	40.00	2.29	-0.57	±5	2022/7/5
2450	Head	22.9	1.824	39.207	1.80	39.20	1.33	0.02	±5	2022/7/7
2600	Head	22.6	2.013	40.642	1.96	39.00	2.70	4.21	±5	2022/7/8
750	Head	22.5	0.902	41.615	0.89	41.90	1.35	-0.68	±5	2022/6/30
835	Head	22.7	0.930	41.363	0.90	41.50	3.33	-0.33	±5	2022/7/2
1750	Head	22.8	1.390	38.499	1.37	40.10	1.46	-3.99	±5	2022/7/4
1900	Head	22.9	1.452	39.632	1.40	40.00	3.71	-0.92	±5	2022/7/6
2450	Head	22.8	1.831	37.486	1.80	39.20	1.72	-4.37	±5	2022/7/7
2600	Head	22.6	1.981	39.071	1.96	39.00	1.07	0.18	±5	2022/7/9
5250	Head	22.7	4.556	36.111	4.71	35.90	-3.27	0.59	±5	2022/7/10
5600	Head	22.7	4.931	35.574	5.07	35.50	-2.74	0.21	±5	2022/7/10
5750	Head	22.8	5.111	35.396	5.22	35.40	-2.09	-0.01	±5	2022/7/11

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2022/6/29	750	Head	50	1087	3279	1338	0.427	8.58	8.54	-0.47
2022/7/1	835	Head	50	4d162	3279	1338	0.460	9.64	9.2	-4.56
2022/7/3	1750	Head	50	1090	3279	1338	1.740	37.00	34.8	-5.95
2022/7/5	1900	Head	50	5d182	3279	1338	1.970	39.60	39.4	-0.51
2022/7/7	2450	Head	50	924	3279	1338	2.580	51.40	51.6	0.39
2022/7/8	2600	Head	50	1061	3279	1338	2.710	56.60	54.2	-4.24
2022/6/30	750	Head	50	1087	3279	1338	0.412	8.58	8.24	-3.96
2022/7/2	835	Head	50	4d162	3279	1338	0.476	9.64	9.52	-1.24
2022/7/4	1750	Head	50	1090	3279	1338	1.860	37.00	37.2	0.54
2022/7/6	1900	Head	50	5d182	3279	1338	2.030	39.60	40.6	2.53
2022/7/7	2450	Head	50	924	3279	1338	2.590	51.40	51.8	0.78
2022/7/9	2600	Head	50	1061	3279	1338	2.750	56.60	55	-2.83
2022/7/10	5250	Head	50	1113	7729	1338	4.220	80.50	84.4	4.84
2022/7/10	5600	Head	50	1113	7729	1338	3.990	83.40	79.8	-4.32
2022/7/11	5750	Head	50	1113	7729	1338	3.710	80.00	74.2	-7.25

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2022/6/29	750	Head	50	1087	3279	1338	0.284	5.65	5.68	0.53
2022/7/1	835	Head	50	4d162	3279	1338	0.308	6.26	6.16	-1.60
2022/7/3	1750	Head	50	1090	3279	1338	0.937	19.50	18.74	-3.90
2022/7/5	1900	Head	50	5d182	3279	1338	1.040	20.20	20.8	2.97
2022/7/7	2450	Head	50	924	3279	1338	1.240	24.00	24.8	3.33
2022/7/8	2600	Head	50	1061	3279	1338	1.250	25.10	25	-0.40
2022/6/30	750	Head	50	1087	3279	1338	0.277	5.65	5.54	-1.95
2022/7/2	835	Head	50	4d162	3279	1338	0.291	6.26	5.82	-7.03
2022/7/4	1750	Head	50	1090	3279	1338	1.010	19.50	20.2	3.59
2022/7/6	1900	Head	50	5d182	3279	1338	0.983	20.20	19.66	-2.67
2022/7/7	2450	Head	50	924	3279	1338	1.240	24.00	24.8	3.33
2022/7/9	2600	Head	50	1061	3279	1338	1.270	25.10	25.4	1.20
2022/7/10	5250	Head	50	1113	7729	1338	1.210	23.10	24.2	4.76
2022/7/10	5600	Head	50	1113	7729	1338	1.130	23.80	22.6	-5.04
2022/7/11	5750	Head	50	1113	7729	1338	1.060	22.80	21.2	-7.02

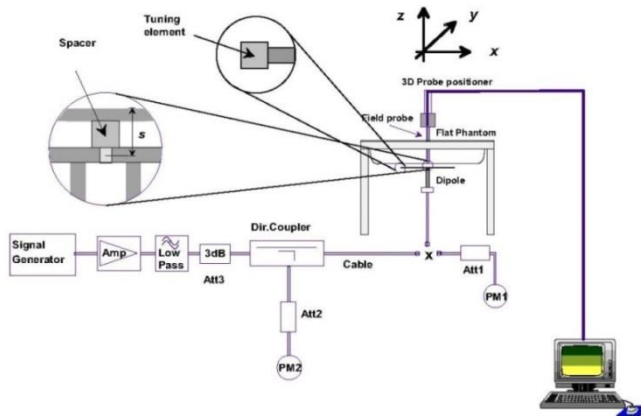


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

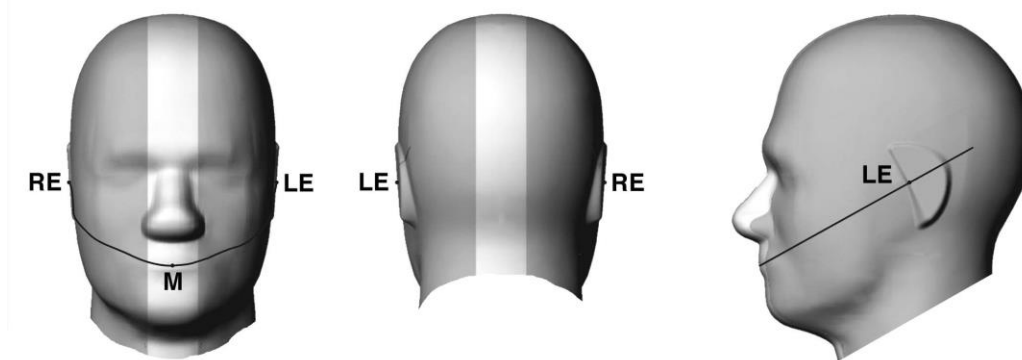


Fig 12.1.1 Front, back, and side views of SAM twin phantom

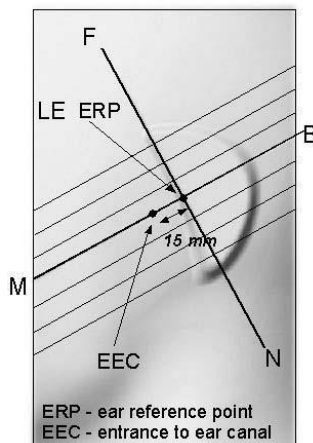


Fig 12.1.2 Close-up side view of phantom showing the ear region.

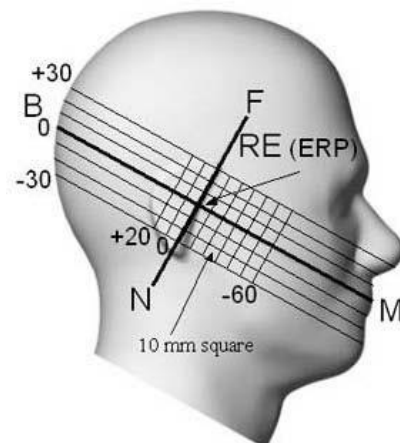


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

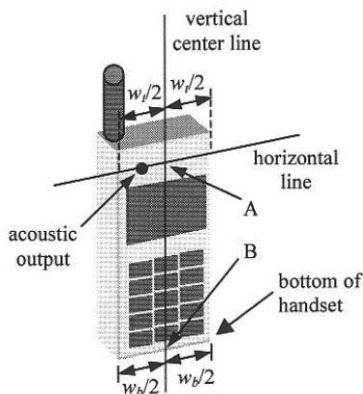


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

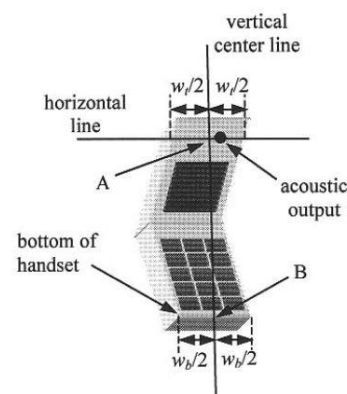


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

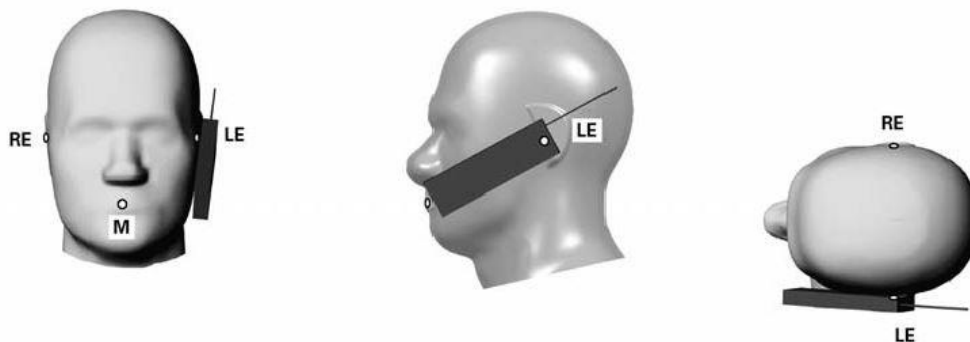


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

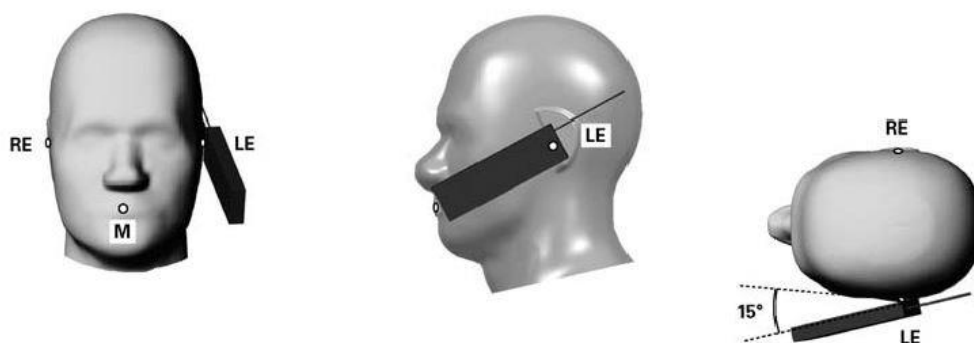


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D04 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

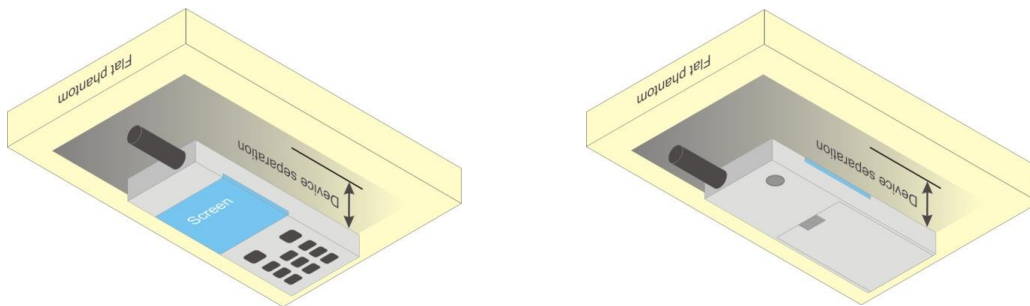


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D04 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D04, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

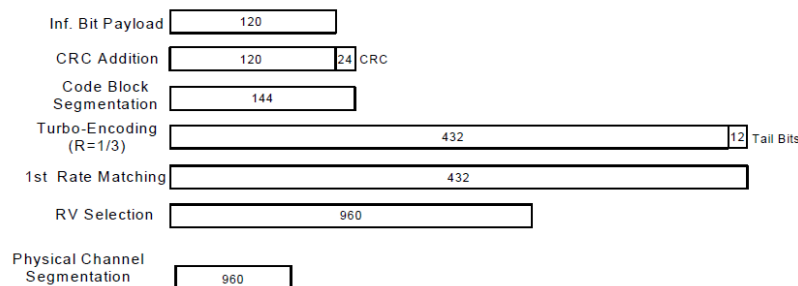


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration


<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ , and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B26/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4/B5/B38 SAR test was covered by B66/B26/B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

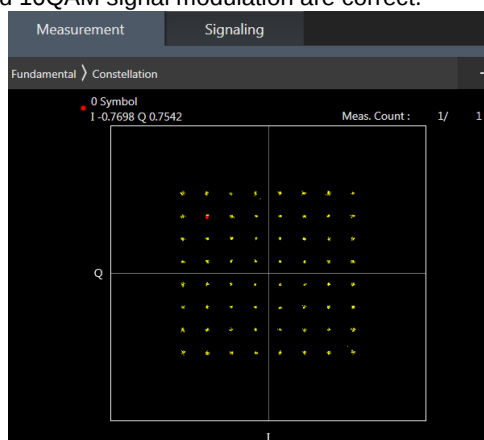

64QAM



16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

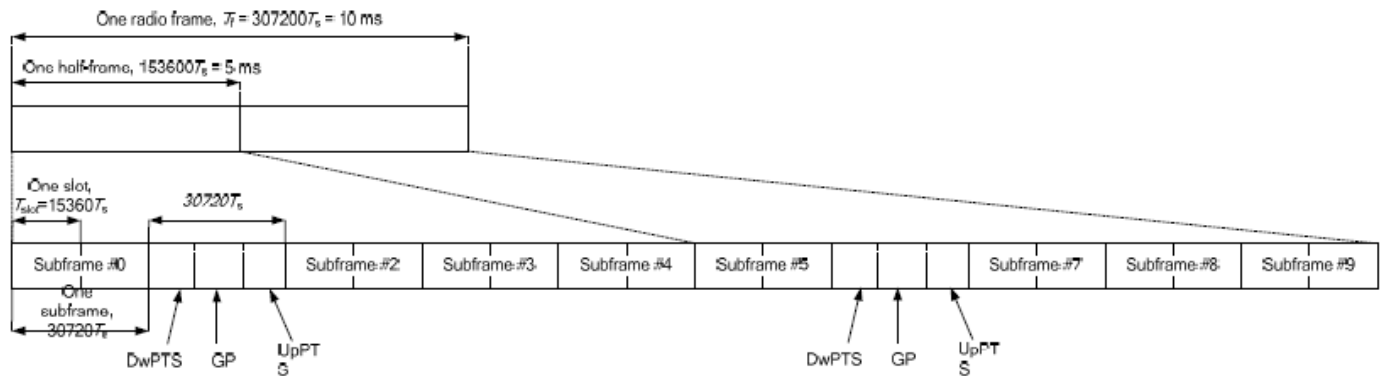


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.

2CC Downlink Carrier Aggregation	
Number	Combination
1	CA_2C
2	CA_2A-4A
3	CA_2A-5A
4	CA_2A-7A
5	CA_4A-5A
6	CA_4A-7A
7	CA_5A-7A
8	CA_5A-41A
9	CA_5A-66A
10	CA_7C
11	CA_7B
12	CA_7A-7A
13	CA_7A_66A
14	CA_26A-41A
15	CA_38C
16	CA_41C
17	CA_66B
18	CA_66C
19	A_66A-66A

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<WLAN Conducted Power>


General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.49% as following figure, for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to 83.3% for Bluetooth reported SAR calculation.

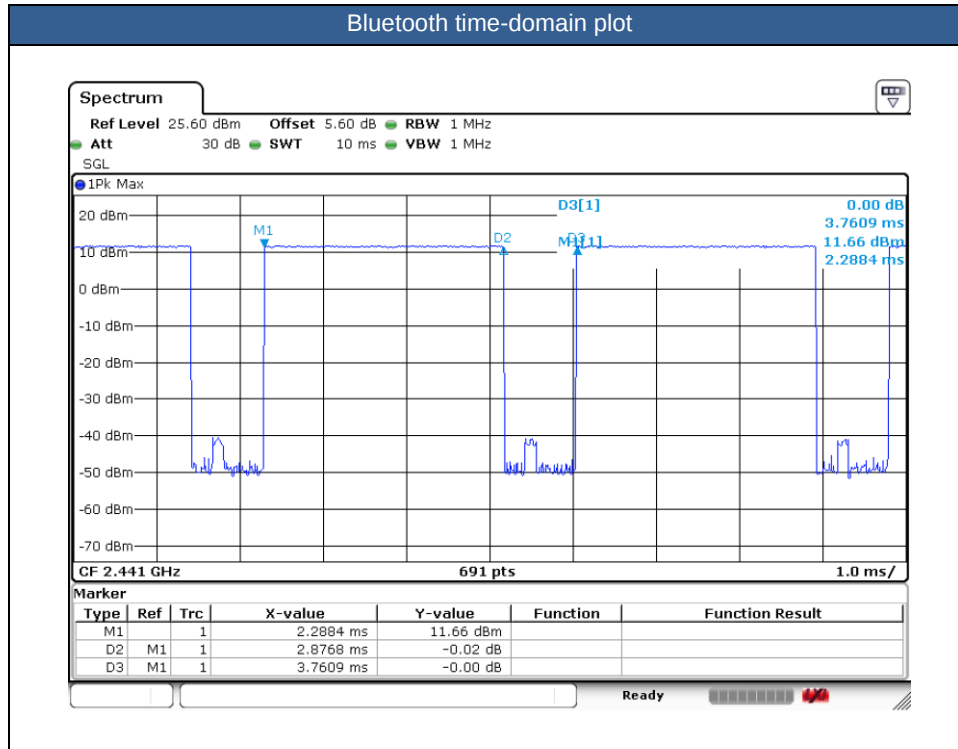



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of BT/WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of BT signal with 83.3% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%"
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D04, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level, which are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. For some WWAN bands, sensor on reduced power level is higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
6. There are two different types of EUT. They are single SIM card mobile and dual SIM card mobile. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose single dual SIM mobile to perform all tests.
7. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
8. There are two samples. The difference between them could be referred to the XT2255-3_Operational Description of Product Equality Declaration which is exhibited separately. According to the difference, we choose sample 1 for full testing and sample 2 for worst case verification.
9. The device has two headsets. Only suppliers are different, so we chose headset 1 to perform full SAR testing only.
10. The device has two batteries. For battery 1/2 only suppliers are different, so we only choose battery 1 to perform full SAR testing.
11. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/7/38/41/66, WLAN 5.2GHz/5.8GHz, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
12. For Bluetooth distance SAR test at Front 13mm and WLAN 2.4GHz Back 18mm is only for simultaneous transmission analysis with WWAN.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B26/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4/B5/B38 SAR test was covered by B66/B26/B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Based on WLAN 2.4GHz and Bluetooth share the same, so Bluetooth RF exposure evaluation chose the worst position of WLAN 2.4GHz to perform Bluetooth SAR test, and used this Bluetooth SAR value conservatively represent other position do co-located analysis with WWAN.



15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
01	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	22.76	24.00	1.330	-	-	0.05	0.184	0.245
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	21.69	23.00	1.352	-	-	-0.08	0.148	0.200
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	22.76	24.00	1.330	-	-	0.08	0.109	0.145
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	21.69	23.00	1.352	-	-	-0.18	0.086	0.116
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	22.76	24.00	1.330	-	-	-0.06	0.172	0.229
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	21.69	23.00	1.352	-	-	-0.16	0.139	0.188
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	22.76	24.00	1.330	-	-	-0.08	0.093	0.124
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	21.69	23.00	1.352	-	-	-0.14	0.076	0.103
02	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	1	22.72	24.00	1.343	-	-	0.04	0.177	0.238
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	1	21.64	23.00	1.368	-	-	-0.19	0.143	0.196
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	1	22.72	24.00	1.343	-	-	0.16	0.128	0.172
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	1	21.64	23.00	1.368	-	-	-0.06	0.101	0.138
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	1	22.72	24.00	1.343	-	-	0.05	0.149	0.200
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	1	21.64	23.00	1.368	-	-	-0.18	0.120	0.164
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	1	22.72	24.00	1.343	-	-	0.02	0.104	0.140
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	1	21.64	23.00	1.368	-	-	-0.07	0.082	0.112
835MHz																					
03	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	189	836.4	1	29.85	31.00	1.303	-	-	0.05	0.390	0.508
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	189	836.4	1	29.85	31.00	1.303	-	-	0.19	0.224	0.292
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	1	29.85	31.00	1.303	-	-	-0.15	0.371	0.483
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	189	836.4	1	29.85	31.00	1.303	-	-	0.18	0.218	0.284
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	22.64	24.00	1.368	-	-	0.12	0.247	0.338
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	22.64	24.00	1.368	-	-	0.01	0.151	0.207
04	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	22.64	24.00	1.368	-	-	0.1	0.249	0.341
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	22.64	24.00	1.368	-	-	0.07	0.136	0.186
05	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.76	24.00	1.330	-	-	0.13	0.229	0.305
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	21.63	23.00	1.371	-	-	0.04	0.181	0.248
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.76	24.00	1.330	-	-	-0.06	0.141	0.188
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	21.63	23.00	1.371	-	-	-0.11	0.109	0.149
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.76	24.00	1.330	-	-	-0.14	0.207	0.275
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	21.63	23.00	1.371	-	-	-0.01	0.181	0.248
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.76	24.00	1.330	-	-	-0.01	0.130	0.173
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	21.63	23.00	1.371	-	-	0.18	0.100	0.137
1750MHz																					
06	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	22.63	24.00	1.371	-	-	0.04	0.202	0.277
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	22.63	24.00	1.371	-	-	-0.14	0.096	0.132
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	22.63	24.00	1.371	-	-	-0.11	0.153	0.210
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	22.63	24.00	1.371	-	-	0.14	0.122	0.167
07	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	1	22.55	24.00	1.396	-	-	0.07	0.149	0.208
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	1	21.60	23.00	1.380	-	-	0.05	0.119	0.164
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	1	22.55	24.00	1.396	-	-	0.1	0.074	0.103
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	1	21.60	23.00	1.380	-	-	0.08	0.060	0.083
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	1	22.55	24.00	1.396	-	-	-0.13	0.112	0.156
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	1	21.60	23.00	1.380	-	-	0.02	0.091	0.126
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	1	22.55	24.00	1.396	-	-	-0.16	0.089	0.124
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	1	21.60	23.00	1.380	-	-	0.17	0.074	0.102
1900MHz																					
08	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	661	1880	1	26.69	28.00	1.352	-	-	0.13	0.144	0.195
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	661	1880	1	26.69	28.00	1.352	-	-	0.02	0.098	0.133



FCC SAR Test Report

Report No. : FA253103-01

	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	661	1880	1	26.69	28.00	1.352	-	-	0.06	0.114	0.154
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	661	1880	1	26.69	28.00	1.352	-	-	0.11	0.111	0.150
09	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880	1	22.96	24.00	1.271	-	-	0.02	0.212	0.269
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	9400	1880	1	22.96	24.00	1.271	-	-	0.12	0.129	0.164
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	9400	1880	1	22.96	24.00	1.271	-	-	-0.13	0.164	0.208
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	9400	1880	1	22.96	24.00	1.271	-	-	0.11	0.167	0.212
10	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	18900	1880	1	22.52	24.00	1.406	-	-	0.02	0.157	0.221
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	18900	1880	1	21.56	23.00	1.393	-	-	-0.1	0.123	0.171
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	18900	1880	1	22.52	24.00	1.406	-	-	0.13	0.102	0.143
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	18900	1880	1	21.56	23.00	1.393	-	-	0.05	0.083	0.116
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	18900	1880	1	22.52	24.00	1.406	-	-	0.17	0.107	0.150
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	18900	1880	1	21.56	23.00	1.393	-	-	-0.02	0.096	0.134
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	18900	1880	1	22.52	24.00	1.406	-	-	-0.08	0.109	0.153
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	18900	1880	1	21.56	23.00	1.393	-	-	-0.16	0.100	0.139
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	-0.04	0.264	0.364
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	1	21.68	23.00	1.355	-	-	-0.14	0.231	0.313
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.11	0.224	0.308
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	1	21.68	23.00	1.355	-	-	-0.11	0.196	0.266
11	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	0.03	0.473	0.651
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	1	21.68	23.00	1.355	-	-	-0.05	0.265	0.359
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	1	22.61	24.00	1.377	-	-	-0.09	0.150	0.207
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	1	21.68	23.00	1.355	-	-	0.02	0.076	0.103
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.03	0.207	0.270
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	1	21.78	23.00	1.324	62.9	1.006	-0.03	0.162	0.216
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.16	0.125	0.163
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	40620	2593	1	21.78	23.00	1.324	62.9	1.006	0.13	0.101	0.135
12	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.05	0.348	0.453
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	40620	2593	1	21.78	23.00	1.324	62.9	1.006	0.13	0.271	0.361
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.1	0.105	0.137
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	40620	2593	1	21.78	23.00	1.324	62.9	1.006	-0.13	0.080	0.107



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	-0.12	0.336	0.447
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	-0.01	0.364	0.484
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.1	0.596	0.793
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.08	0.550	0.732
14	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	Full	78	2480	1	13.53	14.00	1.114	76.49	1.089	0.12	0.079	0.096
5000MHz																	
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.16	0.550	0.816
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 4	Full	52	5260	1	17.88	19.50	1.452	97.46	1.026	0.02	0.501	0.746
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	-0.07	0.640	0.949
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 4	Full	52	5260	1	17.88	19.50	1.452	97.46	1.026	0.01	0.591	0.881
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.06	0.562	0.833
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 4	Full	52	5260	1	17.88	19.50	1.452	97.46	1.026	0.03	0.531	0.791
15	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	-0.09	0.764	1.133
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	Full	60	5300	2	17.90	19.50	1.445	97.46	1.026	0.01	0.494	0.733
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	Full	52	5260	1	17.88	19.50	1.452	97.46	1.026	0.01	0.722	1.076
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	-0.13	0.465	0.740
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	-0.08	0.536	0.853
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	Reduced	138	5690	1	15.91	17.50	1.442	89.2	1.121	-0.17	0.553	0.894
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	0.18	0.588	0.935
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	Reduced	138	5690	1	15.91	17.50	1.442	89.2	1.121	-0.11	0.570	0.921
16	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	-0.15	0.681	1.083
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	Reduced	138	5690	1	15.91	17.50	1.442	89.2	1.121	-0.15	0.644	1.041
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	Reduced	106	5530	1	14.48	16.00	1.420	89.2	1.121	0.01	0.481	0.766
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	Reduced	155	5775	1	13.18	14.50	1.355	89.2	1.121	-0.18	0.494	0.750
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	Reduced	155	5775	1	13.18	14.50	1.355	89.2	1.121	0.1	0.569	0.864
17	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	Reduced	155	5775	1	13.18	14.50	1.355	89.2	1.121	0.13	0.710	1.079
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	Reduced	155	5775	1	13.18	14.50	1.355	89.2	1.121	-0.02	0.675	1.025



15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.09	0.241	0.321
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 0	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.15	0.193	0.261
18	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.01	0.603	0.802
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 0	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.02	0.484	0.654
	LTE Band 12	10M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 4	23095	707.5	1	21.60	23.00	1.380	-	-	0.09	0.459	0.634
	LTE Band 12	10M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	0.14	0.223	0.297
	LTE Band 12	10M	QPSK	25	0	-	Left Side	5mm	Ant 0	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	-0.05	0.179	0.242
	LTE Band 12	10M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.09	0.394	0.524
	LTE Band 12	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.18	0.316	0.427
	LTE Band 12	10M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.14	0.390	0.519
	LTE Band 12	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.17	0.314	0.425
	LTE Band 13	10M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	0.16	0.252	0.338
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.09	0.202	0.276
19	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	-0.01	0.529	0.710
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.09	0.428	0.585
	LTE Band 13	10M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	-0.14	0.174	0.234
	LTE Band 13	10M	QPSK	25	0	-	Left Side	5mm	Ant 0	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.11	0.140	0.191
	LTE Band 13	10M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	-0.16	0.342	0.459
	LTE Band 13	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.08	0.275	0.376
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	0.09	0.492	0.661
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	0.06	0.396	0.542
835MHz																					
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	DSI 7	189	836.4	1	28.35	29.50	1.303	-	-	0.12	0.622	0.811
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	DSI 7	128	824.2	1	28.22	29.50	1.343	-	-	0.03	0.461	0.619
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	DSI 7	251	848.8	1	28.27	29.50	1.327	-	-	-0.19	0.601	0.798
20	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	1	28.35	29.50	1.303	-	-	-0.02	1.100	1.433
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	2	28.35	29.50	1.303	-	-	0.08	0.925	1.205
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	128	824.2	1	28.22	29.50	1.343	-	-	0.16	1.050	1.410
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	251	848.8	1	28.27	29.50	1.327	-	-	-0.17	1.020	1.354
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Side	5mm	Ant 0	DSI 7	189	836.4	1	28.35	29.50	1.303	-	-	0.04	0.307	0.400
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Side	5mm	Ant 0	DSI 7	189	836.4	1	28.35	29.50	1.303	-	-	0.09	0.462	0.602
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	189	836.4	1	28.35	29.50	1.303	-	-	0.01	0.672	0.876
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	128	824.2	1	28.22	29.50	1.343	-	-	-0.06	0.571	0.767
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	251	848.8	1	28.27	29.50	1.327	-	-	0.08	0.619	0.822
	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	0.13	0.424	0.564
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	-0.05	0.335	0.459
21	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	0.11	0.851	1.132
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	0.15	0.668	0.916
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	DSI 4	26865	831.5	1	21.56	23.00	1.393	-	-	0.17	0.669	0.932
	LTE Band 26	15M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	-0.1	0.223	0.297
	LTE Band 26	15M	QPSK	36	0	-	Left Side	5mm	Ant 0	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	0.08	0.177	0.243
	LTE Band 26	15M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	0.04	0.353	0.470
	LTE Band 26	15M	QPSK	36	0	-	Right Side	5mm	Ant 0	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	-0.06	0.278	0.381
	LTE Band 26	15M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	-0.01	0.475	0.632
	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	5mm	Ant 0	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	-0.17	0.411	0.563
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	4182	836.4	1	22.23	23.50	1.340	-	-	-0.05	0.475	0.636
22	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4182	836.4	1	22.23	23.50	1.340	-	-	0.05	0.949	1.271
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4132	826.4	1	22.10	23.50	1.380	-	-	-0.16	0.885	1.222
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	1	22.14	23.50	1.368	-	-	0.04	0.891	1.219



FCC SAR Test Report

Report No. : FA253103-01

	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	4182	836.4	1	22.23	23.50	1.340	-	-	-0.16	0.250	0.335
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	4182	836.4	1	22.23	23.50	1.340	-	-	0.11	0.403	0.540
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	4182	836.4	1	22.23	23.50	1.340	-	-	0.09	0.498	0.667
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	1413	1732.6	1	14.86	16.00	1.300	-	-	-0.18	0.471	0.612
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1413	1732.6	1	14.86	16.00	1.300	-	-	-0.05	0.761	0.989
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1312	1712.4	1	14.61	16.00	1.377	-	-	0.02	0.802	1.105
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1513	1752.6	1	14.74	16.00	1.337	-	-	0.11	0.688	0.920
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	1413	1732.6	1	14.86	16.00	1.300	-	-	0.12	0.022	0.029
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	1413	1732.6	1	14.86	16.00	1.300	-	-	0.09	0.075	0.098
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1413	1732.6	1	14.86	16.00	1.300	-	-	-0.18	0.948	1.233
23	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1312	1712.4	1	14.61	16.00	1.377	-	-	0.02	0.950	1.308
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1513	1752.6	1	14.74	16.00	1.337	-	-	-0.01	0.907	1.212
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	132322	1745	1	14.70	16.00	1.349	-	-	0.04	0.525	0.708
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	0.19	0.363	0.494
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	14.70	16.00	1.349	-	-	0.09	0.778	1.049
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132072	1720	1	14.59	16.00	1.384	-	-	0.15	0.865	1.197
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132572	1770	1	14.56	16.00	1.393	-	-	-0.11	0.684	0.953
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	0.09	0.627	0.854
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132072	1720	1	14.58	16.00	1.387	-	-	-0.07	0.692	0.960
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132572	1770	1	14.55	16.00	1.396	-	-	0.14	0.550	0.768
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	-0.18	0.623	0.848
	LTE Band 66	20M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 7	132322	1745	1	14.70	16.00	1.349	-	-	-0.06	0.025	0.034
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	-0.05	0.020	0.027
	LTE Band 66	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	132322	1745	1	14.70	16.00	1.349	-	-	-0.16	0.065	0.088
	LTE Band 66	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	0.19	0.052	0.071
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	14.70	16.00	1.349	-	-	-0.08	0.916	1.236
24	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	14.59	16.00	1.384	-	-	0.07	0.970	1.342
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572	1770	1	14.56	16.00	1.393	-	-	0.08	0.841	1.172
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	0.03	0.739	1.006
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	14.58	16.00	1.387	-	-	0.03	0.774	1.073
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572	1770	1	14.55	16.00	1.396	-	-	-0.08	0.676	0.944
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	14.66	16.00	1.361	-	-	0.19	0.733	0.998
1900MHz																					
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	0.05	0.566	0.736
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	0.02	0.998	1.298
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	512	1850.2	1	21.67	23.00	1.358	-	-	-0.01	0.866	1.176
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	810	1909.8	1	21.73	23.00	1.340	-	-	-0.03	0.822	1.101
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	0.04	0.034	0.044
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Side	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	0.06	0.087	0.113
25	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	-0.08	1.100	1.430
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	661	1880	2	21.86	23.00	1.300	-	-	0.09	0.791	1.028
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	512	1850.2	1	21.67	23.00	1.358	-	-	0.11	0.863	1.172
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	1	21.73	23.00	1.340	-	-	0.05	0.915	1.226
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	9400	1880	1	17.16	18.00	1.213	-	-	0.06	0.473	0.574
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9400	1880	1	17.16	18.00	1.213	-	-	0.02	0.759	0.921
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9262	1852.4	1	17.12	18.00	1.225	-	-	-0.09	0.793	0.971
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9538	1907.6	1	17.00	18.00	1.259	-	-	0.08	0.767	0.966
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	9400	1880	1	17.16	18.00	1.213	-	-	0.13	0.066	0.080
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	9400	1880	1	17.16	18.00	1.213	-	-	0.02	0.067	0.081
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9400	1880	1	17.16	18.00	1.213	-	-	-0.02	1.010	1.226
26	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9262	1852.4	1	17.12	18.00	1.225	-	-	0.05	1.100	1.347
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9538	1907.6	1	17.00	18.00	1.259	-	-	0.11	1.000	1.259
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	18900	1880	1	15.97	17.50	1.422	-	-	-0.09	0.376	0.535
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 7	18900	1880	1	15.94	17.50	1.432	-	-	0.09	0.300	0.430
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	18900	1880	1	15.97	17.50	1.422	-	-	0.09	0.566	0.805

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AF8

Page 53 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	18700	1860	1	15.81	17.50	1.476	-	-	-0.02	0.584	0.862
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	19100	1900	1	15.79	17.50	1.483	-	-	-0.17	0.582	0.863
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	18900	1880	1	15.94	17.50	1.432	-	-	-0.01	0.465	0.666
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 0	DSI 7	18900	1880	1	15.91	17.50	1.442	-	-	0.15	0.459	0.662
	LTE Band 2	20M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 7	18900	1880	1	15.97	17.50	1.422	-	-	0.18	0.048	0.068
	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	DSI 7	18900	1880	1	15.94	17.50	1.432	-	-	-0.01	0.039	0.056
	LTE Band 2	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	18900	1880	1	15.97	17.50	1.422	-	-	0.07	0.043	0.061
	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 7	18900	1880	1	15.94	17.50	1.432	-	-	-0.11	0.039	0.056
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	18900	1880	1	15.97	17.50	1.422	-	-	0.16	0.803	1.142
27	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	18700	1860	1	15.81	17.50	1.476	-	-	0.09	0.910	1.343
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	19100	1900	1	15.79	17.50	1.483	-	-	-0.05	0.773	1.146
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	18900	1880	1	15.94	17.50	1.432	-	-	0.01	0.644	0.922
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	18700	1860	1	15.79	17.50	1.483	-	-	-0.15	0.650	0.964
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	19100	1900	1	15.84	17.50	1.466	-	-	-0.15	0.621	0.910
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 7	18900	1880	1	15.91	17.50	1.442	-	-	0.18	0.637	0.919
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	21100	2535	1	18.76	20.00	1.330	-	-	-0.18	0.826	1.099
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	20850	2510	1	18.67	20.00	1.358	-	-	-0.18	0.781	1.061
28	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	21350	2560	1	18.73	20.00	1.340	-	-	0.07	0.989	1.325
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	21100	2535	1	18.67	20.00	1.358	-	-	0.04	0.665	0.903
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	20850	2510	1	18.49	20.00	1.416	-	-	0.01	0.617	0.874
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	21350	2560	1	18.50	20.00	1.413	-	-	0.1	0.712	1.006
	LTE Band 7	20M	QPSK	100	0	-	Front	5mm	Ant 1	DSI 7	21100	2535	1	18.64	20.00	1.368	-	-	-0.05	0.653	0.893
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	18.76	20.00	1.330	-	-	0.03	0.820	1.091
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	20850	2510	1	18.67	20.00	1.358	-	-	0.1	0.781	1.061
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21350	2560	1	18.73	20.00	1.340	-	-	0.09	0.880	1.179
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	18.67	20.00	1.358	-	-	-0.13	0.659	0.895
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	20850	2510	1	18.49	20.00	1.416	-	-	0.18	0.617	0.874
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	21350	2560	1	18.50	20.00	1.413	-	-	0.15	0.709	1.001
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	18.64	20.00	1.368	-	-	0.11	0.644	0.881
	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	21100	2535	1	18.76	20.00	1.330	-	-	-0.09	0.410	0.545
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	21100	2535	1	18.67	20.00	1.358	-	-	-0.16	0.329	0.447
	LTE Band 7	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 7	21100	2535	1	18.76	20.00	1.330	-	-	0.14	0.066	0.088
	LTE Band 7	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 7	21100	2535	1	18.67	20.00	1.358	-	-	-0.12	0.053	0.072
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	21100	2535	1	18.76	20.00	1.330	-	-	-0.18	0.601	0.800
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	20850	2510	1	18.67	20.00	1.358	-	-	-0.19	0.578	0.785
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	21350	2560	1	18.73	20.00	1.340	-	-	-0.04	0.635	0.851
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	21100	2535	1	18.67	20.00	1.358	-	-	0.03	0.473	0.642
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 1	DSI 7	21100	2535	1	18.64	20.00	1.368	-	-	0.06	0.467	0.639
29	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.08	1.030	1.307
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	39750	2506	1	20.72	22.00	1.343	62.9	1.006	0.16	0.794	1.073
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40185	2549.5	1	20.64	22.00	1.368	62.9	1.006	-0.17	0.738	1.015
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	-0.03	0.909	1.211
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	41490	2680	1	20.88	22.00	1.294	62.9	1.006	0.07	0.914	1.190
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	20.85	22.00	1.303	62.9	1.006	-0.11	0.772	1.012
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	39750	2506	1	20.71	22.00	1.346	62.9	1.006	0.15	0.624	0.845
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	40185	2549.5	1	20.59	22.00	1.384	62.9	1.006	-0.09	0.596	0.830
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.13	0.726	0.967
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	41490	2680	1	20.83	22.00	1.309	62.9	1.006	-0.06	0.738	0.972
	LTE Band 41	20M	QPSK	100	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	20.81	22.00	1.315	62.9	1.006	-0.13	0.755	0.999
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.08	0.914	1.160
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	39750	2506	1	20.72	22.00	1.343	62.9	1.006	-0.1	0.777	1.050
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	40185	2549.5	1	20.64	22.00	1.368	62.9	1.006	-0.06	0.709	0.976
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.16	0.897	1.195
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	41490	2680	1	20.88	22.00	1.294	62.9	1.006	0.05	0.891	1.160
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	20.85	22.00	1.303	62.9	1.006	0.17	0.749	0.982

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AF8

Page 54 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	39750	2506	1	20.71	22.00	1.346	62.9	1.006	0.07	0.624	0.845
LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	40185	2549.5	1	20.59	22.00	1.384	62.9	1.006	0.12	0.584	0.813
LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.05	0.715	0.953
LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	41490	2680	1	20.83	22.00	1.309	62.9	1.006	0.15	0.721	0.950
LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	20.81	22.00	1.315	62.9	1.006	0.04	0.726	0.961
LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	-0.16	0.436	0.553
LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	40620	2593	1	20.85	22.00	1.303	62.9	1.006	-0.15	0.348	0.456
LTE Band 41	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	-0.01	0.082	0.104
LTE Band 41	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 7	40620	2593	1	20.85	22.00	1.303	62.9	1.006	0.17	0.067	0.088
LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	-0.1	0.715	0.908
LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	39750	2506	1	20.72	22.00	1.343	62.9	1.006	-0.18	0.584	0.789
LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	40185	2549.5	1	20.64	22.00	1.368	62.9	1.006	-0.13	0.547	0.753
LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	-0.15	0.692	0.922
LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	41490	2680	1	20.88	22.00	1.294	62.9	1.006	0.04	0.647	0.842
LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	40620	2593	1	20.85	22.00	1.303	62.9	1.006	-0.04	0.573	0.751
LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	39750	2506	1	20.71	22.00	1.346	62.9	1.006	0.15	0.464	0.628
LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	40185	2549.5	1	20.59	22.00	1.384	62.9	1.006	0.18	0.440	0.612
LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	-0.03	0.544	0.725
LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	41490	2680	1	20.83	22.00	1.309	62.9	1.006	-0.18	0.514	0.677
LTE Band 41	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 1	DSI 7	40620	2593	1	20.81	22.00	1.315	62.9	1.006	0.16	0.555	0.734

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
30	WLAN2.4GHZ	802.11b 1Mbps	Front	5mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.09	0.322	0.428
	WLAN2.4GHZ	802.11b 1Mbps	Back	5mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	-0.04	0.725	0.965
	WLAN2.4GHZ	802.11b 1Mbps	Left Side	5mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.16	0.048	0.064
	WLAN2.4GHZ	802.11b 1Mbps	Right Side	5mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.06	0.311	0.414
	WLAN2.4GHZ	802.11b 1Mbps	Top Side	5mm	Ant 4	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.09	0.418	0.556
	WLAN2.4GHZ	802.11b 1Mbps	Back	5mm	Ant 4	Full	6	2437	1	18.21	19.50	1.346	100	1.000	0.05	0.563	0.758
31	WLAN2.4GHZ	802.11b 1Mbps	Back	5mm	Ant 4	Full	11	2462	1	18.03	19.50	1.403	100	1.000	0.05	0.515	0.722
	Bluetooth	802.11a 6Mbps	Front	5mm	Ant 4	Full	78	2480	1	13.53	14.00	1.113	76.49	1.089	0.04	0.077	0.093
31	Bluetooth	802.11a 6Mbps	Back	5mm	Ant 4	Full	78	2480	1	13.53	14.00	1.113	76.49	1.089	0.04	0.135	0.164
5000MHz																	
32	WLAN5.2GHZ	802.11n-HT40 MCS0	Front	5mm	Ant 4	Reduced	38	5190	1	14.78	16.50	1.486	94.72	1.056	0.1	0.068	0.107
	WLAN5.2GHZ	802.11n-HT40 MCS0	Back	5mm	Ant 4	Reduced	38	5190	1	14.78	16.50	1.486	94.72	1.056	0.01	0.746	1.171
	WLAN5.2GHZ	802.11n-HT40 MCS0	Back	5mm	Ant 4	Reduced	46	5230	1	14.54	16.00	1.400	94.72	1.056	0.01	0.701	1.036
	WLAN5.2GHZ	802.11n-HT40 MCS0	Left Side	5mm	Ant 4	Reduced	38	5190	1	14.78	16.50	1.486	94.72	1.056	0.16	0.017	0.027
	WLAN5.2GHZ	802.11n-HT40 MCS0	Right Side	5mm	Ant 4	Reduced	38	5190	1	14.78	16.50	1.486	94.72	1.056	0.12	0.063	0.099
	WLAN5.2GHZ	802.11n-HT40 MCS0	Top Side	5mm	Ant 4	Reduced	38	5190	1	14.78	16.50	1.486	94.72	1.056	-0.1	0.450	0.706
33	WLAN5.8GHZ	802.11ac-VHT80 MCS0	Front	5mm	Ant 4	Reduced	155	5775	1	13.18	15.00	1.521	89.2	1.121	0.04	0.311	0.530
	WLAN5.8GHZ	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	Reduced	155	5775	1	13.18	15.00	1.521	89.2	1.121	0.16	0.454	0.774
	WLAN5.8GHZ	802.11ac-VHT80 MCS0	Left Side	5mm	Ant 4	Reduced	155	5775	1	13.18	15.00	1.521	89.2	1.121	0.05	0.030	0.051
	WLAN5.8GHZ	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 4	Reduced	155	5775	1	13.18	15.00	1.521	89.2	1.121	0.06	0.106	0.181
	WLAN5.8GHZ	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 4	Reduced	155	5775	1	13.18	15.00	1.521	89.2	1.121	-0.04	0.653	1.113



15.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																						
	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.09	0.241	0.321
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.15	0.193	0.261
34	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	1	22.76	24.00	1.330	-	-	-0.01	0.603	0.802
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	2	22.76	24.00	1.330	-	-	0.01	0.551	0.733
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	1	21.69	23.00	1.352	-	-	0.02	0.484	0.654
	LTE Band 12	10M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	1	21.60	23.00	1.380	-	-	0.09	0.459	0.634
	LTE Band 13	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	0.16	0.252	0.338
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.09	0.202	0.276
35	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23230	782	1	22.72	24.00	1.343	-	-	-0.01	0.529	0.710
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 4	23230	782	1	21.64	23.00	1.368	-	-	-0.09	0.428	0.585
835MHz																						
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	-	DSI 3	189	836.4	1	28.35	29.50	1.303	-	-	0.12	0.622	0.811
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	-	DSI 3	128	824.2	1	28.22	29.50	1.343	-	-	0.03	0.461	0.619
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	-	DSI 3	251	848.8	1	28.27	29.50	1.327	-	-	-0.19	0.601	0.798
36	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	189	836.4	1	28.35	29.50	1.303	-	-	-0.02	1.100	1.433
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	189	836.4	2	28.35	29.50	1.303	-	-	0.08	0.925	1.205
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	Headset	DSI 3	189	836.4	1	28.35	29.50	1.303	-	-	0.04	0.999	1.302
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	128	824.2	1	28.22	29.50	1.343	-	-	0.16	1.050	1.410
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	251	848.8	1	28.27	29.50	1.327	-	-	-0.17	1.020	1.354
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	13mm	Ant 0	-	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	-0.03	0.290	0.378
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	18mm	Ant 0	-	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	0.05	0.382	0.498
	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	0.13	0.424	0.564
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	-	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	-0.05	0.335	0.459
37	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	22.76	24.00	1.330	-	-	0.11	0.851	1.132
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	21.63	23.00	1.371	-	-	0.15	0.668	0.916
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	21.56	23.00	1.393	-	-	0.17	0.669	0.932
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	4182	836.4	1	22.23	23.50	1.340	-	-	-0.05	0.475	0.636
38	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4182	836.4	1	22.23	23.50	1.340	-	-	0.05	0.949	1.271
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	4182	836.4	1	22.23	23.50	1.340	-	-	0.03	0.862	1.155
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4132	826.4	1	22.10	23.50	1.380	-	-	-0.16	0.885	1.222
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4233	846.6	1	22.14	23.50	1.368	-	-	0.04	0.891	1.219
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	13mm	Ant 0	-	DSI 4	4182	836.4	1	22.64	24.00	1.368	-	-	0.02	0.226	0.309
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	-	DSI 4	4182	836.4	1	22.64	24.00	1.368	-	-	-0.07	0.273	0.373
1750MHz																						
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	1413	1732.6	1	15.25	16.50	1.334	-	-	-0.09	0.606	0.808
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	1312	1712.4	1	15.03	16.50	1.403	-	-	-0.04	0.584	0.819
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	1513	1752.6	1	15.16	16.50	1.361	-	-	-0.11	0.448	0.610
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1413	1732.6	1	15.25	16.50	1.334	-	-	0.06	0.878	1.171
39	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1312	1712.4	1	15.03	16.50	1.403	-	-	0.17	0.925	1.298
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	1312	1712.4	1	15.03	16.50	1.403	-	-	0.17	0.854	1.198
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1513	1752.6	1	15.16	16.50	1.361	-	-	0.12	0.793	1.080
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	13mm	Ant 0	-	DSI 4	1312	1712.4	1	22.42	24.00	1.439	-	-	0.02	0.593	0.853
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	13mm	Ant 0	-	DSI 4	1413	1732.6	1	22.63	24.00	1.371	-	-	0.01	0.568	0.779
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	13mm	Ant 0	-	DSI 4	1513	1752.6	1	22.55	24.00	1.396	-	-	0.08	0.551	0.769
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	-	DSI 4	1312	1712.4	1	22.42	24.00	1.439	-	-	0.07	0.636	0.915
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	-	DSI 4	1413	1732.6	1	22.63	24.00	1.371	-	-	0.01	0.601	0.824
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	-	DSI 4	1513	1752.6	1	22.55	24.00	1.396	-	-	0.09	0.622	0.869
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	1	15.06	16.50	1.393	-	-	0.17	0.581	0.809
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132072	1720	1	14.87	16.50	1.455	-	-	0.12	0.573	0.834



FCC SAR Test Report

Report No. : FA253103-01

	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132572	1770	1	14.94	16.50	1.432	-	-	0.18	0.428	0.613
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	1	15.02	16.50	1.406	-	-	0.17	0.397	0.558
	LTE Band 66	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	1	14.94	16.50	1.432	-	-	-0.18	0.400	0.573
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	15.06	16.50	1.393	-	-	0.14	0.851	1.186
40	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	1	14.87	16.50	1.455	-	-	0.03	0.947	1.378
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	2	14.87	16.50	1.455	-	-	0.01	0.705	1.026
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	132072	1720	1	14.87	16.50	1.455	-	-	-0.13	0.911	1.326
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	1	14.94	16.50	1.432	-	-	0.01	0.749	1.073
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	15.02	16.50	1.406	-	-	-0.06	0.686	0.965
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	1	14.94	16.50	1.432	-	-	0.1	0.757	1.084
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	1	14.96	16.50	1.426	-	-	0.01	0.602	0.858
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	14.94	16.50	1.432	-	-	0.06	0.682	0.977
	LTE Band 66	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	132072	1720	1	22.42	24.00	1.439	-	-	0.05	0.701	1.009
	LTE Band 66	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	132322	1745	1	22.55	24.00	1.396	-	-	0.09	0.621	0.867
	LTE Band 66	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	132572	1770	1	22.46	24.00	1.426	-	-	-0.11	0.633	0.902
	LTE Band 66	20M	QPSK	100	0	-	Front	13mm	Ant 0	-	DSI 4	132572	1770	1	21.53	23.00	1.403	-	-	0.02	0.601	0.843
	LTE Band 66	20M	QPSK	1	0	-	Back	18mm	Ant 0	-	DSI 4	132072	1720	1	22.42	24.00	1.439	-	-	0.13	0.620	0.892
	LTE Band 66	20M	QPSK	1	0	-	Back	18mm	Ant 0	-	DSI 4	132322	1745	1	22.55	24.00	1.396	-	-	0.03	0.554	0.774
	LTE Band 66	20M	QPSK	1	0	-	Back	18mm	Ant 0	-	DSI 4	132572	1770	1	22.46	24.00	1.426	-	-	0.09	0.539	0.768
	LTE Band 66	20M	QPSK	50	0	-	Back	18mm	Ant 0	-	DSI 4	132072	1720	1	21.46	23.00	1.426	-	-	0.13	0.585	0.834
	LTE Band 66	20M	QPSK	50	0	-	Back	18mm	Ant 0	-	DSI 4	132322	1745	1	21.56	23.00	1.393	-	-	0.09	0.544	0.758
	LTE Band 66	20M	QPSK	50	0	-	Back	18mm	Ant 0	-	DSI 4	132572	1770	1	21.51	23.00	1.409	-	-	-0.01	0.566	0.798
	LTE Band 66	20M	QPSK	100	0	-	Back	18mm	Ant 0	-	DSI 4	132072	1720	1	21.48	23.00	1.419	-	-	-0.1	0.515	0.731
1900MHz																						
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	-	DSI 3	661	1880	1	23.33	24.50	1.309	-	-	-0.03	0.592	0.775
41	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	661	1880	1	23.33	24.50	1.309	-	-	-0.02	1.030	1.348
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	Headset	DSI 3	661	1880	1	23.33	24.50	1.309	-	-	0.14	0.985	1.290
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	512	1850.2	1	23.13	24.50	1.371	-	-	-0.12	0.868	1.190
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	810	1909.8	1	23.32	24.50	1.312	-	-	0.01	0.824	1.081
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	13mm	Ant 0	-	DSI 4	661	1880	1	26.69	28.00	1.352	-	-	-0.13	0.451	0.610
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	18mm	Ant 0	-	DSI 4	661	1880	1	26.69	28.00	1.352	-	-	-0.11	0.312	0.422
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	9400	1880	1	18.60	19.50	1.230	-	-	0.17	0.603	0.742
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9400	1880	1	18.60	19.50	1.230	-	-	-0.05	0.967	1.190
42	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9262	1852.4	1	18.53	19.50	1.250	-	-	0.12	1.010	1.263
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	9262	1852.4	1	18.53	19.50	1.250	-	-	0.02	0.969	1.212
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9538	1907.6	1	18.42	19.50	1.282	-	-	0.16	0.967	1.240
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	13mm	Ant 0	-	DSI 4	9400	1880	1	22.96	24.00	1.271	-	-	0.13	0.581	0.738
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	-	DSI 4	9262	1852.4	1	22.95	24.00	1.274	-	-	-0.07	0.426	0.543
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	1	17.57	19.00	1.390	-	-	-0.05	0.650	0.903
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	18700	1860	1	17.42	19.00	1.439	-	-	0.11	0.640	0.921
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	19100	1900	1	17.40	19.00	1.445	-	-	-0.17	0.646	0.934
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	1	17.56	19.00	1.393	-	-	-0.03	0.518	0.722
	LTE Band 2	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	1	17.54	19.00	1.400	-	-	-0.07	0.515	0.721
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	1	17.57	19.00	1.390	-	-	-0.13	0.899	1.250
43	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	18700	1860	1	17.42	19.00	1.439	-	-	0.13	0.989	1.423
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	18700	1860	1	17.42	19.00	1.439	-	-	-0.19	0.924	1.329
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	19100	1900	1	17.40	19.00	1.445	-	-	-0.02	0.910	1.315
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	1	17.56	19.00	1.393	-	-	-0.18	0.805	1.121
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	18700	1860	1	17.46	19.00	1.426	-	-	-0.01	0.815	1.162
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	19100	1900	1	17.49	19.00	1.416	-	-	0.05	0.805	1.140
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	1	17.54	19.00	1.400	-	-	0.14	0.795	1.113
	LTE Band 2	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	19100	1900	1	22.43	24.00	1.435	-	-	-0.06	0.802	1.151
	LTE Band 2	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	18900	1880	1	22.52	24.00	1.406	-	-	0.02	0.745	1.048
	LTE Band 2	20M	QPSK	1	0	-	Front	13mm	Ant 0	-	DSI 4	18700	1860	1	22.49	24.00	1.416	-	-	0.03	0.709	1.004
	LTE Band 2	20M	QPSK	100	0	-	Front	13mm	Ant 0	-	DSI 4	19100	1900	1	21.32	23.00	1.472	-	-	-0.06	0.633	0.932
	LTE Band 2	20M	QPSK	1	0	-	Back	18mm	Ant 0	-	DSI 4	18700	1860	1	22.49	24.00	1.416	-	-	-0.18	0.394	0.558

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AF8

Page 57 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

2600MHz																						
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	1	18.76	20.00	1.330	-	-	-0.18	0.826	1.099
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	20850	2510	1	18.67	20.00	1.358	-	-	-0.18	0.781	1.061
44	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	21350	2560	1	18.73	20.00	1.340	-	-	0.07	0.989	1.325
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	21350	2560	2	18.73	20.00	1.340	-	-	0.08	0.955	1.279
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	Headset	DSI 3	21350	2560	1	18.73	20.00	1.340	-	-	0.09	0.805	1.078
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	1	18.67	20.00	1.358	-	-	0.04	0.665	0.903
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	20850	2510	1	18.49	20.00	1.416	-	-	0.01	0.617	0.874
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	21350	2560	1	18.50	20.00	1.413	-	-	0.1	0.712	1.006
	LTE Band 7	20M	QPSK	100	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	1	18.64	20.00	1.368	-	-	-0.05	0.653	0.893
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	18.76	20.00	1.330	-	-	0.03	0.820	1.091
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	1	18.67	20.00	1.358	-	-	0.1	0.781	1.061
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	1	18.73	20.00	1.340	-	-	0.09	0.880	1.179
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	18.67	20.00	1.358	-	-	-0.13	0.659	0.895
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	1	18.49	20.00	1.416	-	-	0.18	0.617	0.874
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	1	18.50	20.00	1.413	-	-	0.15	0.709	1.001
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	18.64	20.00	1.368	-	-	0.11	0.644	0.881
	LTE Band 7	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	21350	2560	1	22.51	24.00	1.409	-	-	-0.08	0.601	0.847
	LTE Band 7	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	21100	2535	1	22.61	24.00	1.377	-	-	0.01	0.522	0.719
	LTE Band 7	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	20850	2510	1	22.50	24.00	1.413	-	-	0.09	0.519	0.733
	LTE Band 7	20M	QPSK	100	0	-	Front	13mm	Ant 1	-	DSI 4	21350	2560	1	21.66	23.00	1.361	-	-	-0.08	0.505	0.688
	LTE Band 7	20M	QPSK	1	0	-	Back	18mm	Ant 1	-	DSI 4	21350	2560	1	22.51	24.00	1.409	-	-	0.17	0.276	0.389
45	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.08	1.030	1.307
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	Headset	DSI 3	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.01	0.921	1.169
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	39750	2506	1	20.72	22.00	1.343	62.9	1.006	0.16	0.794	1.073
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	40185	2549.5	1	20.64	22.00	1.368	62.9	1.006	-0.17	0.738	1.015
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	-0.03	0.909	1.211
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	41490	2680	1	20.88	22.00	1.294	62.9	1.006	0.07	0.914	1.190
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	20.85	22.00	1.303	62.9	1.006	-0.11	0.772	1.012
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	39750	2506	1	20.71	22.00	1.346	62.9	1.006	0.15	0.624	0.845
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	40185	2549.5	1	20.59	22.00	1.384	62.9	1.006	-0.09	0.596	0.830
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.13	0.726	0.967
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	41490	2680	1	20.83	22.00	1.309	62.9	1.006	-0.06	0.738	0.972
	LTE Band 41	20M	QPSK	100	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	20.81	22.00	1.315	62.9	1.006	-0.13	0.755	0.999
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.08	0.914	1.160
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	39750	2506	1	20.72	22.00	1.343	62.9	1.006	-0.1	0.777	1.050
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	40185	2549.5	1	20.64	22.00	1.368	62.9	1.006	-0.06	0.709	0.976
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.16	0.897	1.195
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	41490	2680	1	20.88	22.00	1.294	62.9	1.006	0.05	0.891	1.160
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	20.85	22.00	1.303	62.9	1.006	0.17	0.749	0.982
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	39750	2506	1	20.71	22.00	1.346	62.9	1.006	0.07	0.624	0.845
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	40185	2549.5	1	20.59	22.00	1.384	62.9	1.006	0.12	0.584	0.813
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	41055	2636.5	1	20.78	22.00	1.324	62.9	1.006	0.05	0.715	0.953
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	41490	2680	1	20.83	22.00	1.309	62.9	1.006	0.15	0.721	0.950
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	20.81	22.00	1.315	62.9	1.006	0.04	0.726	0.961
	LTE Band 41	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	-0.18	0.549	0.715
	LTE Band 41	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	39750	2506	1	22.60	24.00	1.380	62.9	1.006	0.02	0.502	0.697
	LTE Band 41	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	40185	2549.5	1	22.47	24.00	1.422	62.9	1.006	0.09	0.486	0.695
	LTE Band 41	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	41055	2636.5	1	22.68	24.00	1.355	62.9	1.006	0.02	0.501	0.683
	LTE Band 41	20M	QPSK	1	0	-	Front	13mm	Ant 1	-	DSI 4	41490	2680	1	22.76	24.00	1.330	62.9	1.006	0.02	0.522	0.699
	LTE Band 41	20M	QPSK	1	0	-	Back	18mm	Ant 1	-	DSI 4	41055	2636.5	1	22.68	24.00	1.355	62.9	1.006	0.01	0.145	0.198



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																		
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 4	-	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.04	0.322	0.428
46	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4	-	Full	1	2412	1	18.26	19.50	1.330	100	1.000	-0.04	0.725	0.965
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4	-	Full	1	2412	2	18.26	19.50	1.330	100	1.000	0.09	0.680	0.905
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4	-	Full	6	2437	1	18.21	19.50	1.346	100	1.000	-0.03	0.563	0.758
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4	-	Full	11	2462	1	18.03	19.50	1.403	100	1.000	0.05	0.515	0.722
	WLAN2.4GHz	802.11b 1Mbps	Back	18mm	Ant 4	-	Full	1	2412	1	18.26	19.50	1.330	100	1.000	0.01	0.086	0.114
	Bluetooth	802.11a 6Mbps	Front	5mm	Ant 4	-	Full	78	2480	1	13.53	14.00	1.113	76.49	1.089	0.04	0.077	0.093
47	Bluetooth	802.11a 6Mbps	Back	5mm	Ant 4	-	Full	78	2480	1	13.53	14.00	1.113	76.49	1.089	0.04	0.135	0.164
	Bluetooth	802.11a 6Mbps	Front	13mm	Ant 4	-	Full	78	2480	1	13.53	14.00	1.113	76.49	1.089	0.09	0.001	0.001
5000MHz																		
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	5mm	Ant 4	-	Reduced	62	5310	1	14.86	16.00	1.301	94.72	1.056	0.02	0.165	0.227
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 4	-	Reduced	62	5310	1	14.86	16.00	1.301	94.72	1.056	0.09	0.727	0.999
48	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 4	-	Reduced	54	5270	1	14.56	16.00	1.393	94.72	1.056	0.01	0.803	1.181
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 4	-	Reduced	54	5270	2	14.56	16.00	1.393	94.72	1.056	0.09	0.629	0.925
	WLAN5.3GHz	802.11a 6Mbps	Front	13mm	Ant 4	-	Reduced	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.16	0.191	0.283
	WLAN5.3GHz	802.11a 6Mbps	Back	18mm	Ant 4	-	Reduced	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.06	0.194	0.288
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 4	-	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	-0.08	0.346	0.550
49	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	-	Reduced	122	5610	1	15.98	17.50	1.419	89.2	1.121	0.01	0.741	1.179
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	-	Reduced	122	5610	2	15.98	17.50	1.419	89.2	1.121	0.09	0.702	1.117
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	-	Reduced	138	5690	1	15.91	17.50	1.442	89.2	1.121	0.06	0.701	1.133
	WLAN5.5GHz	802.11a 6Mbps	Front	13mm	Ant 4	-	Reduced	124	5620	1	17.91	19.50	1.442	97.46	1.026	0.03	0.290	0.429
	WLAN5.5GHz	802.11a 6Mbps	Back	18mm	Ant 4	-	Reduced	124	5620	1	17.91	19.50	1.442	97.46	1.026	0.16	0.135	0.200
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 4	-	Reduced	155	5775	1	15.23	16.50	1.340	89.2	1.121	-0.19	0.598	0.898
50	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	-	Reduced	155	5775	1	15.23	16.50	1.340	89.2	1.121	-0.04	0.781	1.173
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 4	-	Reduced	155	5775	2	15.23	16.50	1.340	89.2	1.121	0.06	0.688	1.033
	WLAN5.8GHz	802.11a 6Mbps	Front	13mm	Ant 4	-	Reduced	165	5825	1	17.88	19.50	1.452	97.46	1.026	0.14	0.291	0.433
	WLAN5.8GHz	802.11a 6Mbps	Back	18mm	Ant 4	-	Reduced	165	5825	1	17.88	19.50	1.452	97.46	1.026	0.08	0.156	0.232



15.4 Product Specific SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
835MHz																					
51	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	0.04	2.020	2.632
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	189	836.4	2	29.85	31.00	1.303	-	-	0.02	1.560	2.033
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	128	824.2	1	29.84	31.00	1.306	-	-	0.09	1.950	2.547
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	251	848.8	1	29.71	31.00	1.346	-	-	0.01	1.910	2.571
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	0.08	1.100	1.433
52	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	4182	836.4	1	22.64	24.00	1.368	-	-	-0.12	1.580	2.161
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	4132	826.4	1	22.34	24.00	1.466	-	-	-0.17	1.440	2.110
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	4233	846.6	1	22.39	24.00	1.449	-	-	0.13	1.380	1.999
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	1413	1732.6	1	17.91	19.50	1.442	-	-	0.11	1.480	2.134
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	1312	1712.4	1	17.80	19.50	1.479	-	-	-0.05	1.540	2.278
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	1513	1752.6	1	17.79	19.50	1.483	-	-	0.08	1.370	2.031
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1413	1732.6	1	17.91	19.50	1.442	-	-	-0.07	1.930	2.783
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1312	1712.4	1	17.80	19.50	1.479	-	-	0.06	1.990	2.943
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1513	1752.6	1	17.79	19.50	1.483	-	-	0.01	1.790	2.654
53	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1413	1732.6	1	17.91	19.50	1.442	-	-	0.15	2.330	3.360
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1413	1732.6	2	17.91	19.50	1.442	-	-	-0.02	1.960	2.827
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1312	1712.4	1	17.80	19.50	1.479	-	-	0.14	2.210	3.269
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1513	1752.6	1	17.79	19.50	1.483	-	-	0.15	2.250	3.336
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	6mm	Ant 0	DSI 4	1312	1712.4	1	22.42	24.00	1.439	-	-	-0.05	1.040	1.496
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	11mm	Ant 0	DSI 4	1312	1712.4	1	22.42	24.00	1.439	-	-	0.06	0.848	1.220
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	9mm	Ant 0	DSI 4	1413	1732.6	1	22.63	24.00	1.371	-	-	0.15	1.200	1.645
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	1	18.07	19.50	1.390	-	-	0.04	1.450	2.015
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132072	1720	1	17.85	19.50	1.462	-	-	0.02	1.490	2.179
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132572	1770	1	17.81	19.50	1.476	-	-	0.15	1.230	1.815
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	1	18.00	19.50	1.413	-	-	-0.02	1.090	1.540
	LTE Band 66	20M	QPSK	100	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	1	17.98	19.50	1.419	-	-	0.04	1.050	1.490
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	18.07	19.50	1.390	-	-	-0.17	1.760	2.446
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	1	17.85	19.50	1.462	-	-	0.08	1.920	2.807
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	1	17.81	19.50	1.476	-	-	-0.11	1.610	2.376
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	18.00	19.50	1.413	-	-	0.17	1.420	2.006
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	1	17.82	19.50	1.472	-	-	0.11	1.530	2.253
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	1	17.90	19.50	1.445	-	-	0.04	1.290	1.865
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	17.98	19.50	1.419	-	-	-0.05	1.410	2.001
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	18.07	19.50	1.390	-	-	-0.06	2.150	2.988
54	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	1	17.85	19.50	1.462	-	-	0.08	2.240	3.275
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	17.81	19.50	1.476	-	-	-0.14	2.040	3.010
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	18.00	19.50	1.413	-	-	-0.17	1.720	2.430
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	1	17.82	19.50	1.472	-	-	0.13	1.780	2.621
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	17.90	19.50	1.445	-	-	0.14	1.630	2.356
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	17.98	19.50	1.419	-	-	-0.06	1.690	2.398
	LTE Band 66	20M	QPSK	1	0	-	Front	6mm	Ant 0	DSI 4	132072	1720	1	22.42	24.00	1.439	-	-	0.02	1.020	1.468
	LTE Band 66	20M	QPSK	1	0	-	Back	11mm	Ant 0	DSI 4	132072	1720	1	22.42	24.00	1.439	-	-	0.08	0.804	1.157
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	9mm	Ant 0	DSI 4	132072	1720	1	22.42	24.00	1.439	-	-	0.08	1.310	1.885
1900MHz																					
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	0mm	Ant 0	DSI 6	661	1880	1	25.69	27.00	1.352	-	-	0.05	1.620	2.190
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	0mm	Ant 0	DSI 6	512	1850.2	1	25.46	27.00	1.426	-	-	-0.03	1.350	1.925
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	0mm	Ant 0	DSI 6	810	1909.8	1	25.50	27.00	1.413	-	-	0.15	1.450	2.048
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	661	1880	1	25.69	27.00	1.352	-	-	-0.12	2.160	2.920



FCC SAR Test Report

Report No. : FA253103-01

	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	512	1850.2	1	25.46	27.00	1.426	-	-	0.11	1.820	2.595
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	810	1909.8	1	25.50	27.00	1.413	-	-	0.05	1.940	2.740
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	661	1880	1	25.69	27.00	1.352	-	-	0.04	2.330	3.150
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	1	25.46	27.00	1.426	-	-	-0.16	1.940	2.766
55	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	1	25.50	27.00	1.413	-	-	-0.05	2.410	3.404
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	2	25.50	27.00	1.413	-	-	0.09	1.660	2.345
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	6mm	Ant 0	DSI 4	661	1880	1	26.69	28.00	1.352	-	-	0.17	0.645	0.872
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	11mm	Ant 0	DSI 4	661	1880	1	26.69	28.00	1.352	-	-	0.01	0.415	0.561
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	9mm	Ant 0	DSI 4	661	haod	1	26.69	28.00	1.352	-	-	0.09	0.775	1.048
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	9400	1880	1	20.24	21.50	1.337	-	-	0.01	1.420	1.898
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9400	1880	1	20.24	21.50	1.337	-	-	-0.05	1.880	2.513
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9262	1852.4	1	20.20	21.50	1.349	-	-	-0.02	2.070	2.792
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9538	1907.6	1	20.12	21.50	1.374	-	-	-0.1	1.920	2.638
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9400	1880	1	20.24	21.50	1.337	-	-	0.06	1.990	2.660
56	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9262	1852.4	1	20.20	21.50	1.349	-	-	0.01	2.380	3.211
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9538	1907.6	1	20.12	21.50	1.374	-	-	-0.14	1.780	2.446
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	6mm	Ant 0	DSI 4	9400	1880	1	22.96	24.00	1.271	-	-	-0.05	0.859	1.091
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	11mm	Ant 0	DSI 4	9262	1852.4	1	22.95	24.00	1.274	-	-	-0.12	0.574	0.731
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	9mm	Ant 0	DSI 4	9262	1852.4	1	22.95	24.00	1.274	-	-	-0.06	1.140	1.452
	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	18900	1880	1	20.05	21.50	1.396	-	-	-0.03	1.370	1.913
	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	18900	1880	1	20.01	21.50	1.409	-	-	-0.18	1.090	1.536
	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	18900	1880	1	20.05	21.50	1.396	-	-	0.15	1.720	2.402
	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	18700	1860	1	19.96	21.50	1.426	-	-	0.12	1.750	2.495
	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	19100	1900	1	19.90	21.50	1.445	-	-	0.16	1.750	2.530
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	18900	1880	1	20.01	21.50	1.409	-	-	-0.04	1.430	2.015
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	18700	1860	1	19.90	21.50	1.445	-	-	0.06	1.410	2.038
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	19100	1900	1	19.97	21.50	1.422	-	-	0.07	1.400	1.991
	LTE Band 2	20M	QPSK	100	0	-	Back	0mm	Ant 0	DSI 6	18900	1880	1	19.92	21.50	1.439	-	-	0.04	1.370	1.971
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	1	20.05	21.50	1.396	-	-	0.15	1.980	2.765
57	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	18700	1860	1	19.96	21.50	1.426	-	-	0.03	2.270	3.236
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	19100	1900	1	19.90	21.50	1.445	-	-	-0.05	1.840	2.660
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	1	20.01	21.50	1.409	-	-	0.13	1.590	2.241
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	18700	1860	1	19.90	21.50	1.445	-	-	-0.05	1.700	2.457
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	19100	1900	1	19.97	21.50	1.422	-	-	0.09	1.480	2.105
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	1	19.92	21.50	1.439	-	-	0.14	1.590	2.288
	LTE Band 2	20M	QPSK	1	0	-	Front	6mm	Ant 0	DSI 4	18900	1880	1	22.52	24.00	1.406	-	-	0.13	0.734	1.032
	LTE Band 2	20M	QPSK	1	0	-	Back	11mm	Ant 0	DSI 4	19100	1900	1	22.43	24.00	1.435	-	-	-0.14	0.840	1.206
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	9mm	Ant 0	DSI 4	18700	1860	1	22.49	24.00	1.416	-	-	-0.02	1.040	1.472
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	21100	2535	1	19.08	20.50	1.387	-	-	0.02	2.090	2.898
	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	20850	2510	1	18.95	20.50	1.429	-	-	0.15	1.990	2.843
58	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	21350	2560	1	19.01	20.50	1.409	-	-	0.09	2.280	3.213
	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	21350	2560	2	19.01	20.50	1.409	-	-	0.01	2.040	2.875
	LTE Band 7	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	21100	2535	1	19.01	20.50	1.409	-	-	0.14	1.660	2.339
	LTE Band 7	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	20850	2510	1	18.94	20.50	1.432	-	-	0.05	1.570	2.249
	LTE Band 7	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	21350	2560	1	18.92	20.50	1.439	-	-	-0.15	1.720	2.475
	LTE Band 7	20M	QPSK	100	0	-	Front	0mm	Ant 1	DSI 6	21100	2535	1	18.98	20.50	1.419	-	-	-0.01	1.640	2.327
	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	19.08	20.50	1.387	-	-	0.01	2.090	2.898
	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	18.95	20.50	1.429	-	-	0.01	2.050	2.929
	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	21350	2560	1	19.01	20.50	1.409	-	-	0.19	2.150	3.030
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	19.01	20.50	1.409	-	-	0.04	1.680	2.368
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	18.94	20.50	1.432	-	-	-0.18	1.620	2.320
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	21350	2560	1	18.92	20.50	1.439	-	-	-0.19	1.730	2.489
	LTE Band 7	20M	QPSK	100	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	18.98	20.50	1.419	-	-	0.18	1.660	2.356
	LTE Band 7	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	21100	2535	1	19.08	20.50	1.387	-	-	-0.16	0.979	1.358
	LTE Band 7	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	21100	2535	1	19.01	20.50	1.409	-	-	-0.05	0.844	1.189

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AF8

Page 61 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 6	21100	2535	1	19.08	20.50	1.387	-	-	0.13	1.340	1.858
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 6	21100	2535	1	19.01	20.50	1.409	-	-	0.11	1.080	1.522
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 4	21350	2560	1	22.51	24.00	1.409	-	-	0.09	1.410	1.987
	LTE Band 7	20M	QPSK	1	0	-	Back	9mm	Ant 1	DSI 4	21350	2560	1	22.51	24.00	1.409	-	-	0.19	1.010	1.423
	LTE Band 7	20M	QPSK	1	0	-	Left Side	3mm	Ant 1	DSI 4	21100	2535	1	22.61	24.00	1.377	-	-	0.04	0.928	1.278
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	9mm	Ant 1	DSI 4	21100	2535	1	22.61	24.00	1.377	-	-	0.04	0.525	0.723
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	-0.14	2.310	3.008
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 4	39750	2506	1	22.60	24.00	1.380	62.9	1.006	0.14	2.090	2.902
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 4	40185	2549.5	1	22.47	24.00	1.422	62.9	1.006	-0.13	1.900	2.719
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 4	41055	2636.5	1	22.68	24.00	1.355	62.9	1.006	0.08	2.080	2.836
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 4	41490	2680	1	22.76	24.00	1.330	62.9	1.006	0.11	1.970	2.637
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 4	40620	2593	1	21.78	23.00	1.324	62.9	1.006	-0.02	1.890	2.518
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 4	39750	2506	1	21.59	23.00	1.384	62.9	1.006	-0.18	1.680	2.338
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 4	40185	2549.5	1	21.49	23.00	1.416	62.9	1.006	-0.19	1.560	2.222
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 4	41055	2636.5	1	21.66	23.00	1.361	62.9	1.006	-0.13	1.680	2.301
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 4	41490	2680	1	21.76	23.00	1.330	62.9	1.006	0.12	1.600	2.141
	LTE Band 41	20M	QPSK	100	0	-	Front	0mm	Ant 1	DSI 4	40620	2593	1	21.72	23.00	1.343	62.9	1.006	0.09	1.840	2.486
59	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.07	2.380	3.099
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	39750	2506	1	22.60	24.00	1.380	62.9	1.006	0.11	2.230	3.097
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	40185	2549.5	1	22.47	24.00	1.422	62.9	1.006	0.03	1.990	2.847
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	41055	2636.5	1	22.68	24.00	1.355	62.9	1.006	0.12	2.270	3.095
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	41490	2680	1	22.76	24.00	1.330	62.9	1.006	-0.06	2.260	3.025
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 4	40620	2593	1	21.78	23.00	1.324	62.9	1.006	0.09	1.960	2.611
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 4	39750	2506	1	21.59	23.00	1.384	62.9	1.006	0.01	1.820	2.533
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 4	40185	2549.5	1	21.49	23.00	1.416	62.9	1.006	-0.15	1.630	2.322
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 4	41055	2636.5	1	21.66	23.00	1.361	62.9	1.006	0.16	1.770	2.424
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 4	41490	2680	1	21.76	23.00	1.330	62.9	1.006	0.17	1.820	2.436
	LTE Band 41	20M	QPSK	100	0	-	Back	0mm	Ant 1	DSI 4	40620	2593	1	21.72	23.00	1.343	62.9	1.006	-0.1	1.900	2.567
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.07	1.510	1.966
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 4	39750	2506	1	22.60	24.00	1.380	62.9	1.006	0.07	1.410	1.958
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 4	40185	2549.5	1	22.47	24.00	1.422	62.9	1.006	0.07	1.310	1.874
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 4	41055	2636.5	1	22.68	24.00	1.355	62.9	1.006	0.07	1.290	1.759
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 1	DSI 4	41490	2680	1	22.76	24.00	1.330	62.9	1.006	0.07	1.350	1.807
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 4	40620	2593	1	21.78	23.00	1.324	62.9	1.006	-0.13	1.280	1.705
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 4	39750	2506	1	21.59	23.00	1.384	62.9	1.006	-0.13	1.200	1.670
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 4	40185	2549.5	1	21.49	23.00	1.416	62.9	1.006	-0.13	1.180	1.681
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 4	41055	2636.5	1	21.66	23.00	1.361	62.9	1.006	-0.13	1.150	1.575
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 1	DSI 4	41490	2680	1	21.76	23.00	1.330	62.9	1.006	-0.13	1.190	1.593
	LTE Band 41	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 1	DSI 4	40620	2593	1	21.72	23.00	1.343	62.9	1.006	-0.13	1.020	1.378



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
5000MHz																	
60	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 4	Full	44	5220	1	17.97	19.50	1.422	97.46	1.026	0.03	0.970	1.415
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.13	0.435	0.645
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.01	1.150	1.705
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.04	0.072	0.107
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.09	0.150	0.222
61	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	60	5300	1	17.90	19.50	1.445	97.46	1.026	0.07	1.220	1.809
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	60	5300	2	17.90	19.50	1.445	97.46	1.026	0.07	1.050	1.557
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 4	Full	124	5620	1	17.91	19.50	1.442	97.46	1.026	0.04	0.633	0.936
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 4	Full	124	5620	1	17.91	19.50	1.442	97.46	1.026	0.04	0.648	0.958
	WLAN5.5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4	Full	124	5620	1	17.91	19.50	1.442	97.46	1.026	-0.1	0.045	0.067
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 4	Full	124	5620	1	17.91	19.50	1.442	97.46	1.026	0.05	0.155	0.229
62	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	124	5620	1	17.91	19.50	1.442	97.46	1.026	-0.03	1.070	1.583
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	124	5620	2	17.91	19.50	1.442	97.46	1.026	0.08	0.952	1.408
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 4	Full	165	5825	1	17.88	19.50	1.452	97.46	1.026	0.1	0.876	1.305
63	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	165	5825	1	17.88	19.50	1.452	97.46	1.026	0.05	1.480	2.204
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	165	5825	2	17.88	19.50	1.452	97.46	1.026	0.04	1.310	1.951
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	149	5745	1	17.83	19.50	1.468	97.46	1.026	0.01	1.310	1.974
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	Full	157	5785	1	17.82	19.50	1.472	97.46	1.026	0.09	1.250	1.887

15.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	14.59	16.00	1.384	-	-	0.07	0.970	1	1.342
2nd	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	14.59	16.00	1.384	-	-	0.03	0.919	1.055	1.271
1st	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	-0.08	1.100	1	1.430
2nd	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	661	1880	1	21.86	23.00	1.300	-	-	0.03	0.959	1.147	1.247
1st	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.08	1.030	1	1.307
2nd	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	20.99	22.00	1.262	62.9	1.006	0.03	0.951	1.083	1.207
1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 3	189	836.4	1	28.35	29.50	1.303	-	-	-0.02	1.100	1	1.433
2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 3	189	836.4	1	28.35	29.50	1.303	-	-	0.09	0.965	1.14	1.258
1st	WLAN5GHz	-	-	-	-	802.11n-HT40 MCS0	Back	5mm	Ant 4	Reduced	54	5270	1	14.56	16.00	1.393	94.72	1.056	0.01	0.803	1	1.181
2nd	WLAN5GHz	-	-	-	-	802.11n-HT40 MCS0	Back	5mm	Ant 4	Reduced	54	5270	1	14.56	16.00	1.393	94.72	1.056	0.09	0.755	1.064	1.111

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	0.04	2.020	1	2.632
2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 4	189	836.4	1	29.85	31.00	1.303	-	-	0.01	1.920	1.052	2.502
1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1413	1732.6	1	17.91	19.50	1.442	-	-	0.15	2.330	1	3.360
2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1413	1732.6	1	17.91	19.50	1.442	-	-	0.03	2.110	1.104	3.043
1st	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	1	25.50	27.00	1.413	-	-	-0.05	2.410	1	3.404
2nd	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	1	25.50	27.00	1.413	-	-	0.09	2.150	1.121	3.037
1st	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.07	2.380	1	3.099
2nd	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 4	40620	2593	1	22.88	24.00	1.294	62.9	1.006	0.09	2.220	1.072	2.890

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WWAN + NFC				Yes
5.	WLAN2.4GHz + NFC				Yes
6.	Bluetooth + NFC				Yes
7.	WLAN5GHz + NFC				Yes
8.	WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
9.	WLAN5GHz + Bluetooth+ NFC				Yes
10.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
11.	WWAN + WLAN5GHz + NFC				Yes
12.	WWAN + WLAN5GHz + Bluetooth + NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, NFC and WLAN 2.4GHz/5GHz/Bluetooth can transmit simultaneously.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D04, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 16.5.



16.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 4	WLAN5GHz Ant 4	Bluetooth Ant 4	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM850 Ant 0	Right Cheek	0.508	0.447	0.816	0.096	0.96	1.42	
	Right Tilted	0.292	0.484	0.949	0.096	0.78	1.34	
	Left Cheek	0.483	0.793	1.079	0.096	1.28	1.66	1
	Left Tilted	0.284	0.732	1.133	0.096	1.02	1.51	
GSM1900 Ant 0	Right Cheek	0.195	0.447	0.816	0.096	0.64	1.11	
	Right Tilted	0.133	0.484	0.949	0.096	0.62	1.18	
	Left Cheek	0.154	0.793	1.079	0.096	0.95	1.33	
	Left Tilted	0.150	0.732	1.133	0.096	0.88	1.38	
WCDMA II Ant 0	Right Cheek	0.269	0.447	0.816	0.096	0.72	1.18	
	Right Tilted	0.164	0.484	0.949	0.096	0.65	1.21	
	Left Cheek	0.208	0.793	1.079	0.096	1.00	1.38	
	Left Tilted	0.212	0.732	1.133	0.096	0.94	1.44	
WCDMA IV Ant 0	Right Cheek	0.277	0.447	0.816	0.096	0.72	1.19	
	Right Tilted	0.132	0.484	0.949	0.096	0.62	1.18	
	Left Cheek	0.210	0.793	1.079	0.096	1.00	1.39	
	Left Tilted	0.167	0.732	1.133	0.096	0.90	1.40	
WCDMA V Ant 0	Right Cheek	0.338	0.447	0.816	0.096	0.79	1.25	
	Right Tilted	0.207	0.484	0.949	0.096	0.69	1.25	
	Left Cheek	0.341	0.793	1.079	0.096	1.13	1.52	
	Left Tilted	0.186	0.732	1.133	0.096	0.92	1.42	
LTE Band 12 Ant 0	Right Cheek	0.245	0.447	0.816	0.096	0.69	1.16	
	Right Tilted	0.145	0.484	0.949	0.096	0.63	1.19	
	Left Cheek	0.229	0.793	1.079	0.096	1.02	1.40	
	Left Tilted	0.124	0.732	1.133	0.096	0.86	1.35	
LTE Band 13 Ant 0	Right Cheek	0.238	0.447	0.816	0.096	0.69	1.15	
	Right Tilted	0.172	0.484	0.949	0.096	0.66	1.22	
	Left Cheek	0.200	0.793	1.079	0.096	0.99	1.38	
	Left Tilted	0.140	0.732	1.133	0.096	0.87	1.37	
LTE Band 26 Ant 0	Right Cheek	0.305	0.447	0.816	0.096	0.75	1.22	
	Right Tilted	0.188	0.484	0.949	0.096	0.67	1.23	
	Left Cheek	0.275	0.793	1.079	0.096	1.07	1.45	
	Left Tilted	0.173	0.732	1.133	0.096	0.91	1.40	
LTE Band 66 Ant 0	Right Cheek	0.208	0.447	0.816	0.096	0.66	1.12	
	Right Tilted	0.103	0.484	0.949	0.096	0.59	1.15	
	Left Cheek	0.156	0.793	1.079	0.096	0.95	1.33	
	Left Tilted	0.124	0.732	1.133	0.096	0.86	1.35	
LTE Band 2 Ant 0	Right Cheek	0.221	0.447	0.816	0.096	0.67	1.13	
	Right Tilted	0.143	0.484	0.949	0.096	0.63	1.19	
	Left Cheek	0.150	0.793	1.079	0.096	0.94	1.33	
	Left Tilted	0.153	0.732	1.133	0.096	0.89	1.38	
LTE Band 7 Ant 1	Right Cheek	0.364	0.447	0.816	0.096	0.81	1.28	
	Right Tilted	0.308	0.484	0.949	0.096	0.79	1.35	
	Left Cheek	0.651	0.793	1.079	0.096	1.44	1.83	2
	Left Tilted	0.207	0.732	1.133	0.096	0.94	1.44	
LTE Band 41 Ant 1	Right Cheek	0.270	0.447	0.816	0.096	0.72	1.18	
	Right Tilted	0.163	0.484	0.949	0.096	0.65	1.21	
	Left Cheek	0.453	0.793	1.079	0.096	1.25	1.63	3
	Left Tilted	0.137	0.732	1.133	0.096	0.87	1.37	

16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	SPLSR
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 4 1g SAR (W/kg)	WLAN5GHz Ant 4 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
GSM850 Ant 0	Front	0.811	0.428	0.530	0.093	1.24	1.43	
	Back	1.433	0.965	1.171	0.164	2.40	2.77	5&39
	Left side	0.400	0.064	0.051	0.164	0.46	0.62	
	Right side	0.602	0.414	0.181	0.164	1.02	0.95	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.876				0.88	0.88	
GSM1900 Ant 0	Front	0.736	0.428	0.530	0.093	1.16	1.36	
	Back	1.298	0.965	1.171	0.164	2.26	2.63	40&41
	Left side	0.044	0.064	0.051	0.164	0.11	0.26	
	Right side	0.113	0.414	0.181	0.164	0.53	0.46	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	1.430				1.43	1.43	
WCDMA II Ant 0	Front	0.574	0.428	0.530	0.093	1.00	1.20	
	Back	0.971	0.965	1.171	0.164	1.94	2.31	42&43
	Left side	0.080	0.064	0.051	0.164	0.14	0.30	
	Right side	0.081	0.414	0.181	0.164	0.50	0.43	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	1.347				1.35	1.35	
WCDMA IV Ant 0	Front	0.612	0.428	0.530	0.093	1.04	1.24	
	Back	1.105	0.965	1.171	0.164	2.07	2.44	44&45
	Left side	0.029	0.064	0.051	0.164	0.09	0.24	
	Right side	0.098	0.414	0.181	0.164	0.51	0.44	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	1.308				1.31	1.31	
WCDMA V Ant 0	Front	0.636	0.428	0.530	0.093	1.06	1.26	
	Back	1.271	0.965	1.171	0.164	2.24	2.61	17&46
	Left side	0.335	0.064	0.051	0.164	0.40	0.55	
	Right side	0.540	0.414	0.181	0.164	0.95	0.89	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.667				0.67	0.67	
LTE Band 12 Ant 0	Front	0.321	0.428	0.530	0.093	0.75	0.94	
	Back	0.802	0.965	1.171	0.164	1.77	2.14	19&47
	Left side	0.297	0.064	0.051	0.164	0.36	0.51	
	Right side	0.524	0.414	0.181	0.164	0.94	0.87	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.519				0.52	0.52	
LTE Band 13 Ant 0	Front	0.338	0.428	0.530	0.093	0.77	0.96	
	Back	0.710	0.965	1.171	0.164	1.68	2.05	21&48
	Left side	0.234	0.064	0.051	0.164	0.30	0.45	
	Right side	0.459	0.414	0.181	0.164	0.87	0.80	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.661				0.66	0.66	
LTE Band 26 Ant 0	Front	0.564	0.428	0.530	0.093	0.99	1.19	
	Back	1.132	0.965	1.171	0.164	2.10	2.47	23&49
	Left side	0.297	0.064	0.051	0.164	0.36	0.51	
	Right side	0.470	0.414	0.181	0.164	0.88	0.82	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.632				0.63	0.63	



FCC SAR Test Report

Report No. : FA253103-01

LTE Band 66 Ant 0	Front	0.708	0.428	0.530	0.093	1.14	1.33	
	Back	1.197	0.965	1.171	0.164	2.16	2.53	50&51
	Left side	0.034	0.064	0.051	0.164	0.10	0.25	
	Right side	0.088	0.414	0.181	0.164	0.50	0.43	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	1.342				1.34	1.34	
LTE Band 2 Ant 0	Front	0.535	0.428	0.530	0.093	0.96	1.16	
	Back	0.863	0.965	1.171	0.164	1.83	2.20	52&53
	Left side	0.068	0.064	0.051	0.164	0.13	0.28	
	Right side	0.061	0.414	0.181	0.164	0.48	0.41	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	1.343				1.34	1.34	
LTE Band 7 Ant 1	Front	1.325	0.428	0.530	0.093	1.75	1.95	31&54
	Back	1.179	0.965	1.171	0.164	2.14	2.51	33&55
	Left side	0.545	0.064	0.051	0.164	0.61	0.76	
	Right side	0.088	0.414	0.181	0.164	0.50	0.43	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.851				0.85	0.85	
LTE Band 41 Ant 1	Front	1.307	0.428	0.530	0.093	1.74	1.93	35&56
	Back	1.195	0.965	1.171	0.164	2.16	2.53	37&57
	Left side	0.553	0.064	0.051	0.164	0.62	0.77	
	Right side	0.104	0.414	0.181	0.164	0.52	0.45	
	Top side		0.556	1.113	0.164	0.56	1.28	
	Bottom side	0.922				0.92	0.92	



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 4	WLAN5GHz Ant 4	Bluetooth Ant 4	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM850 Ant 0	Front	0.811	0.428	0.898	0.093	1.24	1.80	4
	Back	1.433	0.965	1.181	0.164	2.40	2.78	5&6
GSM1900 Ant 0	Front	0.775	0.428	0.898	0.093	1.20	1.77	7
	Back	1.348	0.965	1.181	0.164	2.31	2.69	8&9
WCDMA II Ant 0	Front	0.742	0.428	0.898	0.093	1.17	1.73	10
	Back	1.263	0.965	1.181	0.164	2.23	2.61	11&12
WCDMA IV Ant 0	Front	0.819	0.428	0.898	0.093	1.25	1.81	13
	Back	1.298	0.965	1.181	0.164	2.26	2.64	14&15
WCDMA V Ant 0	Front	0.636	0.428	0.898	0.093	1.06	1.63	16
	Back	1.271	0.965	1.181	0.164	2.24	2.62	17&18
LTE Band 12 Ant 0	Front	0.321	0.428	0.898	0.093	0.75	1.31	
	Back	0.802	0.965	1.181	0.164	1.77	2.15	19&20
LTE Band 13 Ant 0	Front	0.338	0.428	0.898	0.093	0.77	1.33	
	Back	0.710	0.965	1.181	0.164	1.68	2.06	21&22
LTE Band 26 Ant 0	Front	0.564	0.428	0.898	0.093	0.99	1.56	
	Back	1.132	0.965	1.181	0.164	2.10	2.48	23&24
LTE Band 66 Ant 0	Front	0.834	0.428	0.898	0.093	1.26	1.83	25
	Back	1.378	0.965	1.181	0.164	2.34	2.72	26&27
LTE Band 2 Ant 0	Front	0.934	0.428	0.898	0.093	1.36	1.93	28
	Back	1.423	0.965	1.181	0.164	2.39	2.77	29&30
LTE Band 7 Ant 1	Front	1.325	0.428	0.898	0.093	1.75	2.32	31&32
	Back	1.179	0.965	1.181	0.164	2.14	2.52	33&34
LTE Band 41 Ant 1	Front	1.307	0.428	0.898	0.093	1.74	2.30	35&36
	Back	1.195	0.965	1.181	0.164	2.16	2.54	37&38

<Sensor off>

WWAN Band	Exposure Position	1	2	3	4	1+2+4	1+3
		WWAN	WLAN5GHz Ant 4	WLAN2.4GHz Ant 4	Bluetooth Ant 4	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM850 Ant 0	Front	0.378	0.433	0.428	0.001	0.81	0.81
	Back	0.498	0.288	0.114	0.164	0.95	0.61
GSM1900 Ant 0	Front	0.610	0.433	0.428	0.001	1.04	1.04
	Back	0.422	0.288	0.114	0.164	0.87	0.54
WCDMA II Ant 0	Front	0.738	0.433	0.428	0.001	1.17	1.17
	Back	0.543	0.288	0.114	0.164	1.00	0.66
WCDMA IV Ant 0	Front	0.853	0.433	0.428	0.001	1.29	1.28
	Back	0.915	0.288	0.114	0.164	1.37	1.03
WCDMA V Ant 0	Front	0.309	0.433	0.428	0.001	0.74	0.74
	Back	0.373	0.288	0.114	0.164	0.83	0.49
LTE Band 66 Ant 0	Front	1.009	0.433	0.428	0.001	1.44	1.44
	Back	0.892	0.288	0.114	0.164	1.34	1.01
LTE Band 2 Ant 0	Front	1.151	0.433	0.428	0.001	1.59	1.58



	Front	0.558	0.288	0.114	0.164	1.01	0.67
LTE Band 7 Ant 1	Back	0.847	0.433	0.428	0.001	1.28	1.28
	Front	0.389	0.288	0.114	0.164	0.84	0.50
LTE Band 41 Ant 1	Back	0.715	0.433	0.428	0.001	1.15	1.14
	Front	0.198	0.288	0.114	0.164	0.65	0.31

16.4 Product Specific Exposure Conditions

Note: 1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.


WWAN Band	Exposure Position	1	3	4	1+3+4	SPLSR
		WWAN	WLAN5GHz Ant 4	NFC	Summed	
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
GSM850 Ant 0	Front		0.936	0.001	0.94	
	Back	2.632	1.705	0.028	4.37	58
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	1.433		0.001	1.43	
GSM1900 Ant 0	Front	2.190	0.936	0.001	3.13	
	Back	2.920	1.705	0.028	4.65	65
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	3.404		0.001	3.41	
WCDMA II Ant 0	Front	1.898	0.936	0.001	2.84	
	Back	2.792	1.705	0.028	4.53	59
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	3.211		0.001	3.21	
WCDMA IV Ant 0	Front	2.278	0.936	0.001	3.22	
	Back	2.943	1.705	0.028	4.68	60
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	3.360		0.001	3.36	
WCDMA V Ant 0	Front		0.936	0.001	0.94	
	Back	2.161	1.705	0.028	3.89	
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side			0.001	0.00	
LTE Band 66 Ant 0	Front	2.179	0.936	0.001	3.12	
	Back	2.807	1.705	0.028	4.54	61
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	3.275		0.001	3.28	
LTE Band 2 Ant 0	Front	1.913	0.936	0.001	2.85	
	Back	2.530	1.705	0.028	4.26	62
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	

	Bottom side	3.236		0.001	3.24	
LTE Band 7 Ant 1	Front	3.213	0.936	0.001	4.15	66
	Back	3.030	1.705	0.028	4.76	63
	Left side	1.358	0.107	0.001	1.47	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	1.858		0.001	1.86	
LTE Band 41 Ant 1	Front	3.008	0.936	0.001	3.95	
	Back	3.099	1.705	0.028	4.83	64
	Left side		0.107	0.001	0.11	
	Right side		0.229	0.001	0.23	
	Top side		2.204	0.001	2.21	
	Bottom side	1.966		0.001	1.97	


16.5 SPLSR Evaluation and Analysis

General Note:


1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

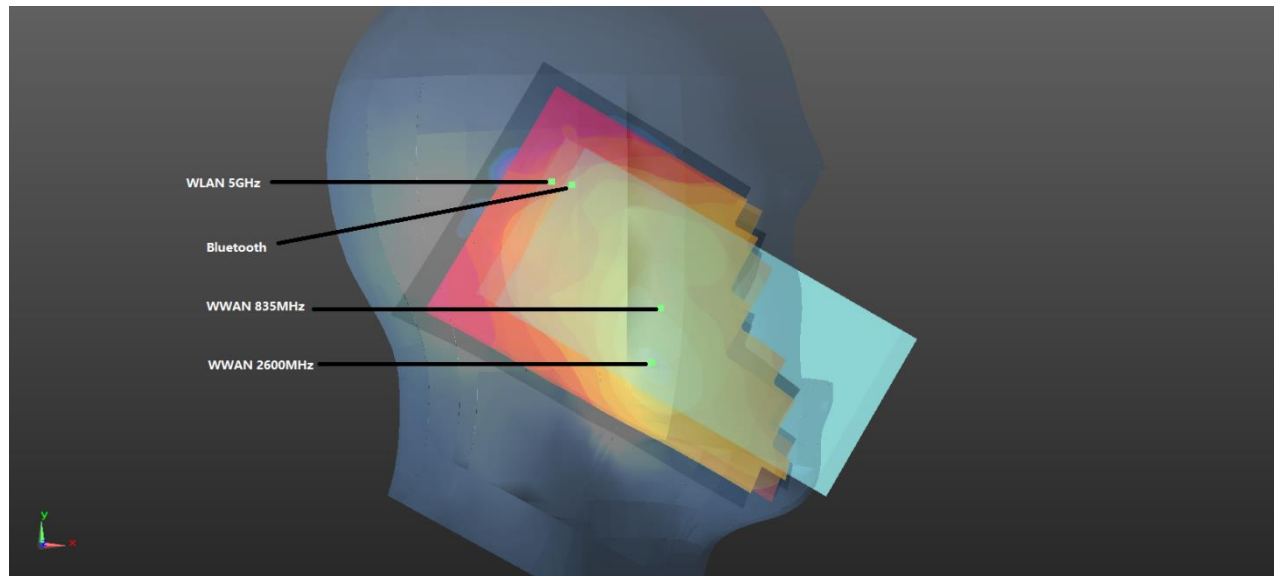


WWAN+ WLAN 5GHz+Bluetooth_Left Cheek 0mm

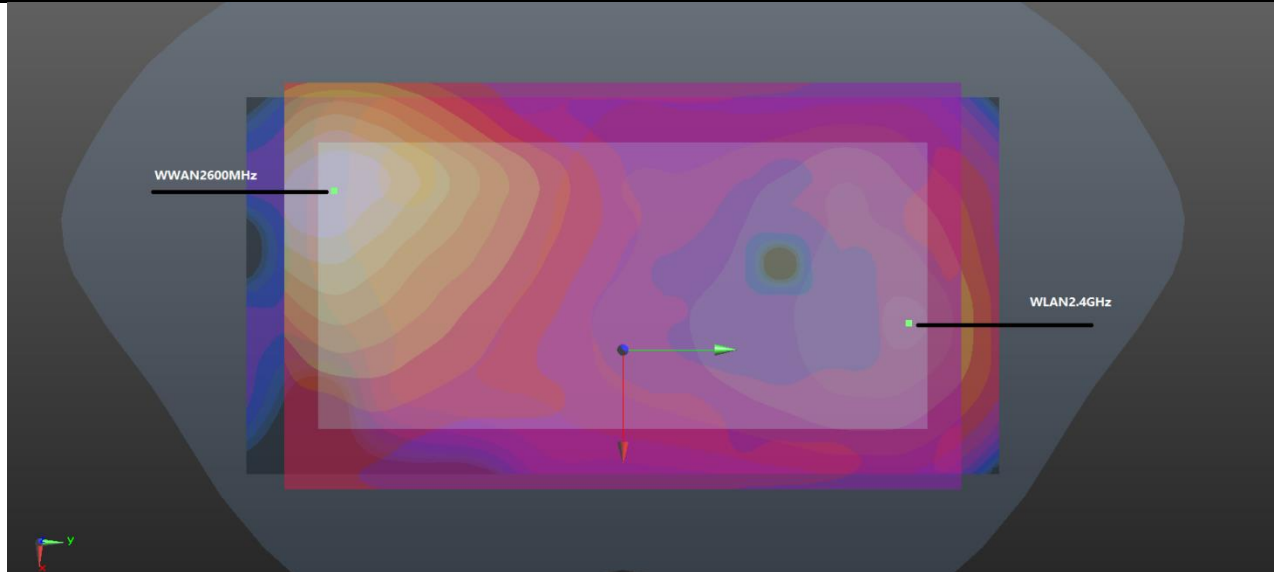


WWAN+ WLAN 2.4GHz_Front 5mm

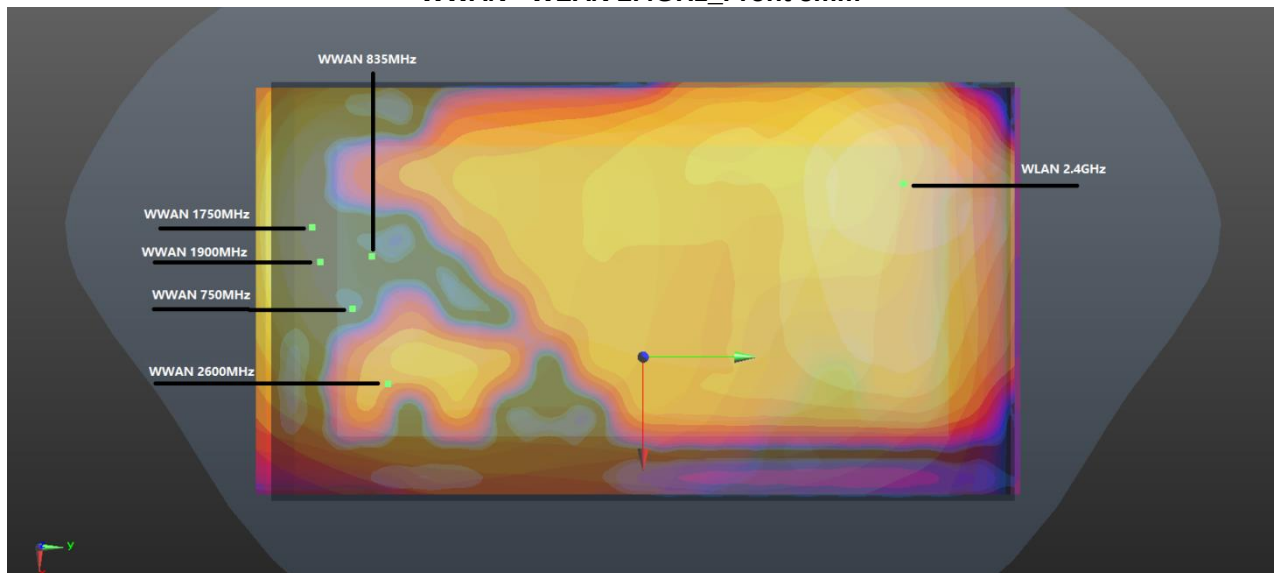


WWAN+ WLAN 2.4GHz_Back 5mm

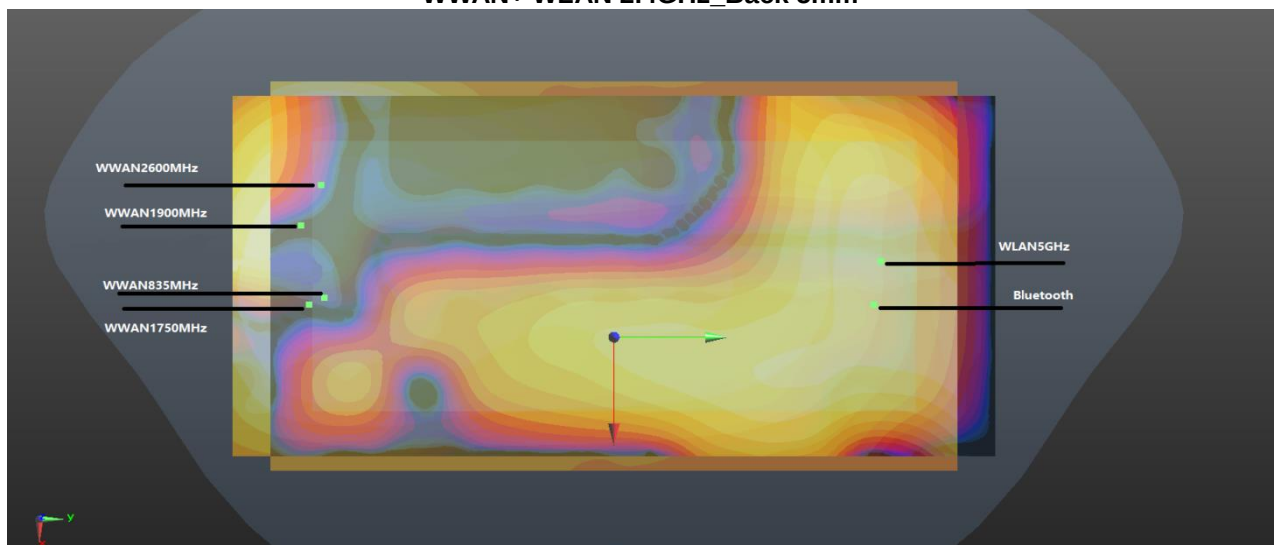


WWAN+ WLAN 5GHz+Bluetooth_Front 5mm

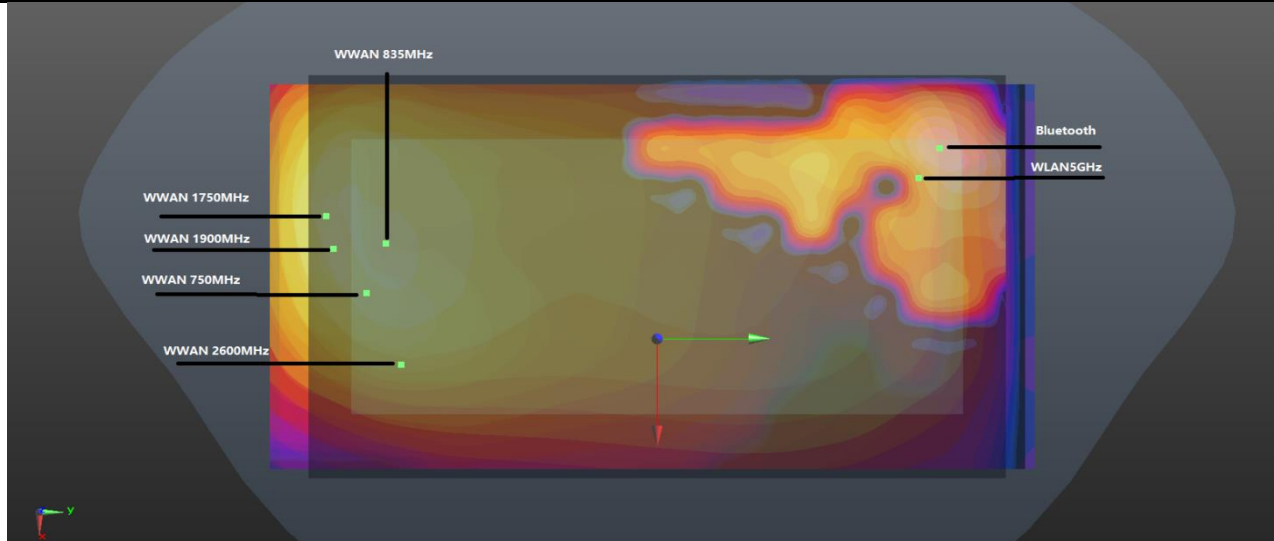

WWAN+ WLAN 5GHz+Bluetooth_Back 5mm

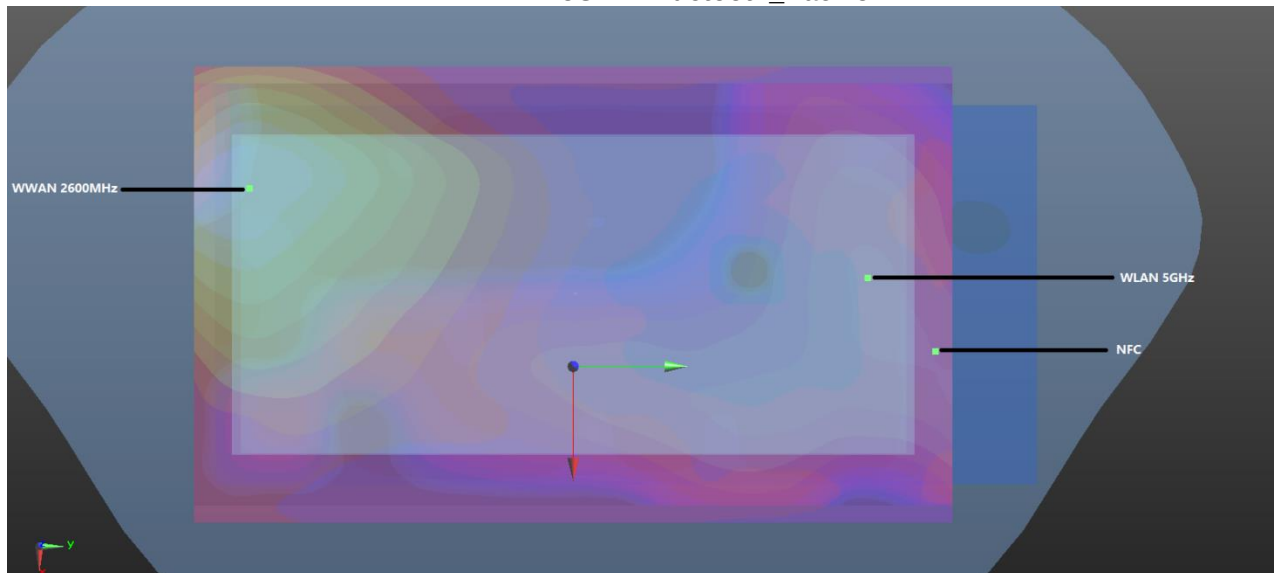

WWAN+ WLAN 5GHz + NFC_Front 0mm

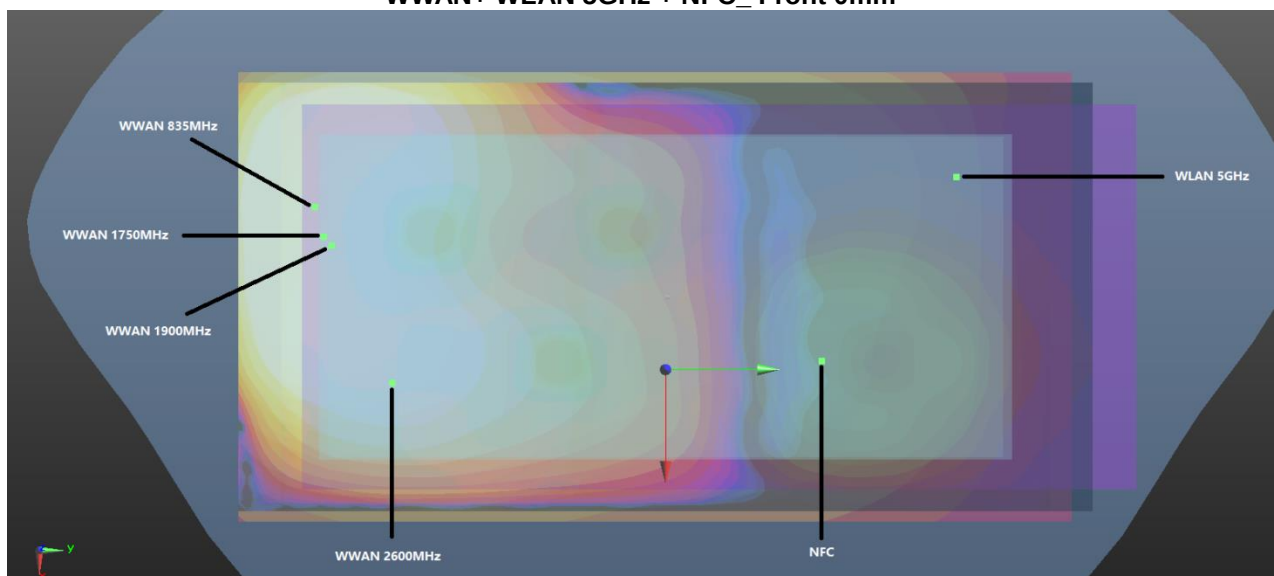

WWAN+ WLAN 5GHz + NFC_Back 0mm

<For Head>

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	Bluetooth Ant 4	Left Cheek	0.096	0	7.01	16.49	-0.16	68.9	1.66	0.03	Not required
	WLAN5GHz Ant 4		1.079	0	2.32	14.83	0.01				
	GSM850 Ant 0		0.483	0	46.85	-39.67	-0.87				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 2	Bluetooth Ant 4	Left Cheek	0.096	0	7.01	16.49	-0.16	84.6	1.83	0.03	Not required
	WLAN5GHz Ant 4		1.079	0	2.32	14.83	0.01				
	LTE Band 7 Ant 1		0.651	0	44.26	-59.42	0.68				
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 3	Bluetooth Ant 4	Left Cheek	0.096	0	7.01	16.49	-0.16	84.4	1.63	0.02	Not required
	WLAN5GHz Ant 4		1.079	0	2.32	14.83	0.01				
	LTE Band 41 Ant 1		0.453	0	44.08	-59.3	0.63				

<For Hotspot>

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	GSM850 Ant 0	Back	1.433	5	-15.4	-76.4	0.97	144.5	2.40	0.03	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 39	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 39	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	144.7	2.77	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	GSM850 Ant 0		1.433	5	-15.4	-76.4	0.97				
Case 40	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 40	GSM1900 Ant 0	Back	1.298	5	-1.1	-80.3	1.09	150.6	2.26	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 41	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 41	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	144.7	2.63	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	GSM1900 Ant 0		1.298	5	-15.4	-76.4	0.97				
Case 42	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 42	WCDMA II Ant 0	Back	0.971	5	-1.1	-84	1.29	154.2	1.94	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 43	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 43	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	154.3	2.31	0.02	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	WCDMA II Ant 0		0.971	5	-1.1	-84	1.29				
Case 44	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 44	WCDMA IV Ant 0	Back	1.105	5	-14.9	-83.9	1.24	152.0	2.07	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 45	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					X	Y	Z				
Case 45	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	152.2	2.44	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	WCDMA IV Ant 0		1.105	5	-14.9	-83.9	1.24				



FCC SAR Test Report

Report No. : FA253103-01

Case	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
Case 17	WCDMA V Ant 0	Back	1.271	5	-13.8	-79.6	1.18	147.9	2.24	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 46	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	148.0	2.61	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	WCDMA V Ant 0		1.271	5	-13.8	-79.6	1.18				
Case 19	LTE Band 12 Ant 0	Back	0.802	5	-3.5	-81.4	1.28	151.2	1.77	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 47	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.3	2.14	0.02	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	LTE Band 12 Ant 0		0.802	5	-3.5	-81.4	1.28				
Case 21	LTE Band 13 Ant 0	Back	0.71	5	-9	-82	1.14	150.9	1.68	0.01	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 48	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.0	2.05	0.02	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	LTE Band 13 Ant 0		0.71	5	-9	-82	1.14				
Case 23	LTE Band 26 Ant 0	Back	1.132	5	-7.5	-82	1.18	151.1	2.10	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 49	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.2	2.47	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	LTE Band 26 Ant 0		1.132	5	-7.5	-82	1.18				
Case 50	LTE Band 66 Ant 0	Back	1.197	5	-16.6	-89.4	1.22	157.3	2.16	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 51	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	157.5	2.53	0.03	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	LTE Band 66 Ant 0		1.197	5	-16.6	-89.4	1.22				
Case 52	LTE Band 2 Ant 0	Back	0.863	5	1.2	-86.7	1.24	157.4	1.83	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 53	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	157.4	2.20	0.02	Not required
	WLAN5GHz Ant 4		1.171	5	-31.8	73.8	0.97				
	LTE Band 2 Ant 0		0.863	5	1.2	-86.7	1.24				
Case 31	Band	Position	SAR	Gap	SAR peak location (mm)			3D	Summed	SPLSR	Simultaneous

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AF8

Page 75 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

			(W/kg)	(mm)	X	Y	Z	distance (mm)	SAR (W/kg)		
	LTE Band 7 Ant 1	Front	1.325	5	-29.2	-83.8	1.28	95.7	1.75	0.02	Not required
	WLAN2.4GHz Ant 4	Front	0.428	5	-0.7	7.6	1.46				
Case 54	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	94.8	1.95	0.03	Not required
	WLAN5GHz Ant 4	Front	0.53	5	-2.1	7	1.11				
	LTE Band 7 Ant 1	Front	1.325	5	-29.2	-83.8	1.28				
Case 33	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Back	1.179	5	-29.2	-83.8	1.28	151.0	2.14	0.02	Not required
	WLAN2.4GHz Ant 4	Back	0.965	5	-31.6	67.2	0.97				
Case 55	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.3	2.51	0.03	Not required
	WLAN5GHz Ant 4	Back	1.171	5	-31.8	73.8	0.97				
	LTE Band 7 Ant 1	Back	1.179	5	-29.2	-83.8	1.28				
Case 35	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Front	1.307	5	29.8	-106	1.69	186.1	1.74	0.01	Not required
	WLAN2.4GHz Ant 4	Front	0.428	5	-7	76	14.6				
Case 56	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	117.4	1.93	0.02	Not required
	WLAN5GHz Ant 4	Front	0.53	5	-2.1	7	1.11				
	LTE Band 41 Ant 1	Front	1.307	5	29.8	-106	1.69				
Case 37	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Back	1.195	5	25.4	-78.3	0.99	156.3	2.16	0.02	Not required
	WLAN2.4GHz Ant 4	Back	0.965	5	-31.6	67.2	0.97				
Case 57	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	156.0	2.53	0.03	Not required
	WLAN5GHz Ant 4	Back	1.171	5	-31.8	73.8	0.97				
	LTE Band 41 Ant 1	Back	1.195	5	25.4	-78.3	0.99				

<For Body-worn>

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 4	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	144.5	1.80	0.02	Not required
	WLAN5GHz Ant 4	Front	0.898	5	-21	70	11.1				
	GSM850 Ant 0	Front	0.811	5	-11	-76	13.7				
Case 5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850 Ant 0	Back	1.433	5	-15.4	-76.4	0.97	144.5	2.40	0.03	Not required
	WLAN2.4GHz Ant 4	Back	0.965	5	-31.6	67.2	0.97				
Case 6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	144.7	2.78	0.03	Not required
	WLAN5GHz Ant 4	Back	1.181	5	-31.8	73.8	0.97				
	GSM850 Ant 0	Back	1.433	5	-15.4	-76.4	0.97				
Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	152.3	1.77	0.02	Not required
	WLAN5GHz Ant 4	Front	0.898	5	-21	70	11.1				

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AF8

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

	GSM1900 Ant 0		0.775	5	-31	-82	15.5				
Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900 Ant 0	Back	1.348	5	-1.1	-80.3	1.09	150.6	2.31	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	150.6	2.69	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	GSM1900 Ant 0		1.348	5	-1.1	-80.3	1.09				
Case 10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	147.6	1.73	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	WCDMA II Ant 0		0.742	5	-27	-78	13.4				
Case 11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II Ant 0	Back	1.263	5	-1.1	-84	1.29	154.2	2.23	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	154.3	2.61	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	WCDMA II Ant 0		1.263	5	-1.1	-84	1.29				
Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	148.8	1.81	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	WCDMA IV Ant 0		0.819	5	-0.9	-80	13.9				
Case 14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV Ant 0	Back	1.298	5	-14.9	-83.9	1.24	152.0	2.26	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	152.2	2.64	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	WCDMA IV Ant 0		1.298	5	-14.9	-83.9	1.24				
Case 16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	144.5	1.63	0.01	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	WCDMA V Ant 0		0.636	5	-11	-76	12.6				
Case 17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V Ant 0	Back	1.271	5	-13.8	-79.6	1.18	147.9	2.24	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	148.0	2.62	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	WCDMA V Ant 0		1.271	5	-13.8	-79.6	1.18				
Case 19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 12 Ant 0	Back	0.802	5	-3.5	-81.4	1.28	151.2	1.77	0.02	Not required

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AF8

Page 77 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.3	2.15	0.02	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 12 Ant 0		0.802	5	-3.5	-81.4	1.28				
Case 21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 13 Ant 0	Back	0.71	5	-9	-82	1.14	150.9	1.68	0.01	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.0	2.06	0.02	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 13 Ant 0		0.71	5	-9	-82	1.14				
Case 23	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 26 Ant 0	Back	1.132	5	-7.5	-82	1.18	151.1	2.10	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 24	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.2	2.48	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 26 Ant 0		1.132	5	-7.5	-82	1.18				
Case 25	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	150.4	1.83	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	LTE Band 66 Ant 0		0.834	5	-9	-82	12.2				
Case 26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 66 Ant 0	Back	1.378	5	-16.6	-89.4	1.22	157.3	2.34	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 27	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	157.5	2.72	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 66 Ant 0		1.378	5	-16.6	-89.4	1.22				
Case 28	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	147.4	1.93	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	LTE Band 2 Ant 0		0.934	5	-25	-78	13.3				
Case 29	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2 Ant 0	Back	1.423	5	1.2	-86.7	1.24	157.4	2.39	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 30	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	157.4	2.77	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 2 Ant 0		1.423	5	1.2	-86.7	1.24				
Case 31	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Front	1.325	5	1.2	-86.7	1.24	163.5	1.75	0.01	Not required

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AF8

Page 78 of 83

Issued Date : Aug. 01, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA253103-01

	WLAN2.4GHz Ant 4		0.428	5	-7	76	14.6				
Case 32	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	155.0	2.32	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	LTE Band 7 Ant 1		1.325	5	1.2	-86.7	1.24				
Case 33	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Back	1.179	5	-29.2	-83.8	1.28	151.0	2.14	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 34	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	151.3	2.52	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 7 Ant 1		1.179	5	-29.2	-83.8	1.28				
Case 35	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Front	1.307	5	29.8	-106	1.69	186.1	1.74	0.01	Not required
	WLAN2.4GHz Ant 4		0.428	5	-7	76	14.6				
Case 36	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Front	0.093	5	-9	68	1.3	178.3	2.30	0.02	Not required
	WLAN5GHz Ant 4		0.898	5	-21	70	11.1				
	LTE Band 41 Ant 1		1.307	5	29.8	-106	1.69				
Case 37	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Back	1.195	5	25.4	-78.3	0.99	156.3	2.16	0.02	Not required
	WLAN2.4GHz Ant 4		0.965	5	-31.6	67.2	0.97				
Case 38	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Bluetooth Ant 4	Back	0.164	5	-30.2	67.5	1.06	156.0	2.54	0.03	Not required
	WLAN5GHz Ant 4		1.181	5	-31.8	73.8	0.97				
	LTE Band 41 Ant 1		1.195	5	25.4	-78.3	0.99				

<For Product Specific 10g>

	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
	Case 58	GSM850 Ant 0	Back	2.632	0	-39.5	-80.5	0.5	146.6	4.34	0.06
WLAN5GHz Ant 4	1.705	0		-45	66	0.36					
	GSM850 Ant 0	Back	2.632	0	-10.7	-78.2	1.07	121.6	2.66	0.04	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
Case 59	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II Ant 0	Back	2.792	0	-29	-78	-0.48	144.9	4.50	0.07	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	WCDMA II Ant 0	Back	2.792	0	-29	-78	-0.48	127.9	2.82	0.04	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
NFC Ant 5	0.028		0	24.6	38.1	-1.95					
Case 60	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV Ant 0	Back	2.943	0	-31	-80	-0.38	146.7	4.65	0.07	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	WCDMA IV Ant 0	Back	2.943	0	-31	-80	-0.38	130.5	2.97	0.04	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
NFC Ant 5	0.028		0	24.6	38.1	-1.95					
Case 61	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66 Ant 0	Back	2.807	0	33	-86	0.41	170.8	4.51	0.06	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	LTE Band 66 Ant 0	Back	2.807	0	33	-86	0.41	124.4	2.84	0.04	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
NFC Ant 5	0.028		0	24.6	38.1	-1.95					
Case 62	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2 Ant 0	Back	2.53	0	-29	-78	0.38	144.9	4.24	0.06	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	LTE Band 2 Ant 0	Back	2.53	0	-29	-78	0.38	127.9	2.56	0.03	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
NFC Ant 5	0.028		0	24.6	38.1	-1.95					
Case 63	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7 Ant 0	Back	3.03	0	30	-64	0.42	150.1	4.74	0.07	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	LTE Band 7 Ant 0	Back	3.03	0	30	-64	0.42	102.3	3.06	0.05	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required	
NFC Ant 5		0.028	0	24.6	38.1	-1.95					
Case 64	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41 Ant 0	Back	3.099	0	-27	-78	0.28	145.1	4.80	0.07	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	LTE Band 41 Ant 0	Back	3.099	0	-27	-78	0.28	127.1	3.13	0.04	Not required
NFC Ant 5	0.028		0	24.6	38.1	-1.95					

	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
Case 65	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900 Ant 0	Back	2.92	0	-38.4	-85.5	0.49	151.6	4.63	0.07	Not required
	WLAN5GHz Ant 4		1.705	0	-45	66	0.36				
	GSM1900 Ant 0	Back	2.92	0	-38.4	-85.5	0.49	138.8	2.95	0.04	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
	WLAN5GHz Ant 4	Back	1.705	0	-45	66	0.36	75.0	1.73	0.03	Not required
	NFC Ant 5		0.028	0	24.6	38.1	-1.95				
Case 66	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Front	3.213	0	-29.5	-83.6	1.29	94.8	4.15	0.09	Not required
	WLAN5GHz Ant 4		0.936	0	-2.2	7.2	1.1				
	LTE Band 7 Ant 1	Front	3.213	0	-29.5	-83.6	1.29	162.9	3.21	0.04	Not required
	NFC Ant 5		0.001	0	19.9	71.6	-2.01				
	WLAN5GHz Ant 4	Front	0.936	0	-2.2	7.2	1.1	68.2	0.94	0.01	Not required
	NFC Ant 5		0.001	0	19.9	71.6	-2.01				

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D04 v01, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Nov 2021
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----