


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_ble2M_2440MHz
test by :Neko

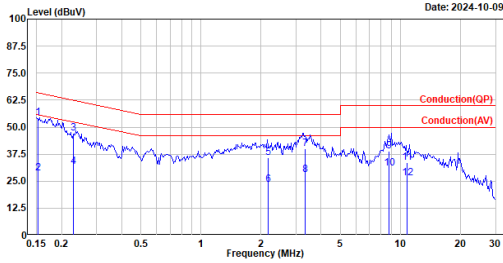

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.152	54.16	65.87	-11.71	44.48	9.68	QP
2	0.152	28.63	55.87	-27.24	18.95	9.68	Average
3	0.230	47.26	62.45	-15.19	37.58	9.68	QP
4	0.230	31.76	52.45	-20.69	22.08	9.68	Average
5	2.174	35.70	56.00	-20.30	25.82	9.88	QP
6	2.174	23.44	46.00	-22.56	13.56	9.88	Average
7	3.343	40.16	56.00	-15.84	29.88	10.28	QP
8	3.343	27.99	46.00	-18.01	17.71	10.28	Average
9	8.772	38.74	60.00	-21.26	27.93	10.81	QP
10	8.772	31.11	50.00	-18.89	20.30	10.81	Average
11	10.793	33.77	60.00	-26.23	22.98	10.79	QP
12	10.793	26.58	50.00	-23.42	15.79	10.79	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_ble2M_2440MHz
test by :Neko

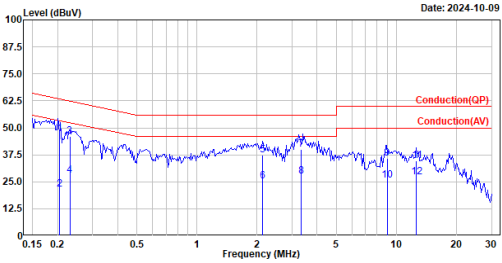


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.205	46.99	63.40	-16.41	37.33	9.66	QP
2	0.205	21.34	53.40	-32.06	11.68	9.66	Average
3	0.231	46.15	62.43	-16.28	36.49	9.66	QP
4	0.231	27.95	52.43	-24.48	18.29	9.66	Average
5	2.126	37.41	56.00	-18.59	27.57	9.84	QP
6	2.126	25.32	46.00	-20.68	15.48	9.84	Average
7	3.343	40.00	56.00	-16.00	29.74	10.26	QP
8	3.343	27.40	46.00	-18.60	17.14	10.26	Average
9	8.971	35.90	60.00	-24.10	25.11	10.79	QP
10	8.971	25.77	50.00	-24.23	14.98	10.79	Average
11	12.611	34.64	60.00	-25.36	23.82	10.82	QP
12	12.611	26.99	50.00	-23.01	16.17	10.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.66	0.50	Pass
	2440	0.66	0.50	Pass
	2480	0.66	0.50	Pass
GFSK (2Mbps)	2402	1.14	0.50	Pass
	2440	1.15	0.50	Pass
	2480	1.15	0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

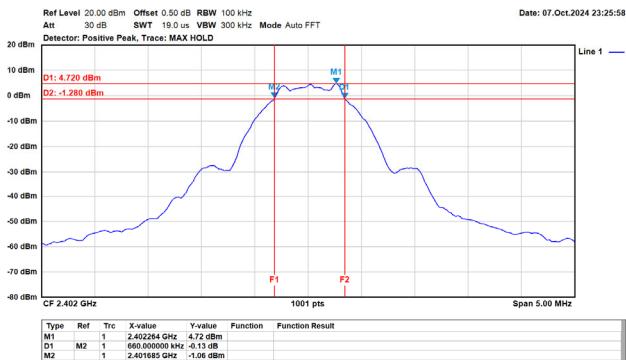


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

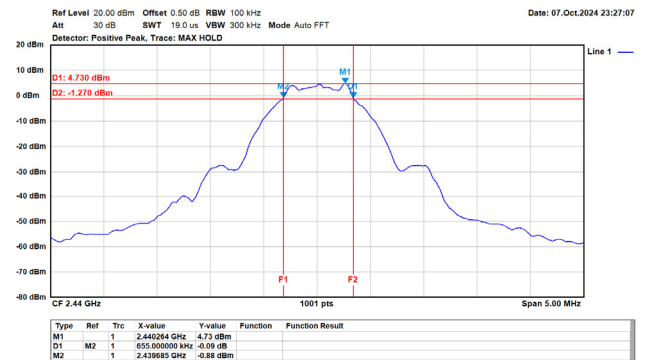


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

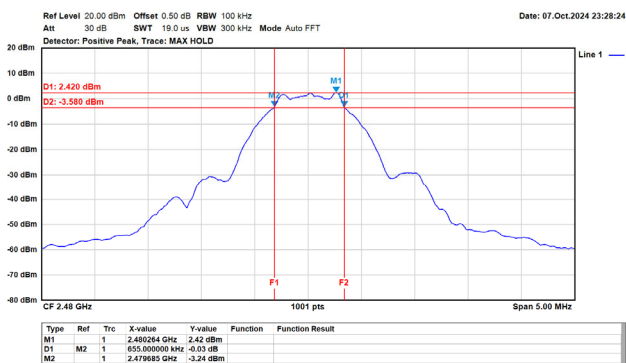


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

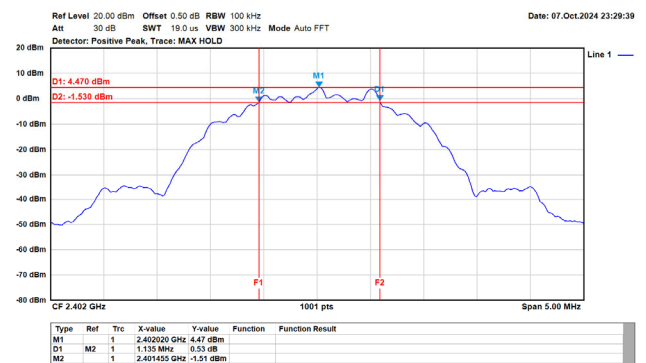

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

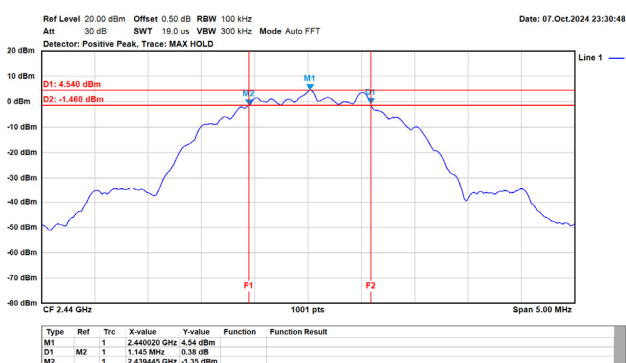

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

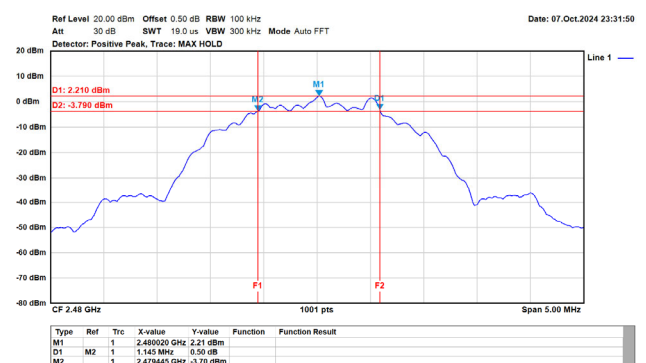


Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	6.68	30.00	Pass
	2440	6.67	30.00	Pass
	2480	4.60	30.00	Pass
GFSK (2Mbps)	2402	6.65	30.00	Pass
	2440	6.51	30.00	Pass
	2480	4.58	30.00	Pass

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
GFSK (1Mbps)	2402	-11.82	8.00	Pass
	2440	-11.77	8.00	Pass
	2480	-14.10	8.00	Pass
GFSK (2Mbps)	2402	-14.40	8.00	Pass
	2440	-14.34	8.00	Pass
	2480	-16.64	8.00	Pass

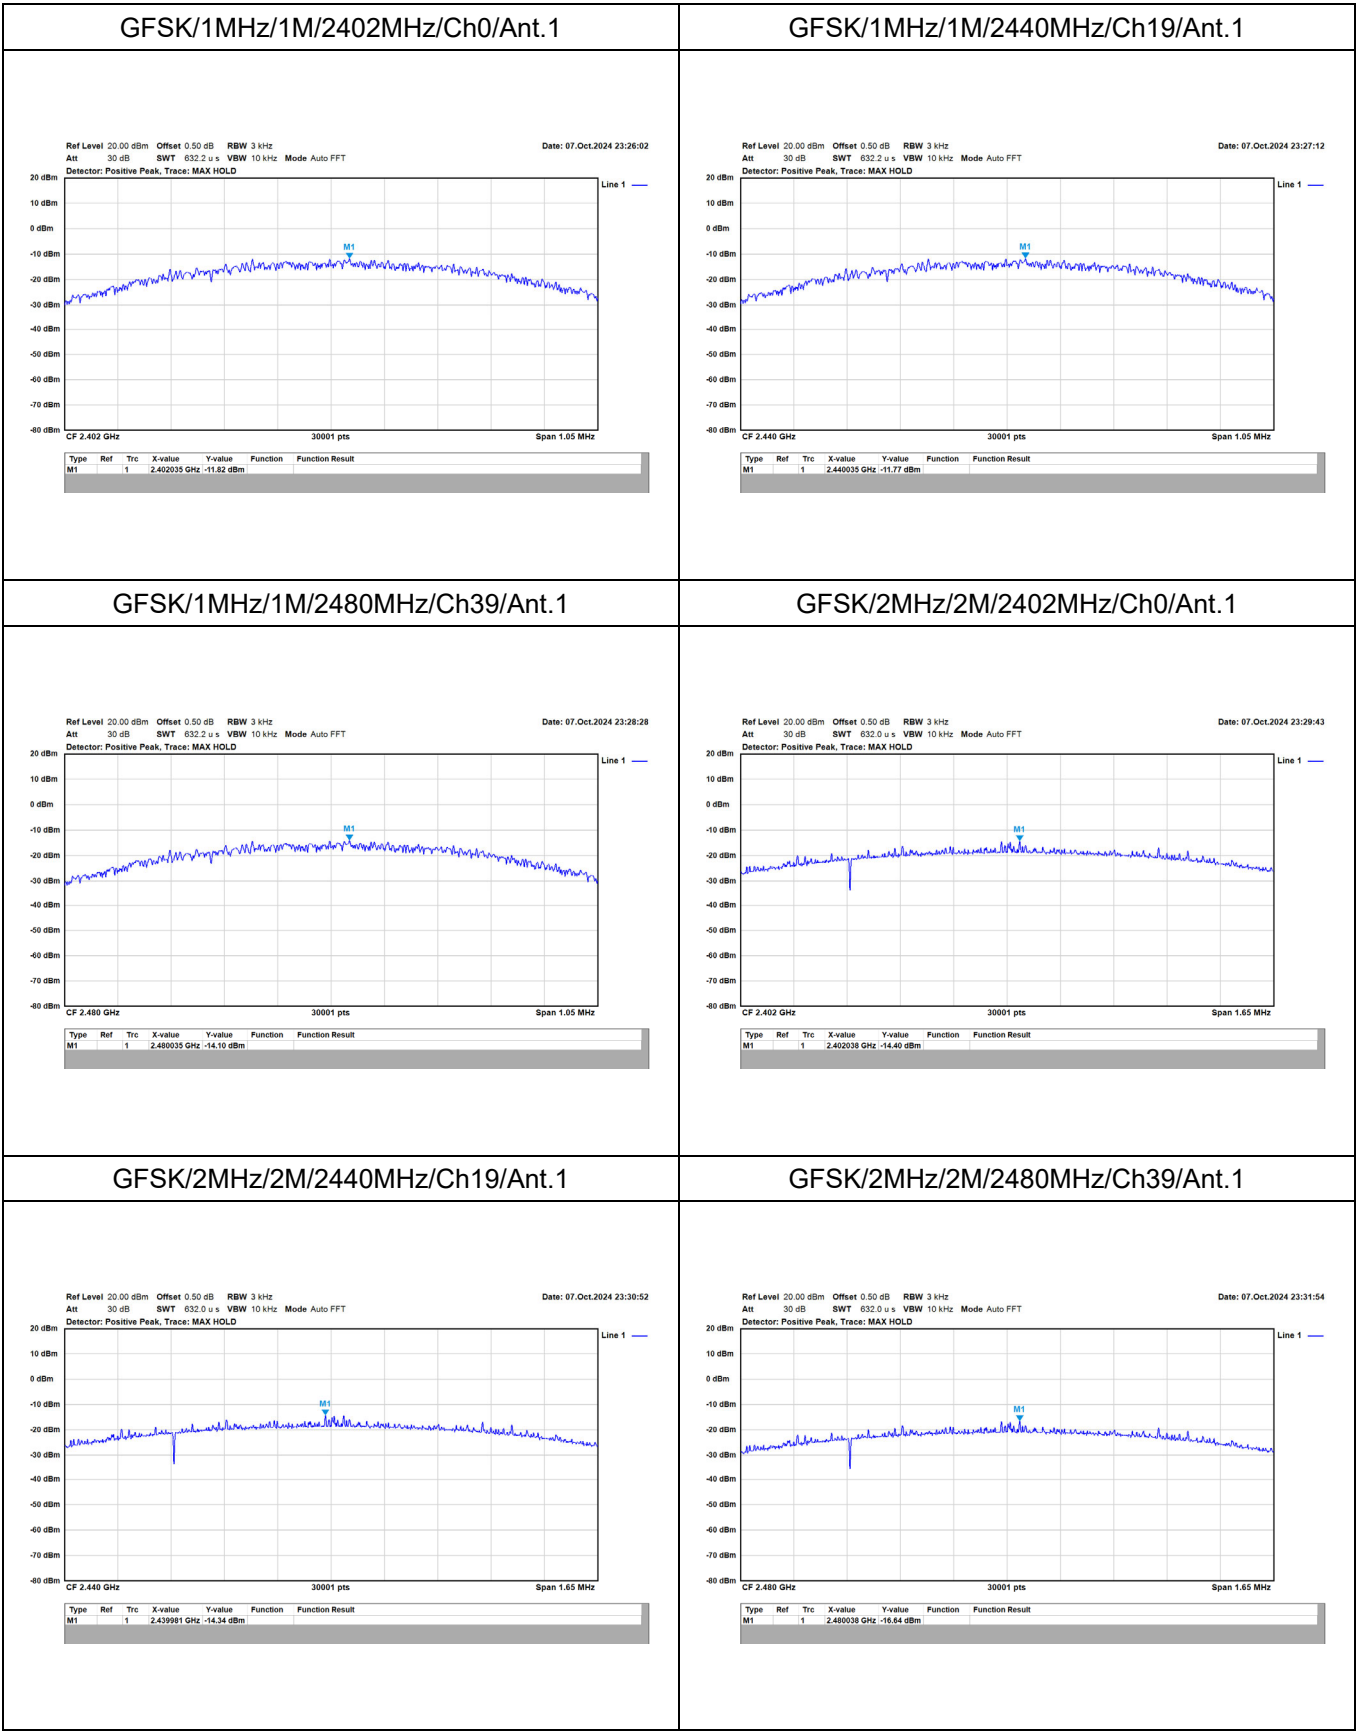


Appendix E. Test Result of Antenna Port Conducted Emission

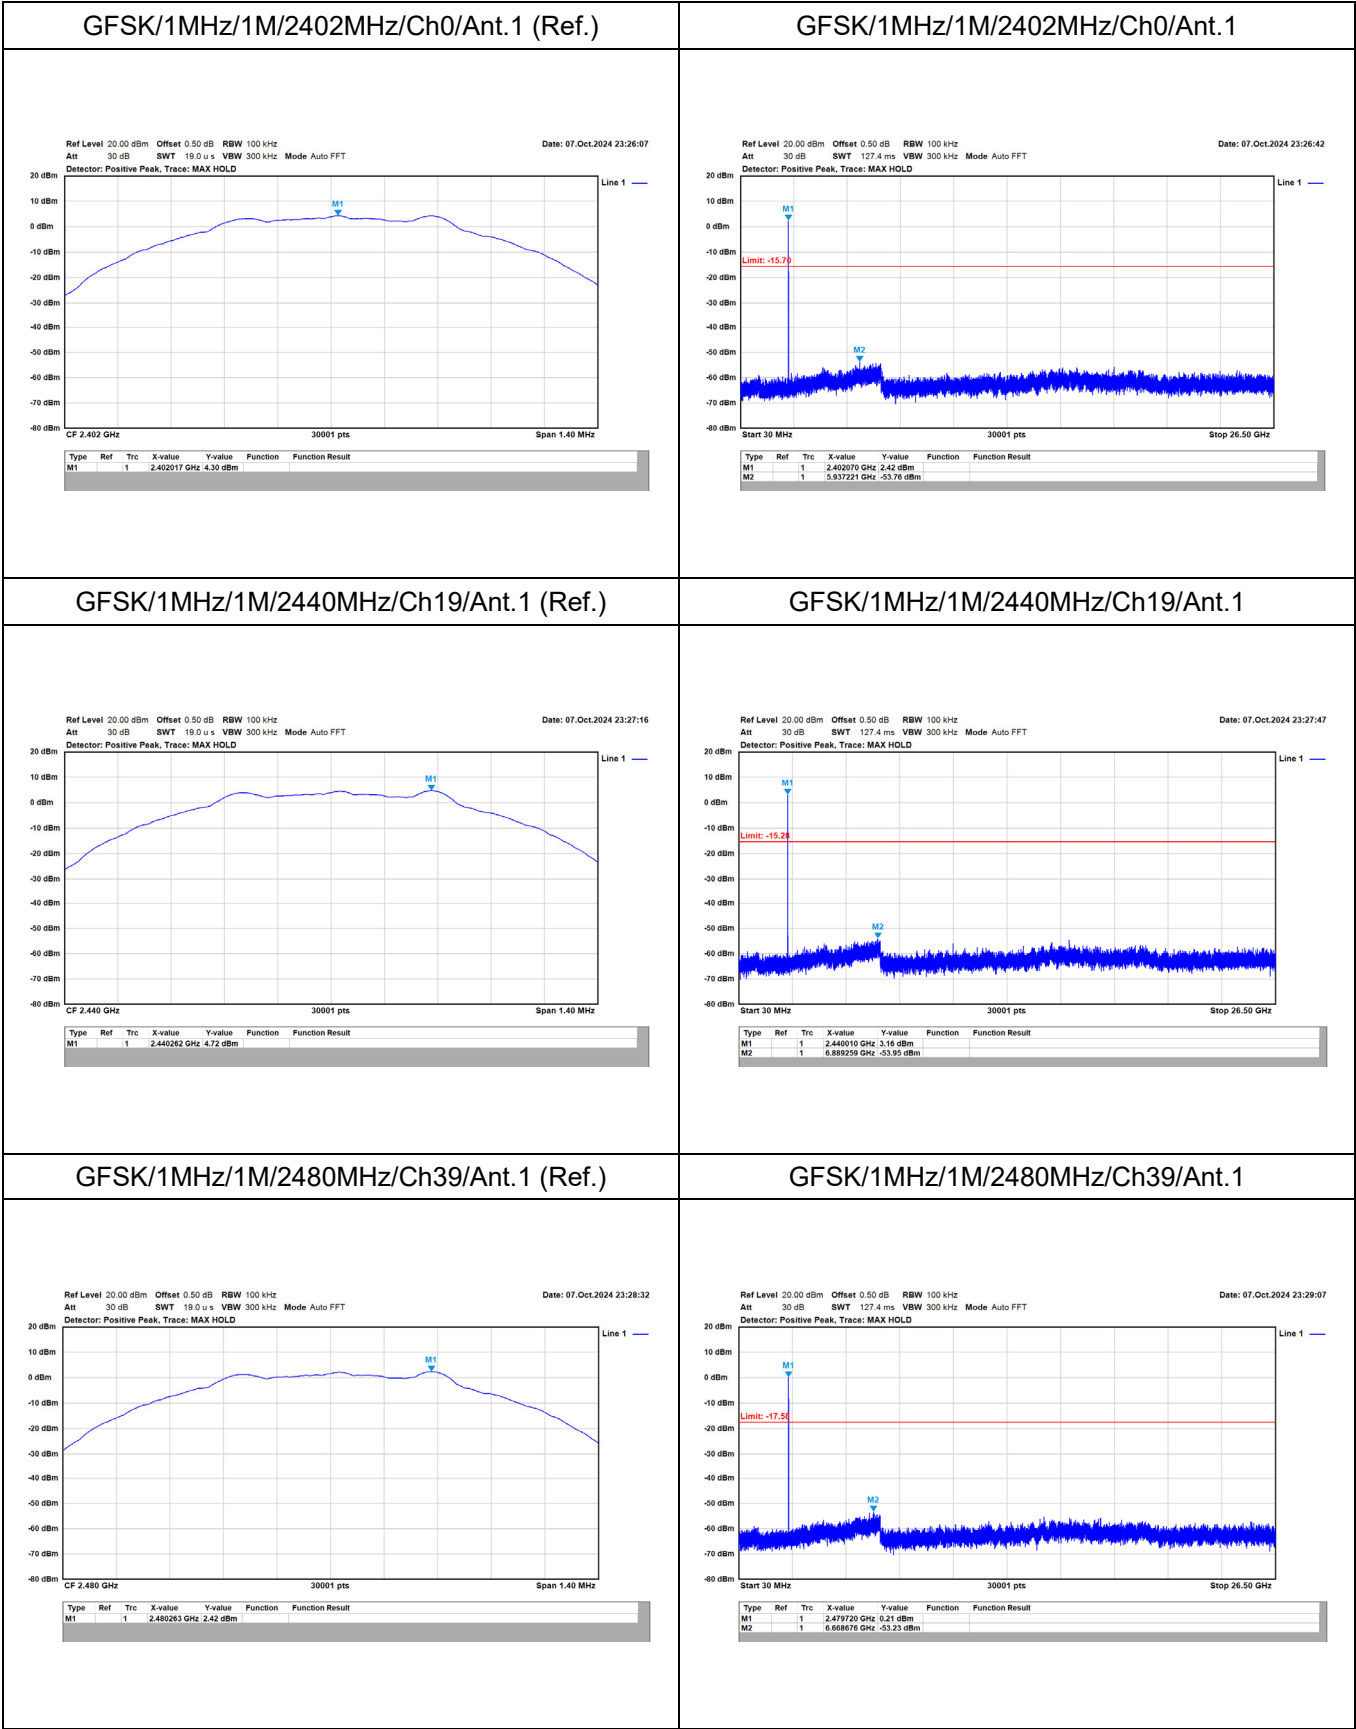


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1 (Ref.)

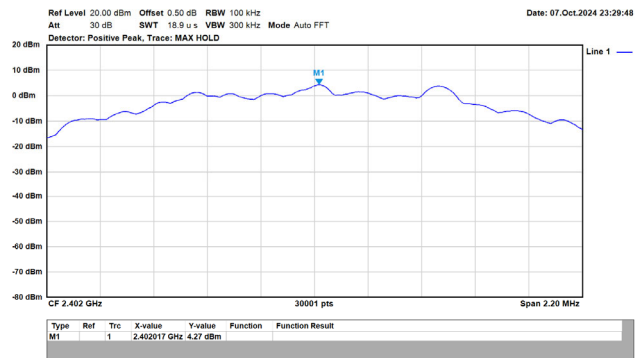


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

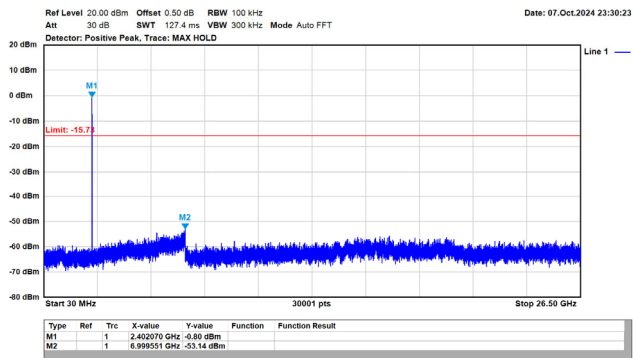


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1 (Ref.)

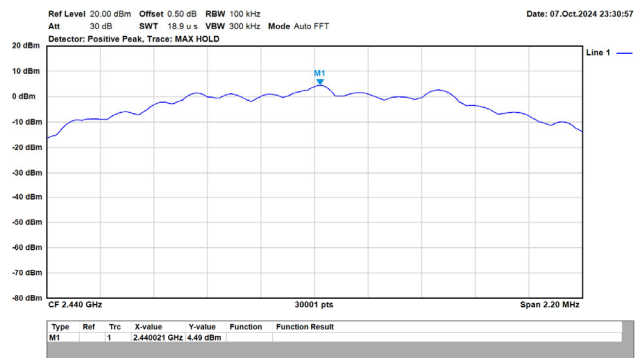


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

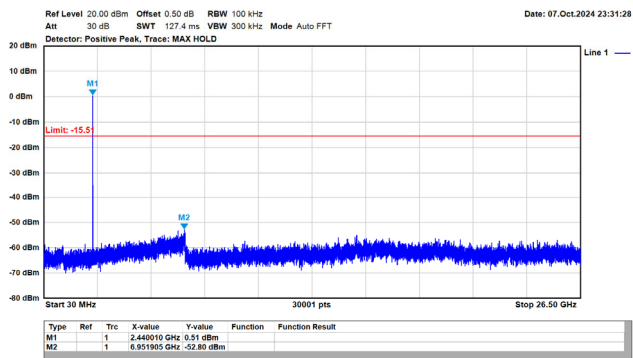

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1 (Ref.)

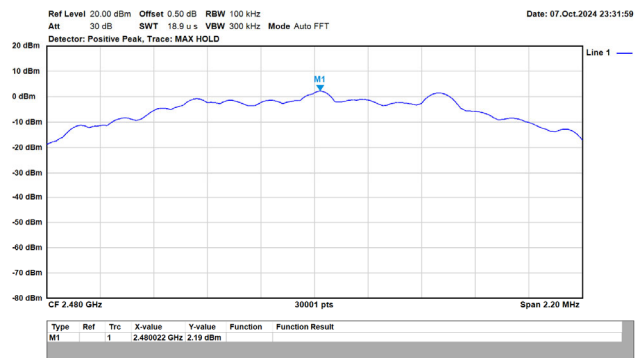

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

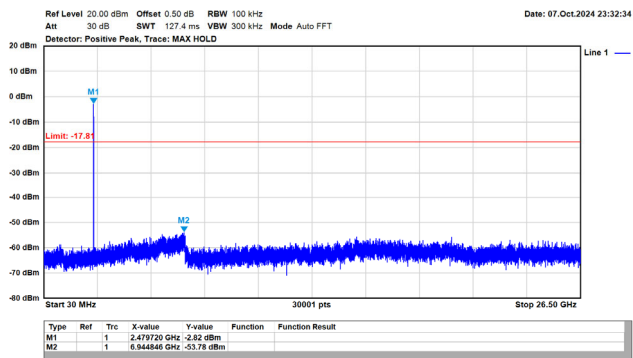


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS



Appendix F. Test Result of Radiated Emission

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

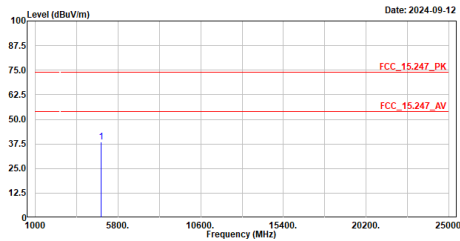


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4884.000	38.68	74.00	-35.32	52.90	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

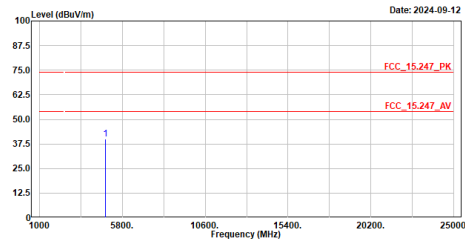


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4884.000	40.00	74.00	-34.00	54.22	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2440MHz
Test BY :Bob

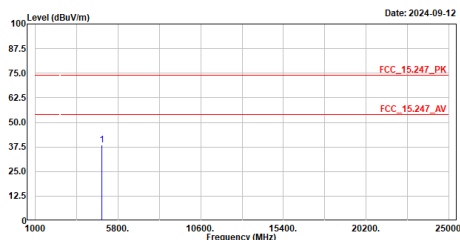


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	38.50	74.00	-35.50	52.26	-13.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2440MHz
Test BY :Bob

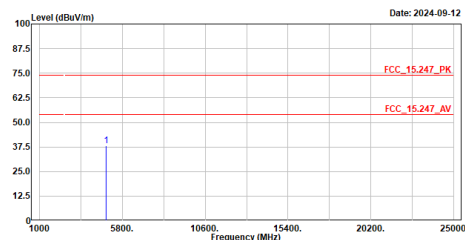


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	38.17	74.00	-35.83	51.93	-13.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Bob

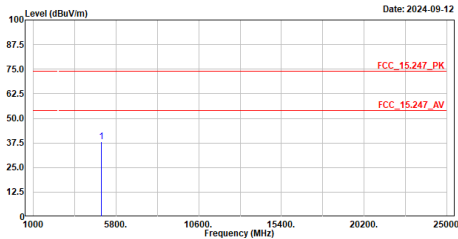

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.19	74.00	-35.81	51.36	-13.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Bob

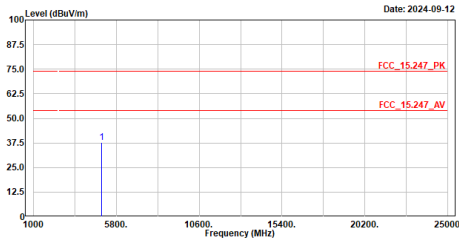

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	37.79	74.00	-36.21	50.96	-13.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble2M_2402MHz
Test BY :Bob

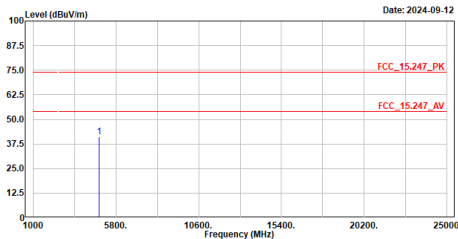

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	40.98	74.00	-33.02	55.20	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble2M_2402MHz
Test BY :Bob

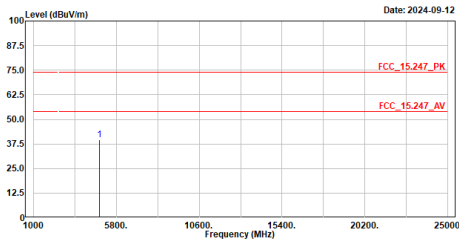

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	39.45	74.00	-34.55	53.67	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble2M_2440MHz
Test BY :Bob

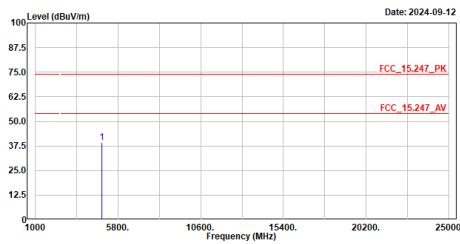


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	39.31	74.00	-34.69	53.07	-13.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble2M_2440MHz
Test BY :Bob

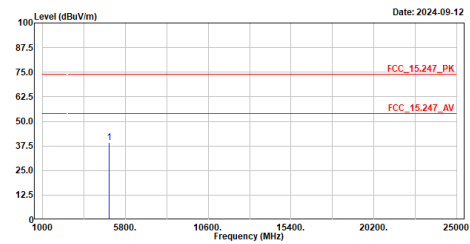


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	39.18	74.00	-34.82	52.94	-13.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble2M_2480MHz
Test BY :Bob

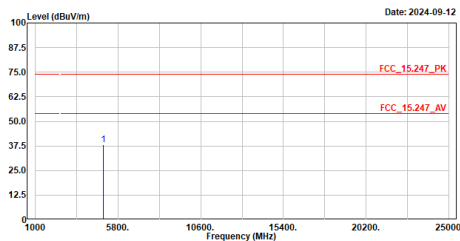


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	37.94	74.00	-36.06	51.11	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble2M_2480MHz
Test BY :Bob

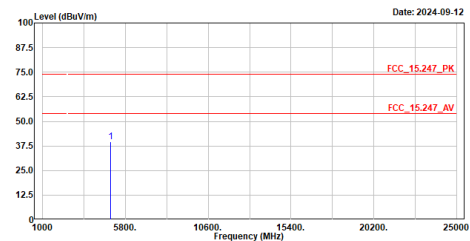


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	39.63	74.00	-34.37	52.80	-13.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ble2M_2440MHz
Test BY :Ashton

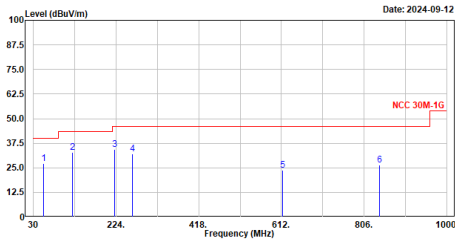

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	53.280	27.33	40.00	-12.67	50.71	-23.38	QP
2	122.150	32.92	43.50	-10.58	58.85	-25.93	QP
3	221.090	34.48	46.00	-11.52	60.65	-26.17	QP
4	261.830	32.18	46.00	-13.82	56.53	-24.35	QP
5	614.910	23.64	46.00	-22.36	38.93	-15.29	QP
6	841.890	26.52	46.00	-19.48	38.45	-11.93	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ble2M_2440MHz
Test BY :Ashton

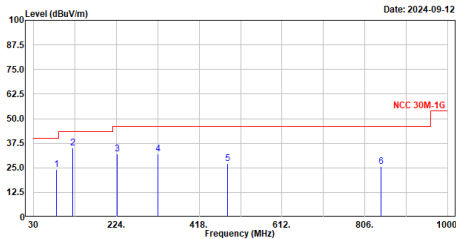

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.350	24.04	40.00	-15.96	53.72	-29.68	QP
2	121.180	35.15	43.50	-8.35	61.26	-26.11	QP
3	225.940	32.10	46.00	-13.90	58.15	-26.05	QP
4	321.000	32.16	46.00	-13.84	54.39	-22.23	QP
5	483.960	27.23	46.00	-18.77	45.37	-18.14	QP
6	844.800	25.81	46.00	-20.19	37.68	-11.87	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

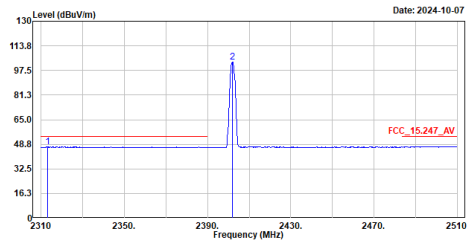


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2313.000	47.14	54.00	-6.86	16.48	30.66	Average
2	2402.000	103.06	-----	-----	72.53	30.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

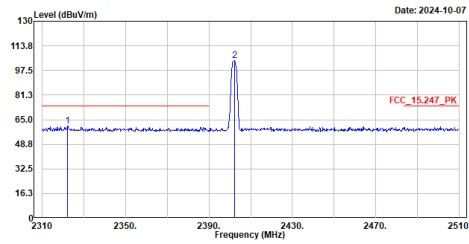


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2322.200	60.87	74.00	-13.13	30.22	30.65	Peak
2	2402.200	103.79	-----	-----	73.26	30.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

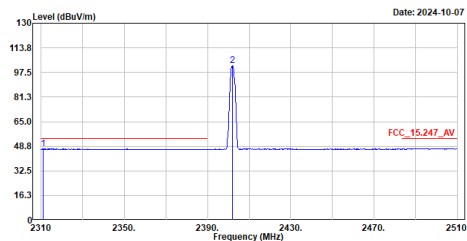


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2311.000	47.11	54.00	-6.89	16.45	30.66	Average
2	2402.000	101.95	-----	-----	71.42	30.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

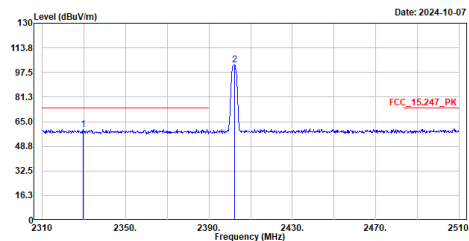


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2329.600	59.97	74.00	-14.03	29.40	30.57	Peak
2	2402.200	102.51	-----	-----	71.98	30.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e1M_2480MHz
Test BY :Bob

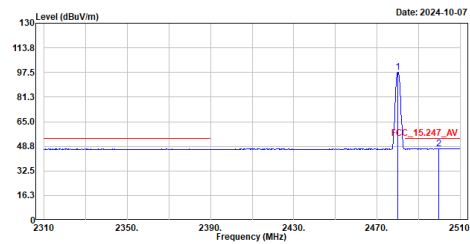


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	97.49	-----	-----	67.03	30.46	Average
2	2499.600	47.20	54.00	-6.80	16.62	30.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e1M_2480MHz
Test BY :Bob

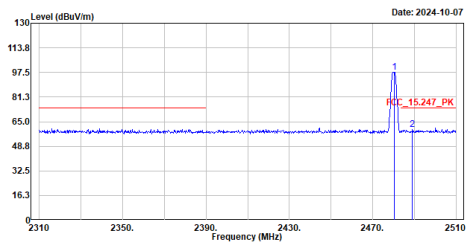


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.400	97.86	-----	-----	67.40	30.46	Peak
2	2489.000	59.77	74.00	-14.23	29.21	30.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e1M_2480MHz
Test BY :Bob

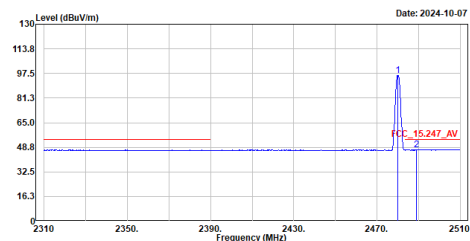


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	96.38	-----	-----	65.92	30.46	Average
2	2489.000	47.11	54.00	-6.89	16.55	30.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e1M_2480MHz
Test BY :Bob

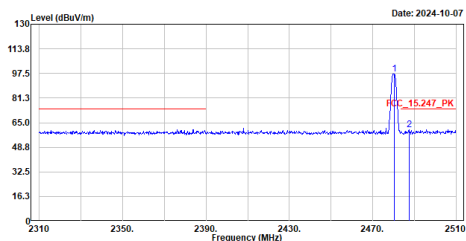


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.400	97.06	-----	-----	66.60	30.46	Peak
2	2487.400	60.58	74.00	-13.42	30.04	30.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e2M_2402MHz
Test BY :Bob

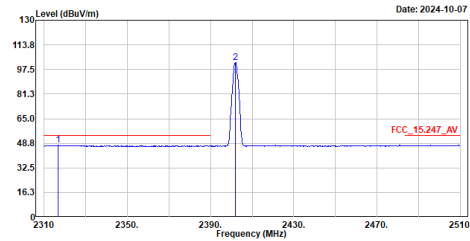


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2316.000	47.37	54.00	-6.63	16.71	30.66	Average
2	2402.000	102.19	-----	-----	71.66	30.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e2M_2402MHz
Test BY :Bob

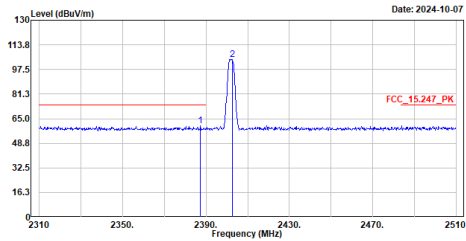


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.400	60.30	74.00	-13.70	29.79	30.51	Peak
2	2402.000	103.91	-----	-----	73.36	30.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e2M_2402MHz
Test BY :Bob

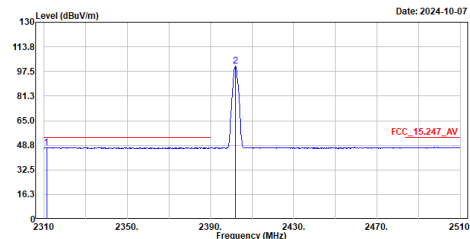


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2311.200	47.31	54.00	-6.69	16.65	30.66	Average
2	2402.000	100.86	-----	-----	70.33	30.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e2M_2402MHz
Test BY :Bob

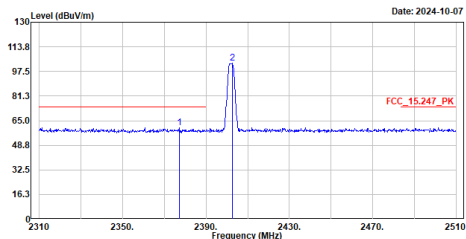


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2377.400	60.43	74.00	-13.57	29.93	30.50	Peak
2	2402.000	102.78	-----	-----	72.23	30.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e2M_2480MHz
Test BY :Bob

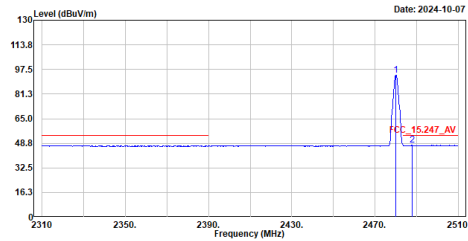


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	93.49	-----	-----	63.03	30.46	Average
2	2487.800	47.49	54.00	-6.51	16.94	30.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_b1e2M_2480MHz
Test BY :Bob

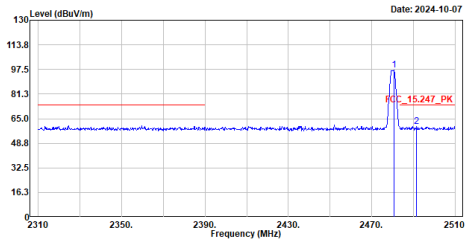


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.600	96.99	-----	-----	66.51	30.48	Peak
2	2491.400	60.05	74.00	-13.95	29.48	30.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e2M_2480MHz
Test BY :Bob

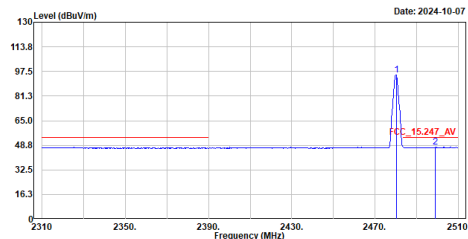


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	95.06	-----	-----	64.60	30.46	Average
2	2499.000	47.43	54.00	-6.57	16.85	30.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_b1e2M_2480MHz
Test BY :Bob

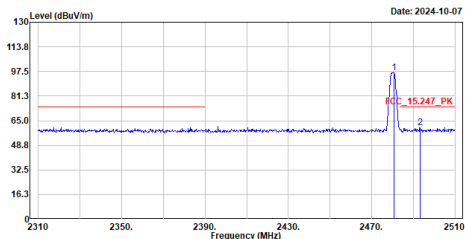


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.600	96.63	-----	-----	66.15	30.48	Peak
2	2493.200	60.56	74.00	-13.44	29.99	30.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix G. Test Result of Radiated Emissions Co-location

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_g_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

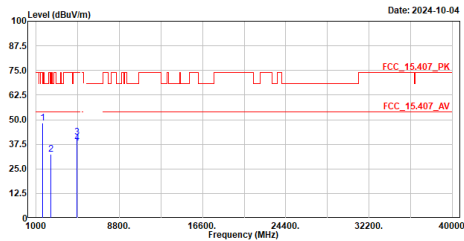


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1586.000	48.22	74.00	-25.78	73.69	-25.47	Peak
2	2379.000	32.28	74.00	-41.72	55.59	-23.31	Peak
3	4804.000	41.31	74.00	-32.69	55.53	-14.22	Peak
4	4824.000	38.09	74.00	-35.91	52.16	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_g_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

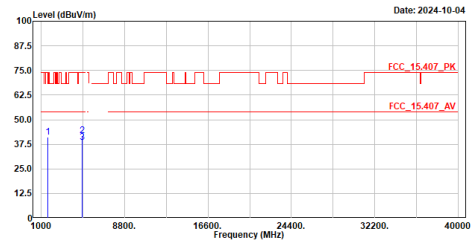


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1586.000	41.05	74.00	-32.95	66.52	-25.47	Peak
2	4804.000	42.04	74.00	-31.96	56.26	-14.22	Peak
3	4824.000	38.46	74.00	-35.54	52.53	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_g_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1RB0_CH26865
Test BY :Bob

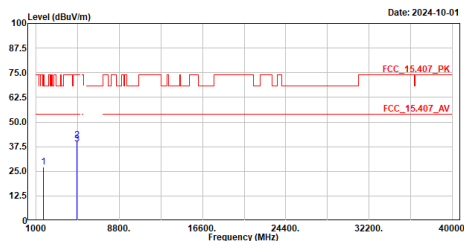


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1663.000	27.36	74.00	-46.64	52.68	-25.32	Peak
2	4804.000	40.77	74.00	-33.23	54.99	-14.22	Peak
3	4824.000	38.79	74.00	-35.21	52.86	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_g_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1RB0_CH26865
Test BY :Bob

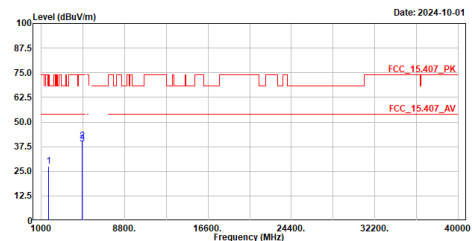


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1663.000	27.46	74.00	-46.54	52.78	-25.32	Peak
2	4804.000	40.55	74.00	-33.45	54.77	-14.22	Peak
3	4824.000	38.97	74.00	-35.03	53.04	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_sx80_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

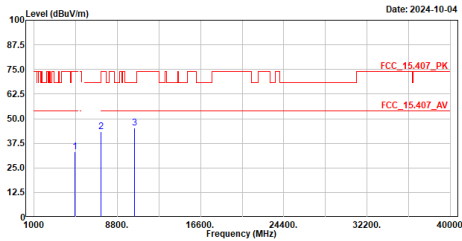


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.26	74.00	-40.74	47.48	-14.22	Peak
2	7249.980	43.38	68.22	-24.84	49.93	-6.55	Peak
3	10420.000	45.24	68.22	-22.98	49.47	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_sx80_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

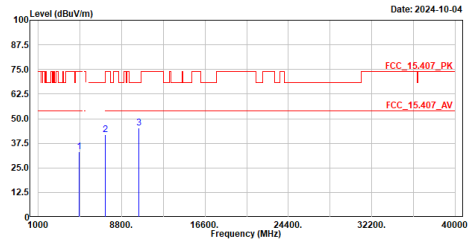


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.35	74.00	-40.65	47.57	-14.22	Peak
2	7249.980	41.96	68.22	-26.26	48.51	-6.55	Peak
3	10420.000	45.15	68.22	-23.07	49.38	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_sx80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

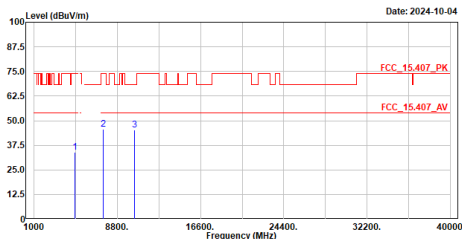


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.90	74.00	-40.10	48.12	-14.22	Peak
2	7500.000	45.49	74.00	-28.51	51.99	-6.50	Peak
3	10420.000	45.34	68.22	-22.88	49.57	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_sx80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

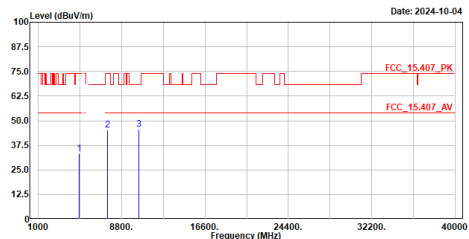


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	33.16	74.00	-40.84	47.38	-14.22	Peak
2	7500.000	45.11	74.00	-28.89	51.61	-6.50	Peak
3	10420.000	45.70	68.22	-22.52	49.93	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Bob

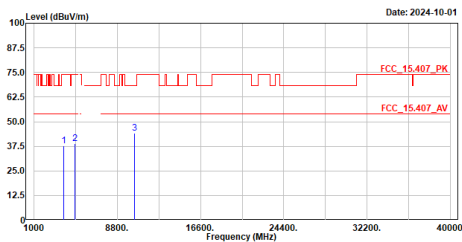


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3765.000	37.66	74.00	-36.34	56.44	-18.78	Peak
2	4804.000	38.86	74.00	-35.14	53.08	-14.22	Peak
3	10420.000	44.18	68.22	-24.04	48.41	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ax80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Bob

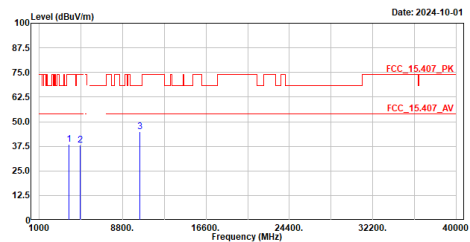


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3765.000	38.37	74.00	-35.63	57.15	-18.78	Peak
2	4804.000	38.03	74.00	-35.97	52.25	-14.22	Peak
3	10420.000	44.93	68.22	-23.29	49.16	-4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

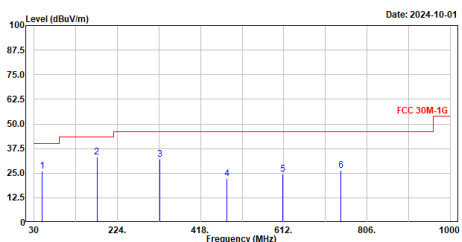


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	26.03	40.00	-13.97	49.22	-23.19	QP
2	176.470	33.18	43.50	-10.32	58.07	-24.89	QP
3	322.940	32.24	46.00	-13.76	54.38	-22.14	QP
4	479.110	22.33	46.00	-23.67	40.59	-18.26	QP
5	610.060	24.42	46.00	-21.58	39.73	-15.31	QP
6	744.890	26.37	46.00	-19.63	39.47	-13.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_2412MHz+bt1M_2402MHz_5GHR_n14_10M_CH152600
Test BY :Ashton

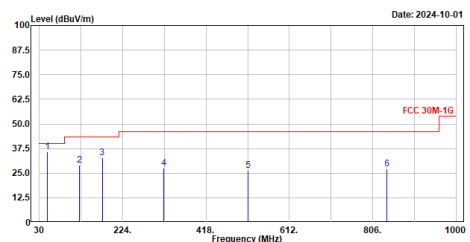


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.96	40.00	-4.04	59.15	-23.19	QP
2	123.120	29.02	43.50	-14.48	54.87	-25.85	QP
3	176.470	32.93	43.50	-10.57	57.82	-24.89	QP
4	320.030	27.38	46.00	-18.62	49.66	-22.28	QP
5	515.970	26.50	46.00	-19.50	44.01	-17.51	QP
6	838.900	27.10	46.00	-18.90	39.11	-12.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_L_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1RB0_CH26865
Test BY :Ashton

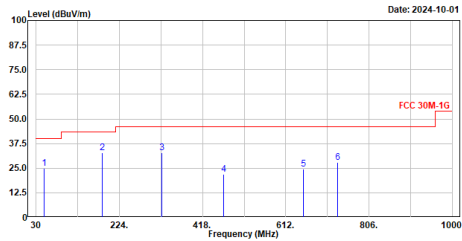


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	24.75	40.00	-15.25	47.94	-23.19	QP
2	184.230	32.65	43.50	-10.85	58.41	-25.76	QP
3	322.940	32.75	46.00	-13.25	54.89	-22.14	QP
4	466.500	21.83	46.00	-24.17	40.19	-18.36	QP
5	653.710	24.59	46.00	-21.41	39.26	-14.67	QP
6	733.250	28.08	46.00	-17.92	41.30	-13.22	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_L_2412MHz+bt1M_2402MHz_LTEB26_15M_QPSK_1RB0_CH26865
Test BY :Ashton

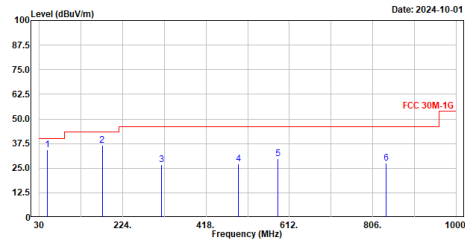


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	34.36	40.00	-5.64	57.55	-23.19	QP
2	176.470	36.64	43.50	-6.86	61.53	-24.89	QP
3	314.210	26.62	46.00	-19.38	49.04	-22.42	QP
4	492.690	27.09	46.00	-18.91	45.13	-18.04	QP
5	585.810	29.86	46.00	-16.14	45.62	-15.76	QP
6	837.040	27.49	46.00	-18.51	39.54	-12.05	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_800_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

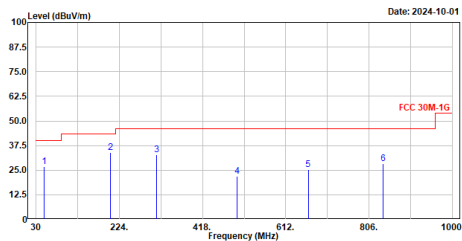


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	26.76	40.00	-13.24	49.95	-23.19	QP
2	202.660	33.89	43.50	-9.61	60.47	-26.58	QP
3	310.330	32.78	46.00	-13.22	55.38	-22.60	QP
4	498.510	22.00	46.00	-24.00	39.91	-17.91	QP
5	664.380	25.19	46.00	-20.81	39.72	-14.53	QP
6	838.980	28.27	46.00	-17.73	40.28	-12.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_800_5210MHz+bt1M_2402MHz_5GHR_n48_40M_CH641666
Test BY :Ashton

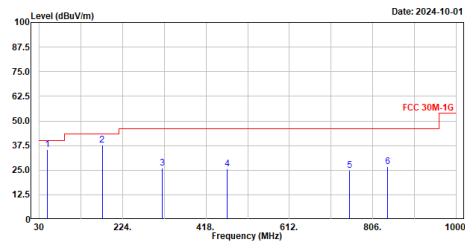


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	35.58	40.00	-4.42	58.77	-23.19	QP
2	176.470	37.59	43.50	-5.91	62.48	-24.89	QP
3	316.150	26.22	46.00	-19.78	48.59	-22.37	QP
4	467.470	25.70	46.00	-20.30	44.06	-18.36	QP
5	752.650	25.02	46.00	-20.98	38.01	-12.99	QP
6	840.920	26.78	46.00	-19.22	38.75	-11.97	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX,ss80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

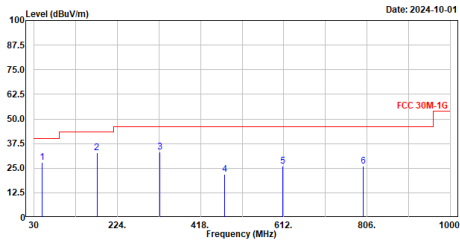


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	28.05	40.00	-11.95	51.24	-23.19	QP
2	176.470	32.80	43.50	-10.70	57.69	-24.89	QP
3	323.910	33.04	46.00	-12.96	55.14	-22.10	QP
4	474.260	22.07	46.00	-23.93	40.42	-18.35	QP
5	610.060	26.06	46.00	-19.94	41.37	-15.31	QP
6	797.270	26.18	46.00	-19.82	38.58	-12.40	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX,ss80_5210MHz+bt1M_2402MHz_5GHR_n77_100M_CH650000
Test BY :Ashton

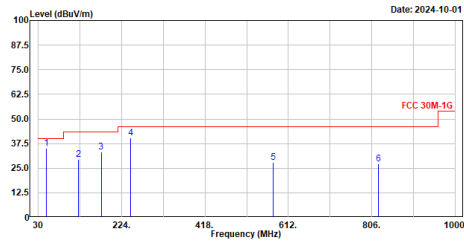


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.26	40.00	-4.74	58.45	-23.19	QP
2	123.120	29.29	43.50	-14.21	55.14	-25.85	QP
3	176.470	33.09	43.50	-10.41	57.98	-24.89	QP
4	244.370	40.44	46.00	-5.56	65.22	-24.78	QP
5	576.110	27.94	46.00	-18.06	44.06	-16.12	QP
6	821.520	27.26	46.00	-18.74	39.50	-12.24	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX,ss80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Ashton

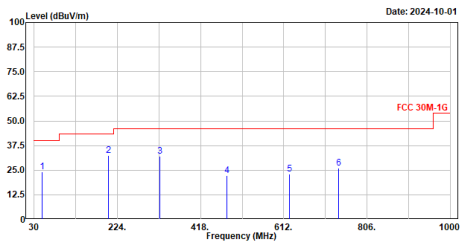


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	24.05	40.00	-15.95	47.24	-23.19	QP
2	202.660	32.49	43.50	-11.01	59.07	-26.58	QP
3	322.940	31.91	46.00	-14.09	54.05	-22.14	QP
4	480.080	22.13	46.00	-23.87	40.36	-18.23	QP
5	624.610	23.15	46.00	-22.85	38.25	-15.10	QP
6	740.040	26.09	46.00	-19.91	39.19	-13.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX,ss80_5210MHz+bt1M_2402MHz_LTEB25_20M_QPSK_1RB0_CH26365
Test BY :Ashton

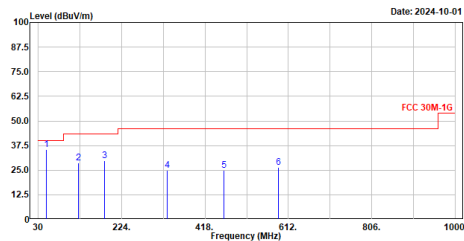

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	35.39	40.00	-4.61	58.58	-23.19	QP
2	123.120	28.67	43.50	-14.83	54.52	-25.85	QP
3	184.230	29.79	43.50	-13.71	55.55	-25.76	QP
4	329.730	25.02	46.00	-20.98	46.87	-21.85	QP
5	461.650	24.92	46.00	-21.08	43.35	-18.43	QP
6	588.720	26.41	46.00	-19.59	42.04	-15.63	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.