

FCC Radio Test Report

FCC ID: QISHRY-LX2


This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1809C113
Equipment : Smart Phone
Test Model : HRY-LX2
Series Model : N/A
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Sep. 14, 2018
Date of Test : Sep. 29, 2018 ~ Nov. 19, 2018
Issued Date : Nov. 23, 2018
Tested by : BTL Inc.


Testing Engineer

:


(Treay Chen)


Technical Manager

:

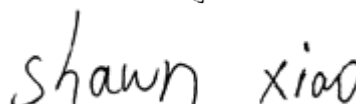
(Shawn Xiao)

Authorized Signatory

:


(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 RADIATED EMISSION MEASUREMENT	13
4.1.1 RADIATED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	17
4.1.6 EUT TEST CONDITIONS	17
4.1.7 TEST RESULTS (9 KHZ TO 30 MHZ)	17
4.1.8 TEST RESULTS (30 MHZ TO 1000 MHZ)	17
4.1.9 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
APPENDIX A - RADIATED EMISSION (9 KHZ TO 30 MHZ)	19
APPENDIX B - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	24
APPENDIX C - RADIATED EMISSION (ABOVE 1000 MHZ)	27

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 22, 2018
R01	Changed the brand name to Honor.	Nov. 23, 2018

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : Honor
Test Model : HRY-LX2
Series Model : N/A
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Sep. 29, 2018 ~ Nov. 19, 2018
Test Sample : Engineering Sample No.: D181110240
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1809C113) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the WLAN 2.4G Radiated Spurious Emissions part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:


A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MH~200 MHz	H	3.78
		200 MHz~1,000 MHz	V	4.10
		200 MHz~1,000 MHz	H	4.06
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	Honor	
Test Model	HRY-LX2	
Series Model	N/A	
Model Difference(s)	N/A	
Software Version	9.0.1.111(C900E110R1P9)	
Hardware Version	HL1HRYM	
Product Description	Operation Frequency	2412 MHz ~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150 Mbps
Power Source	1# DC voltage supplied from AC/DC adapter. 2# Supplied from battery.	
Power Rating	1# I/P: 100-240V~,50/60Hz,0.5A O/P: 5V  2A 2# DC 3.82V, 3320mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.


2. Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20 MHz) CH03 - CH09 for 802.11n(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	-1.81

4. The EUT contains following accessory devices.

Item	Manufacturer	Factory	Model	Description
Adapter	Huawei Technologies Co., Ltd.	Salcomp	HW-050200U02	I/P:100-240V~50/60Hz, 0.5A O/P:5V  2A
		HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050200U02 HW-050200U01	
		SHENZHEN HUNTKEY ELECTRIC CO., LTD.		
		Dongguan Phitek Electronics Co., Ltd.		
Battery	Huawei Technologies Co., Ltd.	SCUD (FUJIAN) Electronics Co., Ltd.	HB396286ECW	DC 3.82V, 3320mAh
		Huizhou Desay Battery Co., Ltd.		
		Sunwoda Electronic Co., Ltd.		
		Dongguan Amperex Technology Limited		
USB Cable	-	NingBo Broad Telecommunication Co., Ltd.	WA0001	-
		HONGLIN TECHNOLOGY CO., LTD.	130-26669	
		FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC3 04-DH	
		LuXshare	L99U2017-CS-H	
Earphone	-	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEND1532B528 A02	-
		BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD.	1293-3283-3.5m m-322	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX Mode
Mode 6	TX G Mode Channel 01/02/06/10/11
Mode 7	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 8	TX N-40 MHz Mode Channel 03/04/06/08/09

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

For Band Edge Test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 6	TX G Mode Channel 01/02/06/10/11
Mode 7	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 8	TX N-40 MHz Mode Channel 03/04/06/08/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1 Mbps)
 802.11g mode: OFDM (6 Mbps)
 802.11n HT20 mode : BPSK (6.5 Mbps)
 802.11n HT40 mode : BPSK (13.5 Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated 30 MHz to 1000 MHz test, the 802.11b is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	WiFiRFAuth.apk				
Frequency (MHz)	2412	2417	2437	2457	2462
802.11b	16	16	16	16	16
802.11g	13	17	17	17	13
802.11n (20 MHz)	11	15	15	15	11
Frequency (MHz)	2422	2427	2437	2447	2452
802.11n (40 MHz)	9	12	12	12	9

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

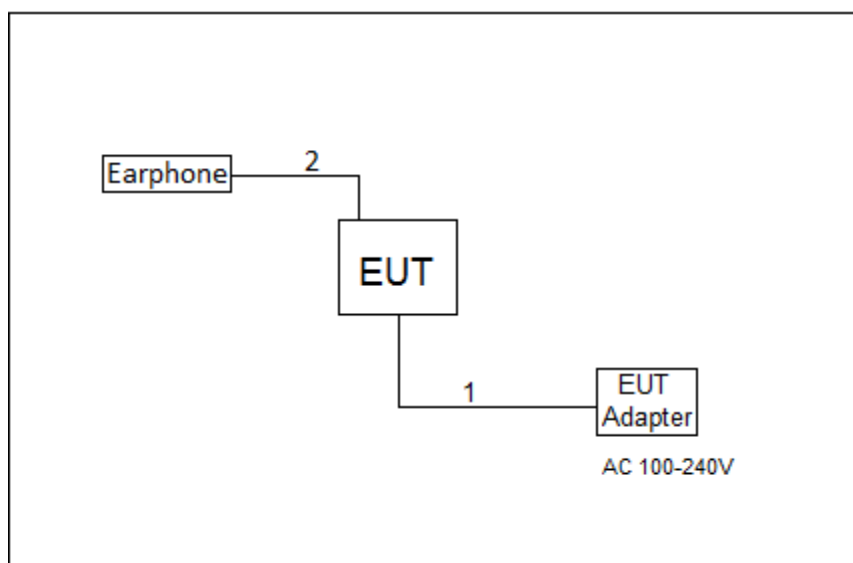

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable
2	NO	NO	1m	Audio Cable

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge at 3m (dBμV/m) / Harmonic at 3m (dBμV/m)		Harmonic at 1.5m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	80 (Note 5)	60(Note 5)

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

$$(5) \quad FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{ dB.}$$

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.1.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation


4.1.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

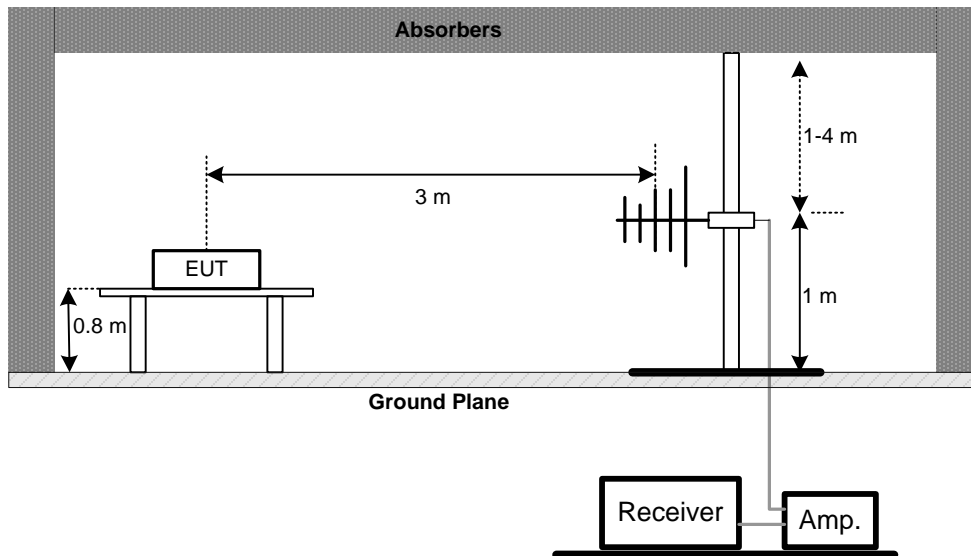


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz


Band edge

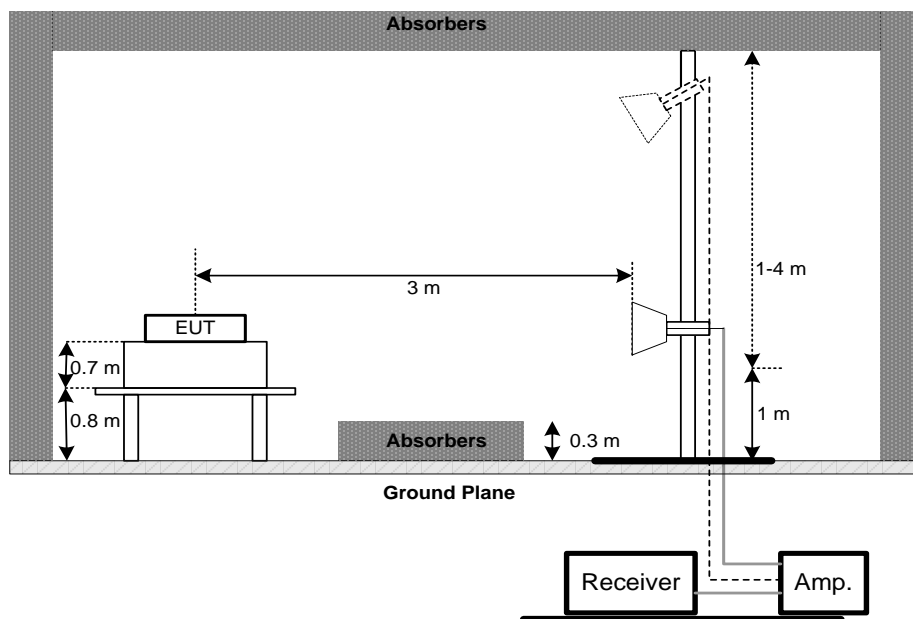


Harmonic 1GHz to 18GHz

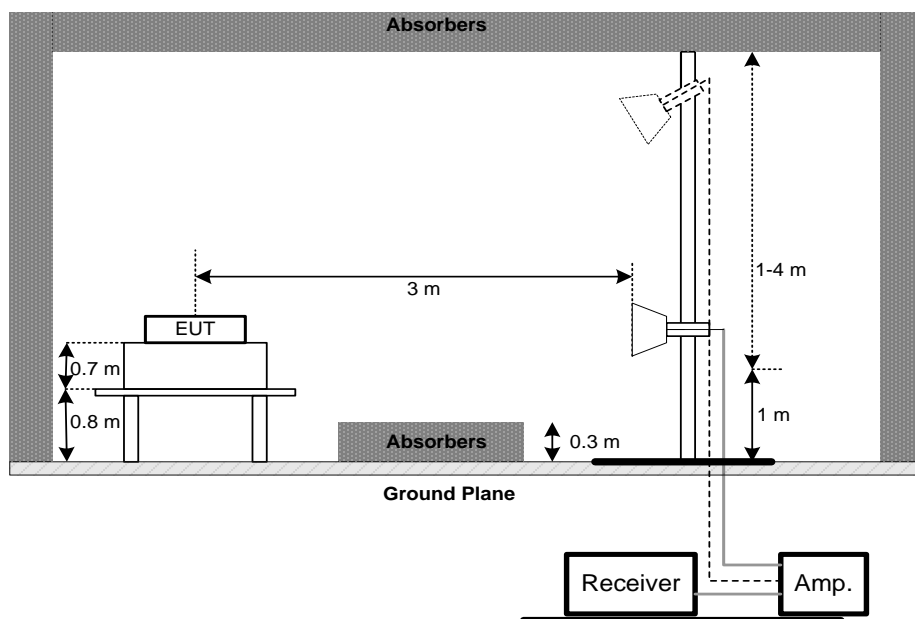

18GHz to 26.5GHz

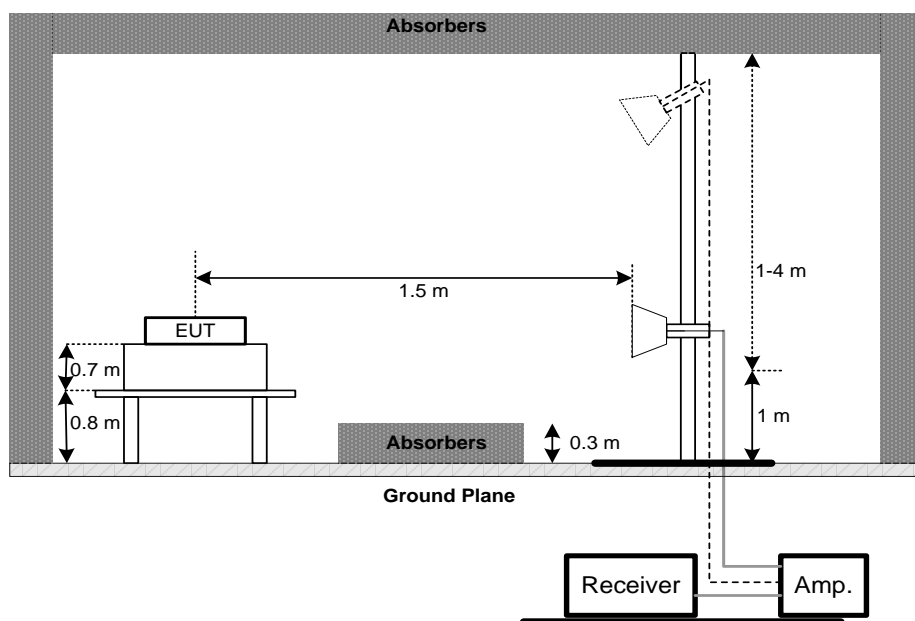

(C) For Radiated Emissions 9 kHz-30 MHz

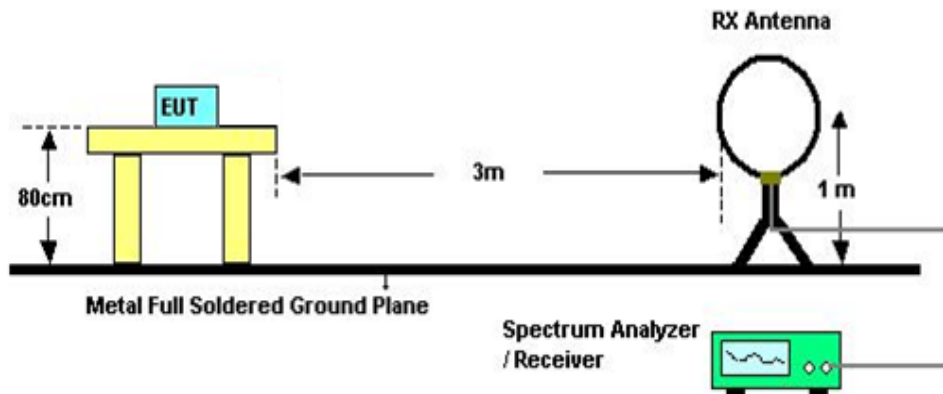

4.1.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS (9 kHz TO 30 MHz)

Please refer to the Appendix A.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.
- (4) All adapters had been pre-test and in this report only recorded the worst case.

4.1.8 TEST RESULTS (30 MHz TO 1000 MHz)

Please refer to the Appendix B.

Remark:

- (1) All adapters had been pre-test and in this report only recorded the worst case.

4.1.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Radiated Emission Measurement-9 kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement-30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Radiated Emission Measurement - Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

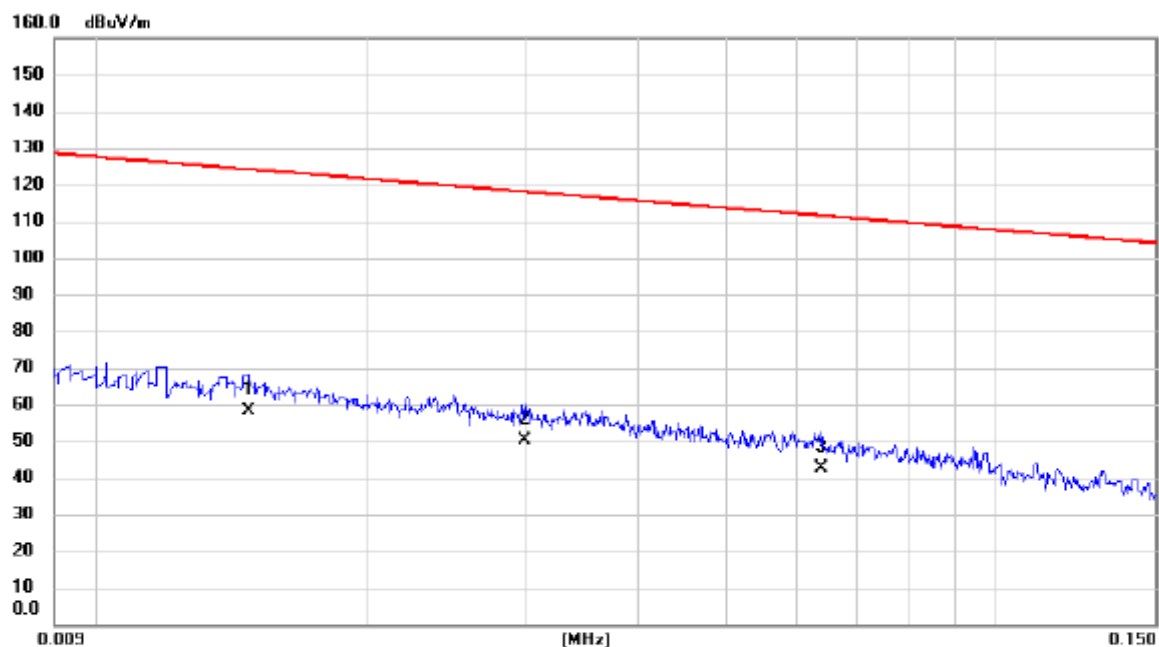

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0148	37.40	20.75	58.15	124.20	-66.05	AVG	
2		0.0300	30.50	19.85	50.35	118.06	-67.71	AVG	
3		0.0640	23.30	19.25	42.55	111.48	-68.93	AVG	

Test Mode: TX Mode


Ant 0°

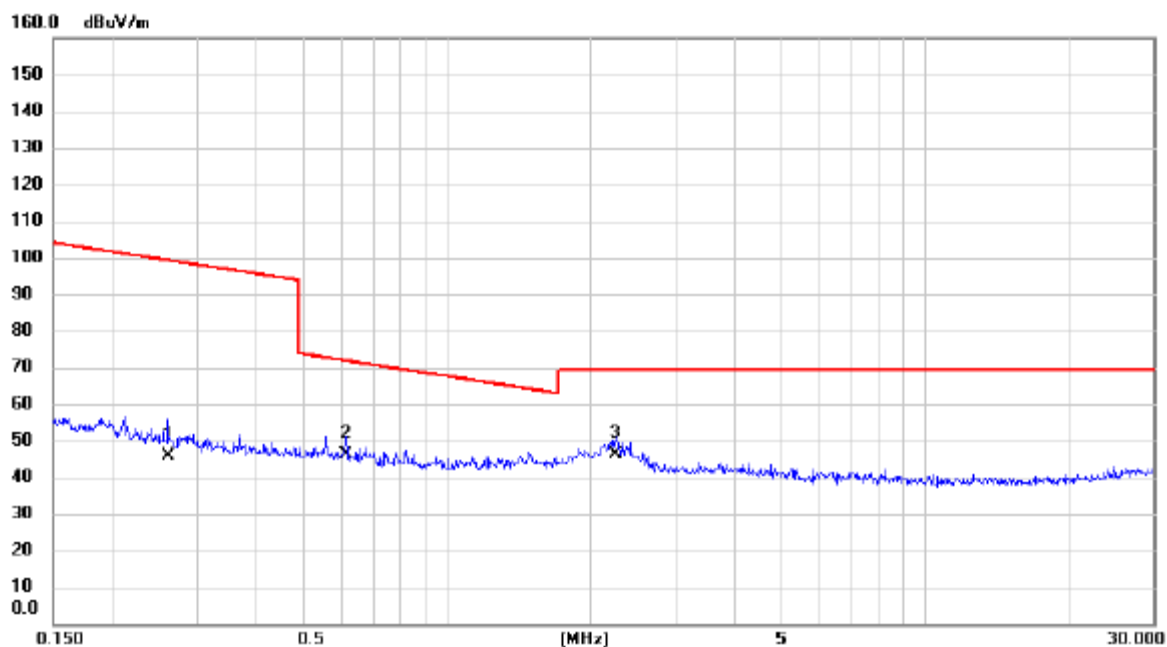

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2603	28.70	17.06	45.76	99.30	-53.54	AVG	
2		0.6140	29.30	16.92	46.22	71.84	-25.62	QP	
3	*	2.2486	29.20	16.96	46.16	69.54	-23.38	QP	

Test Mode: TX Mode


Ant 90°

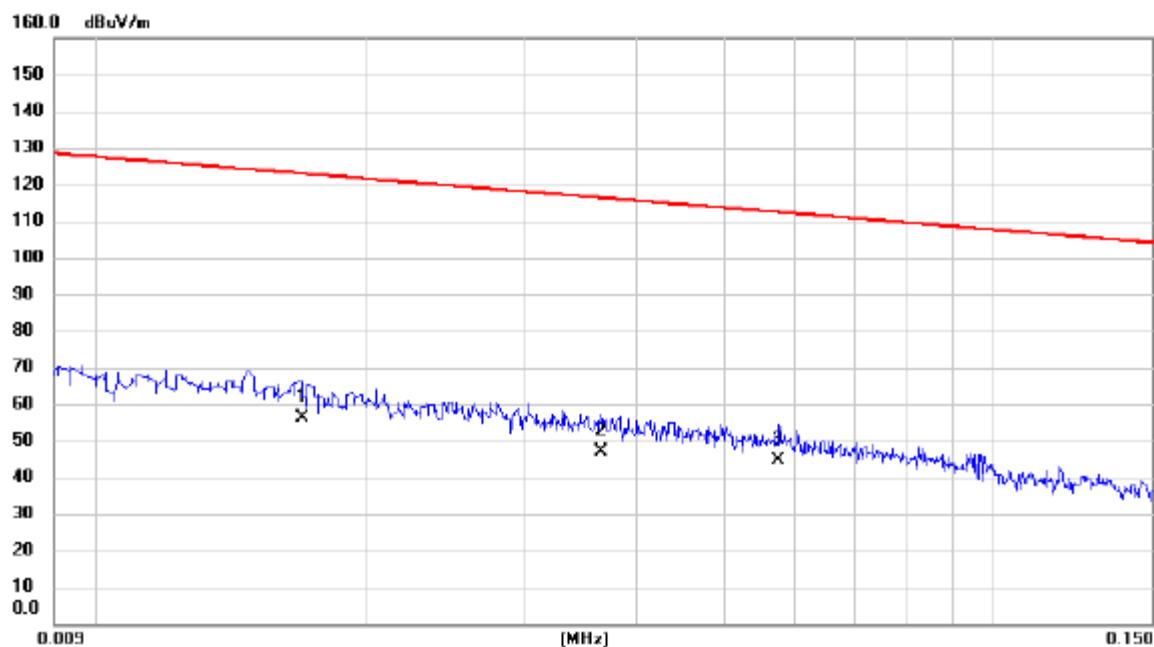

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0170	35.61	20.44	56.05	123.00	-66.95	AVG	
2		0.0366	27.10	19.74	46.84	116.34	-69.50	AVG	
3		0.0576	25.20	19.38	44.58	112.40	-67.82	AVG	

Test Mode: TX Mode

Ant 90°

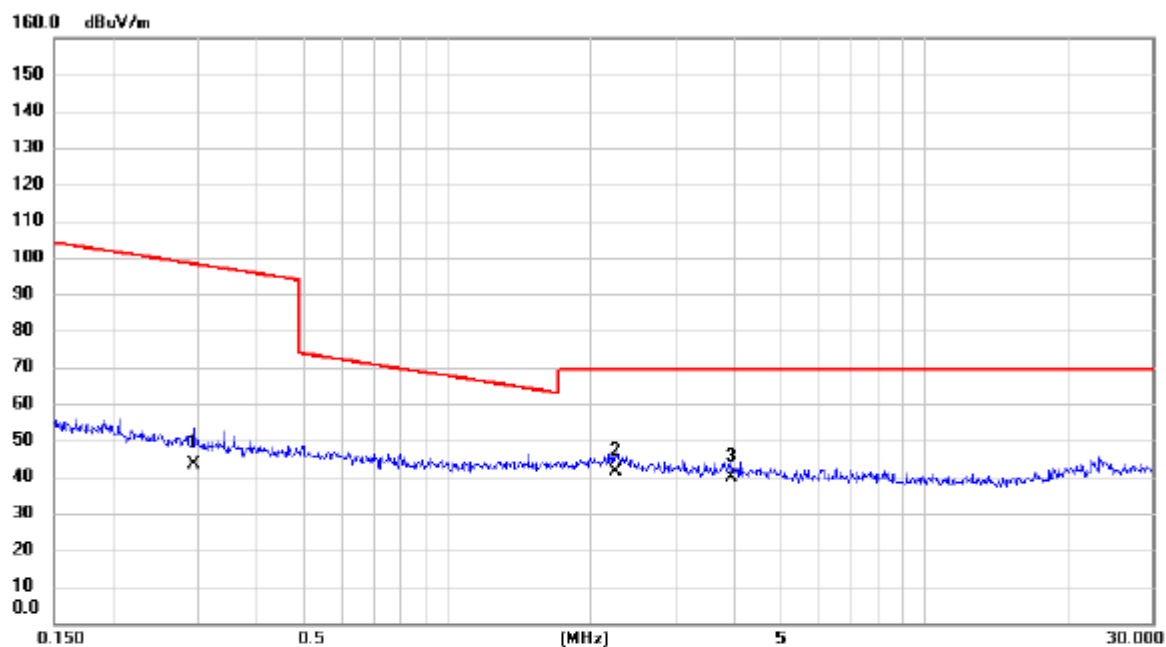


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2940	26.30	17.04	43.34	98.24	-54.90	AVG	
2	*	2.2486	24.50	16.96	41.46	69.54	-28.08	QP	
3		3.9430	24.10	15.80	39.90	69.54	-29.64	QP	

APPENDIX B - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: TX B Mode Channel 06

Vertical

80 dBuV/m

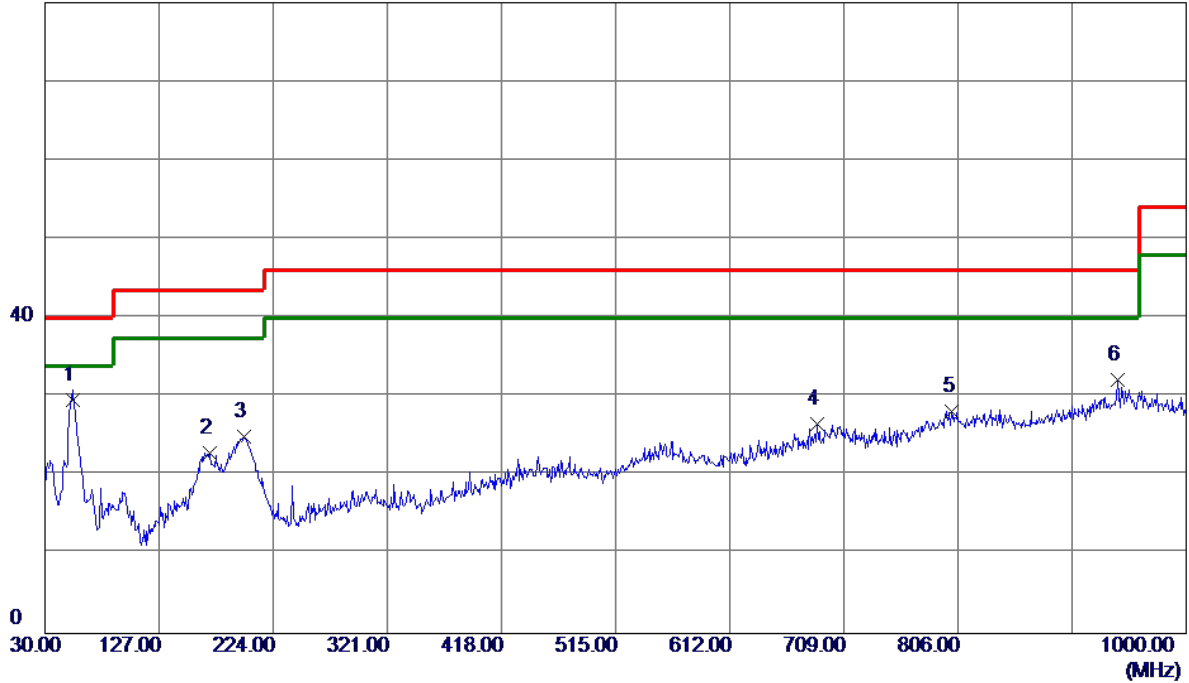


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	53.2800	44.53	-14.92	29.61	40.00	-10.39	QP	
2	169.6799	34.10	-11.18	22.92	43.50	-20.58	Peak	
3	199.2650	40.04	-15.14	24.90	43.50	-18.60	Peak	
4	686.2050	29.97	-3.41	26.56	46.00	-19.44	Peak	
5	801.1500	29.25	-1.06	28.19	46.00	-17.81	Peak	
6	941.8000	31.03	1.08	32.11	46.00	-13.89	Peak	

Test Mode: TX B Mode Channel 06

Horizontal

80 dBuV/m

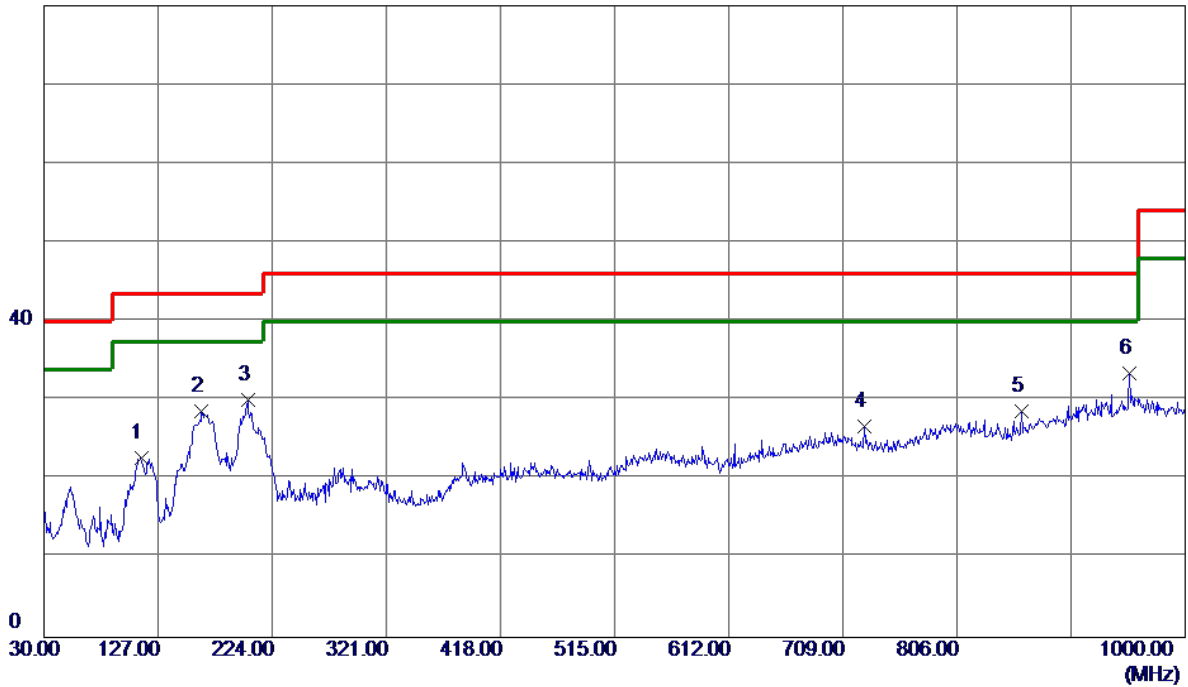


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	112.4500	38.60	-15.89	22.71	43.50	-20.79	Peak	
2	163.8600	39.52	-10.83	28.69	43.50	-14.81	Peak	
3	203.1450	45.29	-15.22	30.07	43.50	-13.43	Peak	
4	726.9450	30.13	-3.44	26.69	46.00	-19.31	Peak	
5	860.8050	30.24	-1.56	28.68	46.00	-17.32	Peak	
6 *	952.9550	32.11	1.34	33.45	46.00	-12.55	Peak	

APPENDIX C - RADIATED EMISSION (ABOVE 1000 MHZ)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

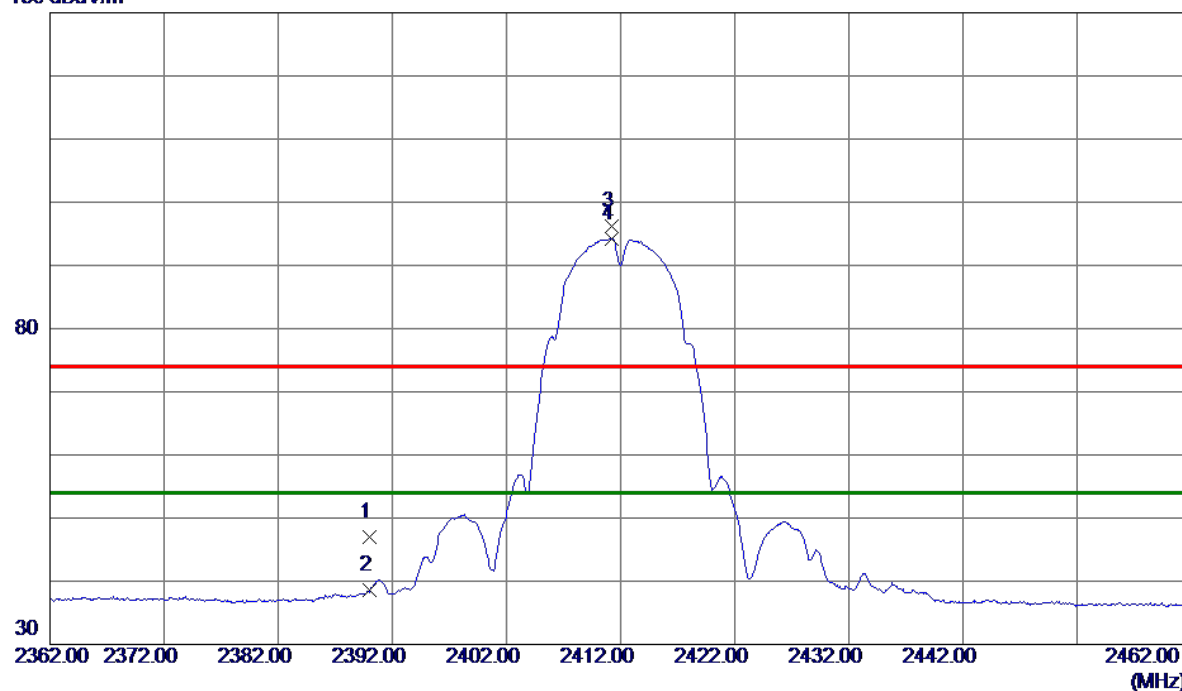


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	40.31	6.62	46.93	74.00	-27.07	Peak	
2	2390.0000	31.96	6.62	38.58	54.00	-15.42	AVG	
3	2411.2000	89.52	6.62	96.14	74.00	22.14	Peak	No Limit
4 *	2411.2000	87.60	6.62	94.22	54.00	40.22	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

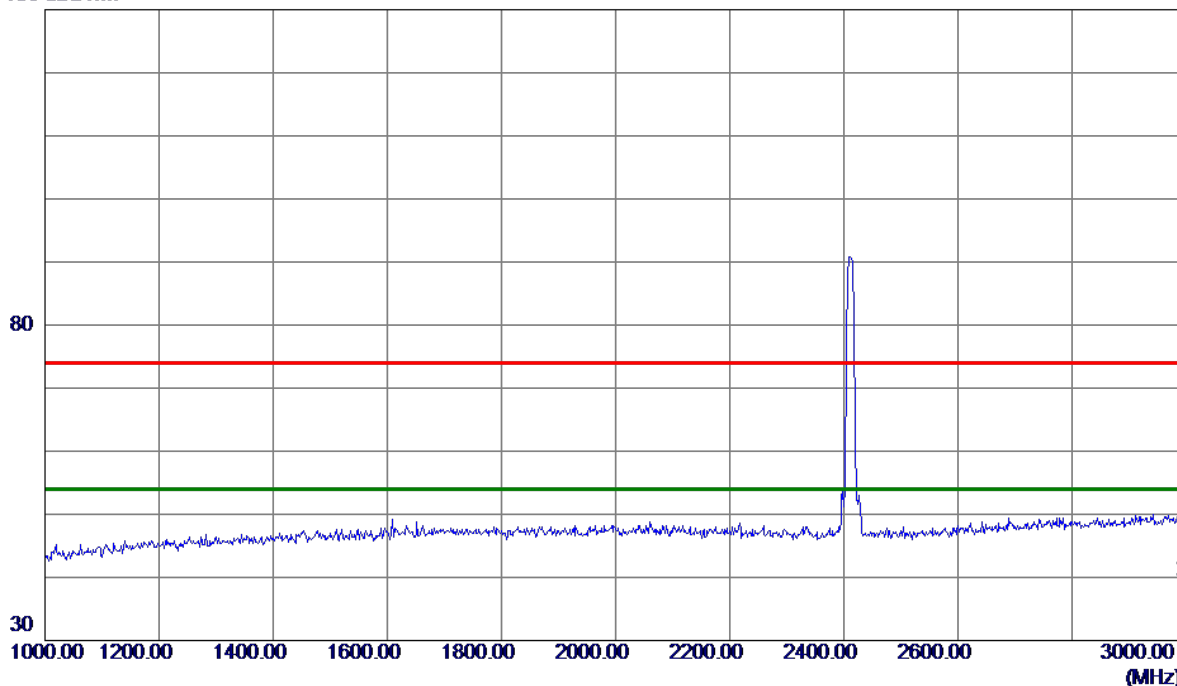


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2999.0000	40.52	9.95	50.47	74.00	-23.53	Peak	
2 *	2999.0000	27.35	9.95	37.30	54.00	-16.70	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

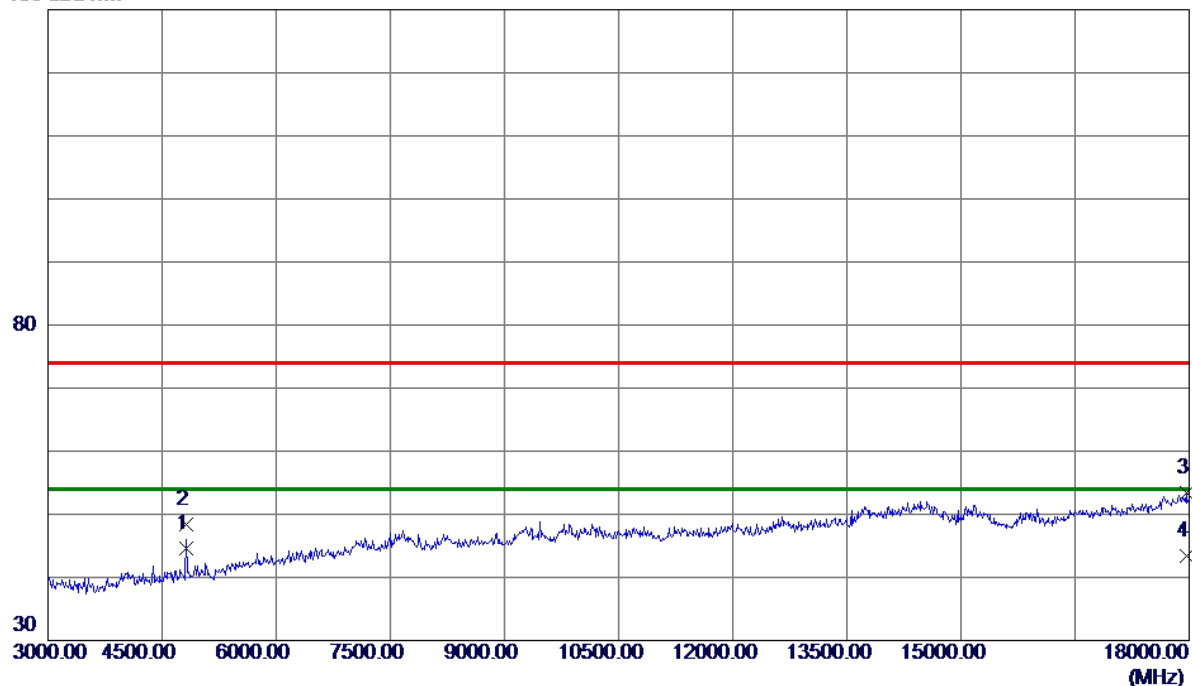


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0160	41.01	3.57	44.58	54.00	-9.42	AVG	
2	4824.0710	44.81	3.57	48.38	74.00	-25.62	Peak	
3	17962.5000	34.12	19.26	53.38	74.00	-20.62	Peak	
4	17962.5000	24.23	19.26	43.49	54.00	-10.51	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical


130 dBuV/m

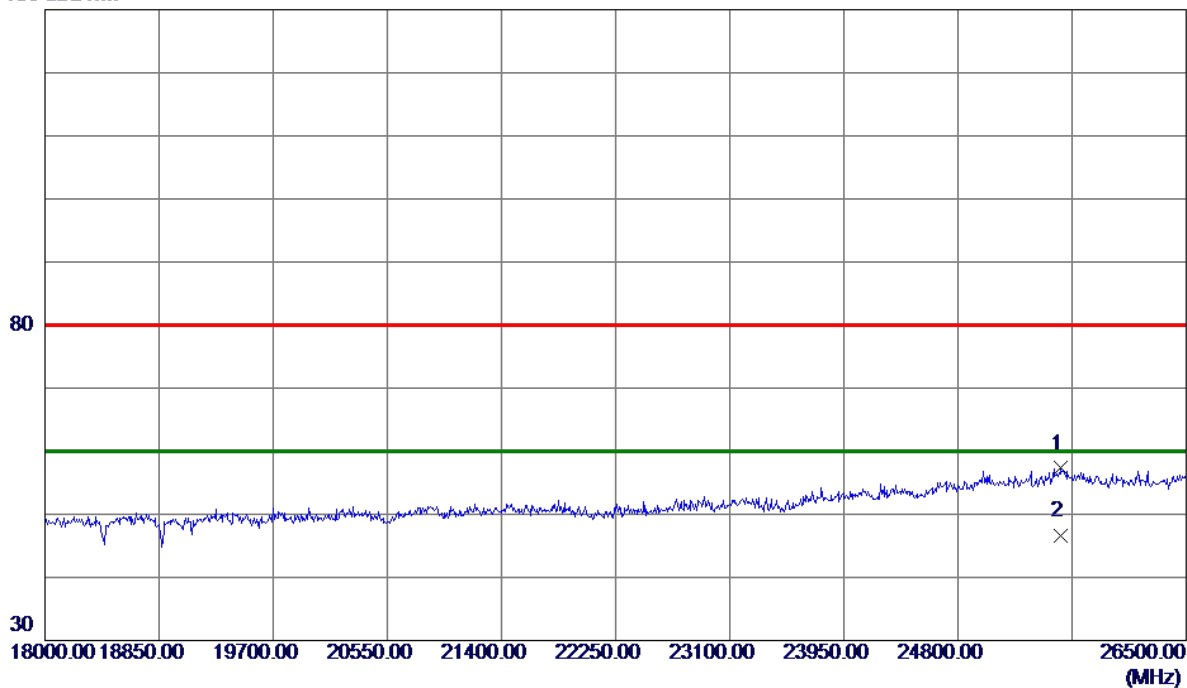

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25569.2500	40.05	17.25	57.30	80.00	-22.70	Peak	
2 *	25569.2500	29.42	17.25	46.67	60.00	-13.33	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz


Horizontal

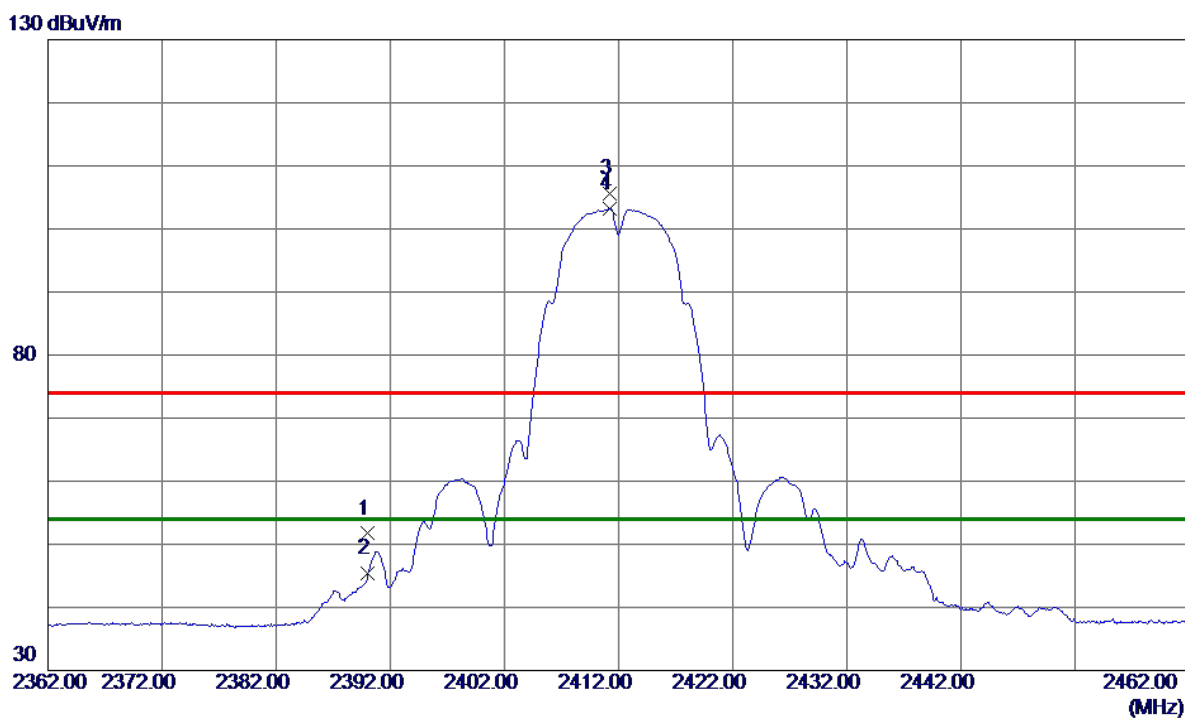

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	45.08	6.62	51.70	74.00	-22.30	Peak	
2	2390.0000	38.80	6.62	45.42	54.00	-8.58	AVG	
3	2411.2500	98.98	6.62	105.60	74.00	31.60	Peak	No Limit
4 *	2411.2500	96.56	6.62	103.18	54.00	49.18	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

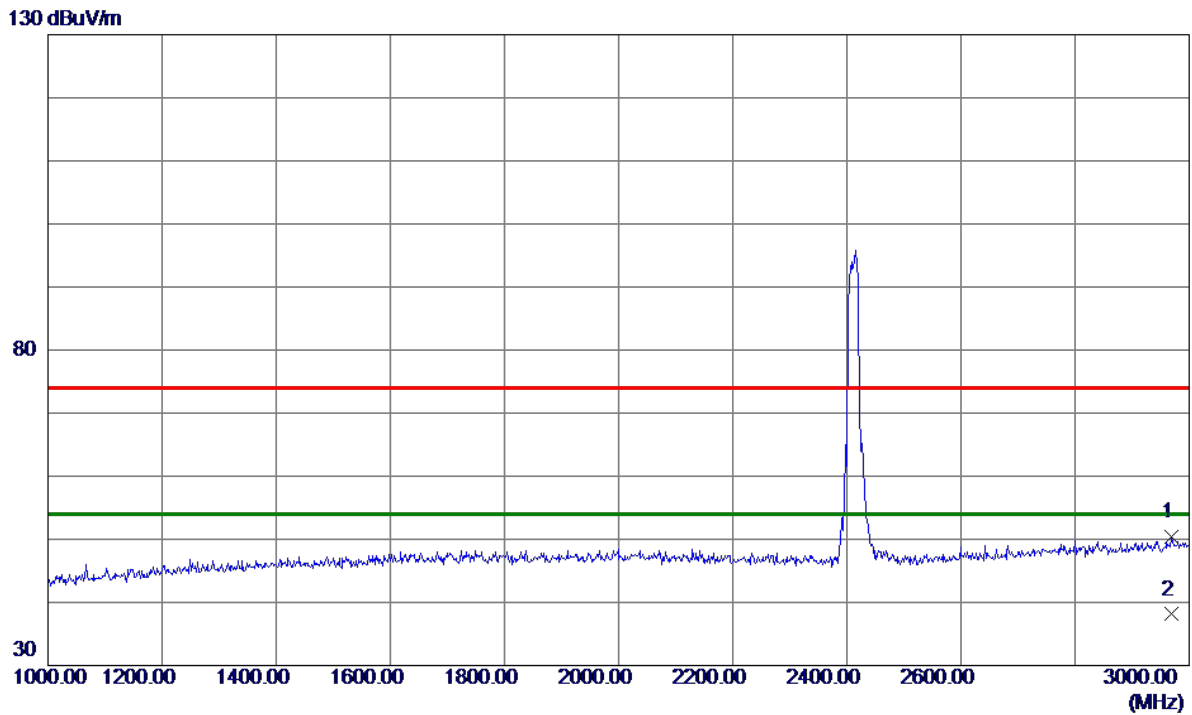


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2968.0000	40.57	9.75	50.32	74.00	-23.68	Peak	
2 *	2968.0000	28.35	9.75	38.10	54.00	-15.90	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

130 dBuV/m

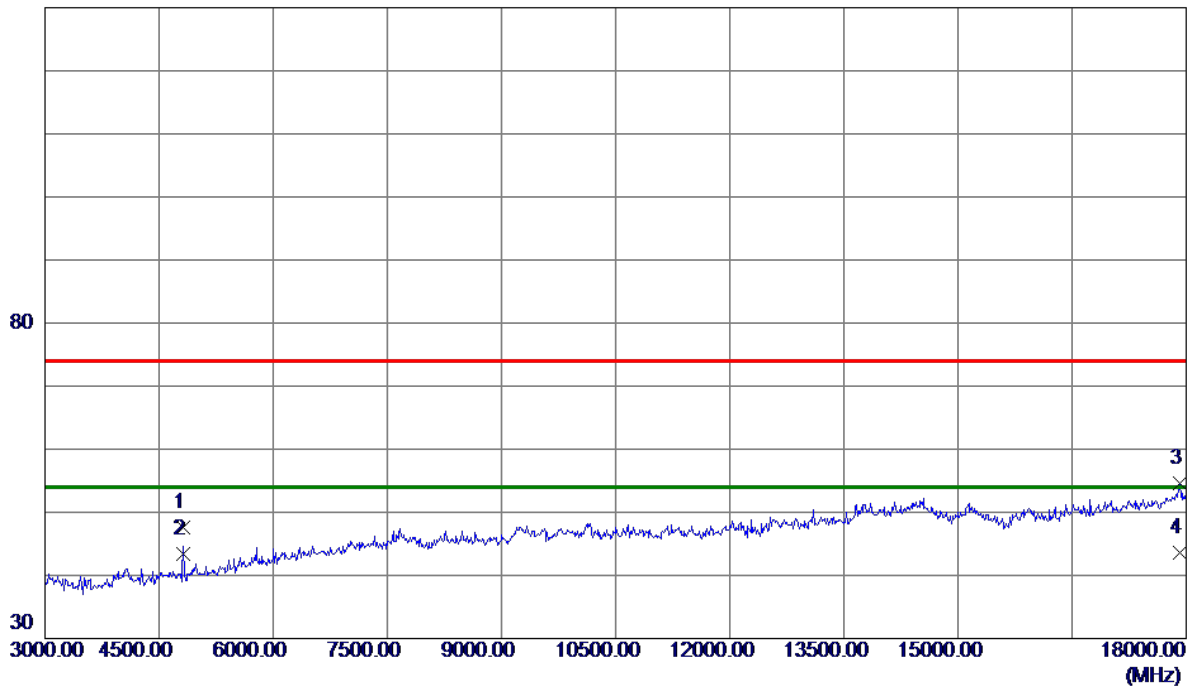


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9920	44.06	3.57	47.63	74.00	-26.37	Peak	
2	4824.0080	39.88	3.57	43.45	54.00	-10.55	AVG	
3	17910.0000	35.45	19.10	54.55	74.00	-19.45	Peak	
4 *	17910.0000	24.52	19.10	43.62	54.00	-10.38	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

130 dBuV/m

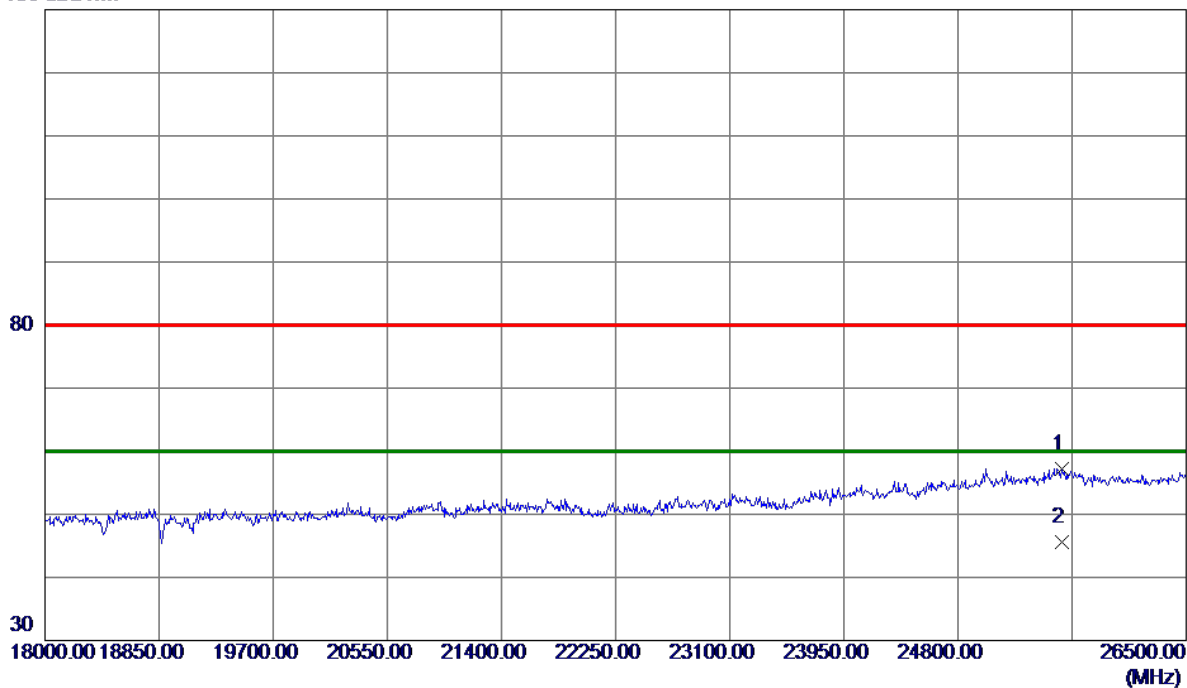


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25573.5000	39.97	17.24	57.21	80.00	-22.79	Peak	
2 *	25573.5000	28.36	17.24	45.60	60.00	-14.40	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

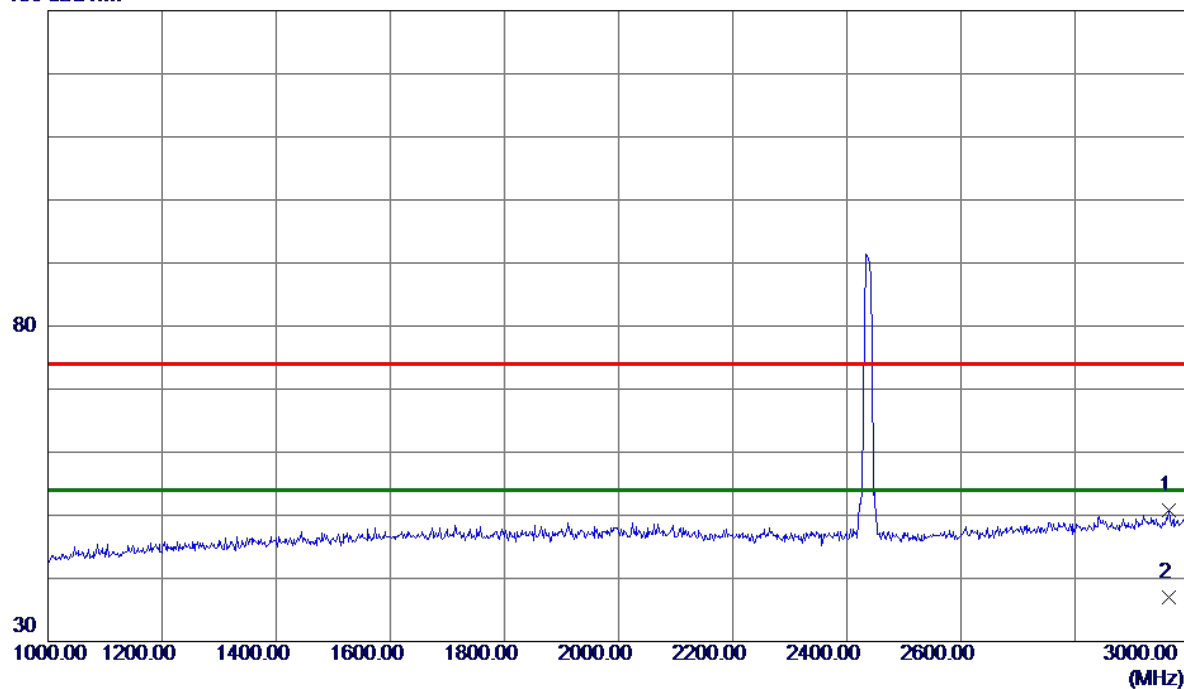


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2964.0000	41.00	9.72	50.72	74.00	-23.28	Peak	
2 *	2964.0000	27.35	9.72	37.07	54.00	-16.93	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

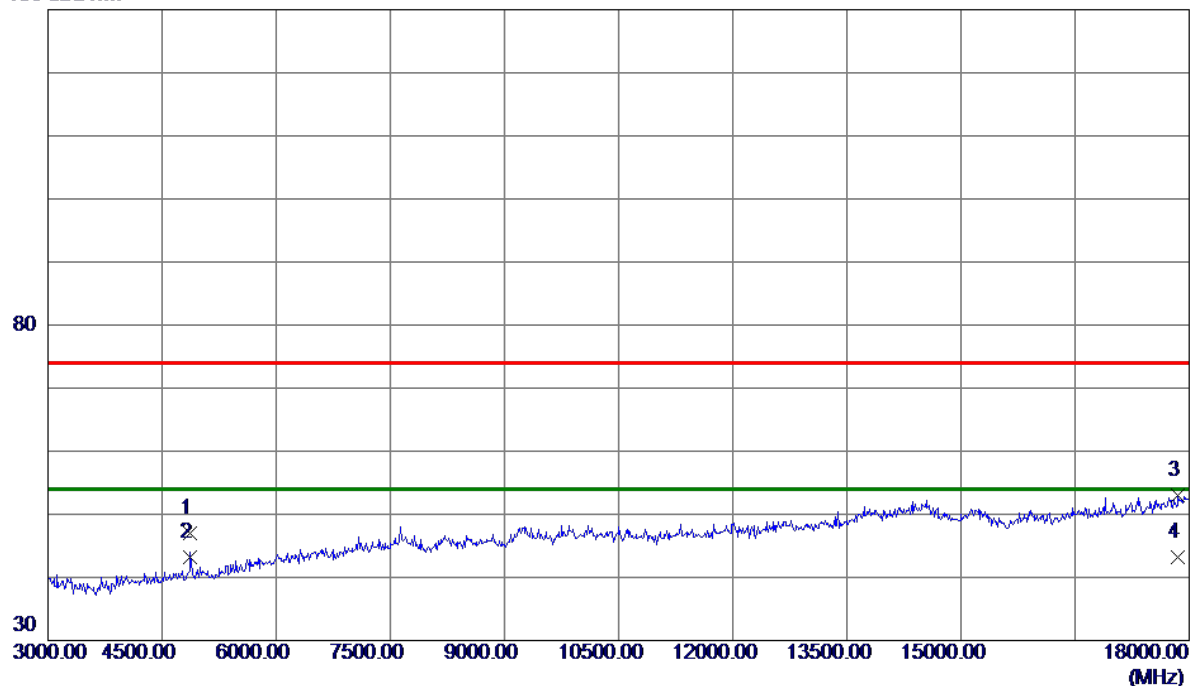


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.8300	43.38	3.68	47.06	74.00	-26.94	Peak	
2 *	4873.9690	39.56	3.68	43.24	54.00	-10.76	AVG	
3	17857.5000	34.02	18.95	52.97	74.00	-21.03	Peak	
4	17857.5000	24.25	18.95	43.20	54.00	-10.80	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

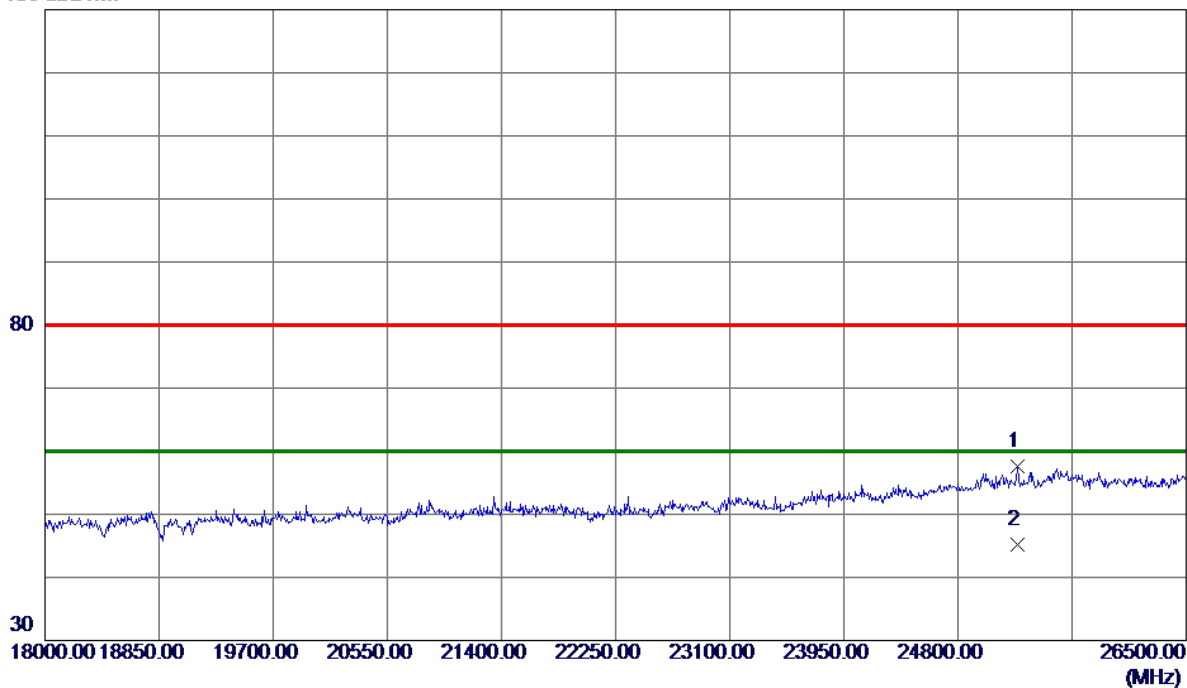


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25242.0000	40.34	17.17	57.51	80.00	-22.49	Peak	
2 *	25242.0000	28.06	17.17	45.23	60.00	-14.77	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

130 dBuV/m

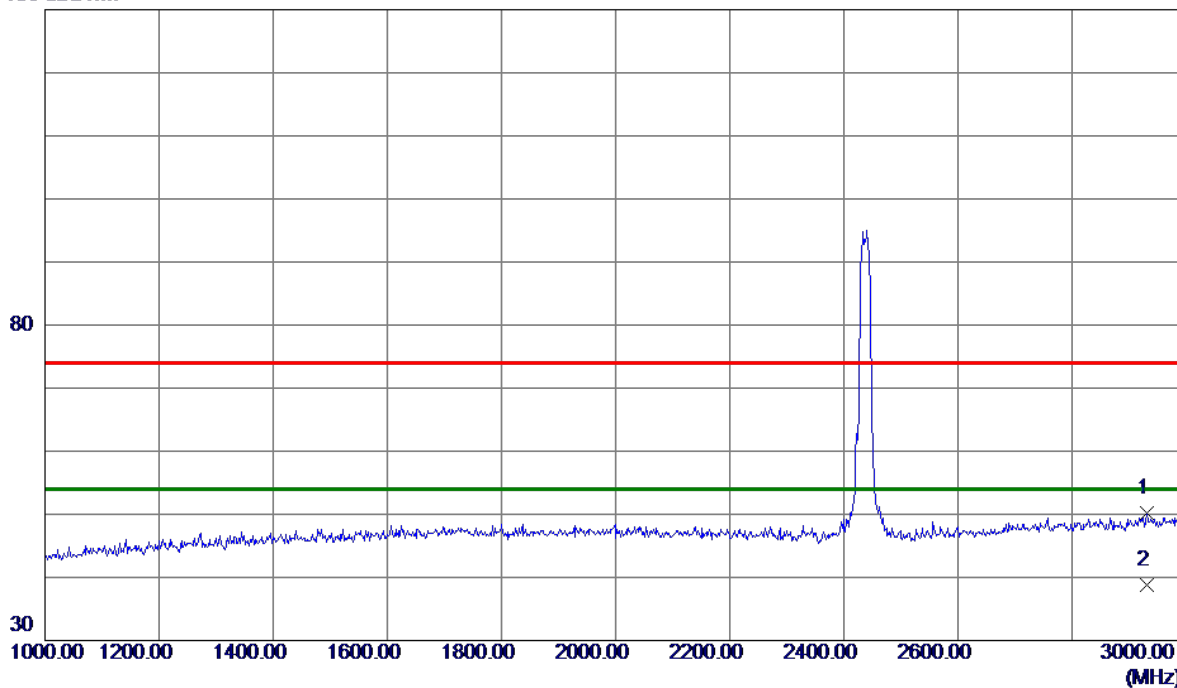


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2931.0000	40.72	9.50	50.22	74.00	-23.78	Peak	
2 *	2931.0000	29.34	9.50	38.84	54.00	-15.16	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

130 dBuV/m

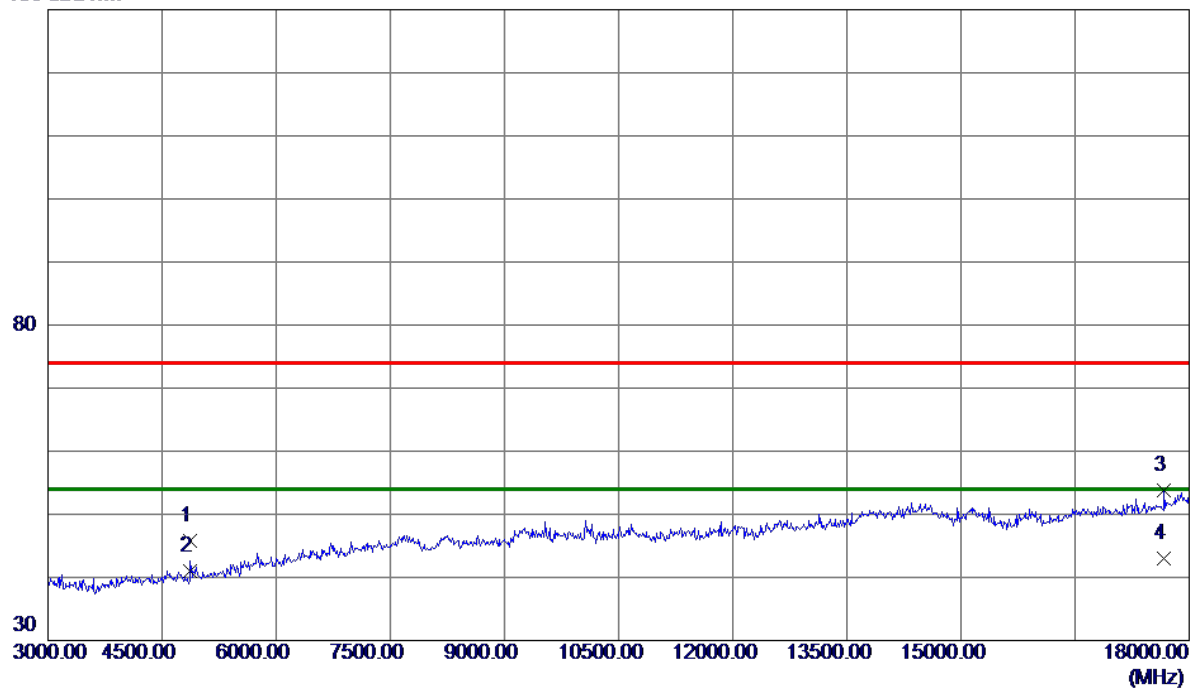


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9970	42.15	3.68	45.83	74.00	-28.17	Peak	
2	4874.0179	37.35	3.68	41.03	54.00	-12.97	AVG	
3	17670.0000	35.32	18.39	53.71	74.00	-20.29	Peak	
4 *	17670.0000	24.65	18.39	43.04	54.00	-10.96	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

130 dBuV/m

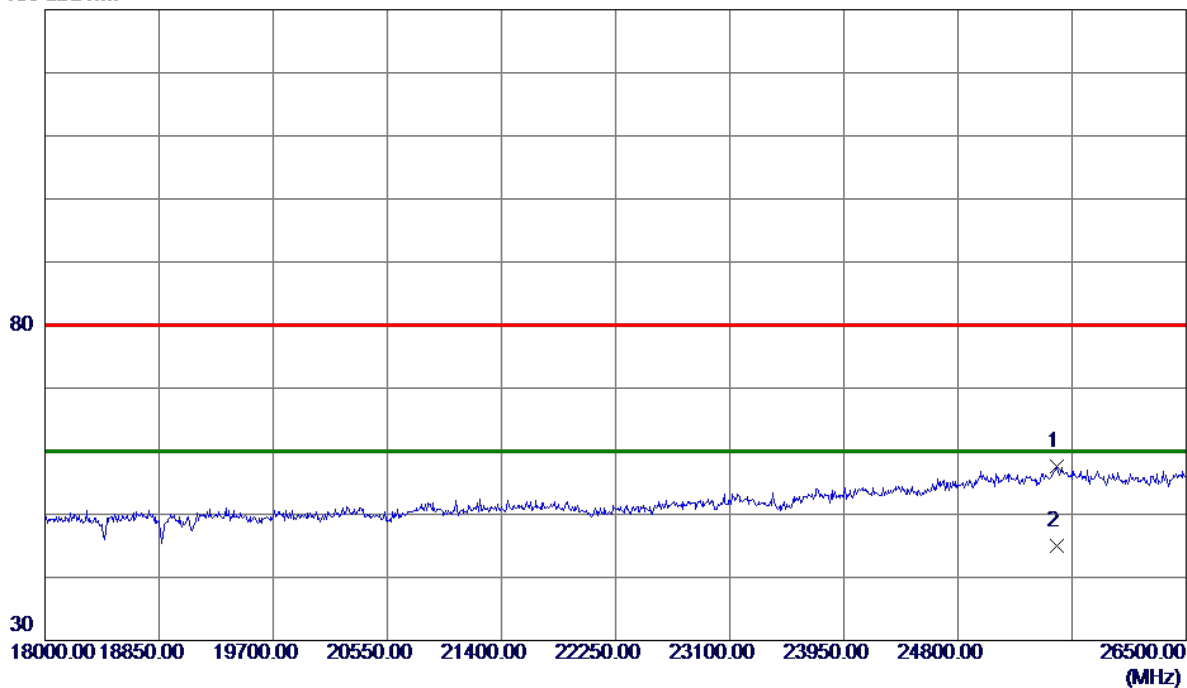


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25535.2500	40.37	17.28	57.65	80.00	-22.35	Peak	
2 *	25535.2500	27.66	17.28	44.94	60.00	-15.06	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

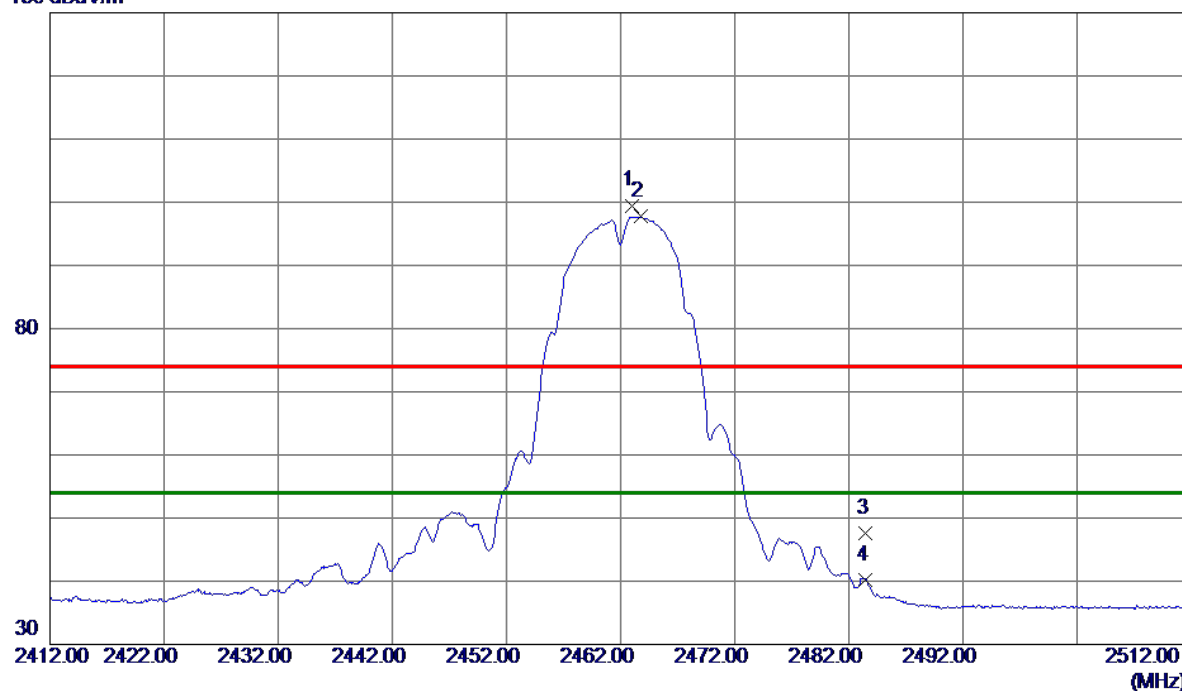


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.9500	92.89	6.61	99.50	74.00	25.50	Peak	No Limit
2 *	2463.7500	91.10	6.61	97.71	54.00	43.71	AVG	No Limit
3	2483.5000	41.03	6.61	47.64	74.00	-26.36	Peak	
4	2483.5000	33.50	6.61	40.11	54.00	-13.89	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

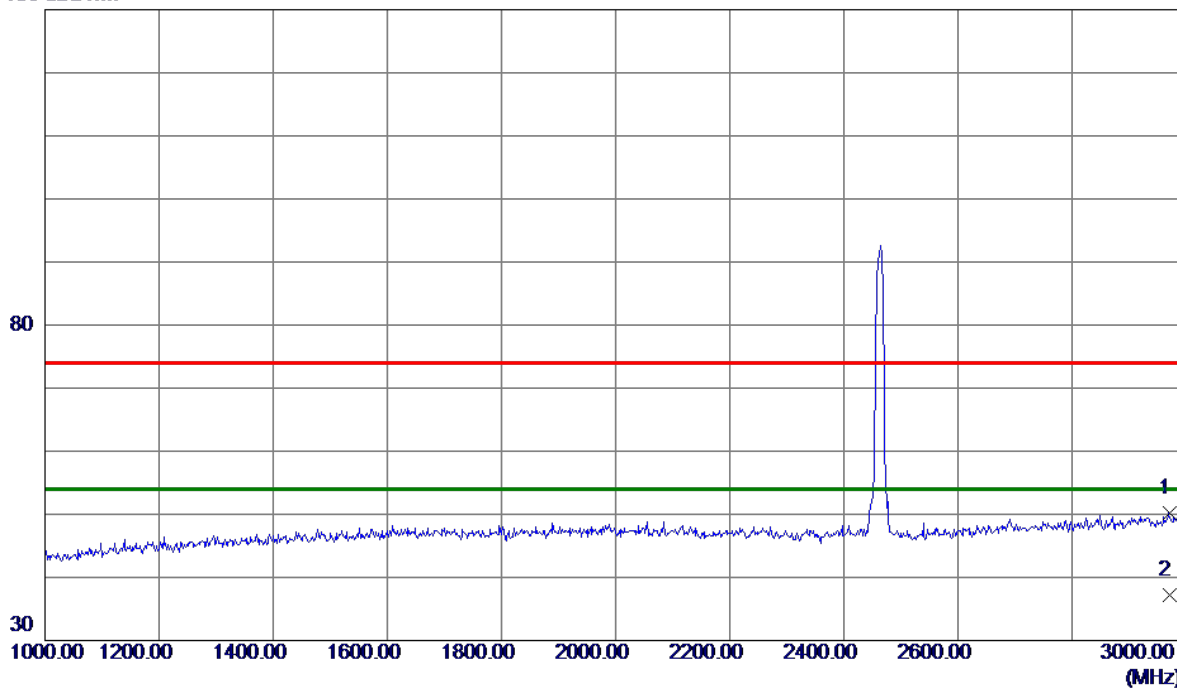


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2970.0000	40.41	9.76	50.17	74.00	-23.83	Peak	
2 *	2970.0000	27.36	9.76	37.12	54.00	-16.88	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

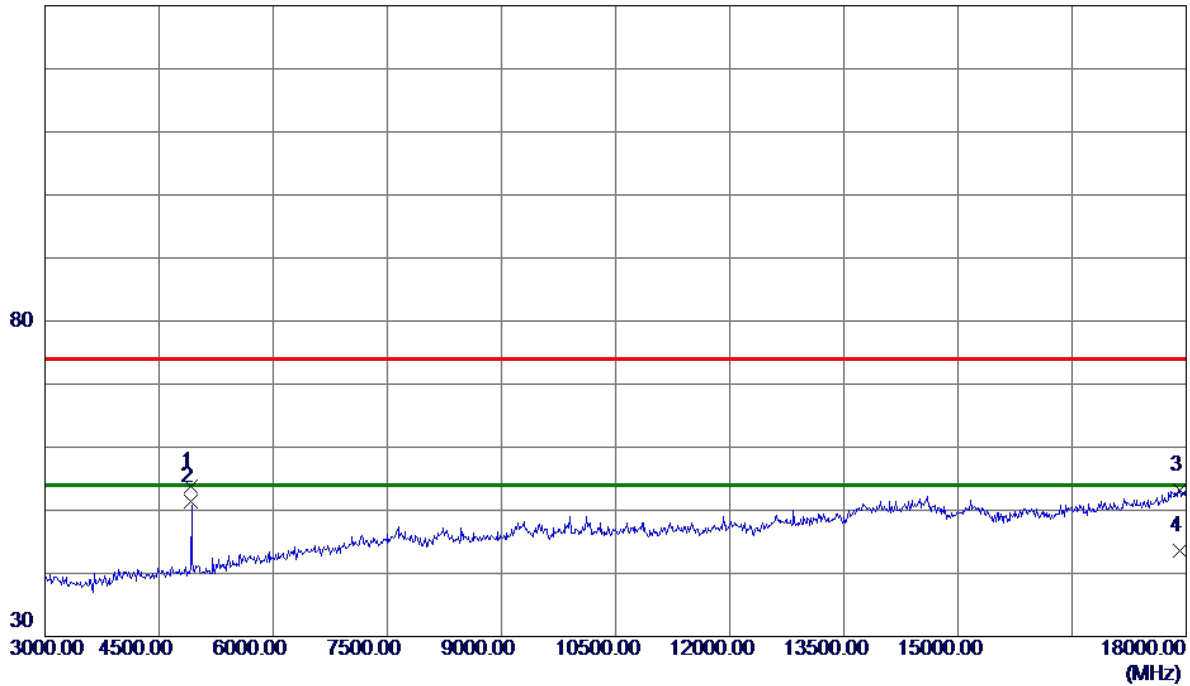


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8929	50.07	3.79	53.86	74.00	-20.14	Peak	
2 *	4924.0240	47.62	3.79	51.41	54.00	-2.59	AVG	
3	17910.0000	34.09	19.10	53.19	74.00	-20.81	Peak	
4	17910.0000	24.53	19.10	43.63	54.00	-10.37	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical


130 dBuV/m

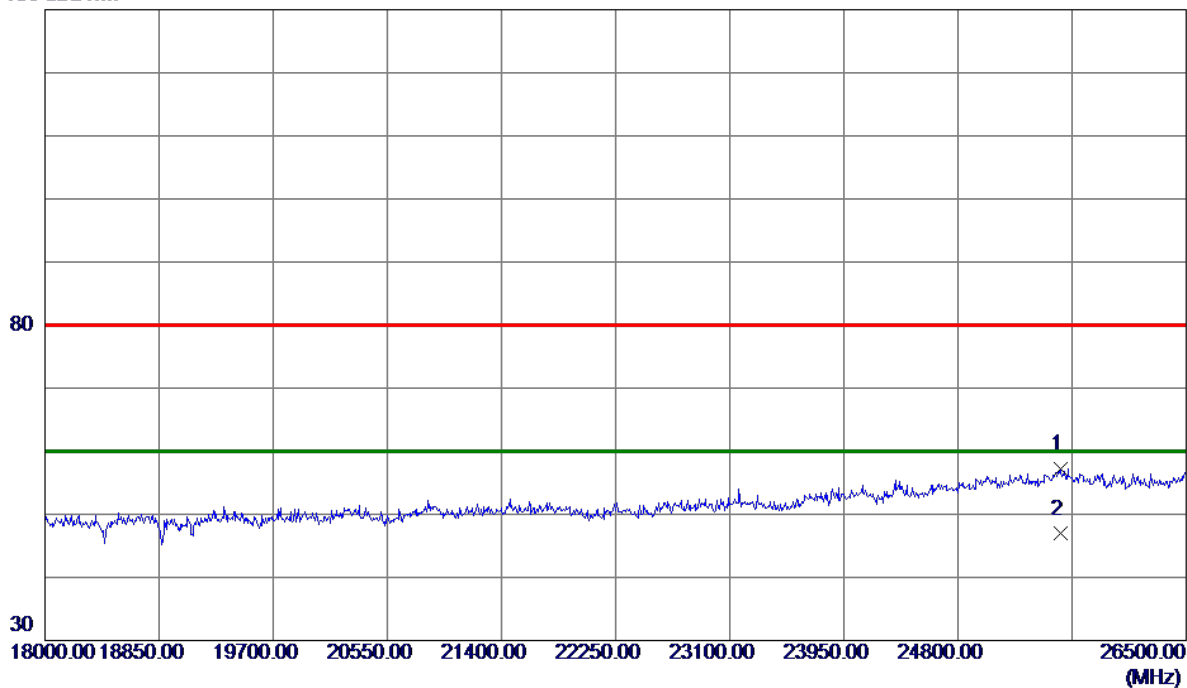

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25560.7500	40.03	17.26	57.29	80.00	-22.71	Peak	
2 *	25560.7500	29.64	17.26	46.90	60.00	-13.10	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

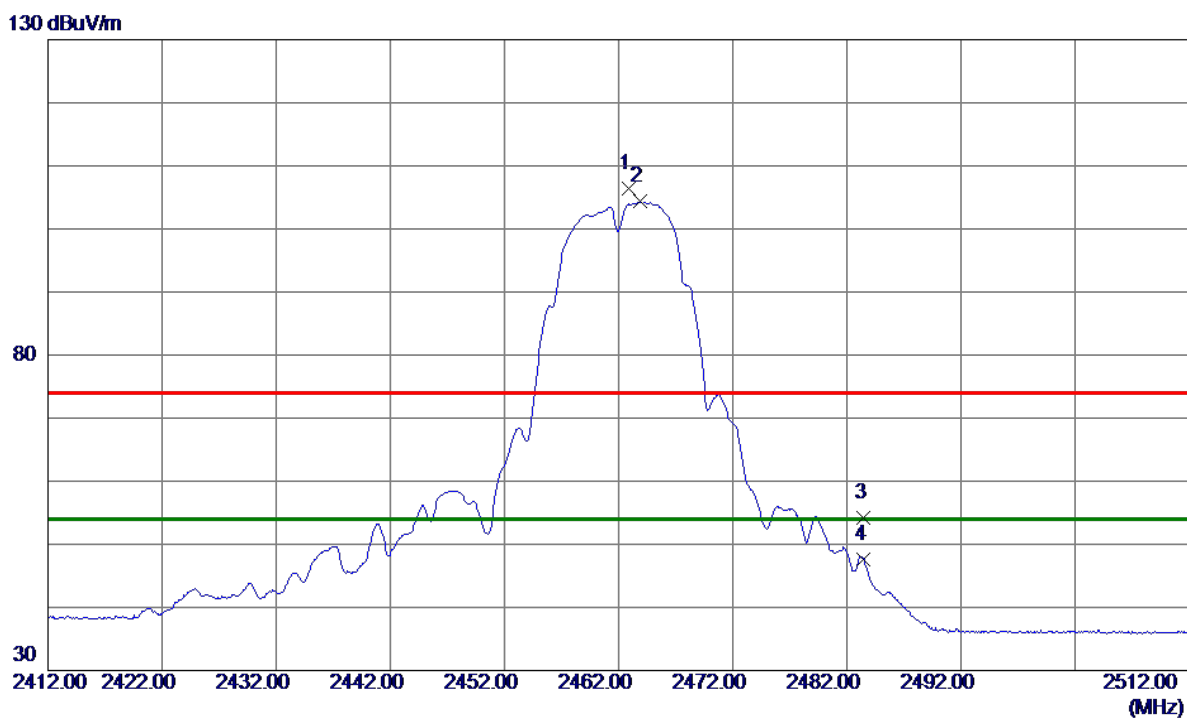


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.9000	99.72	6.61	106.33	74.00	32.33	Peak	No Limit
2 *	2463.8500	97.71	6.61	104.32	54.00	50.32	AVG	No Limit
3	2483.5000	47.65	6.61	54.26	74.00	-19.74	Peak	
4	2483.5000	40.97	6.61	47.58	54.00	-6.42	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

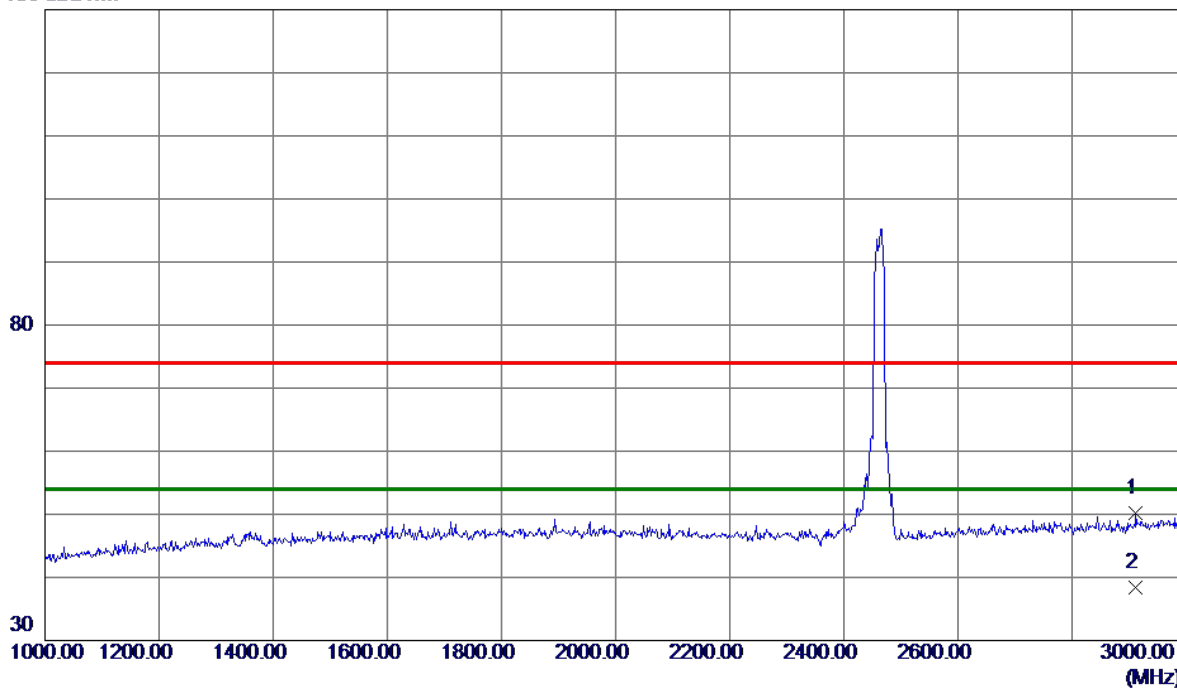


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2912.0000	40.82	9.37	50.19	74.00	-23.81	Peak	
2 *	2912.0000	28.98	9.37	38.35	54.00	-15.65	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

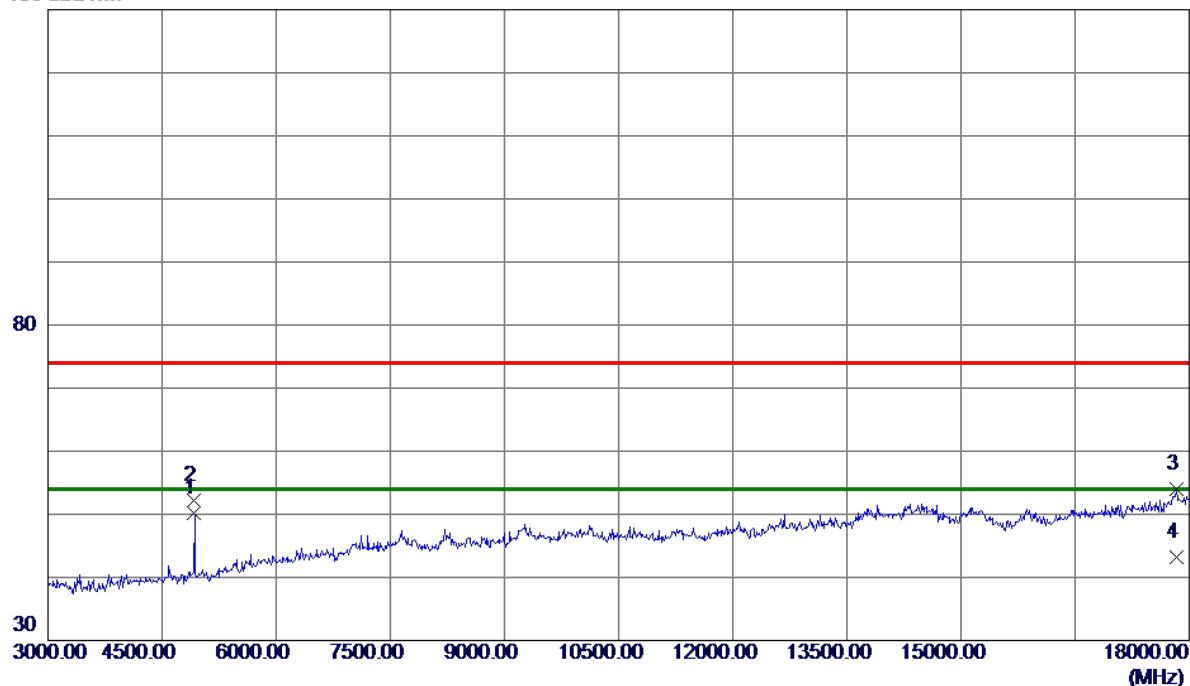


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9980	46.33	3.79	50.12	54.00	-3.88	AVG	
2	4924.0580	48.44	3.79	52.23	74.00	-21.77	Peak	
3	17835.0000	35.18	18.88	54.06	74.00	-19.94	Peak	
4	17835.0000	24.33	18.88	43.21	54.00	-10.79	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

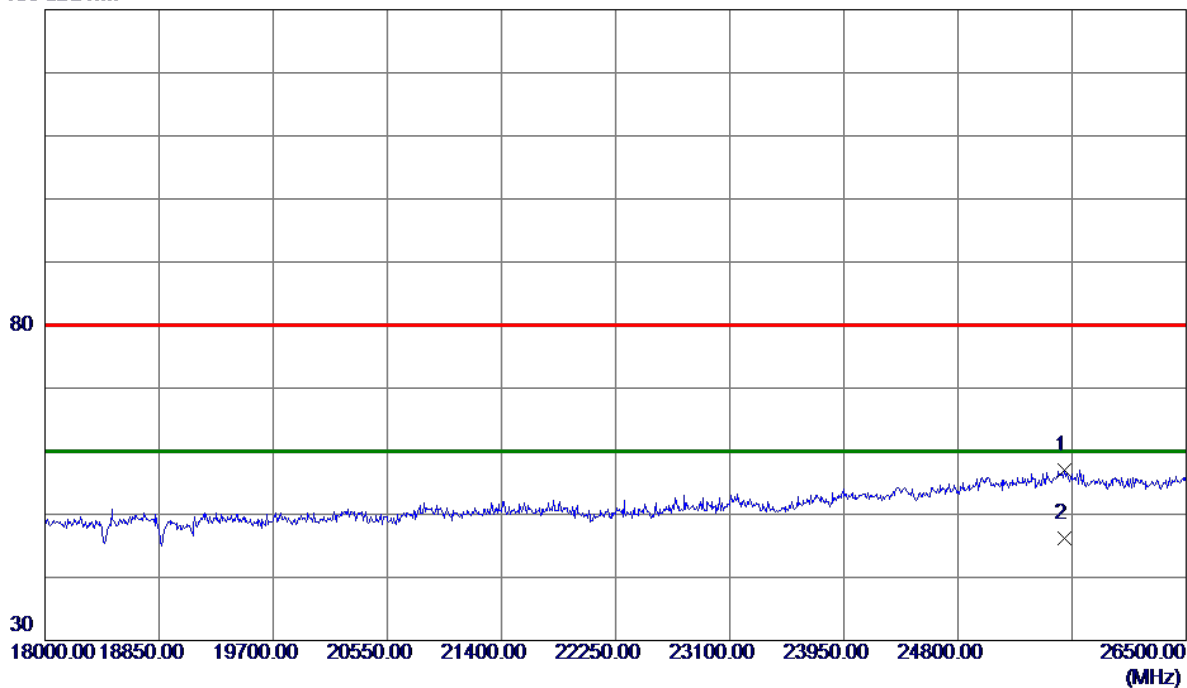


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25594.7500	39.79	17.22	57.01	80.00	-22.99	Peak	
2 *	25594.7500	29.01	17.22	46.23	60.00	-13.77	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

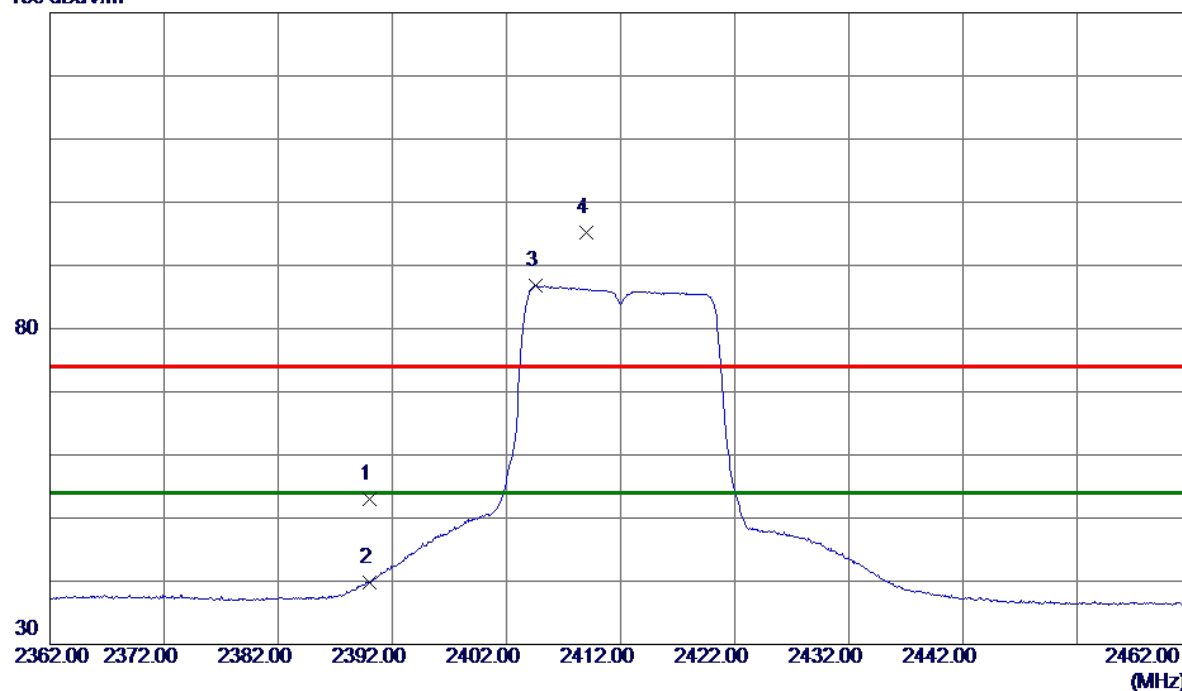


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.45	6.62	53.07	74.00	-20.93	Peak	
2	2390.0000	33.22	6.62	39.84	54.00	-14.16	AVG	
3 *	2404.6000	80.17	6.62	86.79	54.00	32.79	AVG	No Limit
4	2408.9500	88.61	6.62	95.23	74.00	21.23	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

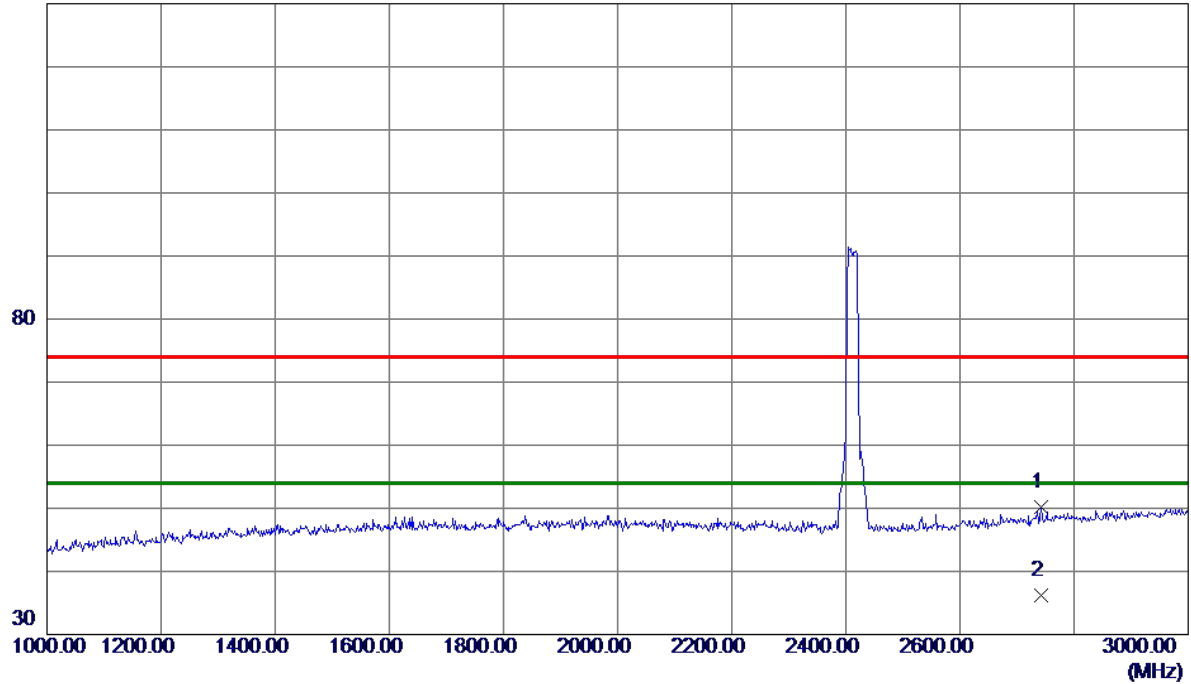


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2742.0000	41.88	8.23	50.11	74.00	-23.89	Peak	
2 *	2742.0000	27.98	8.23	36.21	54.00	-17.79	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

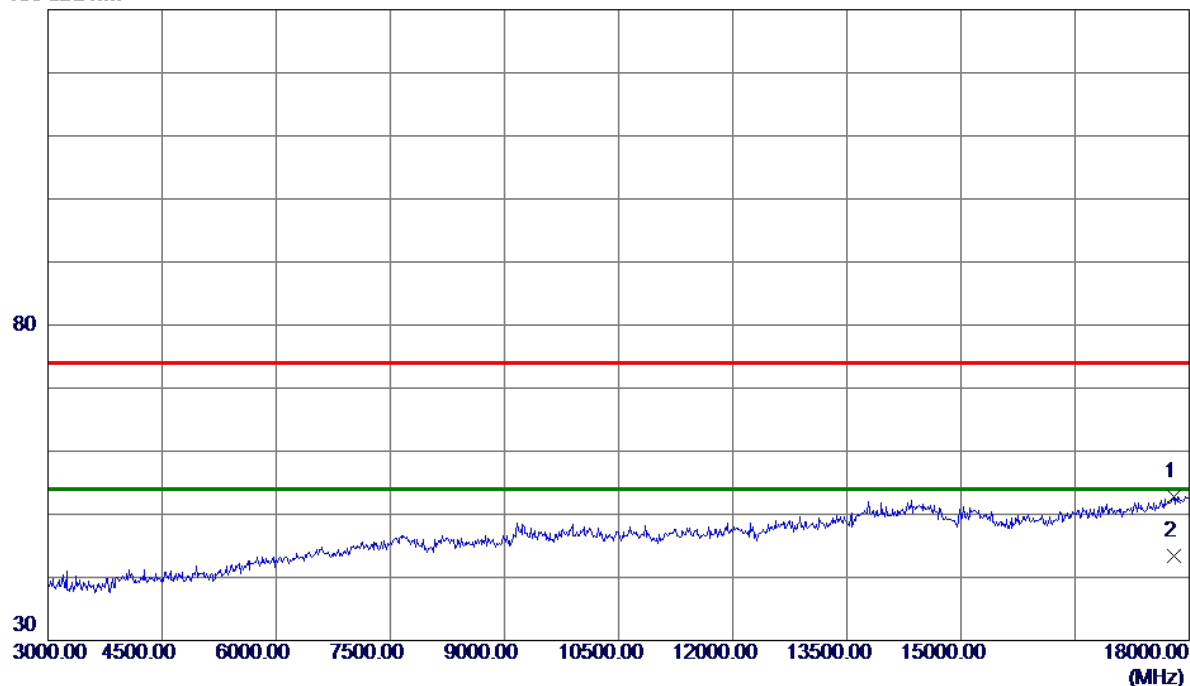


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17797.5000	34.06	18.77	52.83	74.00	-21.17	Peak	
2 *	17797.5000	24.70	18.77	43.47	54.00	-10.53	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical


130 dBuV/m

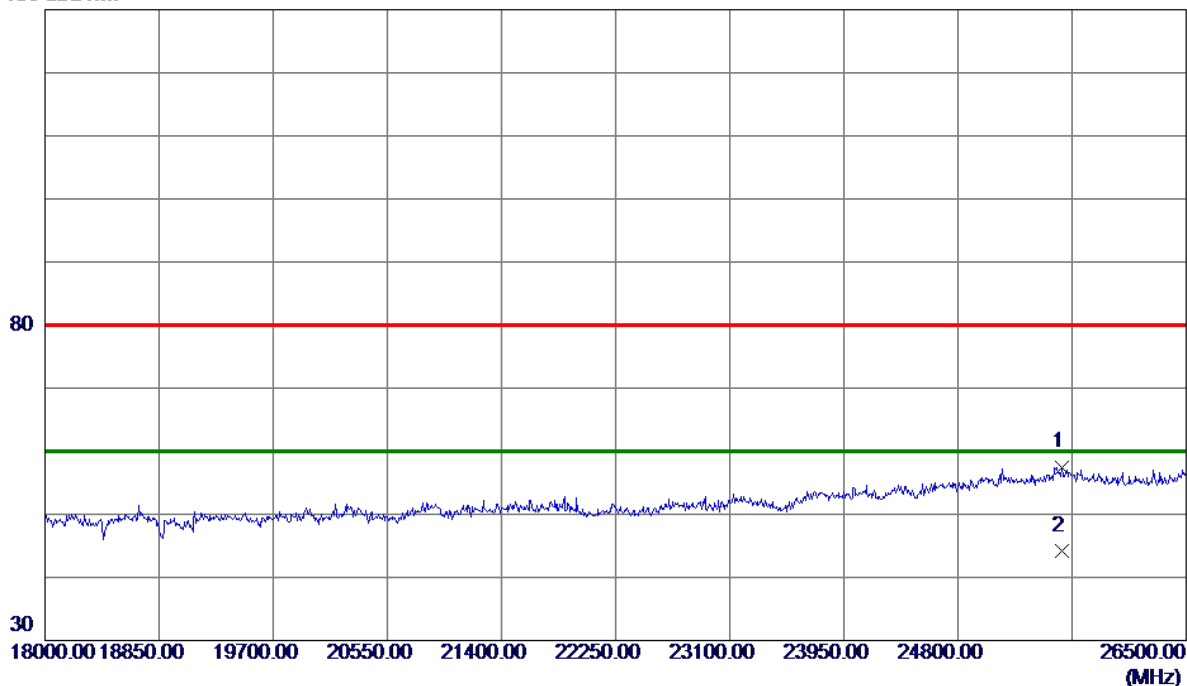

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25573.5000	40.26	17.24	57.50	80.00	-22.50	Peak	
2 *	25573.5000	26.98	17.24	44.22	60.00	-15.78	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

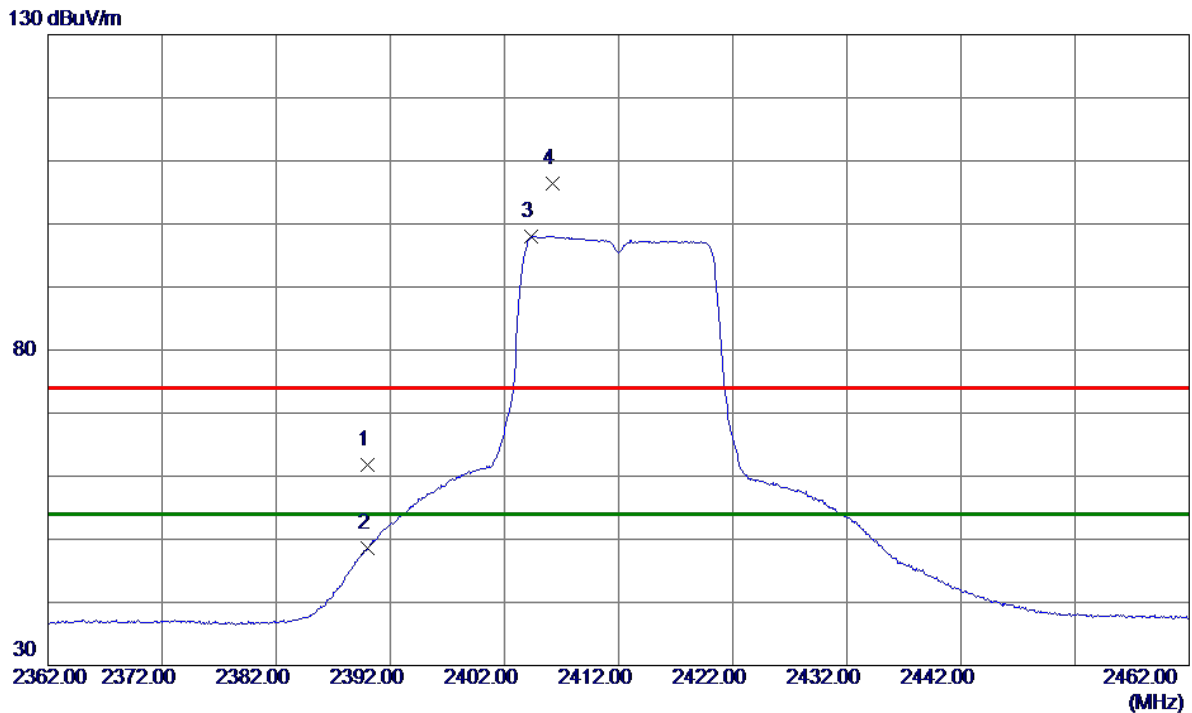


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.14	6.62	61.76	74.00	-12.24	Peak	
2	2390.0000	41.92	6.62	48.54	54.00	-5.46	AVG	
3 *	2404.3500	91.41	6.62	98.03	54.00	44.03	AVG	No Limit
4	2406.2500	99.76	6.62	106.38	74.00	32.38	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

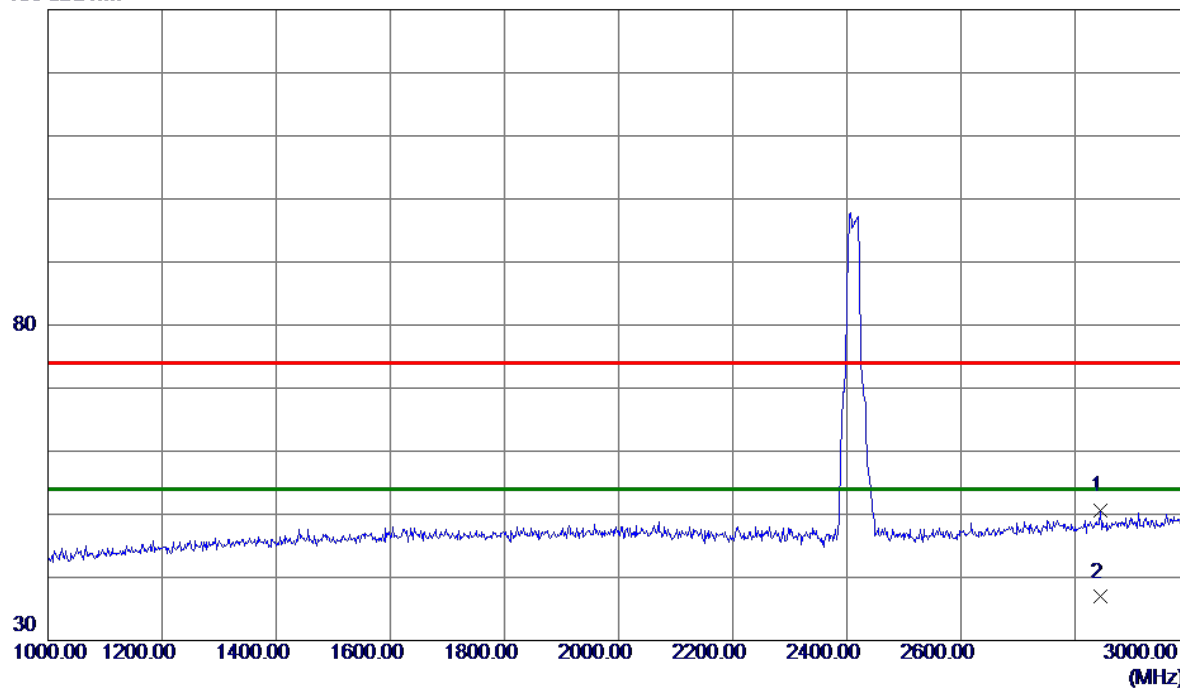


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2845.0000	41.62	8.92	50.54	74.00	-23.46	Peak	
2 *	2845.0000	27.98	8.92	36.90	54.00	-17.10	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

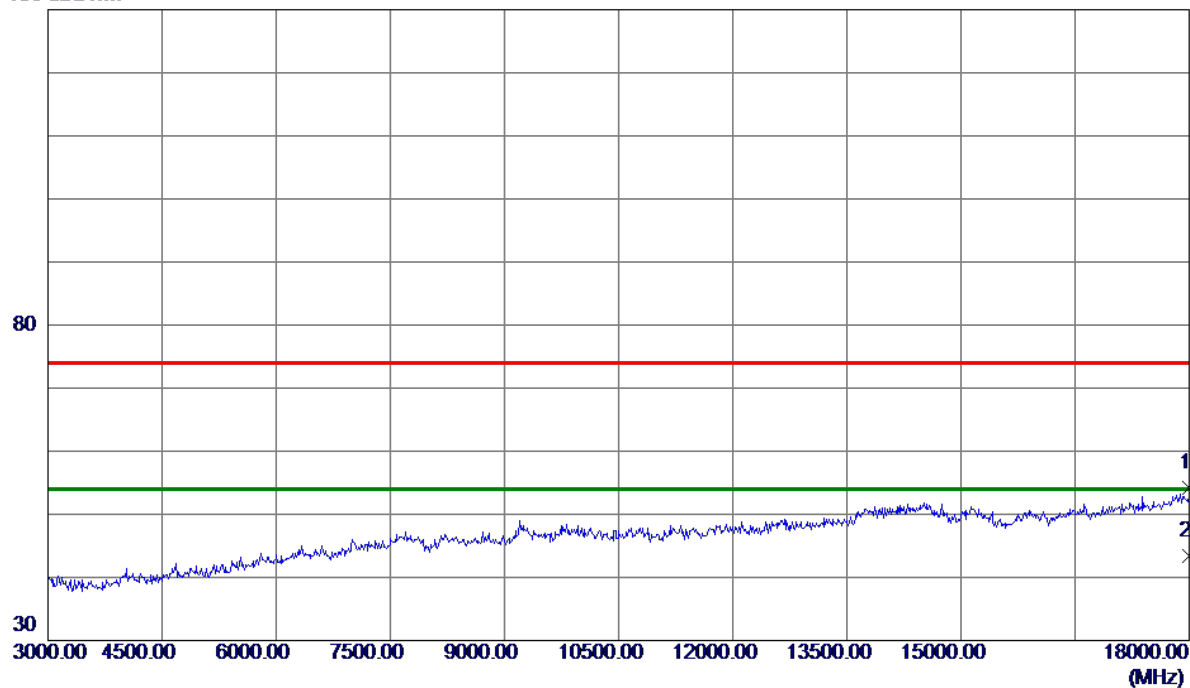


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	18000.0000	34.76	19.37	54.13	74.00	-19.87	Peak	
2 *	18000.0000	24.11	19.37	43.48	54.00	-10.52	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal


130 dBuV/m

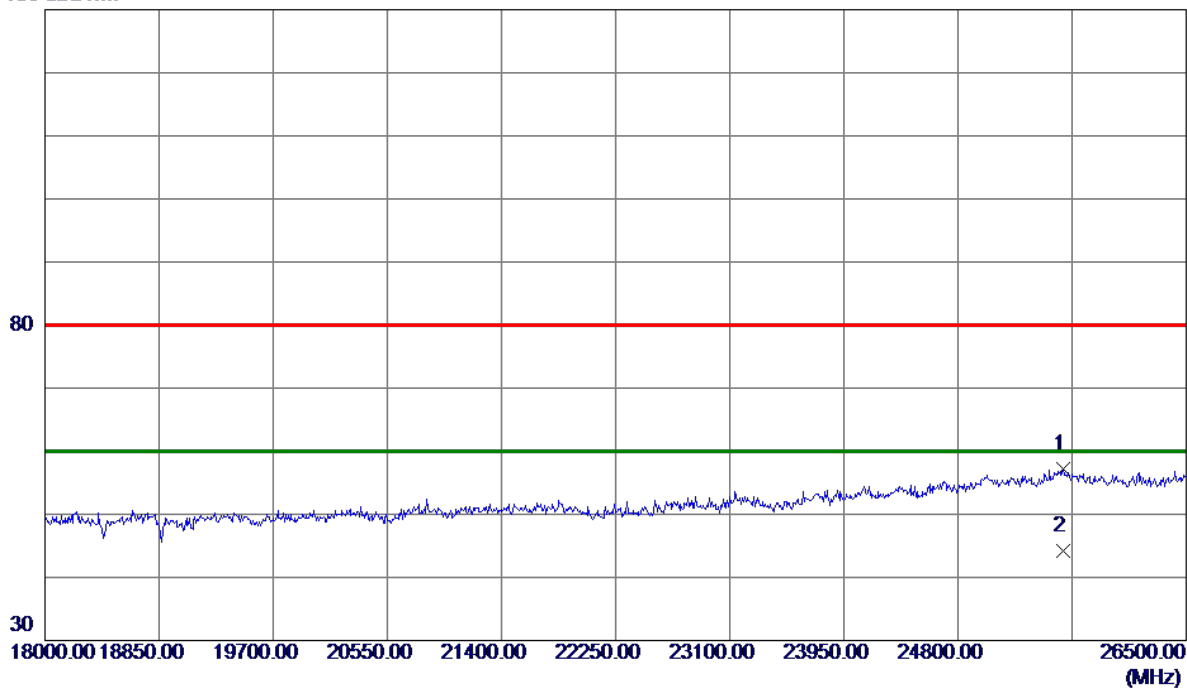

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25586.2500	40.03	17.23	57.26	80.00	-22.74	Peak	
2 *	25586.2500	26.91	17.23	44.14	60.00	-15.86	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz


Vertical

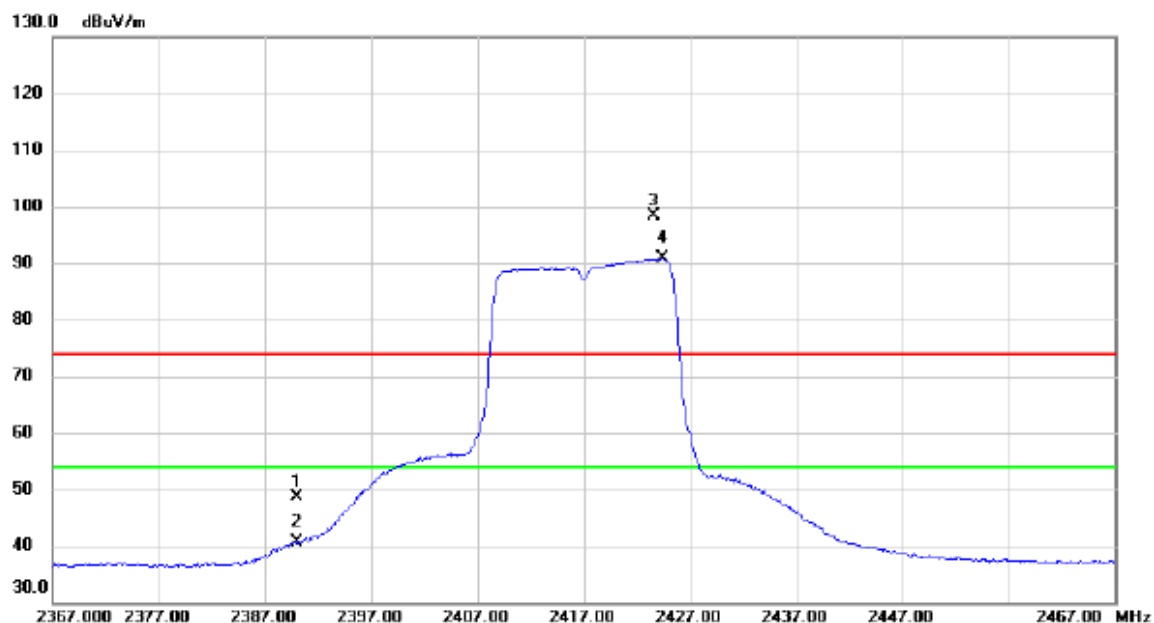

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.12	6.62	48.74	74.00	-25.26	peak	
2		2390.000	34.05	6.62	40.67	54.00	-13.33	AVG	
3	X	2423.650	91.88	6.62	98.50	74.00	24.50	peak	
4	*	2424.400	84.14	6.62	90.76	54.00	36.76	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz

Horizontal

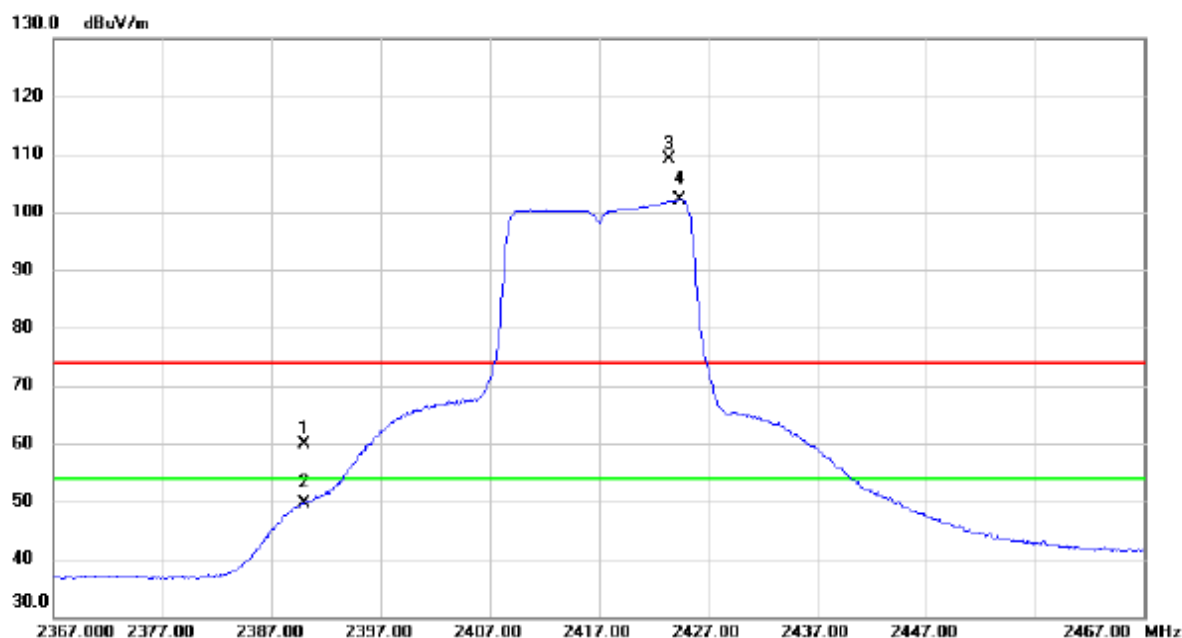


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	53.17	6.62	59.79	74.00	-14.21	peak	
2		2390.000	43.12	6.62	49.74	54.00	-4.26	AVG	
3	X	2423.450	102.56	6.62	109.18	74.00	35.18	peak	
4	*	2424.400	95.60	6.62	102.22	54.00	48.22	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

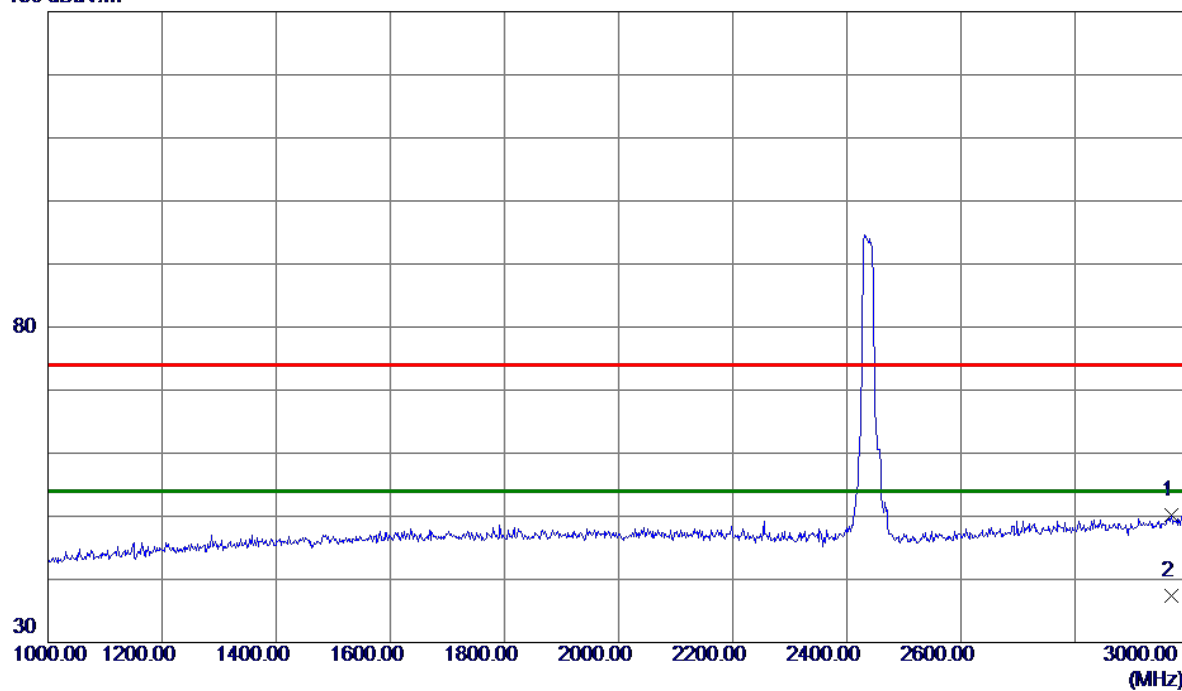


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2968.0000	40.46	9.75	50.21	74.00	-23.79	Peak	
2 *	2968.0000	27.65	9.75	37.40	54.00	-16.60	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

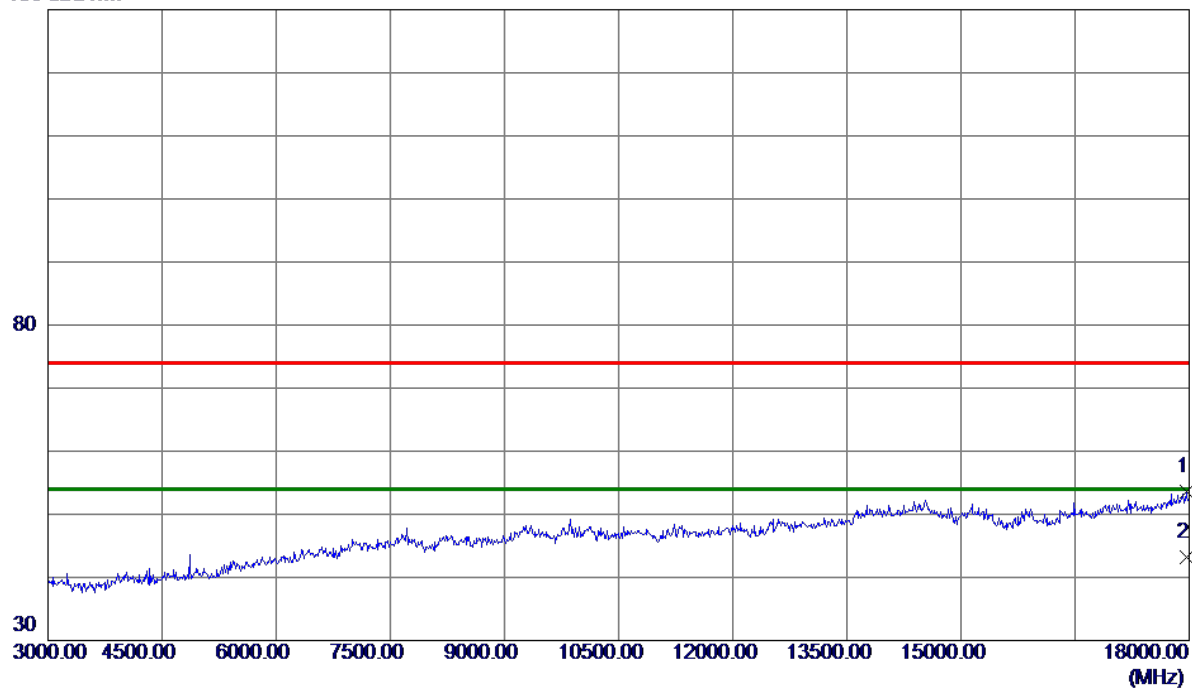


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17962.5000	34.41	19.26	53.67	74.00	-20.33	Peak	
2 *	17962.5000	23.97	19.26	43.23	54.00	-10.77	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

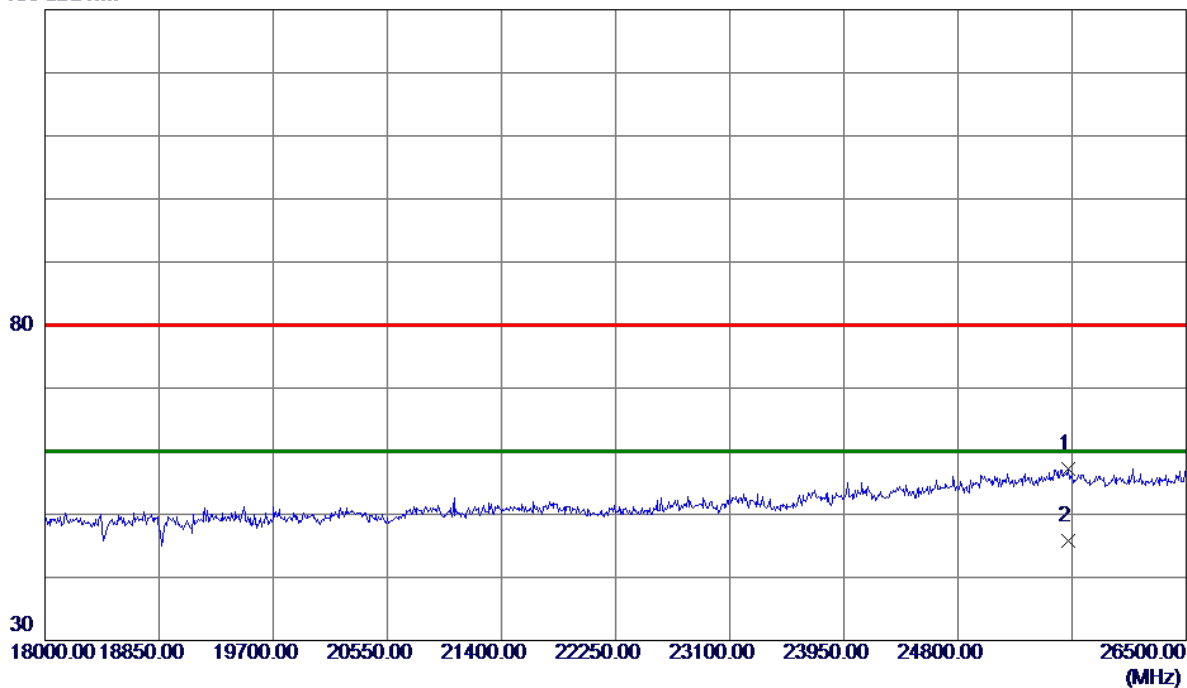


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25624.5000	40.06	17.18	57.24	80.00	-22.76	Peak	
2 *	25624.5000	28.66	17.18	45.84	60.00	-14.16	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

130 dBuV/m

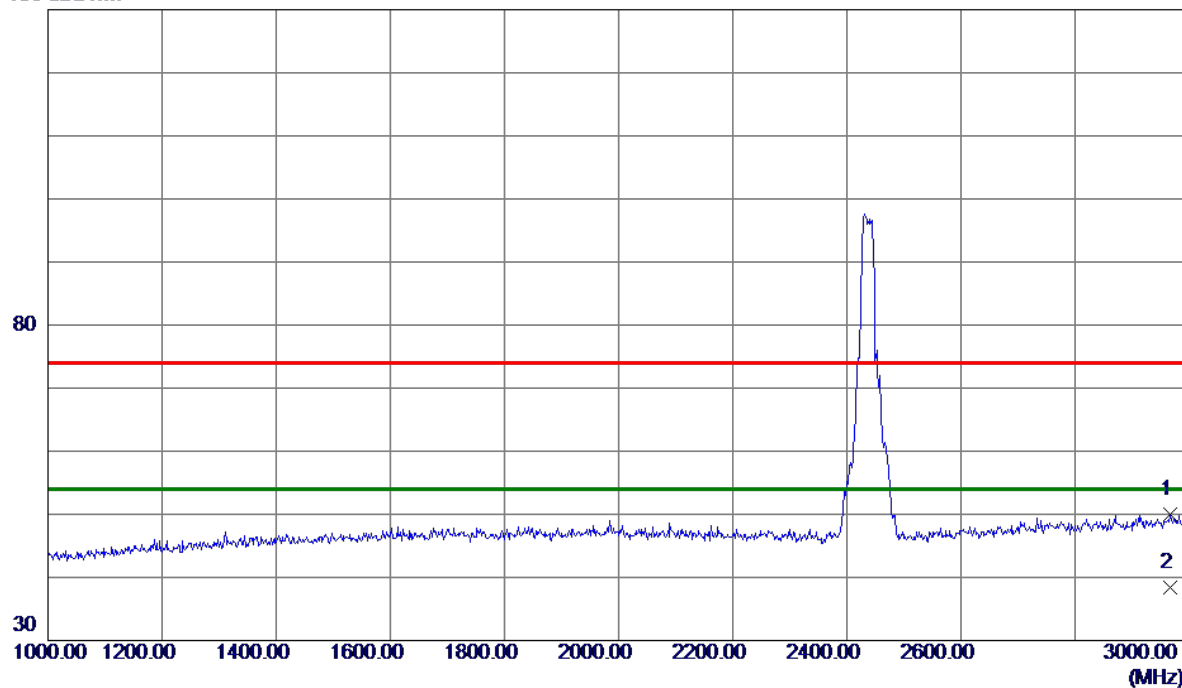


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2967.0000	40.20	9.74	49.94	74.00	-24.06	Peak	
2 *	2967.0000	28.66	9.74	38.40	54.00	-15.60	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

130 dBuV/m

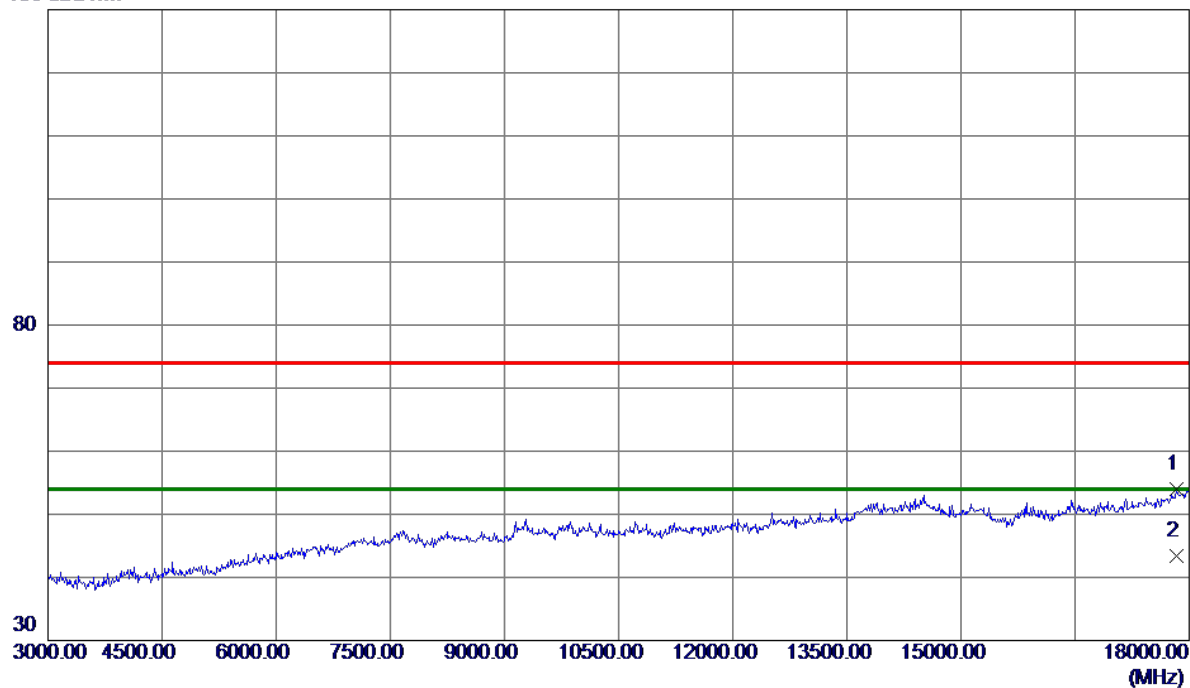


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17835.0000	35.21	18.88	54.09	74.00	-19.91	Peak	
2 *	17835.0000	24.47	18.88	43.35	54.00	-10.65	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal


130 dBuV/m

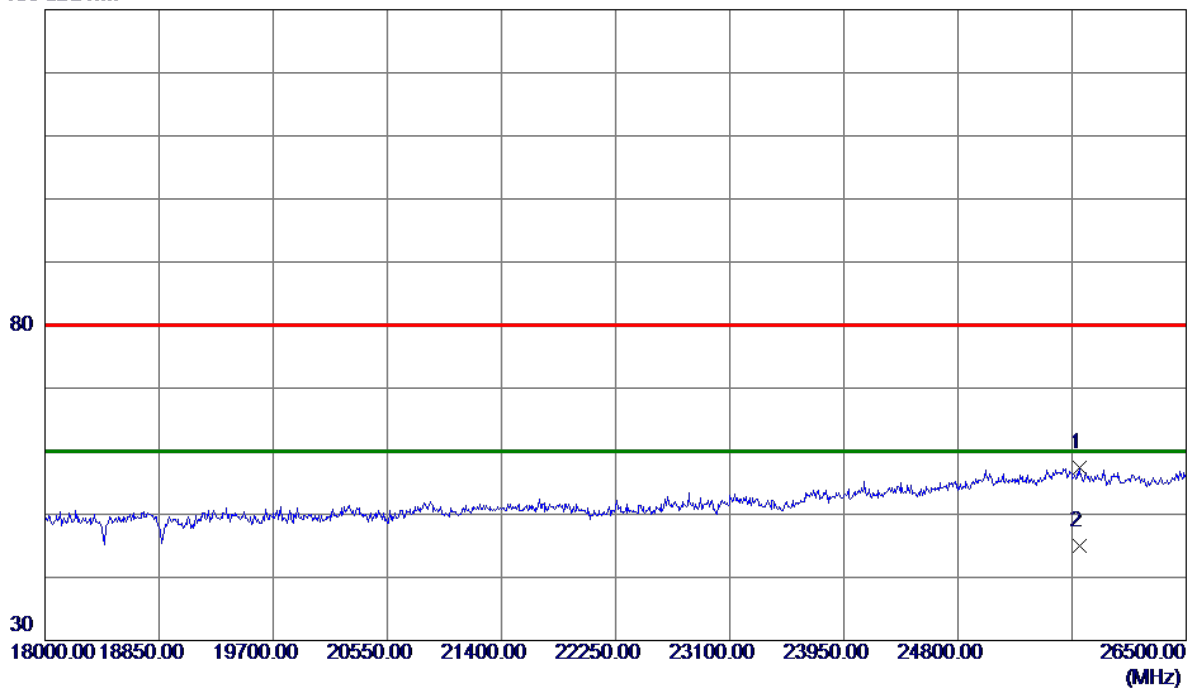

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25705.2500	40.30	17.09	57.39	80.00	-22.61	Peak	
2 *	25705.2500	27.83	17.09	44.92	60.00	-15.08	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz


Vertical

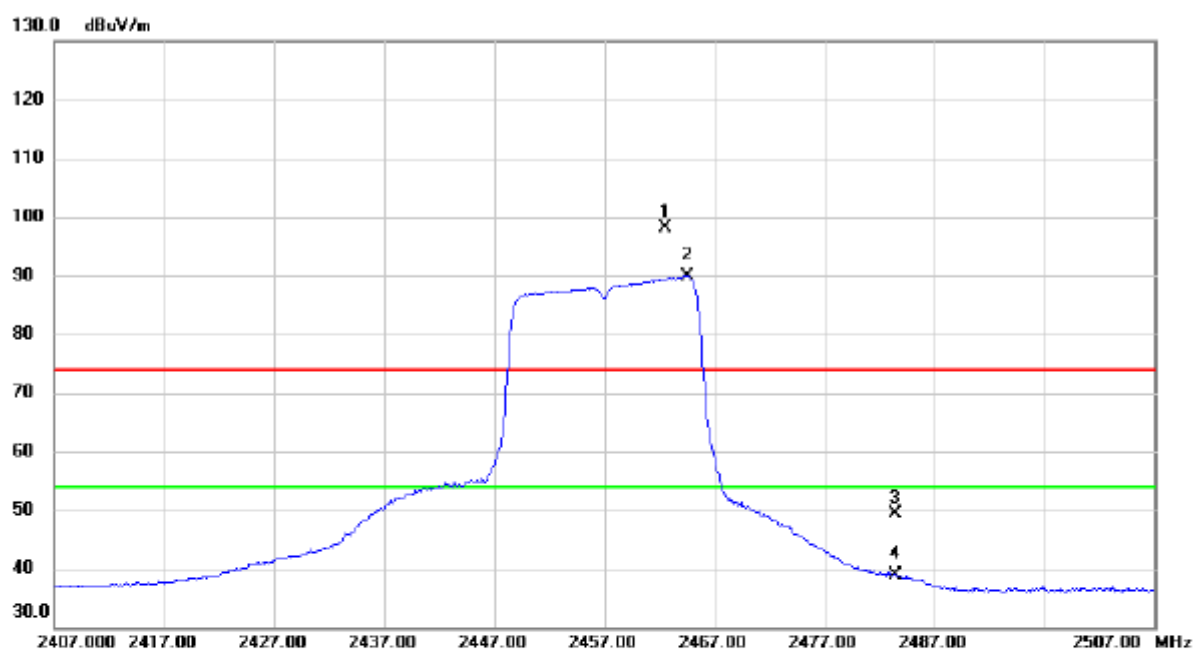

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.550	91.52	6.61	98.13	74.00	24.13	peak	
2	*	2464.600	83.29	6.61	89.90	54.00	35.90	AVG	
3		2483.500	42.82	6.61	49.43	74.00	-24.57	peak	
4		2483.500	32.35	6.61	38.96	54.00	-15.04	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz

Horizontal

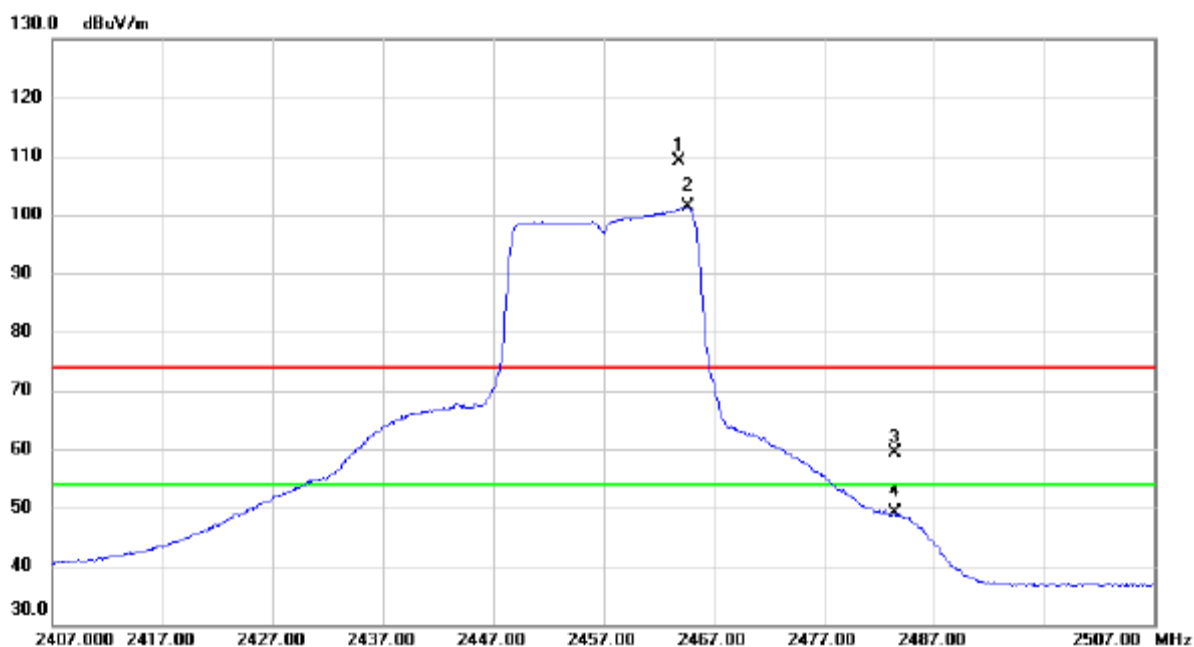


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.800	102.44	6.61	109.05	74.00	35.05	peak	
2	*	2464.650	94.70	6.61	101.31	54.00	47.31	AVG	
3		2483.500	52.86	6.61	59.47	74.00	-14.53	peak	
4		2483.500	42.56	6.61	49.17	54.00	-4.83	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

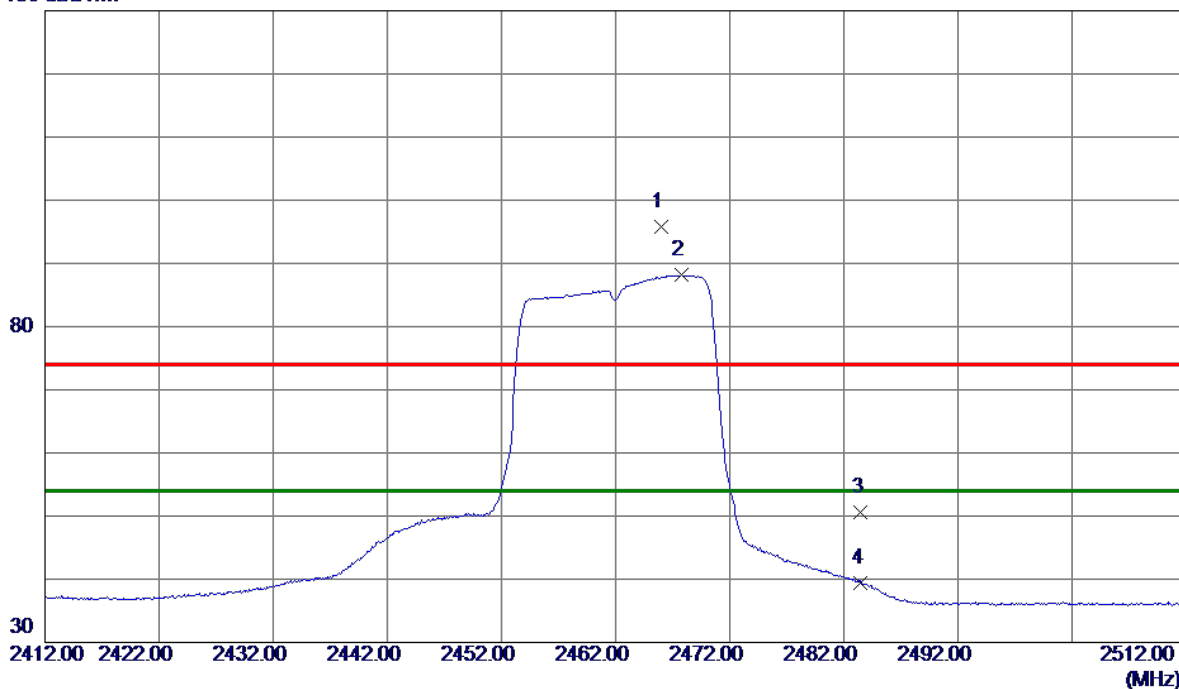


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2466.0000	89.27	6.61	95.88	74.00	21.88	Peak	No Limit
2 *	2467.8000	81.50	6.61	88.11	54.00	34.11	AVG	No Limit
3	2483.5000	43.97	6.61	50.58	74.00	-23.42	Peak	
4	2483.5000	32.77	6.61	39.38	54.00	-14.62	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

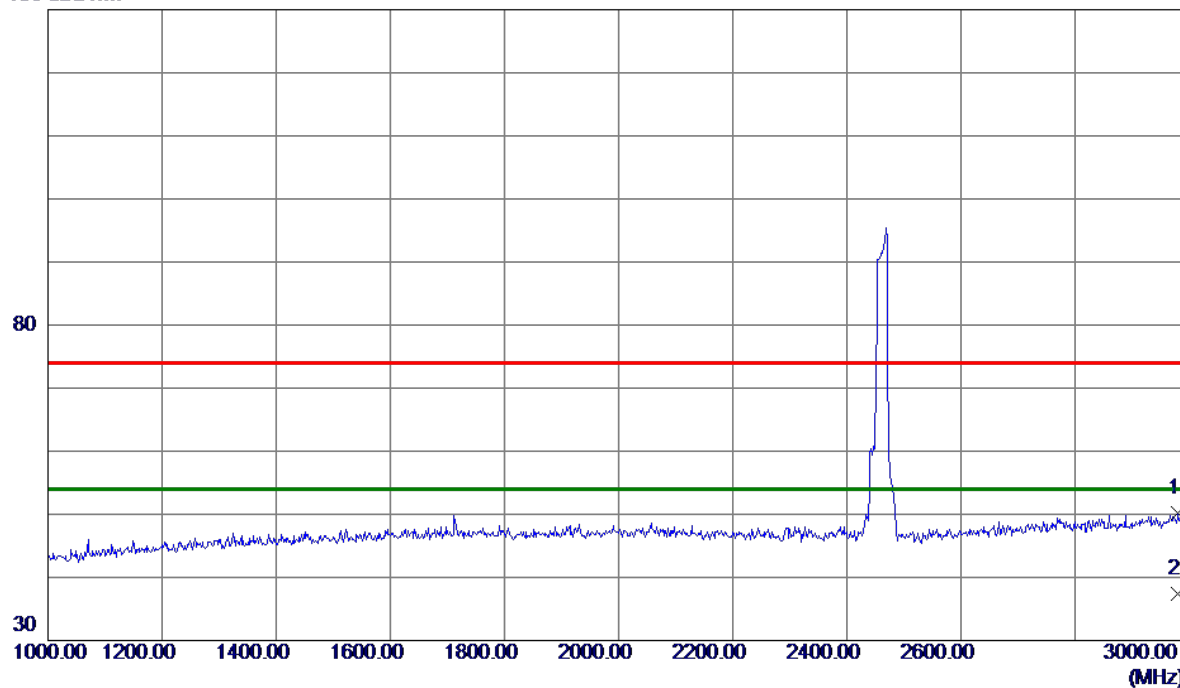


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2980.0000	40.34	9.83	50.17	74.00	-23.83	Peak	
2 *	2980.0000	27.54	9.83	37.37	54.00	-16.63	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

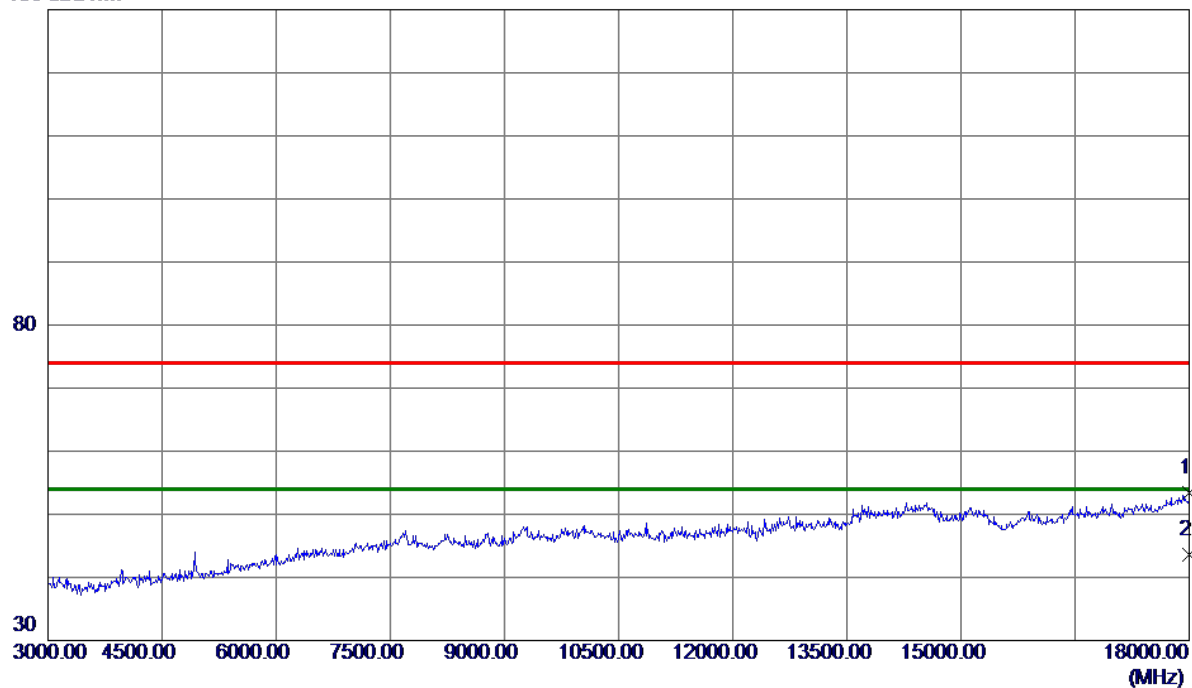


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	18000.0000	34.03	19.37	53.40	74.00	-20.60	Peak	
2 *	18000.0000	24.19	19.37	43.56	54.00	-10.44	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical


130 dBuV/m

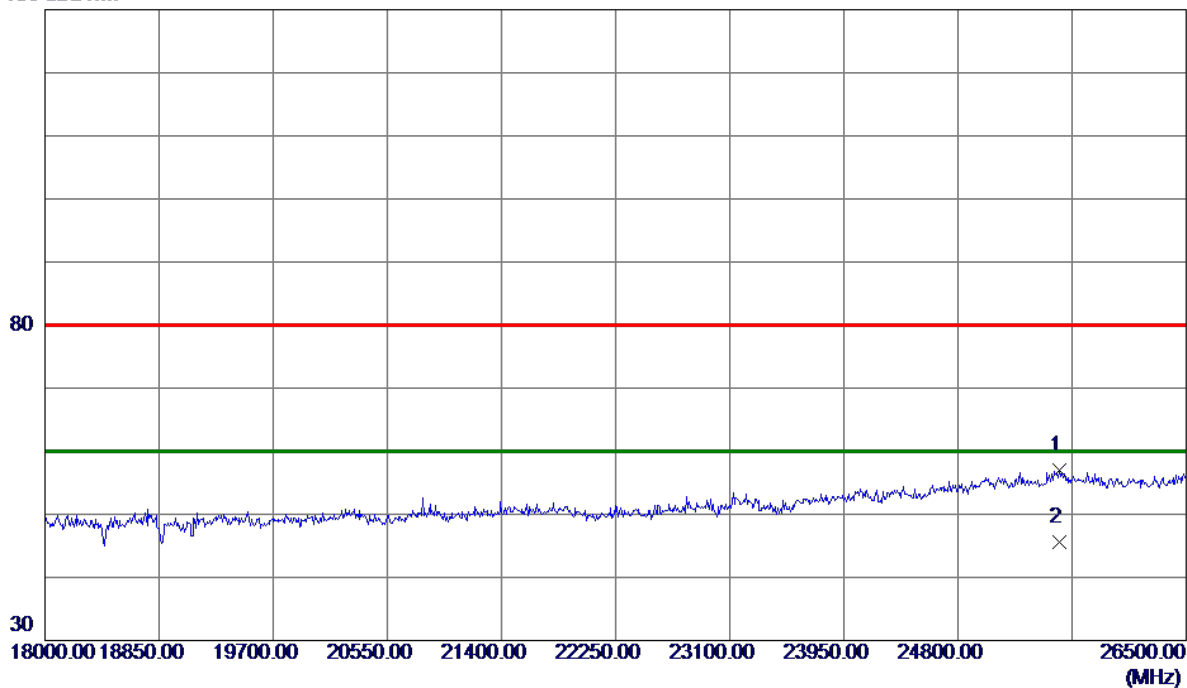

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25556.5000	39.76	17.26	57.02	80.00	-22.98	Peak	
2 *	25556.5000	28.41	17.26	45.67	60.00	-14.33	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

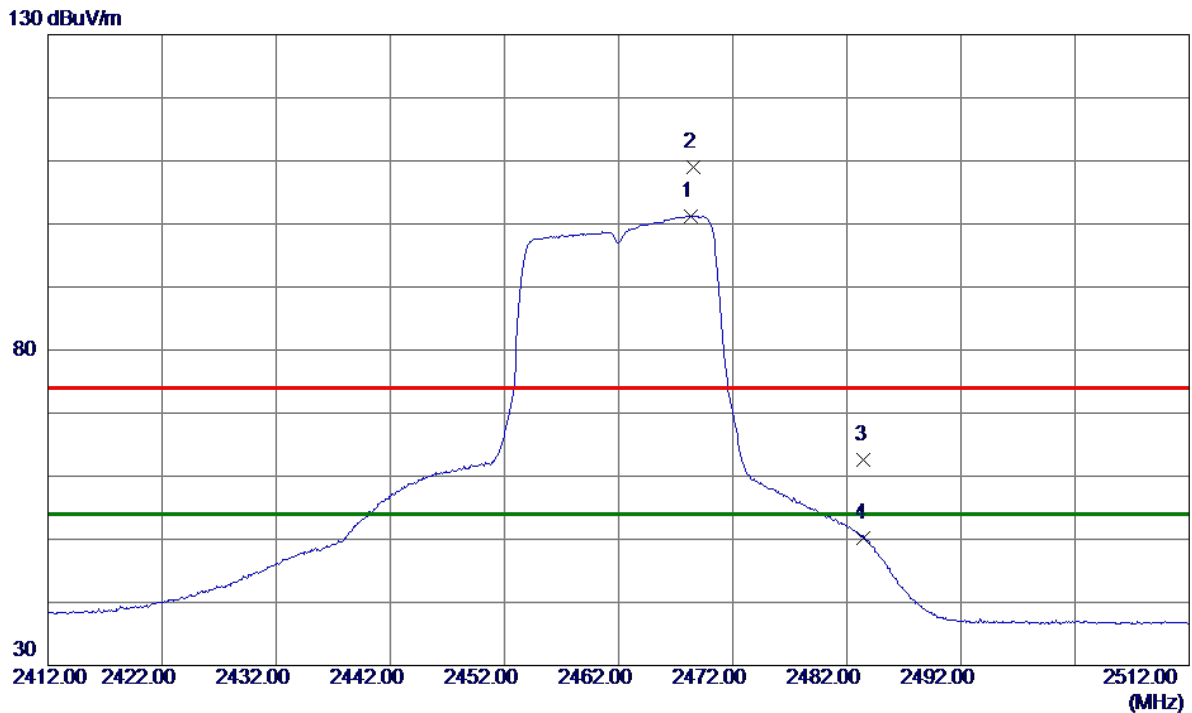


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2468.3500	94.68	6.61	101.29	54.00	47.29	AVG	No Limit
2	2468.5500	102.39	6.61	109.00	74.00	35.00	Peak	No Limit
3	2483.5000	55.97	6.61	62.58	74.00	-11.42	Peak	
4	2483.5000	43.53	6.61	50.14	54.00	-3.86	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

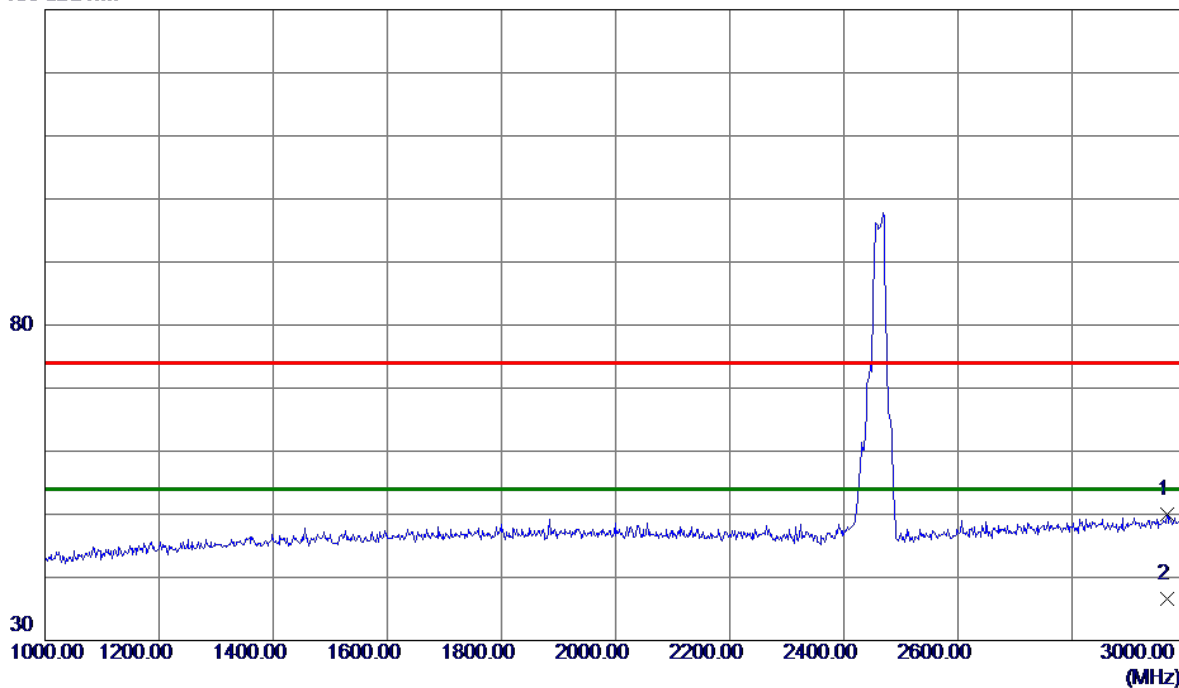


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2966.0000	40.23	9.73	49.96	74.00	-24.04	Peak	
2 *	2966.0000	26.89	9.73	36.62	54.00	-17.38	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

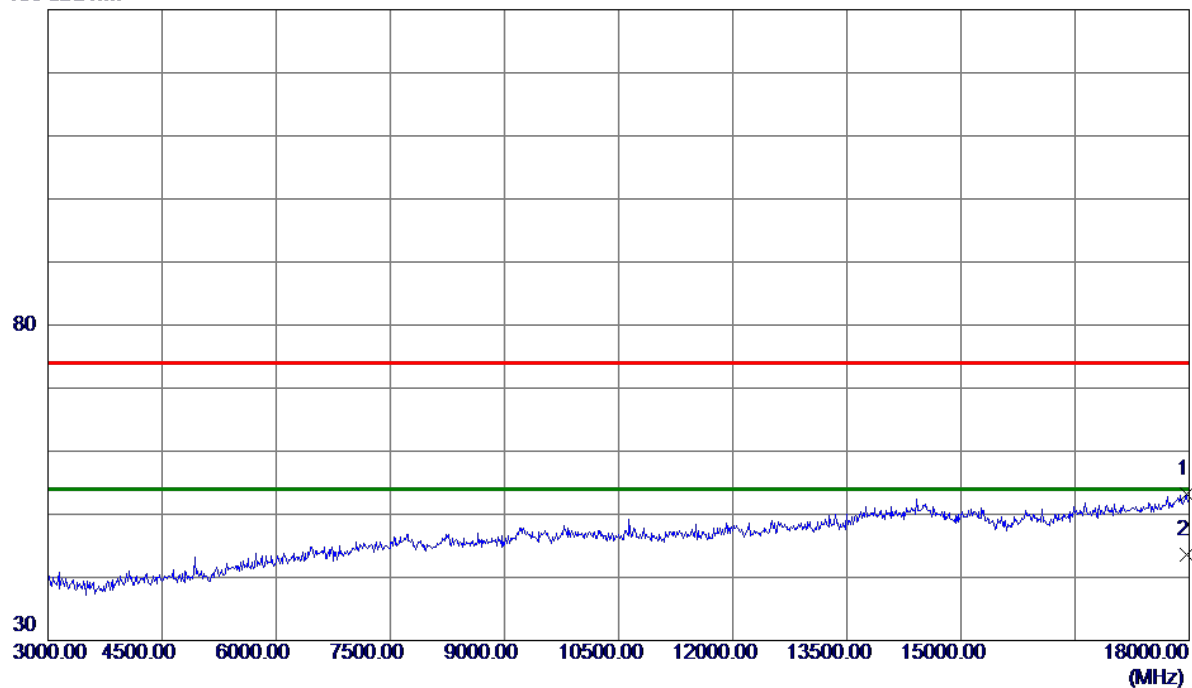


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17962.5000	34.01	19.26	53.27	74.00	-20.73	Peak	
2 *	17962.5000	24.33	19.26	43.59	54.00	-10.41	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

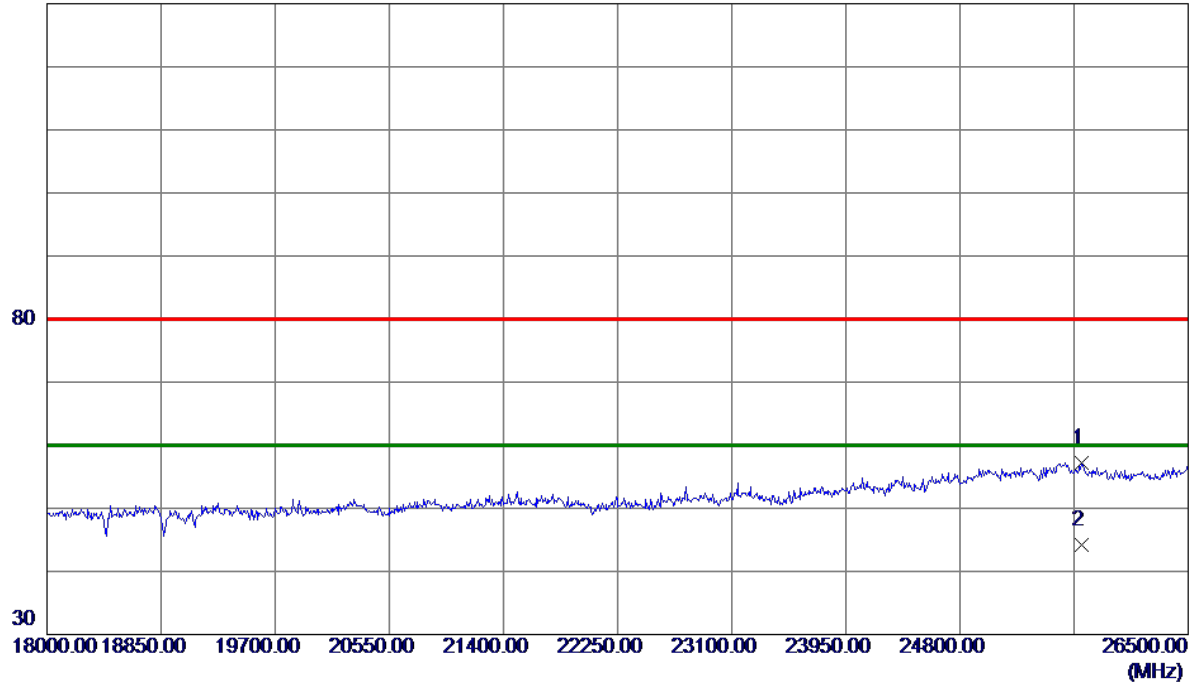


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25709.5000	40.15	17.09	57.24	80.00	-22.76	Peak	
2 *	25709.5000	27.15	17.09	44.24	60.00	-15.76	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

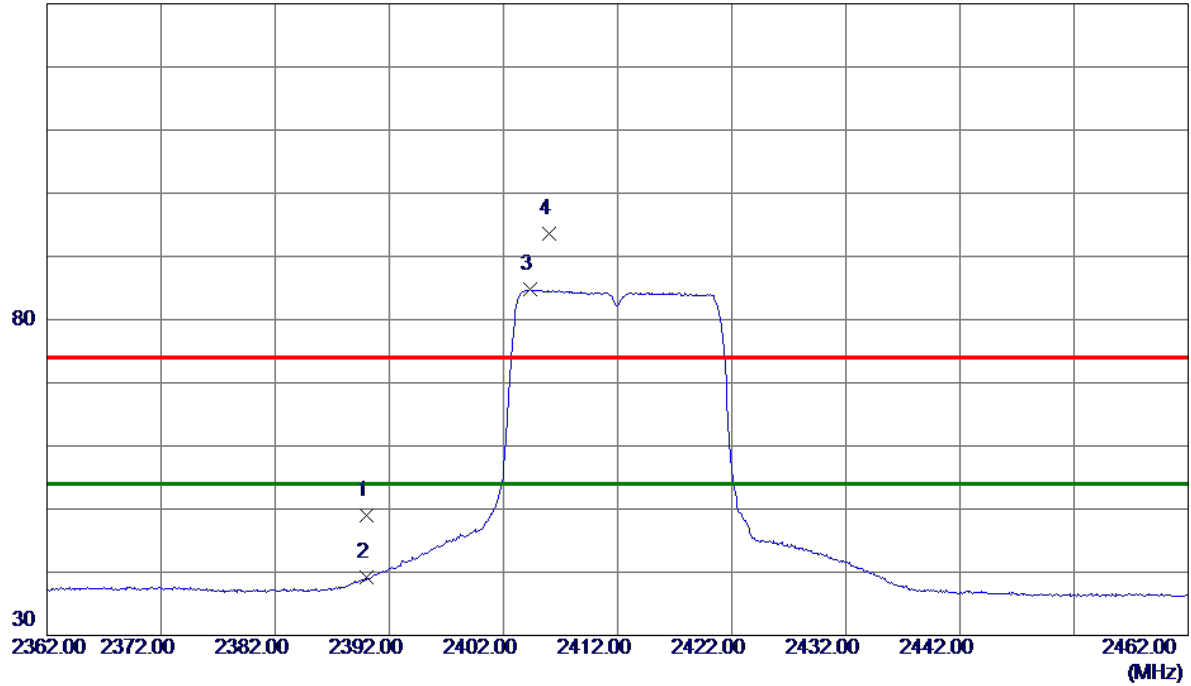


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	42.31	6.62	48.93	74.00	-25.07	Peak	
2	2390.0000	32.64	6.62	39.26	54.00	-14.74	AVG	
3 *	2404.3500	78.16	6.62	84.78	54.00	30.78	AVG	No Limit
4	2405.9500	86.93	6.62	93.55	74.00	19.55	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

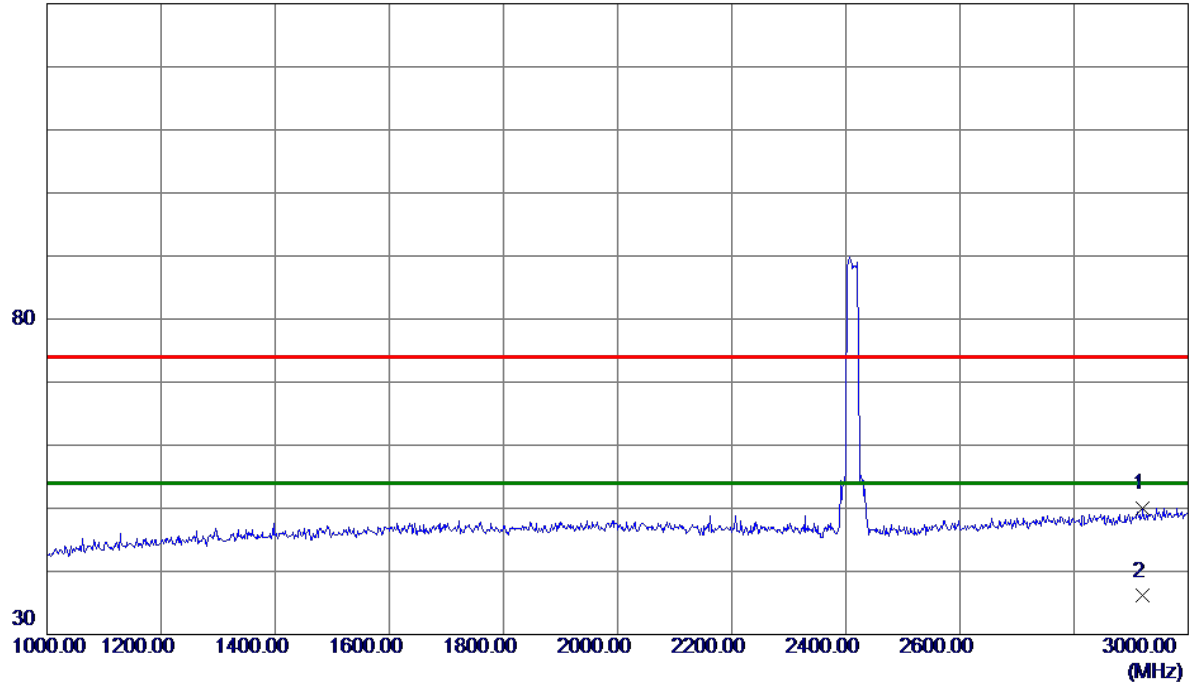


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2920.0000	40.61	9.42	50.03	74.00	-23.97	Peak	
2 *	2920.0000	26.68	9.42	36.10	54.00	-17.90	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

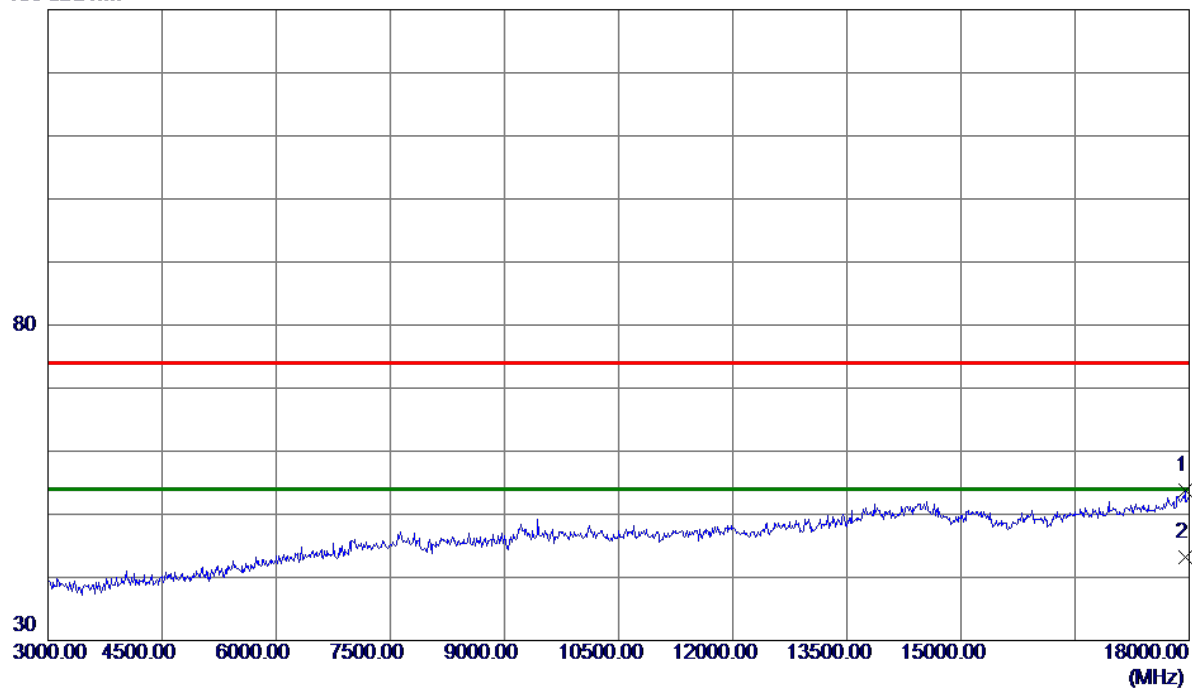


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17947.5000	34.68	19.21	53.89	74.00	-20.11	Peak	
2 *	17947.5000	23.97	19.21	43.18	54.00	-10.82	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical


130 dBuV/m

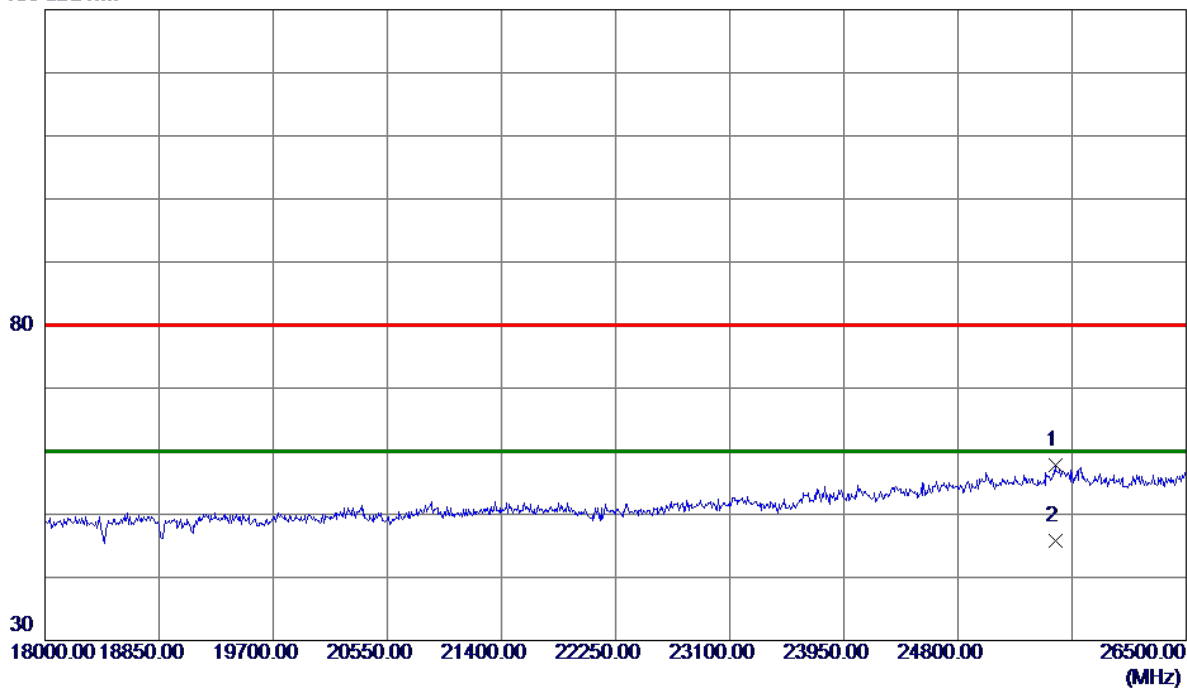

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25526.7500	40.58	17.29	57.87	80.00	-22.13	Peak	
2 *	25526.7500	28.45	17.29	45.74	60.00	-14.26	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

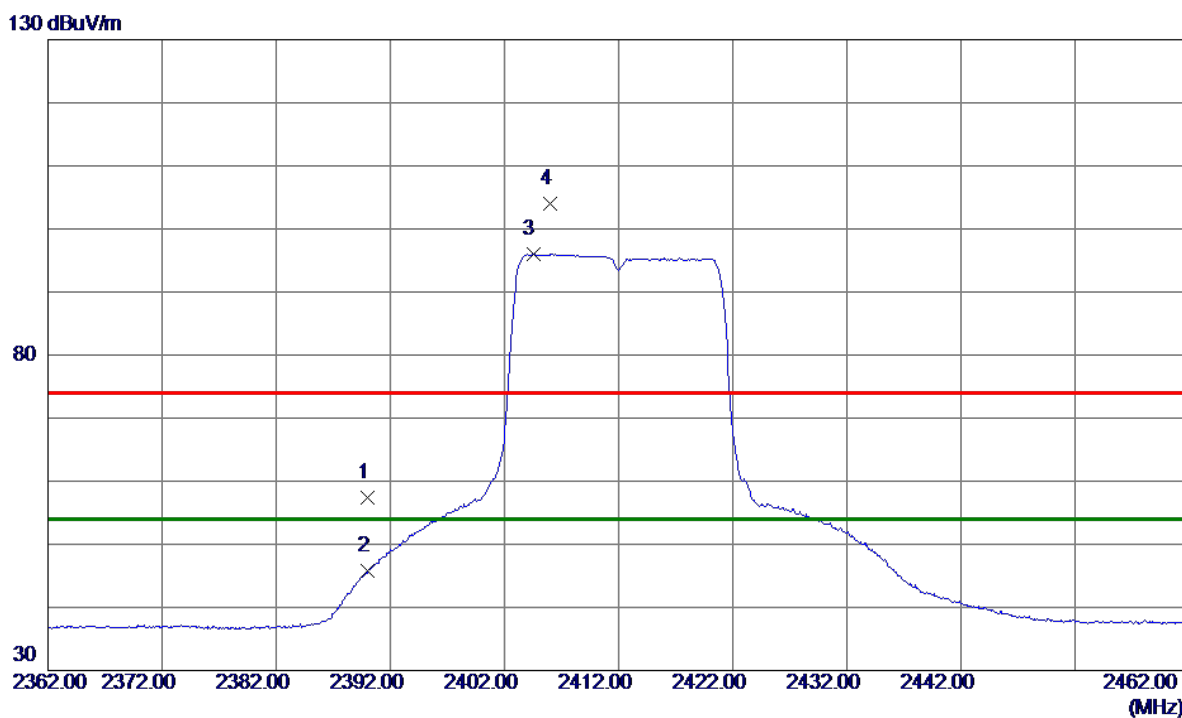


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.73	6.62	57.35	74.00	-16.65	Peak	
2	2390.0000	39.20	6.62	45.82	54.00	-8.18	AVG	
3 *	2404.5000	89.40	6.62	96.02	54.00	42.02	AVG	No Limit
4	2405.9500	97.39	6.62	104.01	74.00	30.01	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

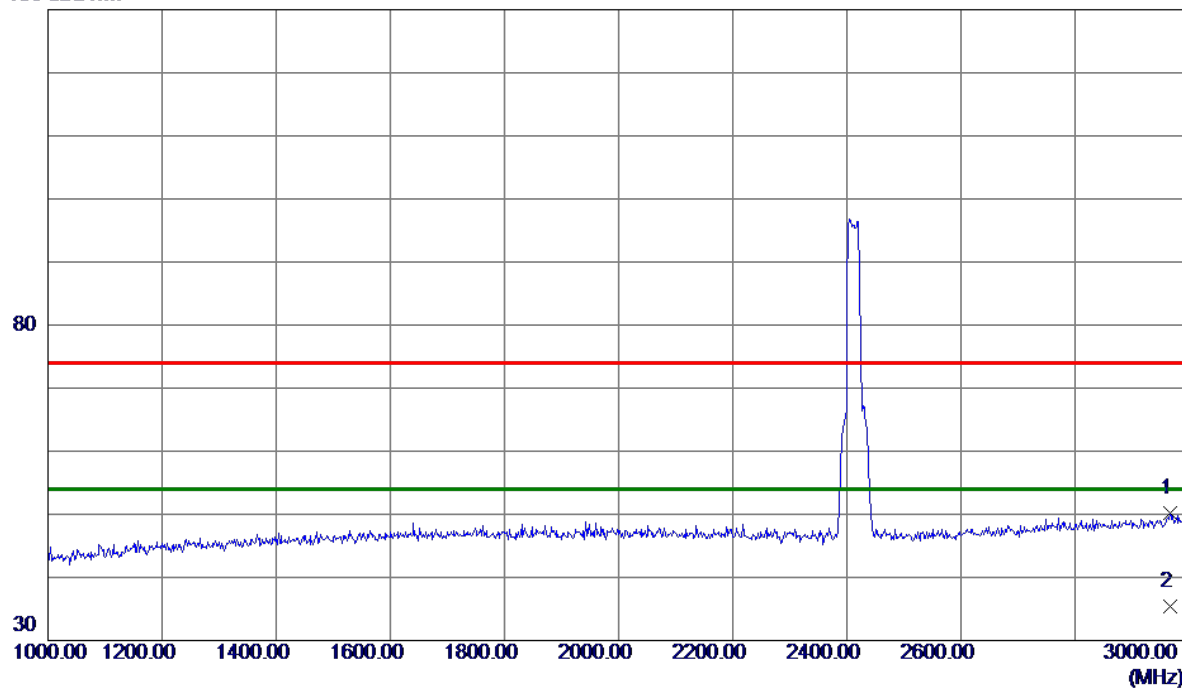


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2967.0000	40.55	9.74	50.29	74.00	-23.71	Peak	
2 *	2967.0000	25.66	9.74	35.40	54.00	-18.60	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

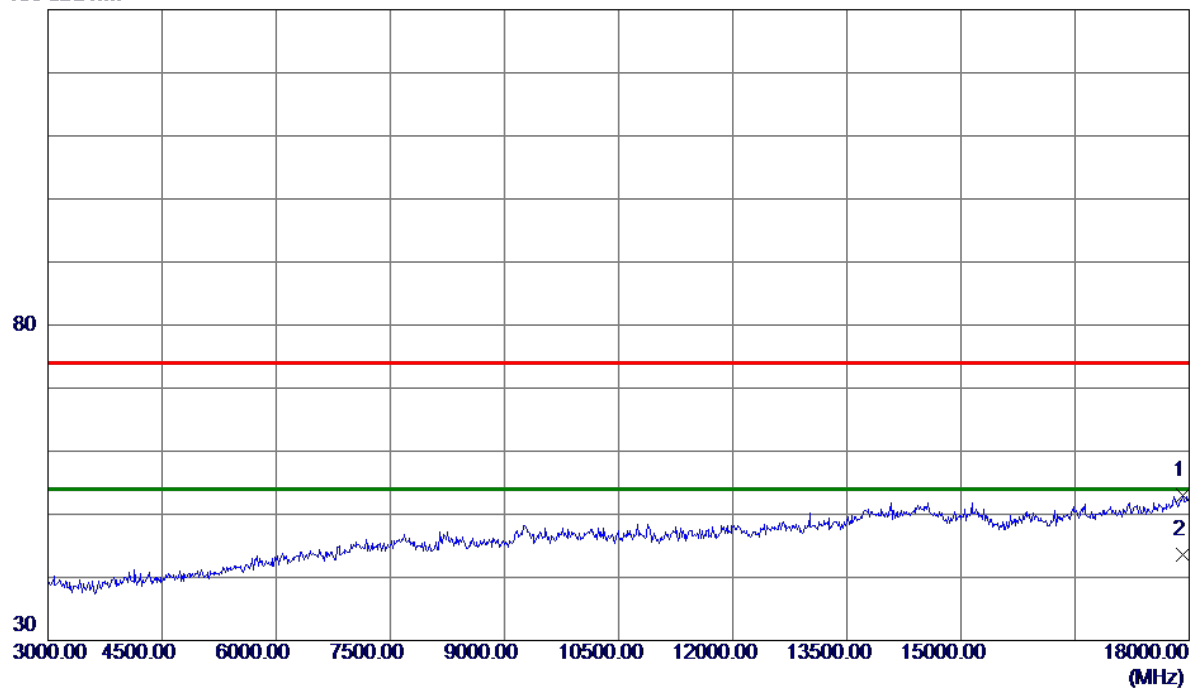


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17917.5000	33.96	19.12	53.08	74.00	-20.92	Peak	
2 *	17917.5000	24.45	19.12	43.57	54.00	-10.43	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal


130 dBuV/m

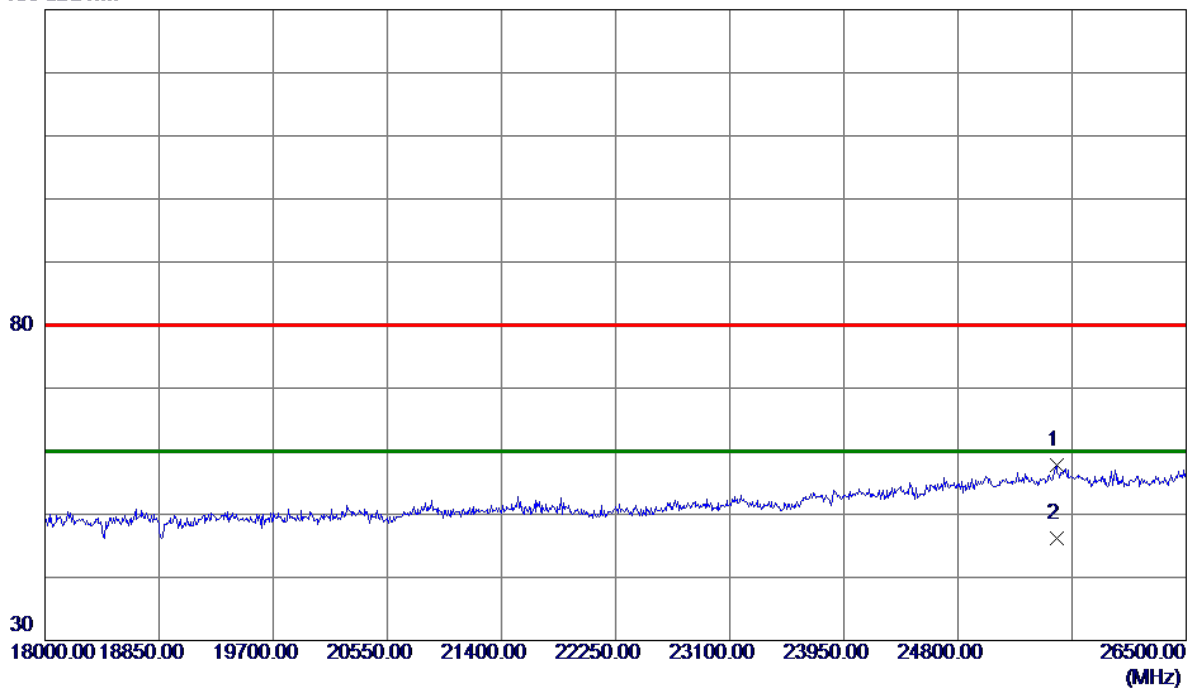

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25535.2500	40.49	17.28	57.77	80.00	-22.23	Peak	
2 *	25535.2500	29.01	17.28	46.29	60.00	-13.71	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz


Vertical

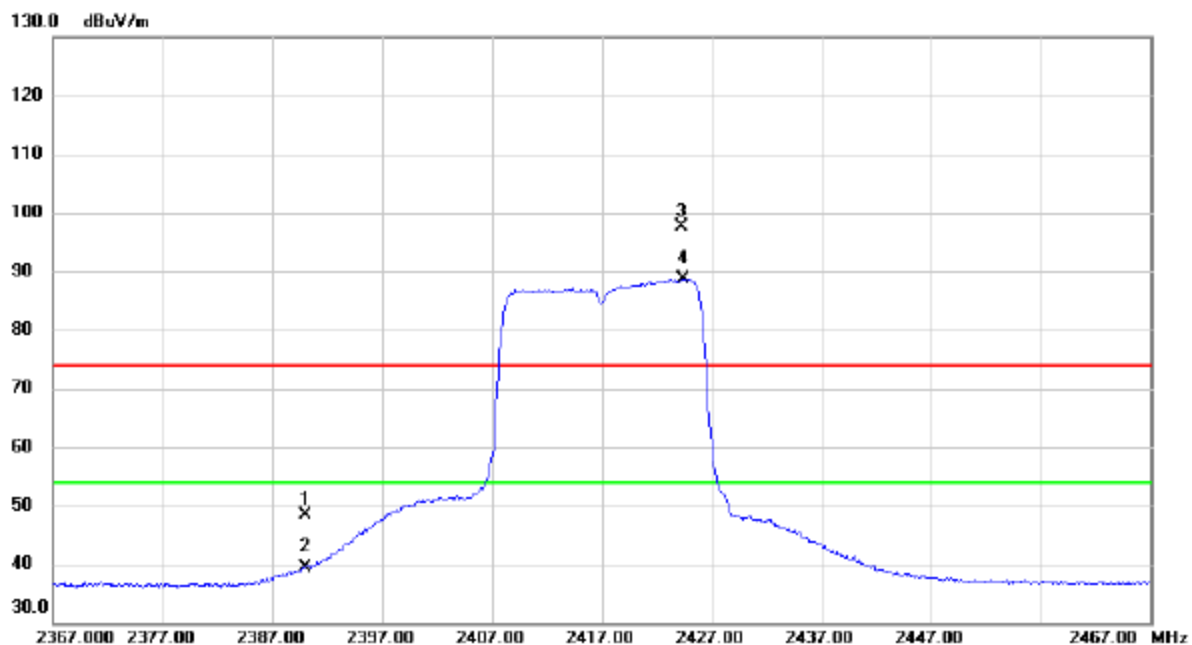

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.77	6.62	48.39	74.00	-25.61	peak	
2		2390.000	32.75	6.62	39.37	54.00	-14.63	AVG	
3	X	2424.250	91.01	6.62	97.63	74.00	23.63	peak	
4	*	2424.350	82.04	6.62	88.66	54.00	34.66	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Horizontal

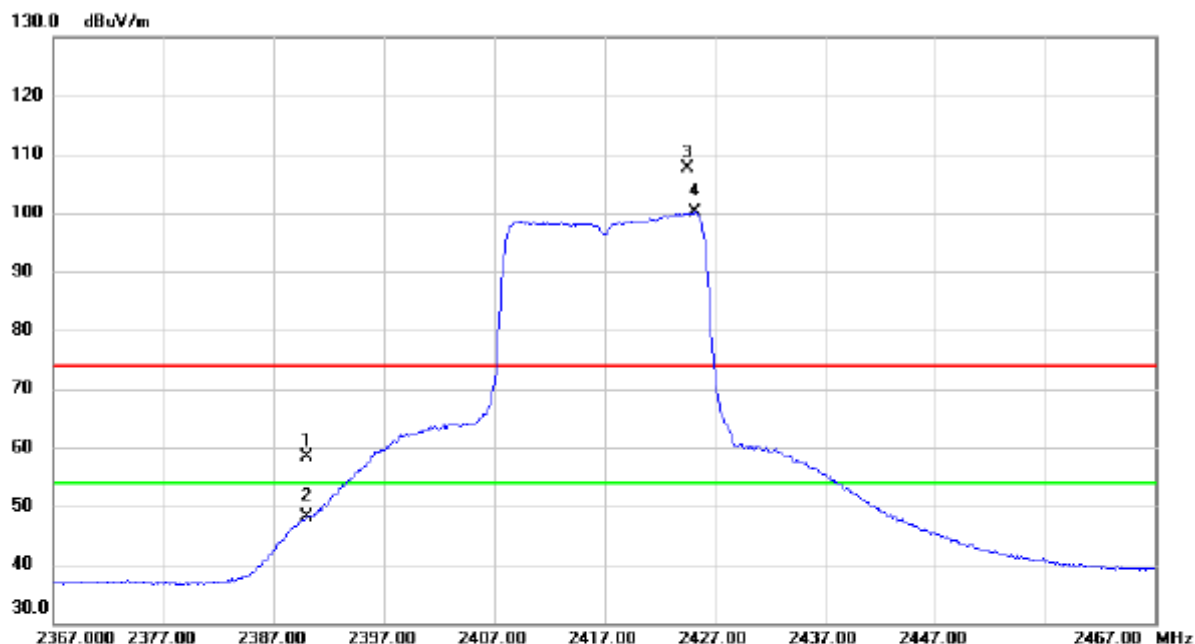


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	51.75	6.62	58.37	74.00	-15.63	peak	
2		2390.000	41.54	6.62	48.16	54.00	-5.84	AVG	
3	X	2424.550	101.10	6.62	107.72	74.00	33.72	peak	
4	*	2425.200	93.51	6.61	100.12	54.00	46.12	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

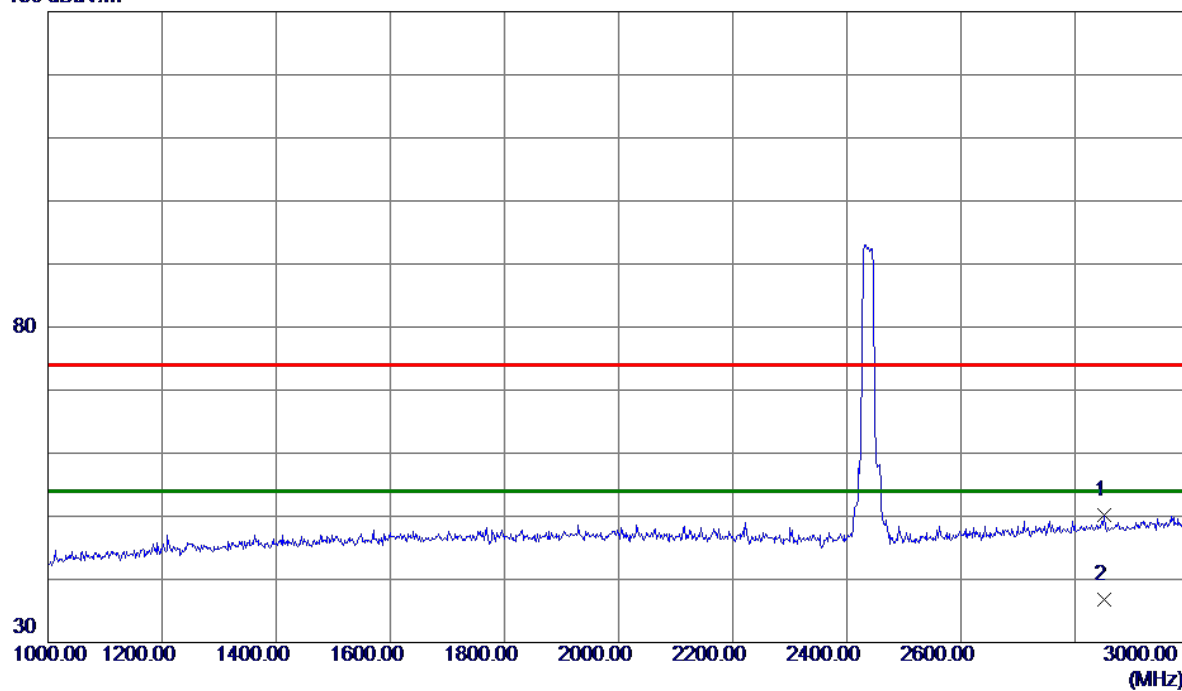


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2851.0000	41.23	8.96	50.19	74.00	-23.81	Peak	
2 *	2851.0000	27.89	8.96	36.85	54.00	-17.15	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

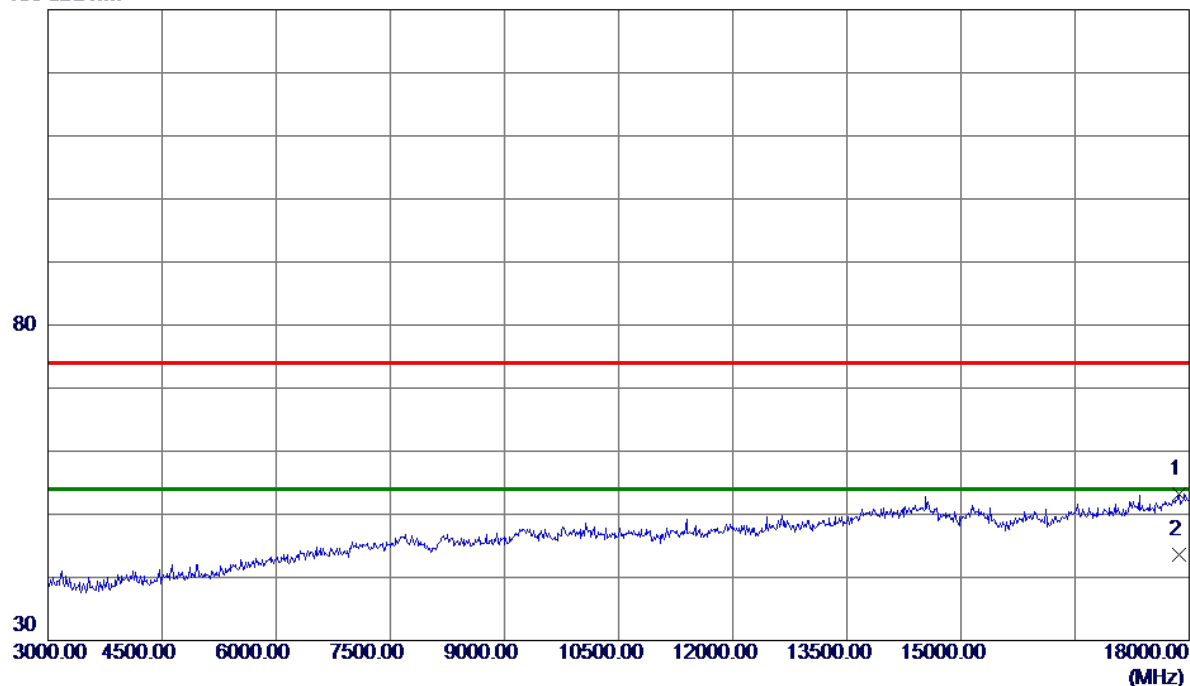


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17872.5000	34.28	18.99	53.27	74.00	-20.73	Peak	
2 *	17872.5000	24.55	18.99	43.54	54.00	-10.46	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical


130 dBuV/m

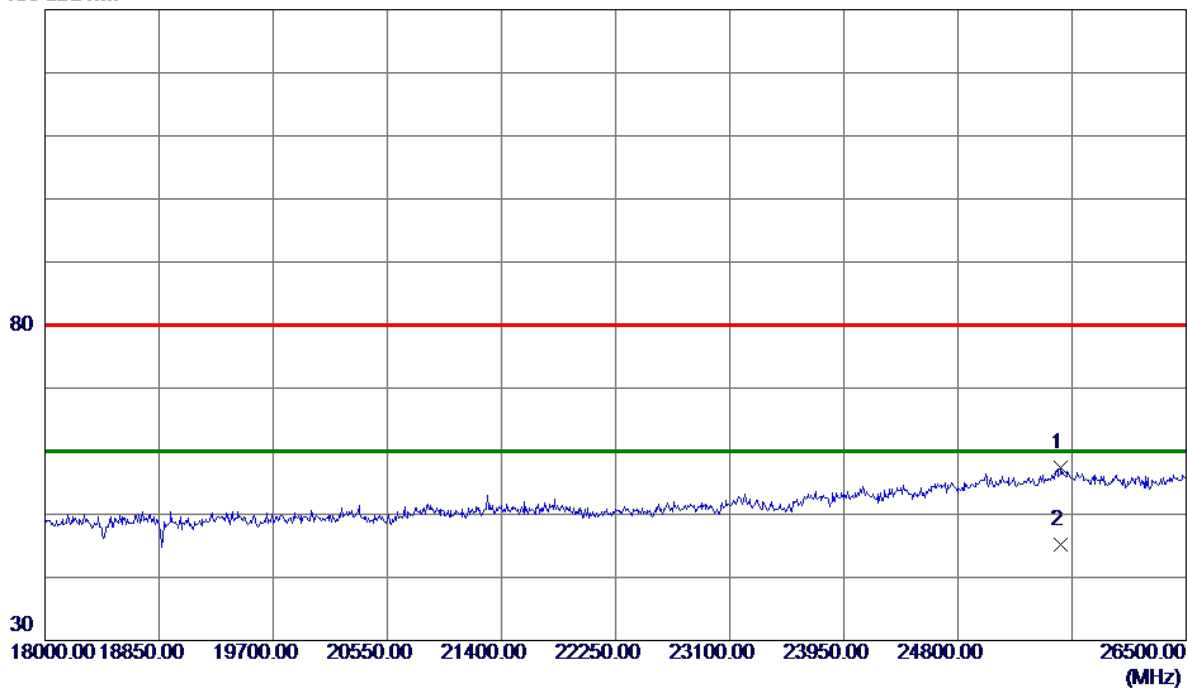

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25565.0000	40.17	17.25	57.42	80.00	-22.58	Peak	
2 *	25565.0000	27.98	17.25	45.23	60.00	-14.77	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

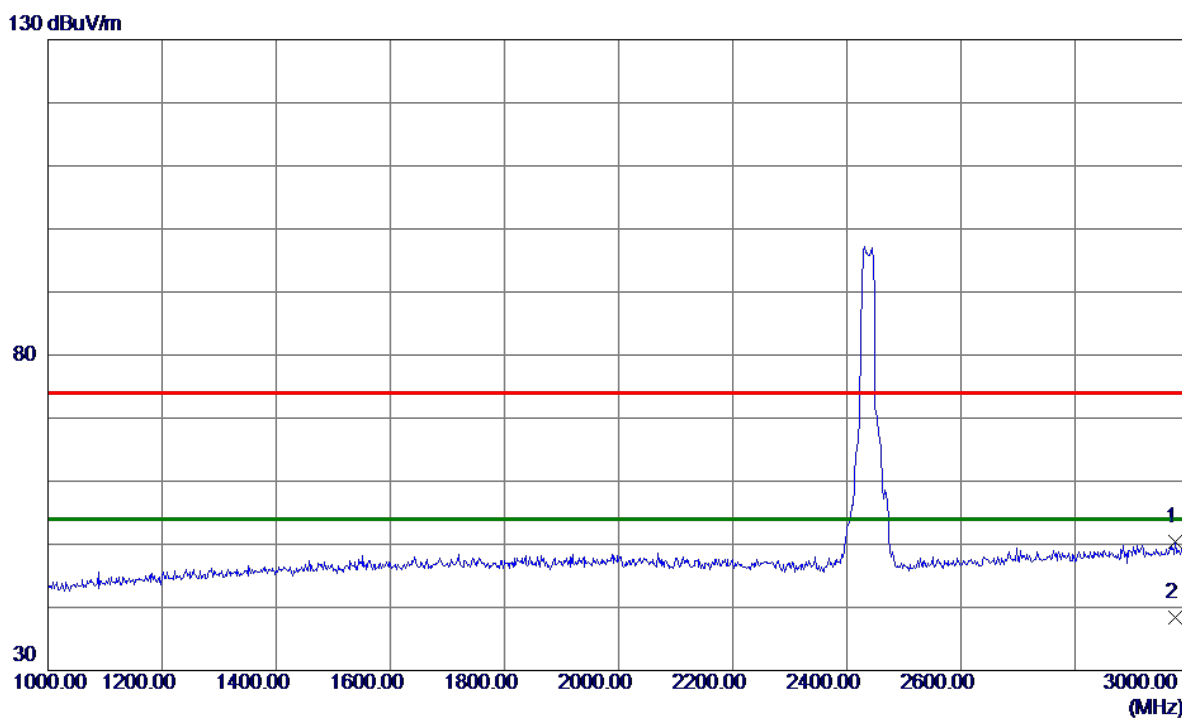


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2976.0000	40.68	9.80	50.48	74.00	-23.52	Peak	
2 *	2976.0000	28.65	9.80	38.45	54.00	-15.55	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

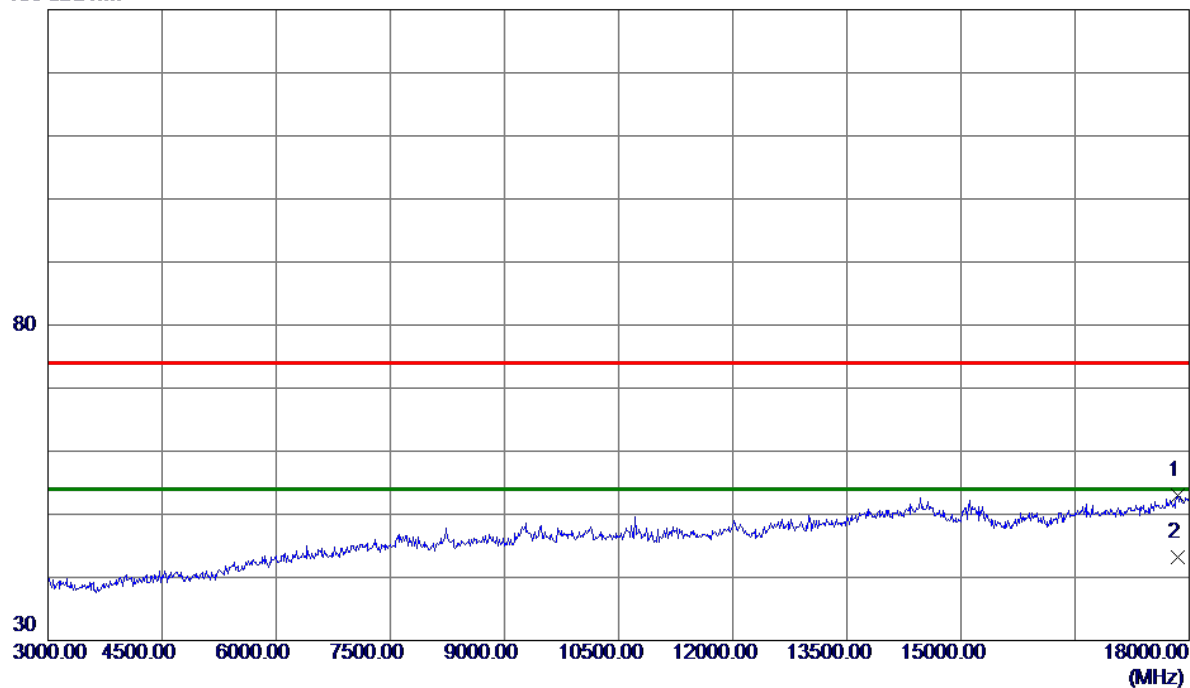


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17850.0000	34.14	18.92	53.06	74.00	-20.94	Peak	
2 *	17850.0000	24.34	18.92	43.26	54.00	-10.74	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal


130 dBuV/m

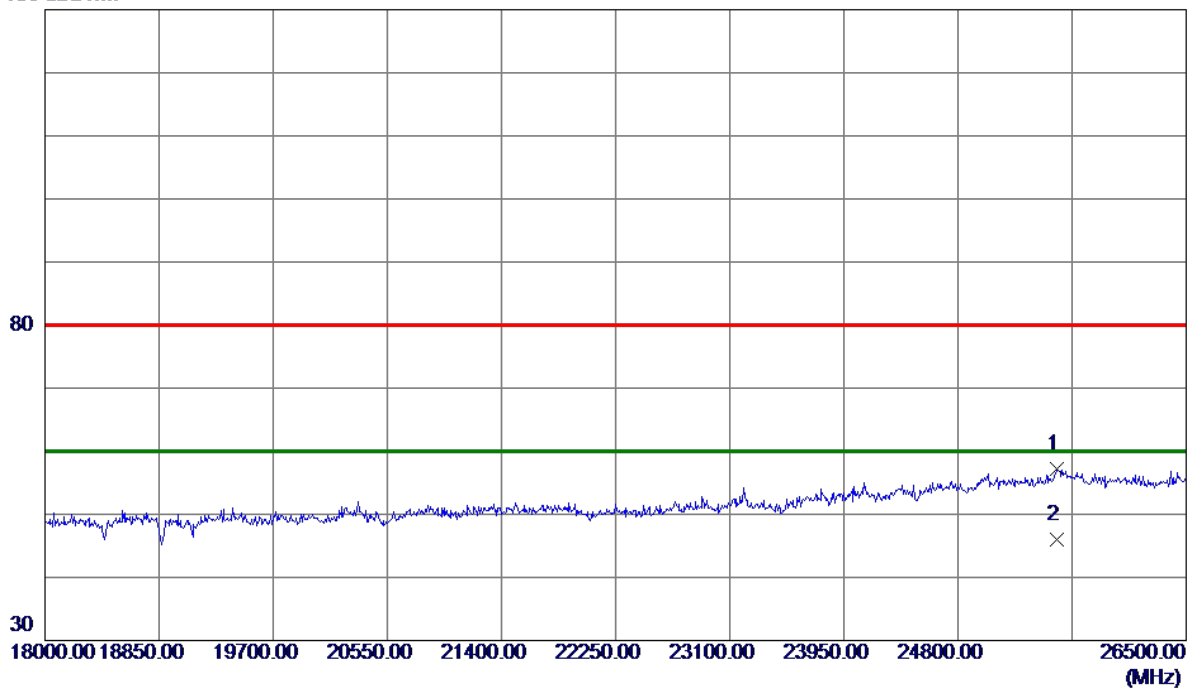

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25539.5000	39.91	17.28	57.19	80.00	-22.81	Peak	
2 *	25539.5000	28.66	17.28	45.94	60.00	-14.06	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz


Vertical

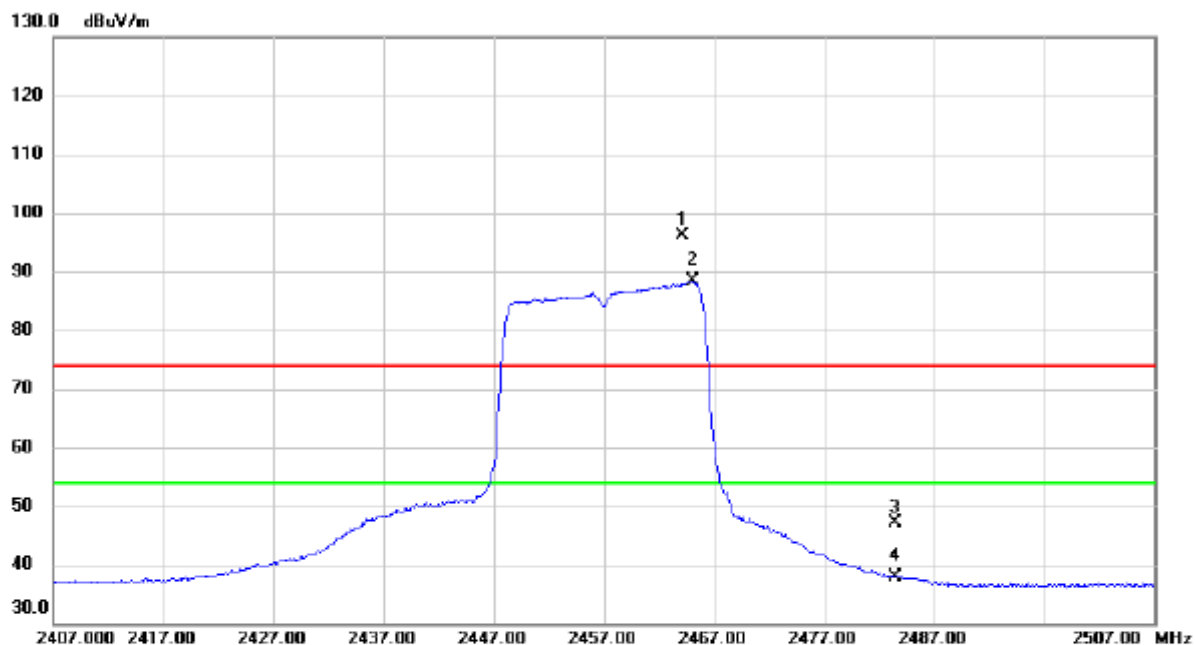

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2464.100	89.47	6.61	96.08	74.00	22.08	peak	
2	*	2465.100	81.66	6.61	88.27	54.00	34.27	AVG	
3		2483.500	40.56	6.61	47.17	74.00	-26.83	peak	
4		2483.500	31.28	6.61	37.89	54.00	-16.11	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz


Horizontal

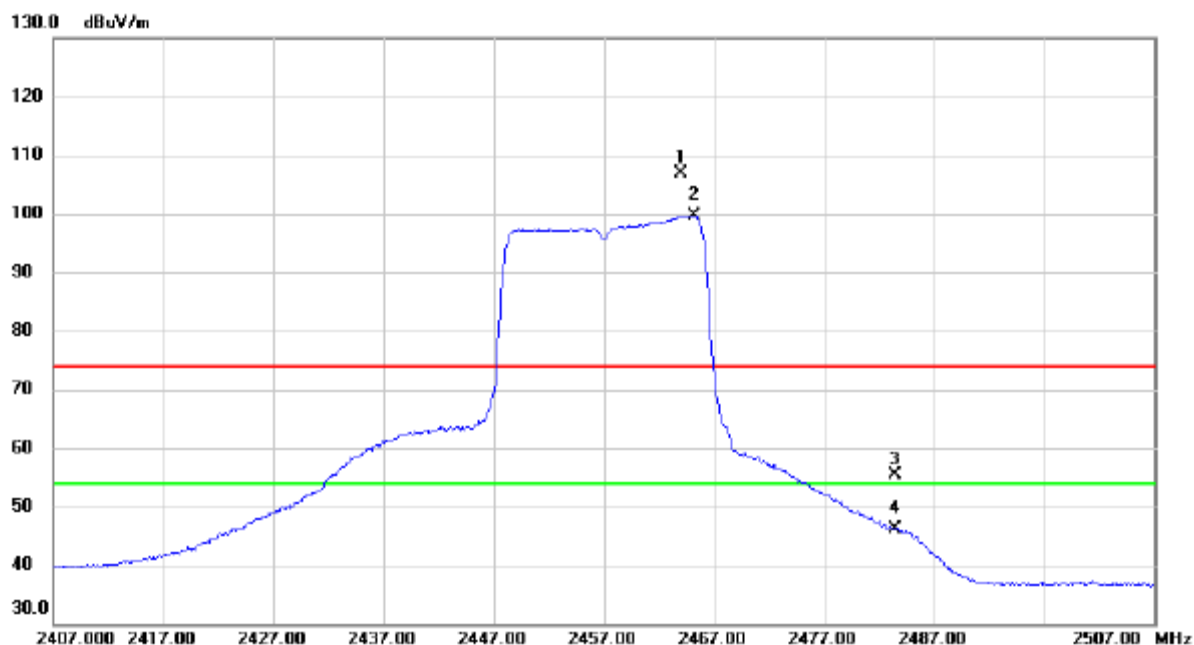

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.950	100.37	6.61	106.98	74.00	32.98	peak	
2	*	2465.250	93.13	6.61	99.74	54.00	45.74	AVG	
3		2483.500	48.88	6.61	55.49	74.00	-18.51	peak	
4		2483.500	39.54	6.61	46.15	54.00	-7.85	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

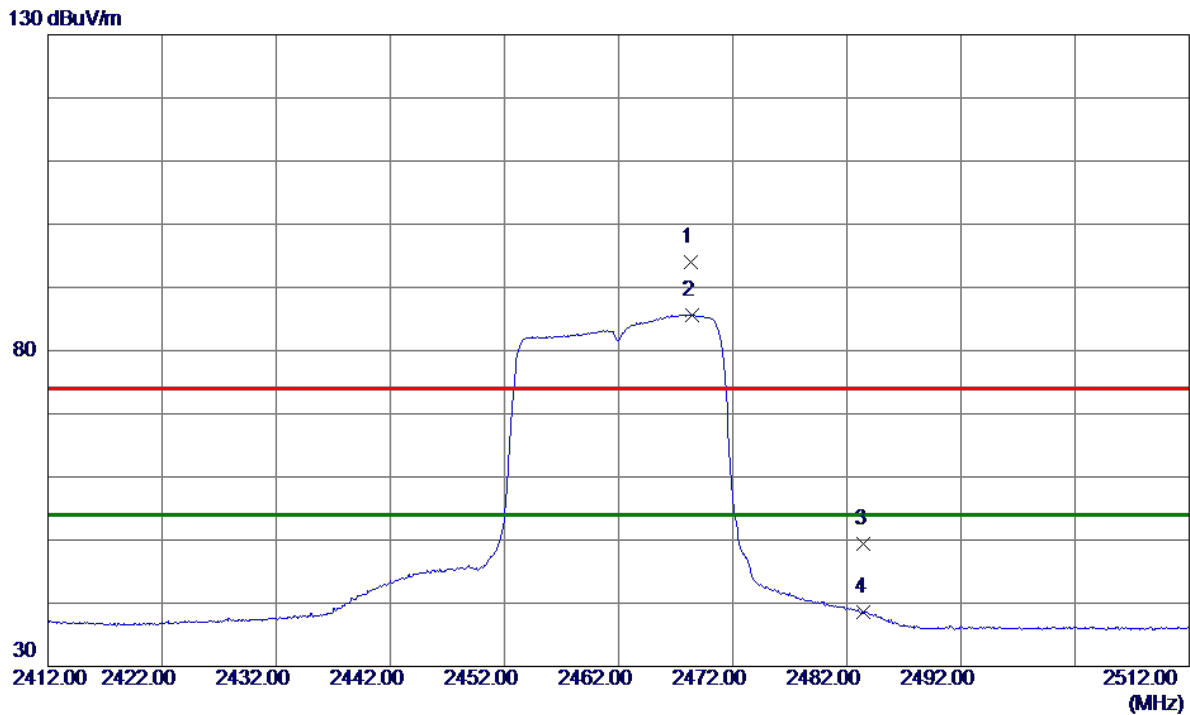


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2468.3500	87.37	6.61	93.98	74.00	19.98	Peak	No Limit
2 *	2468.4500	79.04	6.61	85.65	54.00	31.65	AVG	No Limit
3	2483.5000	42.80	6.61	49.41	74.00	-24.59	Peak	
4	2483.5000	31.95	6.61	38.56	54.00	-15.44	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

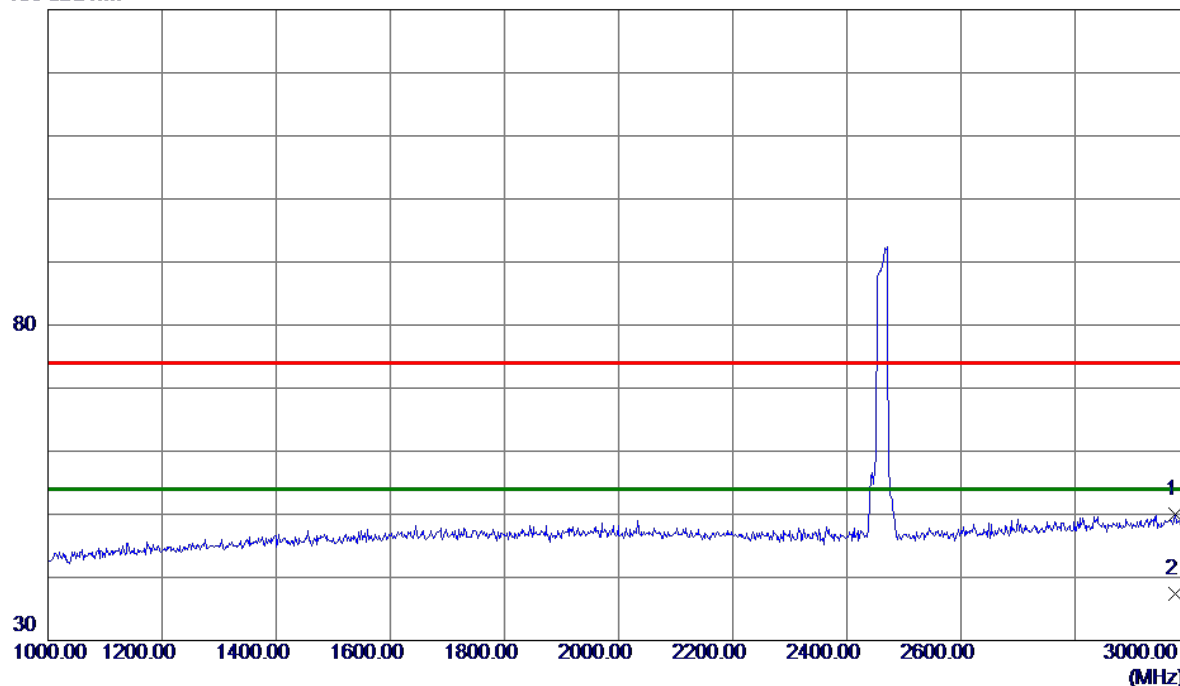


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2975.0000	40.22	9.79	50.01	74.00	-23.99	Peak	
2 *	2975.0000	27.69	9.79	37.48	54.00	-16.52	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

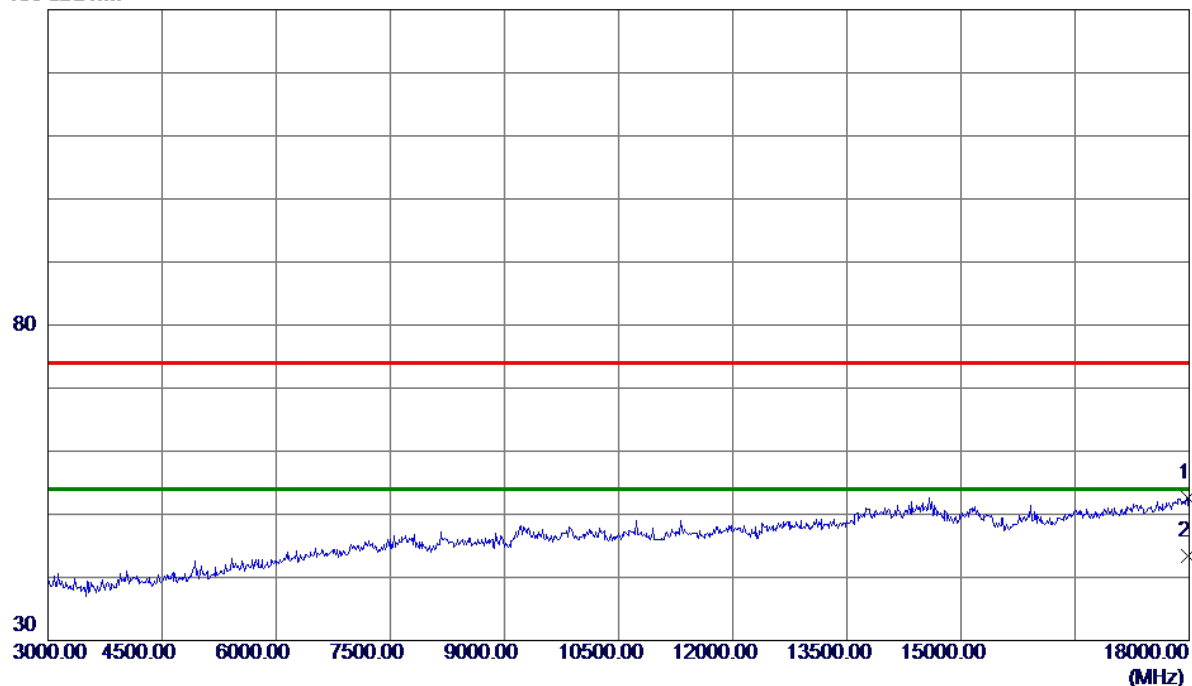


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17977.5000	33.39	19.30	52.69	74.00	-21.31	Peak	
2 *	17977.5000	24.12	19.30	43.42	54.00	-10.58	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

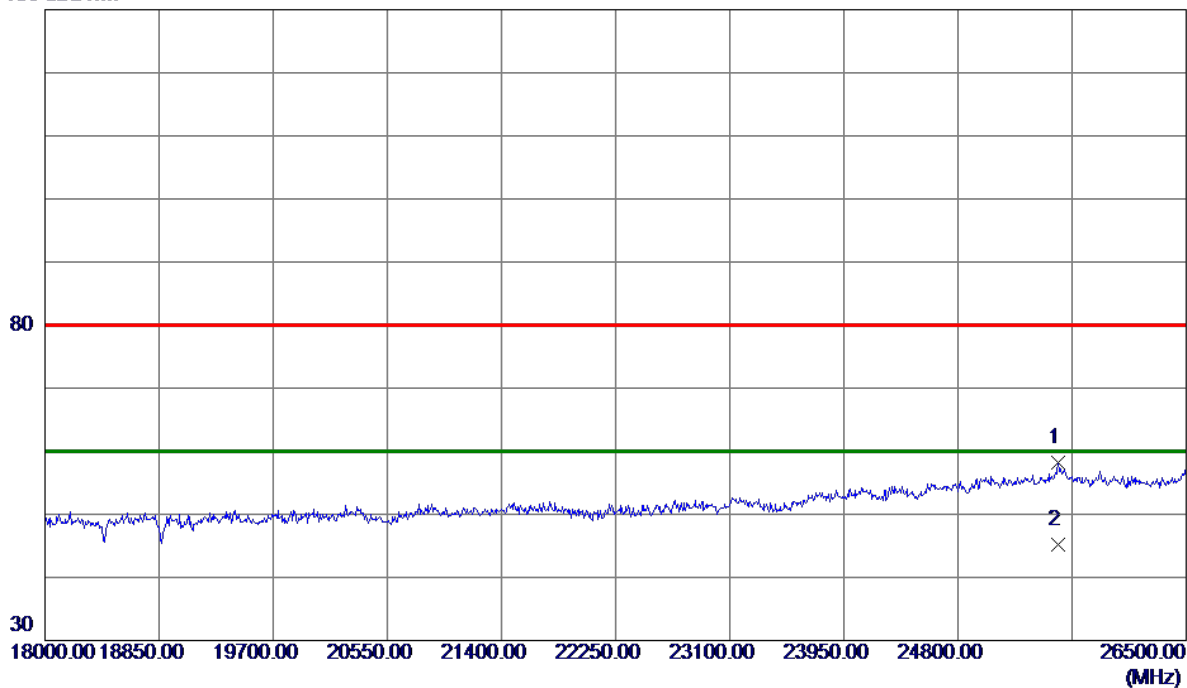


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25548.0000	40.87	17.27	58.14	80.00	-21.86	Peak	
2 *	25548.0000	27.94	17.27	45.21	60.00	-14.79	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

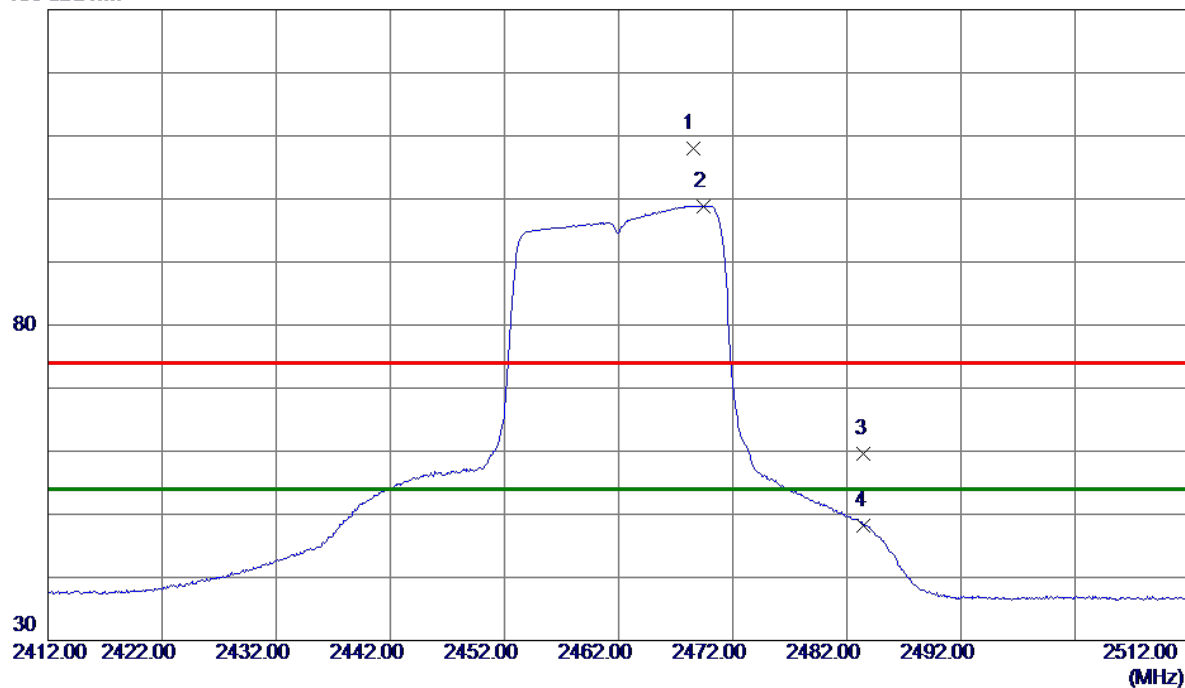


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2468.5000	101.32	6.61	107.93	74.00	33.93	Peak	No Limit
2 *	2469.4500	92.28	6.61	98.89	54.00	44.89	AVG	No Limit
3	2483.5000	52.93	6.61	59.54	74.00	-14.46	Peak	
4	2483.5000	41.65	6.61	48.26	54.00	-5.74	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

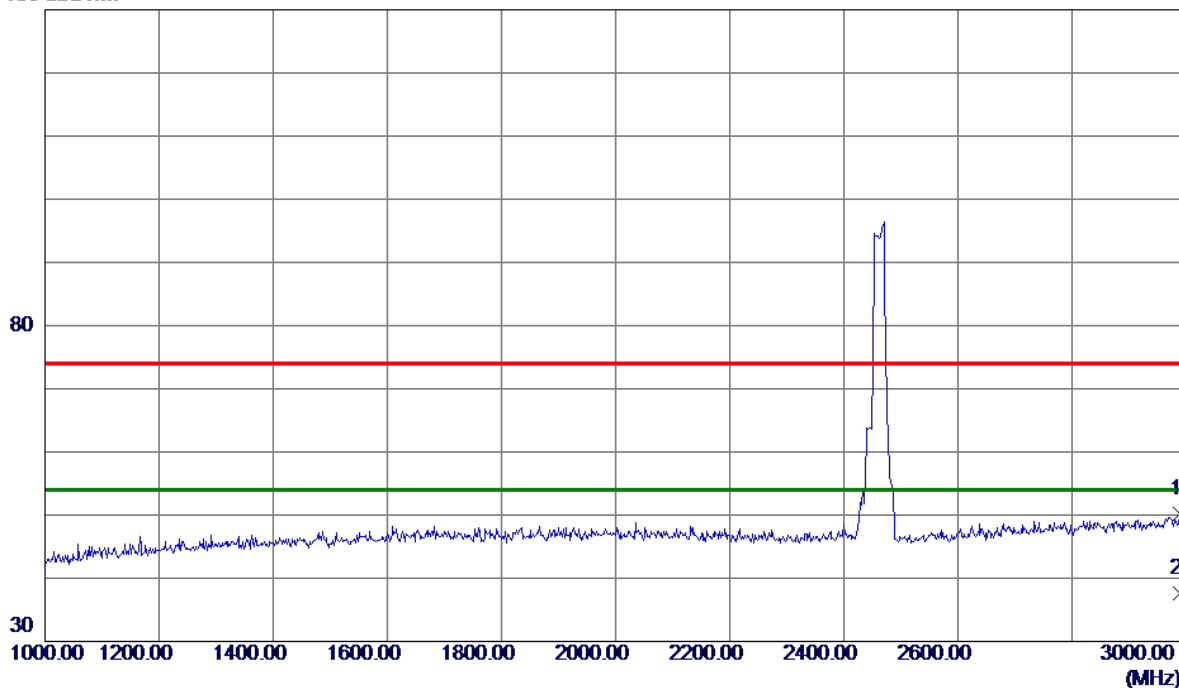


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2989.0000	40.23	9.89	50.12	74.00	-23.88	Peak	
2 *	2989.0000	27.65	9.89	37.54	54.00	-16.46	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

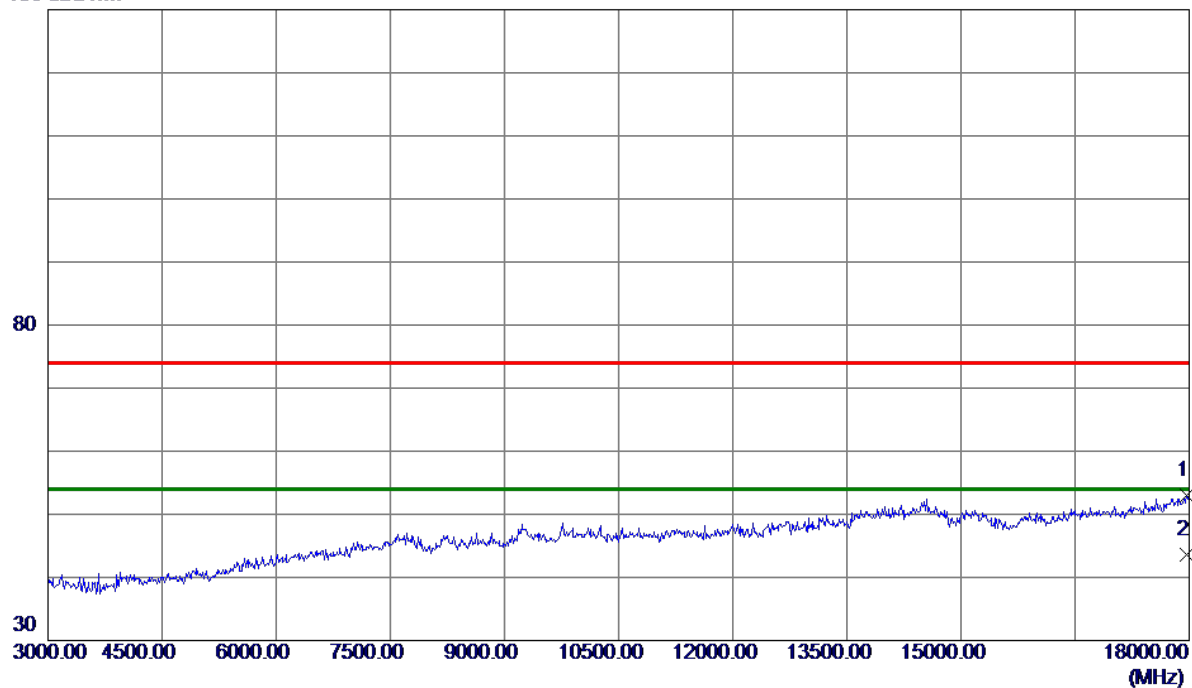


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17970.0000	33.63	19.28	52.91	74.00	-21.09	Peak	
2 *	17970.0000	24.30	19.28	43.58	54.00	-10.42	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal


130 dBuV/m

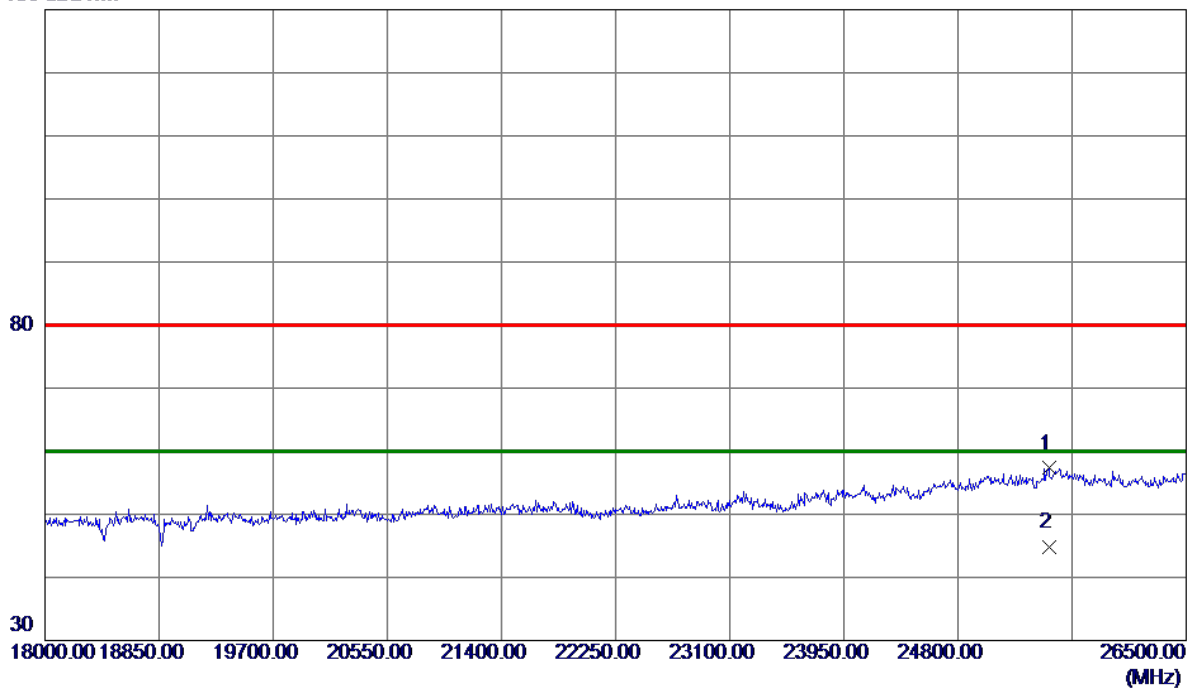

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25475.7500	39.99	17.31	57.30	80.00	-22.70	Peak	
2 *	25475.7500	27.41	17.31	44.72	60.00	-15.28	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

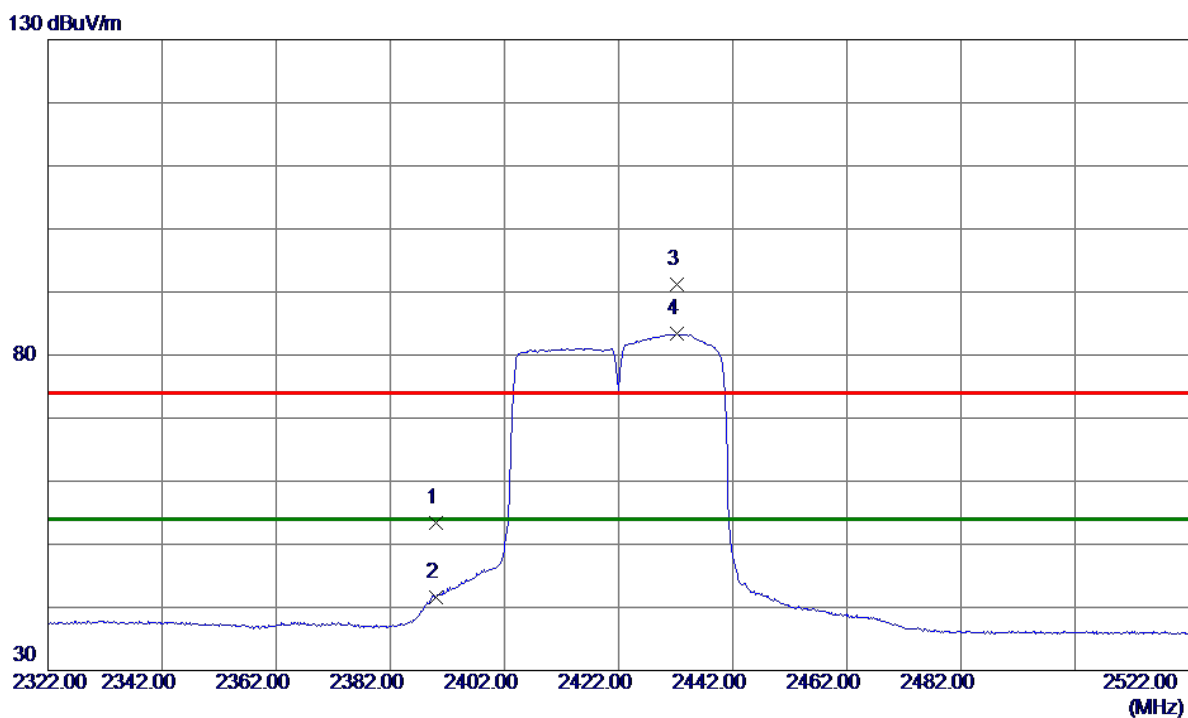


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.79	6.62	53.41	74.00	-20.59	Peak	
2	2390.0000	35.05	6.62	41.67	54.00	-12.33	AVG	
3	2432.3000	84.63	6.62	91.25	74.00	17.25	Peak	No Limit
4 *	2432.3000	76.69	6.62	83.31	54.00	29.31	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

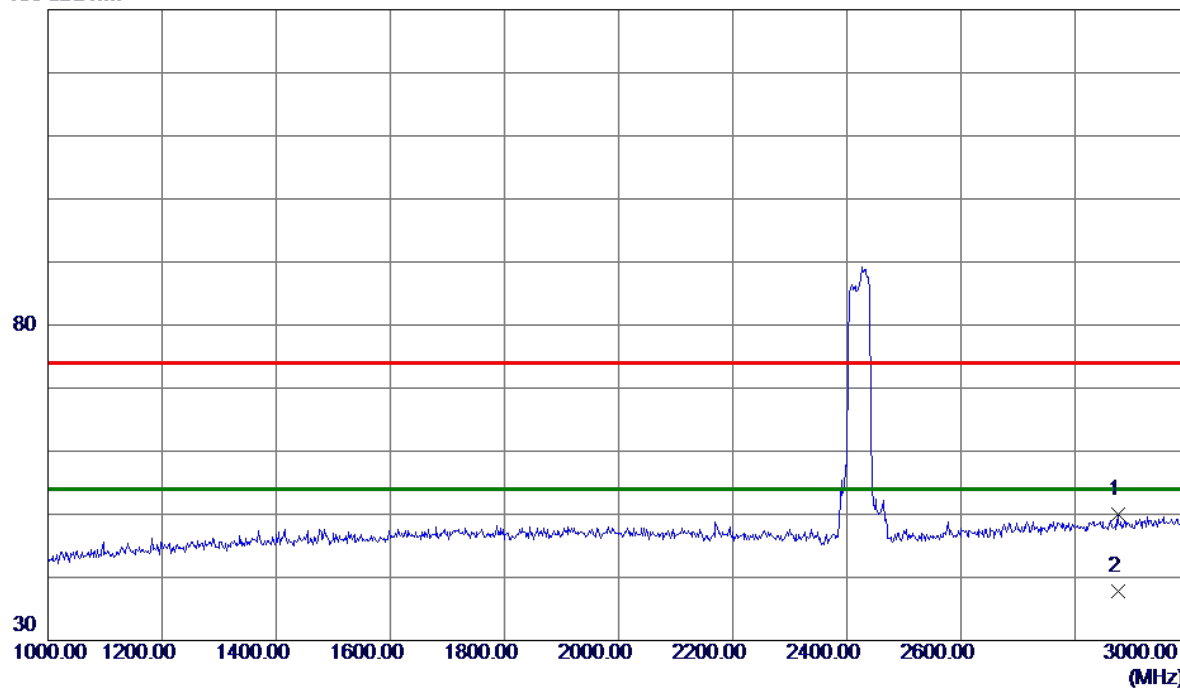


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2875.0000	40.96	9.12	50.08	74.00	-23.92	Peak	
2 *	2875.0000	28.62	9.12	37.74	54.00	-16.26	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

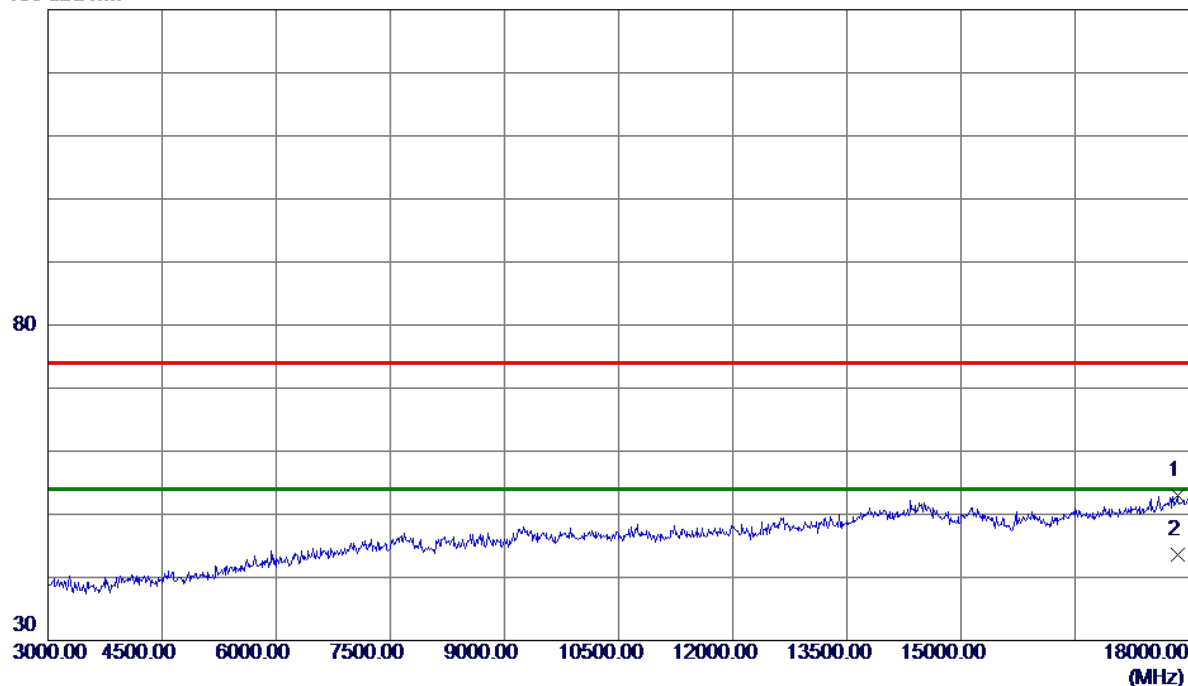


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17842.5000	34.18	18.90	53.08	74.00	-20.92	Peak	
2 *	17842.5000	24.64	18.90	43.54	54.00	-10.46	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical


130 dBuV/m

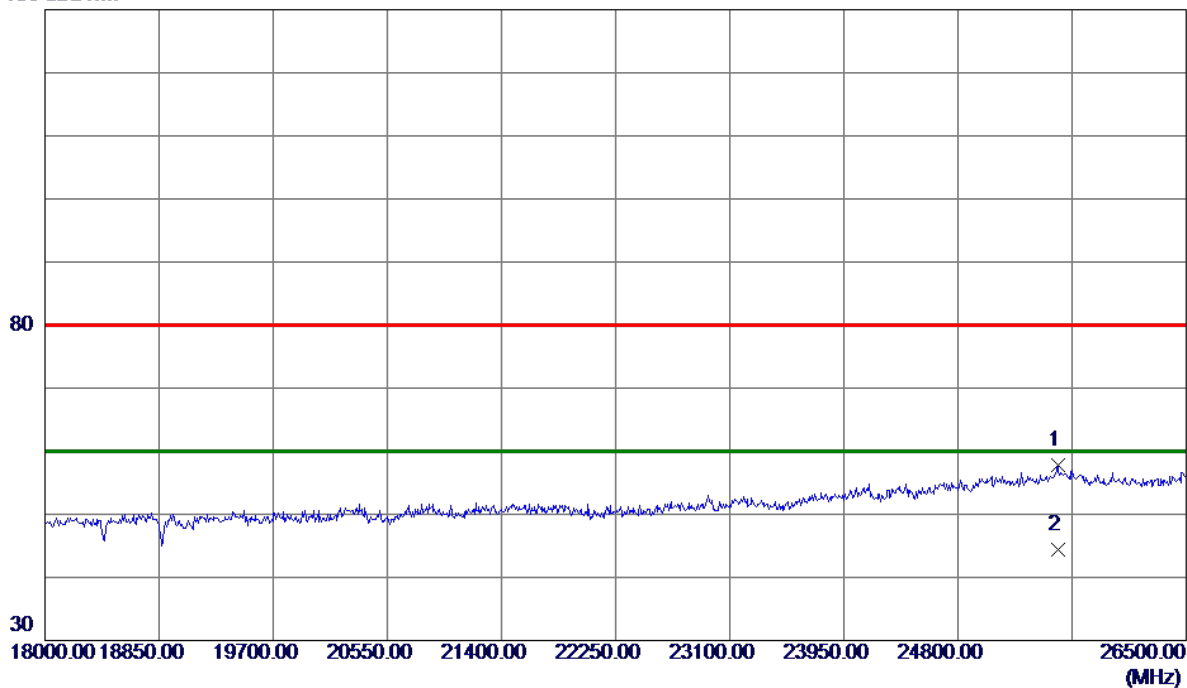

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25543.7500	40.43	17.28	57.71	80.00	-22.29	Peak	
2 *	25543.7500	27.11	17.28	44.39	60.00	-15.61	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

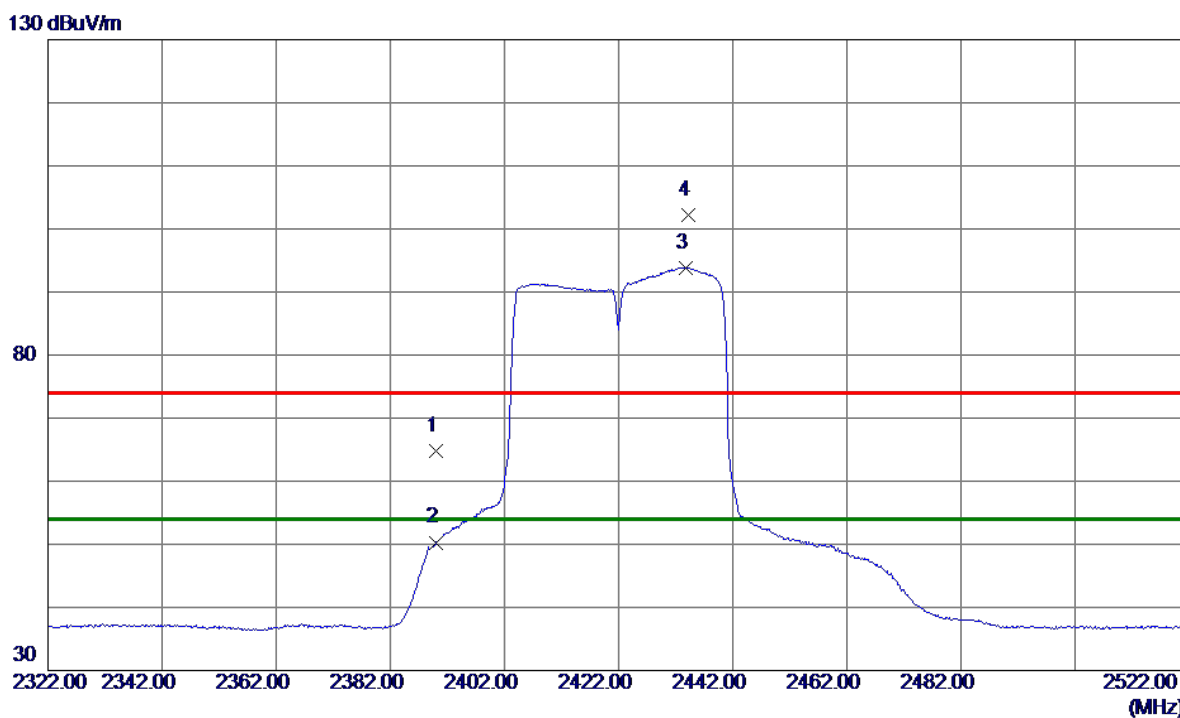


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	58.16	6.62	64.78	74.00	-9.22	Peak	
2	2390.0000	43.68	6.62	50.30	54.00	-3.70	AVG	
3 *	2433.8000	87.26	6.61	93.87	54.00	39.87	AVG	No Limit
4	2434.2000	95.52	6.61	102.13	74.00	28.13	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

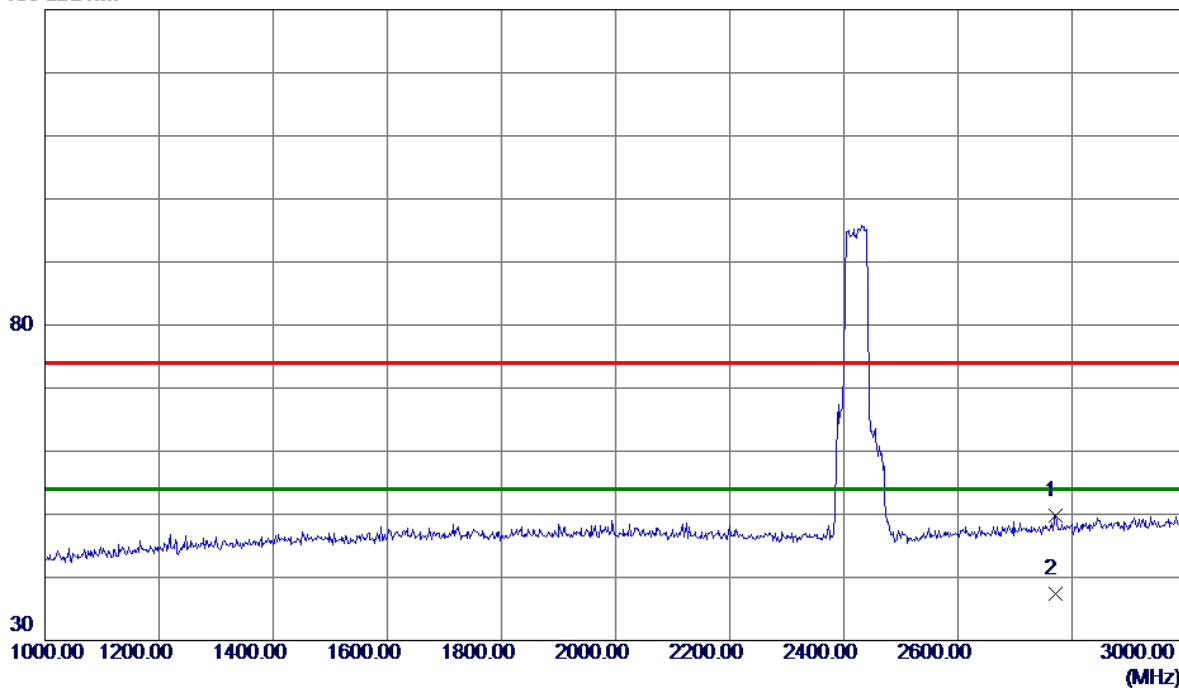


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2770.0000	41.38	8.42	49.80	74.00	-24.20	Peak	
2 *	2770.0000	28.98	8.42	37.40	54.00	-16.60	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

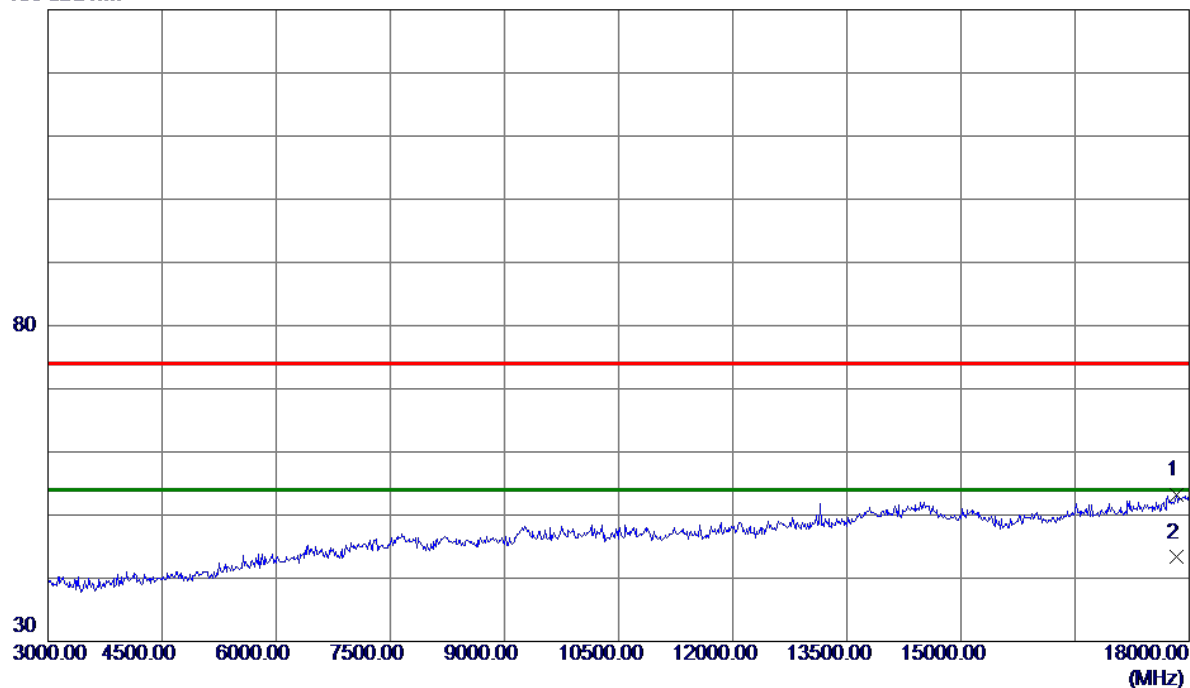


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17827.5000	34.31	18.86	53.17	74.00	-20.83	Peak	
2 *	17827.5000	24.44	18.86	43.30	54.00	-10.70	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal


130 dBuV/m

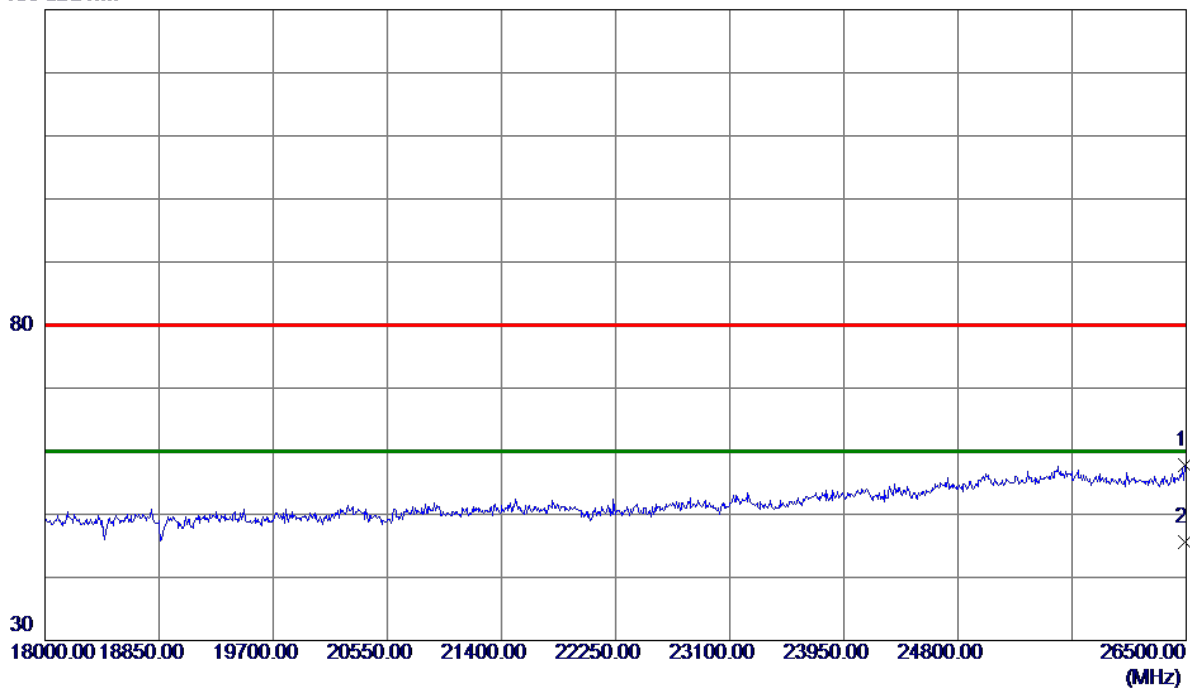

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	26491.5000	39.78	18.00	57.78	80.00	-22.22	Peak	
2 *	26491.5000	27.63	18.00	45.63	60.00	-14.37	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz


Vertical

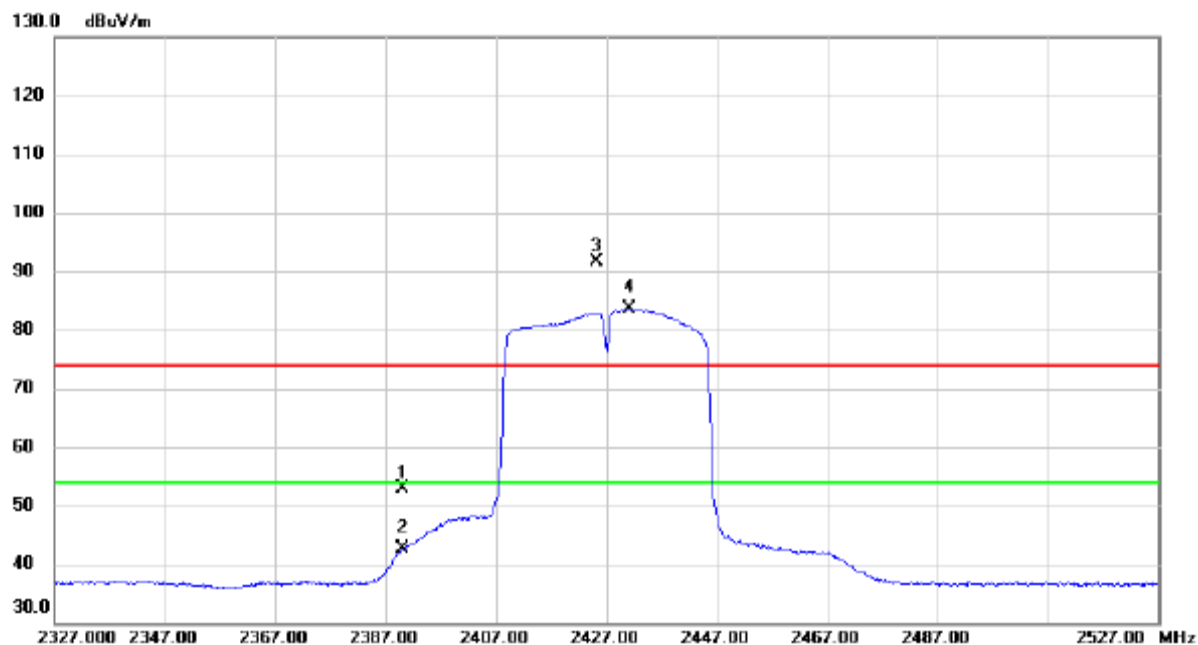

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	46.15	6.62	52.77	74.00	-21.23	peak	
2		2390.000	35.96	6.62	42.58	54.00	-11.42	AVG	
3	X	2425.200	85.09	6.61	91.70	74.00	17.70	peak	
4	*	2431.200	76.99	6.61	83.60	54.00	29.60	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz


Horizontal

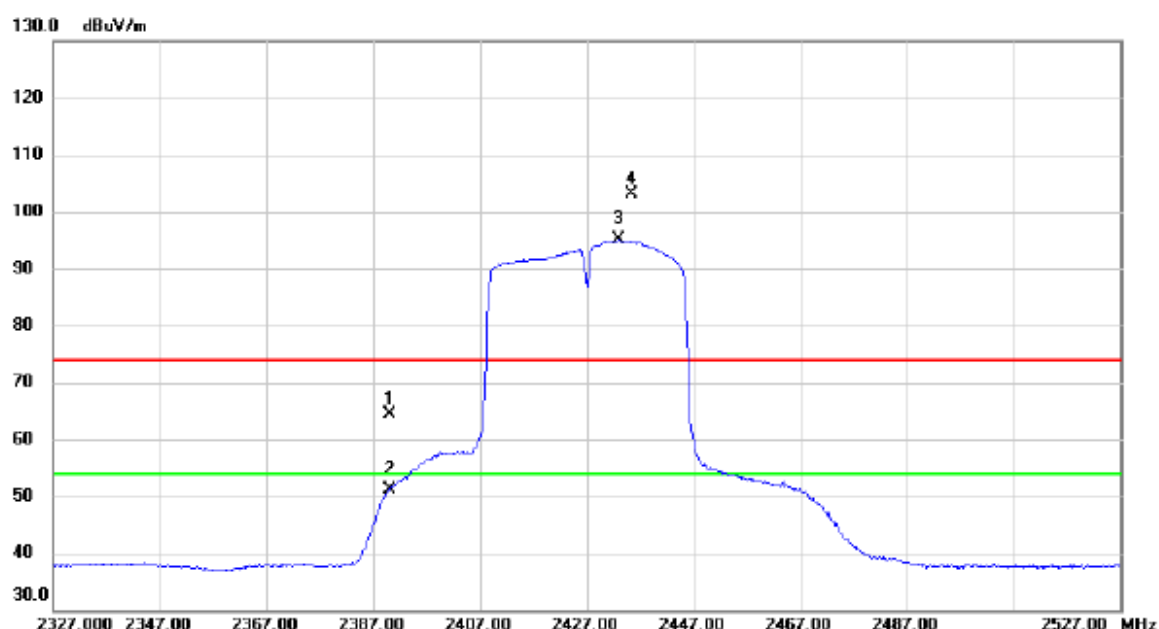

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.65	6.62	64.27	74.00	-9.73	peak	
2		2390.000	44.63	6.62	51.25	54.00	-2.75	AVG	
3	*	2433.000	88.52	6.61	95.13	54.00	41.13	AVG	
4	X	2435.400	96.60	6.62	103.22	74.00	29.22	peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

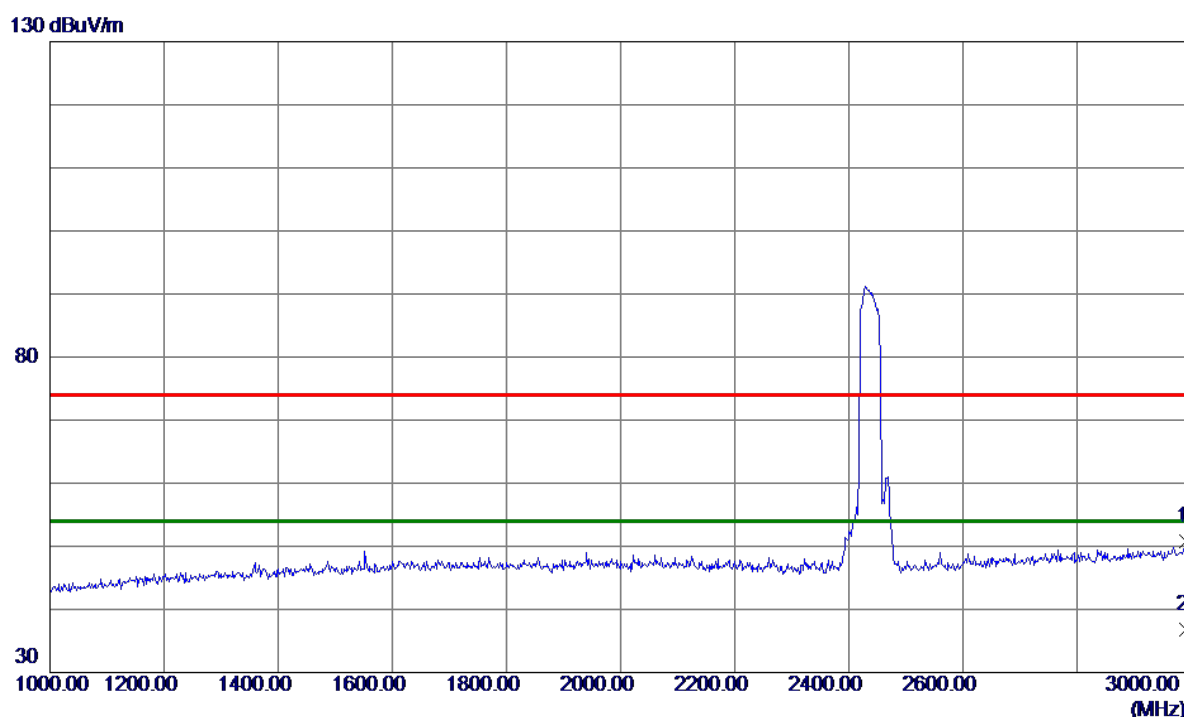


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2992.0000	40.90	9.91	50.81	74.00	-23.19	Peak	
2 *	2992.0000	26.98	9.91	36.89	54.00	-17.11	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

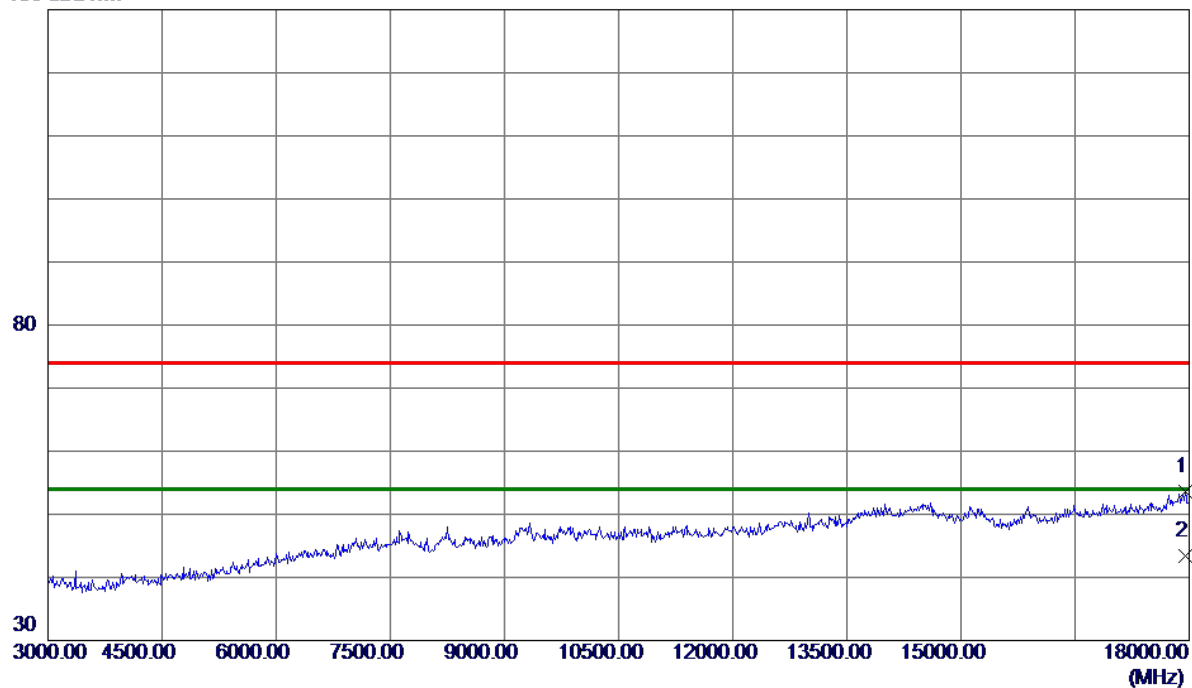


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17947.5000	34.36	19.21	53.57	74.00	-20.43	Peak	
2 *	17947.5000	24.21	19.21	43.42	54.00	-10.58	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

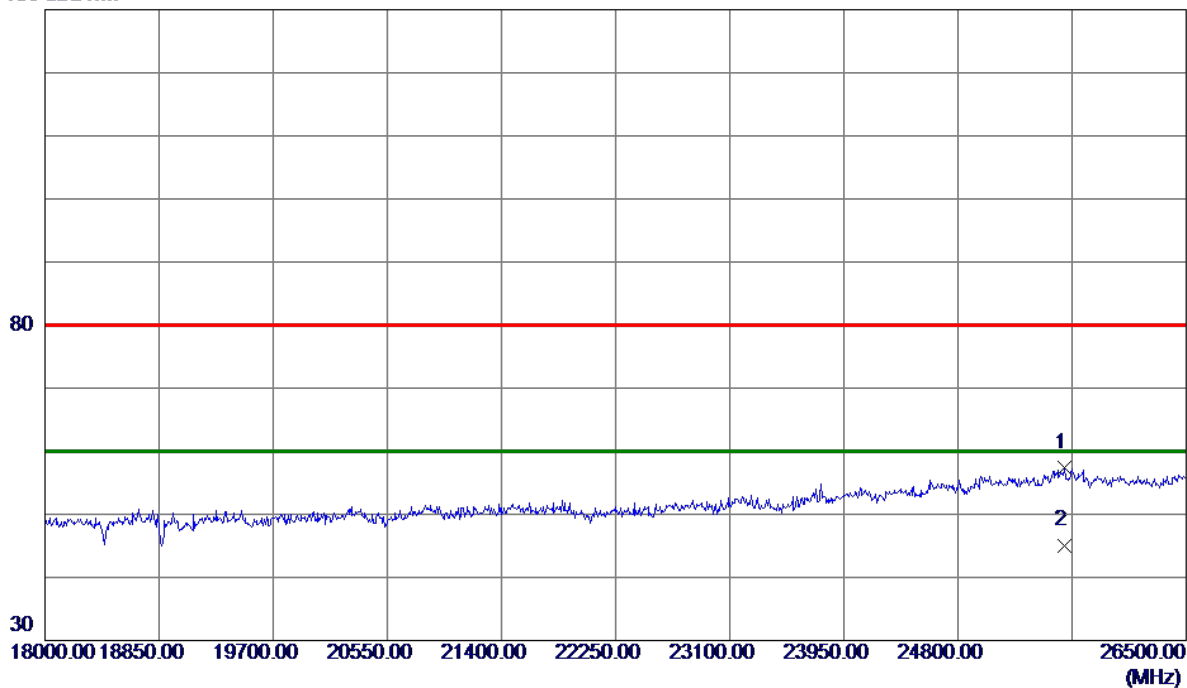


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25594.7500	40.23	17.22	57.45	80.00	-22.55	Peak	
2 *	25594.7500	27.88	17.22	45.10	60.00	-14.90	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

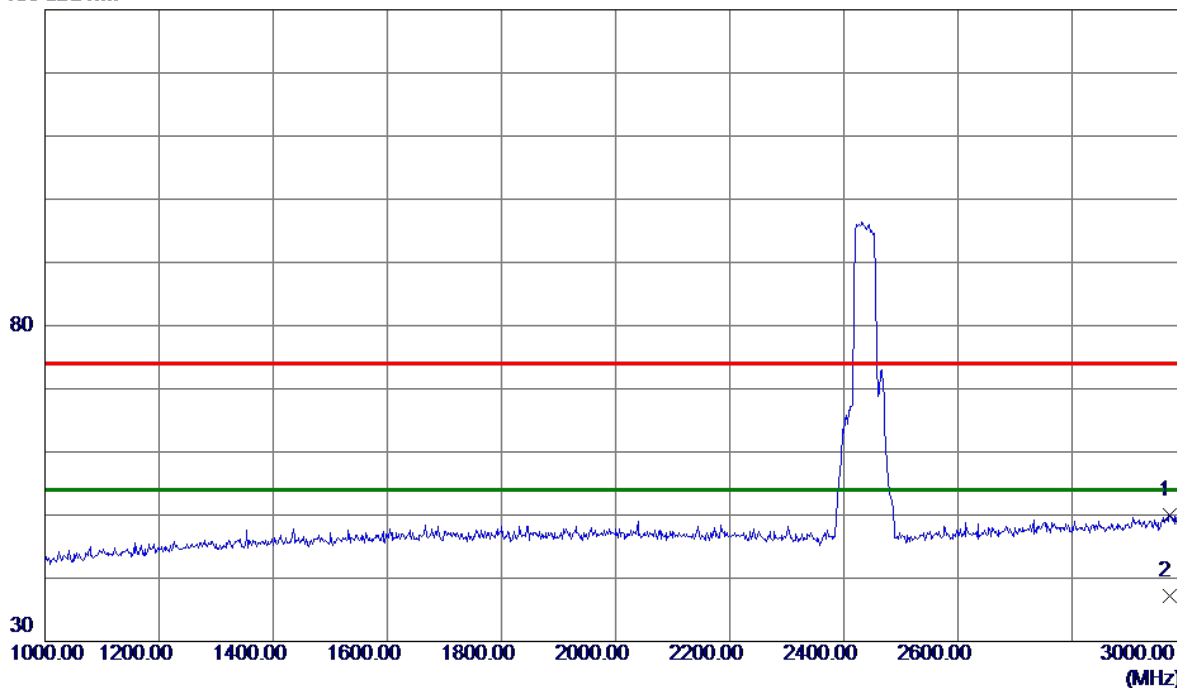


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2970.0000	40.29	9.76	50.05	74.00	-23.95	Peak	
2 *	2970.0000	27.44	9.76	37.20	54.00	-16.80	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

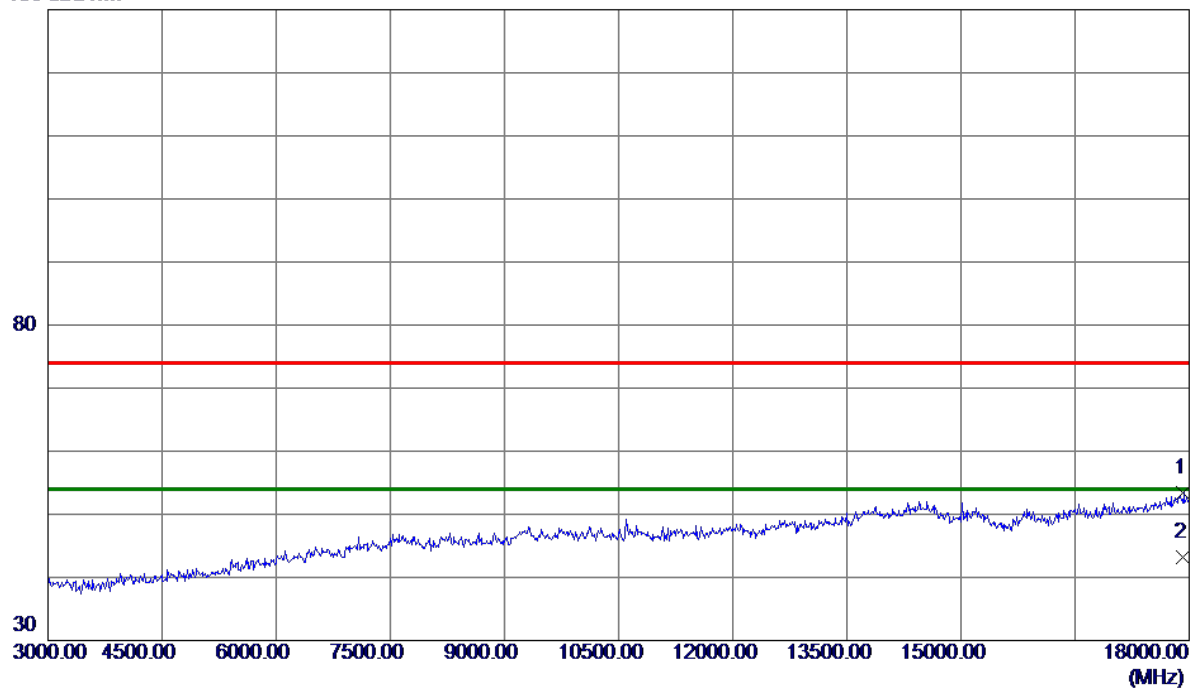


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17925.0000	34.18	19.15	53.33	74.00	-20.67	Peak	
2 *	17925.0000	23.97	19.15	43.12	54.00	-10.88	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal


130 dBuV/m

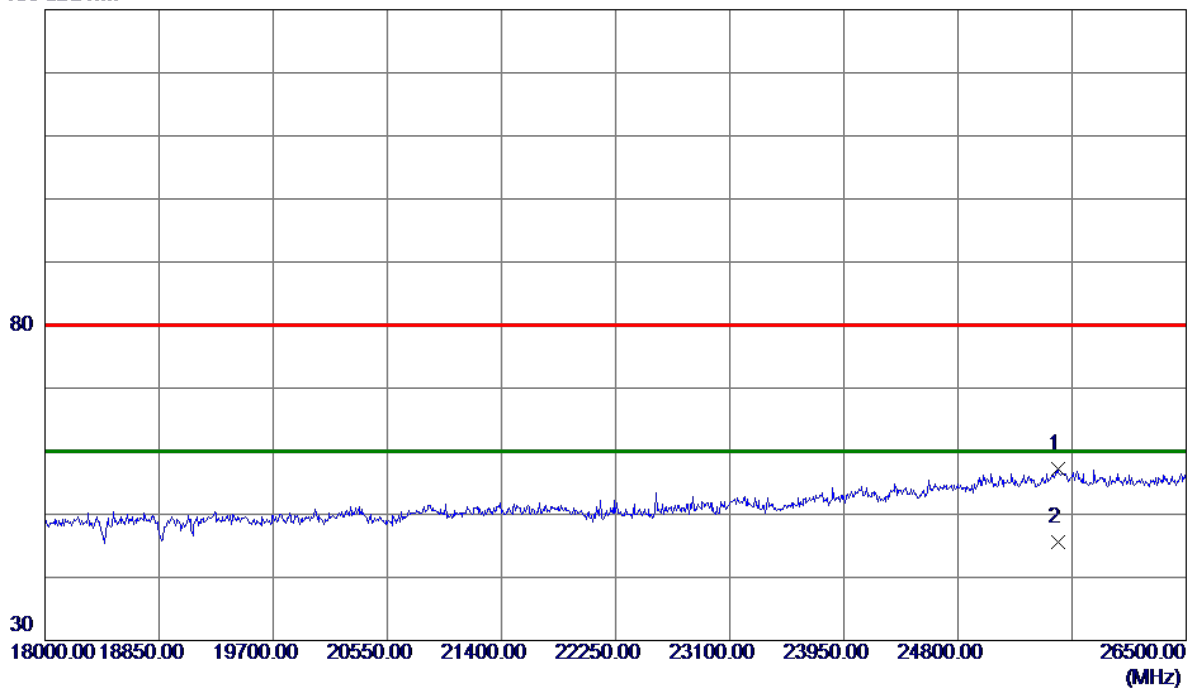

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25543.7500	39.89	17.28	57.17	80.00	-22.83	Peak	
2 *	25543.7500	28.36	17.28	45.64	60.00	-14.36	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz


Vertical

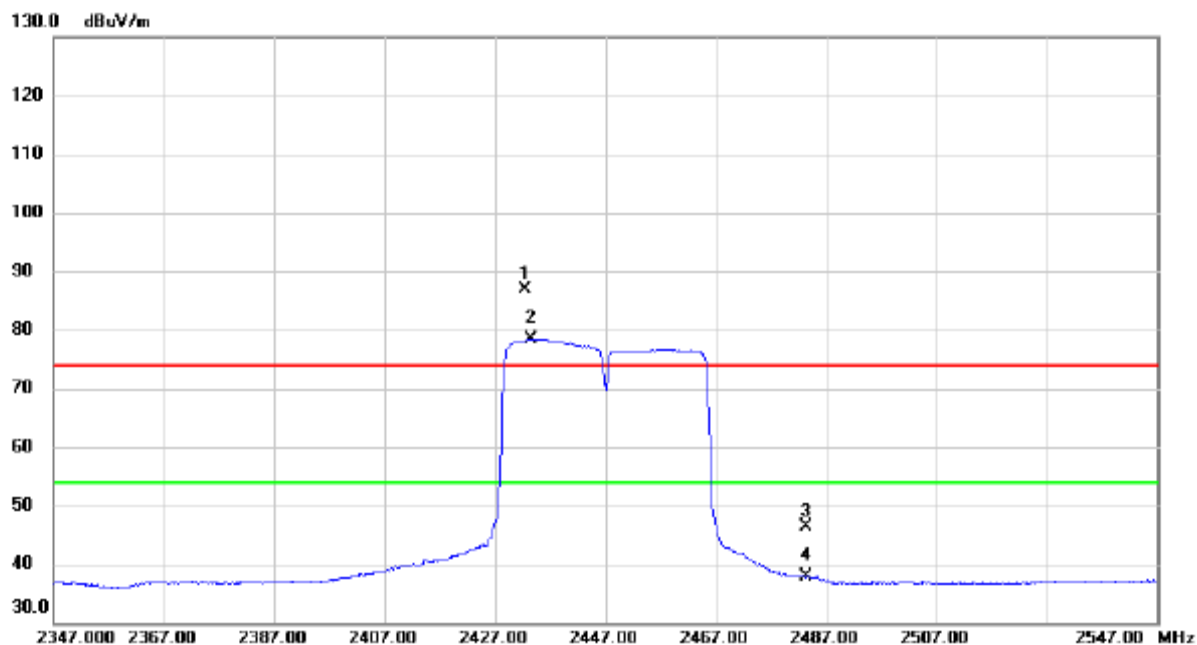

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2432.500	80.39	6.61	87.00	74.00	13.00	peak	
2	*	2433.400	71.86	6.62	78.48	54.00	24.48	AVG	
3		2483.500	39.69	6.61	46.30	74.00	-27.70	peak	
4		2483.500	31.17	6.61	37.78	54.00	-16.22	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz

Horizontal

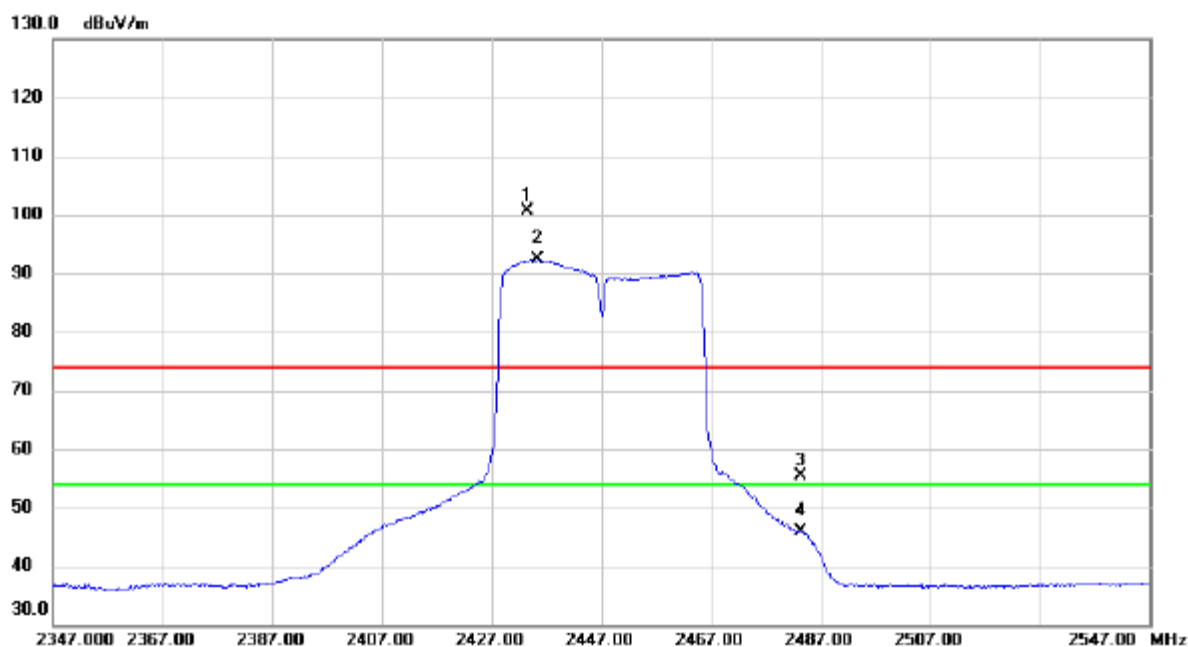


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2433.600	93.98	6.62	100.60	74.00	26.60	peak	
2	*	2435.300	85.65	6.62	92.27	54.00	38.27	AVG	
3		2483.500	48.82	6.61	55.43	74.00	-18.57	peak	
4		2483.500	39.18	6.61	45.79	54.00	-8.21	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

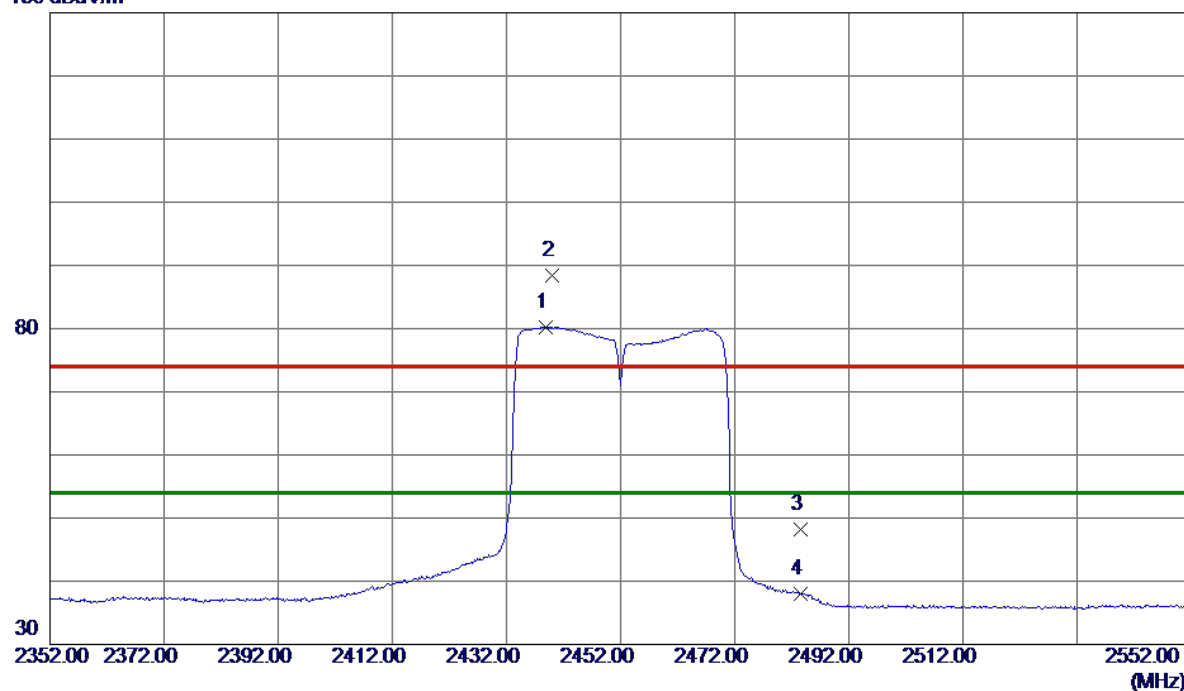


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.9000	73.66	6.61	80.27	54.00	26.27	AVG	No Limit
2	2439.9000	81.84	6.61	88.45	74.00	14.45	Peak	No Limit
3	2483.5000	41.55	6.61	48.16	74.00	-25.84	Peak	
4	2483.5000	31.35	6.61	37.96	54.00	-16.04	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

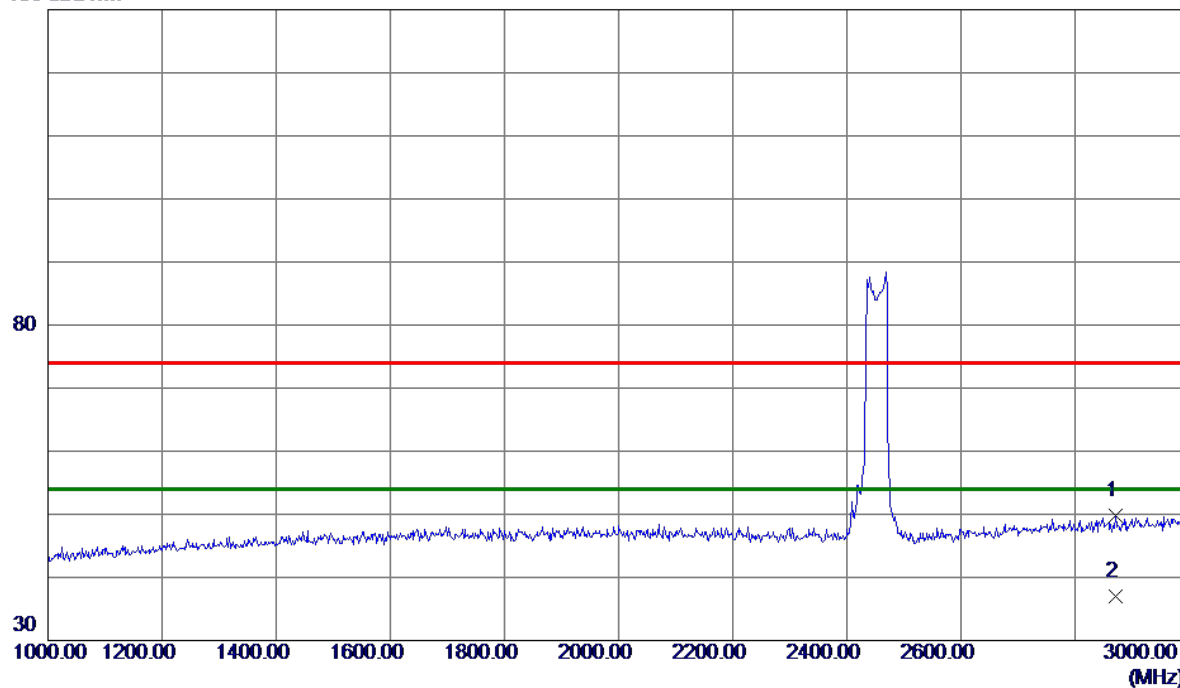


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2871.0000	40.69	9.09	49.78	74.00	-24.22	Peak	
2 *	2871.0000	27.88	9.09	36.97	54.00	-17.03	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

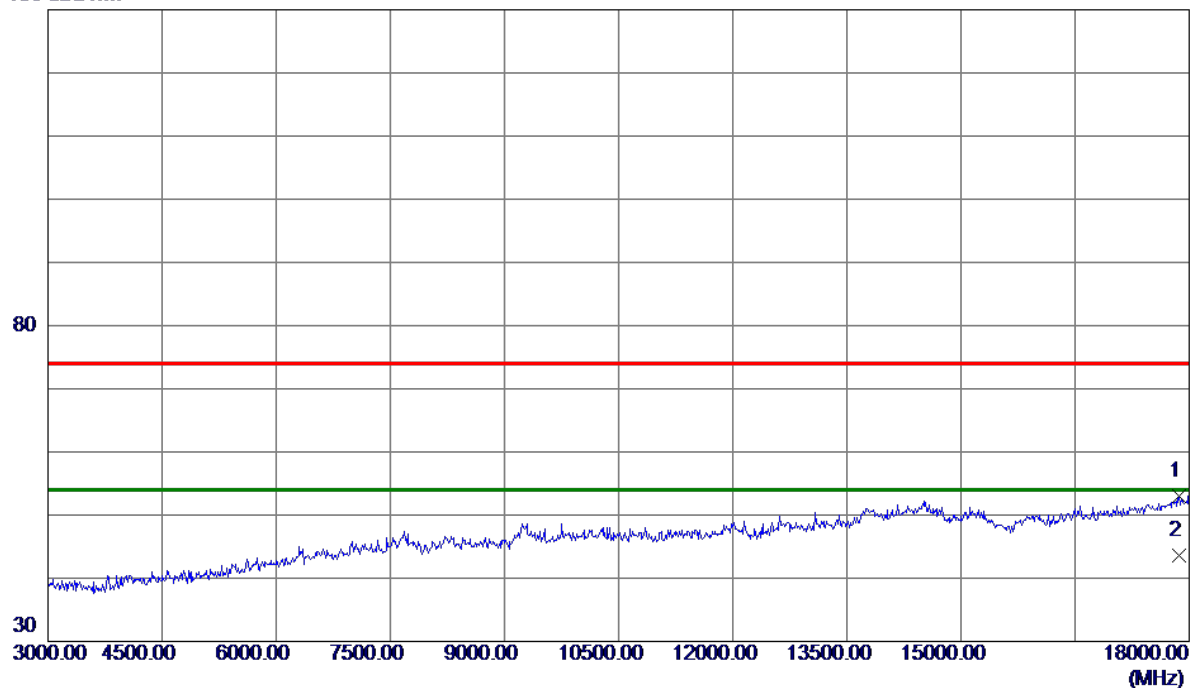


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17872.5000	34.03	18.99	53.02	74.00	-20.98	Peak	
2 *	17872.5000	24.61	18.99	43.60	54.00	-10.40	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

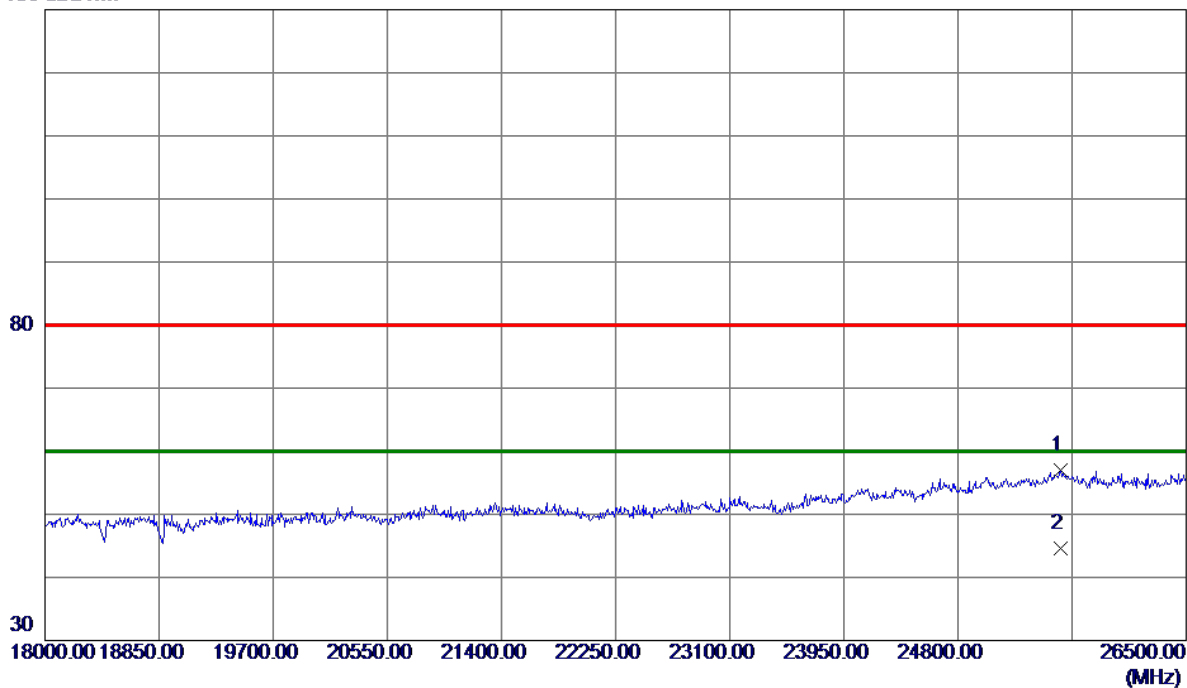


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25565.0000	39.71	17.25	56.96	80.00	-23.04	Peak	
2 *	25565.0000	27.41	17.25	44.66	60.00	-15.34	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

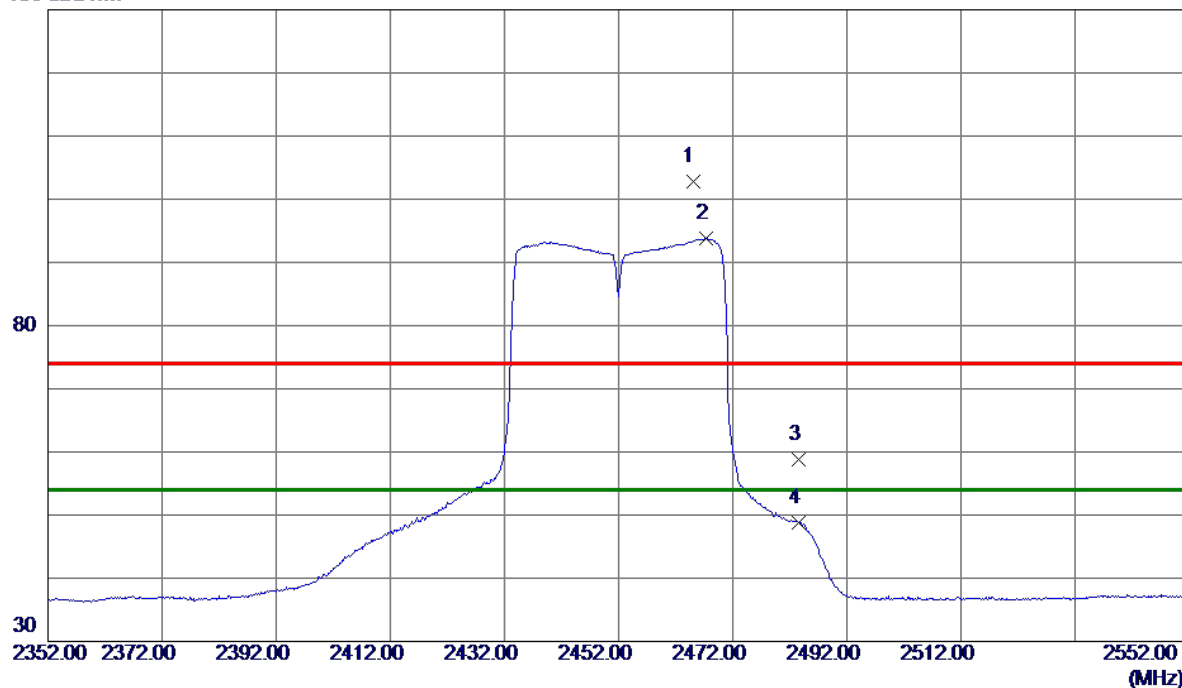


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2465.0000	96.19	6.61	102.80	74.00	28.80	Peak	No Limit
2 *	2467.3000	87.15	6.61	93.76	54.00	39.76	AVG	No Limit
3	2483.5000	52.11	6.61	58.72	74.00	-15.28	Peak	
4	2483.5000	42.19	6.61	48.80	54.00	-5.20	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

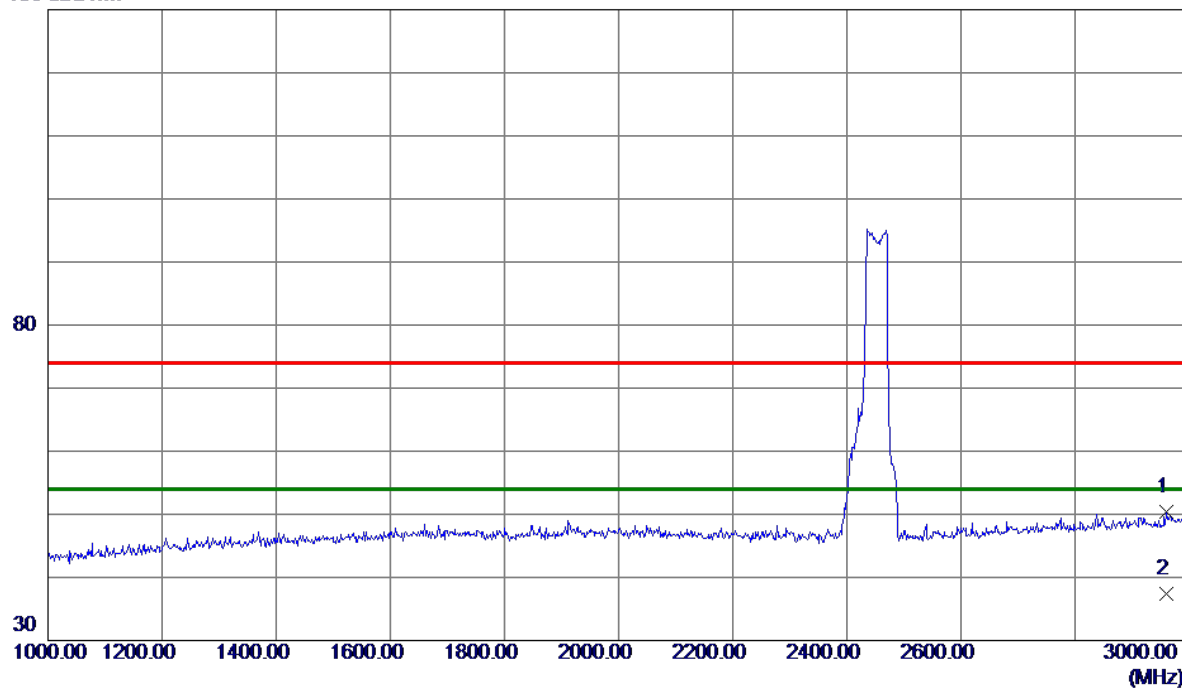


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2960.0000	40.63	9.69	50.32	74.00	-23.68	Peak	
2 *	2960.0000	27.65	9.69	37.34	54.00	-16.66	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

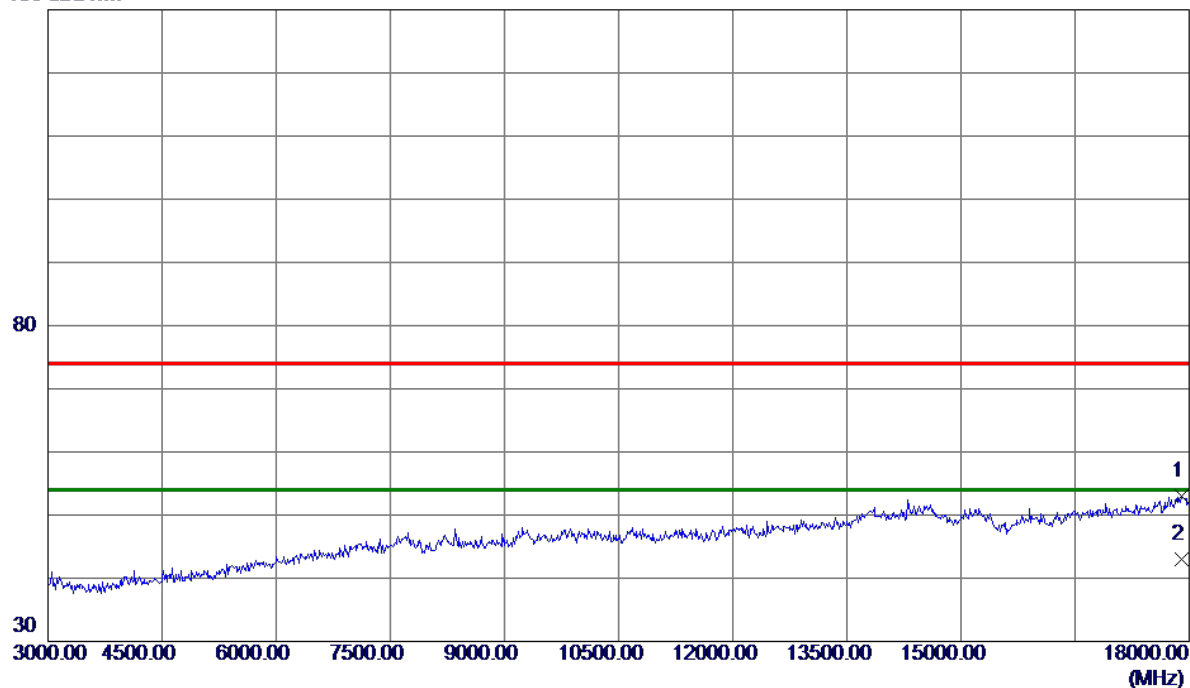


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17895.0000	33.99	19.06	53.05	74.00	-20.95	Peak	
2 *	17895.0000	23.98	19.06	43.04	54.00	-10.96	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

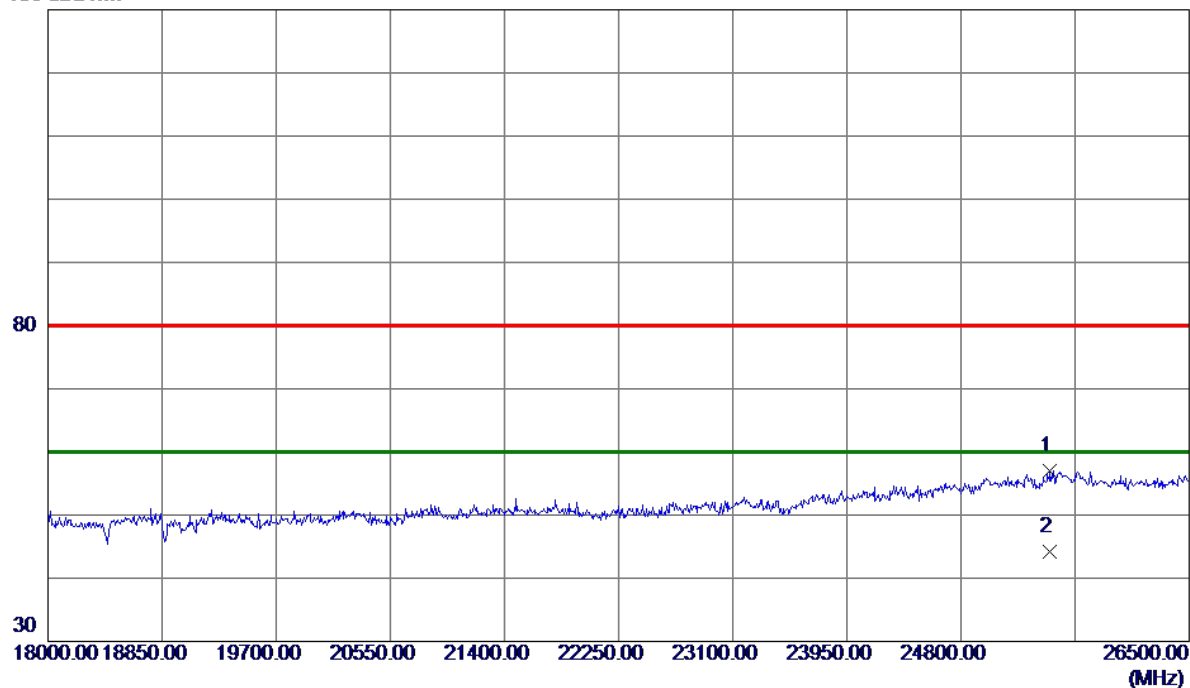

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25463.0000	39.69	17.30	56.99	80.00	-23.01	Peak	
2 *	25463.0000	26.98	17.30	44.28	60.00	-15.72	AVG	

End of Test Report