

FCC Radio Test Report

FCC ID: 2AFG6-SI01


This report concerns (check one): ☒Original Grant ☐Class I Change ☐Class II Change

Project No. : 1611C116
Equipment : WiFi Module
Model Name : SI01
Applicant : Guangzhou Shirui Electronics Co.,Ltd
Address : 192Kexu Road, SciencetechPark, Guangzhou
Economic & Technology Development District,
Guangzhou, Guangdong, China

Date of Receipt : Nov. 17, 2016
Date of Test : Nov. 17, 2016 ~ Dec. 07, 2016
Issued Date : Dec. 08, 2016
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : 
(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents | Page |
|--|-----------|
| 1 . CERTIFICATION | 6 |
| 2 . SUMMARY OF TEST RESULTS | 7 |
| 2.1 TEST FACILITY | 8 |
| 2.2 MEASUREMENT UNCERTAINTY | 8 |
| 3 . GENERAL INFORMATION | 9 |
| 3.1 GENERAL DESCRIPTION OF EUT | 9 |
| 3.2 DESCRIPTION OF TEST MODES | 11 |
| 3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING | 13 |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 15 |
| 3.5 DESCRIPTION OF SUPPORT UNITS | 15 |
| 4 . EMC EMISSION TEST | 16 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 16 |
| 4.1.1 POWER LINE CONDUCTED EMISSION | 16 |
| 4.1.2 TEST PROCEDURE | 16 |
| 4.1.3 DEVIATION FROM TEST STANDARD | 16 |
| 4.1.4 TEST SETUP | 17 |
| 4.1.5 EUT OPERATING CONDITIONS | 17 |
| 4.1.6 EUT TEST CONDITIONS | 17 |
| 4.1.7 TEST RESULTS | 17 |
| 4.2 RADIATED EMISSION MEASUREMENT | 18 |
| 4.2.1 RADIATED EMISSION LIMITS | 18 |
| 4.2.2 TEST PROCEDURE | 19 |
| 4.2.3 DEVIATION FROM TEST STANDARD | 19 |
| 4.2.4 TEST SETUP | 19 |
| 4.2.5 EUT OPERATING CONDITIONS | 21 |
| 4.2.6 EUT TEST CONDITIONS | 21 |
| 4.2.7 TEST RESULTS (9K TO 30MHz) | 22 |
| 4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz) | 22 |
| 4.2.9 TEST RESULTS (ABOVE 1000 MHz) | 22 |
| 5 . 26dB SPECTRUM BANDWIDTH | 23 |
| 5.1 APPLIED PROCEDURES / LIMIT | 23 |
| 5.1.1 TEST PROCEDURE | 23 |
| 5.1.2 DEVIATION FROM STANDARD | 23 |
| 5.1.3 TEST SETUP | 23 |
| 5.1.4 EUT OPERATION CONDITIONS | 23 |
| 5.1.5 EUT TEST CONDITIONS | 24 |
| 5.1.6 TEST RESULTS | 24 |
| 6 . MAXIMUM CONDUCTED OUTPUT POWER | 25 |

| Table of Contents | Page |
|--|-------------|
| 6.1 APPLIED PROCEDURES / LIMIT | 25 |
| 6.1.1 TEST PROCEDURE | 25 |
| 6.1.2 DEVIATION FROM STANDARD | 26 |
| 6.1.3 TEST SETUP | 26 |
| 6.1.4 EUT OPERATION CONDITIONS | 26 |
| 6.1.5 EUT TEST CONDITIONS | 26 |
| 6.1.6 TEST RESULTS | 26 |
| 7 . POWER SPECTRAL DENSITY TEST | 27 |
| 7.1 APPLIED PROCEDURES / LIMIT | 27 |
| 8.1.1 TEST PROCEDURE | 27 |
| 7.1.1 DEVIATION FROM STANDARD | 28 |
| 7.1.2 TEST SETUP | 28 |
| 7.1.3 EUT OPERATION CONDITIONS | 28 |
| 7.1.4 EUT TEST CONDITIONS | 28 |
| 7.1.5 TEST RESULTS | 28 |
| 8 . FREQUENCY STABILITY MEASUREMENT | 29 |
| 8.1 APPLIED PROCEDURES / LIMIT | 29 |
| 8.1.1 TEST PROCEDURE | 29 |
| 8.1.2 DEVIATION FROM STANDARD | 29 |
| 8.1.3 TEST SETUP | 30 |
| 8.1.4 EUT OPERATION CONDITIONS | 30 |
| 8.1.5 EUT TEST CONDITIONS | 30 |
| 8.1.6 TEST RESULTS | 30 |
| 9 . MEASUREMENT INSTRUMENTS LIST | 31 |
| 10 . EUT TEST PHOTOS | 33 |
| ATTACHMENT A - CONDUCTED EMISSION | 37 |
| ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ) | 40 |
| ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ) | 45 |
| ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ) | 58 |
| ATTACHMENT E - BANDWIDTH | 177 |
| ATTACHMENT F - MAXIMUM OUTPUT POWER | 200 |
| ATTACHMENT G - POWER SPECTRAL DENSITY | 205 |
| ATTACHMENT H - FREQUENCY STABILITY | 228 |

REPORT ISSUED HISTORY

| Issued No. | Description | Issued Date |
|---------------------|-----------------|---------------|
| BTL-FCCP-4-1611C116 | Original Issue. | Dec. 08, 2016 |

1. CERTIFICATION

Equipment : WiFi Module
Brand Name : seewo
Model Name : SI01
Applicant : Guangzhou Shirui Electronics Co.,Ltd
Manufacturer : Guangzhou Shirui Electronics Co.,Ltd
Address : 192Kezhu Road, ScienteckPark, Guangzhou Economic & Technology
Development District, Guangzhou, Guangdong, China
Factory : Coretronic (Guangzhou) Co.,LTD.
Address : Building 1,No.2 Guoyuan 1st Road, EastZone, GuangzhouEconmic and
Technological Development District ,Guangzhou ,Guangdong Province, P.R.
China
Date of Test : Nov. 17, 2016 ~ Dec. 07, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1611C116) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the WiFi 5G UNII-1 and UNII-3 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| Applied Standard(s): FCC Part15, Subpart E(15.407) | | | |
|--|-----------------------------------|----------|--------|
| Standard(s) Section | Test Item | Judgment | Remark |
| 15.207 | AC Power Line Conducted Emissions | PASS | |
| 15.407(a) | 26dB Spectrum Bandwidth | PASS | |
| 15.407(a) | Maximum Conducted Output Power | PASS | |
| 15.407(a) | Power Spectral Density | PASS | |
| 15.407(a) | Radiated Emissions | PASS | |
| 15.407(b) | Band Edge Emissions | PASS | |
| 15.407(g) | Frequency Stability | PASS | |
| 15.203 | Antenna Requirements | PASS | |

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02 | CISPR | 150 KHz ~ 30MHz | 1.94 |

B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| DG-CB03 | CISPR | 9kHz~30MHz | V | 3.79 |
| | | 9kHz~30MHz | H | 3.57 |
| | | 30MHz ~ 200MHz | V | 3.82 |
| | | 30MHz ~ 200MHz | H | 3.60 |
| | | 200MHz ~ 1,000MHz | V | 3.86 |
| | | 200MHz ~ 1,000MHz | H | 3.94 |
| | | 1GHz~18GHz | V | 3.12 |
| | | 1GHz~18GHz | H | 3.68 |
| | | 18GHz~40GHz | V | 4.15 |
| | | 18GHz~40GHz | H | 4.14 |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|---------------------|-------------------------------|--|
| Equipment | WiFi Module | |
| Brand Name | seewo | |
| Model Name | SI01 | |
| Mode Different | N/A | |
| Product Description | Operation Frequency | UNII-1: 5150-5250MHz UNII-3: 5725-5850MHz |
| | Modulation Type | OFDM |
| | Bit Rate of Transmitter | 150Mbps |
| Power Source | Supplied from PC USB port. | |
| Power Rating | DC 5V | |
| Output Power | Output Power (Max.)for UNII-1 | 802.11a: 10.91dBm 802.11n (20M): 9.87dBm 802.11n (40M): 9.74dBm 802.11ac (20M): 8.89dBm 802.11ac (40M): 7.92dBm 802.11ac (80M): 7.88dBm |
| | Output Power (Max.)for UNII-3 | 802.11a: 10.91dBm 802.11n (20M): 9.86dBm 802.11n (40M): 9.94dBm 802.11ac (20M): 8.78dBm 802.11ac (40M): 7.83dBm 802.11ac (80M): 7.82dBm |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Channel List:

| UNII-1 | | UNII-1 | | UNII-1 | |
|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 36 | 5180 | 38 | 5190 | 42 | 5210 |
| 40 | 5200 | 46 | 5230 | | |
| 44 | 5220 | | | | |
| 48 | 5240 | | | | |

| UNII-3 | | UNII-3 | | UNII-3 | |
|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 149 | 5745 | 151 | 5755 | 155 | 5775 |
| 153 | 5765 | 159 | 5795 | | |
| 157 | 5785 | | | | |
| 161 | 5805 | | | | |
| 165 | 5825 | | | | |

3. Antenna Specification:

| Ant. | Manufacturer | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|--------------|------------|--------------|-----------|------------|
| 1 | seewo | N/A | Dipole | N/A | 4.3 |

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|---|
| Mode 1 | TX A Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 2 | TX N20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 3 | TX N40 Mode / CH38, CH46 (UNII-1) |
| Mode 4 | TX AC20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 5 | TX AC40 Mode / CH38, CH46 (UNII-1) |
| Mode 6 | TX AC80 Mode / CH42 (UNII-1) |
| Mode 7 | TX A Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 8 | TX N20 Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 9 | TX N40 Mode / CH151,CH159 (UNII-3) |
| Mode 10 | TX AC20 Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 11 | TX AC40 Mode / CH151,CH159 (UNII-3) |
| Mode 12 | TX AC80 Mode / CH155 (UNII-3) |
| Mode 13 | TX Mode |

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

| For Conducted Test | |
|--------------------|-------------|
| Final Test Mode | Description |
| Mode 13 | TX Mode |

| For Radiated Test | |
|-------------------|---|
| Final Test Mode | Description |
| Mode 1 | TX A Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 2 | TX N20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 3 | TX N40 Mode / CH38, CH46 (UNII-1) |
| Mode 4 | TX AC20 Mode / CH36, CH40, CH48 (UNII-1) |
| Mode 5 | TX AC40 Mode / CH38, CH46 (UNII-1) |
| Mode 6 | TX AC80 Mode / CH42 (UNII-1) |
| Mode 7 | TX A Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 8 | TX N20 Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 9 | TX N40 Mode / CH151,CH159 (UNII-3) |
| Mode 10 | TX AC20 Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 11 | TX AC40 Mode / CH151,CH159 (UNII-3) |
| Mode 12 | TX AC80 Mode / CH155 (UNII-3) |

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


| UNII-1 | | | |
|-----------------------|--------------------------------|------|------|
| Test Software Version | Realtek 11ac 8821A USB WLAN MP | | |
| Frequency (MHz) | 5180 | 5200 | 5240 |
| A Mode | 52 | 51 | 48 |
| Frequency (MHz) | 5180 | 5200 | 5240 |
| N20 Mode | 48 | 48 | 46 |
| Frequency (MHz) | 5190 | 5230 | |
| N40 Mode | 50 | 48 | |

| UNII-3 | | | |
|-----------------------|--------------------------------|------|------|
| Test Software Version | Realtek 11ac 8821A USB WLAN MP | | |
| Frequency (MHz) | 5745 | 5785 | 5825 |
| A Mode | 44 | 42 | 38 |
| Frequency (MHz) | 5745 | 5785 | 5825 |
| N20 Mode | 41 | 39 | 36 |
| Frequency (MHz) | 5755 | 5795 | |
| N40 Mode | 42 | 41 | |

| UNII-1 | | | |
|-----------------------|--------------------------------|------|------|
| Test Software Version | Realtek 11ac 8821A USB WLAN MP | | |
| Frequency (MHz) | 5180 | 5200 | 5240 |
| AC20 Mode | 47 | 46 | 45 |
| Frequency (MHz) | 5190 | 5230 | |
| AC40 Mode | 46 | 45 | |
| Frequency (MHz) | 5210 | | |
| AC80 Mode | 46 | | |

| UNII-3 | | | |
|-----------------------|--------------------------------|------|------|
| Test Software Version | Realtek 11ac 8821A USB WLAN MP | | |
| Frequency (MHz) | 5745 | 5785 | 5825 |
| AC20 Mode | 38 | 36 | 35 |
| Frequency (MHz) | 5755 | 5795 | |
| AC40 Mode | 37 | 35 | |
| Frequency (MHz) | 5775 | | |
| AC80 Mode | 37 | | |

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

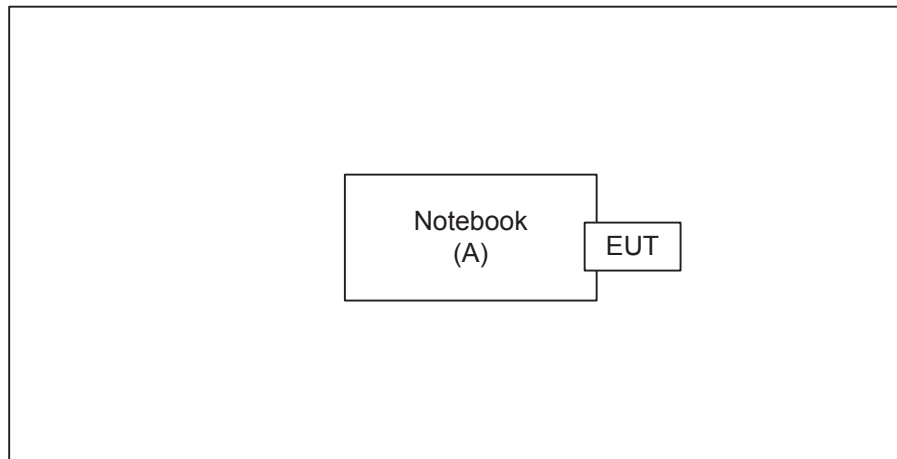

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. |
|------|-----------|-----------|----------------|--------|--------------|
| A | Notebook | Lenovo | INSPIRON 1420- | DOC | JX193A01SDC2 |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| - | - | - | - | - |

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) | | Class B (dBuV) | |
|-----------------|----------------|---------|----------------|-----------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

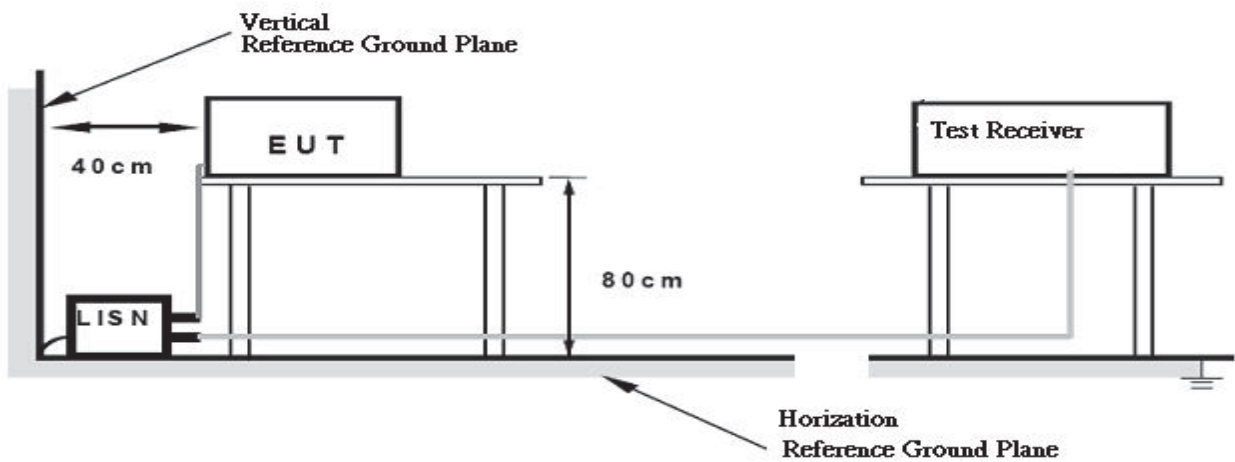

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

| Frequencies (MHz) | EIRP Limit (dBm) | Equivalent Field Strength at 3m (dBμV/m) |
|-------------------|------------------|--|
| 5150-5250 | -27 | 68.3 |
| 5250-5350 | -27 | 68.3 |
| 5470-5725 | -27 | 68.3 |
| 5725-5850 | -27(Note 2) | 68.3 |
| | 10(Note 2) | 105.3 |
| | 15.6(Note 2) | 110.9 |
| | 27(Note 2) | 122.3 |

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A)Radiated Emission Test Set-Up Frequency Below 1GHz

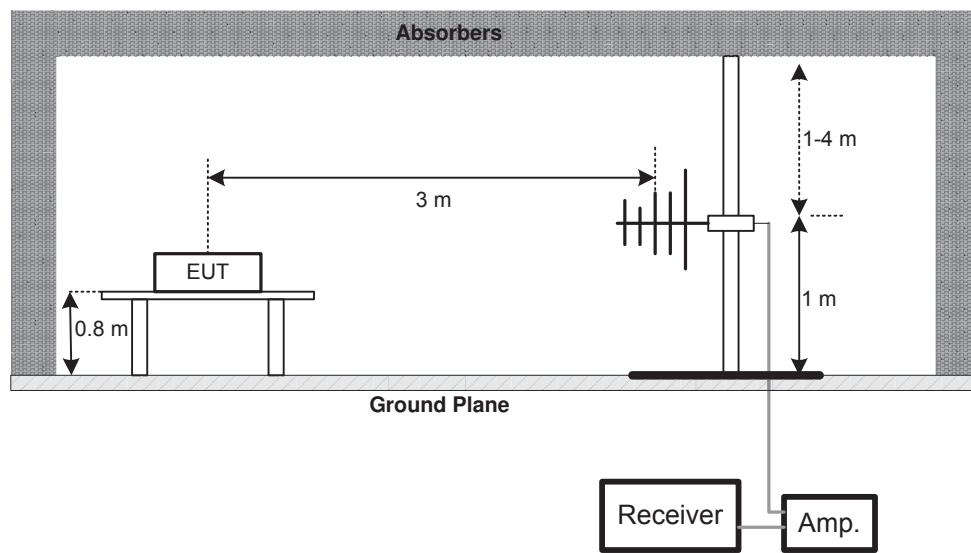

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

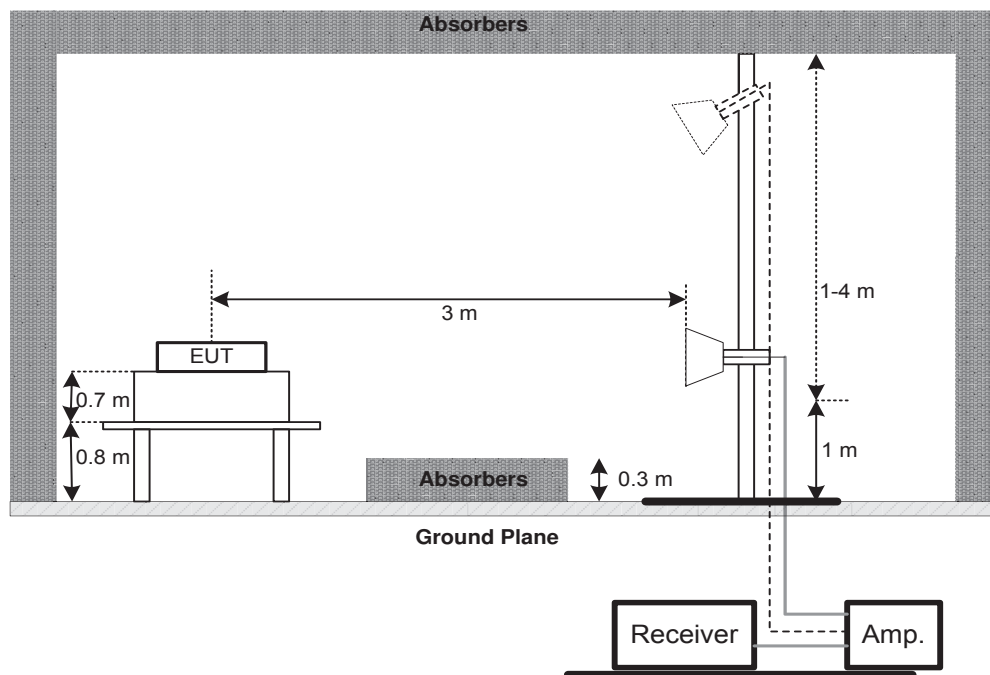

(C) Radiated emissions below 30MHz

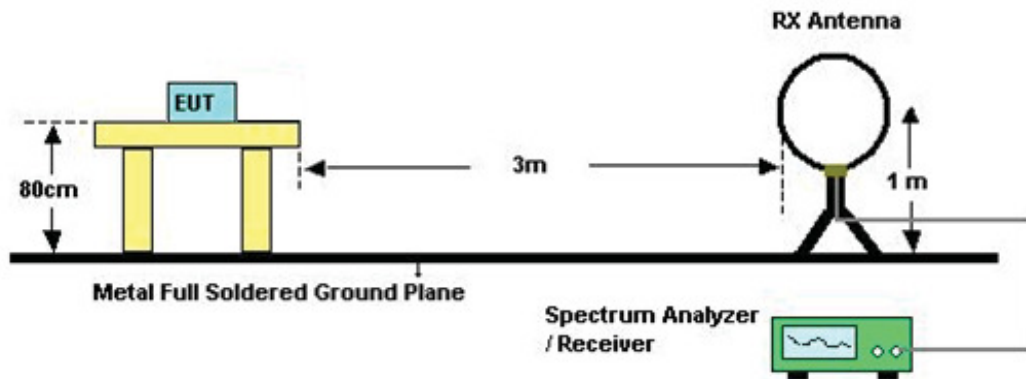

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|-----------------------|------------------------------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Bandwidth | 26 dB Bandwidth | 5150-5250 | PASS |
| | Minimum 500kHz 6dB Bandwidth | 5725-5850 | PASS |

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameters | Setting |
|---------------------|---|
| Attenuation | Auto |
| Span Frequency | > 26dB Bandwidth |
| RBW | 300 kHz(Bandwidth 20MHz) 1MHz(Bandwidth 40MHz and 80MHz) |
| VBW | 1MHz(Bandwidth 20MHz) 3MHz(Bandwidth 40MHz and 80MHz) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|---|---|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Conducted Output Power | Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm) | 5150-5250 | PASS |
| | 1 Watt (30dBm) | 5725-5850 | PASS |
| Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm) | | | |

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW | = 1MHz. |
| VBW | \geq 3MHz. |
| Detector | RMS |
| Trace | Max Hold |
| Sweep Time | auto |

- c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|------------------------|---|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Power Spectral Density | Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz | 5150-5250 | PASS |
| | 30dBm/500kHz | 5725-5850 | PASS |

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW | = 1MHz. |
| VBW | ≥ 3MHz. |
| Detector | RMS |
| Trace average | 100 trace |
| Sweep Time | Auto |


Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.1 DEVIATION FROM STANDARD

No deviation.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment H.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|-----------------------|--------------------------------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Frequency Stability | Specified in the user's manual | 5150-5250 | PASS |
| | | 5725-5850 | PASS |


8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.
- | Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Entire absence of modulation emissions bandwidth |
| RBW | 10 kHz |
| VBW | 10 kHz |
| Sweep Time | Auto |
- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~40°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

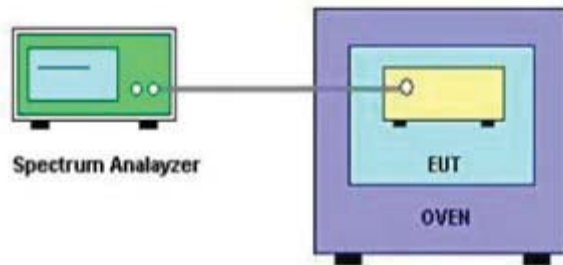

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment I.

9. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission Measurement | | | | | |
|--------------------------------|----------------------|--------------|-----------------------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | LISN | EMCO | 3816/2 | 0052765 | Mar. 27, 2017 |
| 2 | LISN | R&S | ENV216 | 101447 | Mar. 27, 2017 |
| 3 | Test Cable | emci | RG223(9KHz-30 MHz) | C_17 | Mar. 10, 2017 |
| 4 | EMI Test Receiver | R&S | ESCI | 100382 | Mar. 27, 2017 |
| 5 | 50Ω Terminator | SHX | TF2-3G-A | 08122901 | Mar. 27, 2017 |
| 6 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |

| Radiated Emission Measurement | | | | | |
|-------------------------------|-------------------------------------|----------------|-------------------------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Antenna | Schwarzbeck | VULB9160 | 9160-3232 | Mar. 27, 2017 |
| 2 | Amplifier | HP | 8447D | 2944A09673 | Mar. 10, 2017 |
| 3 | Receiver | AGILENT | N9038A | MY52130039 | Sep. 04, 2017 |
| 4 | Test Cable | emci | LMR-400(30MHz-1GHz) | C-01 | Jun. 26, 2017 |
| 5 | Control | CT | SC100 | N/A | N/A |
| 6 | Position Control | MF | MF-7802 | MF780208416 | N/A |
| 7 | Antenna | ETS | 3115 | 00075789 | Mar. 27, 2017 |
| 8 | Amplifier | Agilent | 8449B | 3008A02274 | Mar. 10, 2017 |
| 9 | Receiver | AGILENT | N9038A | MY52130039 | Sep. 04, 2017 |
| 10 | Test Cable | emci | EMC104-SM-S M-10000(1GHz – 26.5GHz) | C-68 | Jun. 26, 2017 |
| 11 | Controller | CT | SC100 | N/A | N/A |
| 12 | Broad-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170319 | Apr. 23, 2017 |
| 13 | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045 | 980039 & HA01 | Mar. 27, 2017 |
| 14 | Active Loop Antenna | R&S | HFH2-Z2 | 830749/020 | Sep. 06, 2017 |
| 15 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |

| Spectrum Bandwidth Measurement | | | | | |
|--------------------------------|-------------------|--------------|----------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Spectrum Analyzer | R&S | FSP 40 | 100185 | Sep. 04, 2017 |

| Maximum Conducted Output Power Measurement | | | | | |
|--|--------------------|--------------|----------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Power Meter | ANRITSU | ML2495A | 1128009 | Mar. 27, 2017 |
| 2 | Pulse Power Sensor | ANRITSU | MA 2411B | 1027500 | Mar. 27, 2017 |

| Power Spectral Density Measurement | | | | | |
|------------------------------------|-------------------|--------------|----------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Spectrum Analyzer | R&S | FSP 40 | 100185 | Sep. 04, 2017 |

| Frequency Stability Measurement | | | | | |
|---------------------------------|-----------------------|--------------|----------|------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Spectrum Analyzer | R&S | FSP 40 | 100185 | Sep. 04, 2017 |
| 2 | Precision Oven Tester | HOLINK | H-T-1F-D | BA03101701 | May 22, 2017 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTOS

Conducted Measurement Photos



Radiated Measurement Photos

9KHz to 30MHz





Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz

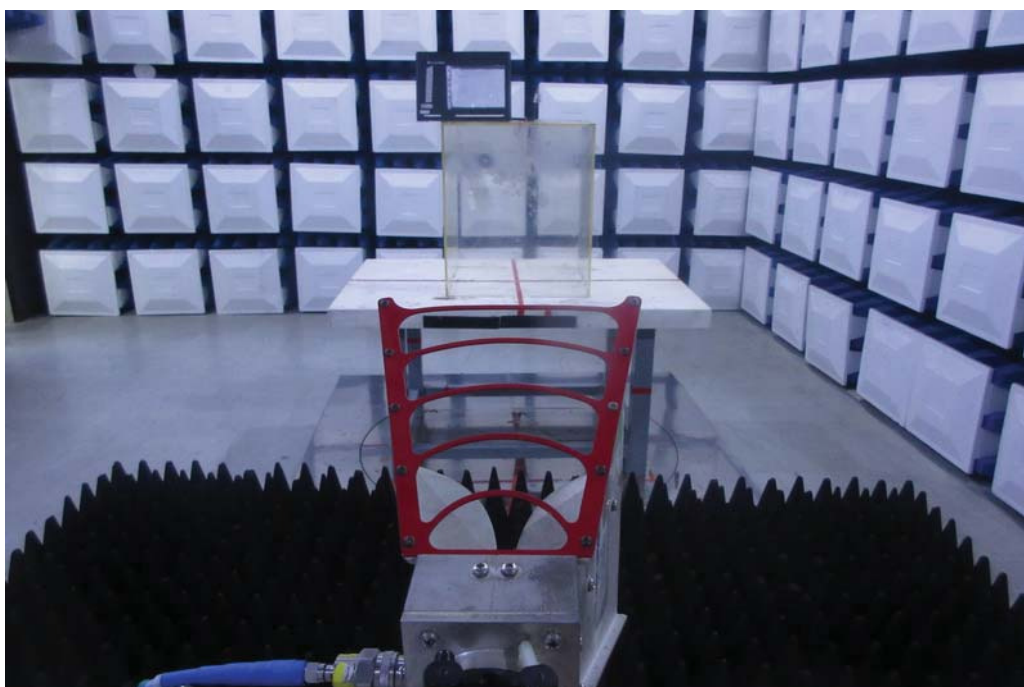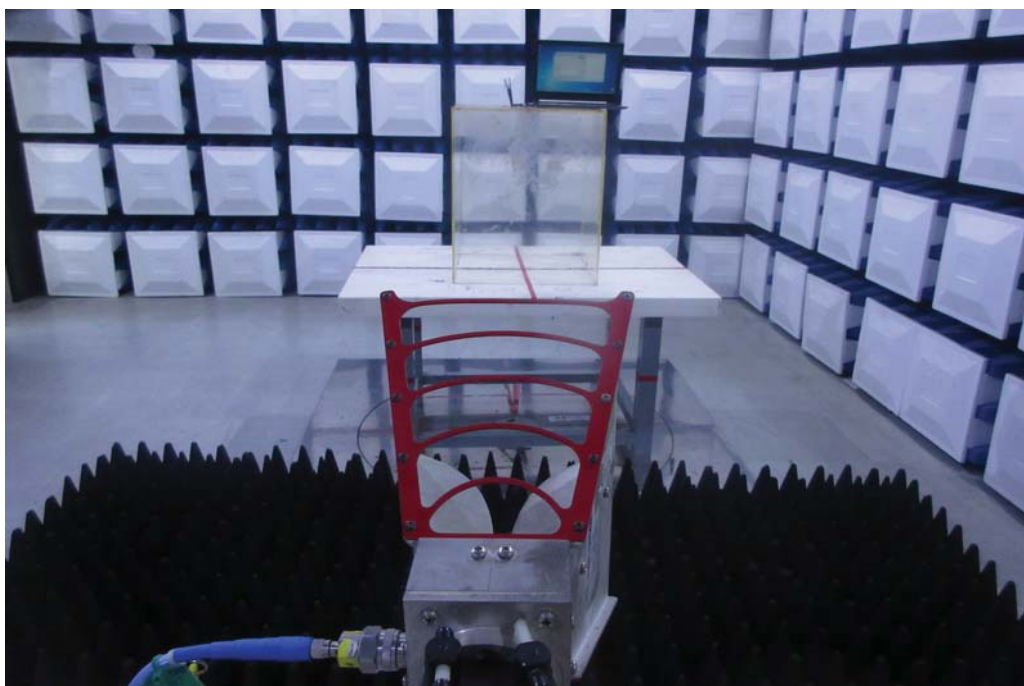

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode

Line

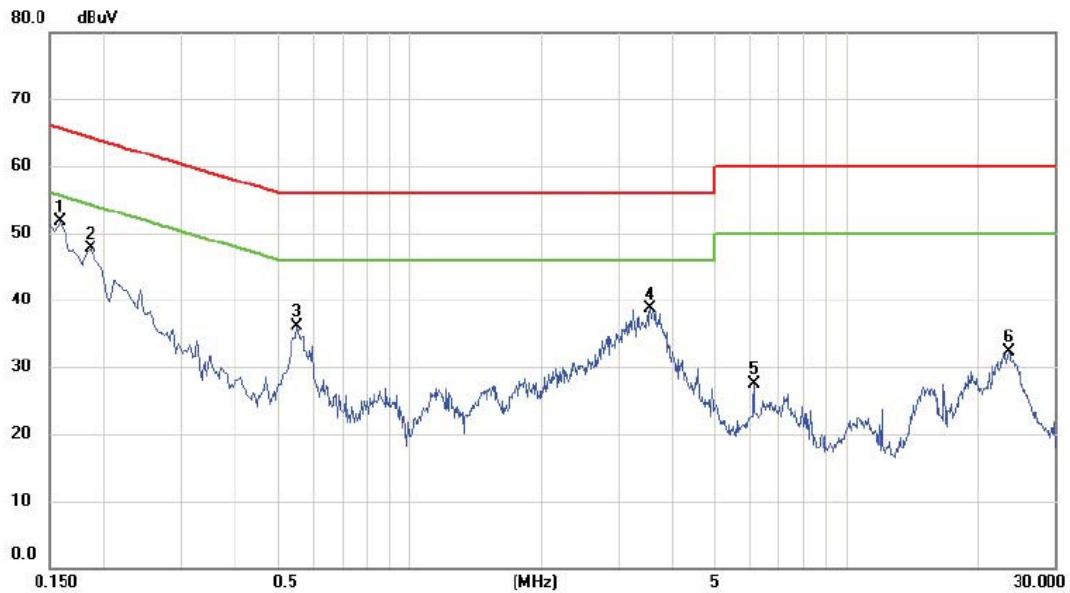


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1580 | 42.22 | 9.52 | 51.74 | 65.57 | -13.83 | peak | |
| 2 | | 0.1860 | 38.21 | 9.53 | 47.74 | 64.21 | -16.47 | peak | |
| 3 | | 0.5540 | 26.42 | 9.64 | 36.06 | 56.00 | -19.94 | peak | |
| 4 | | 3.5300 | 28.57 | 10.14 | 38.71 | 56.00 | -17.29 | peak | |
| 5 | | 6.1460 | 17.35 | 10.08 | 27.43 | 60.00 | -32.57 | peak | |
| 6 | | 23.4740 | 21.82 | 10.40 | 32.22 | 60.00 | -27.78 | peak | |

Note : The test result has included the cable loss.

Test Mode: TX Mode

Neutral

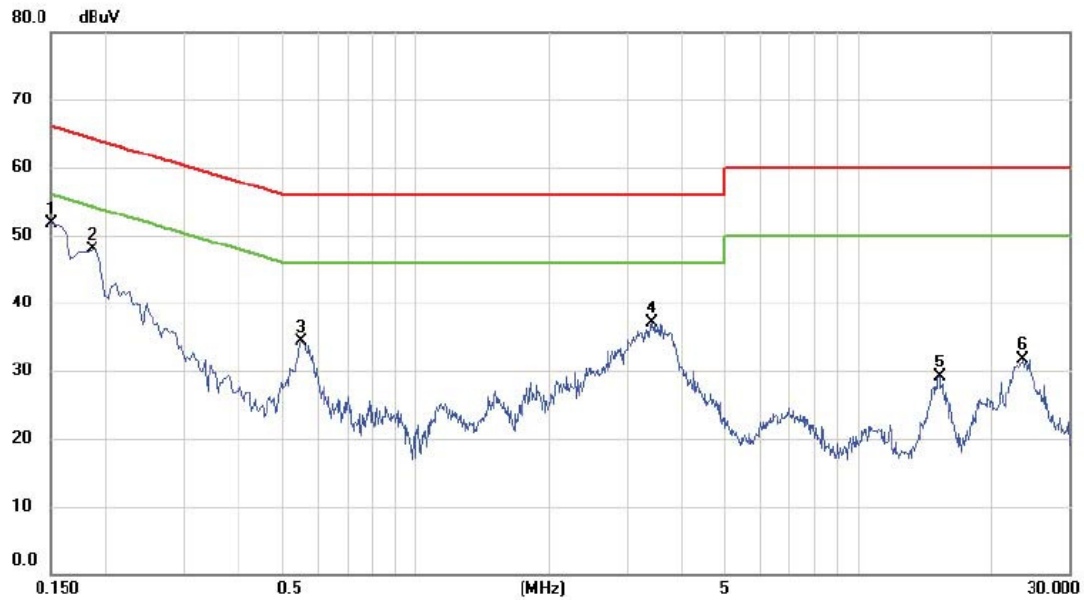


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1500 | 42.28 | 9.52 | 51.80 | 66.00 | -14.20 | peak | |
| 2 | | 0.1860 | 38.46 | 9.48 | 47.94 | 64.21 | -16.27 | peak | |
| 3 | | 0.5540 | 24.94 | 9.44 | 34.38 | 56.00 | -21.62 | peak | |
| 4 | | 3.4100 | 27.28 | 9.83 | 37.11 | 56.00 | -18.89 | peak | |
| 5 | | 15.2740 | 18.68 | 10.37 | 29.05 | 60.00 | -30.95 | peak | |
| 6 | | 23.4380 | 21.25 | 10.53 | 31.78 | 60.00 | -28.22 | peak | |

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode


Ant 0°

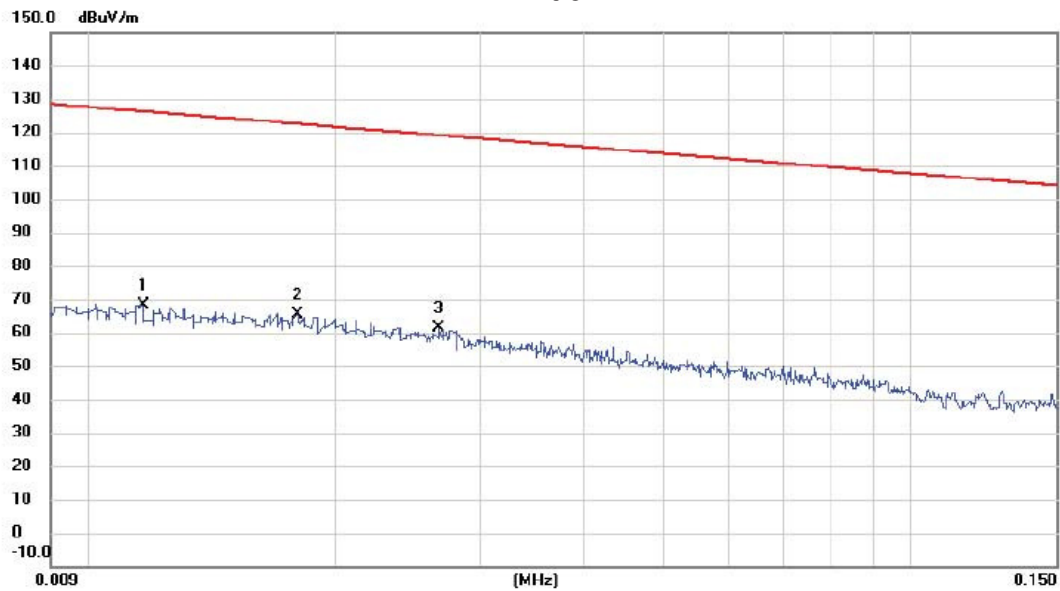

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 0.012 | 44.03 | 24.02 | 68.05 | 126.24 | -58.19 | AVG | |
| 2 | * | 0.018 | 41.79 | 23.64 | 65.43 | 122.50 | -57.07 | AVG | |
| 3 | | 0.027 | 38.70 | 22.69 | 61.39 | 119.07 | -57.68 | AVG | |

Test Mode: TX Mode


Ant 0°

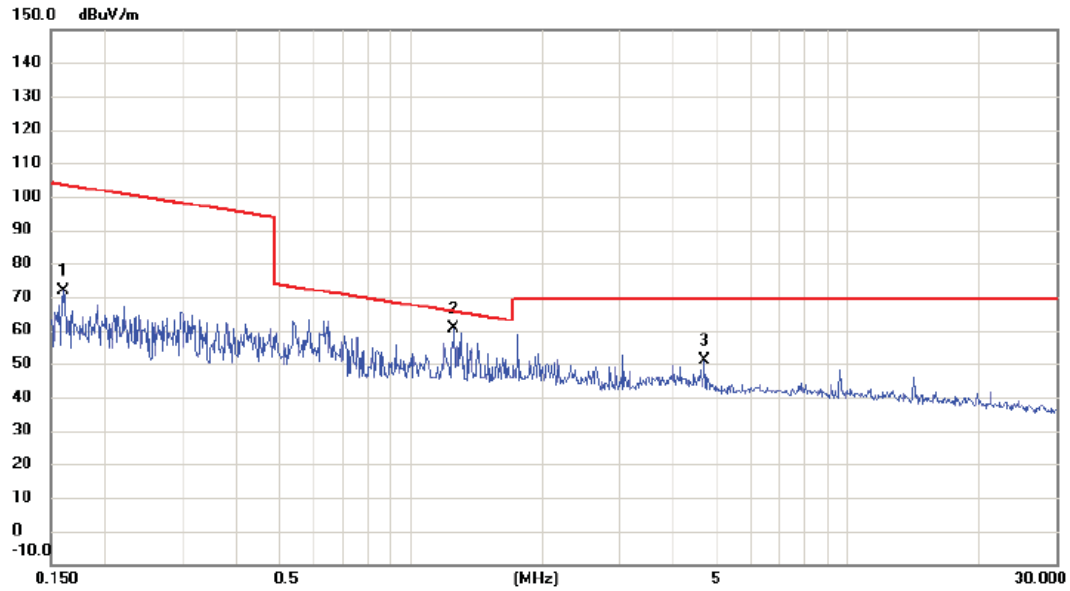

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Margin | | |
|-----|-----|-------|---------|---------|----------|--------|--------|----------|---------|
| | | MHz | Level | Factor | ment | | | Detector | Comment |
| | | | dBuV | dB | dBuV/m | dBuV/m | dB | | |
| 1 | | 0.161 | 52.93 | 18.73 | 71.66 | 103.49 | -31.83 | AVG | |
| 2 | * | 1.256 | 42.72 | 17.74 | 60.46 | 65.63 | -5.17 | QP | |
| 3 | | 4.696 | 33.73 | 17.31 | 51.04 | 69.54 | -18.50 | QP | |

Test Mode: TX Mode


Ant 90°

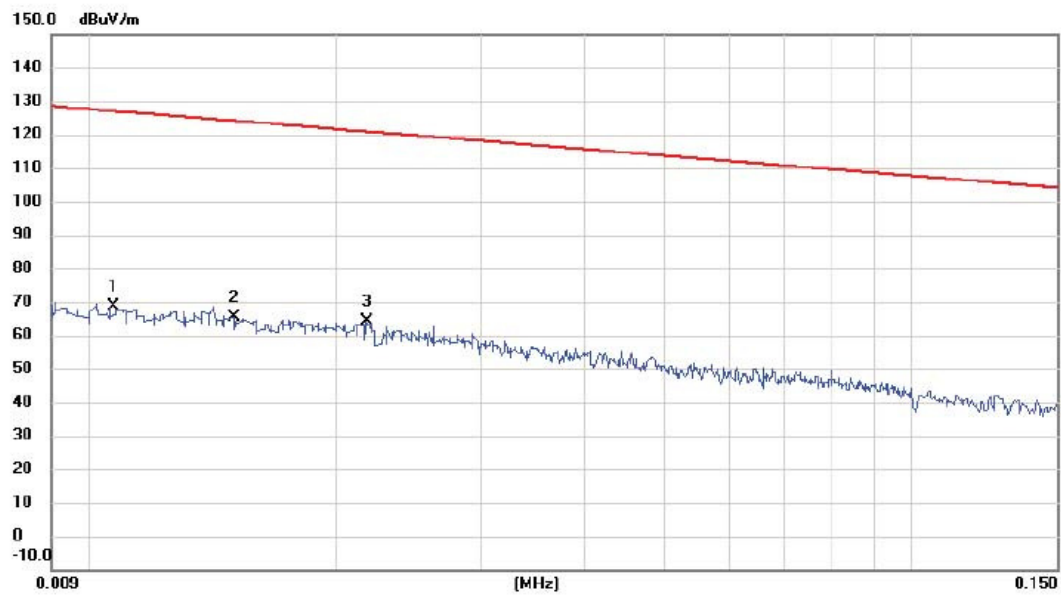

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | | |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 0.011 | 44.50 | 24.08 | 68.58 | 127.02 | -58.44 | AVG | |
| 2 | | 0.015 | 41.49 | 23.82 | 65.31 | 124.08 | -58.77 | AVG | |
| 3 | * | 0.022 | 41.09 | 23.30 | 64.39 | 120.84 | -56.45 | AVG | |

Test Mode: TX Mode

Ant 90°

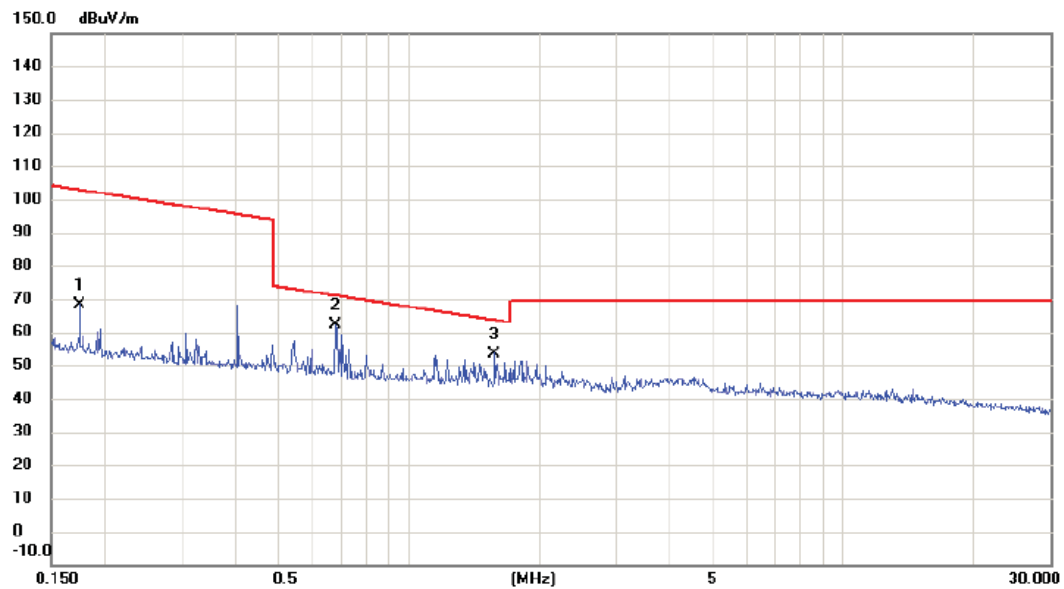


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 | | 0.174 | 49.68 | 18.72 | 68.40 | 102.80 | -34.40 | AVG | |
| 2 | * | 0.679 | 43.66 | 18.44 | 62.10 | 70.97 | -8.87 | QP | |
| 3 | | 1.577 | 35.79 | 17.81 | 53.60 | 63.65 | -10.05 | QP | |

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz

Vertical


80 dBuV/m

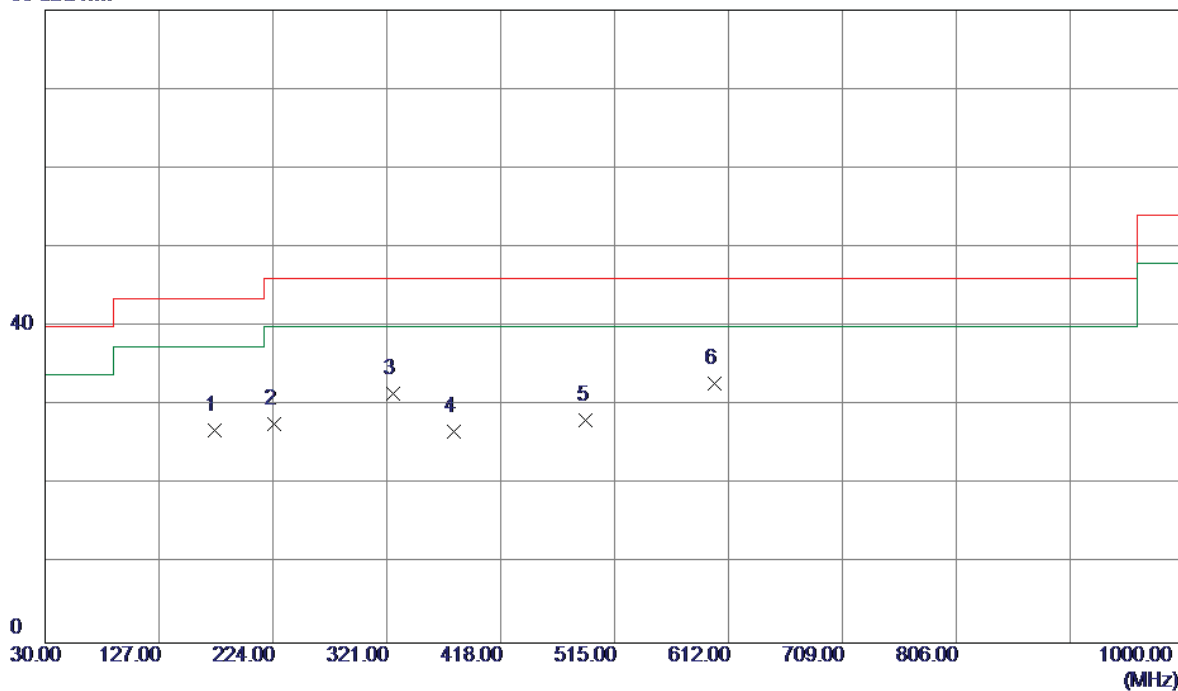

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 174.5300 | 38.27 | -11.36 | 26.91 | 43.50 | -16.59 | Peak | |
| 2 | 224.9700 | 41.09 | -13.44 | 27.65 | 46.00 | -18.35 | Peak | |
| 3 | 325.8500 | 41.91 | -10.37 | 31.54 | 46.00 | -14.46 | Peak | |
| 4 | 378.2300 | 35.54 | -8.75 | 26.79 | 46.00 | -19.21 | Peak | |
| 5 | 490.7500 | 35.76 | -7.54 | 28.22 | 46.00 | -17.78 | Peak | |
| 6 * | 600.3600 | 37.54 | -4.81 | 32.73 | 46.00 | -13.27 | Peak | |

Test Mode: UNII-1/TX A Mode 5180MHz

Horizontal

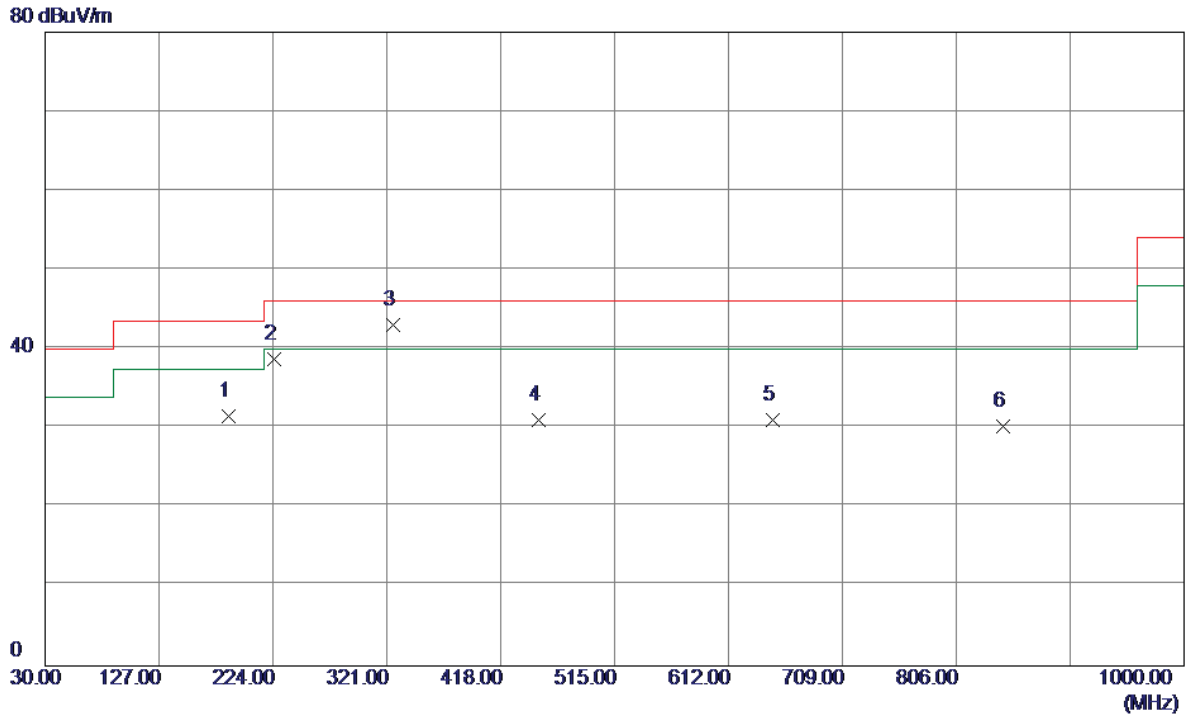


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 186.1700 | 44.29 | -12.79 | 31.50 | 43.50 | -12.00 | Peak | |
| 2 | 224.9700 | 52.21 | -13.44 | 38.77 | 46.00 | -7.23 | Peak | |
| 3 * | 325.8500 | 53.35 | -10.37 | 42.98 | 46.00 | -3.02 | Peak | |
| 4 | 450.0100 | 38.14 | -7.08 | 31.06 | 46.00 | -14.94 | Peak | |
| 5 | 649.8300 | 32.78 | -1.70 | 31.08 | 46.00 | -14.92 | Peak | |
| 6 | 845.7700 | 29.68 | 0.60 | 30.28 | 46.00 | -15.72 | Peak | |

Test Mode: UNII-1/TX A Mode 5200MHz

Vertical


80 dBuV/m

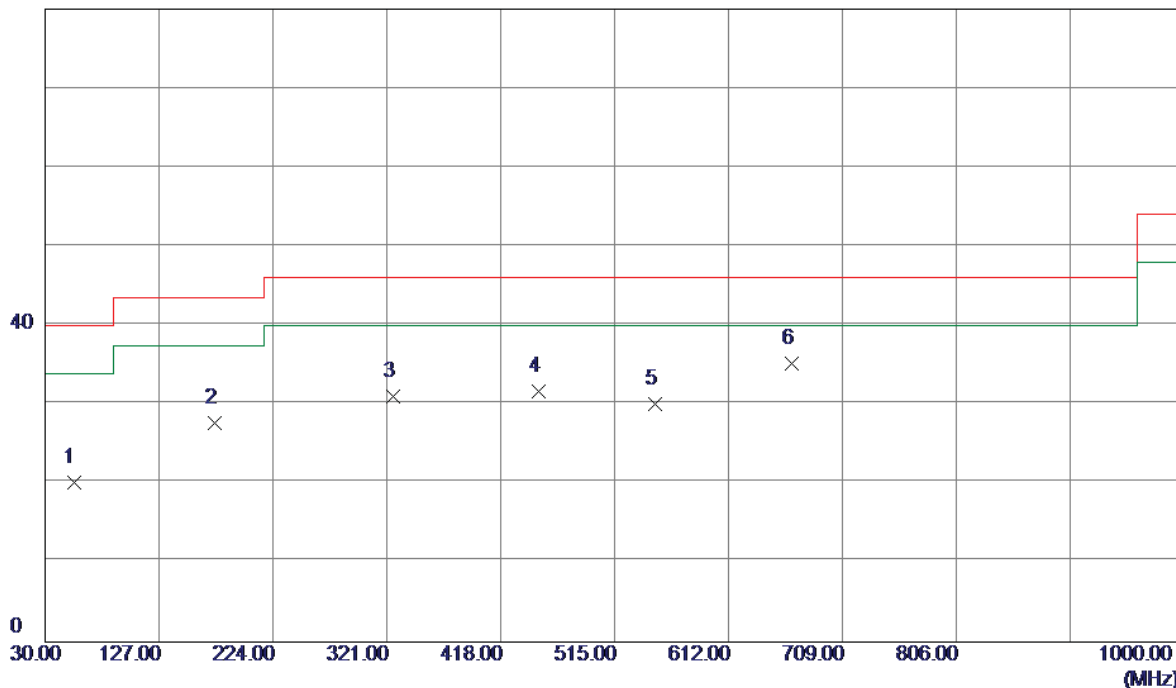

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 54.2500 | 32.48 | -12.25 | 20.23 | 40.00 | -19.77 | Peak | |
| 2 | 174.5300 | 39.10 | -11.36 | 27.74 | 43.50 | -15.76 | Peak | |
| 3 | 325.8500 | 41.41 | -10.37 | 31.04 | 46.00 | -14.96 | Peak | |
| 4 | 450.0100 | 38.74 | -7.08 | 31.66 | 46.00 | -14.34 | Peak | |
| 5 | 549.9200 | 34.51 | -4.45 | 30.06 | 46.00 | -15.94 | Peak | |
| 6 * | 666.3200 | 36.58 | -1.35 | 35.23 | 46.00 | -10.77 | Peak | |

Test Mode: UNII-1/TX A Mode 5200MHz


Horizontal

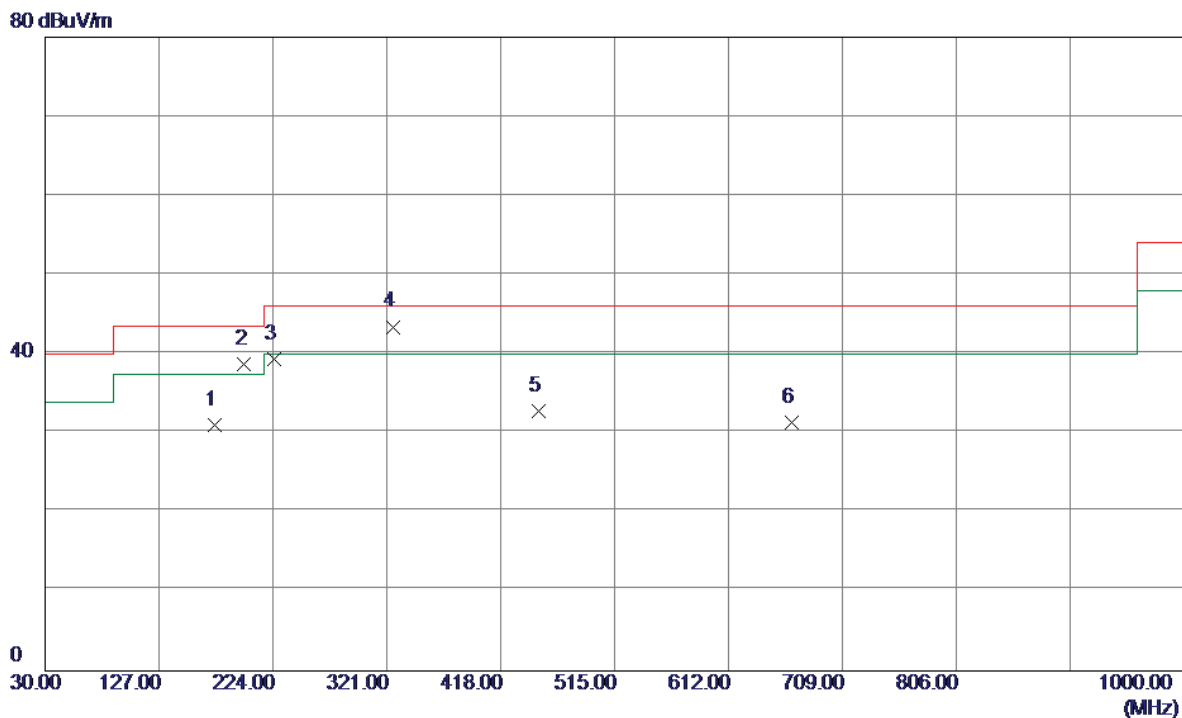

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 174.5300 | 42.34 | -11.36 | 30.98 | 43.50 | -12.52 | Peak | |
| 2 | 199.7500 | 52.39 | -13.63 | 38.76 | 43.50 | -4.74 | Peak | |
| 3 | 224.9700 | 52.82 | -13.44 | 39.38 | 46.00 | -6.62 | Peak | |
| 4 * | 325.8500 | 53.81 | -10.37 | 43.44 | 46.00 | -2.56 | Peak | |
| 5 | 450.0100 | 39.87 | -7.08 | 32.79 | 46.00 | -13.21 | Peak | |
| 6 | 666.3200 | 32.73 | -1.35 | 31.38 | 46.00 | -14.62 | Peak | |

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

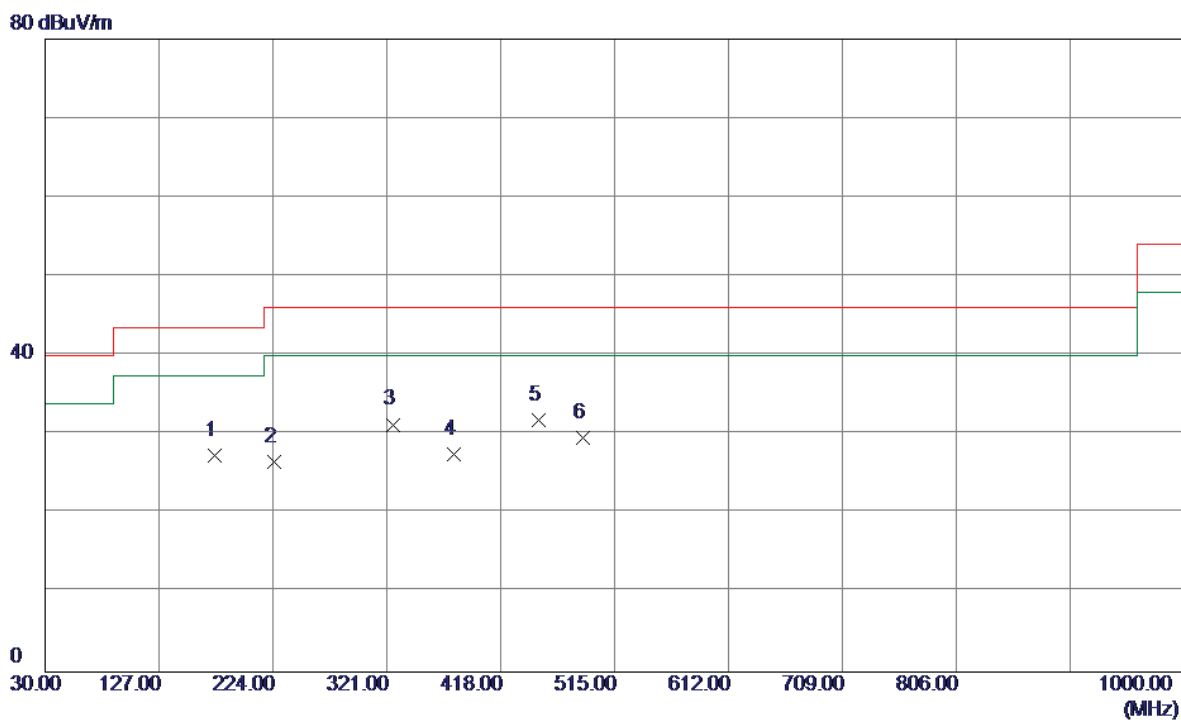

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 174.5300 | 38.65 | -11.36 | 27.29 | 43.50 | -16.21 | Peak | |
| 2 | 224.9700 | 39.93 | -13.44 | 26.49 | 46.00 | -19.51 | Peak | |
| 3 | 325.8500 | 41.65 | -10.37 | 31.28 | 46.00 | -14.72 | Peak | |
| 4 | 378.2300 | 36.27 | -8.75 | 27.52 | 46.00 | -18.48 | Peak | |
| 5 * | 450.0100 | 38.86 | -7.08 | 31.78 | 46.00 | -14.22 | Peak | |
| 6 | 487.8400 | 37.16 | -7.51 | 29.65 | 46.00 | -16.35 | Peak | |

Test Mode: UNII-1/TX A Mode 5240MHz


Horizontal

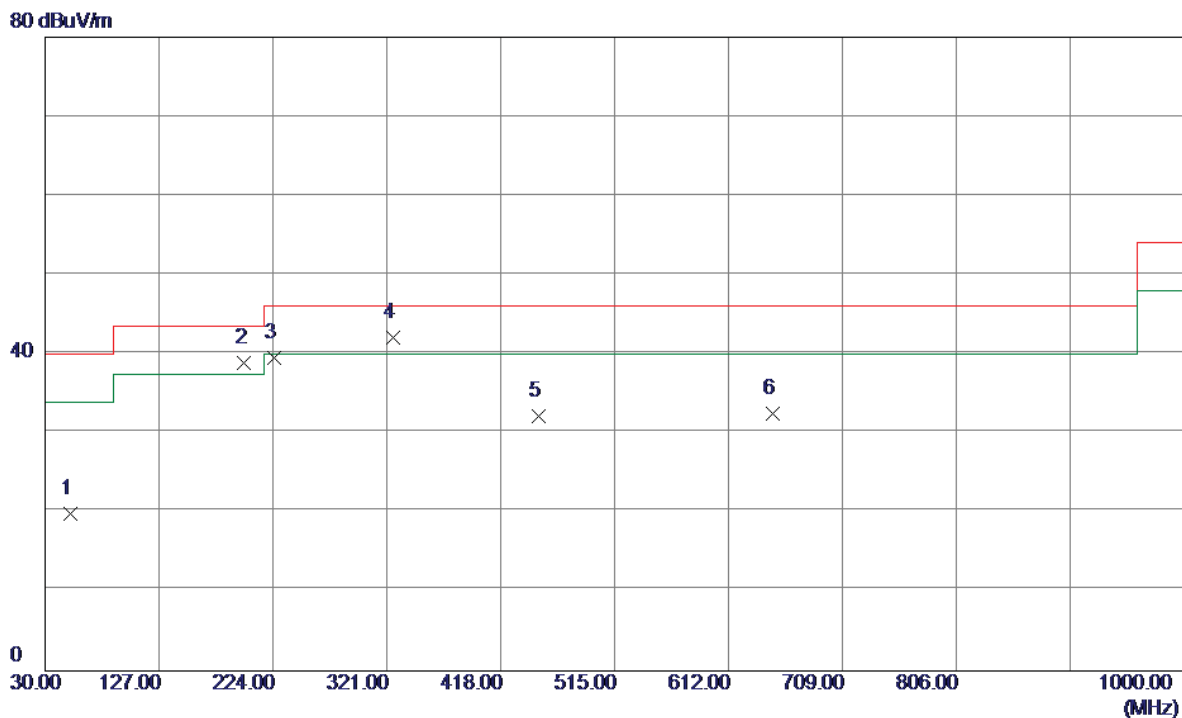

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 51.3400 | 32.13 | -12.36 | 19.77 | 40.00 | -20.23 | Peak | |
| 2 | 199.7500 | 52.54 | -13.63 | 38.91 | 43.50 | -4.59 | Peak | |
| 3 | 224.9700 | 52.89 | -13.44 | 39.45 | 46.00 | -6.55 | Peak | |
| 4 * | 325.8500 | 52.42 | -10.37 | 42.05 | 46.00 | -3.95 | Peak | |
| 5 | 450.0100 | 39.24 | -7.08 | 32.16 | 46.00 | -13.84 | Peak | |
| 6 | 649.8300 | 34.19 | -1.70 | 32.49 | 46.00 | -13.51 | Peak | |

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

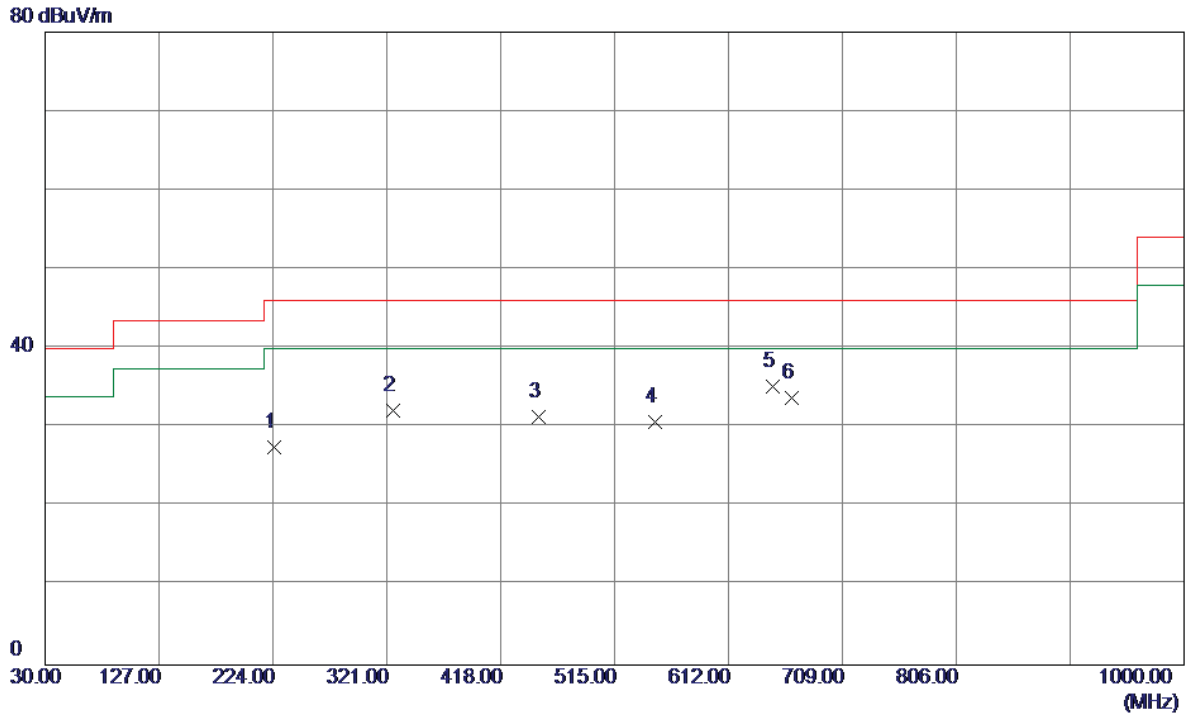

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 224.9700 | 40.97 | -13.44 | 27.53 | 46.00 | -18.47 | Peak | |
| 2 | 325.8500 | 42.47 | -10.37 | 32.10 | 46.00 | -13.90 | Peak | |
| 3 | 450.0100 | 38.50 | -7.08 | 31.42 | 46.00 | -14.58 | Peak | |
| 4 | 549.9200 | 35.16 | -4.45 | 30.71 | 46.00 | -15.29 | Peak | |
| 5 * | 649.8300 | 36.84 | -1.70 | 35.14 | 46.00 | -10.86 | Peak | |
| 6 | 666.3200 | 35.11 | -1.35 | 33.76 | 46.00 | -12.24 | Peak | |

Test Mode: UNII-3/TX A Mode 5745MHz


Horizontal

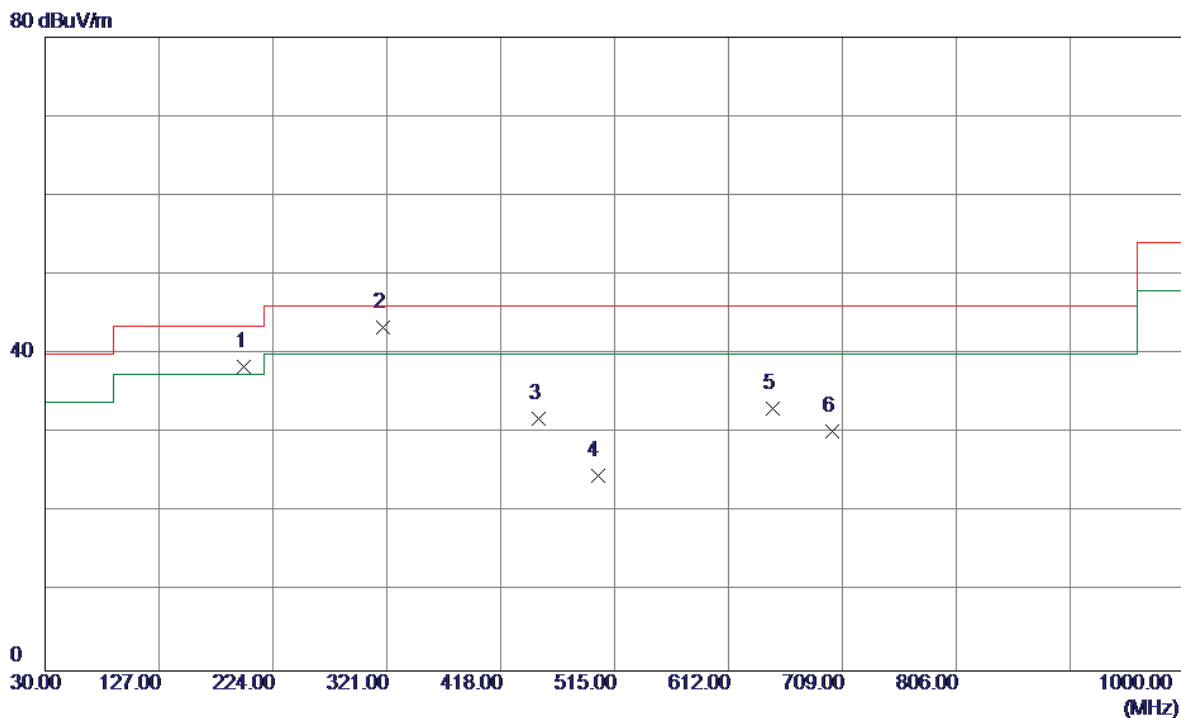

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 199.7500 | 51.99 | -13.63 | 38.36 | 43.50 | -5.14 | Peak | |
| 2 * | 318.0900 | 53.66 | -10.24 | 43.42 | 46.00 | -2.58 | Peak | |
| 3 | 450.0100 | 38.97 | -7.08 | 31.89 | 46.00 | -14.11 | Peak | |
| 4 | 500.4500 | 32.21 | -7.62 | 24.59 | 46.00 | -21.41 | Peak | |
| 5 | 649.8300 | 34.80 | -1.70 | 33.10 | 46.00 | -12.90 | Peak | |
| 6 | 700.2700 | 30.82 | -0.65 | 30.17 | 46.00 | -15.83 | Peak | |

Test Mode: UNII-3/TX A Mode 5785MHz


Vertical

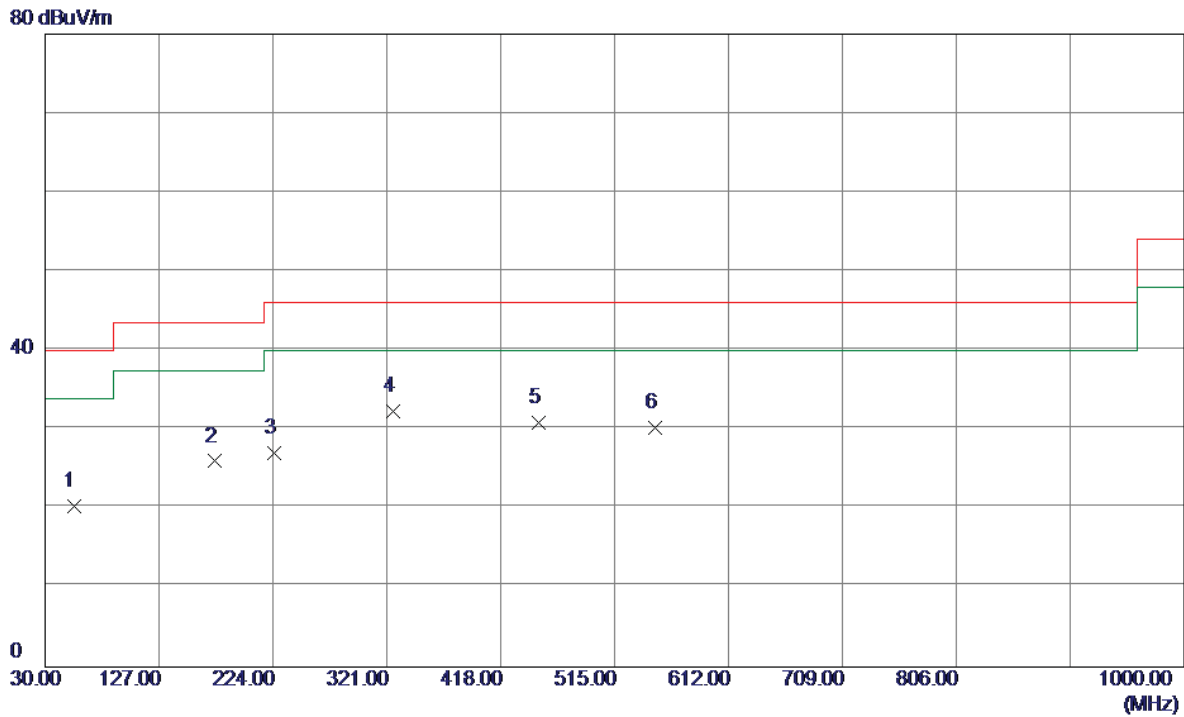

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 54.2500 | 32.60 | -12.25 | 20.35 | 40.00 | -19.65 | Peak | |
| 2 | 174.5300 | 37.36 | -11.36 | 26.00 | 43.50 | -17.50 | Peak | |
| 3 | 224.9700 | 40.49 | -13.44 | 27.05 | 46.00 | -18.95 | Peak | |
| 4 * | 325.8500 | 42.76 | -10.37 | 32.39 | 46.00 | -13.61 | Peak | |
| 5 | 450.0100 | 38.00 | -7.08 | 30.92 | 46.00 | -15.08 | Peak | |
| 6 | 549.9200 | 34.63 | -4.45 | 30.18 | 46.00 | -15.82 | Peak | |

Test Mode: UNII-3/TX A Mode 5785MHz


Horizontal

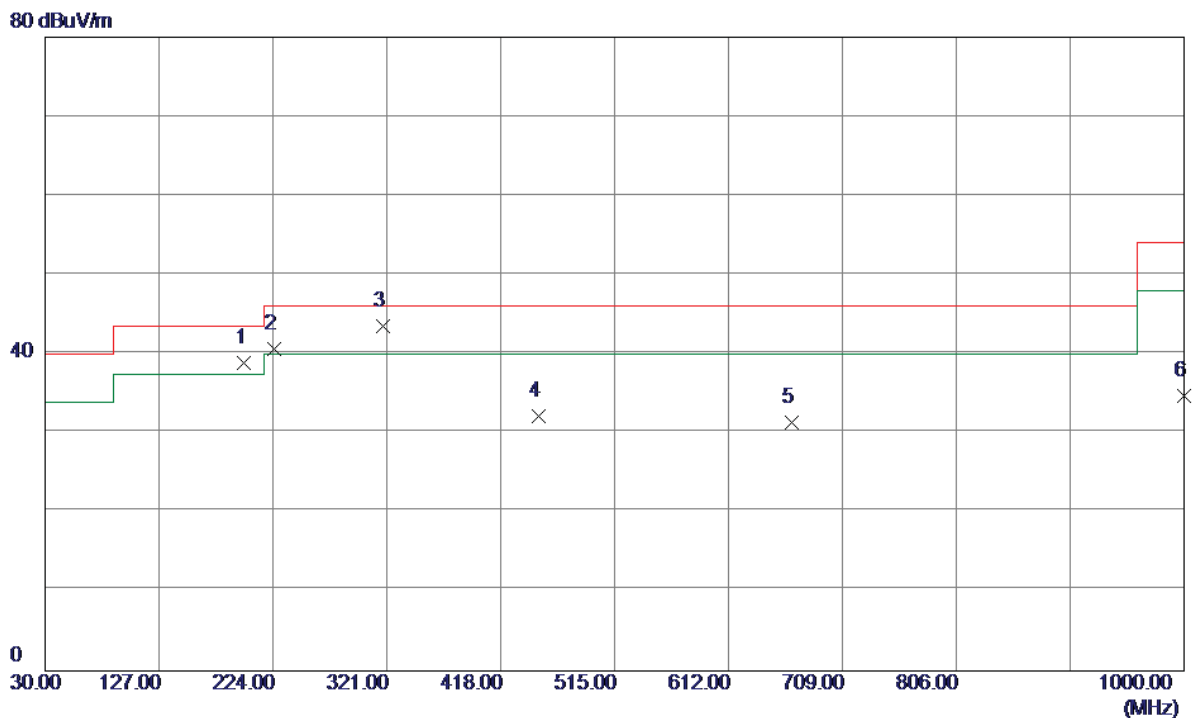

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 199.7500 | 52.55 | -13.63 | 38.92 | 43.50 | -4.58 | Peak | |
| 2 | 224.9700 | 54.07 | -13.44 | 40.63 | 46.00 | -5.37 | Peak | |
| 3 * | 318.0900 | 53.78 | -10.24 | 43.54 | 46.00 | -2.46 | Peak | |
| 4 | 450.0100 | 39.18 | -7.08 | 32.10 | 46.00 | -13.90 | Peak | |
| 5 | 666.3200 | 32.70 | -1.35 | 31.35 | 46.00 | -14.65 | Peak | |
| 6 | 1000.0000 | 30.82 | 3.93 | 34.75 | 54.00 | -19.25 | Peak | |

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

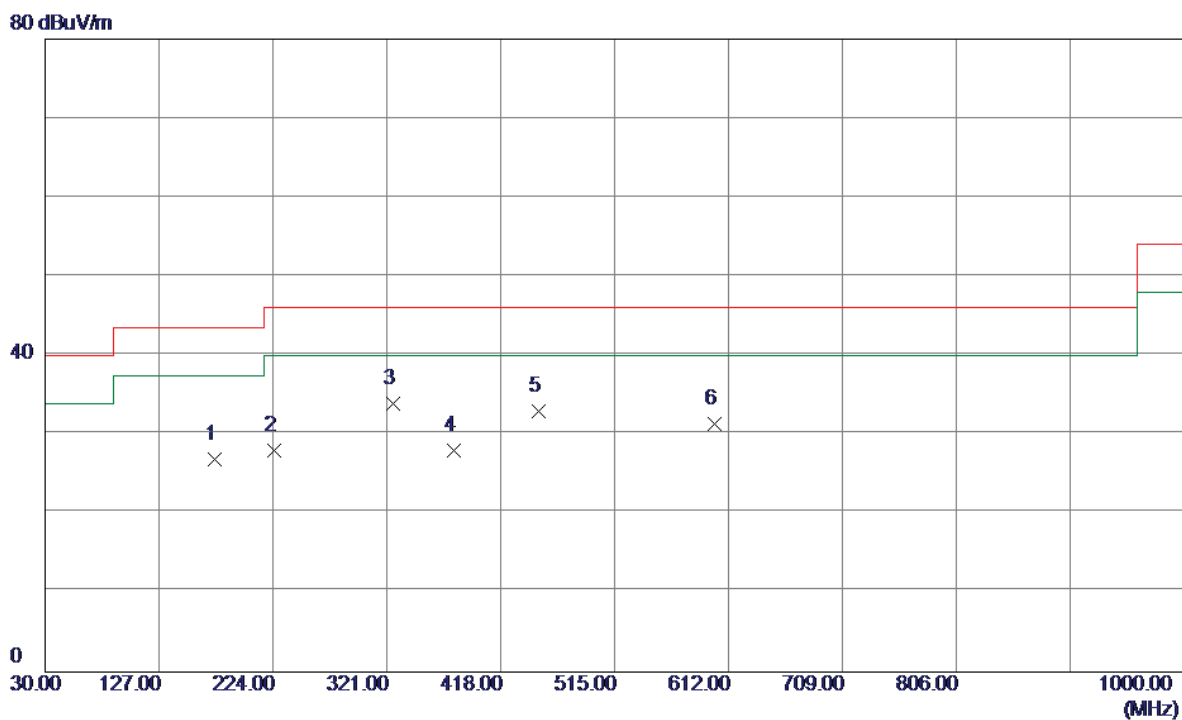

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 174.5300 | 38.20 | -11.36 | 26.84 | 43.50 | -16.66 | Peak | |
| 2 | 224.9700 | 41.45 | -13.44 | 28.01 | 46.00 | -17.99 | Peak | |
| 3 * | 325.8500 | 44.23 | -10.37 | 33.86 | 46.00 | -12.14 | Peak | |
| 4 | 378.2300 | 36.76 | -8.75 | 28.01 | 46.00 | -17.99 | Peak | |
| 5 | 450.0100 | 40.05 | -7.08 | 32.97 | 46.00 | -13.03 | Peak | |
| 6 | 600.3600 | 36.13 | -4.81 | 31.32 | 46.00 | -14.68 | Peak | |

Test Mode: UNII-3/TX A Mode 5825MHz

Horizontal

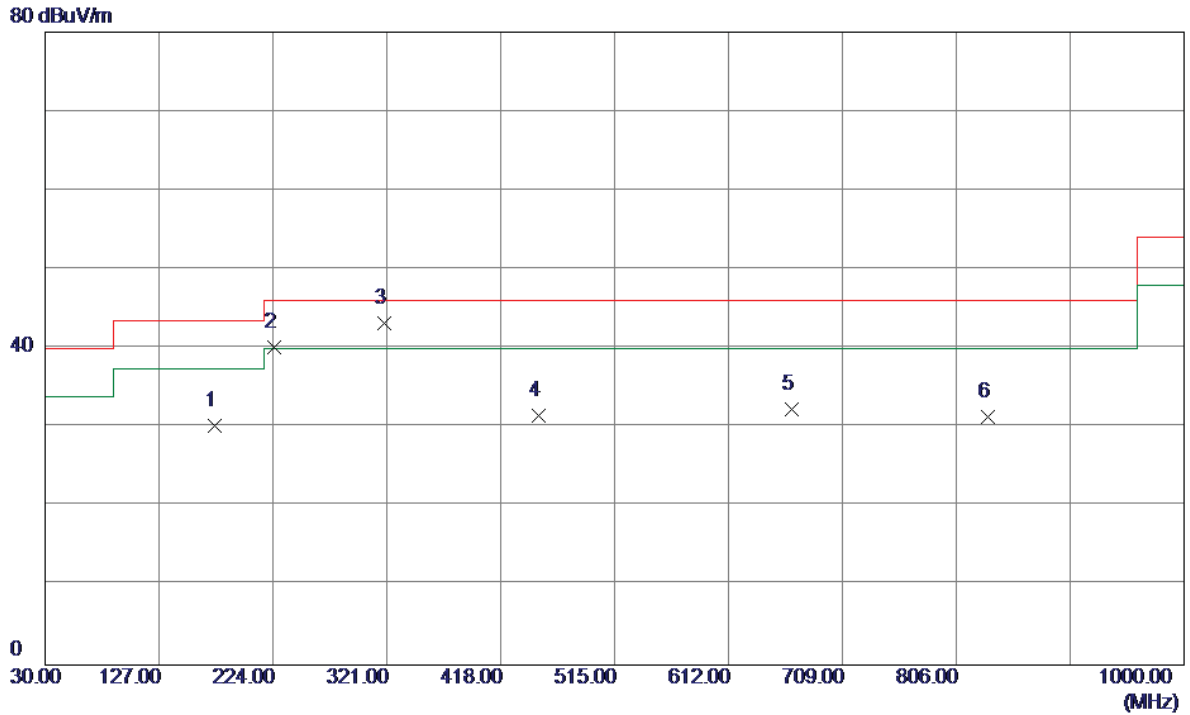


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 174.5300 | 41.59 | -11.36 | 30.23 | 43.50 | -13.27 | Peak | |
| 2 | 224.9700 | 53.60 | -13.44 | 40.16 | 46.00 | -5.84 | Peak | |
| 3 * | 319.0600 | 53.44 | -10.26 | 43.18 | 46.00 | -2.82 | Peak | |
| 4 | 450.0100 | 38.53 | -7.08 | 31.45 | 46.00 | -14.55 | Peak | |
| 5 | 666.3200 | 33.63 | -1.35 | 32.28 | 46.00 | -13.72 | Peak | |
| 6 | 833.1599 | 30.79 | 0.60 | 31.39 | 46.00 | -14.61 | Peak | |

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |

Vertical

125 dBuV/m

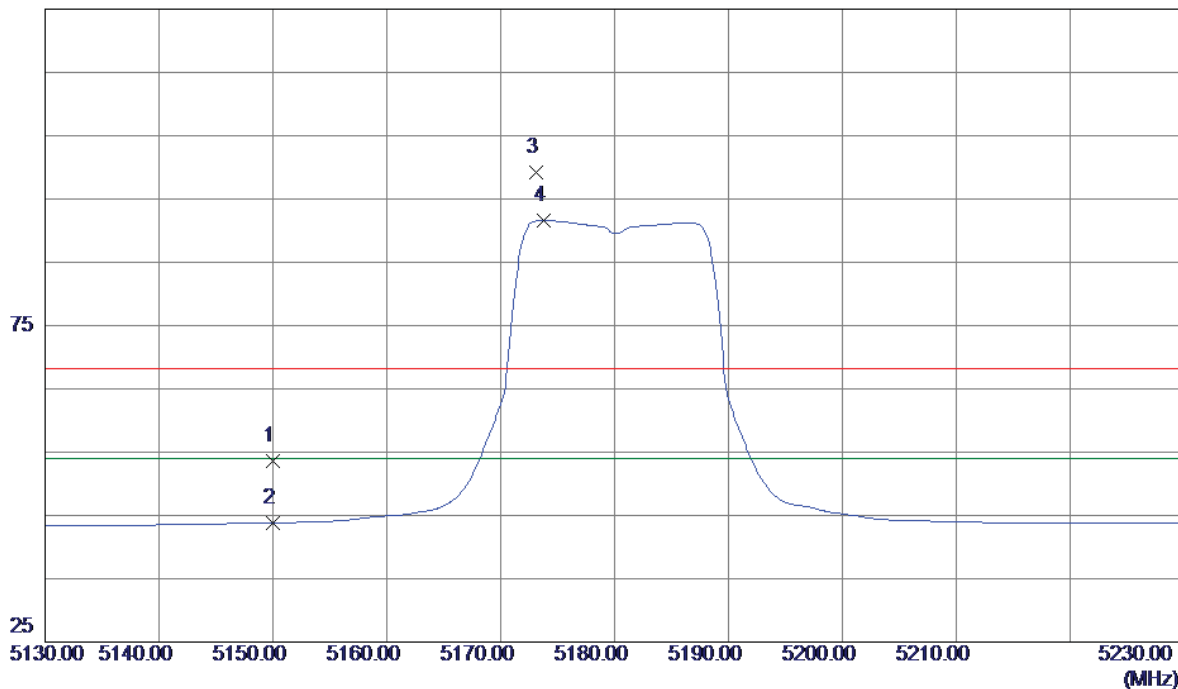


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 13.01 | 40.62 | 53.63 | 68.30 | -14.67 | Peak | |
| 2 | 5150.0000 | 3.14 | 40.62 | 43.76 | 54.00 | -10.24 | AVG | |
| 3 | 5173.1000 | 58.46 | 40.70 | 99.16 | 68.30 | 30.86 | Peak | No Limit |
| 4 * | 5173.8000 | 50.93 | 40.70 | 91.63 | 54.00 | 37.63 | AVG | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |

Vertical


80 dBuV/m

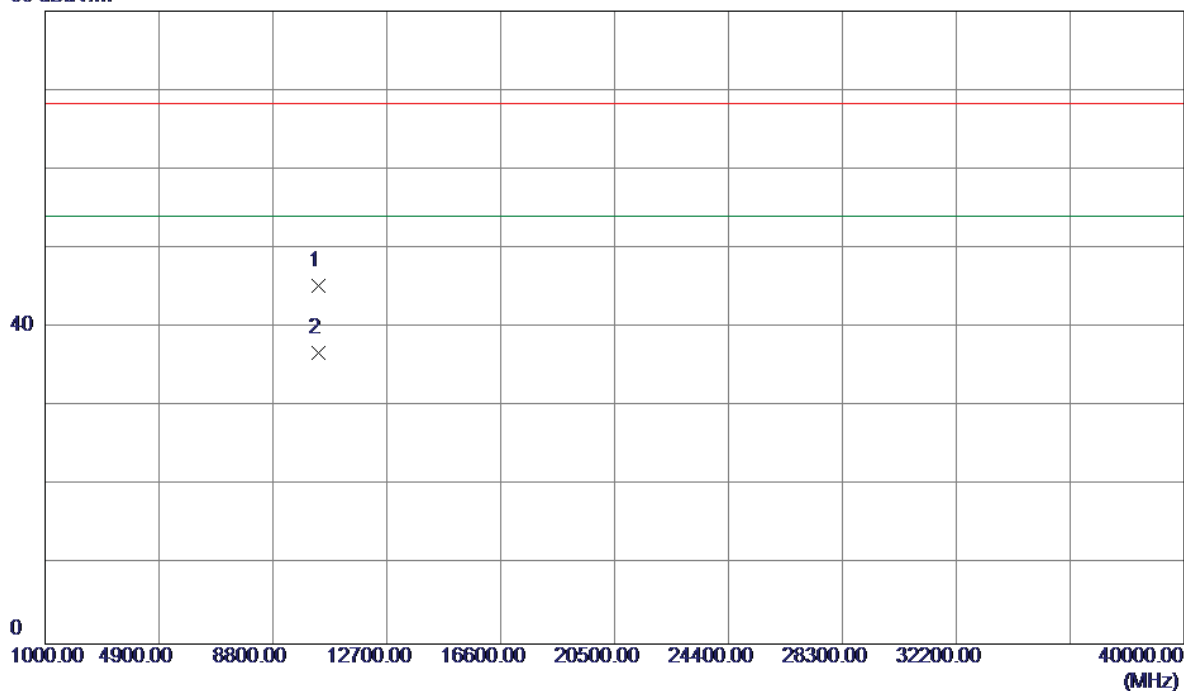

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10359.9800 | 28.90 | 16.36 | 45.26 | 68.30 | -23.04 | Peak | |
| 2 * | 10360.1550 | 20.44 | 16.36 | 36.80 | 54.00 | -17.20 | AVG | |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |

Horizontal

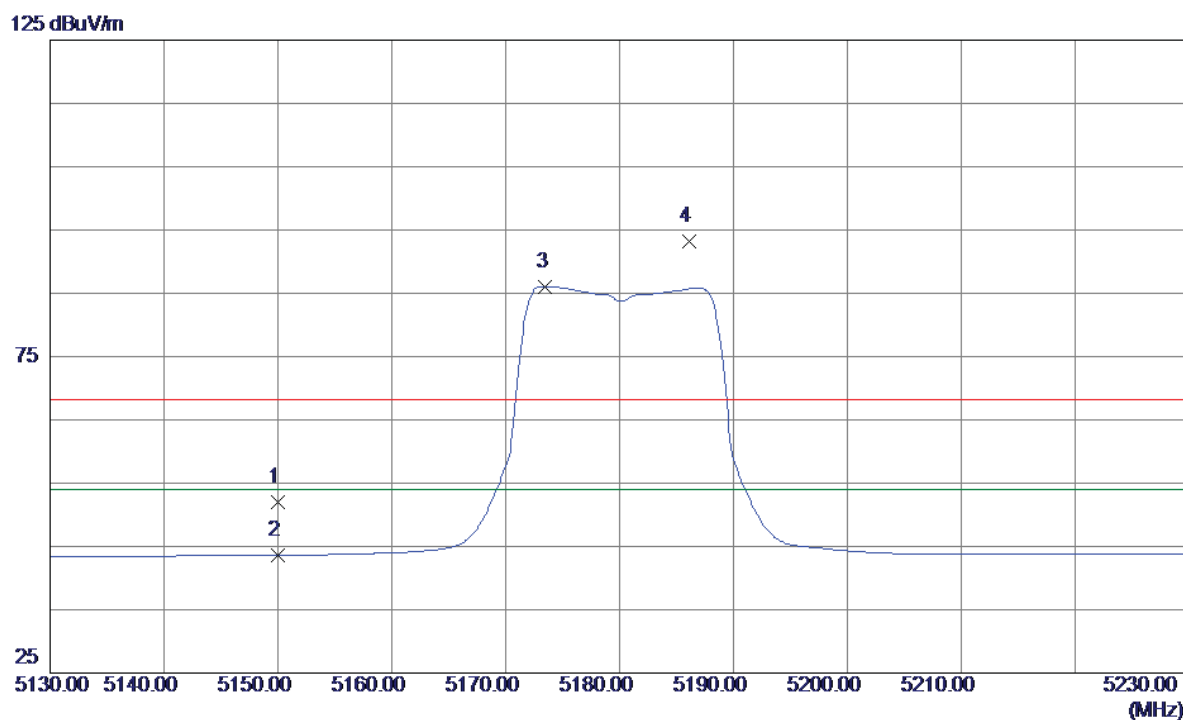


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 11.29 | 40.62 | 51.91 | 68.30 | -16.39 | Peak | |
| 2 | 5150.0000 | 3.03 | 40.62 | 43.65 | 54.00 | -10.35 | AVG | |
| 3 * | 5173.5000 | 45.40 | 40.70 | 86.10 | 54.00 | 32.10 | AVG | No Limit |
| 4 | 5186.1000 | 52.53 | 40.74 | 93.27 | 68.30 | 24.97 | Peak | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |

Horizontal


80 dBuV/m

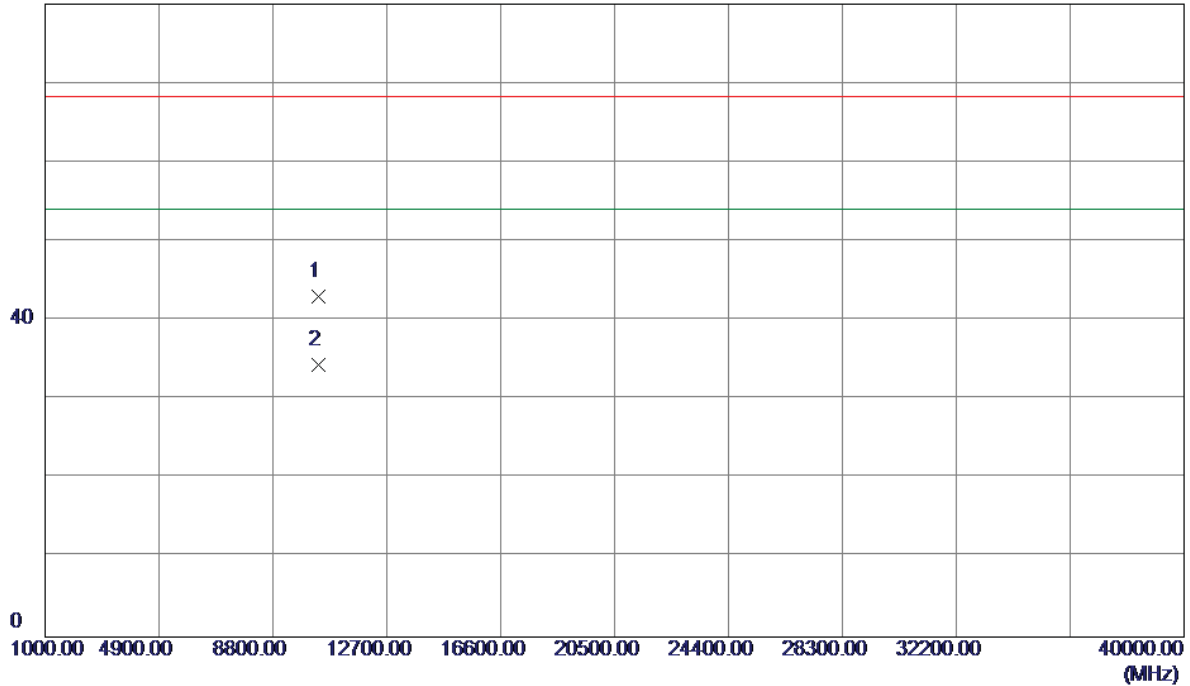

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10359.4580 | 26.71 | 16.36 | 43.07 | 68.30 | -25.23 | Peak | |
| 2 * | 10360.4520 | 18.00 | 16.36 | 34.36 | 54.00 | -19.64 | AVG | |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5200MHz |

Vertical

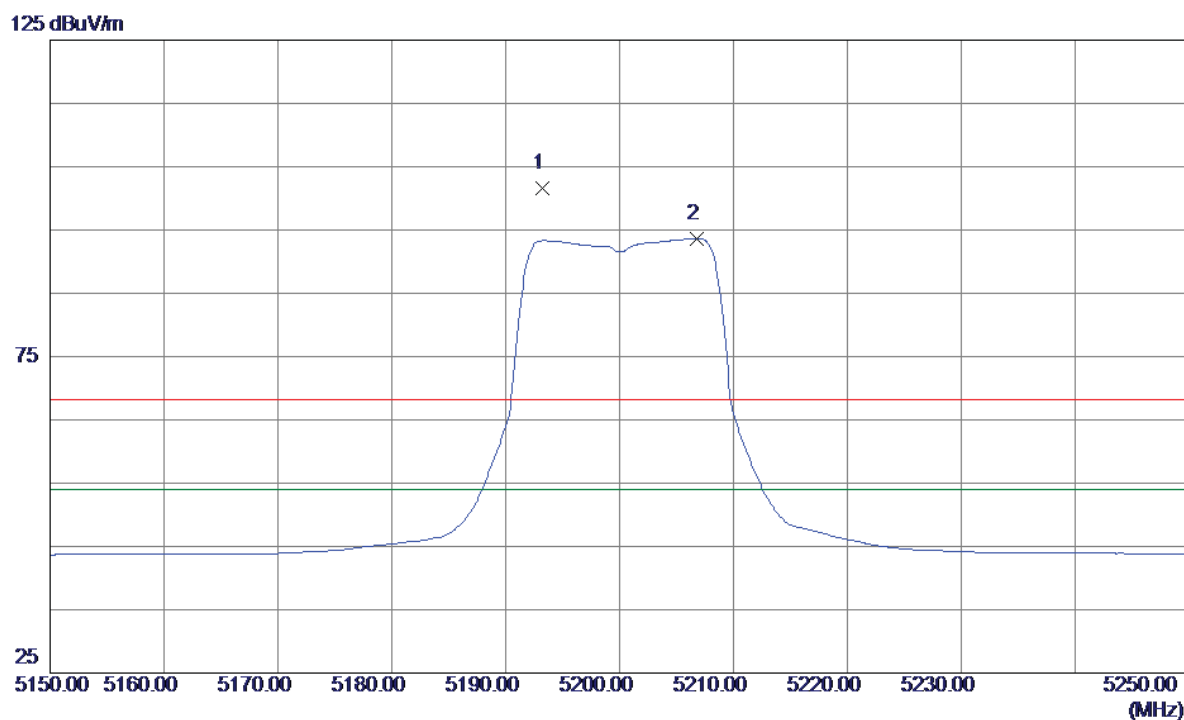


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5193.2000 | 60.77 | 40.77 | 101.54 | 68.30 | 33.24 | Peak | No Limit |
| 2 * | 5206.8000 | 52.77 | 40.81 | 93.58 | 54.00 | 39.58 | AVG | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5200MHz |

Vertical


80 dBuV/m

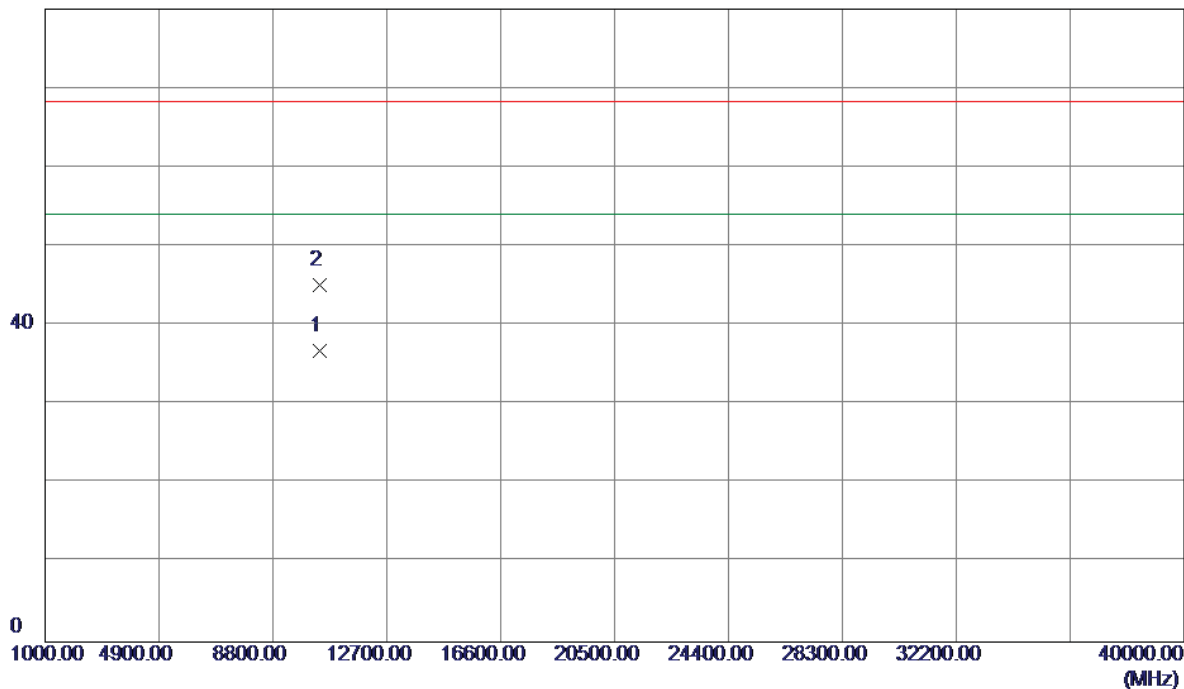

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.1420 | 20.31 | 16.45 | 36.76 | 54.00 | -17.24 | AVG | |
| 2 | 10400.7539 | 28.73 | 16.45 | 45.18 | 68.30 | -23.12 | Peak | |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5200MHz |

Horizontal

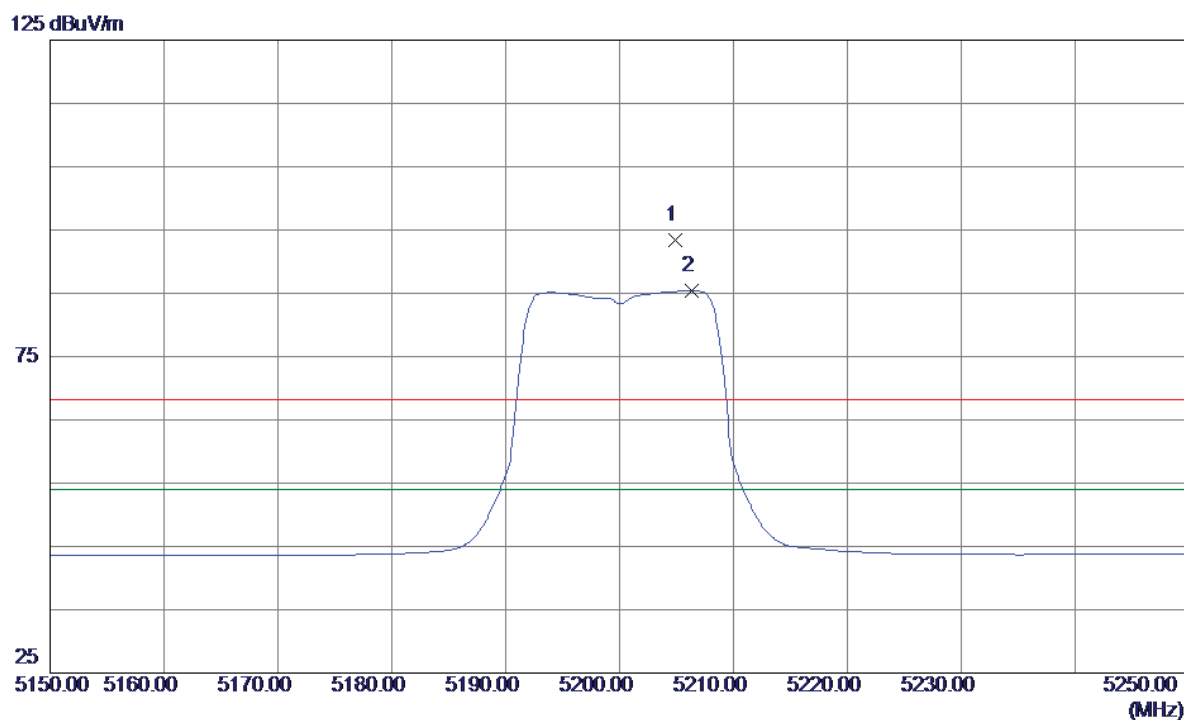


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5204.9000 | 52.59 | 40.81 | 93.40 | 68.30 | 25.10 | Peak | No Limit |
| 2 * | 5206.3000 | 44.61 | 40.81 | 85.42 | 54.00 | 31.42 | AVG | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5200MHz |

Horizontal

80 dBuV/m

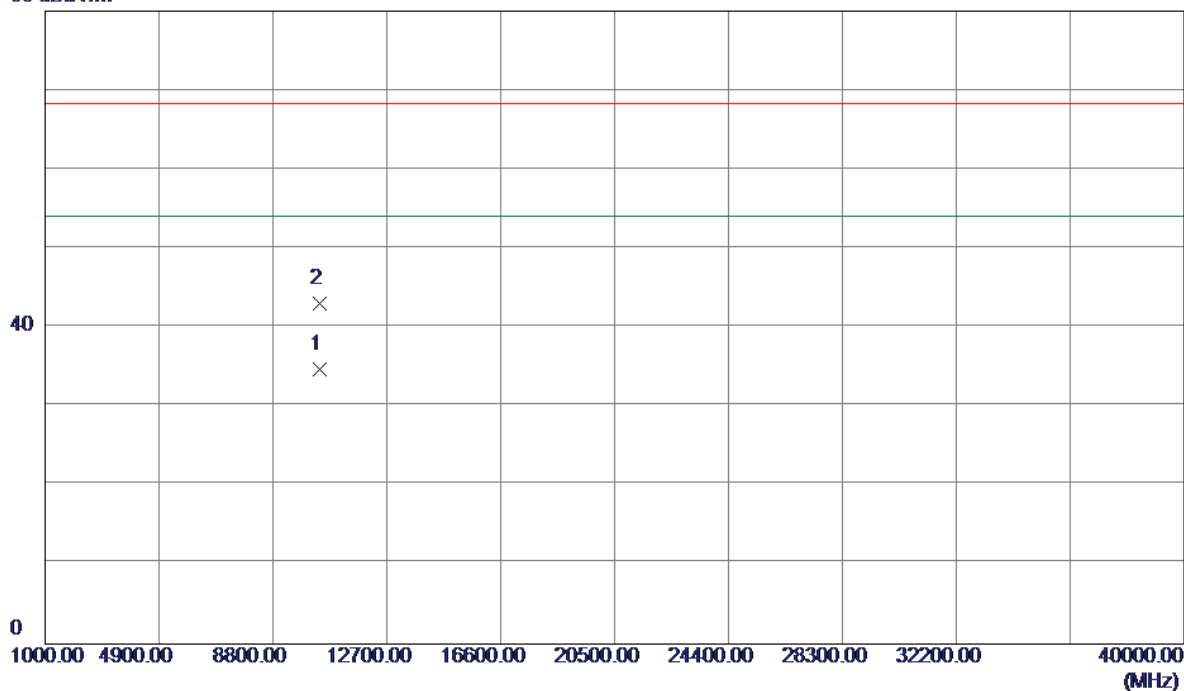


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.1520 | 18.20 | 16.45 | 34.65 | 54.00 | -19.35 | AVG | |
| 2 | 10400.7500 | 26.53 | 16.45 | 42.98 | 68.30 | -25.32 | Peak | |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |

Vertical

125 dBuV/m

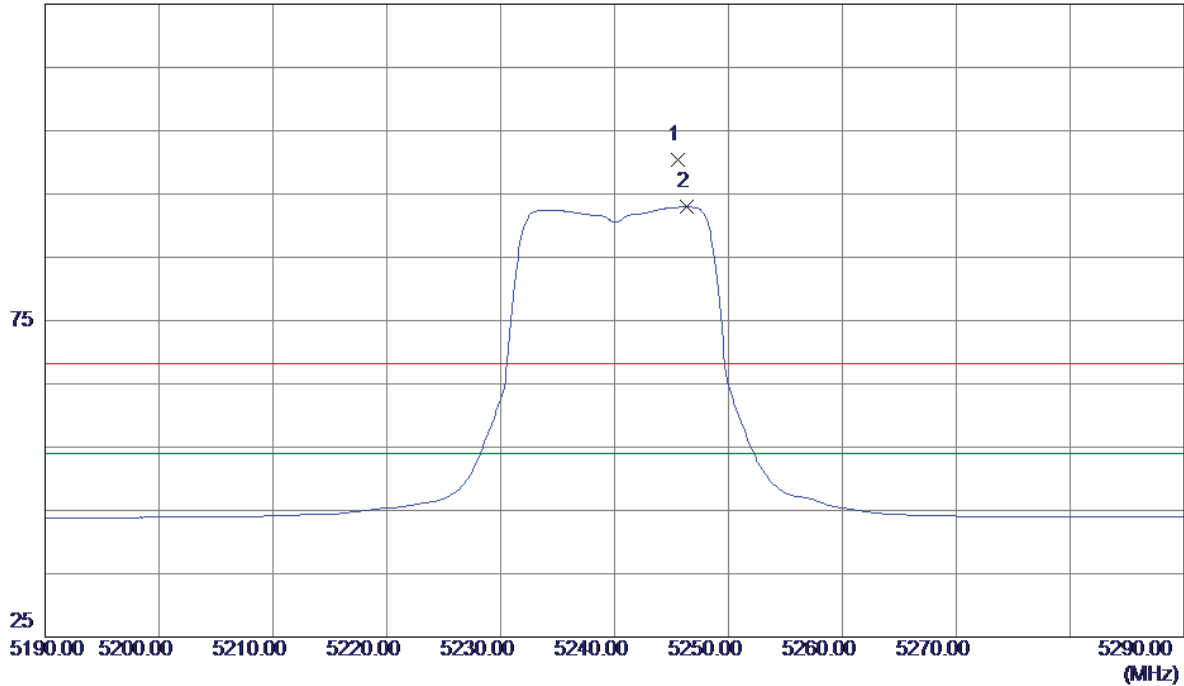


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5245.6000 | 59.43 | 40.94 | 100.37 | 68.30 | 32.07 | Peak | No Limit |
| 2 * | 5246.3000 | 52.01 | 40.94 | 92.95 | 54.00 | 38.95 | AVG | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |

Vertical


80 dBuV/m

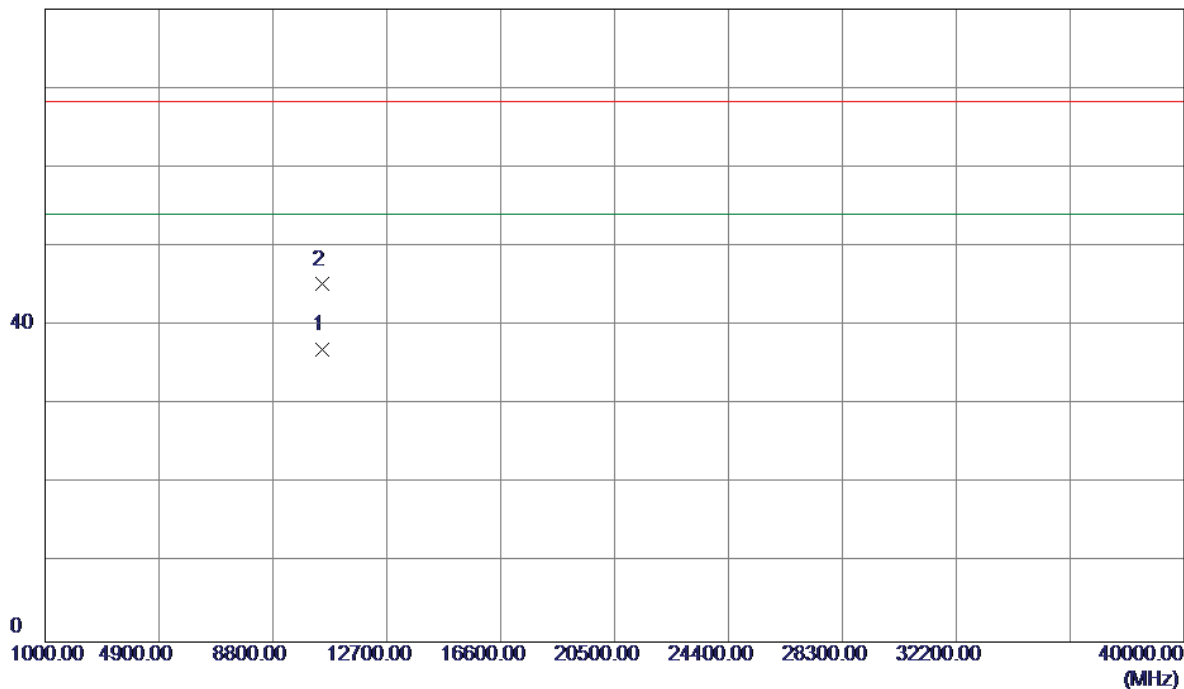

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.2410 | 20.33 | 16.63 | 36.96 | 54.00 | -17.04 | AVG | |
| 2 | 10480.7699 | 28.57 | 16.63 | 45.20 | 68.30 | -23.10 | Peak | |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |

Horizontal

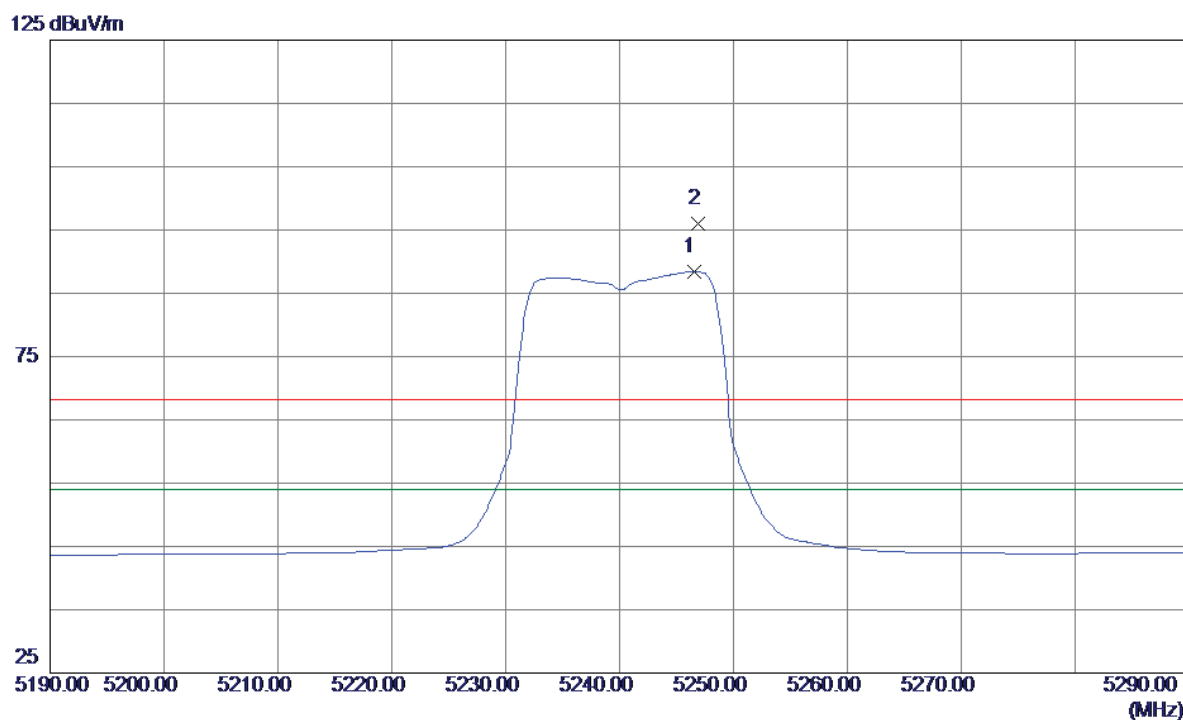


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5246.5000 | 47.46 | 40.94 | 88.40 | 54.00 | 34.40 | AVG | No Limit |
| 2 | 5246.9000 | 55.08 | 40.94 | 96.02 | 68.30 | 27.72 | Peak | No Limit |

| | |
|------------------|---------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |

Horizontal


80 dBuV/m

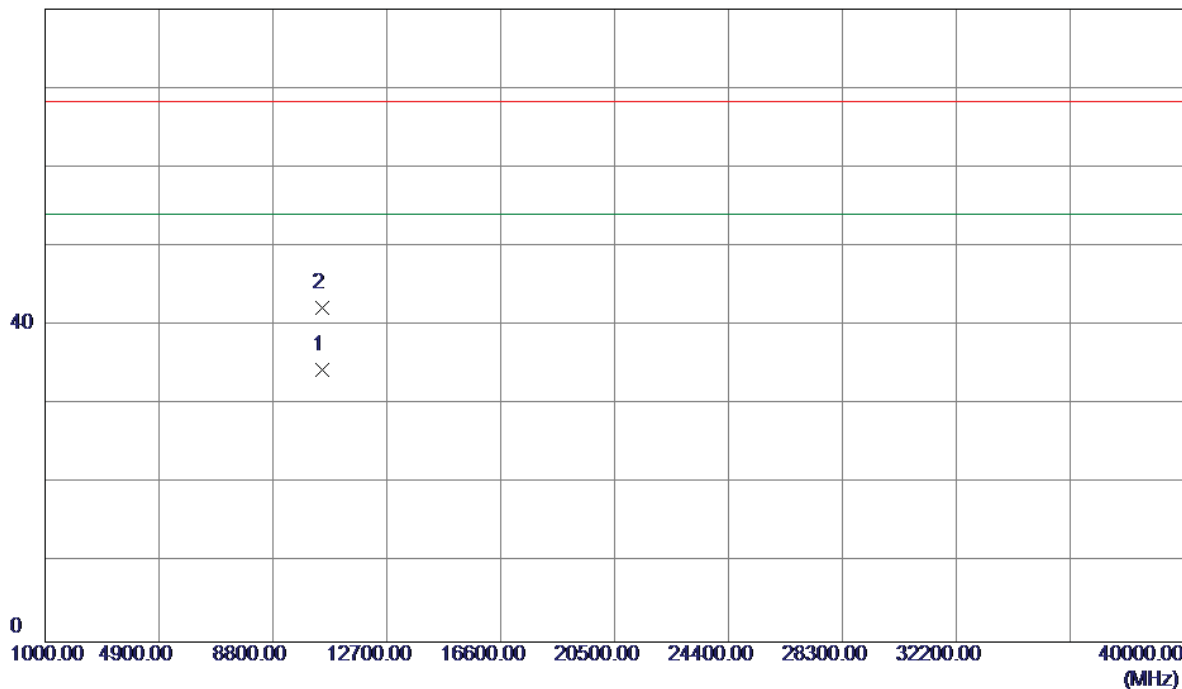

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.1500 | 17.74 | 16.63 | 34.37 | 54.00 | -19.63 | AVG | |
| 2 | 10480.7750 | 25.61 | 16.63 | 42.24 | 68.30 | -26.06 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |

Vertical

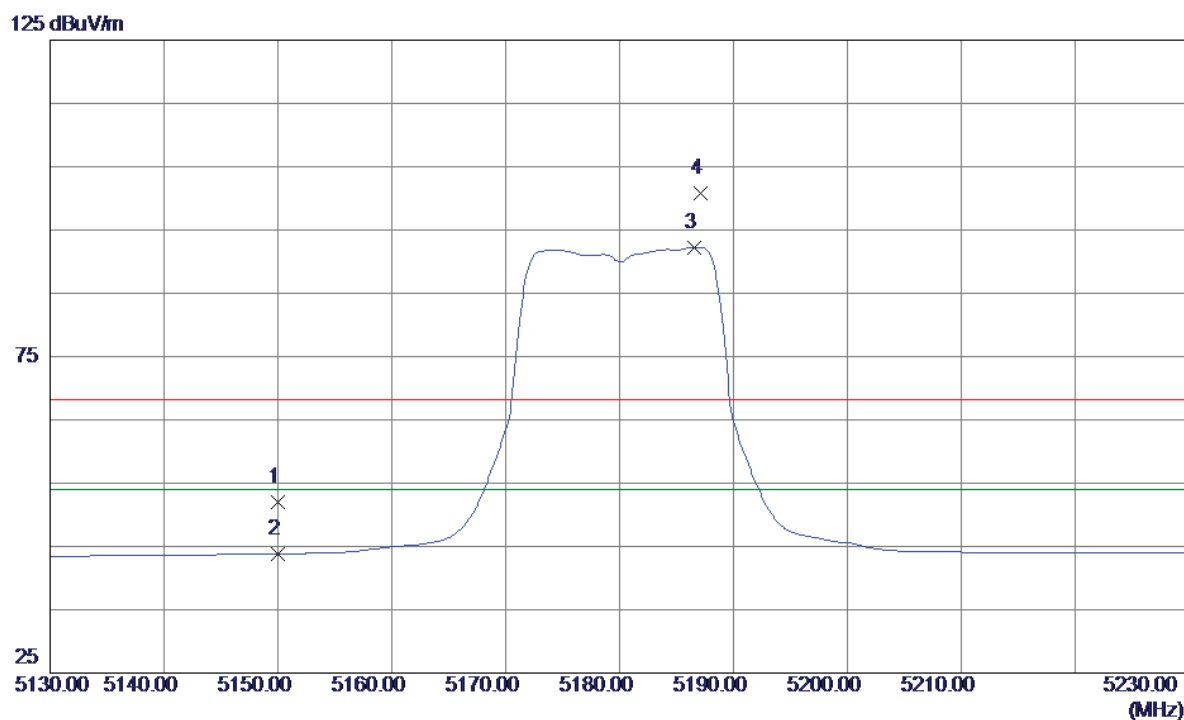


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 11.29 | 40.62 | 51.91 | 68.30 | -16.39 | Peak | |
| 2 | 5150.0000 | 3.18 | 40.62 | 43.80 | 54.00 | -10.20 | AVG | |
| 3 * | 5186.6000 | 51.54 | 40.75 | 92.29 | 54.00 | 38.29 | AVG | No Limit |
| 4 | 5187.1000 | 60.06 | 40.75 | 100.81 | 68.30 | 32.51 | Peak | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |

Vertical


80 dBuV/m

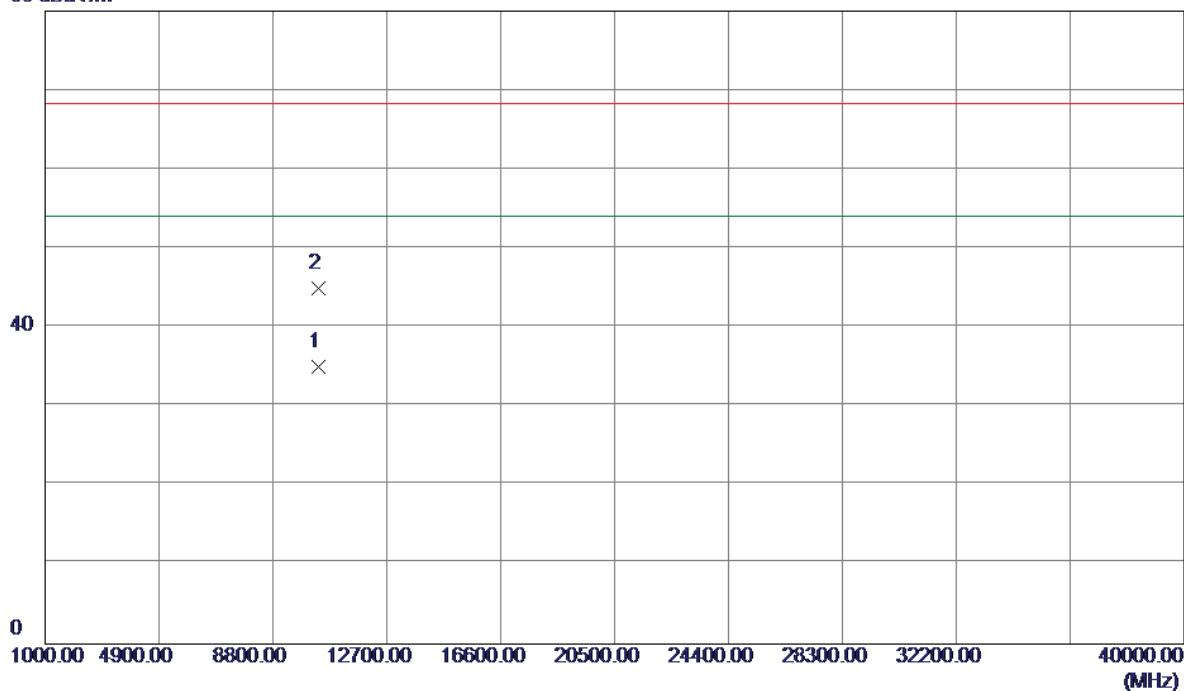

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10360.1650 | 18.75 | 16.36 | 35.11 | 54.00 | -18.89 | AVG | |
| 2 | 10360.4320 | 28.66 | 16.36 | 45.02 | 68.30 | -23.28 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |

Horizontal

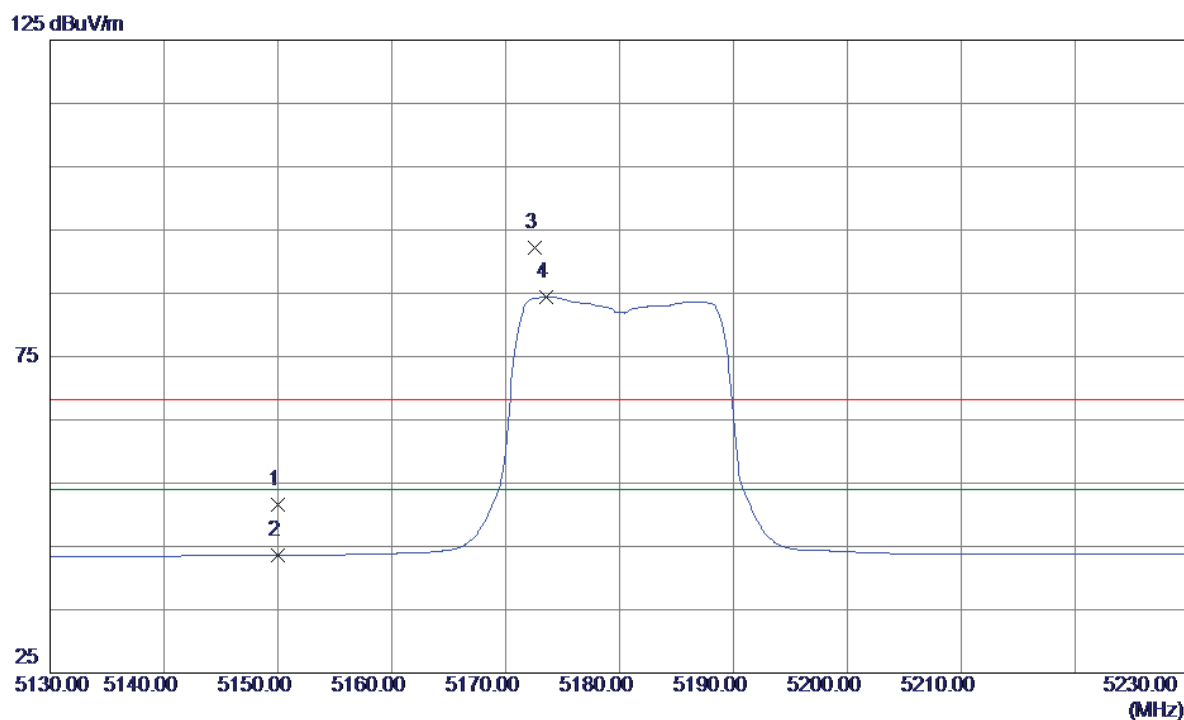


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 10.16 | 41.35 | 51.51 | 68.30 | -16.79 | Peak | |
| 2 | 5150.0000 | 2.27 | 41.35 | 43.62 | 54.00 | -10.38 | AVG | |
| 3 | 5172.6000 | 50.73 | 41.42 | 92.15 | 68.30 | 23.85 | Peak | No Limit |
| 4 * | 5173.6000 | 42.98 | 41.43 | 84.41 | 54.00 | 30.41 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |

Horizontal

80 dBuV/m

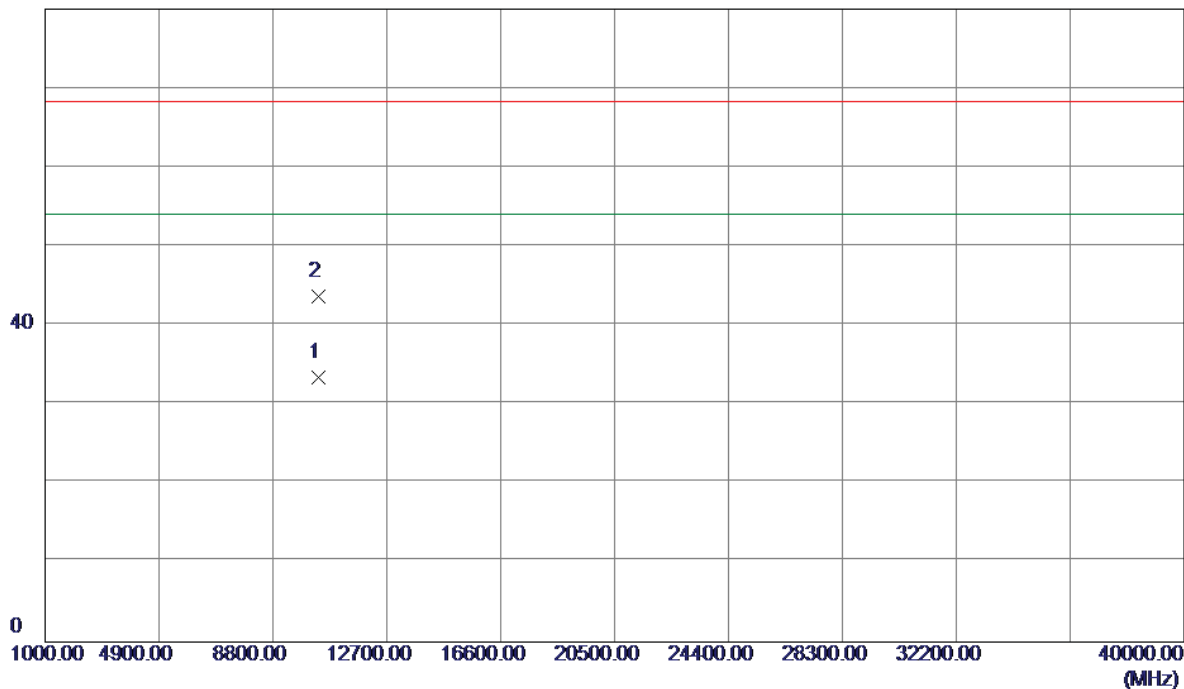


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10360.1250 | 17.12 | 16.36 | 33.48 | 54.00 | -20.52 | AVG | |
| 2 | 10360.5150 | 27.32 | 16.36 | 43.68 | 68.30 | -24.62 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5200MHz |

Vertical

125 dBuV/m

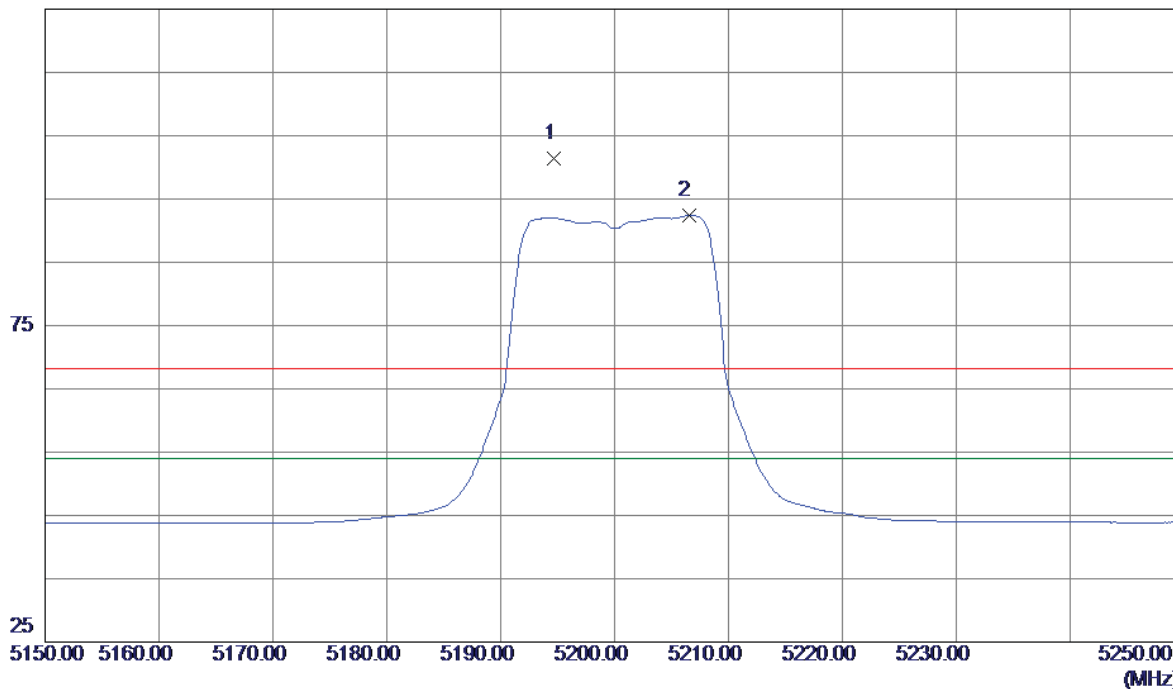


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5194.7000 | 60.54 | 40.77 | 101.31 | 68.30 | 33.01 | Peak | No Limit |
| 2 * | 5206.5000 | 51.56 | 40.81 | 92.37 | 54.00 | 38.37 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5200MHz |

Vertical


80 dBuV/m

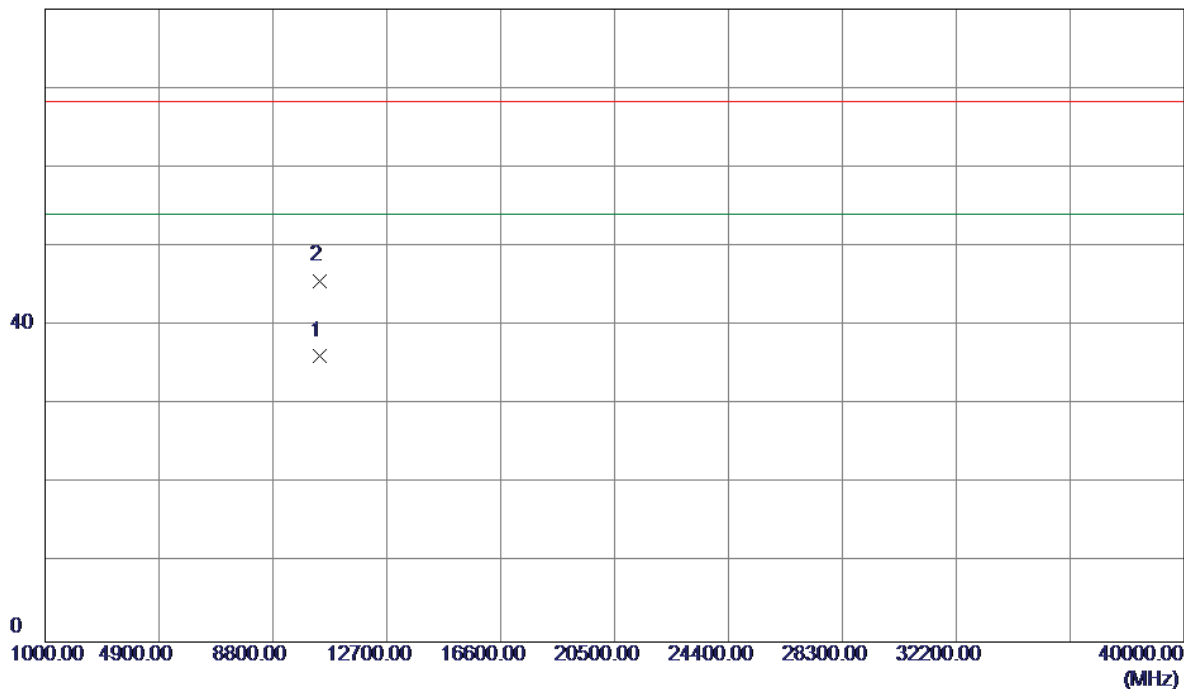

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.2500 | 19.67 | 16.45 | 36.12 | 54.00 | -17.88 | AVG | |
| 2 | 10401.3250 | 29.23 | 16.45 | 45.68 | 68.30 | -22.62 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5200MHz |

Horizontal

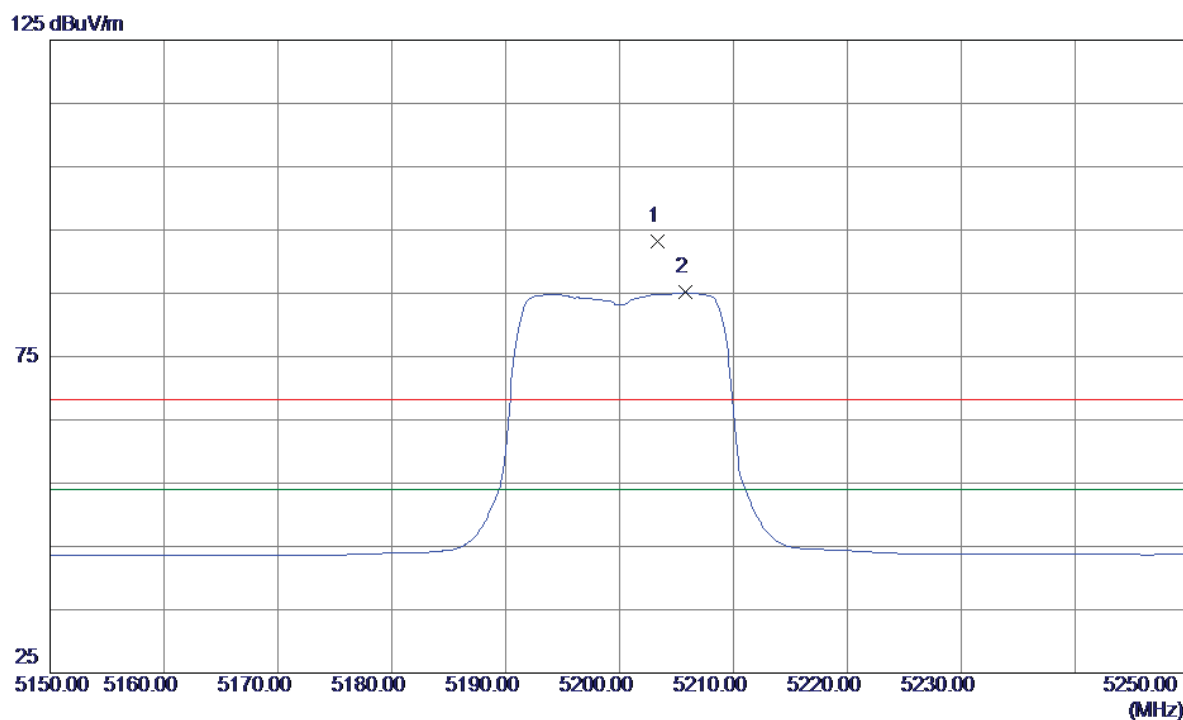


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5203.3000 | 51.69 | 41.53 | 93.22 | 68.30 | 24.92 | Peak | No Limit |
| 2 * | 5205.8000 | 43.57 | 41.54 | 85.11 | 54.00 | 31.11 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5200MHz |

Horizontal


80 dBuV/m

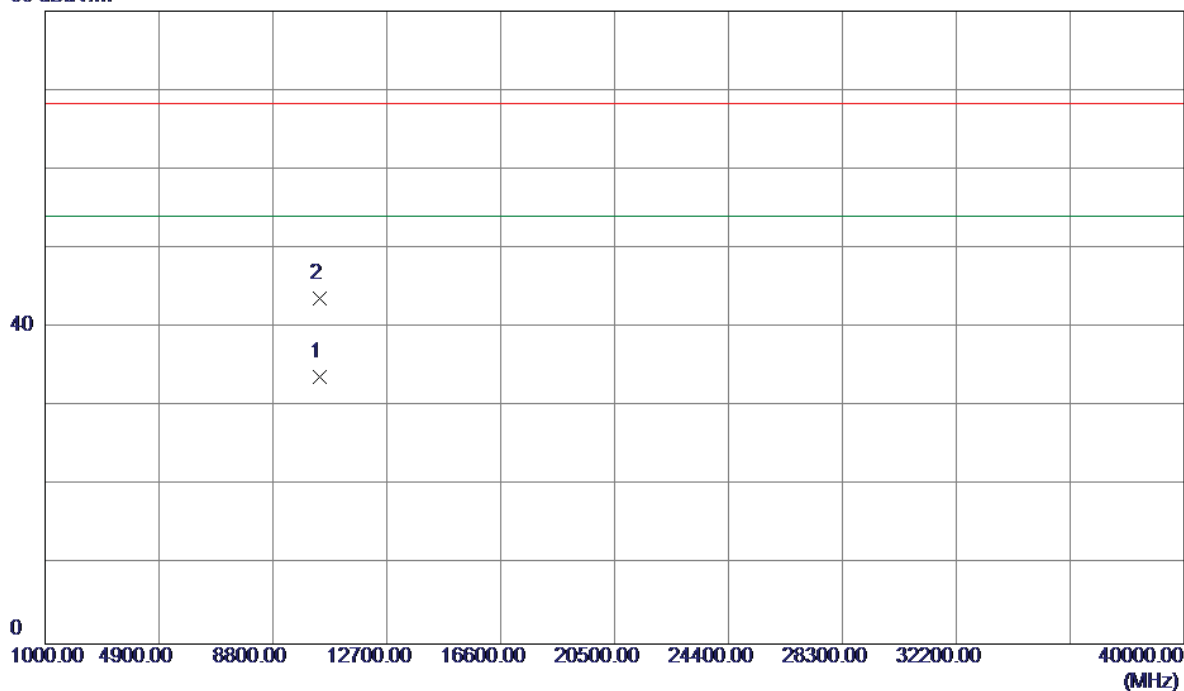

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.1000 | 17.31 | 16.45 | 33.76 | 54.00 | -20.24 | AVG | |
| 2 | 10400.5000 | 27.21 | 16.45 | 43.66 | 68.30 | -24.64 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |

Vertical

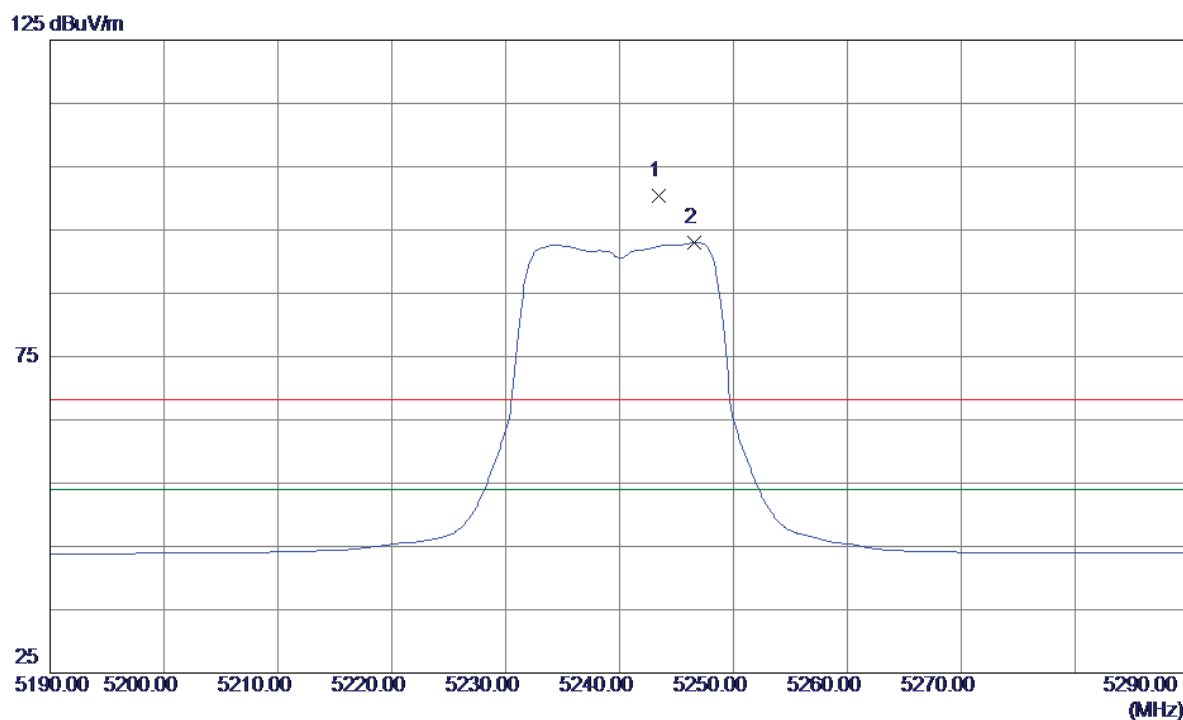


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5243.4000 | 59.42 | 40.93 | 100.35 | 68.30 | 32.05 | Peak | No Limit |
| 2 * | 5246.6000 | 52.06 | 40.94 | 93.00 | 54.00 | 39.00 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |

Vertical


80 dBuV/m

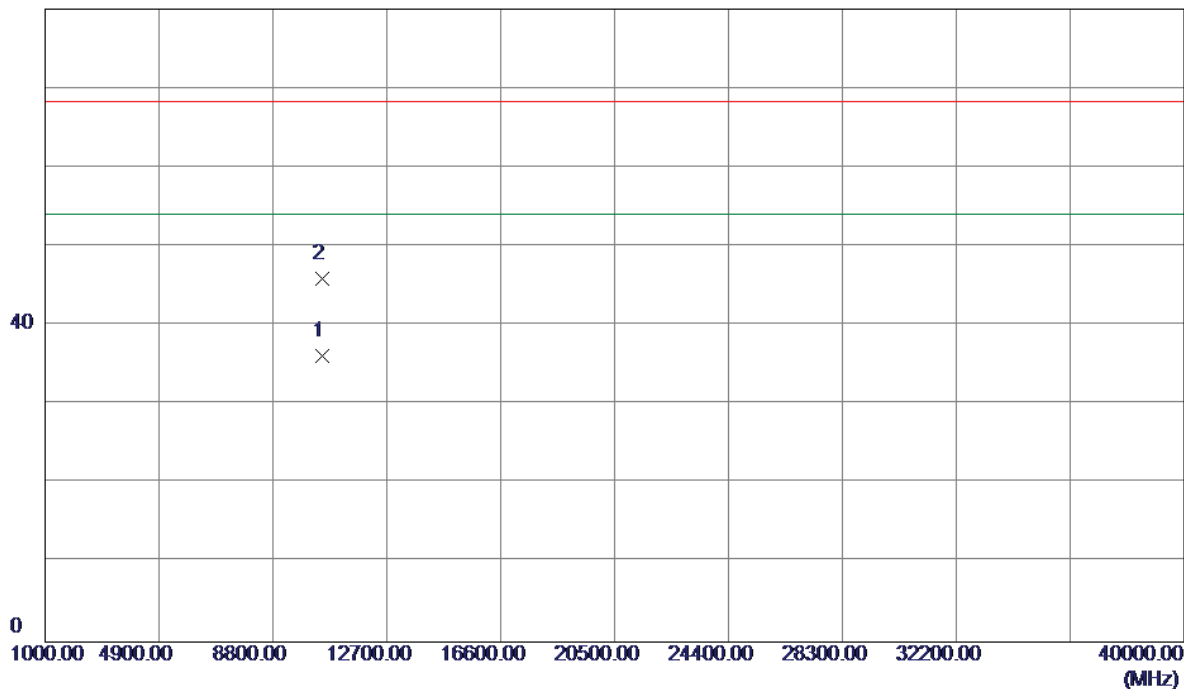

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.2450 | 19.54 | 16.63 | 36.17 | 54.00 | -17.83 | AVG | |
| 2 | 10481.6500 | 29.31 | 16.63 | 45.94 | 68.30 | -22.36 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |

Horizontal

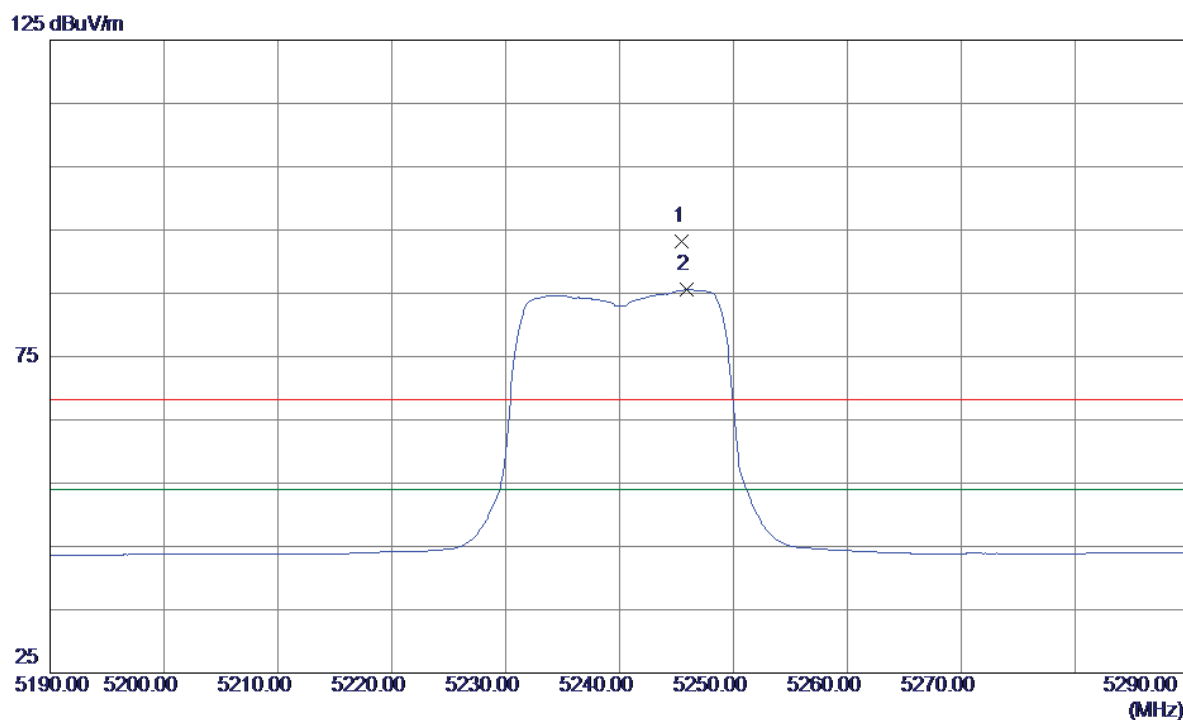


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5245.5000 | 51.60 | 41.67 | 93.27 | 68.30 | 24.97 | Peak | No Limit |
| 2 * | 5245.9000 | 43.87 | 41.67 | 85.54 | 54.00 | 31.54 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |

Horizontal

80 dBuV/m

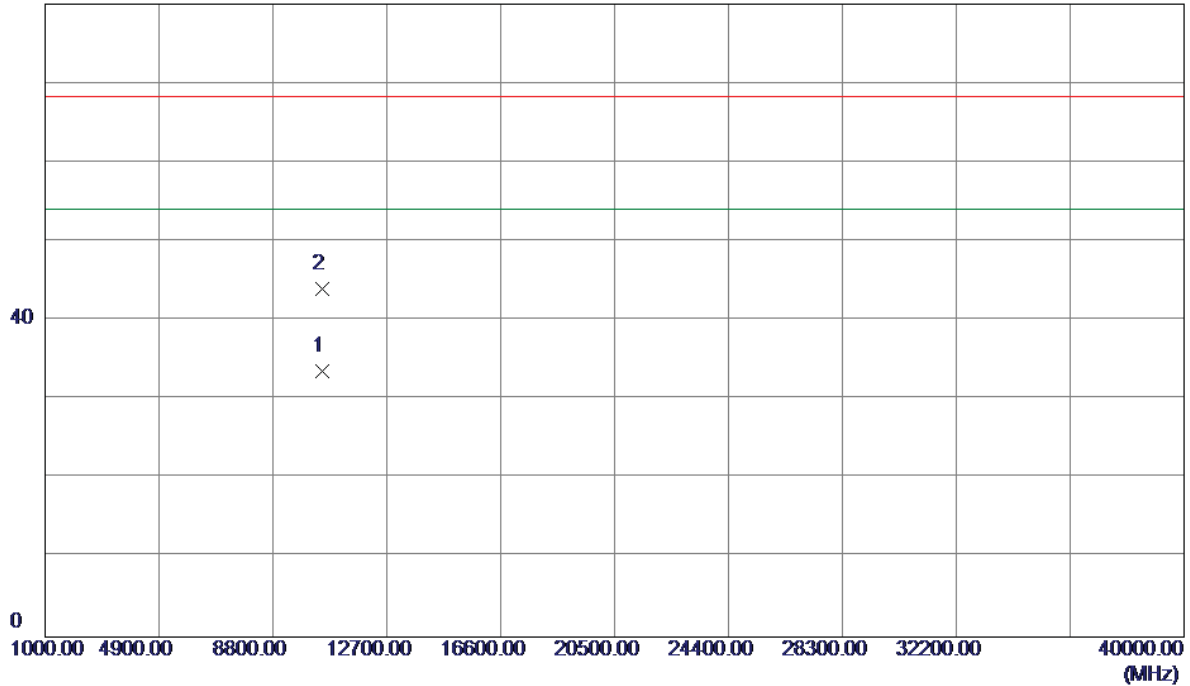


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.1310 | 17.01 | 16.63 | 33.64 | 54.00 | -20.36 | AVG | |
| 2 | 10481.5420 | 27.31 | 16.63 | 43.94 | 68.30 | -24.36 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |

Vertical

125 dBuV/m

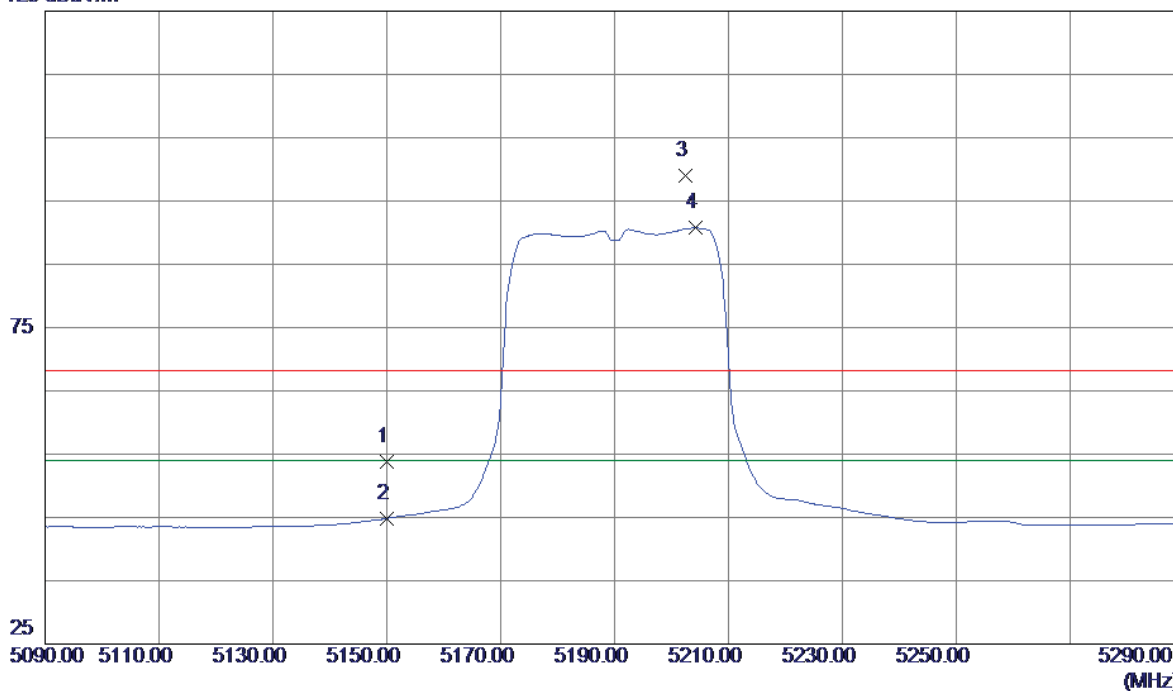


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 13.09 | 40.62 | 53.71 | 68.30 | -14.59 | Peak | |
| 2 | 5150.0000 | 4.24 | 40.62 | 44.86 | 54.00 | -9.14 | AVG | |
| 3 | 5202.4000 | 58.25 | 40.80 | 99.05 | 68.30 | 30.75 | Peak | No Limit |
| 4 * | 5204.2000 | 49.92 | 40.80 | 90.72 | 54.00 | 36.72 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |

Vertical


80 dBuV/m

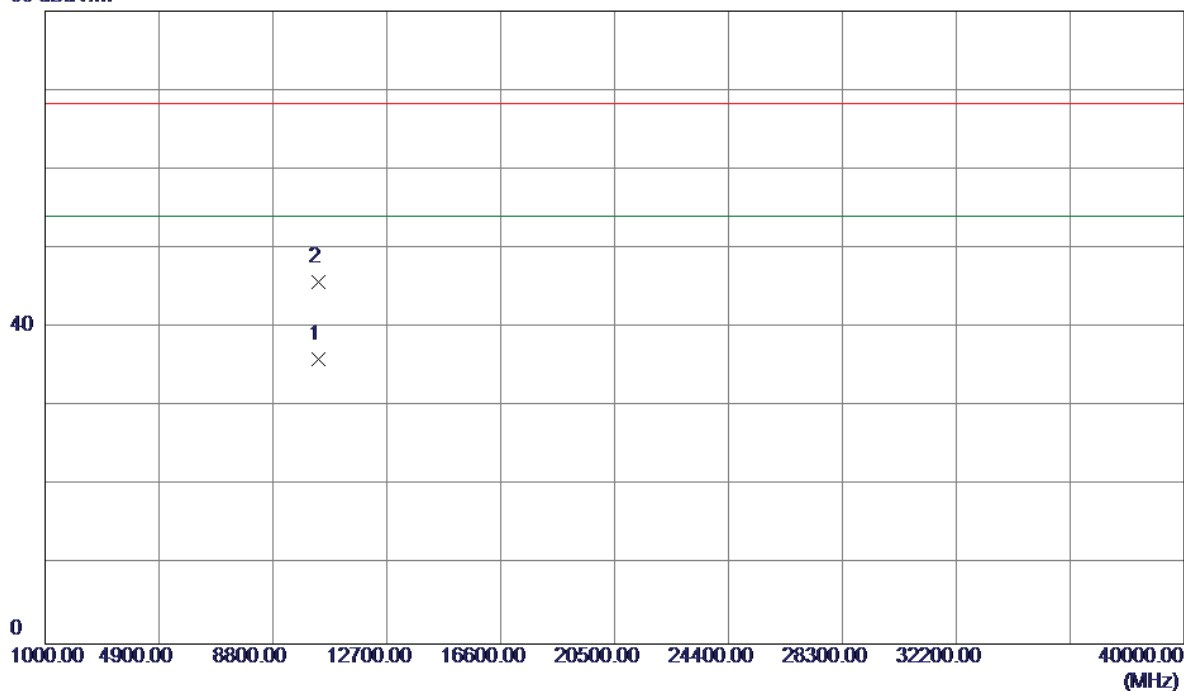

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.2600 | 19.67 | 16.40 | 36.07 | 54.00 | -17.93 | AVG | |
| 2 | 10380.4650 | 29.39 | 16.40 | 45.79 | 68.30 | -22.51 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |

Horizontal

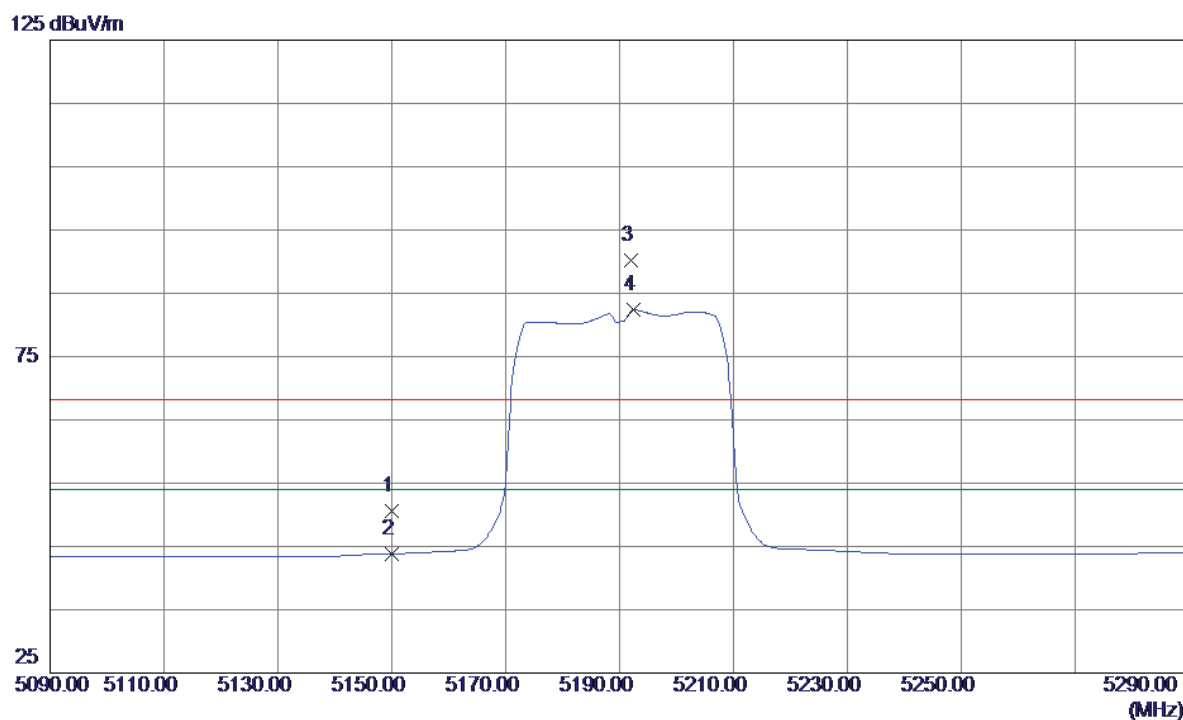


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 9.21 | 41.35 | 50.56 | 68.30 | -17.74 | Peak | |
| 2 | 5150.0000 | 2.49 | 41.35 | 43.84 | 54.00 | -10.16 | AVG | |
| 3 | 5192.0000 | 48.63 | 41.49 | 90.12 | 68.30 | 21.82 | Peak | No Limit |
| 4 * | 5192.4000 | 40.90 | 41.49 | 82.39 | 54.00 | 28.39 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |

Horizontal


80 dBuV/m

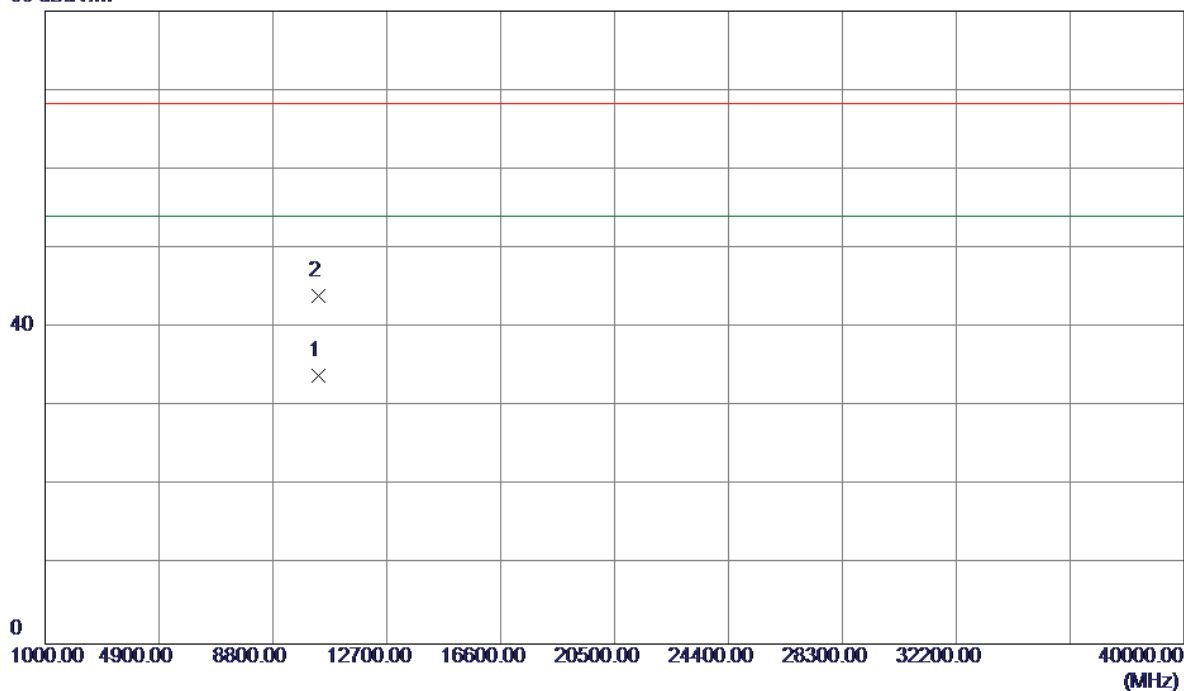

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.3500 | 17.55 | 16.40 | 33.95 | 54.00 | -20.05 | AVG | |
| 2 | 10380.5450 | 27.65 | 16.40 | 44.05 | 68.30 | -24.25 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |

Vertical

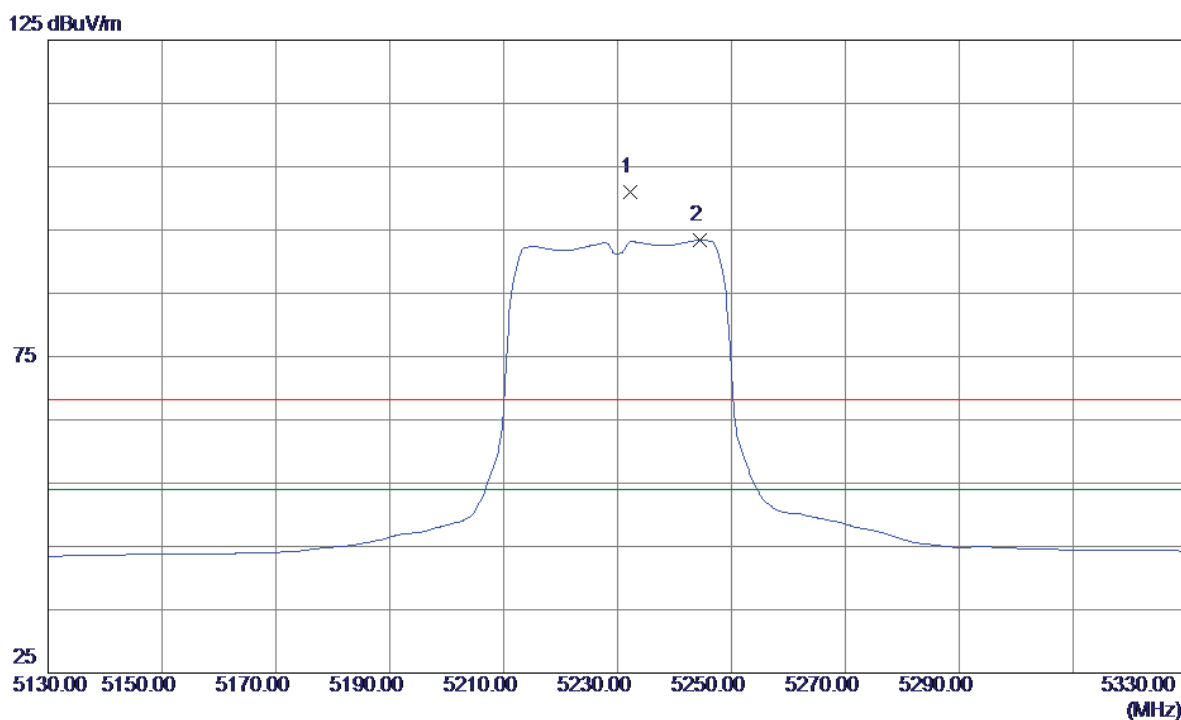


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5232.2000 | 60.14 | 40.90 | 101.04 | 68.30 | 32.74 | Peak | No Limit |
| 2 * | 5244.4000 | 52.44 | 40.94 | 93.38 | 54.00 | 39.38 | AVG | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |

Vertical


80 dBuV/m

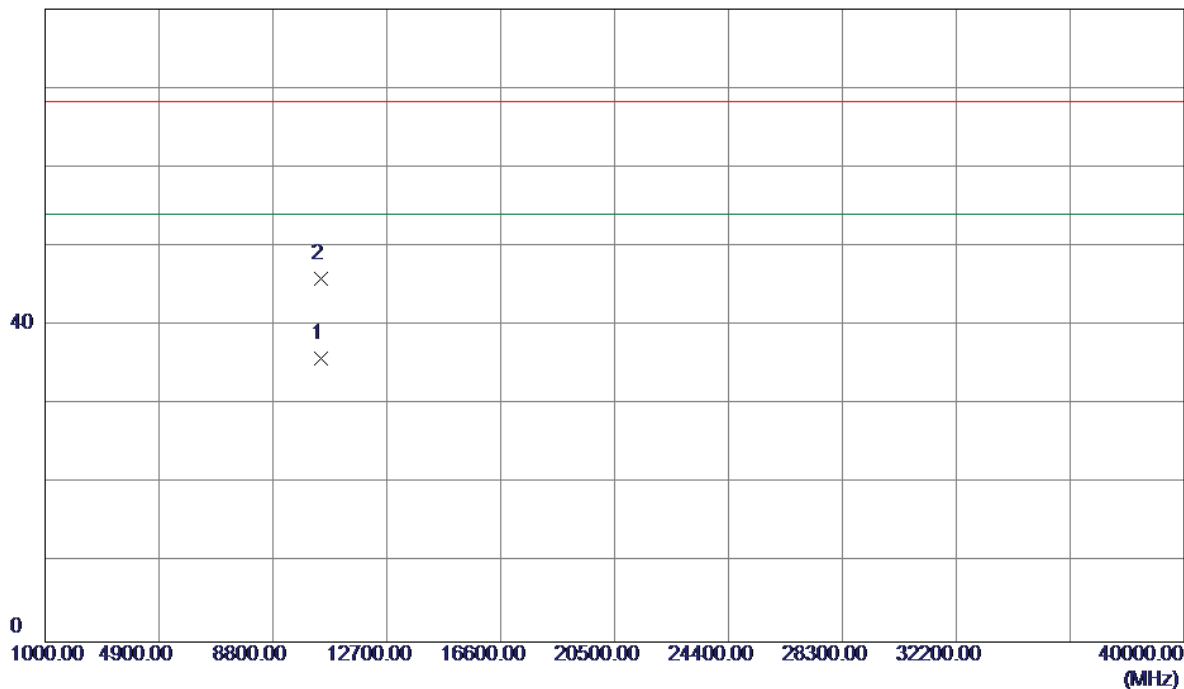

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.3250 | 19.25 | 16.58 | 35.83 | 54.00 | -18.17 | AVG | |
| 2 | 10460.5450 | 29.32 | 16.58 | 45.90 | 68.30 | -22.40 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |

Horizontal

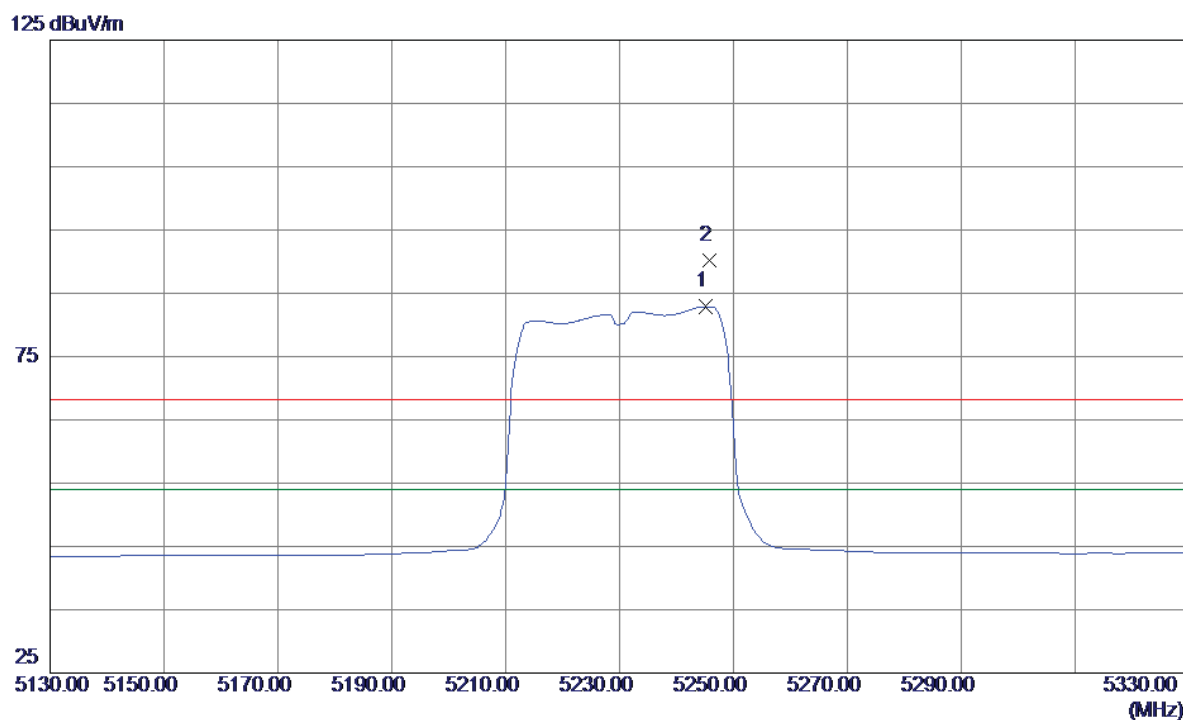


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5245.2000 | 41.23 | 41.67 | 82.90 | 54.00 | 28.90 | AVG | No Limit |
| 2 | 5245.8000 | 48.49 | 41.67 | 90.16 | 68.30 | 21.86 | Peak | No Limit |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |

Horizontal

80 dBuV/m

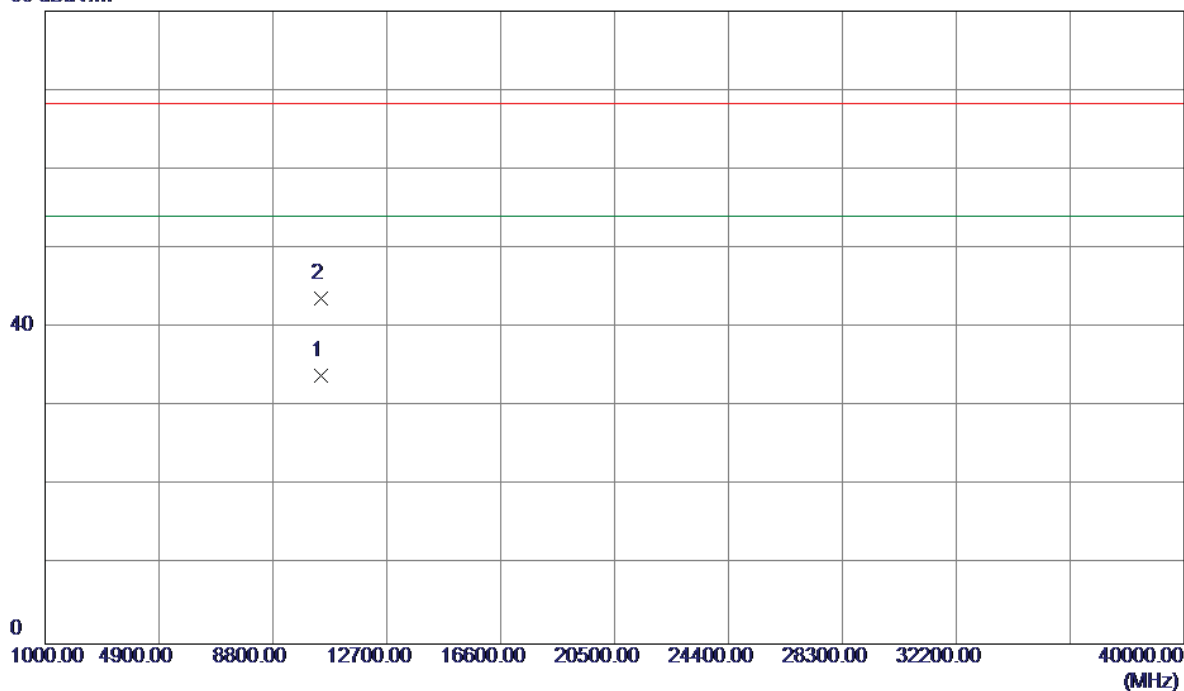


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.3600 | 17.32 | 16.58 | 33.90 | 54.00 | -20.10 | AVG | |
| 2 | 10460.5500 | 27.11 | 16.58 | 43.69 | 68.30 | -24.61 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |

Vertical

125 dBuV/m

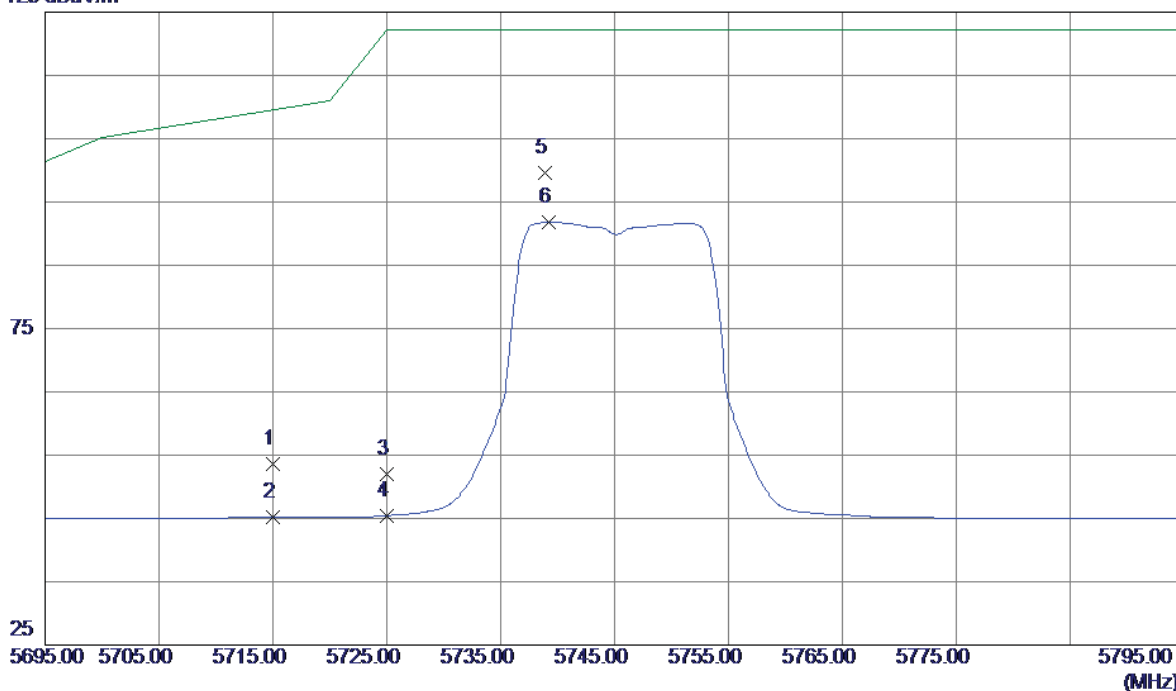


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 10.87 | 42.72 | 53.59 | 109.50 | -55.91 | Peak | |
| 2 | 5715.0000 | 2.40 | 42.72 | 45.12 | 109.50 | -64.38 | AVG | |
| 3 | 5725.0000 | 9.18 | 42.73 | 51.91 | 122.30 | -70.39 | Peak | |
| 4 | 5725.0000 | 2.75 | 42.73 | 45.48 | 122.30 | -76.82 | AVG | |
| 5 * | 5738.9000 | 56.95 | 42.74 | 99.69 | 122.30 | -22.61 | Peak | |
| 6 | 5739.2000 | 49.03 | 42.74 | 91.77 | 122.30 | -30.53 | AVG | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |

Vertical


80 dBuV/m

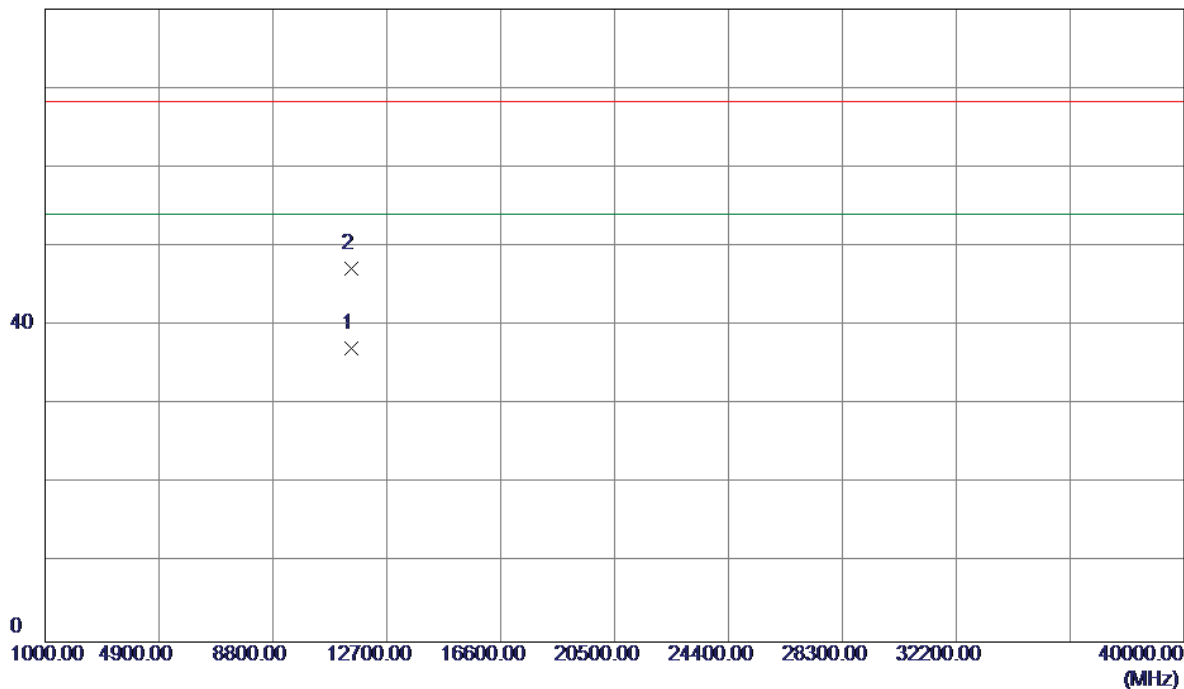

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | | |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 11490.1150 | 19.24 | 17.89 | 37.13 | 54.00 | -16.87 | AVG | |
| 2 | 11491.3450 | 29.25 | 17.89 | 47.14 | 68.30 | -21.16 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |

Horizontal

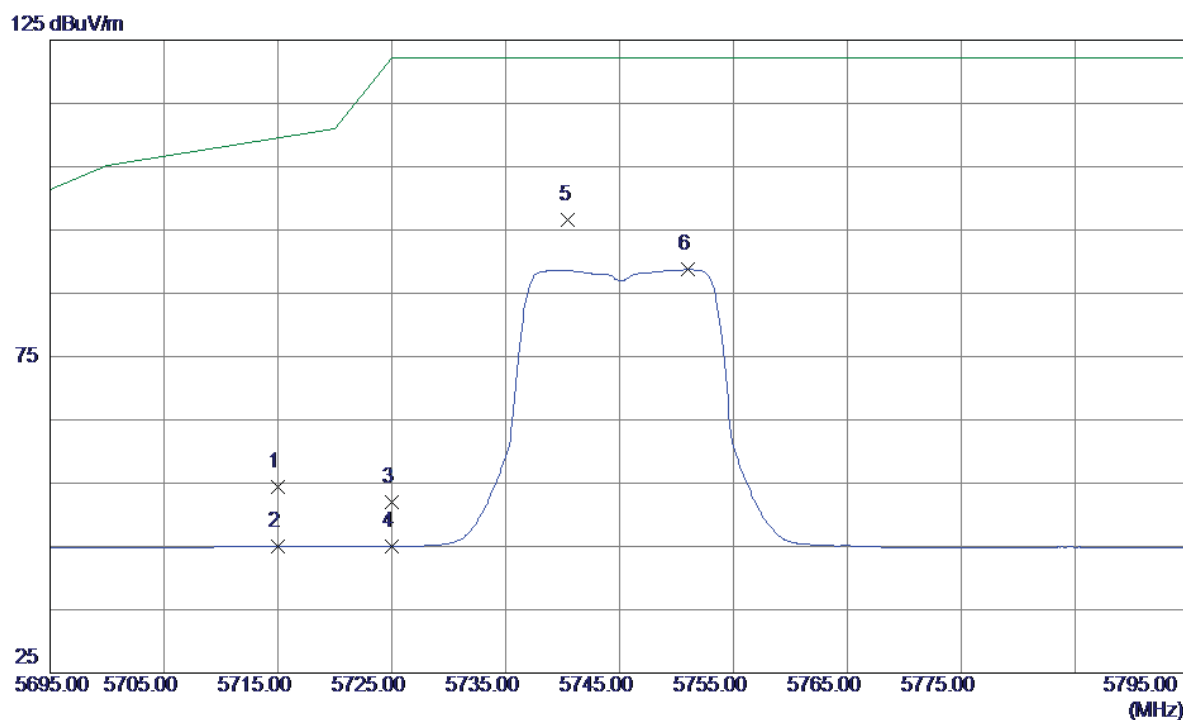


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 11.71 | 42.72 | 54.43 | 109.50 | -55.07 | Peak | |
| 2 | 5715.0000 | 2.24 | 42.72 | 44.96 | 109.50 | -64.54 | AVG | |
| 3 | 5725.0000 | 9.19 | 42.73 | 51.92 | 122.30 | -70.38 | Peak | |
| 4 | 5725.0000 | 2.33 | 42.73 | 45.06 | 122.30 | -77.24 | AVG | |
| 5 * | 5740.5000 | 53.91 | 42.74 | 96.65 | 122.30 | -25.65 | Peak | |
| 6 | 5751.0000 | 45.98 | 42.75 | 88.73 | 122.30 | -33.57 | AVG | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |

Horizontal

80 dBuV/m

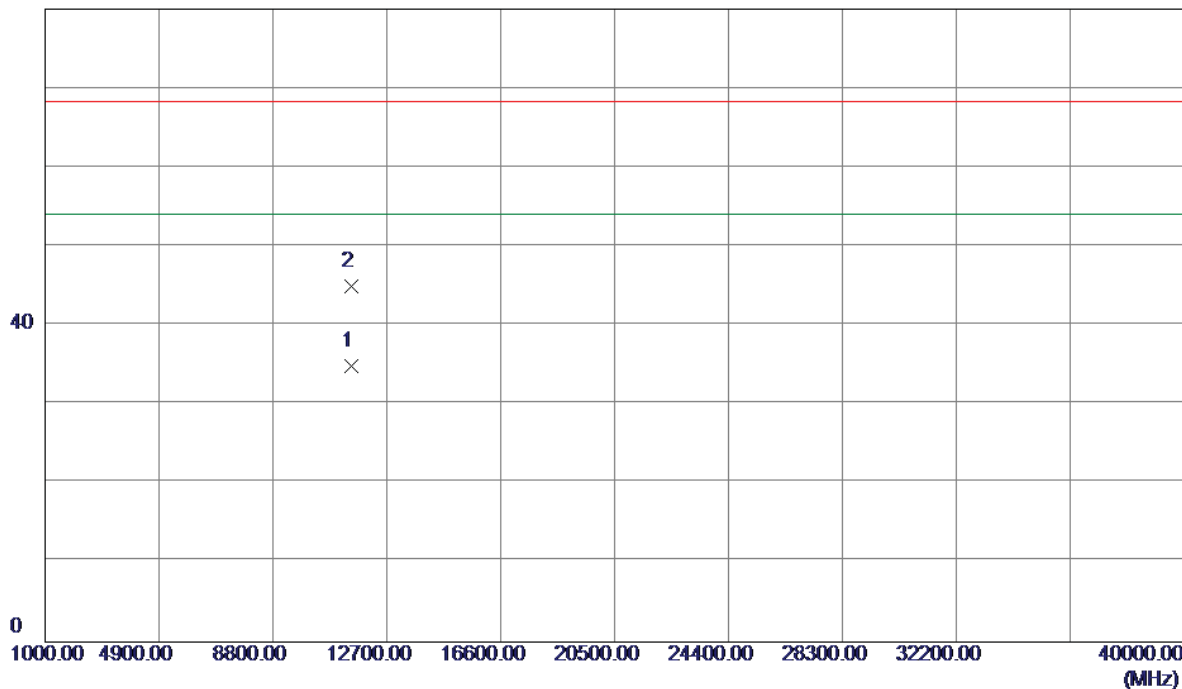


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.0100 | 17.01 | 17.89 | 34.90 | 54.00 | -19.10 | AVG | |
| 2 | 11491.4570 | 27.02 | 17.89 | 44.91 | 68.30 | -23.39 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5785MHz |

Vertical

125 dBuV/m

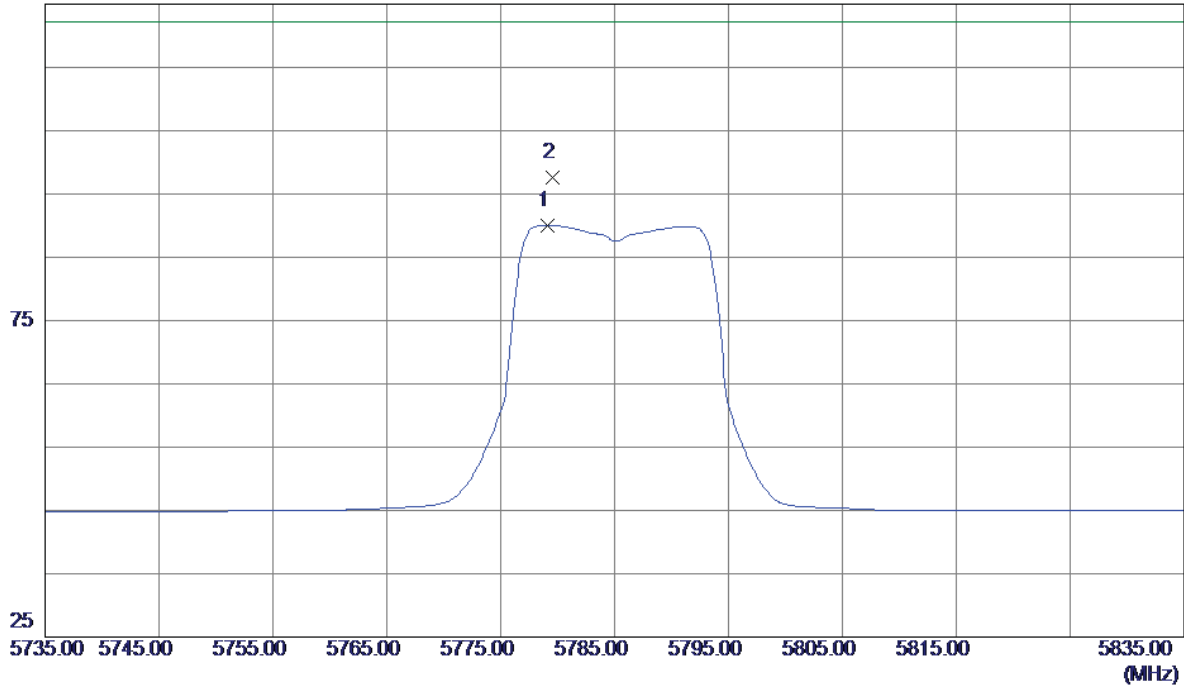


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5779.1000 | 47.27 | 42.78 | 90.05 | 122.30 | -32.25 | AVG | |
| 2 * | 5779.6000 | 54.86 | 42.78 | 97.64 | 122.30 | -24.66 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5785MHz |

Vertical


80 dBuV/m

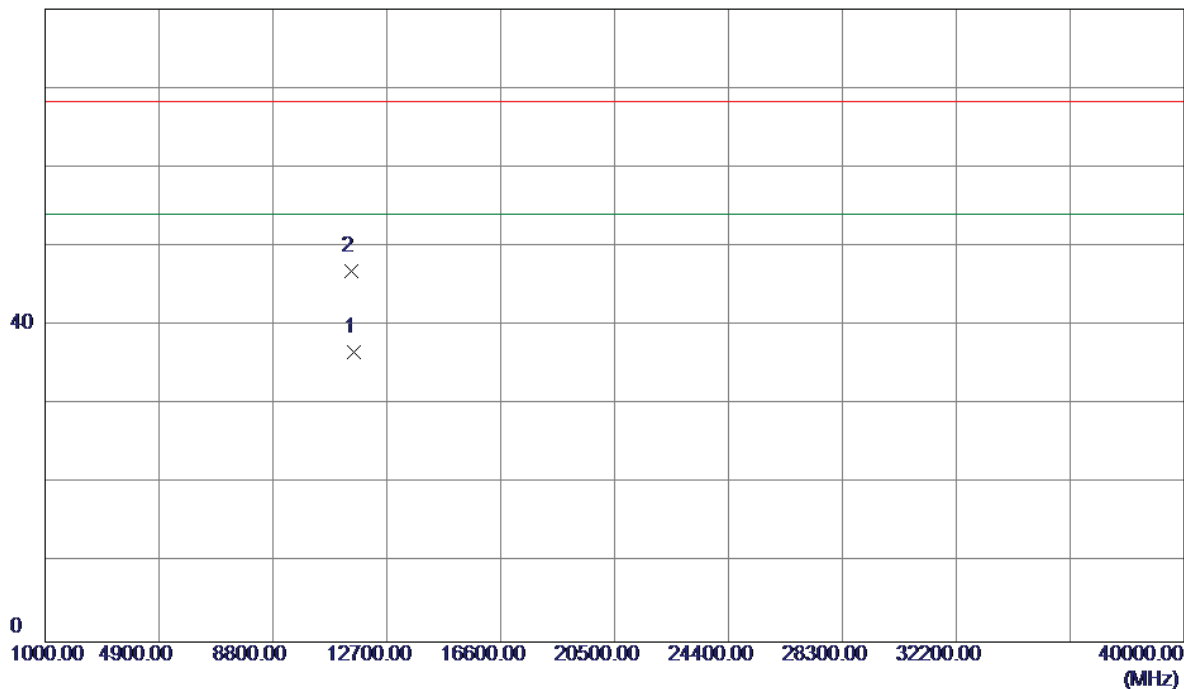

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1100 | 18.79 | 17.85 | 36.64 | 54.00 | -17.36 | AVG | |
| 2 | 11491.5400 | 28.95 | 17.89 | 46.84 | 68.30 | -21.46 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5785MHz |

Horizontal

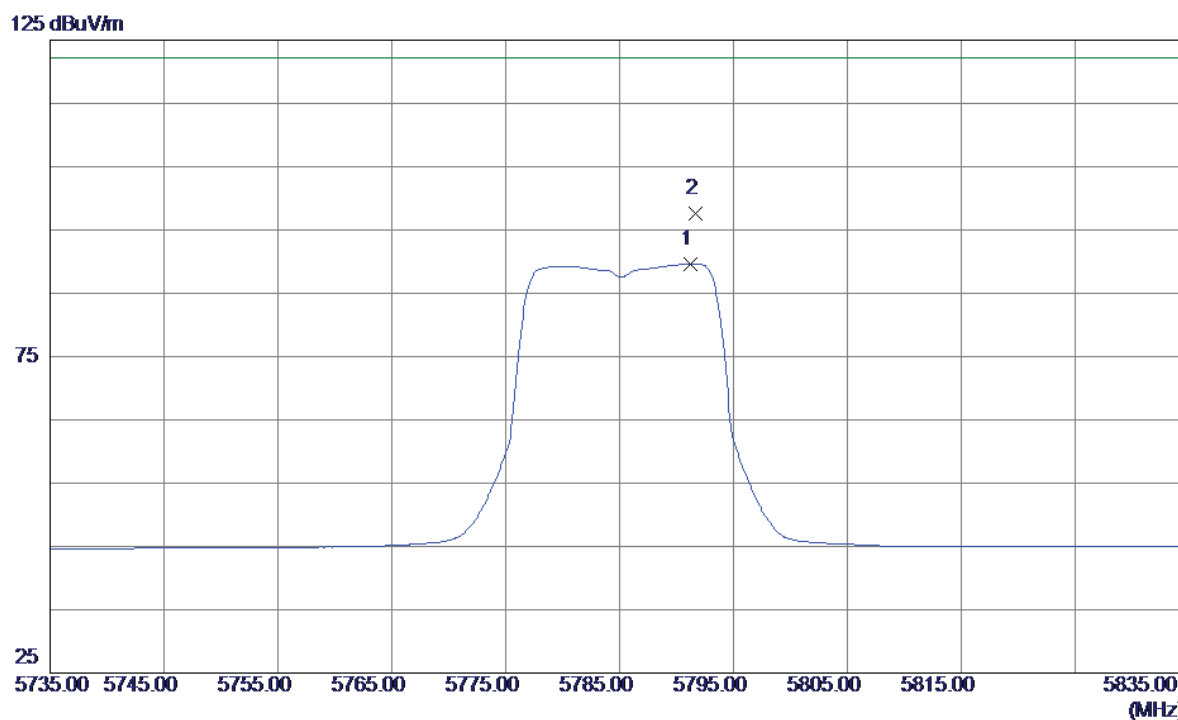


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5791.2000 | 46.90 | 42.79 | 89.69 | 122.30 | -32.61 | AVG | |
| 2 * | 5791.7000 | 54.84 | 42.79 | 97.63 | 122.30 | -24.67 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5785MHz |

Horizontal


80 dBuV/m

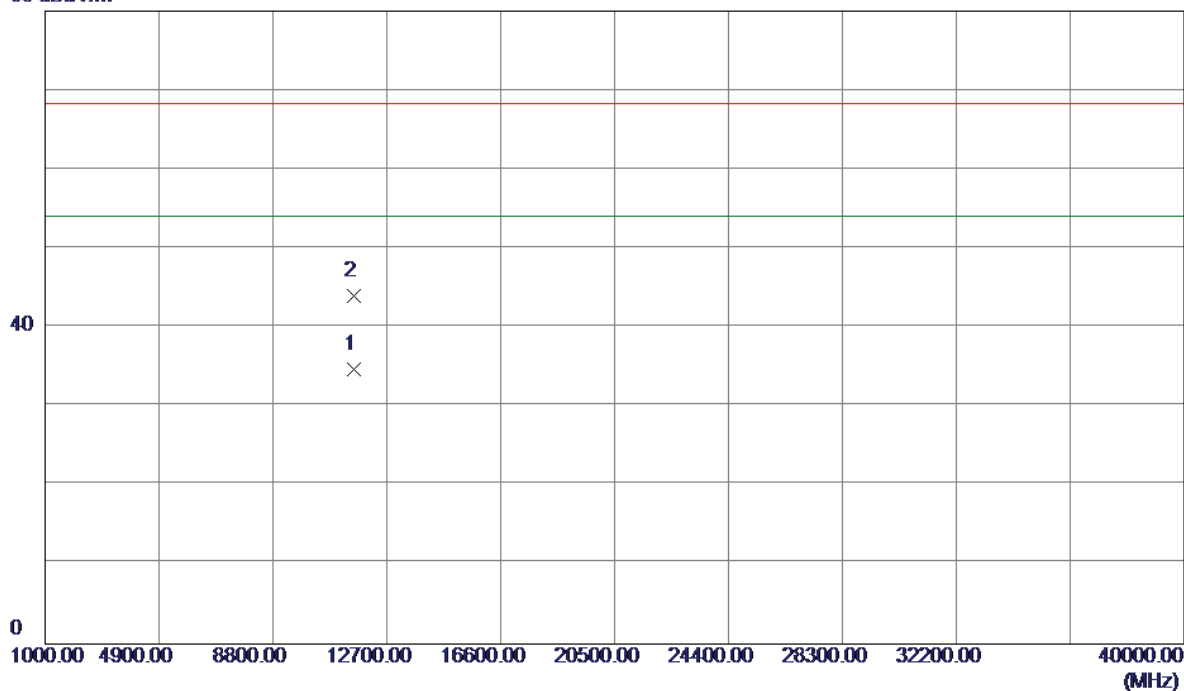

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1150 | 16.86 | 17.85 | 34.71 | 54.00 | -19.29 | AVG | |
| 2 | 11570.3450 | 26.10 | 17.85 | 43.95 | 68.30 | -24.35 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |

Vertical

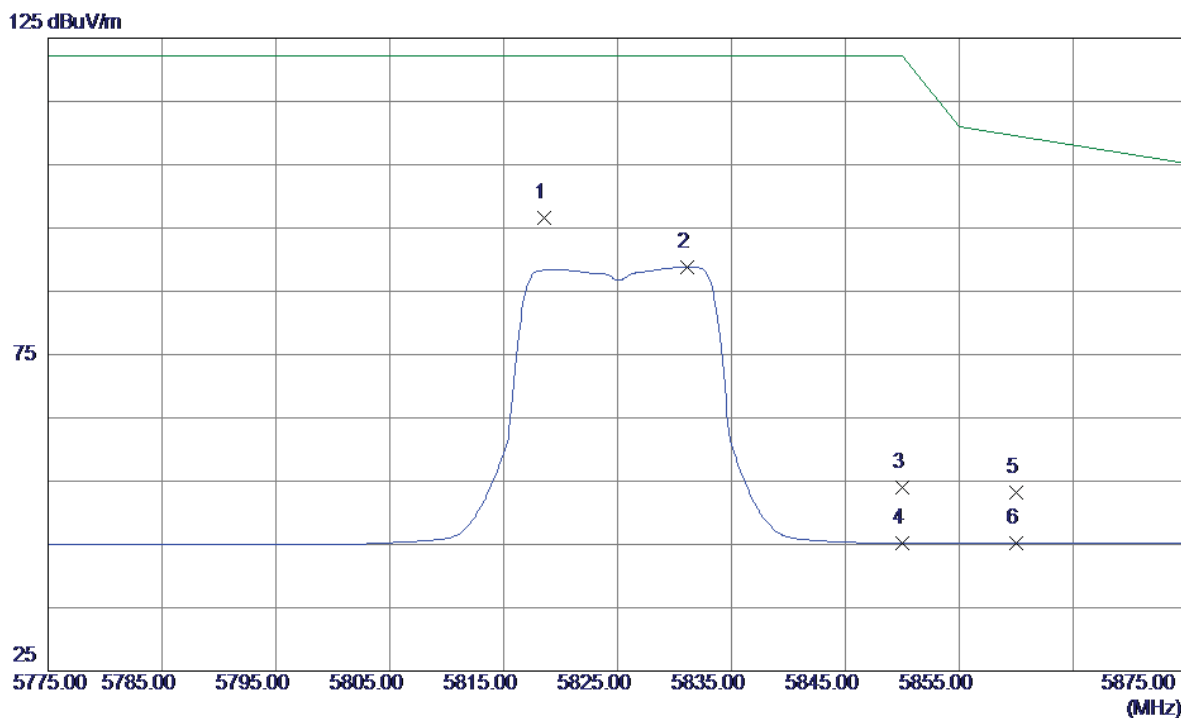


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5818.6000 | 53.77 | 42.81 | 96.58 | 122.30 | -25.72 | Peak | |
| 2 | 5831.1000 | 46.06 | 42.82 | 88.88 | 122.30 | -33.42 | AVG | |
| 3 | 5850.0000 | 11.20 | 42.84 | 54.04 | 122.30 | -68.26 | Peak | |
| 4 | 5850.0000 | 2.36 | 42.84 | 45.20 | 122.30 | -77.10 | AVG | |
| 5 | 5860.0000 | 10.35 | 42.85 | 53.20 | 109.50 | -56.30 | Peak | |
| 6 | 5860.0000 | 2.33 | 42.85 | 45.18 | 109.50 | -64.32 | AVG | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |

Vertical


80 dBuV/m

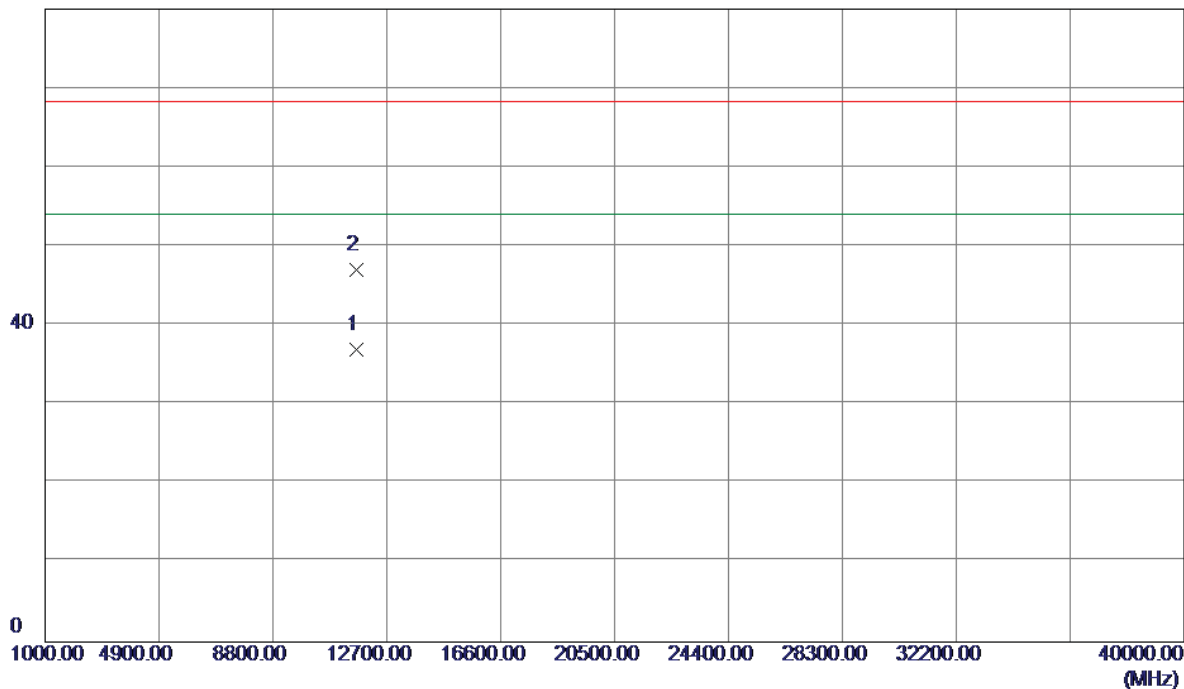

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.2450 | 19.22 | 17.79 | 37.01 | 54.00 | -16.99 | AVG | |
| 2 | 11650.2480 | 29.32 | 17.79 | 47.11 | 68.30 | -21.19 | Peak | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |

Horizontal

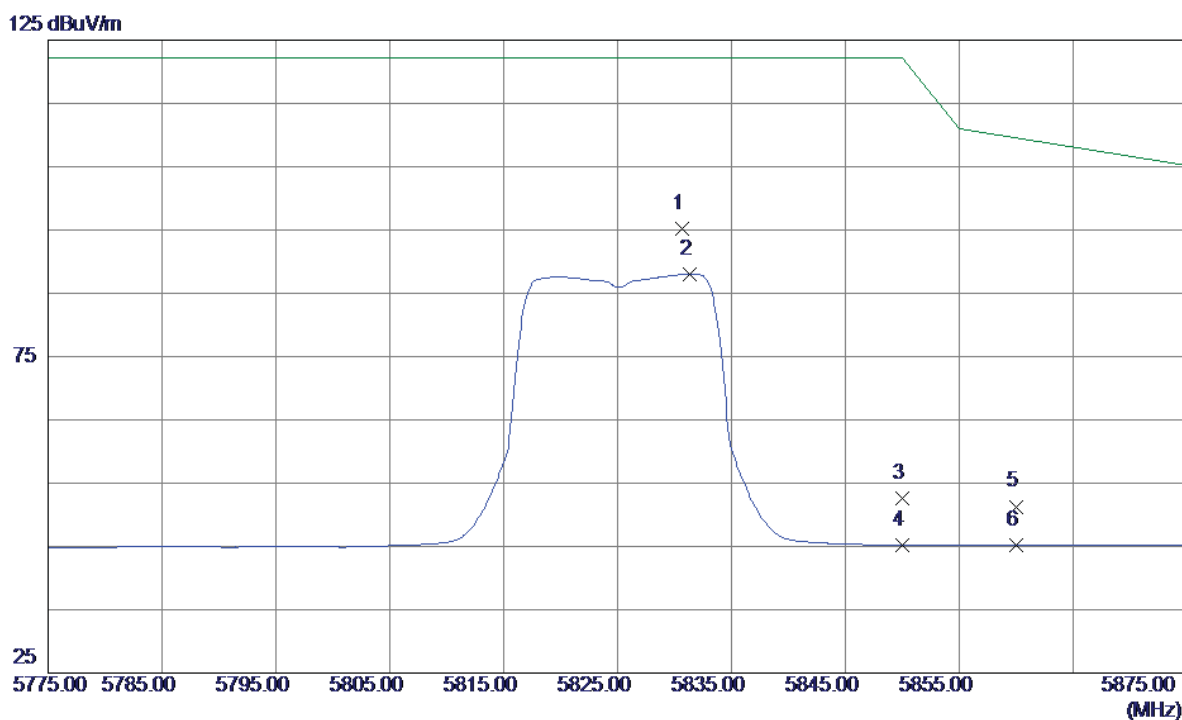


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5830.7000 | 52.38 | 42.82 | 95.20 | 122.30 | -27.10 | Peak | |
| 2 | 5831.3000 | 45.25 | 42.82 | 88.07 | 122.30 | -34.23 | AVG | |
| 3 | 5850.0000 | 9.83 | 42.84 | 52.67 | 122.30 | -69.63 | Peak | |
| 4 | 5850.0000 | 2.39 | 42.84 | 45.23 | 122.30 | -77.07 | AVG | |
| 5 | 5860.0000 | 8.45 | 42.85 | 51.30 | 109.50 | -58.20 | Peak | |
| 6 | 5860.0000 | 2.33 | 42.85 | 45.18 | 109.50 | -64.32 | AVG | |

| | |
|------------------|--------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |

Horizontal


80 dBuV/m

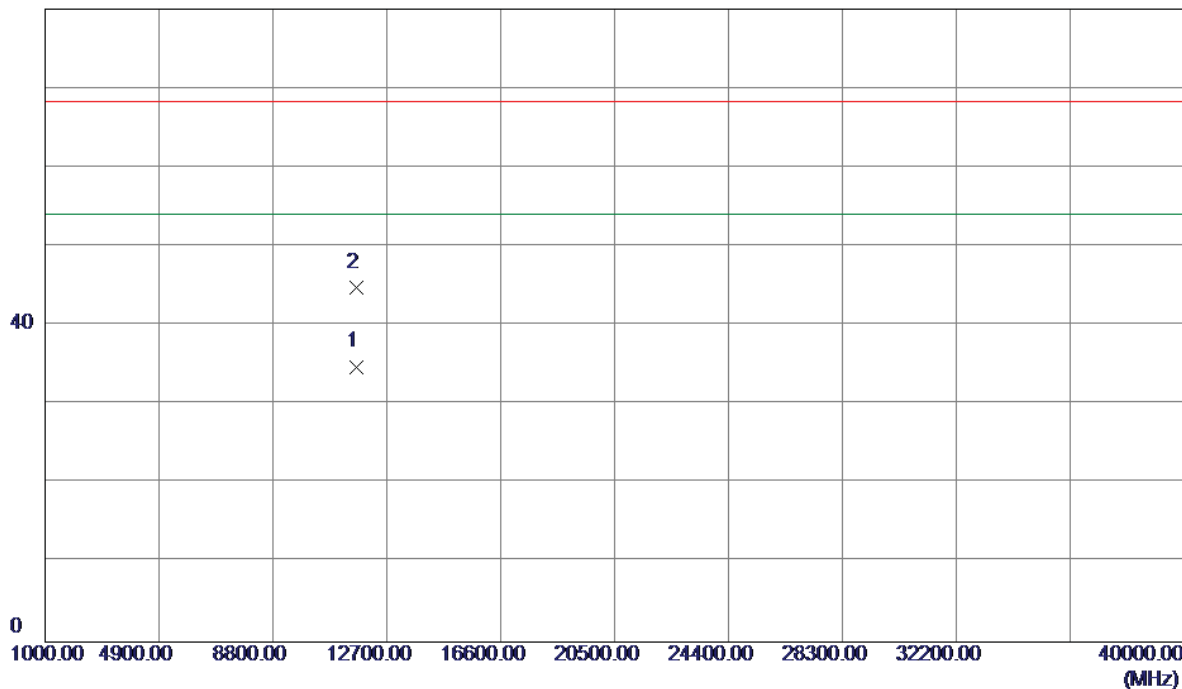

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.0000 | 17.01 | 17.79 | 34.80 | 54.00 | -19.20 | AVG | |
| 2 | 11650.0140 | 27.02 | 17.79 | 44.81 | 68.30 | -23.49 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |

Vertical

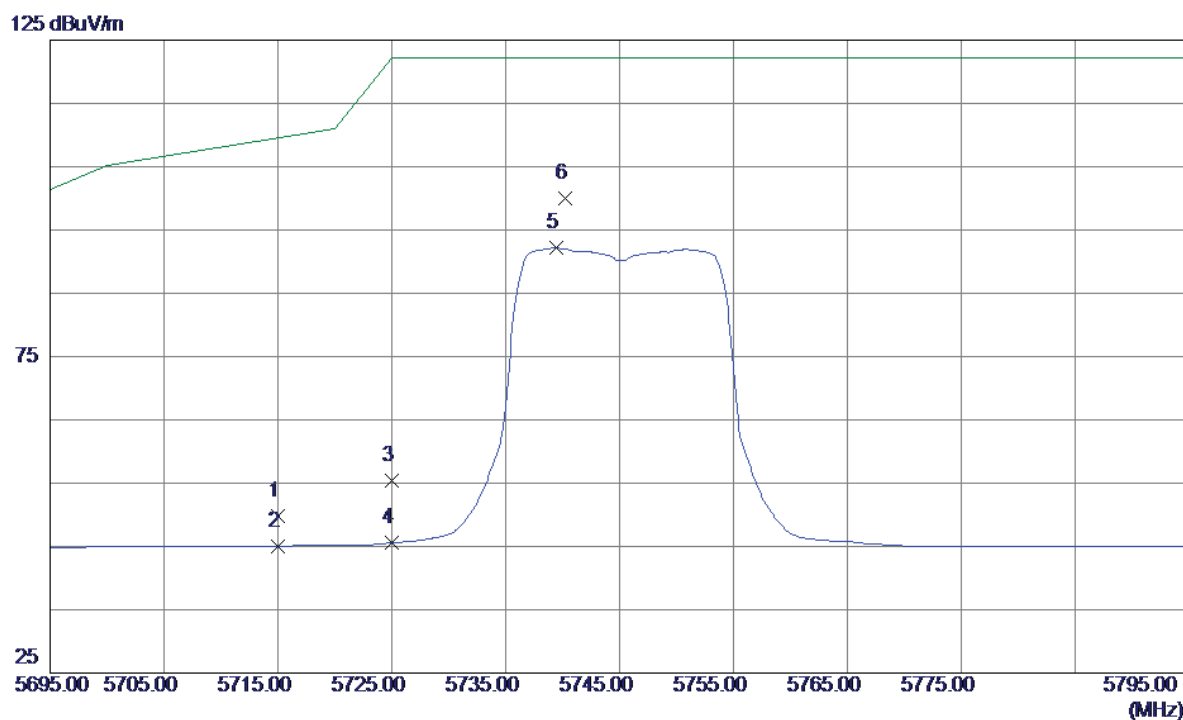


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 7.07 | 42.72 | 49.79 | 109.50 | -59.71 | Peak | |
| 2 | 5715.0000 | 2.30 | 42.72 | 45.02 | 109.50 | -64.48 | AVG | |
| 3 | 5725.0000 | 12.68 | 42.73 | 55.41 | 122.30 | -66.89 | Peak | |
| 4 | 5725.0000 | 2.88 | 42.73 | 45.61 | 122.30 | -76.69 | AVG | |
| 5 | 5739.4000 | 49.42 | 42.74 | 92.16 | 122.30 | -30.14 | AVG | |
| 6 * | 5740.2000 | 57.26 | 42.74 | 100.00 | 122.30 | -22.30 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |

Vertical


80 dBuV/m

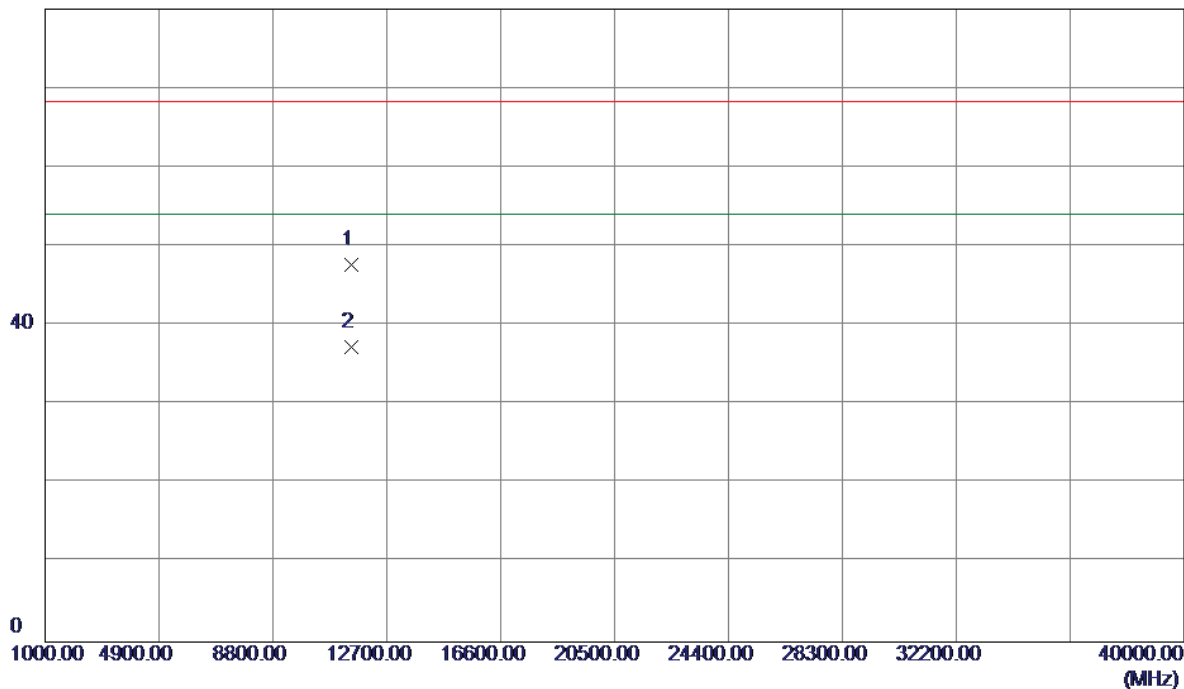

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11490.2250 | 29.76 | 17.89 | 47.65 | 68.30 | -20.65 | Peak | |
| 2 * | 11490.3250 | 19.32 | 17.89 | 37.21 | 54.00 | -16.79 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


Horizontal

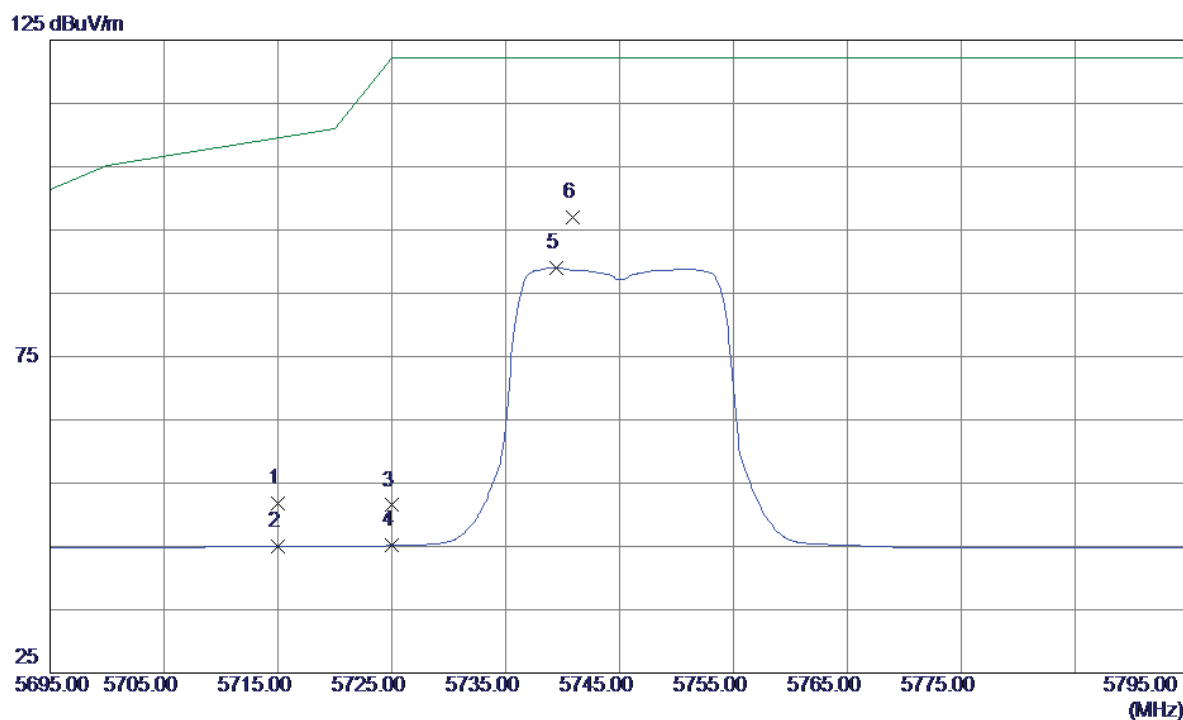

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 9.04 | 42.72 | 51.76 | 109.50 | -57.74 | Peak | |
| 2 | 5715.0000 | 2.27 | 42.72 | 44.99 | 109.50 | -64.51 | AVG | |
| 3 | 5725.0000 | 8.77 | 42.73 | 51.50 | 122.30 | -70.80 | Peak | |
| 4 | 5725.0000 | 2.42 | 42.73 | 45.15 | 122.30 | -77.15 | AVG | |
| 5 | 5739.4000 | 46.32 | 42.74 | 89.06 | 122.30 | -33.24 | AVG | |
| 6 * | 5740.9000 | 54.21 | 42.74 | 96.95 | 122.30 | -25.35 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |

Horizontal

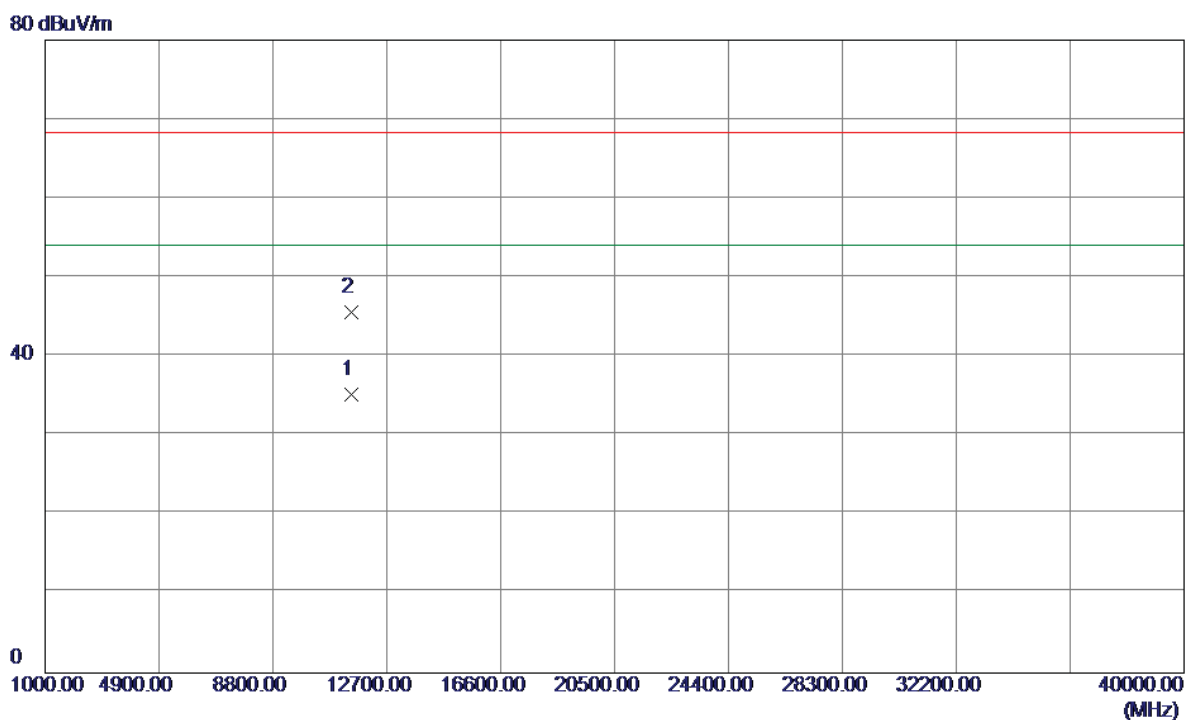


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.2850 | 17.35 | 17.89 | 35.24 | 54.00 | -18.76 | AVG | |
| 2 | 11490.5550 | 27.69 | 17.89 | 45.58 | 68.30 | -22.72 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5785MHz |

Vertical

125 dBuV/m

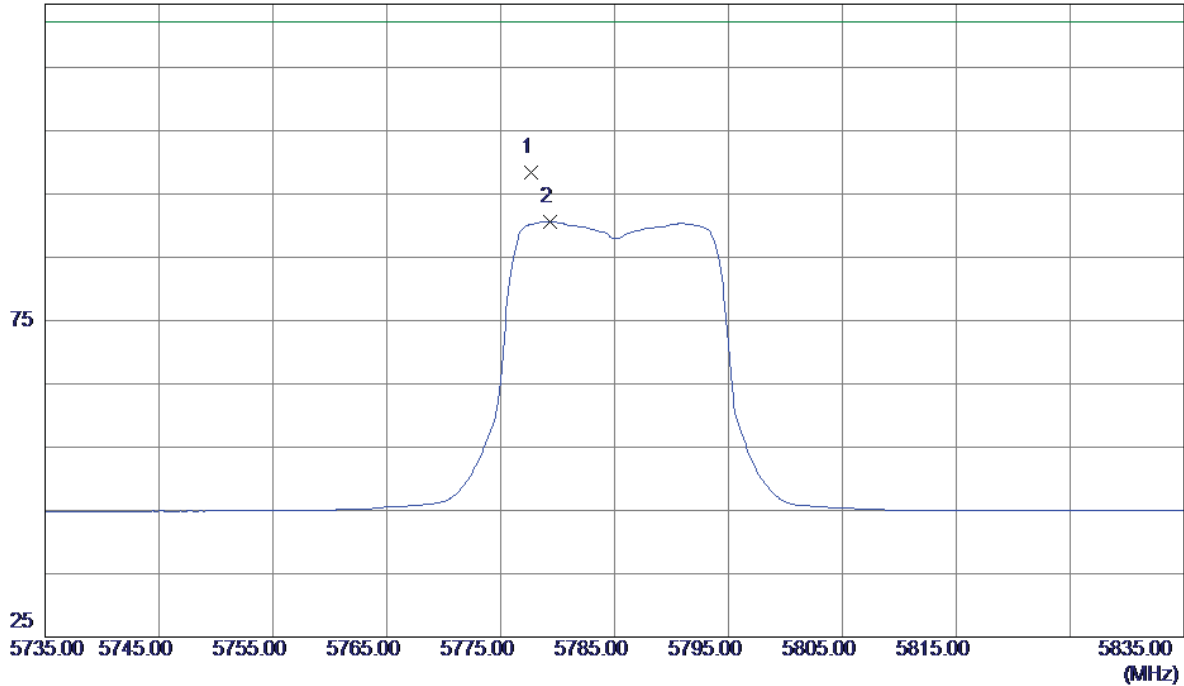


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5777.7000 | 55.55 | 42.77 | 98.32 | 122.30 | -23.98 | Peak | |
| 2 | 5779.3000 | 47.90 | 42.78 | 90.68 | 122.30 | -31.62 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5785MHz |

Vertical


80 dBuV/m

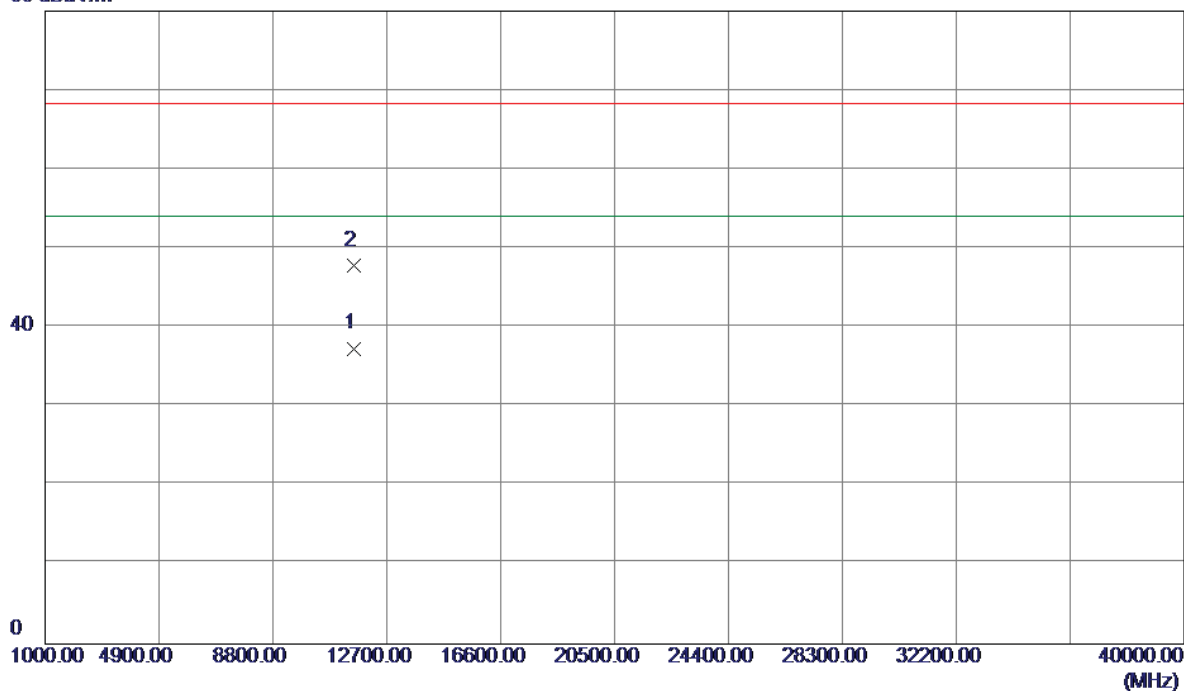

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1750 | 19.51 | 17.85 | 37.36 | 54.00 | -16.64 | AVG | |
| 2 | 11570.3550 | 29.93 | 17.85 | 47.78 | 68.30 | -20.52 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5785MHz |

Horizontal

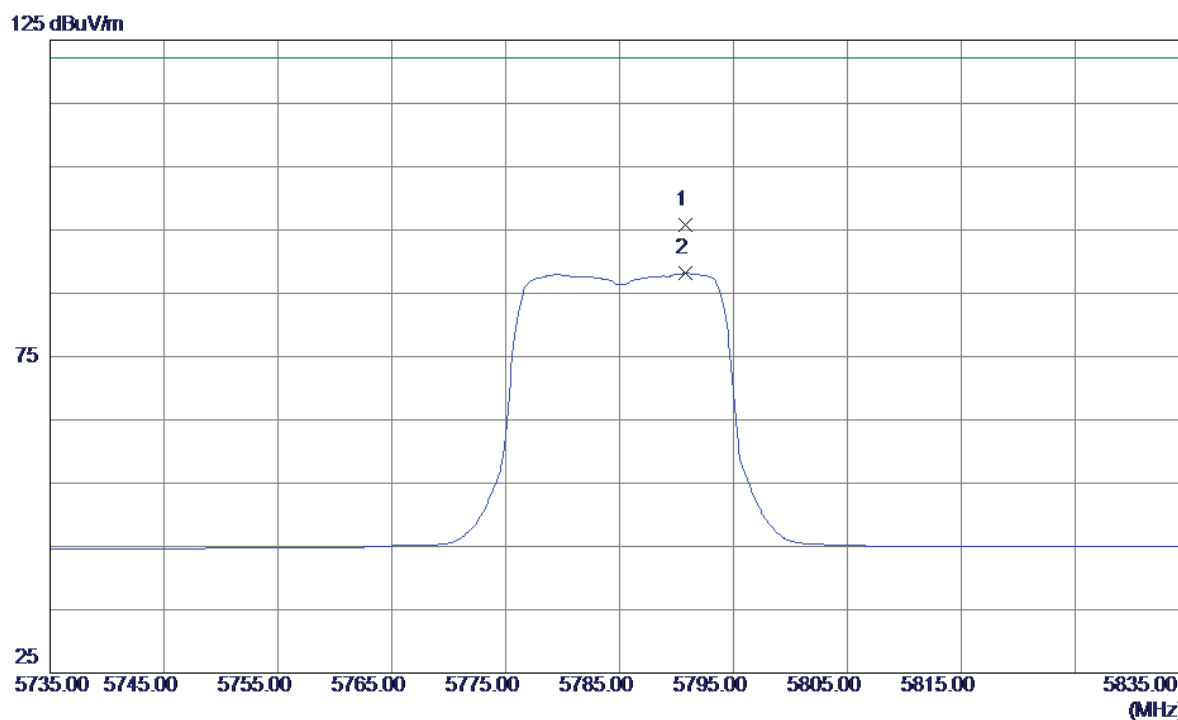


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5790.8000 | 52.97 | 42.79 | 95.76 | 122.30 | -26.54 | Peak | |
| 2 | 5790.8000 | 45.34 | 42.79 | 88.13 | 122.30 | -34.17 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5785MHz |

Horizontal


80 dBuV/m

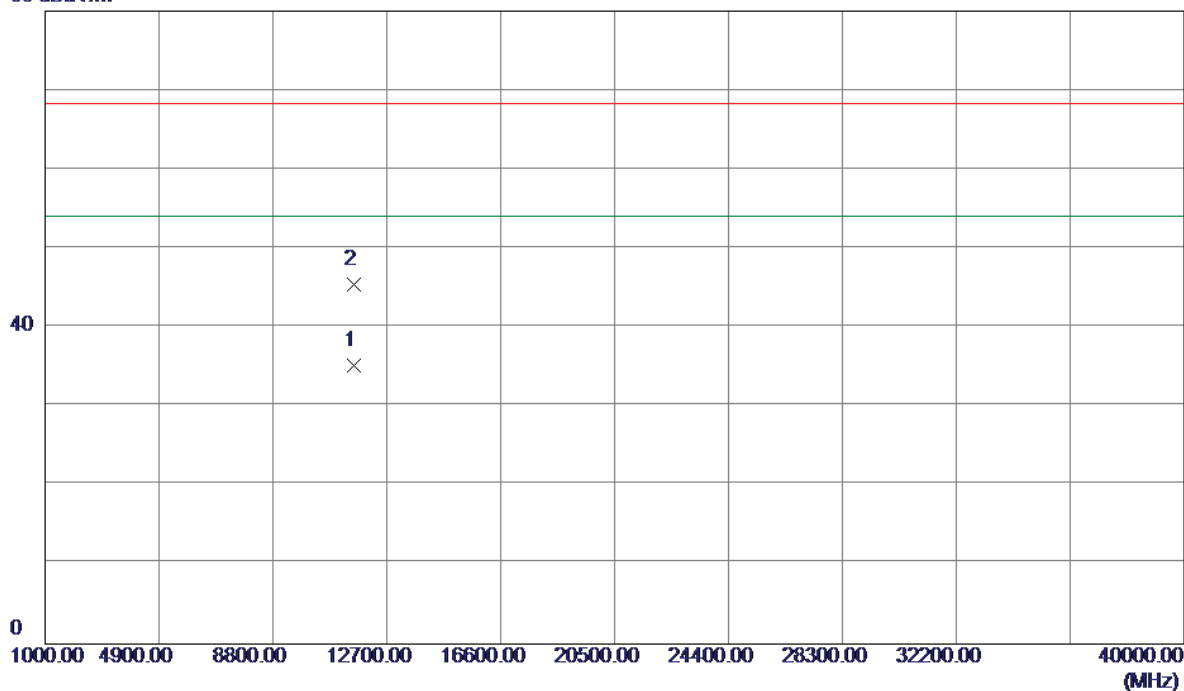

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.2350 | 17.32 | 17.85 | 35.17 | 54.00 | -18.83 | AVG | |
| 2 | 11570.5750 | 27.61 | 17.85 | 45.46 | 68.30 | -22.84 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |

Vertical

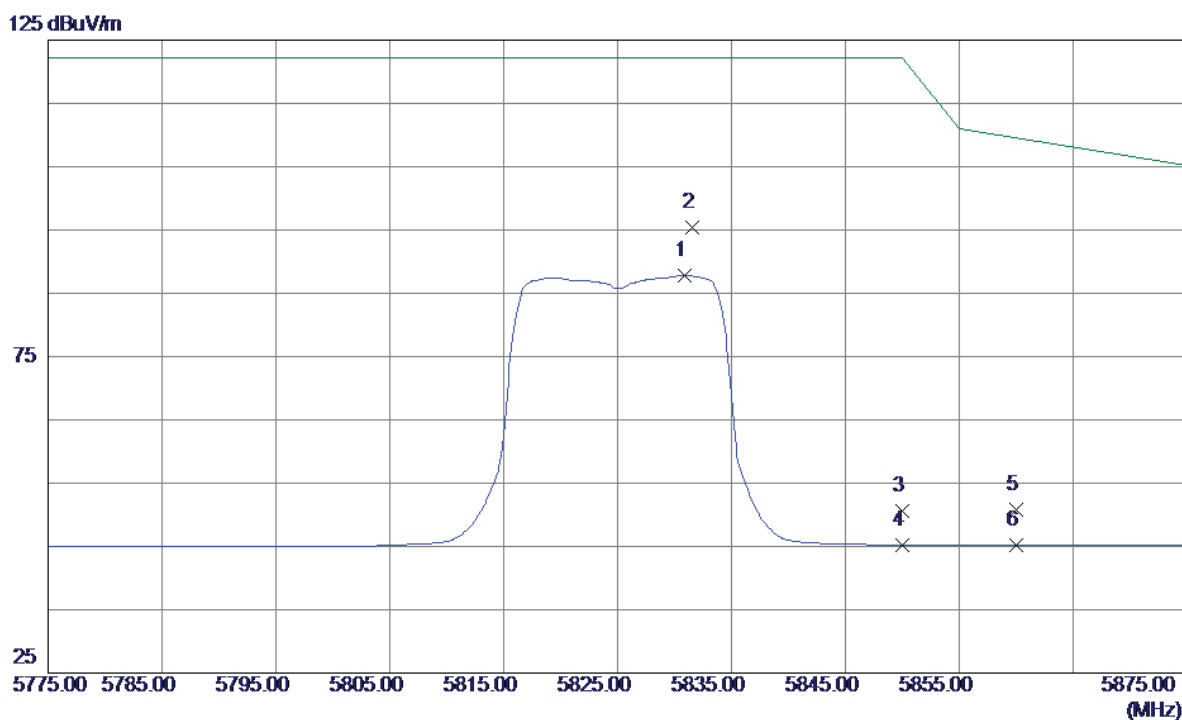


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5830.9000 | 45.01 | 42.82 | 87.83 | 122.30 | -34.47 | AVG | |
| 2 * | 5831.6000 | 52.62 | 42.82 | 95.44 | 122.30 | -26.86 | Peak | |
| 3 | 5850.0000 | 7.71 | 42.84 | 50.55 | 122.30 | -71.75 | Peak | |
| 4 | 5850.0000 | 2.42 | 42.84 | 45.26 | 122.30 | -77.04 | AVG | |
| 5 | 5860.0000 | 7.90 | 42.85 | 50.75 | 109.50 | -58.75 | Peak | |
| 6 | 5860.0000 | 2.38 | 42.85 | 45.23 | 109.50 | -64.27 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |

Vertical


80 dBuV/m

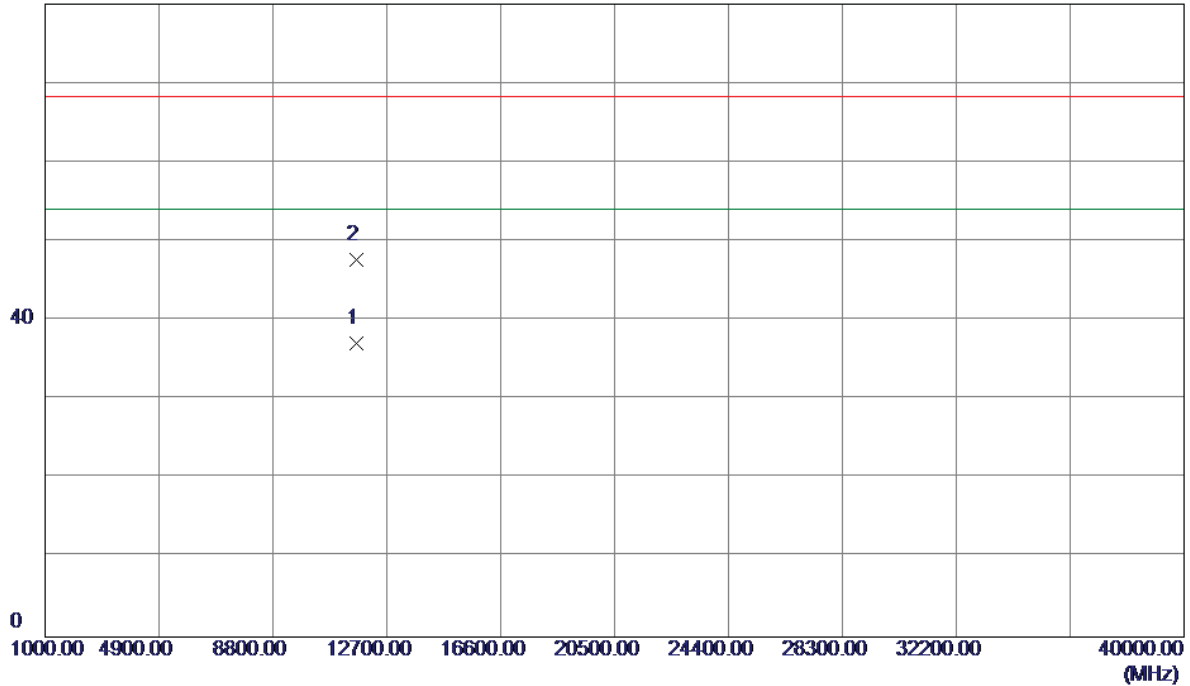

| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|-----|------------|---------------|----------------|--------------|--------|--------|----------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 11650.1250 | 19.38 | 17.79 | 37.17 | 54.00 | -16.83 | AVG | |
| 2 | 11650.3550 | 29.89 | 17.79 | 47.68 | 68.30 | -20.62 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |

Horizontal

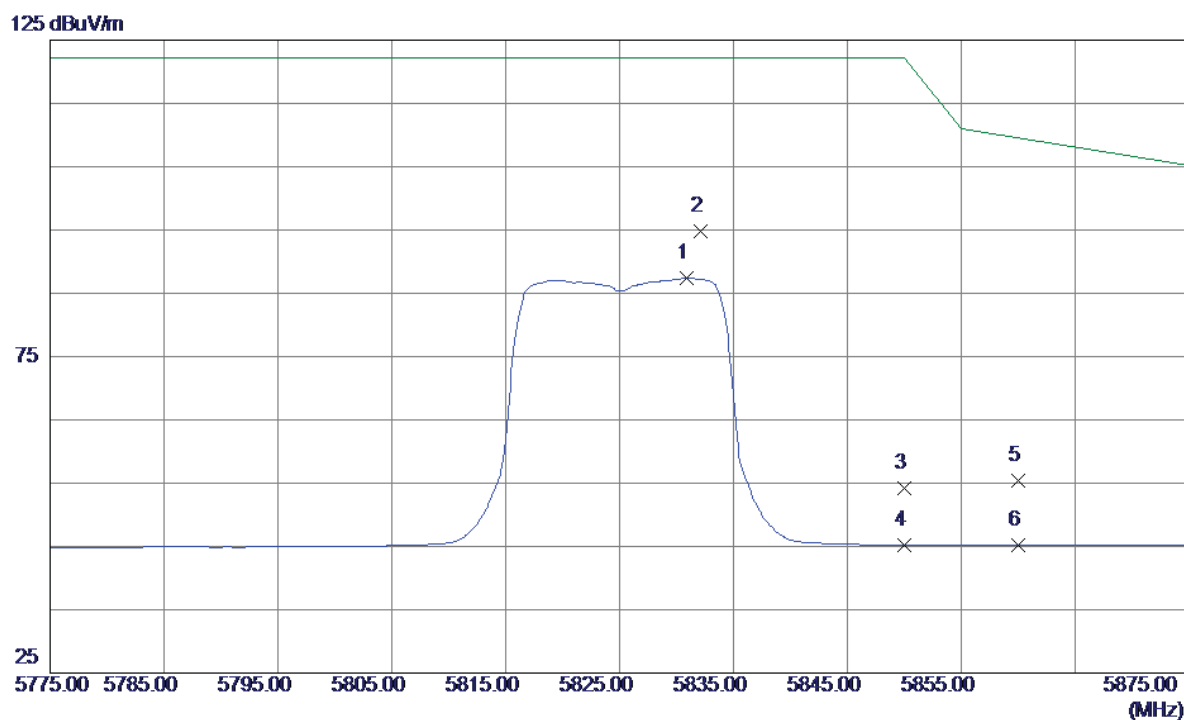


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5830.9000 | 44.59 | 42.82 | 87.41 | 122.30 | -34.89 | AVG | |
| 2 * | 5832.1000 | 51.97 | 42.82 | 94.79 | 122.30 | -27.51 | Peak | |
| 3 | 5850.0000 | 11.42 | 42.84 | 54.26 | 122.30 | -68.04 | Peak | |
| 4 | 5850.0000 | 2.35 | 42.84 | 45.19 | 122.30 | -77.11 | AVG | |
| 5 | 5860.0000 | 12.61 | 42.85 | 55.46 | 109.50 | -54.04 | Peak | |
| 6 | 5860.0000 | 2.34 | 42.85 | 45.19 | 109.50 | -64.31 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |

Horizontal


80 dBuV/m

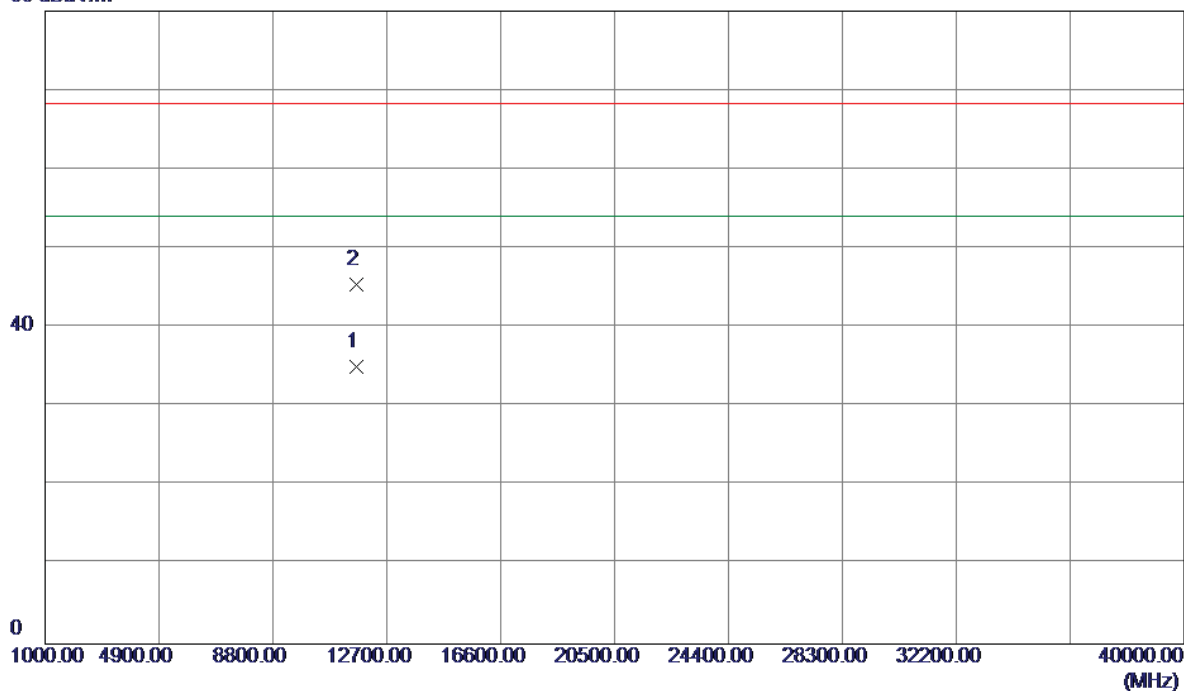

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.2500 | 17.25 | 17.79 | 35.04 | 54.00 | -18.96 | AVG | |
| 2 | 11650.4450 | 27.68 | 17.79 | 45.47 | 68.30 | -22.83 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |

Vertical

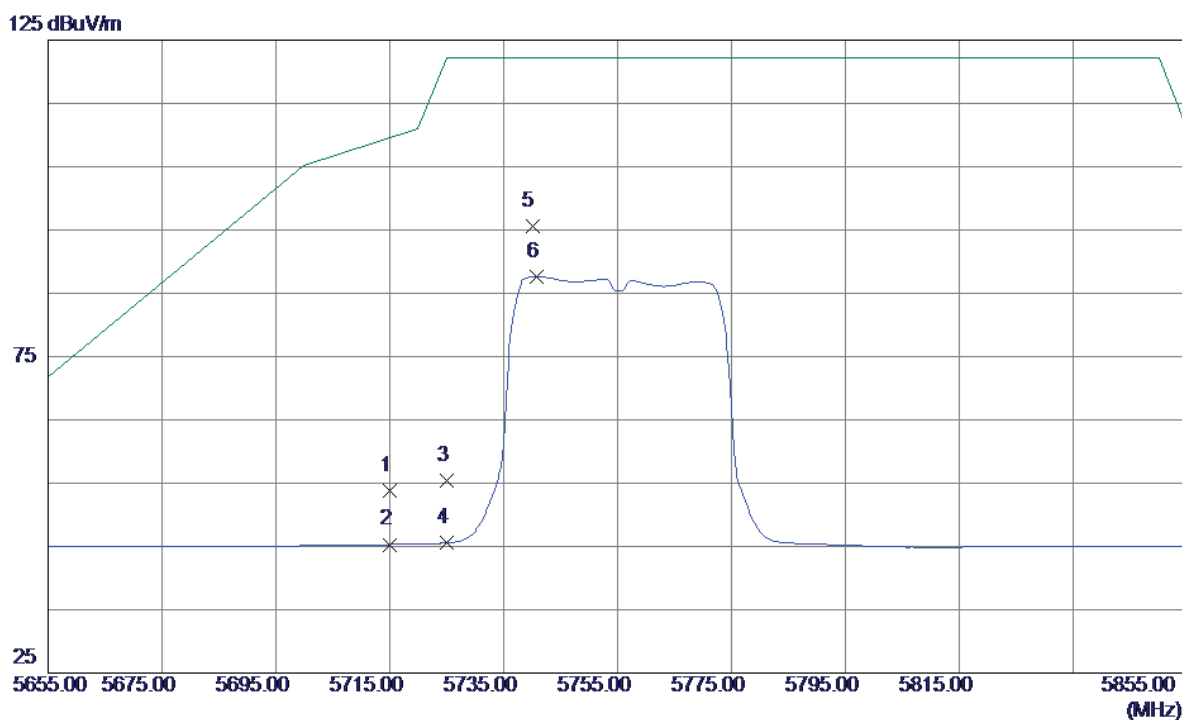


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 11.10 | 42.72 | 53.82 | 109.50 | -55.68 | Peak | |
| 2 | 5715.0000 | 2.58 | 42.72 | 45.30 | 109.50 | -64.20 | AVG | |
| 3 | 5725.0000 | 12.63 | 42.73 | 55.36 | 122.30 | -66.94 | Peak | |
| 4 | 5725.0000 | 2.84 | 42.73 | 45.57 | 122.30 | -76.73 | AVG | |
| 5 * | 5740.0000 | 52.81 | 42.74 | 95.55 | 122.30 | -26.75 | Peak | |
| 6 | 5740.8000 | 44.91 | 42.74 | 87.65 | 122.30 | -34.65 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |

Vertical


80 dBuV/m

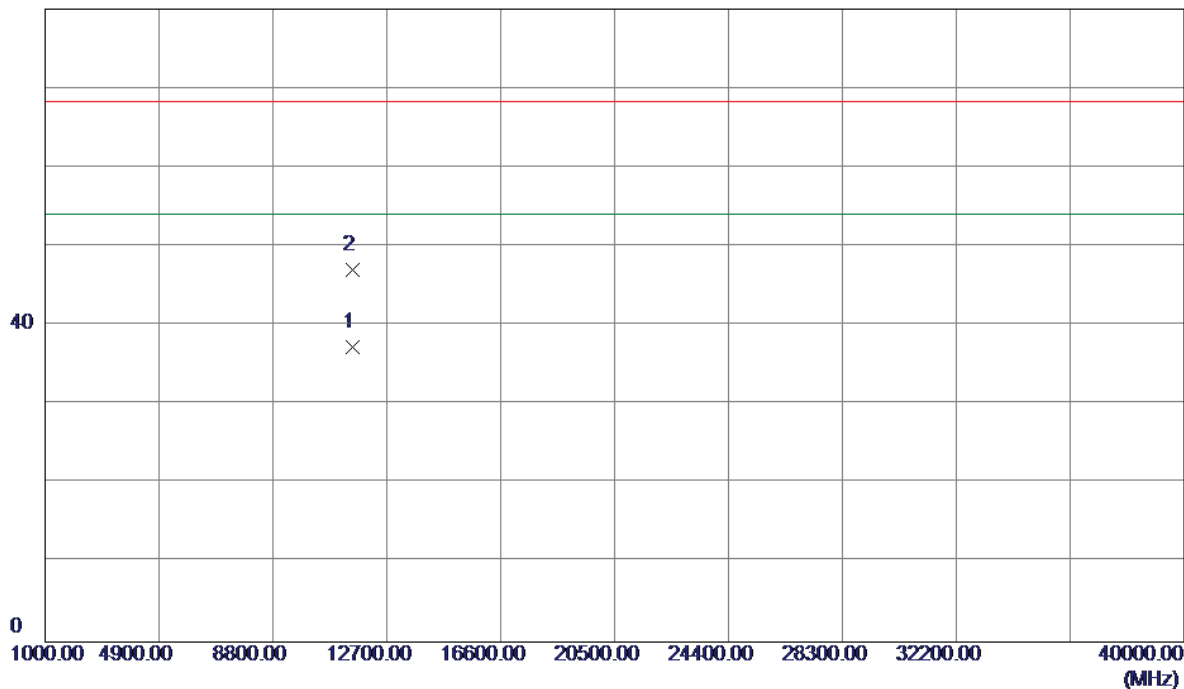

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.0900 | 19.43 | 17.90 | 37.33 | 54.00 | -16.67 | AVG | |
| 2 | 11510.4050 | 29.11 | 17.90 | 47.01 | 68.30 | -21.29 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |

Horizontal

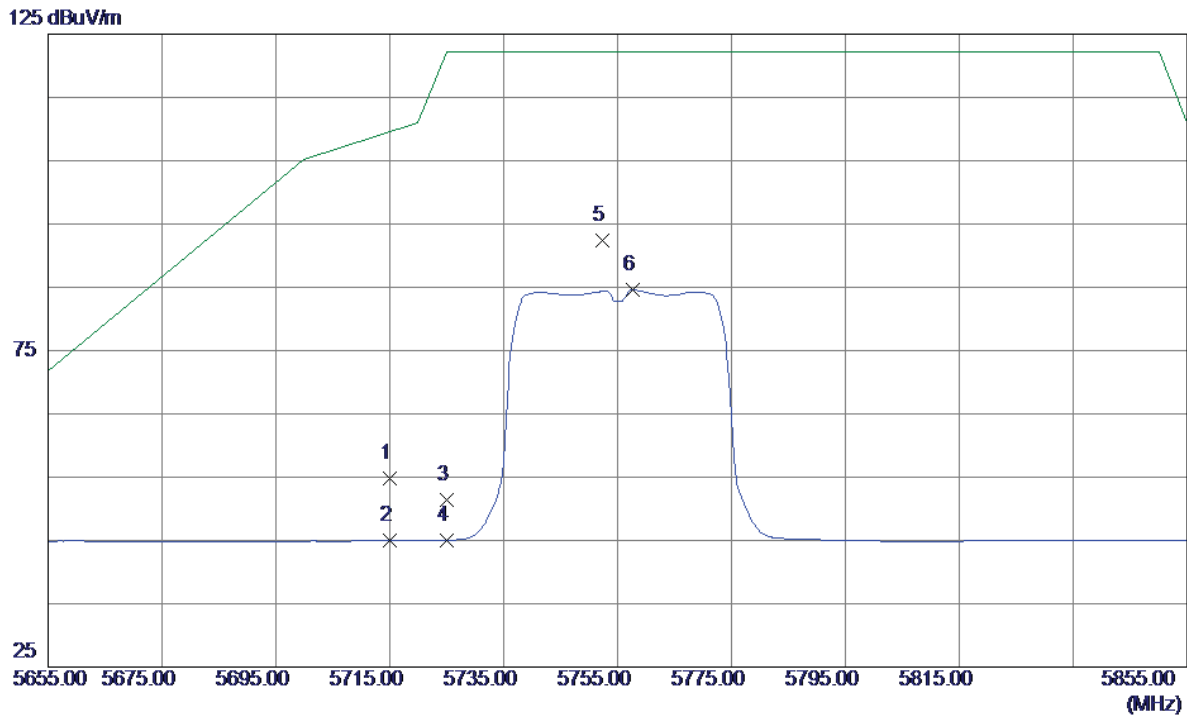


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 12.07 | 42.72 | 54.79 | 109.50 | -54.71 | Peak | |
| 2 | 5715.0000 | 2.33 | 42.72 | 45.05 | 109.50 | -64.45 | AVG | |
| 3 | 5725.0000 | 8.72 | 42.73 | 51.45 | 122.30 | -70.85 | Peak | |
| 4 | 5725.0000 | 2.32 | 42.73 | 45.05 | 122.30 | -77.25 | AVG | |
| 5 * | 5752.4000 | 49.65 | 42.75 | 92.40 | 122.30 | -29.90 | Peak | |
| 6 | 5757.6000 | 41.85 | 42.76 | 84.61 | 122.30 | -37.69 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |

Horizontal


80 dBuV/m

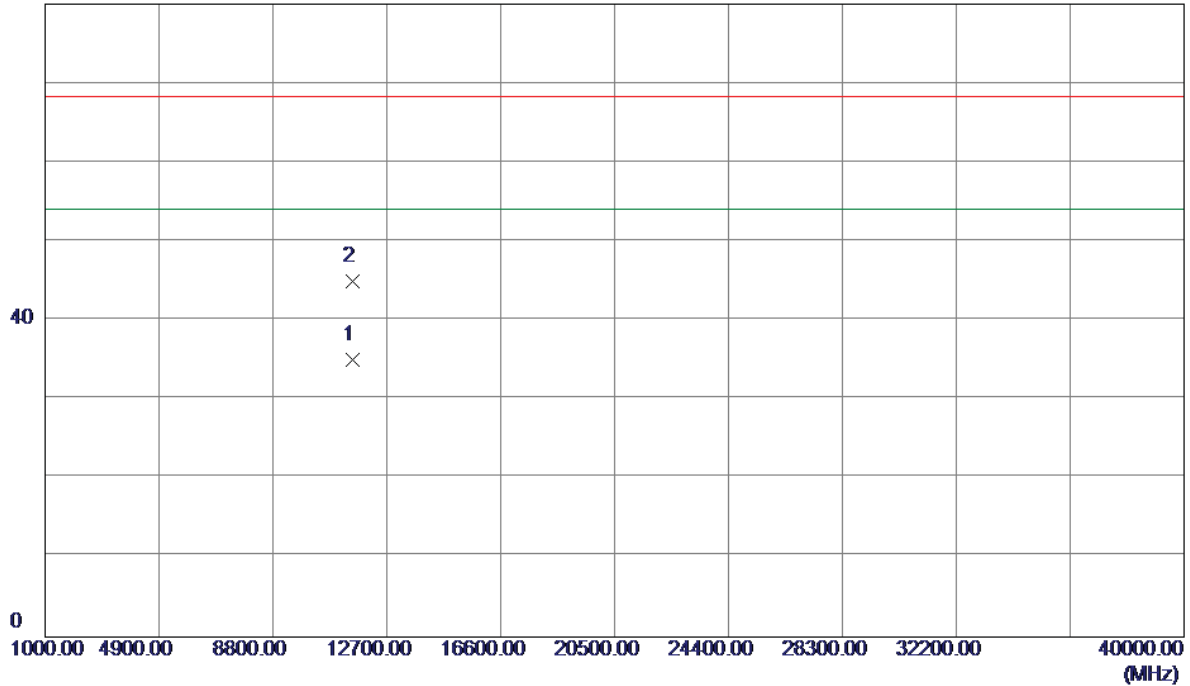

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.1000 | 17.20 | 17.90 | 35.10 | 54.00 | -18.90 | AVG | |
| 2 | 11510.3450 | 26.99 | 17.90 | 44.89 | 68.30 | -23.41 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |

Vertical

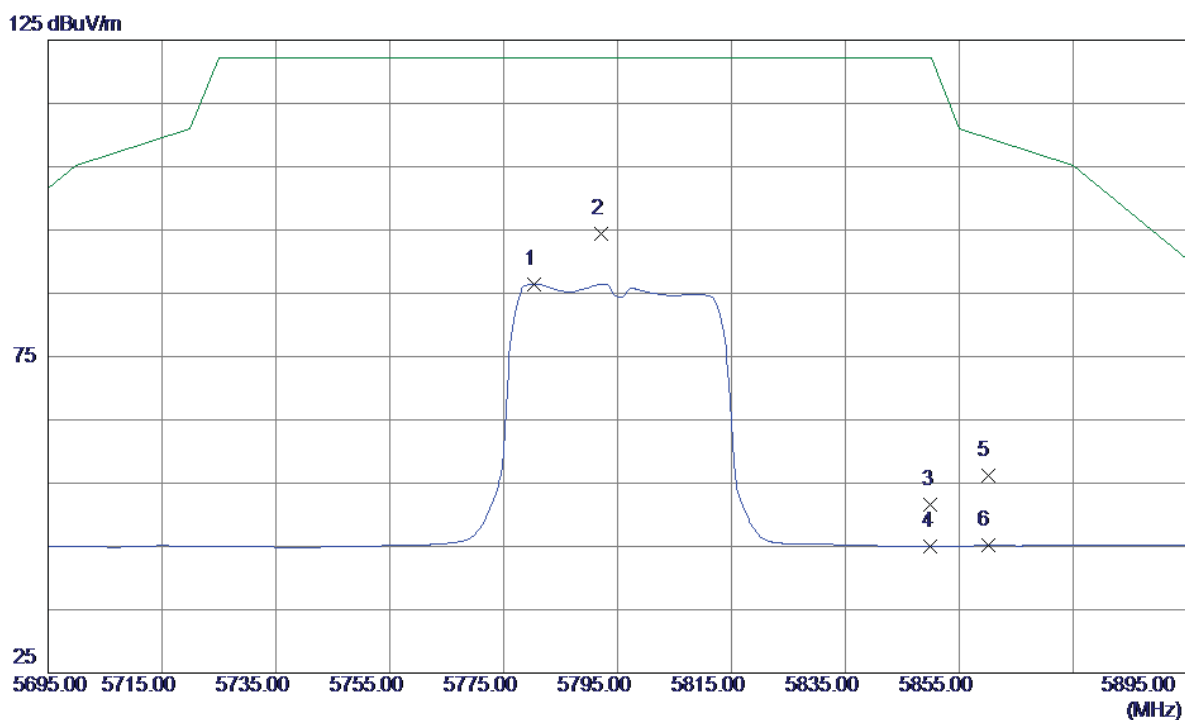


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5780.4000 | 43.70 | 42.78 | 86.48 | 122.30 | -35.82 | AVG | |
| 2 * | 5792.2000 | 51.57 | 42.79 | 94.36 | 122.30 | -27.94 | Peak | |
| 3 | 5850.0000 | 8.78 | 42.84 | 51.62 | 122.30 | -70.68 | Peak | |
| 4 | 5850.0000 | 2.21 | 42.84 | 45.05 | 122.30 | -77.25 | AVG | |
| 5 | 5860.0000 | 13.29 | 42.85 | 56.14 | 109.50 | -53.36 | Peak | |
| 6 | 5860.0000 | 2.29 | 42.85 | 45.14 | 109.50 | -64.36 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |

Vertical


80 dBuV/m

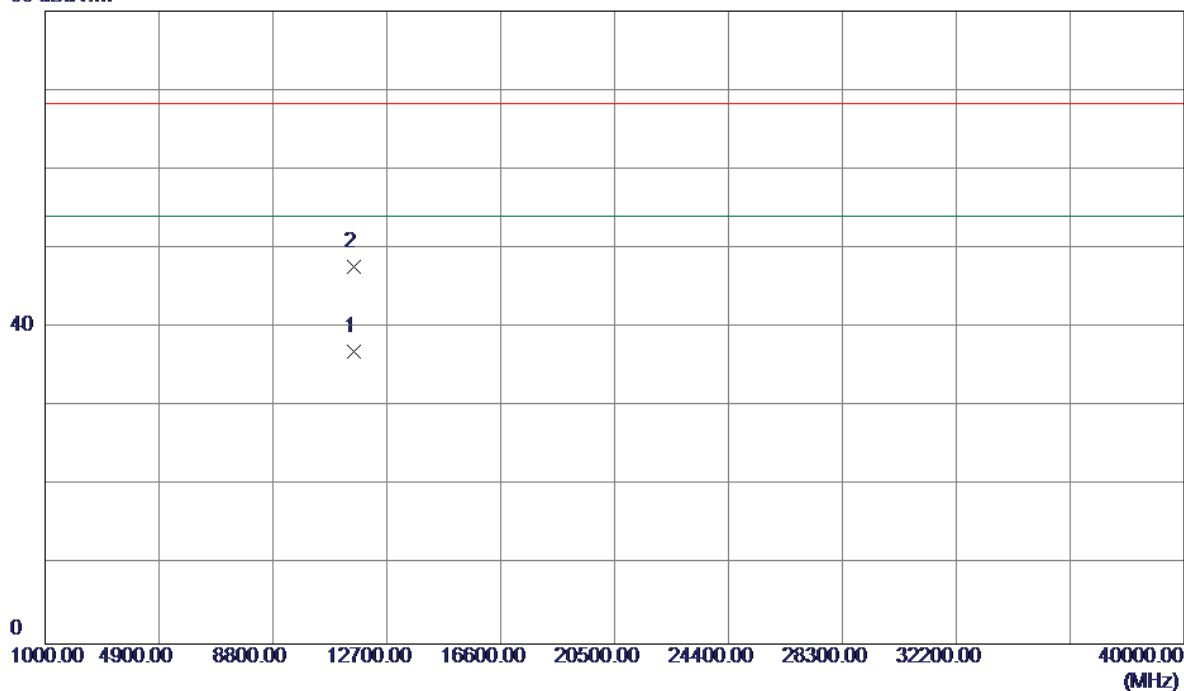

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.3600 | 19.07 | 17.83 | 36.90 | 54.00 | -17.10 | AVG | |
| 2 | 11590.5500 | 29.86 | 17.83 | 47.69 | 68.30 | -20.61 | Peak | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |

Horizontal

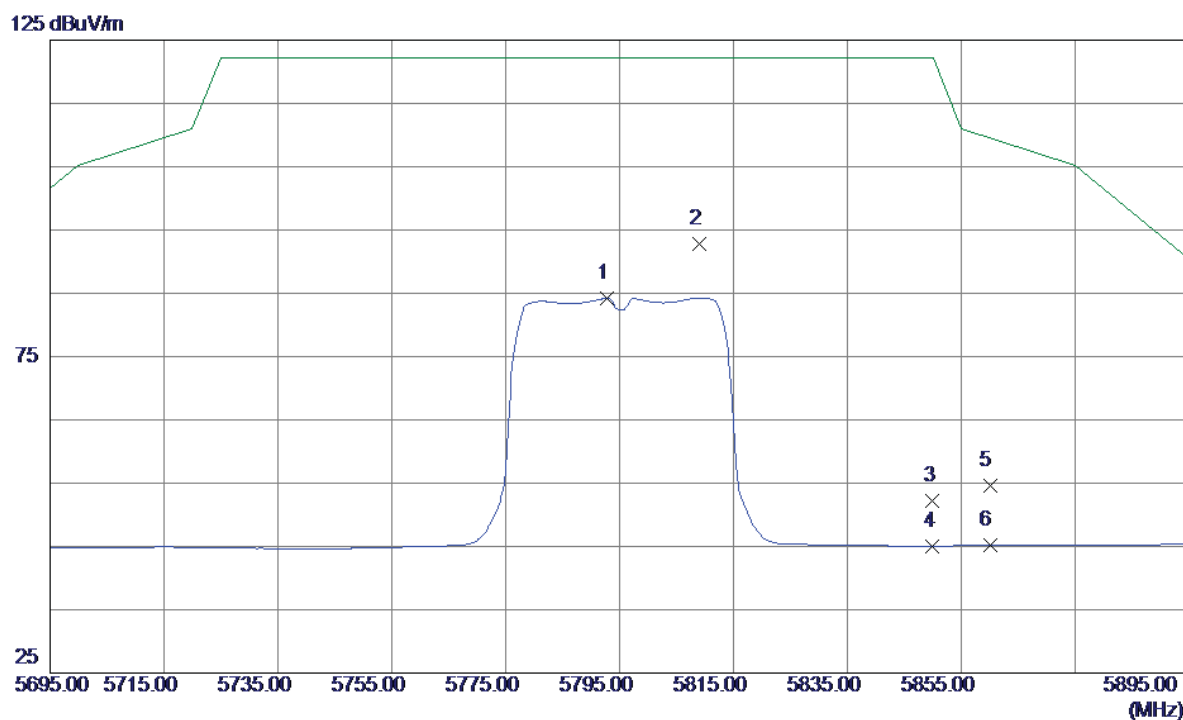


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5792.8000 | 41.41 | 42.79 | 84.20 | 122.30 | -38.10 | AVG | |
| 2 * | 5809.0000 | 49.92 | 42.80 | 92.72 | 122.30 | -29.58 | Peak | |
| 3 | 5850.0000 | 9.39 | 42.84 | 52.23 | 122.30 | -70.07 | Peak | |
| 4 | 5850.0000 | 2.25 | 42.84 | 45.09 | 122.30 | -77.21 | AVG | |
| 5 | 5860.0000 | 11.69 | 42.85 | 54.54 | 109.50 | -54.96 | Peak | |
| 6 | 5860.0000 | 2.34 | 42.85 | 45.19 | 109.50 | -64.31 | AVG | |

| | |
|------------------|----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |

Horizontal


80 dBuV/m

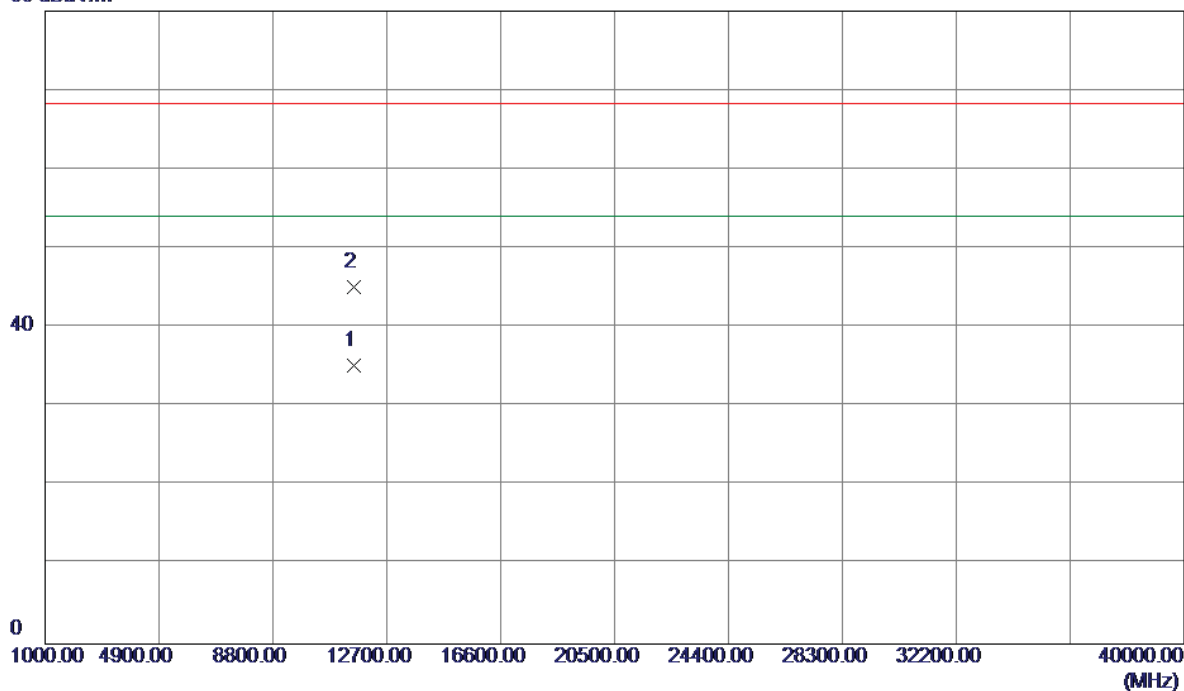

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.1250 | 17.34 | 17.83 | 35.17 | 54.00 | -18.83 | AVG | |
| 2 | 11590.4500 | 27.33 | 17.83 | 45.16 | 68.30 | -23.14 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |

Vertical

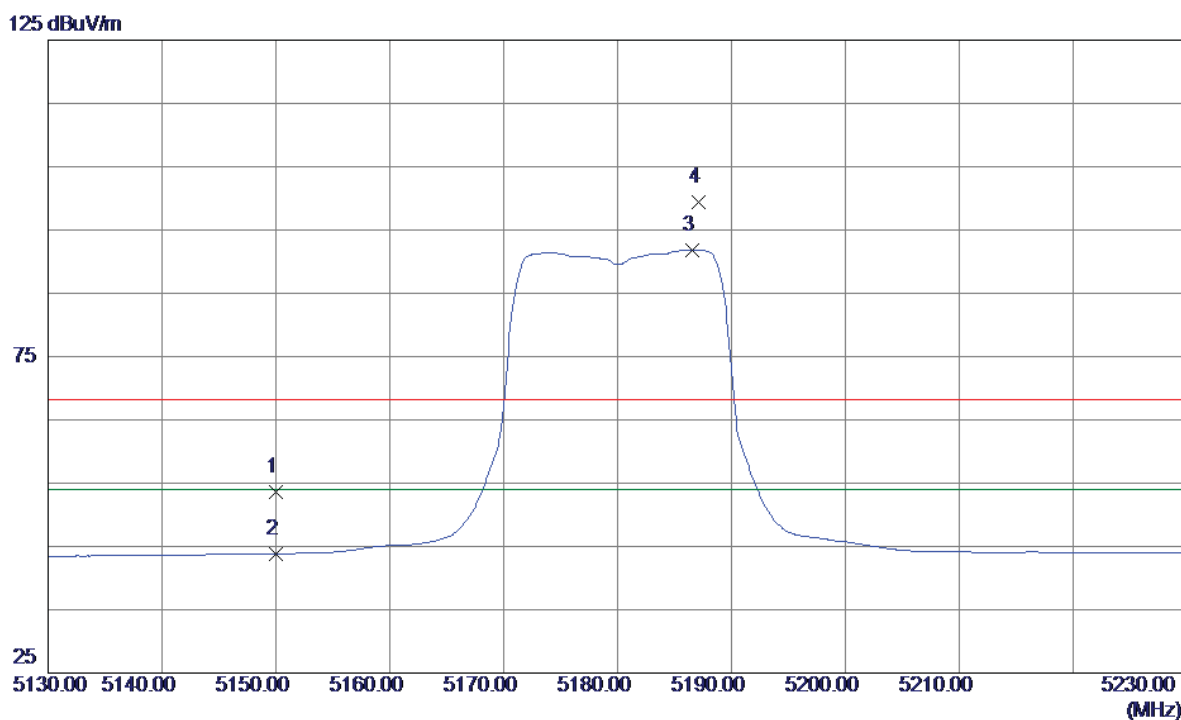


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 12.89 | 40.62 | 53.51 | 68.30 | -14.79 | Peak | |
| 2 | 5150.0000 | 3.19 | 40.62 | 43.81 | 54.00 | -10.19 | AVG | |
| 3 * | 5186.6000 | 51.12 | 40.75 | 91.87 | 54.00 | 37.87 | AVG | No Limit |
| 4 | 5187.1000 | 58.62 | 40.75 | 99.37 | 68.30 | 31.07 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |

Vertical


80 dBuV/m

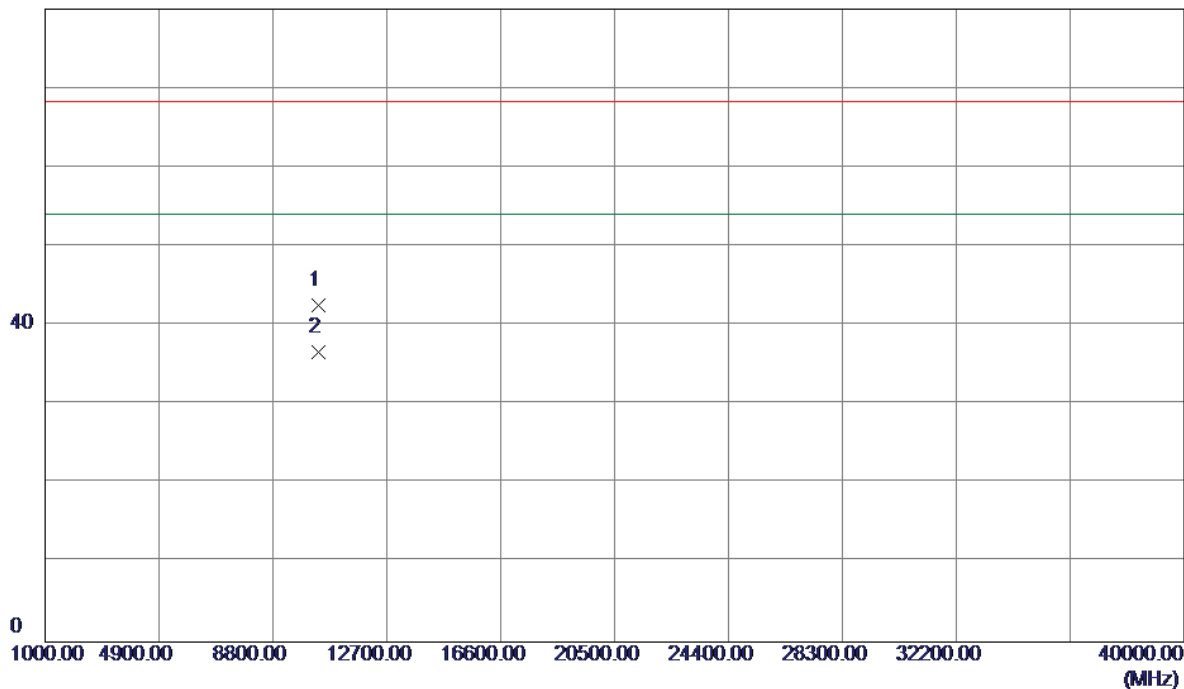

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10360.0500 | 26.15 | 16.36 | 42.51 | 68.30 | -25.79 | Peak | |
| 2 * | 10360.1000 | 20.22 | 16.36 | 36.58 | 54.00 | -17.42 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |

Horizontal

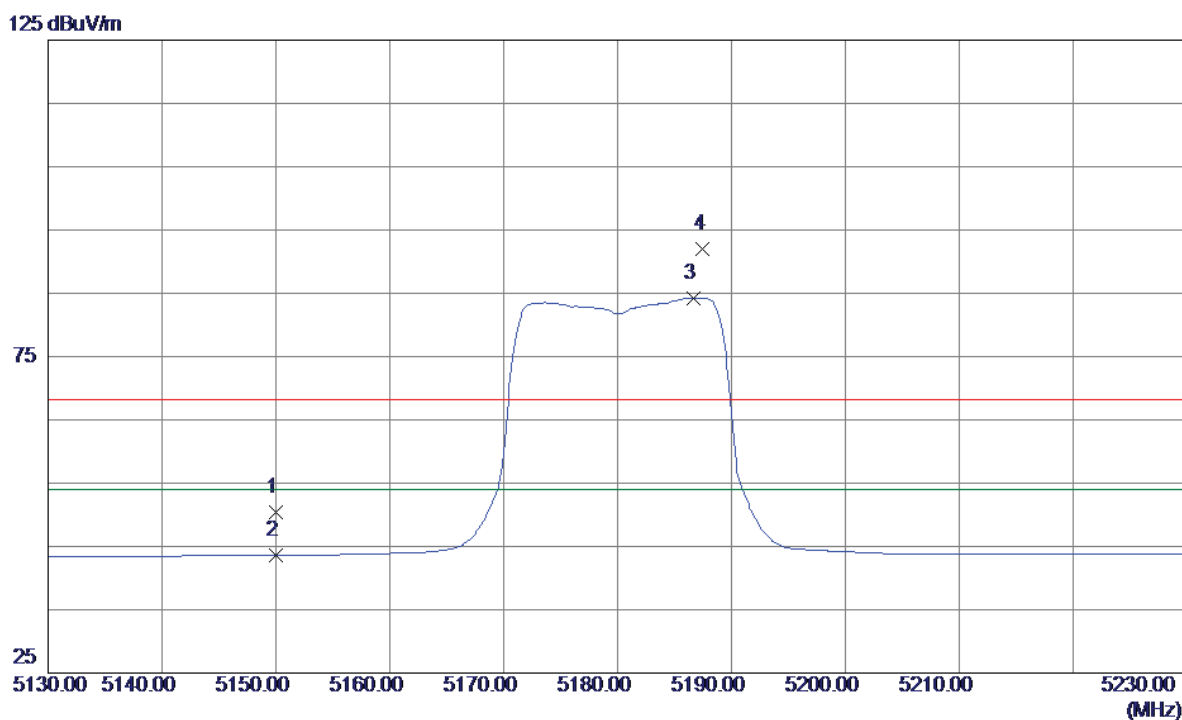


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 9.00 | 41.35 | 50.35 | 68.30 | -17.95 | Peak | |
| 2 | 5150.0000 | 2.28 | 41.35 | 43.63 | 54.00 | -10.37 | AVG | |
| 3 * | 5186.7000 | 42.76 | 41.47 | 84.23 | 54.00 | 30.23 | AVG | No Limit |
| 4 | 5187.5000 | 50.60 | 41.47 | 92.07 | 68.30 | 23.77 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |

Horizontal


80 dBuV/m

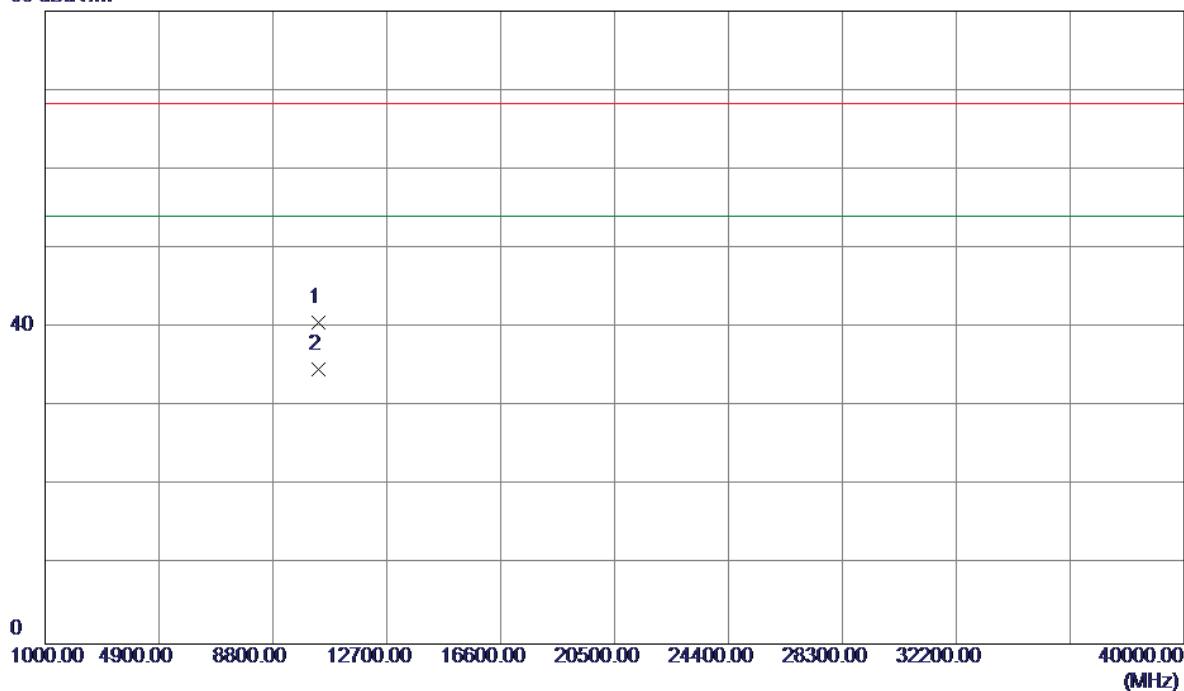

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10360.1250 | 24.25 | 16.36 | 40.61 | 68.30 | -27.69 | Peak | |
| 2 * | 10360.3350 | 18.33 | 16.36 | 34.69 | 54.00 | -19.31 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5200MHz |

Vertical

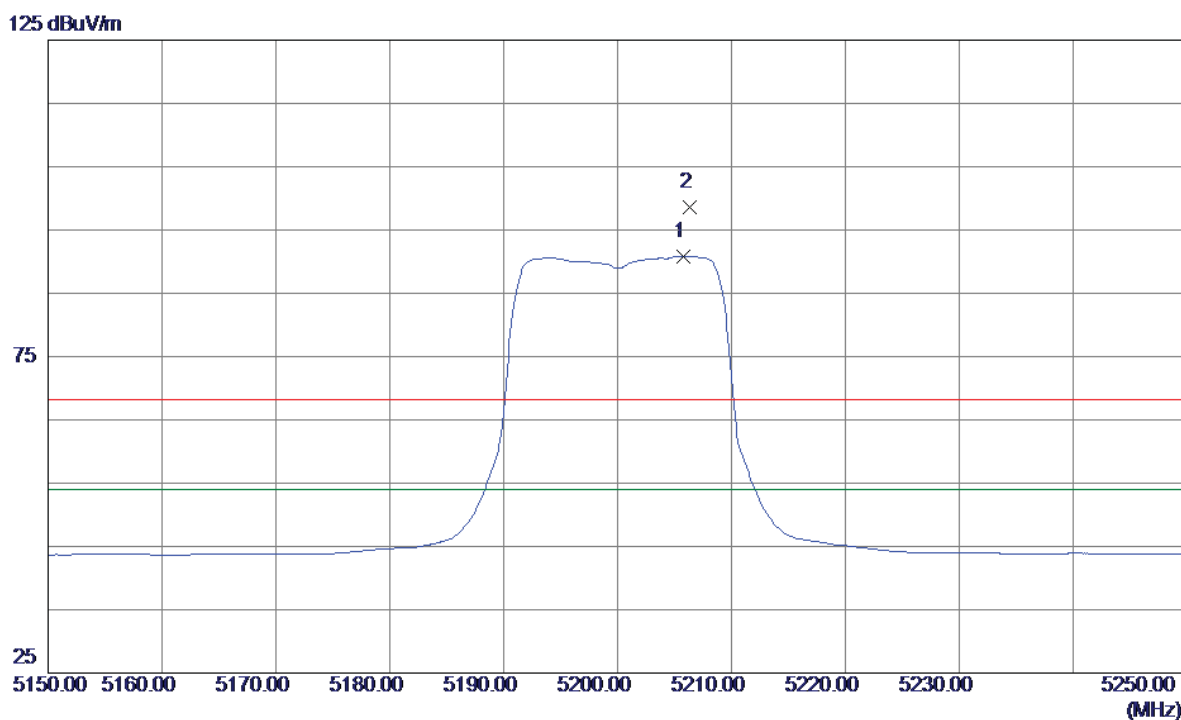


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5205.8000 | 50.04 | 40.81 | 90.85 | 54.00 | 36.85 | AVG | No Limit |
| 2 | 5206.3000 | 57.85 | 40.81 | 98.66 | 68.30 | 30.36 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5200MHz |

Vertical


80 dBuV/m

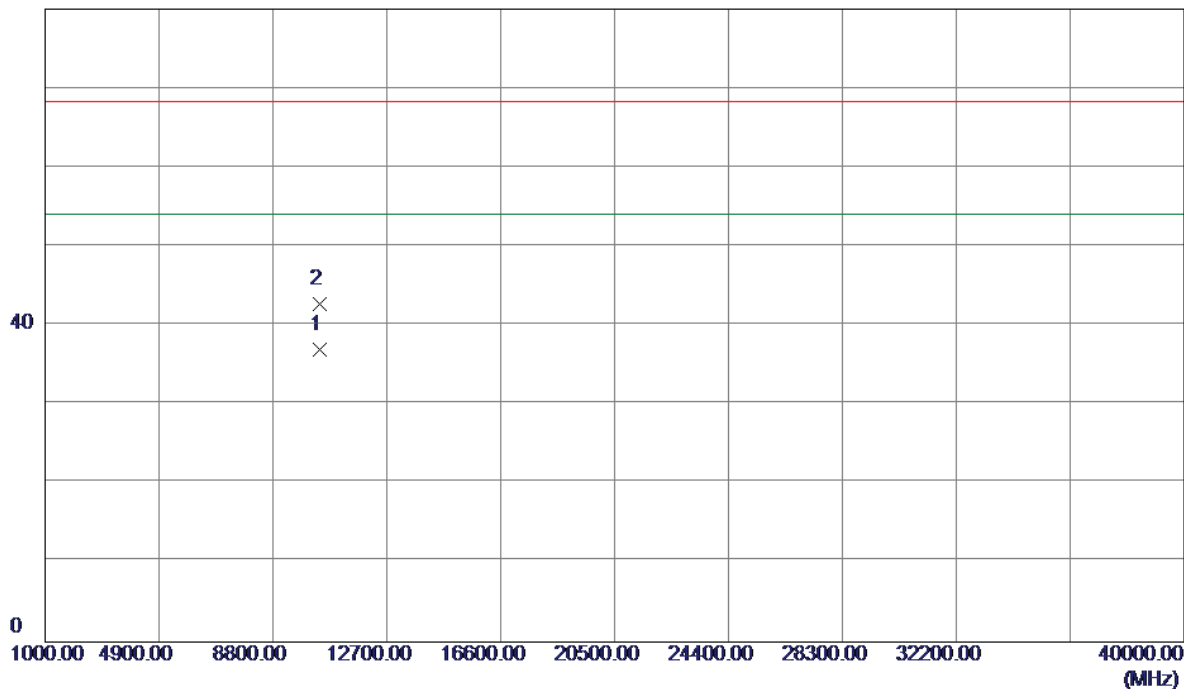

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.3250 | 20.53 | 16.45 | 36.98 | 54.00 | -17.02 | AVG | |
| 2 | 10400.7850 | 26.31 | 16.45 | 42.76 | 68.30 | -25.54 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5200MHz |

Horizontal

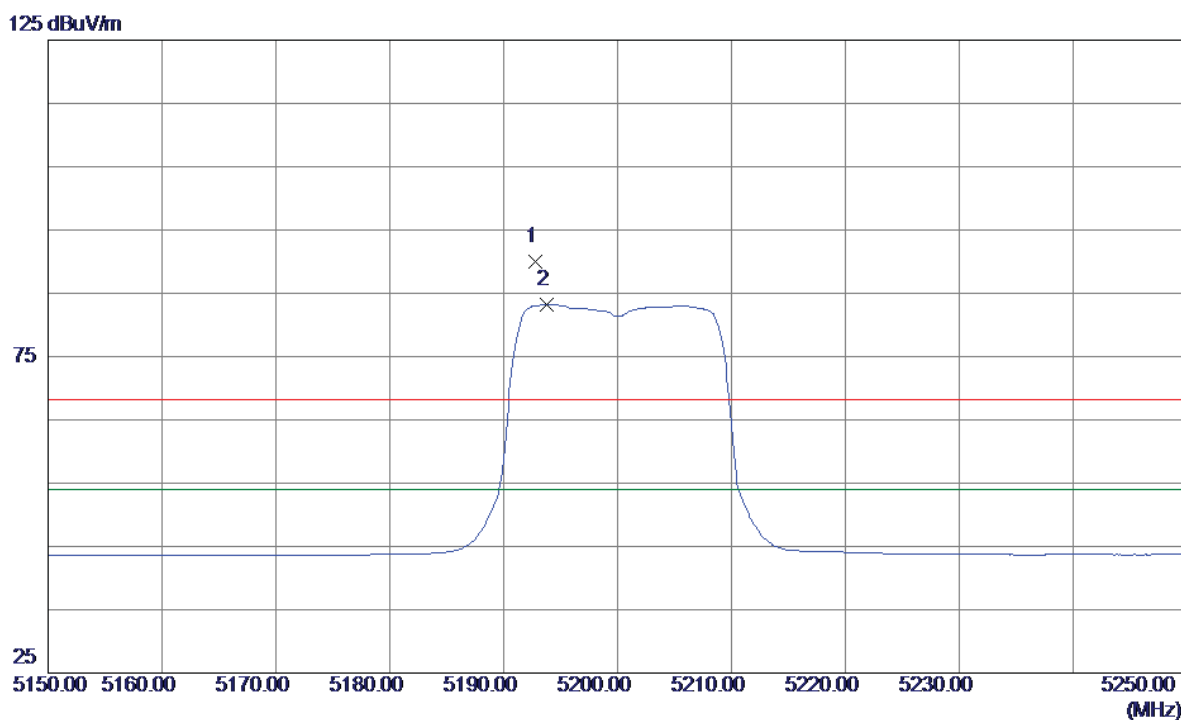


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5192.8000 | 48.61 | 41.49 | 90.10 | 68.30 | 21.80 | Peak | No Limit |
| 2 * | 5193.8000 | 41.73 | 41.49 | 83.22 | 54.00 | 29.22 | AVG | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5200MHz |

Horizontal


80 dBuV/m

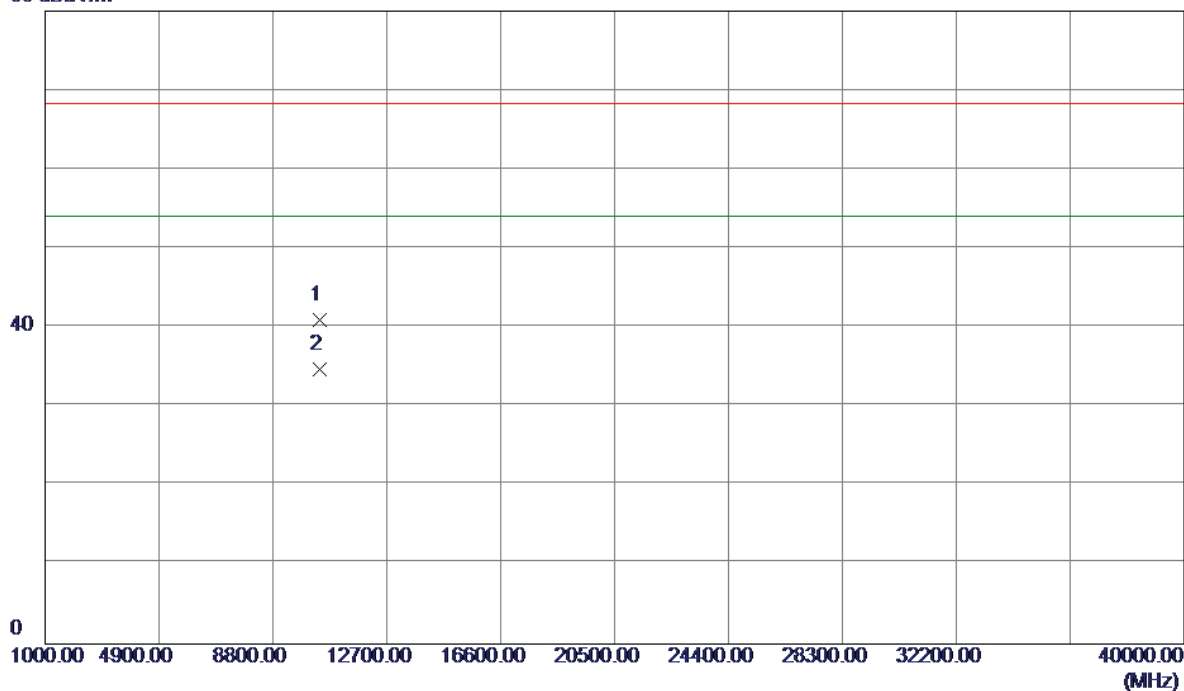

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10400.1250 | 24.53 | 16.45 | 40.98 | 68.30 | -27.32 | Peak | |
| 2 * | 10400.2550 | 18.32 | 16.45 | 34.77 | 54.00 | -19.23 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |

Vertical

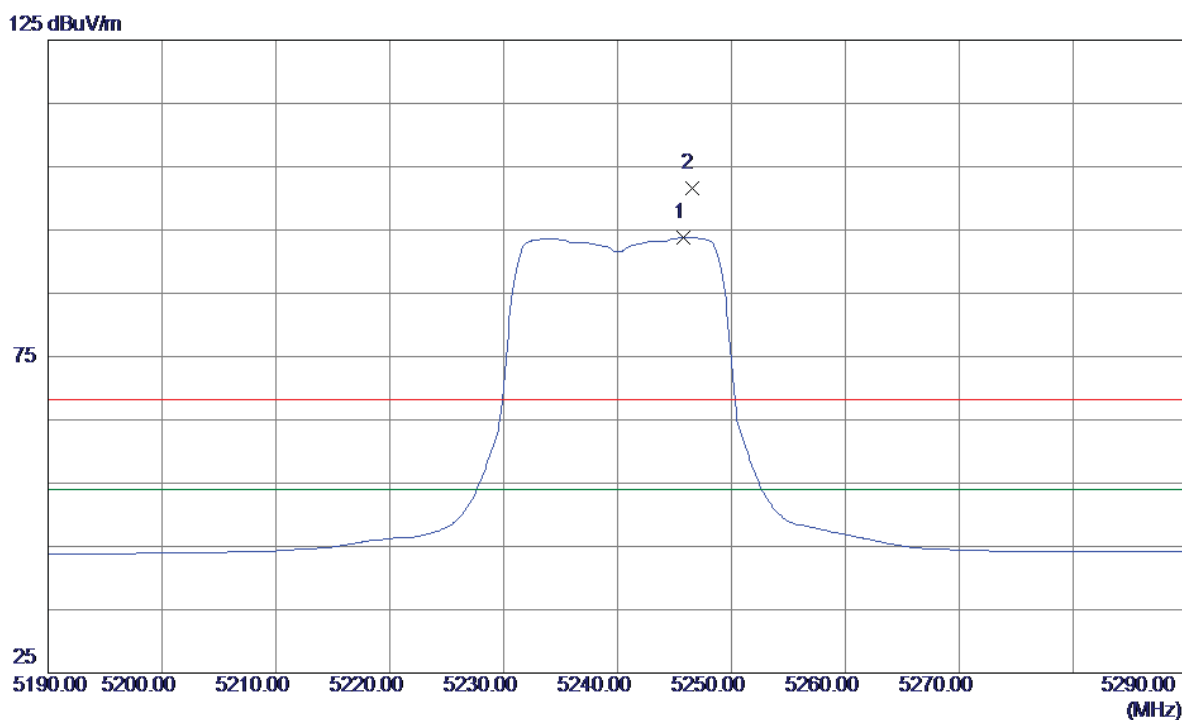


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5245.8000 | 52.92 | 40.94 | 93.86 | 54.00 | 39.86 | AVG | No Limit |
| 2 | 5246.5000 | 60.72 | 40.94 | 101.66 | 68.30 | 33.36 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |

Vertical


80 dBuV/m

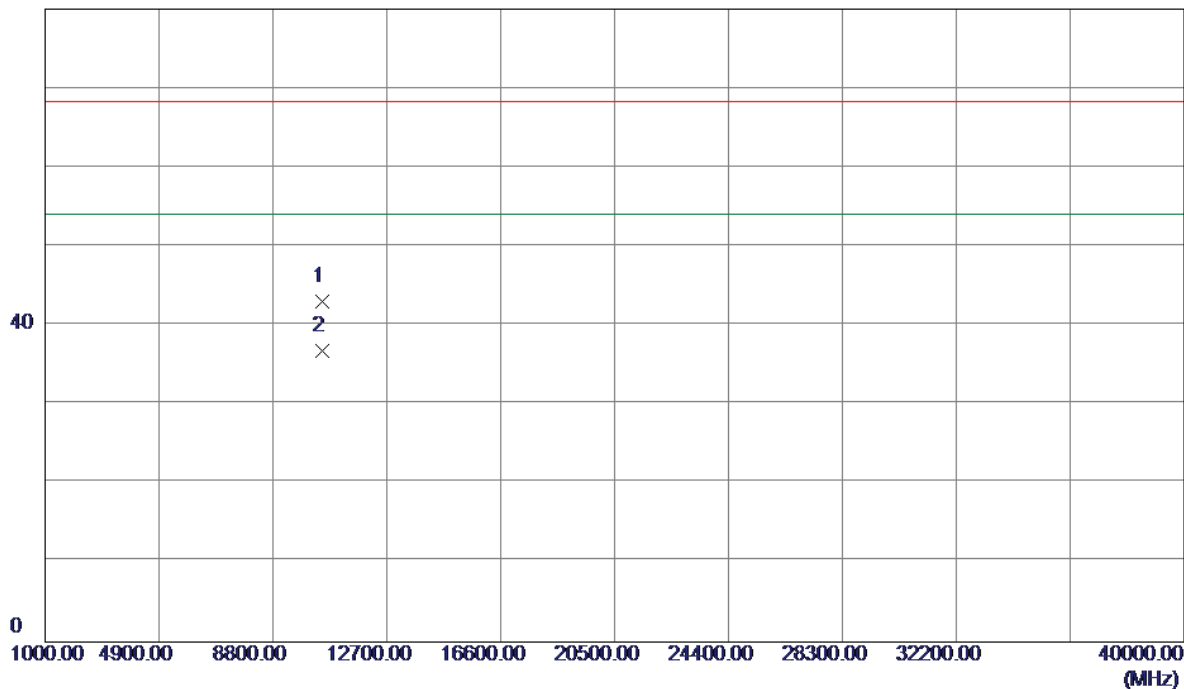

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10480.0900 | 26.36 | 16.63 | 42.99 | 68.30 | -25.31 | Peak | |
| 2 * | 10480.0950 | 20.19 | 16.63 | 36.82 | 54.00 | -17.18 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |

Horizontal

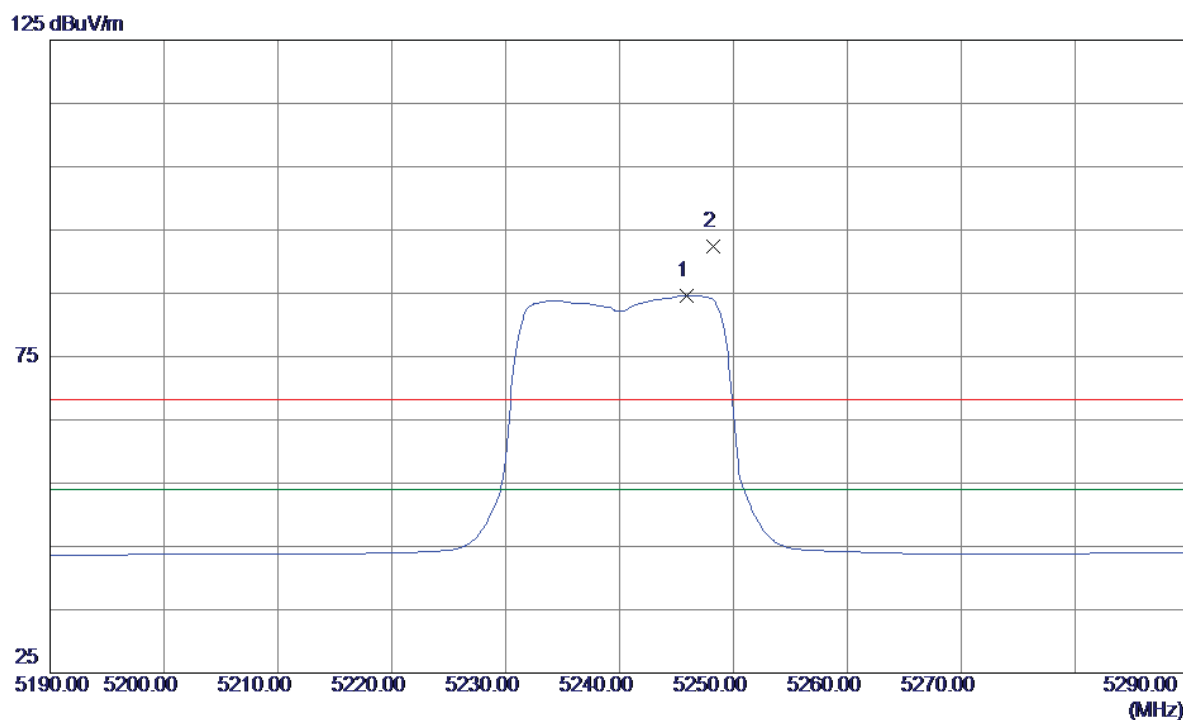


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5245.9000 | 43.02 | 41.67 | 84.69 | 54.00 | 30.69 | AVG | No Limit |
| 2 | 5248.2000 | 50.68 | 41.68 | 92.36 | 68.30 | 24.06 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |

Horizontal

80 dBuV/m

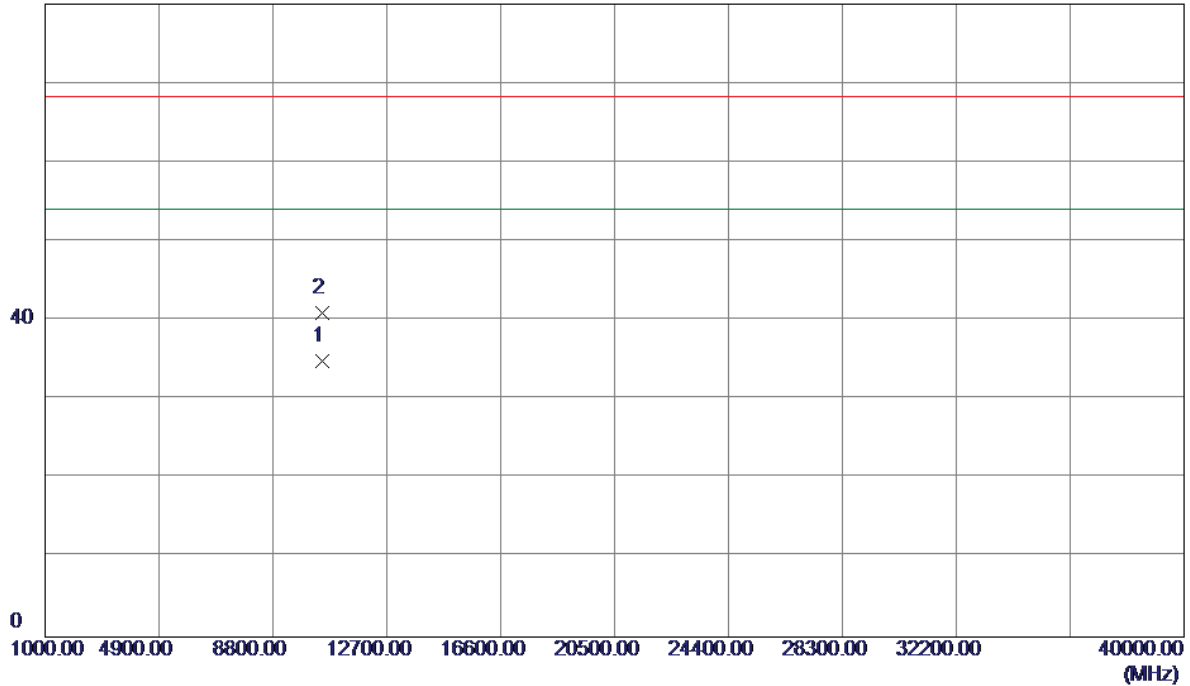


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.1000 | 18.22 | 16.63 | 34.85 | 54.00 | -19.15 | AVG | |
| 2 | 10480.1250 | 24.33 | 16.63 | 40.96 | 68.30 | -27.34 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |

Vertical

125 dBuV/m

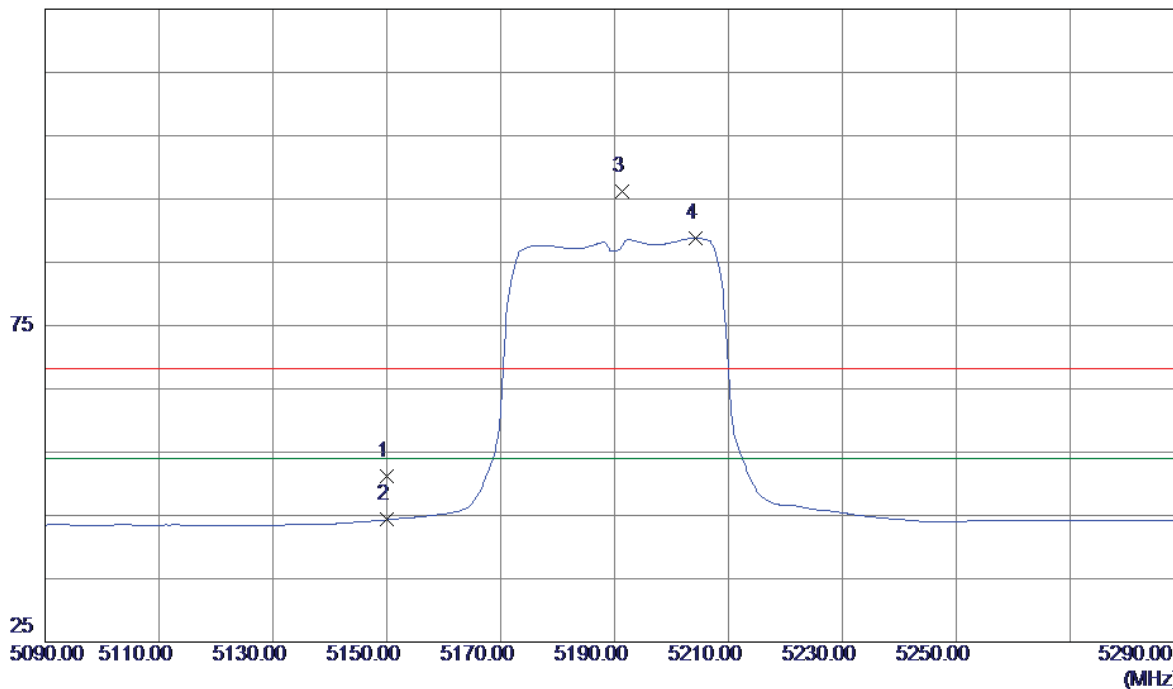


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 10.60 | 40.62 | 51.22 | 68.30 | -17.08 | Peak | |
| 2 | 5150.0000 | 3.70 | 40.62 | 44.32 | 54.00 | -9.68 | AVG | |
| 3 | 5191.4000 | 55.45 | 40.76 | 96.21 | 68.30 | 27.91 | Peak | No Limit |
| 4 * | 5204.2000 | 47.99 | 40.80 | 88.79 | 54.00 | 34.79 | AVG | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |

Vertical


80 dBuV/m

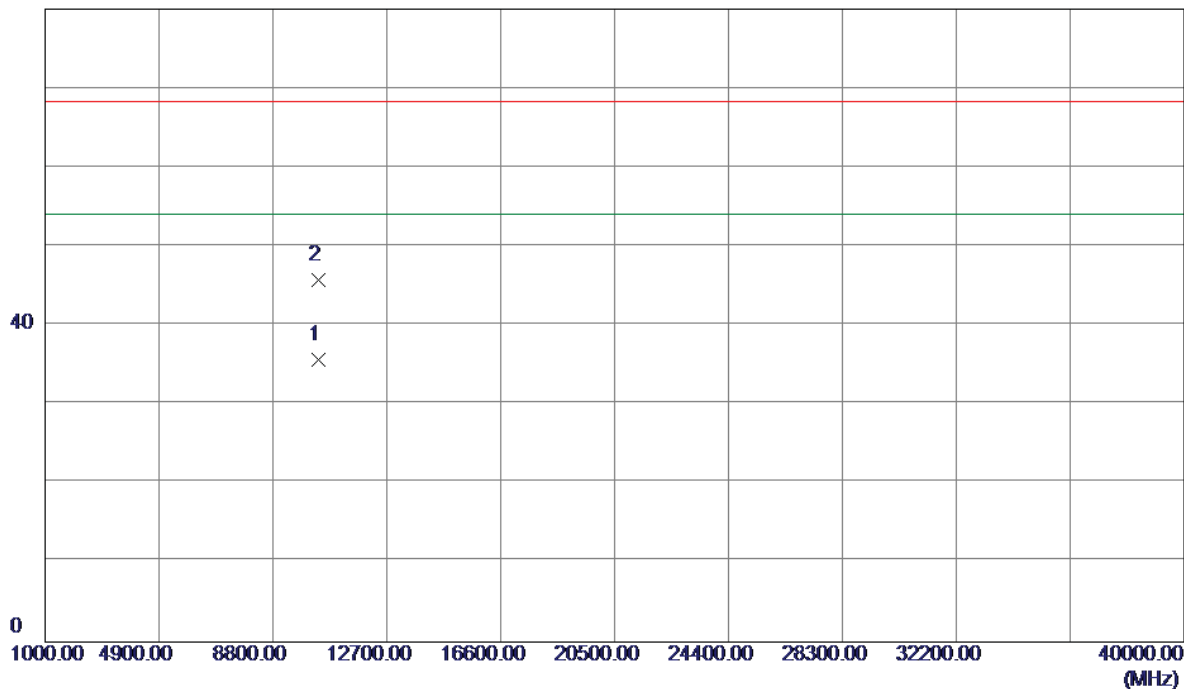

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.1250 | 19.21 | 16.40 | 35.61 | 54.00 | -18.39 | AVG | |
| 2 | 10380.4450 | 29.33 | 16.40 | 45.73 | 68.30 | -22.57 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |

Horizontal

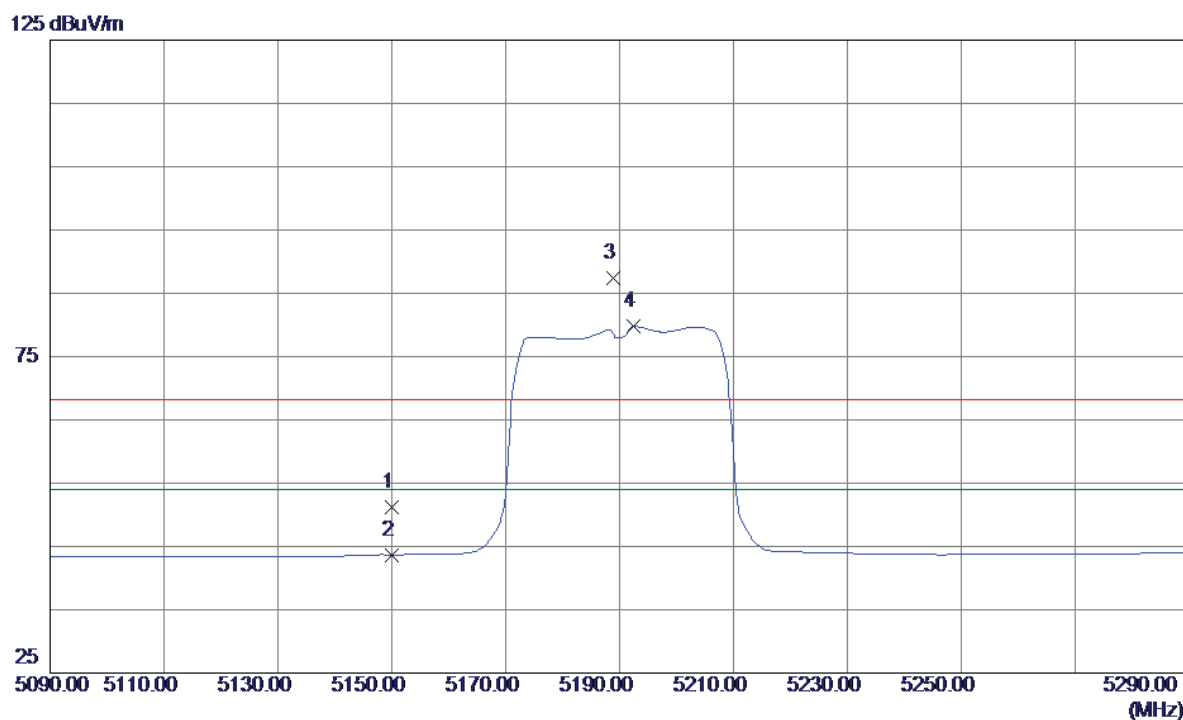


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 9.86 | 41.35 | 51.21 | 68.30 | -17.09 | Peak | |
| 2 | 5150.0000 | 2.33 | 41.35 | 43.68 | 54.00 | -10.32 | AVG | |
| 3 | 5188.8000 | 45.89 | 41.48 | 87.37 | 68.30 | 19.07 | Peak | No Limit |
| 4 * | 5192.4000 | 38.33 | 41.49 | 79.82 | 54.00 | 25.82 | AVG | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |

Horizontal


80 dBuV/m

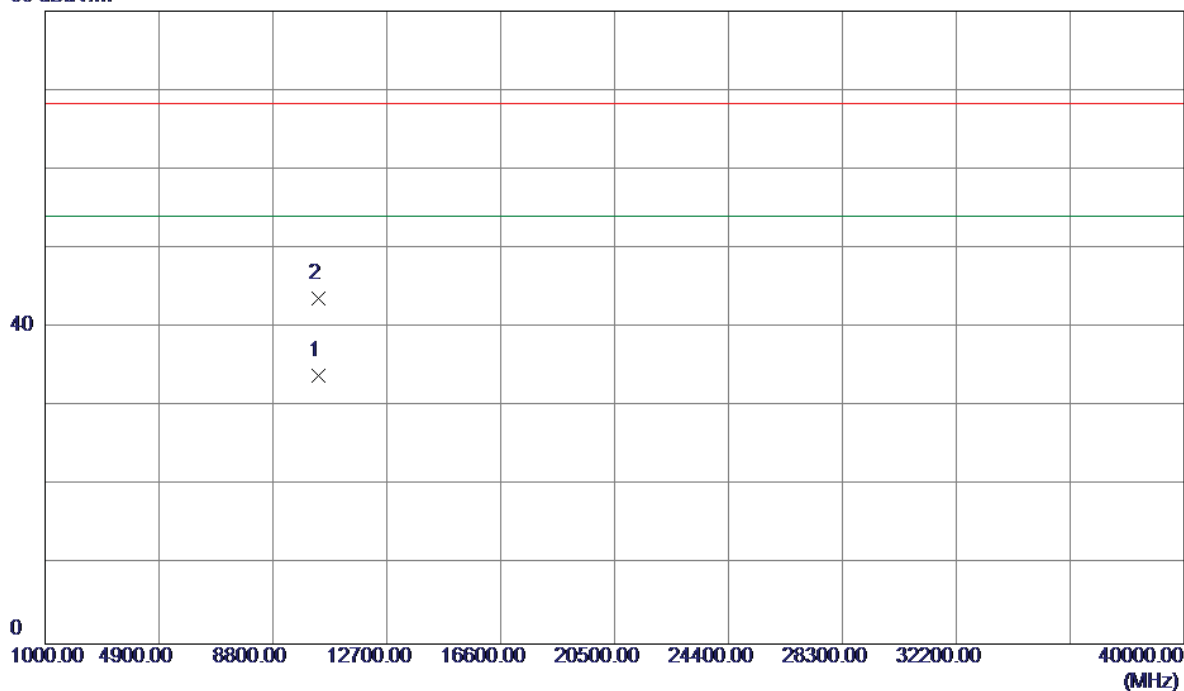

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.2250 | 17.58 | 16.40 | 33.98 | 54.00 | -20.02 | AVG | |
| 2 | 10380.8949 | 27.32 | 16.41 | 43.73 | 68.30 | -24.57 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |

Vertical

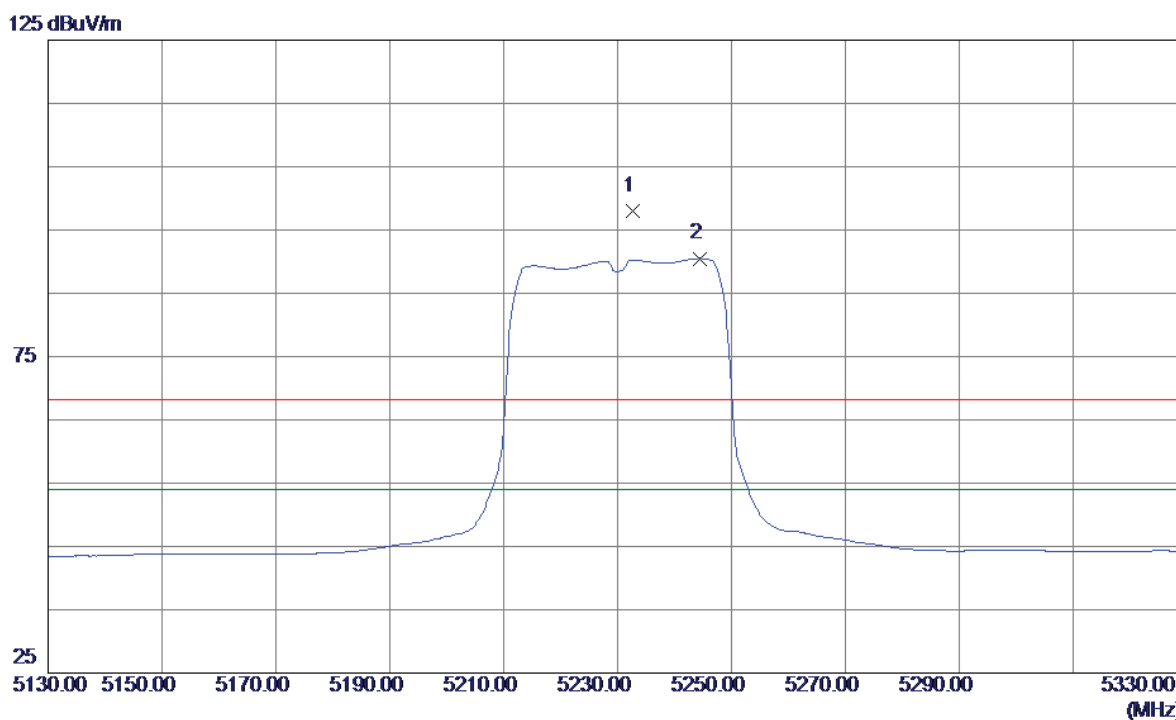


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5232.6000 | 57.13 | 40.90 | 98.03 | 68.30 | 29.73 | Peak | No Limit |
| 2 * | 5244.4000 | 49.56 | 40.94 | 90.50 | 54.00 | 36.50 | AVG | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |

Vertical


80 dBuV/m

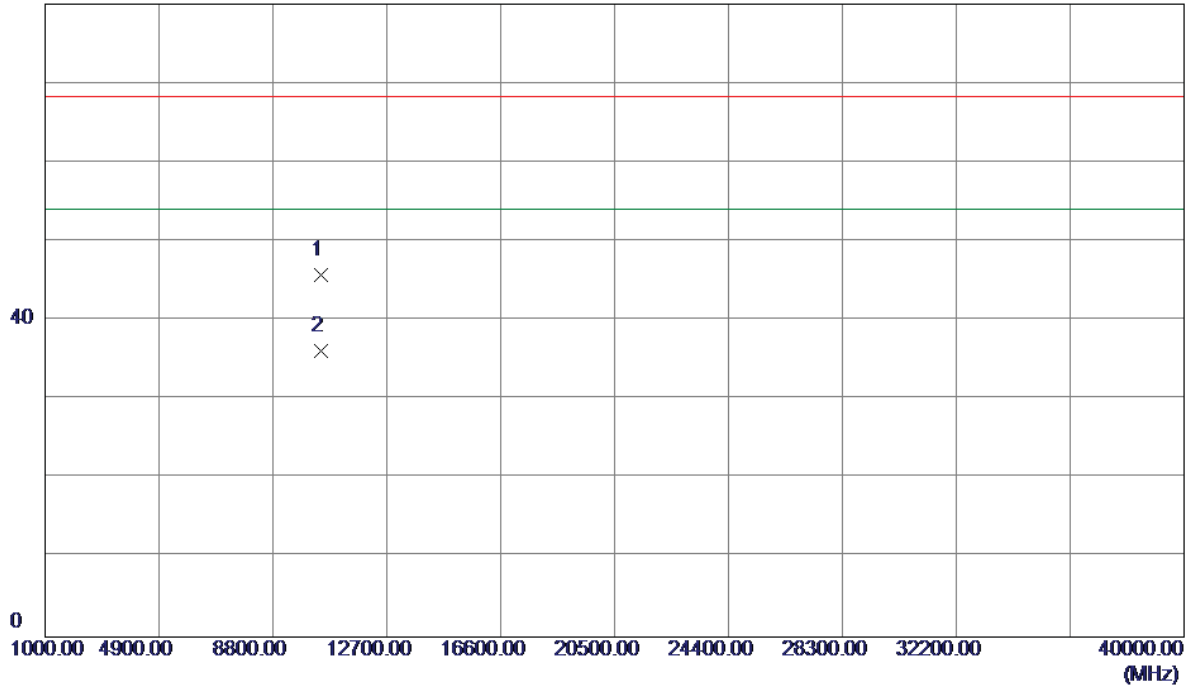

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10459.9450 | 29.19 | 16.58 | 45.77 | 68.30 | -22.53 | Peak | |
| 2 * | 10460.2050 | 19.65 | 16.58 | 36.23 | 54.00 | -17.77 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |

Horizontal

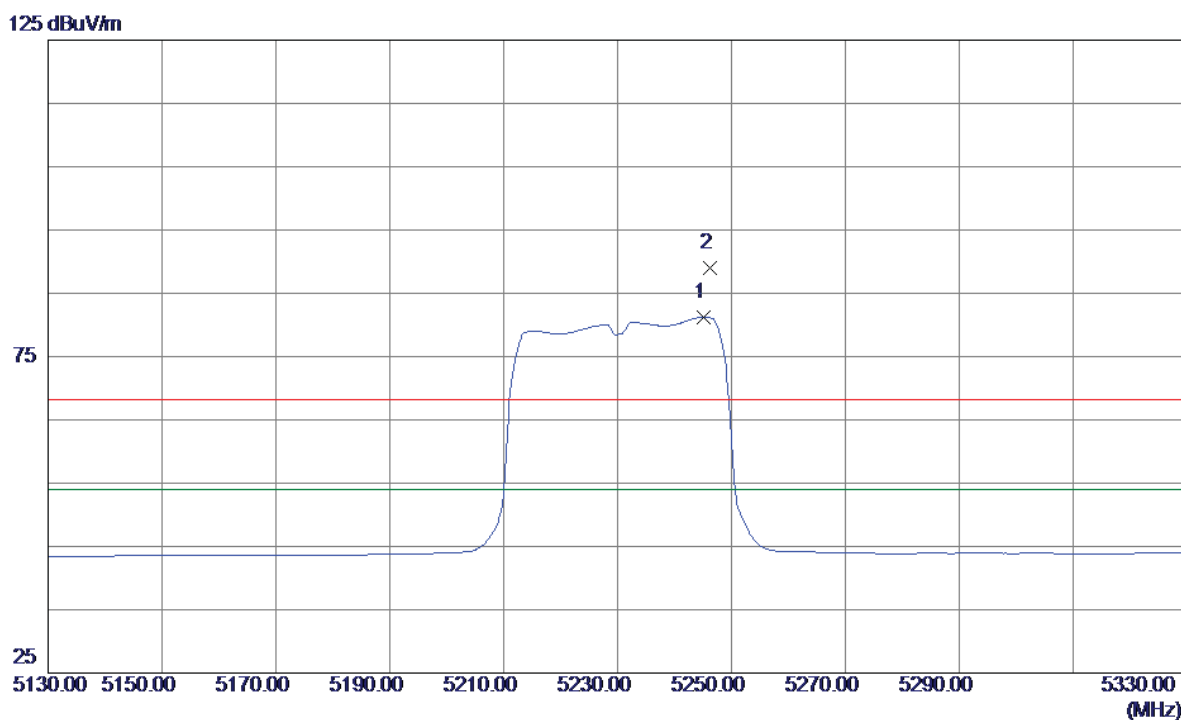


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5245.2000 | 39.55 | 41.67 | 81.22 | 54.00 | 27.22 | AVG | No Limit |
| 2 | 5246.2000 | 47.29 | 41.67 | 88.96 | 68.30 | 20.66 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |

Horizontal

80 dBuV/m

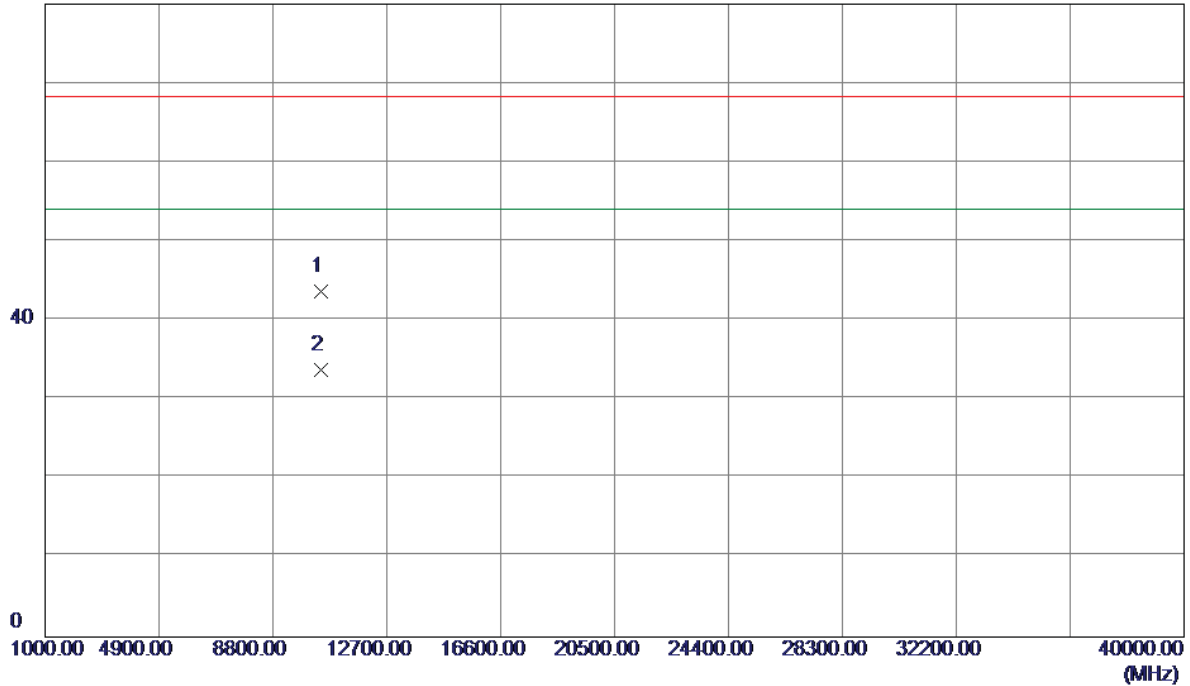


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10459.9850 | 27.10 | 16.58 | 43.68 | 68.30 | -24.62 | Peak | |
| 2 * | 10460.2350 | 17.22 | 16.58 | 33.80 | 54.00 | -20.20 | AVG | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC80 Mode 5210MHz |

Vertical

125 dBuV/m

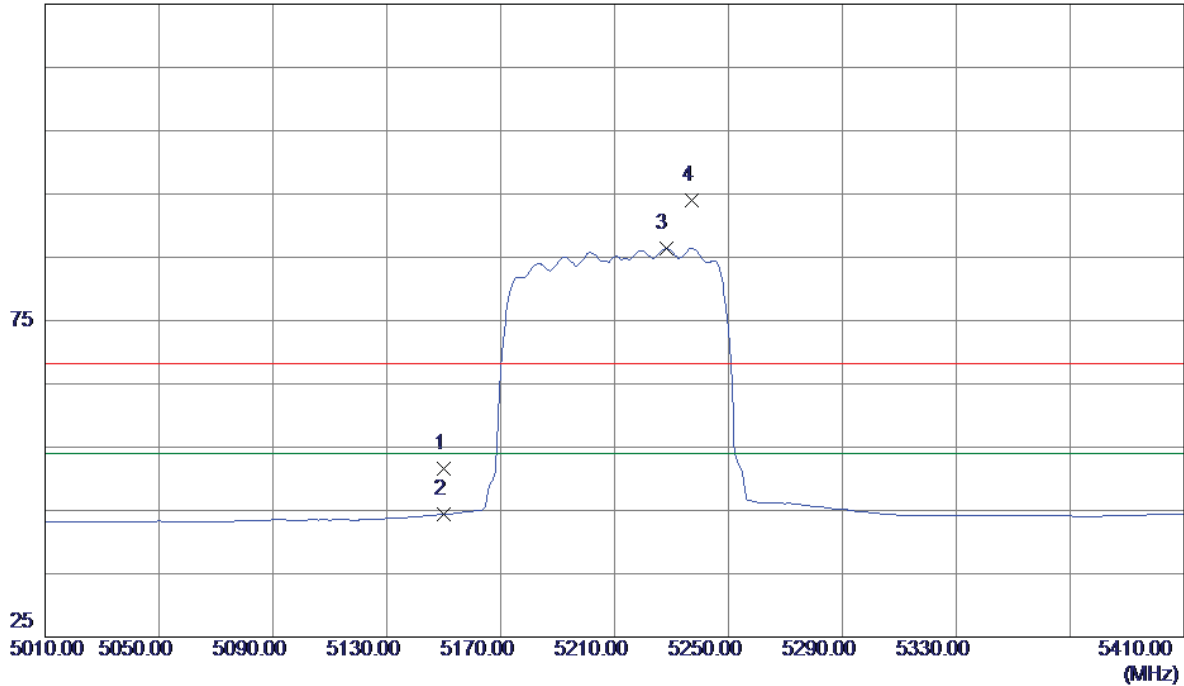


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 11.05 | 40.62 | 51.67 | 68.30 | -16.63 | Peak | |
| 2 | 5150.0000 | 3.77 | 40.62 | 44.39 | 54.00 | -9.61 | AVG | |
| 3 * | 5228.0000 | 45.54 | 40.88 | 86.42 | 54.00 | 32.42 | AVG | No Limit |
| 4 | 5237.2000 | 53.16 | 40.91 | 94.07 | 68.30 | 25.77 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC80 Mode 5210MHz |

Vertical


80 dBuV/m

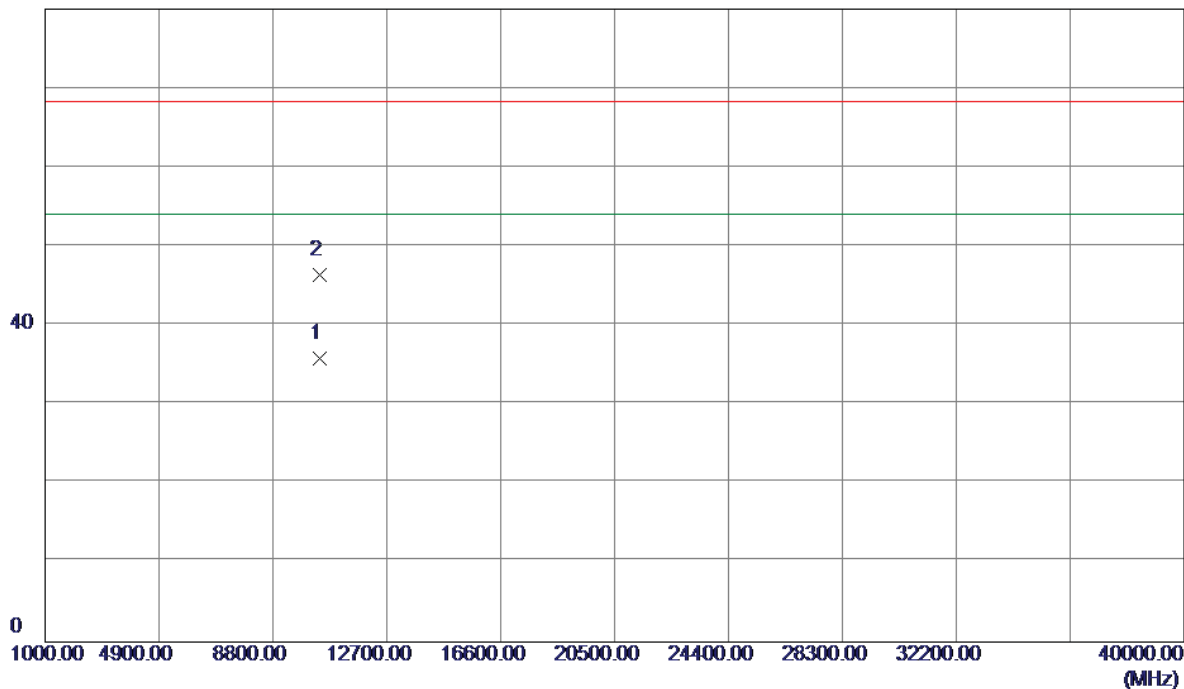

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.1500 | 19.33 | 16.49 | 35.82 | 54.00 | -18.18 | AVG | |
| 2 | 10422.1650 | 29.95 | 16.50 | 46.45 | 68.30 | -21.85 | Peak | |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC80 Mode 5210MHz |

Horizontal

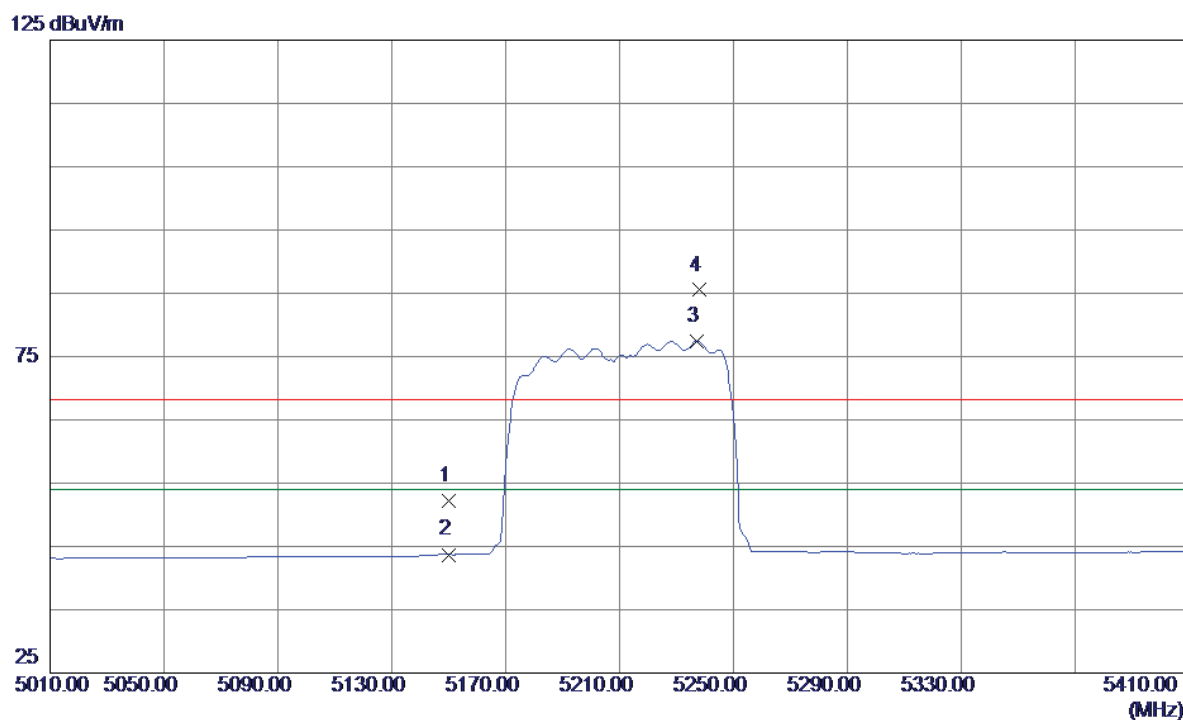


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5150.0000 | 10.82 | 41.35 | 52.17 | 68.30 | -16.13 | Peak | |
| 2 | 5150.0000 | 2.35 | 41.35 | 43.70 | 54.00 | -10.30 | AVG | |
| 3 * | 5237.2000 | 35.79 | 41.64 | 77.43 | 54.00 | 23.43 | AVG | No Limit |
| 4 | 5238.0000 | 43.86 | 41.64 | 85.50 | 68.30 | 17.20 | Peak | No Limit |

| | |
|------------------|------------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC80 Mode 5210MHz |

Horizontal

80 dBuV/m

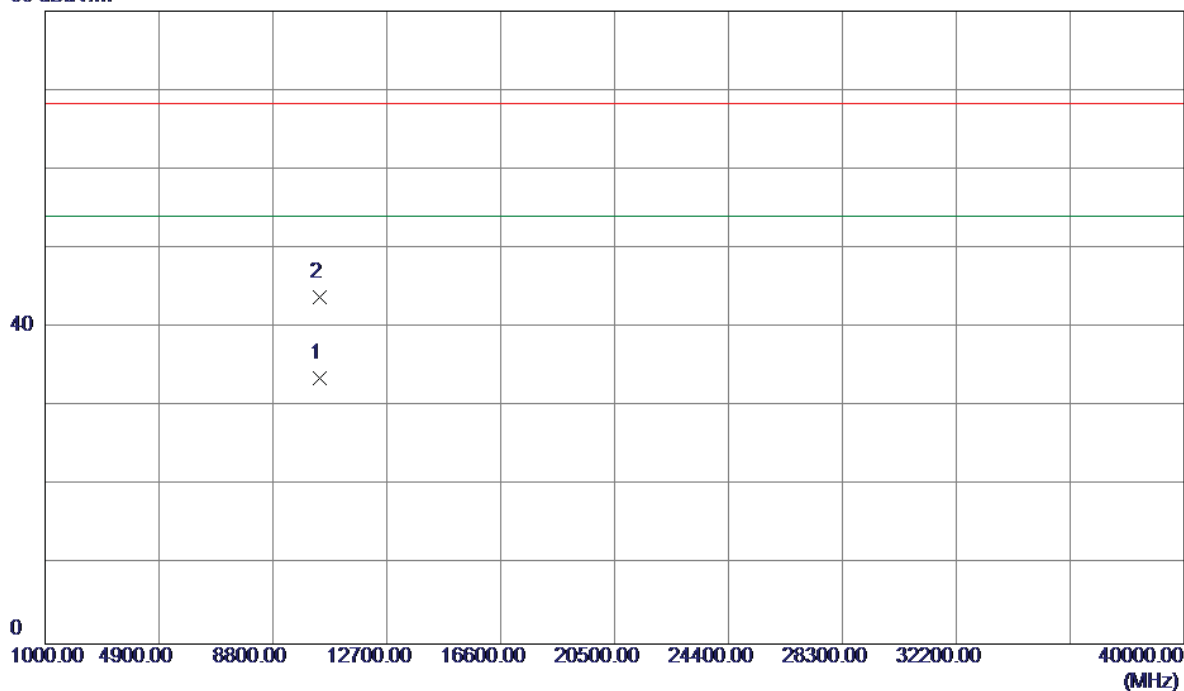


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.2500 | 17.11 | 16.49 | 33.60 | 54.00 | -20.40 | AVG | |
| 2 | 10422.4500 | 27.32 | 16.50 | 43.82 | 68.30 | -24.48 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Vertical

125 dBuV/m

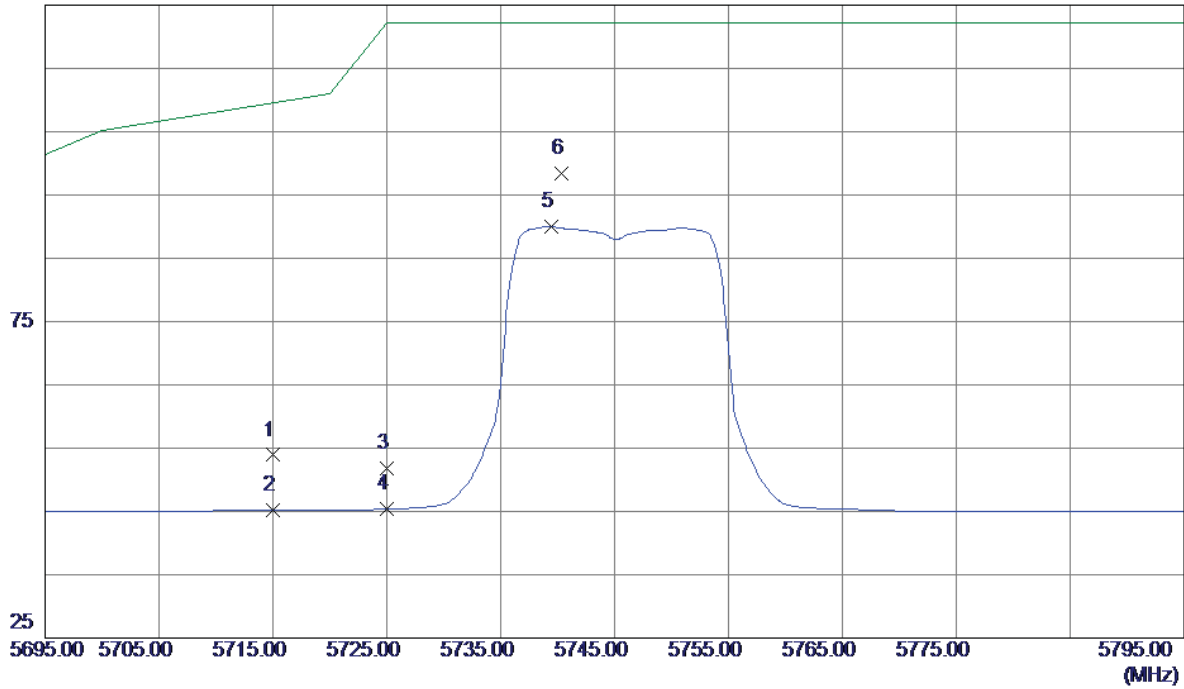


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 11.18 | 42.72 | 53.90 | 109.50 | -55.60 | Peak | |
| 2 | 5715.0000 | 2.42 | 42.72 | 45.14 | 109.50 | -64.36 | AVG | |
| 3 | 5725.0000 | 9.13 | 42.73 | 51.86 | 122.30 | -70.44 | Peak | |
| 4 | 5725.0000 | 2.72 | 42.73 | 45.45 | 122.30 | -76.85 | AVG | |
| 5 | 5739.4000 | 47.23 | 42.74 | 89.97 | 122.30 | -32.33 | AVG | |
| 6 * | 5740.3000 | 55.73 | 42.74 | 98.47 | 122.30 | -23.83 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Vertical


80 dBuV/m

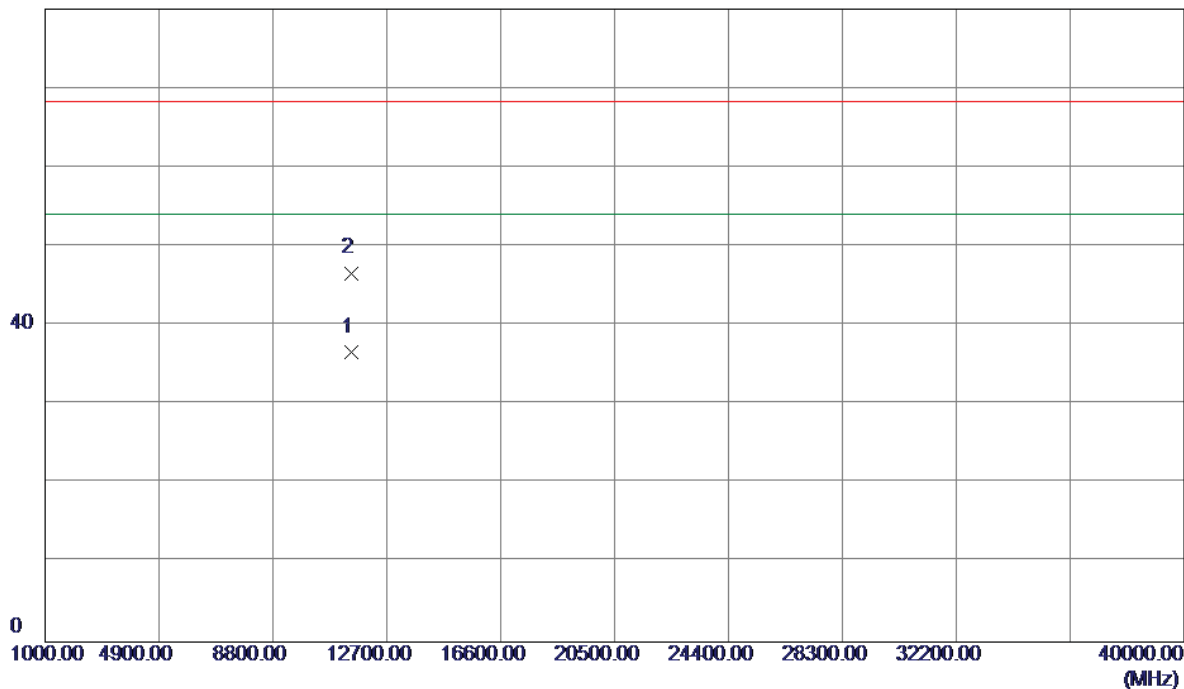

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.1050 | 18.78 | 17.89 | 36.67 | 54.00 | -17.33 | AVG | |
| 2 | 11490.2500 | 28.75 | 17.89 | 46.64 | 68.30 | -21.66 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Horizontal

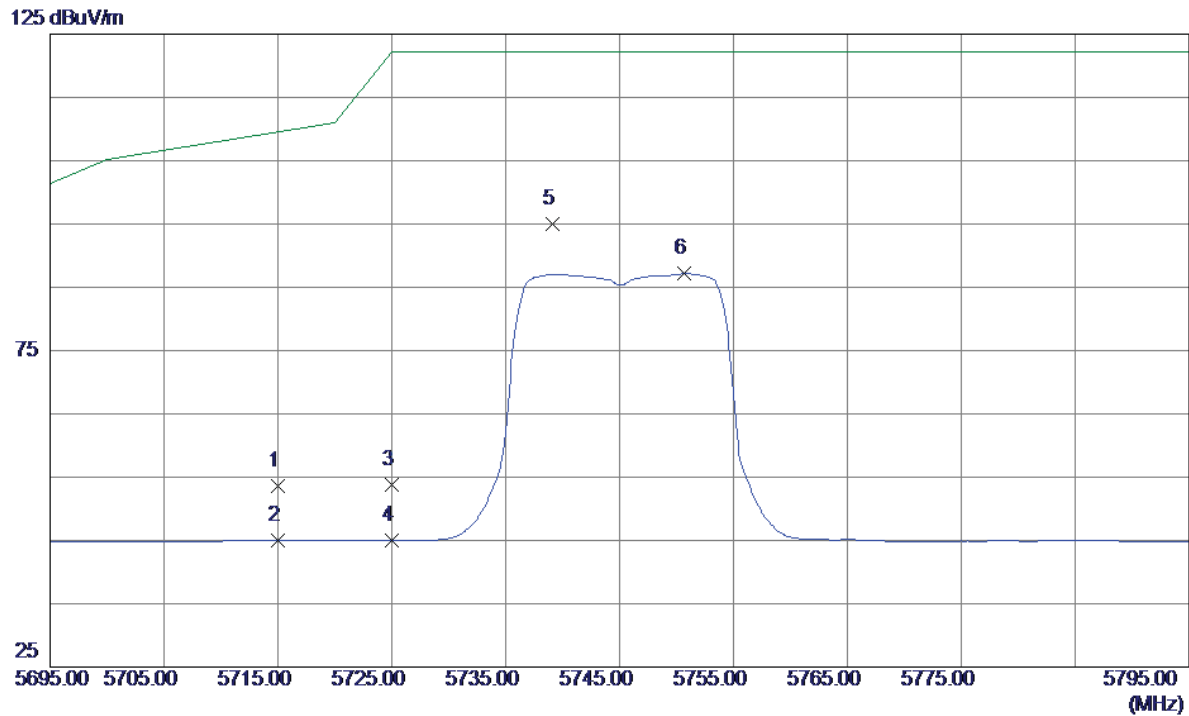


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 10.93 | 42.72 | 53.65 | 109.50 | -55.85 | Peak | |
| 2 | 5715.0000 | 2.22 | 42.72 | 44.94 | 109.50 | -64.56 | AVG | |
| 3 | 5725.0000 | 11.14 | 42.73 | 53.87 | 122.30 | -68.43 | Peak | |
| 4 | 5725.0000 | 2.27 | 42.73 | 45.00 | 122.30 | -77.30 | AVG | |
| 5 * | 5739.1000 | 52.29 | 42.74 | 95.03 | 122.30 | -27.27 | Peak | |
| 6 | 5750.7000 | 44.43 | 42.75 | 87.18 | 122.30 | -35.12 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Horizontal


80 dBuV/m

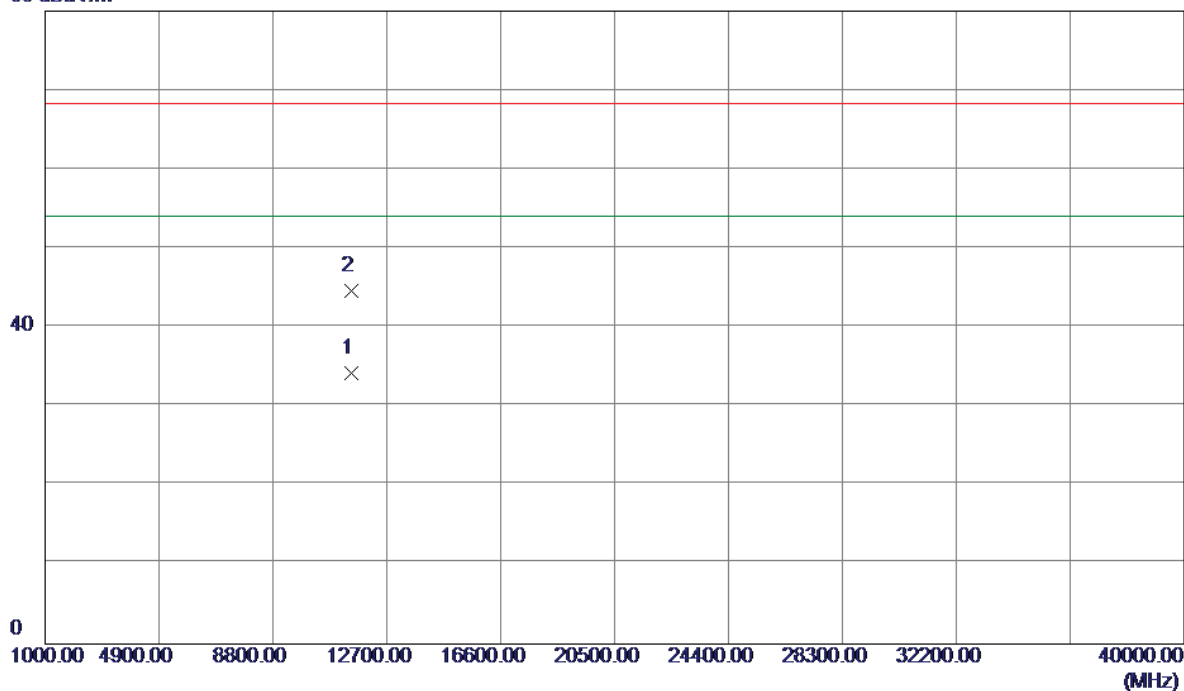

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.1000 | 16.39 | 17.89 | 34.28 | 54.00 | -19.72 | AVG | |
| 2 | 11490.2500 | 26.76 | 17.89 | 44.65 | 68.30 | -23.65 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Vertical

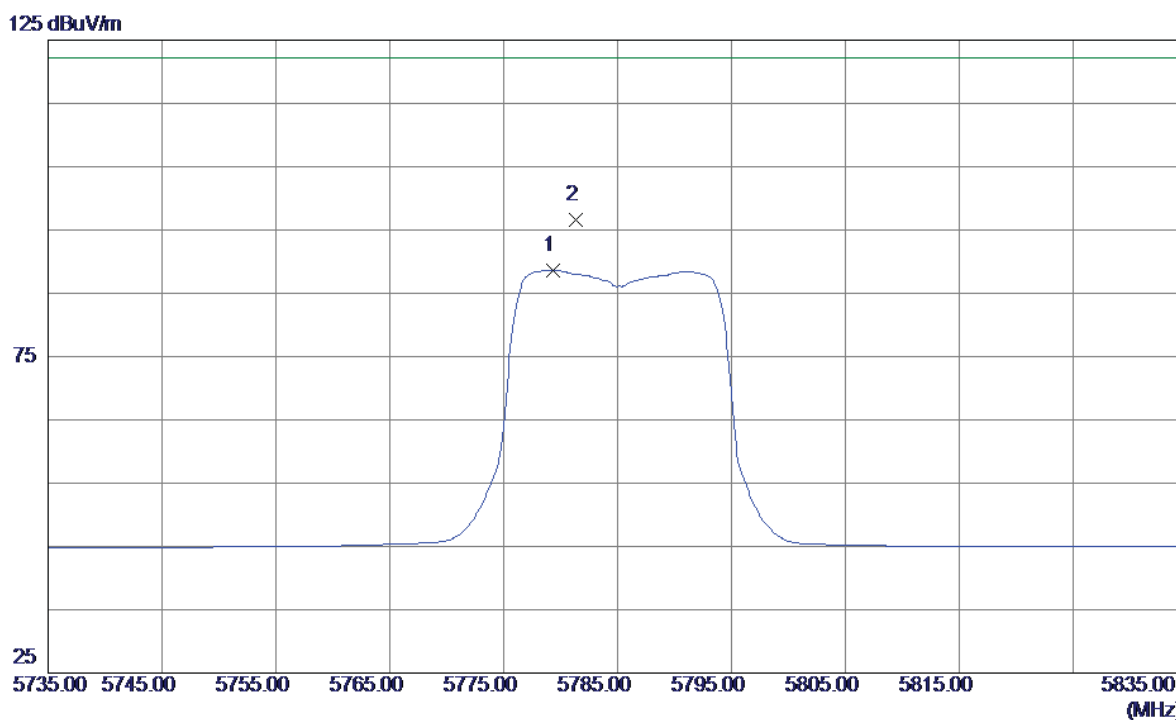


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5779.3000 | 45.91 | 42.78 | 88.69 | 122.30 | -33.61 | AVG | |
| 2 * | 5781.3000 | 53.85 | 42.78 | 96.63 | 122.30 | -25.67 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Vertical

80 dBuV/m

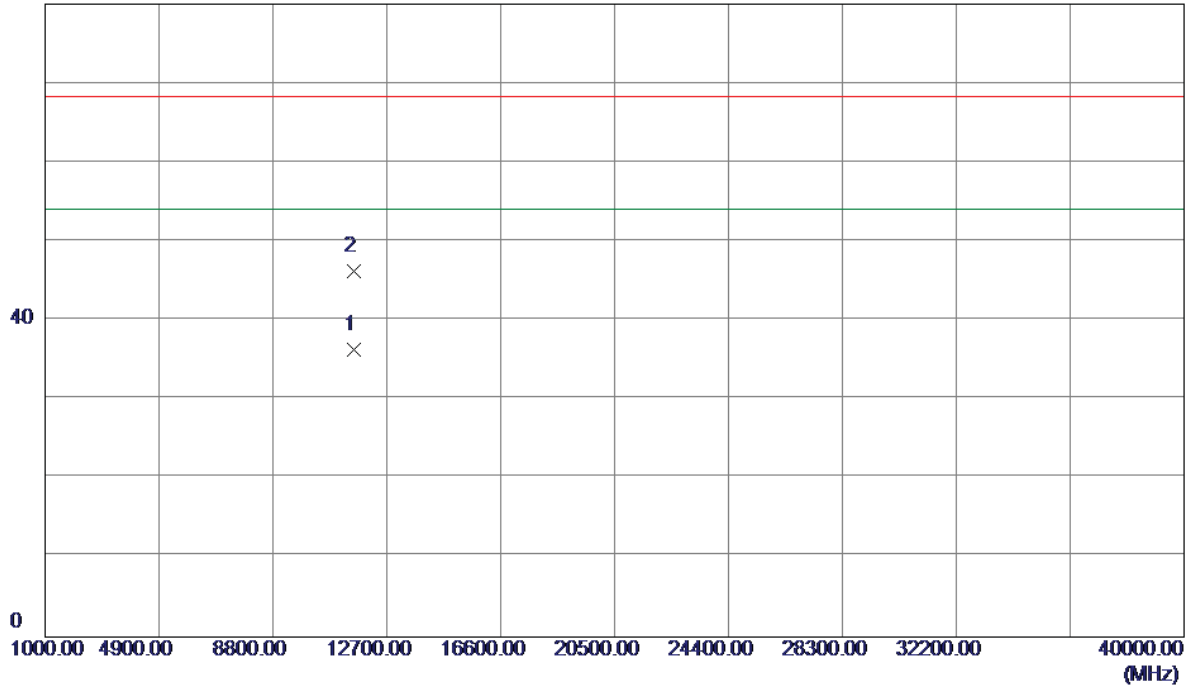


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1250 | 18.54 | 17.85 | 36.39 | 54.00 | -17.61 | AVG | |
| 2 | 11570.2000 | 28.35 | 17.85 | 46.20 | 68.30 | -22.10 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Horizontal

125 dBuV/m

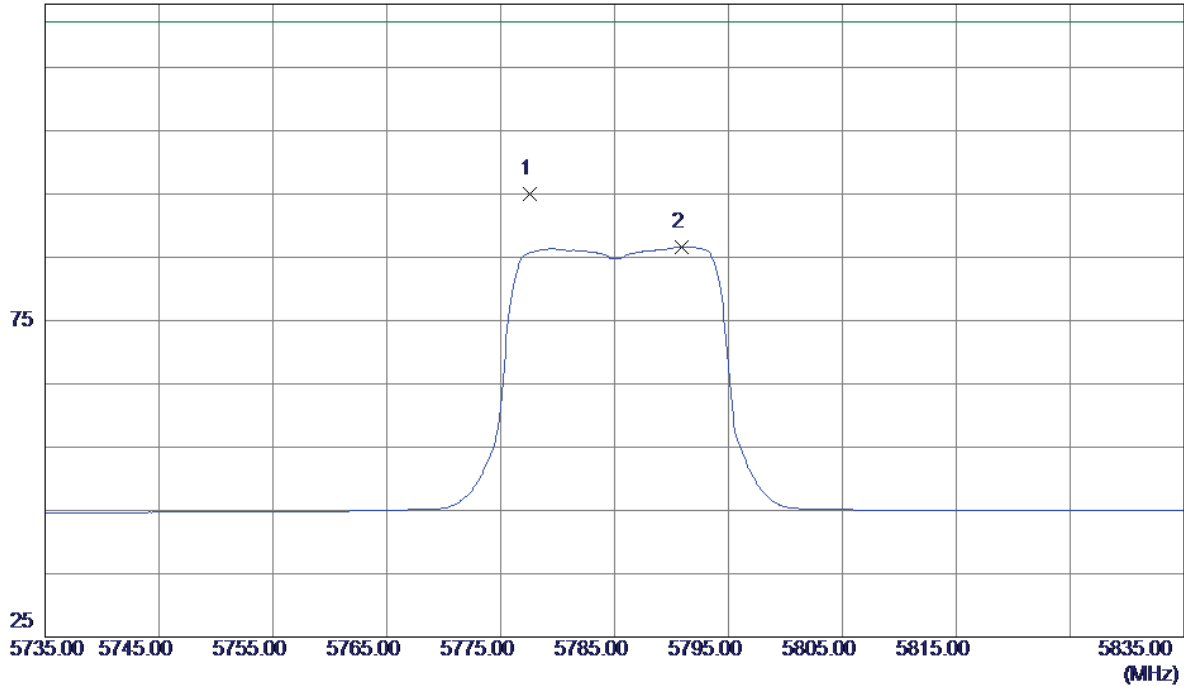


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5777.6000 | 52.20 | 42.77 | 94.97 | 122.30 | -27.33 | Peak | |
| 2 | 5790.9000 | 43.88 | 42.79 | 86.67 | 122.30 | -35.63 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Horizontal

80 dBuV/m

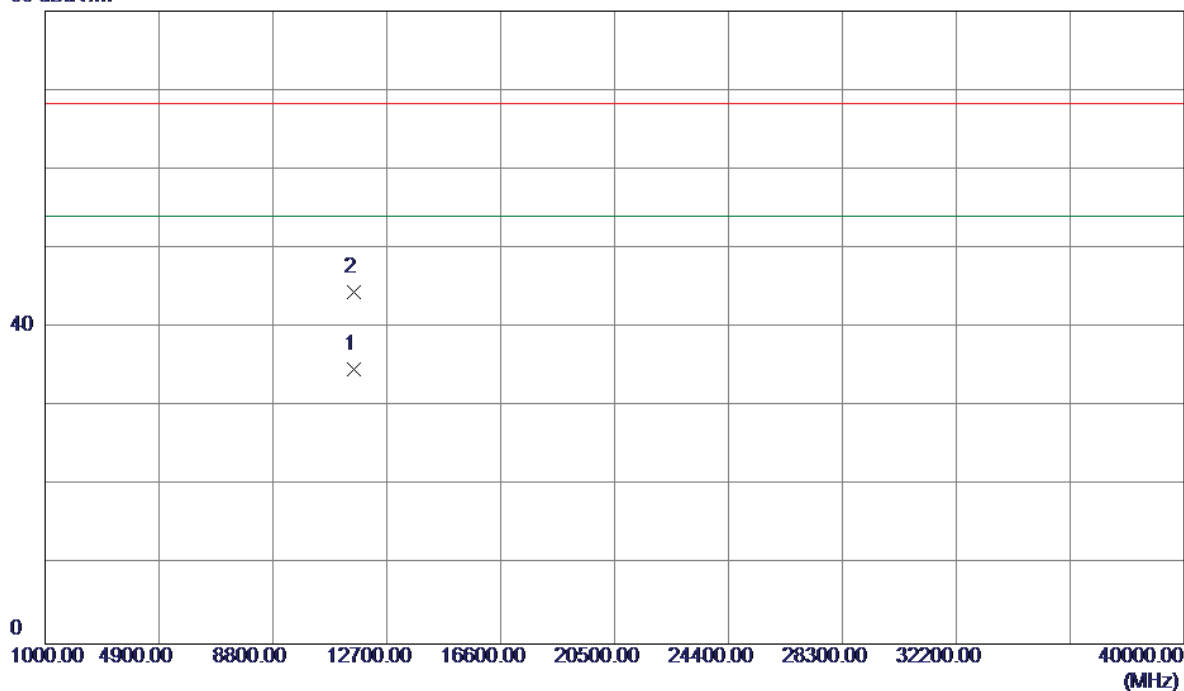


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1500 | 16.88 | 17.85 | 34.73 | 54.00 | -19.27 | AVG | |
| 2 | 11570.6500 | 26.68 | 17.85 | 44.53 | 68.30 | -23.77 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |

Vertical

125 dBuV/m

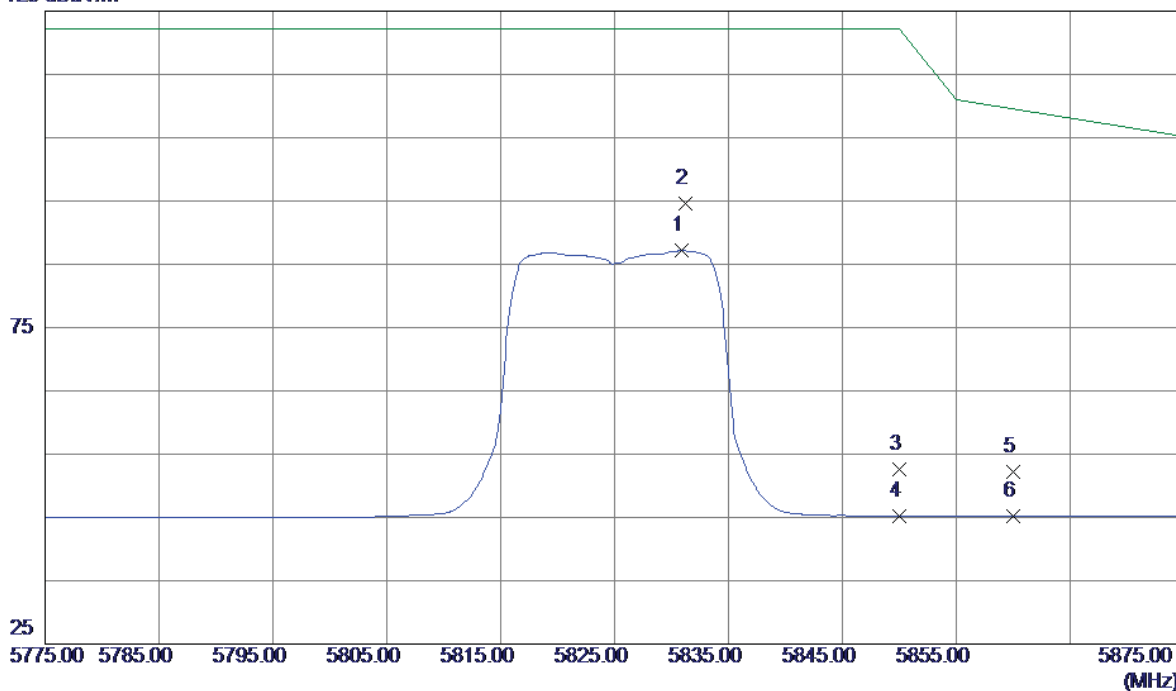


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5830.9000 | 44.34 | 42.82 | 87.16 | 122.30 | -35.14 | AVG | |
| 2 * | 5831.2000 | 51.87 | 42.82 | 94.69 | 122.30 | -27.61 | Peak | |
| 3 | 5850.0000 | 9.72 | 42.84 | 52.56 | 122.30 | -69.74 | Peak | |
| 4 | 5850.0000 | 2.33 | 42.84 | 45.17 | 122.30 | -77.13 | AVG | |
| 5 | 5860.0000 | 9.30 | 42.85 | 52.15 | 109.50 | -57.35 | Peak | |
| 6 | 5860.0000 | 2.36 | 42.85 | 45.21 | 109.50 | -64.29 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |

Vertical


80 dBuV/m

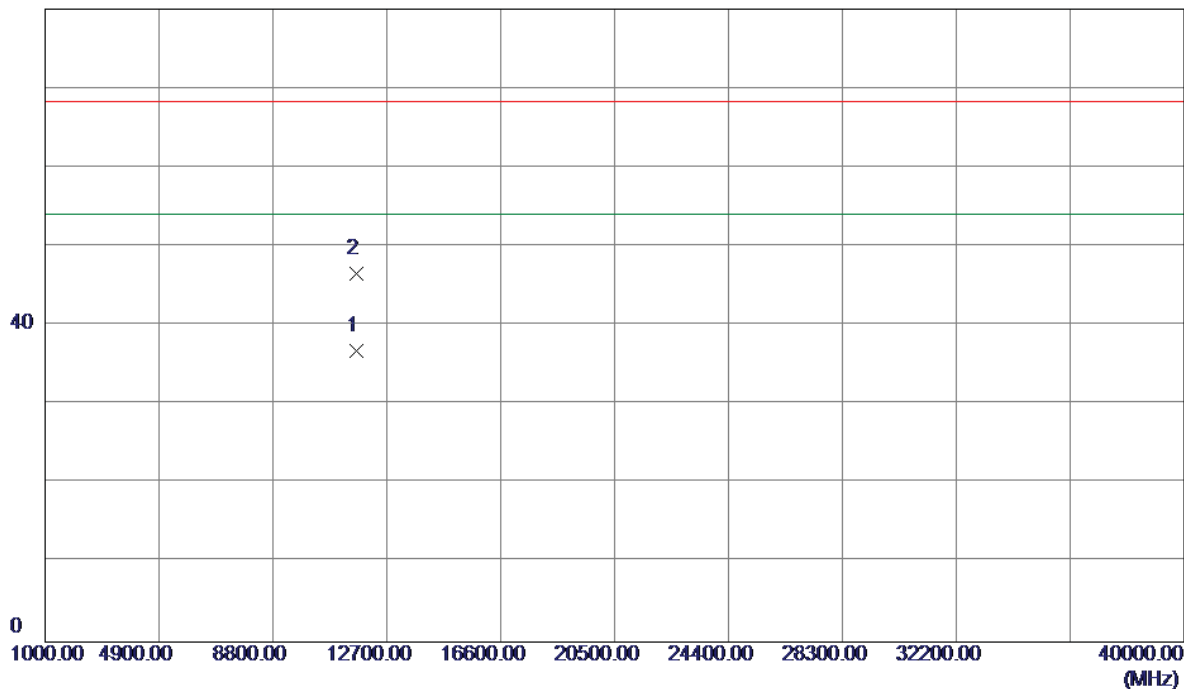

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.0850 | 18.98 | 17.79 | 36.77 | 54.00 | -17.23 | AVG | |
| 2 | 11650.1050 | 28.82 | 17.79 | 46.61 | 68.30 | -21.69 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |

Horizontal

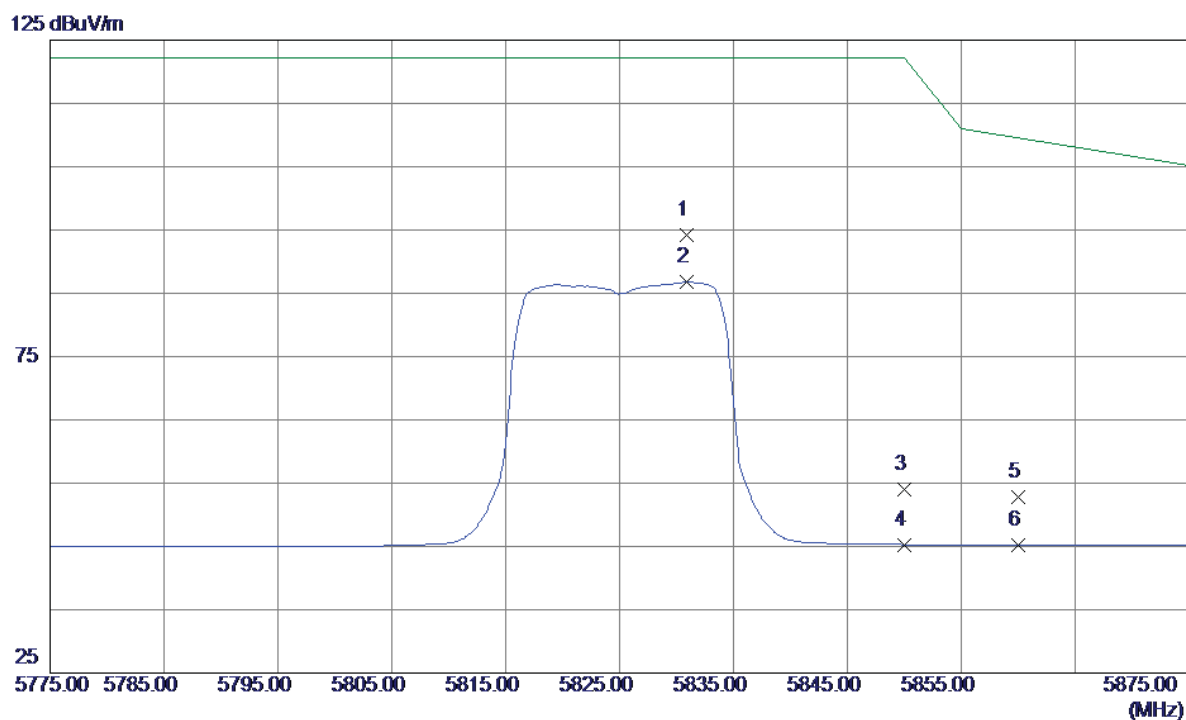


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5830.9000 | 51.39 | 42.82 | 94.21 | 122.30 | -28.09 | Peak | |
| 2 | 5830.9000 | 43.96 | 42.82 | 86.78 | 122.30 | -35.52 | AVG | |
| 3 | 5850.0000 | 11.21 | 42.84 | 54.05 | 122.30 | -68.25 | Peak | |
| 4 | 5850.0000 | 2.45 | 42.84 | 45.29 | 122.30 | -77.01 | AVG | |
| 5 | 5860.0000 | 9.98 | 42.85 | 52.83 | 109.50 | -56.67 | Peak | |
| 6 | 5860.0000 | 2.41 | 42.85 | 45.26 | 109.50 | -64.24 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |

Horizontal


80 dBuV/m

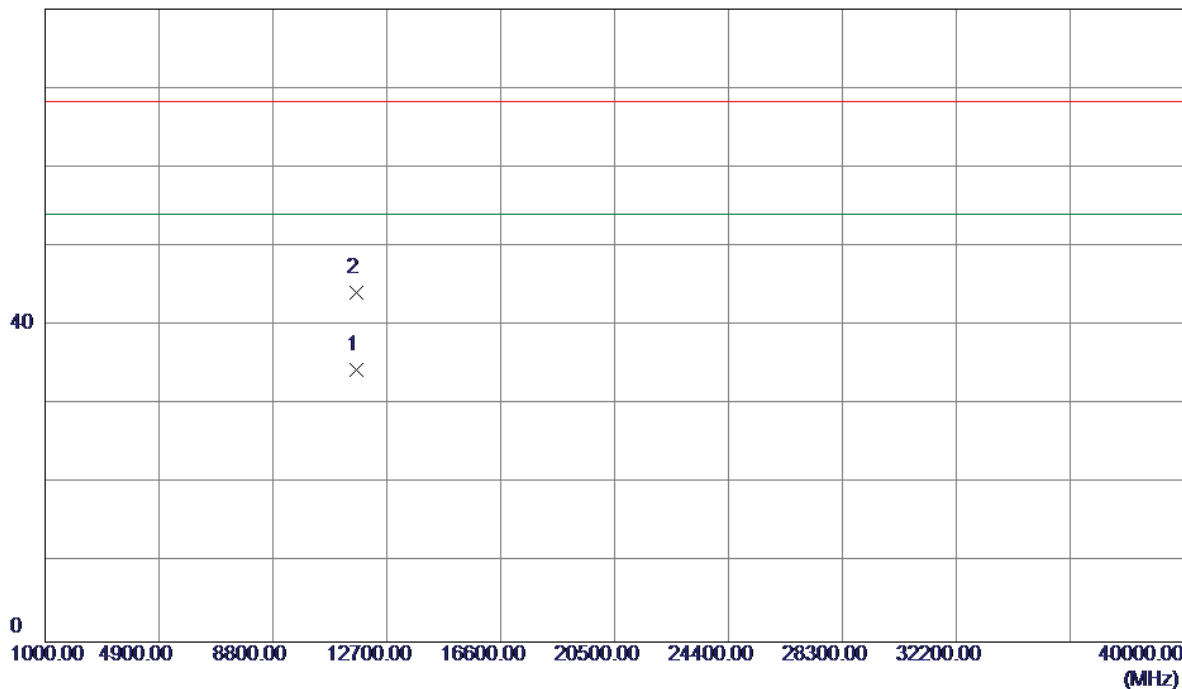

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.3450 | 16.65 | 17.79 | 34.44 | 54.00 | -19.56 | AVG | |
| 2 | 11650.7850 | 26.44 | 17.79 | 44.23 | 68.30 | -24.07 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Vertical

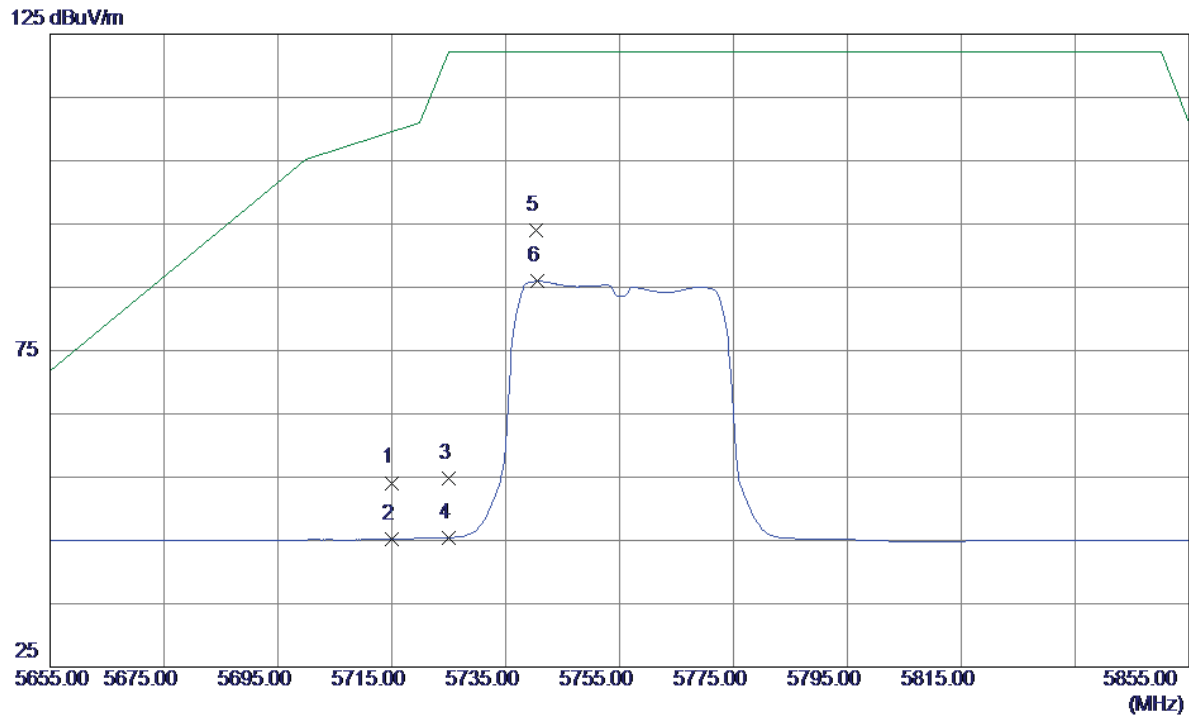


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 11.38 | 42.72 | 54.10 | 109.50 | -55.40 | Peak | |
| 2 | 5715.0000 | 2.51 | 42.72 | 45.23 | 109.50 | -64.27 | AVG | |
| 3 | 5725.0000 | 12.08 | 42.73 | 54.81 | 122.30 | -67.49 | Peak | |
| 4 | 5725.0000 | 2.71 | 42.73 | 45.44 | 122.30 | -76.86 | AVG | |
| 5 * | 5740.4000 | 51.17 | 42.74 | 93.91 | 122.30 | -28.39 | Peak | |
| 6 | 5740.6000 | 43.20 | 42.74 | 85.94 | 122.30 | -36.36 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Vertical


80 dBuV/m

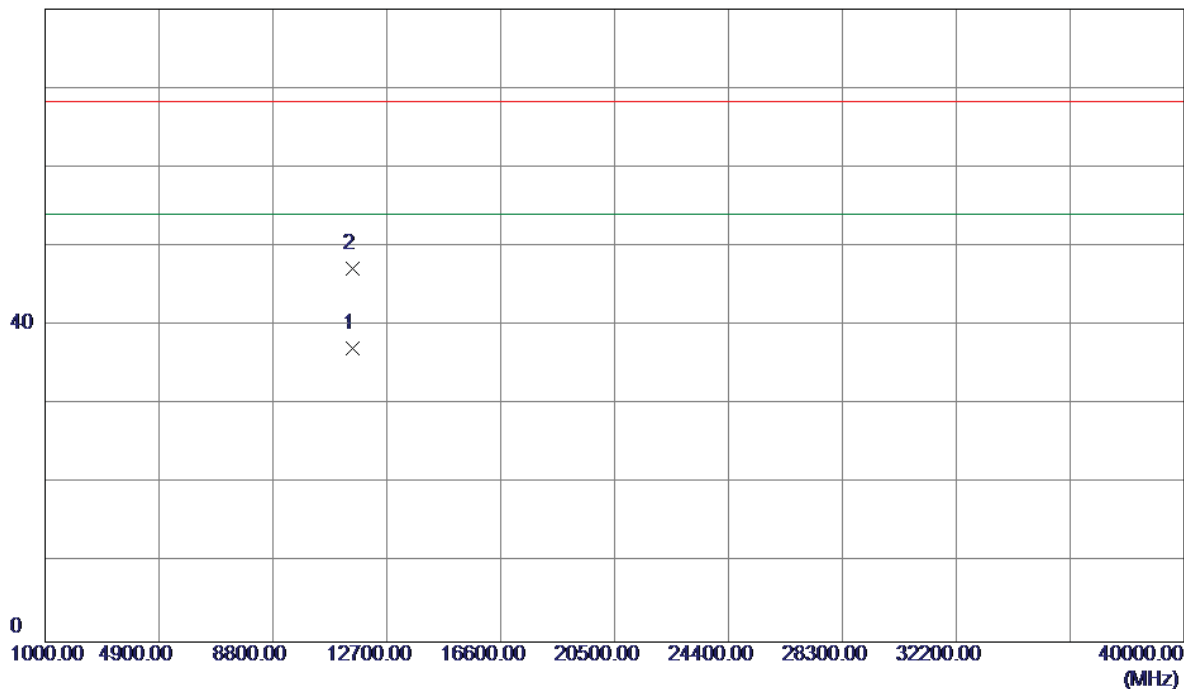

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.2500 | 19.24 | 17.90 | 37.14 | 54.00 | -16.86 | AVG | |
| 2 | 11510.7500 | 29.32 | 17.90 | 47.22 | 68.30 | -21.08 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Horizontal

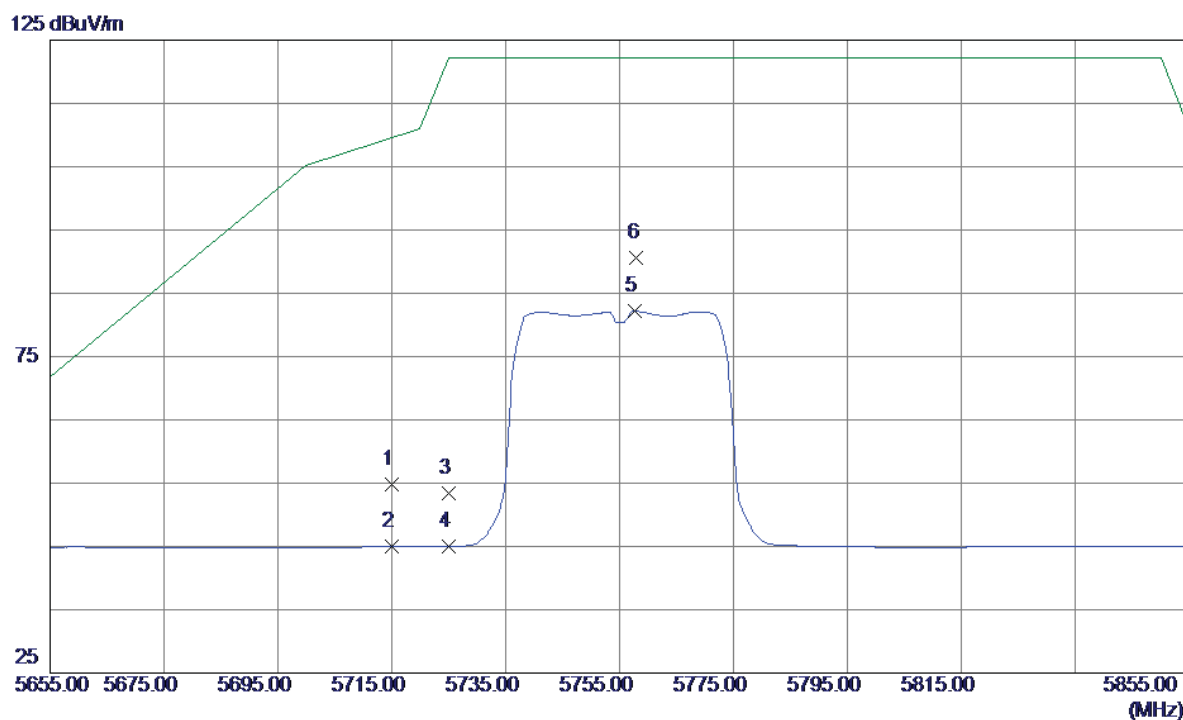


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 12.08 | 42.72 | 54.80 | 109.50 | -54.70 | Peak | |
| 2 | 5715.0000 | 2.26 | 42.72 | 44.98 | 109.50 | -64.52 | AVG | |
| 3 | 5725.0000 | 10.59 | 42.73 | 53.32 | 122.30 | -68.98 | Peak | |
| 4 | 5725.0000 | 2.27 | 42.73 | 45.00 | 122.30 | -77.30 | AVG | |
| 5 | 5757.6000 | 39.44 | 42.76 | 82.20 | 122.30 | -40.10 | AVG | |
| 6 * | 5758.0000 | 47.84 | 42.76 | 90.60 | 122.30 | -31.70 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Horizontal


80 dBuV/m

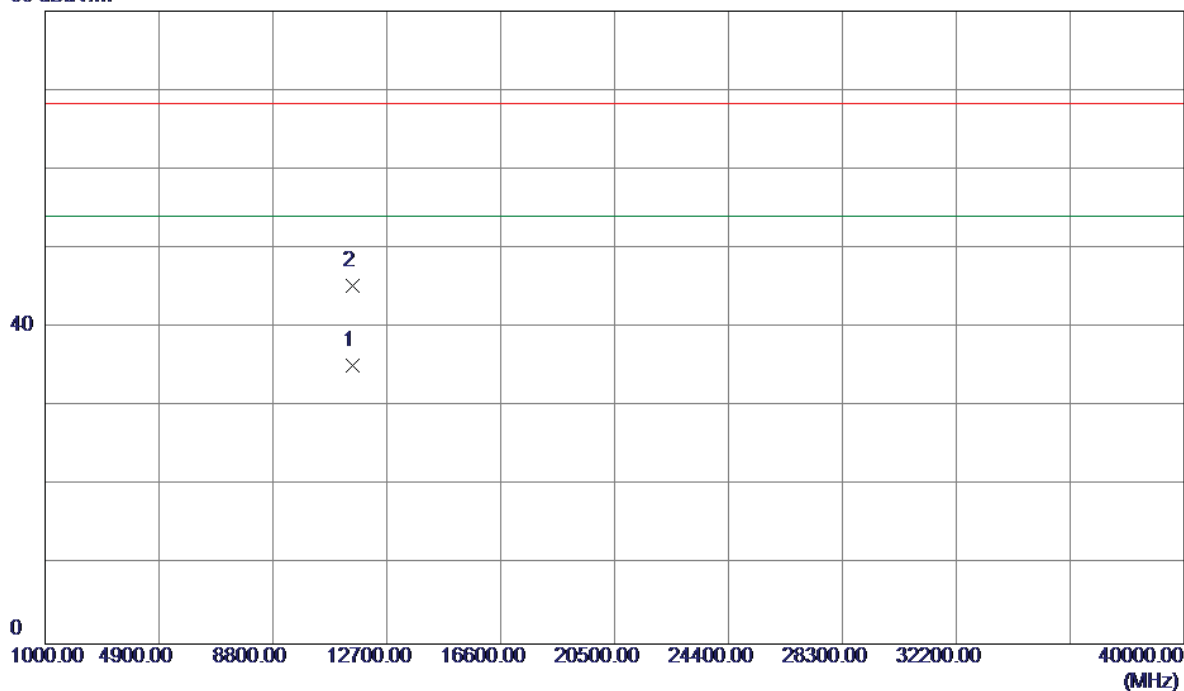

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.2250 | 17.24 | 17.90 | 35.14 | 54.00 | -18.86 | AVG | |
| 2 | 11510.7550 | 27.32 | 17.90 | 45.22 | 68.30 | -23.08 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |

Vertical

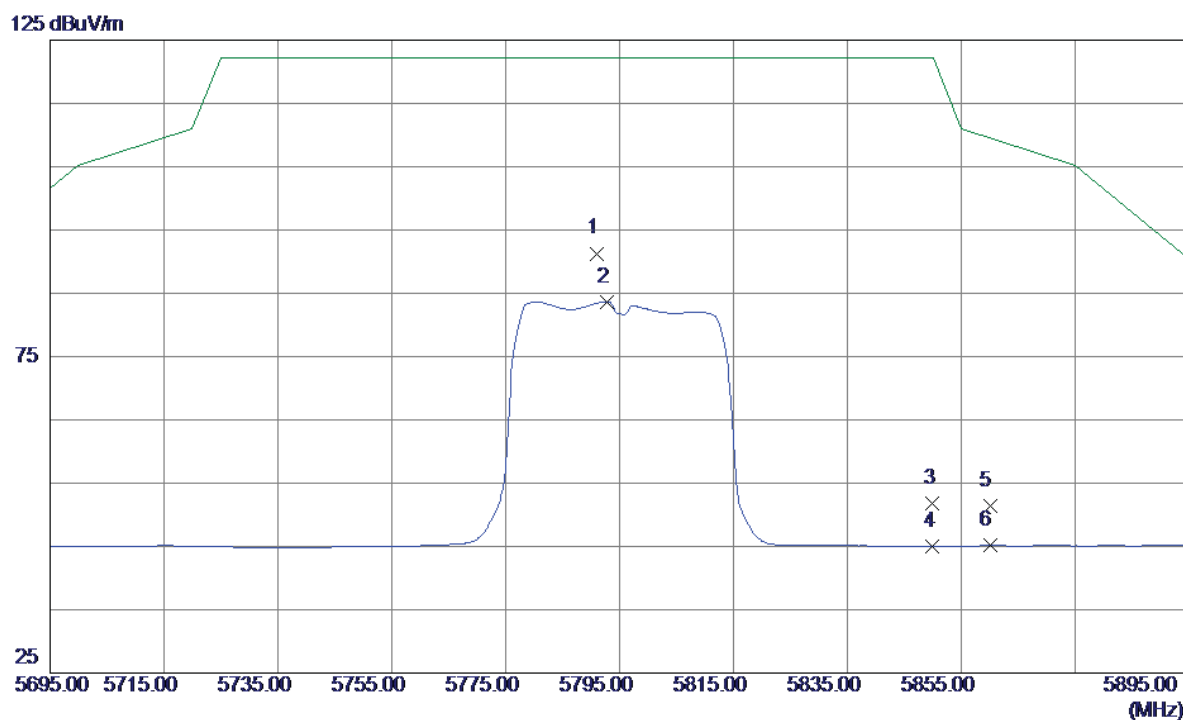


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5791.0000 | 48.51 | 42.79 | 91.30 | 122.30 | -31.00 | Peak | |
| 2 | 5792.8000 | 40.89 | 42.79 | 83.68 | 122.30 | -38.62 | AVG | |
| 3 | 5850.0000 | 9.03 | 42.84 | 51.87 | 122.30 | -70.43 | Peak | |
| 4 | 5850.0000 | 2.19 | 42.84 | 45.03 | 122.30 | -77.27 | AVG | |
| 5 | 5860.0000 | 8.62 | 42.85 | 51.47 | 109.50 | -58.03 | Peak | |
| 6 | 5860.0000 | 2.27 | 42.85 | 45.12 | 109.50 | -64.38 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |

Vertical


80 dBuV/m

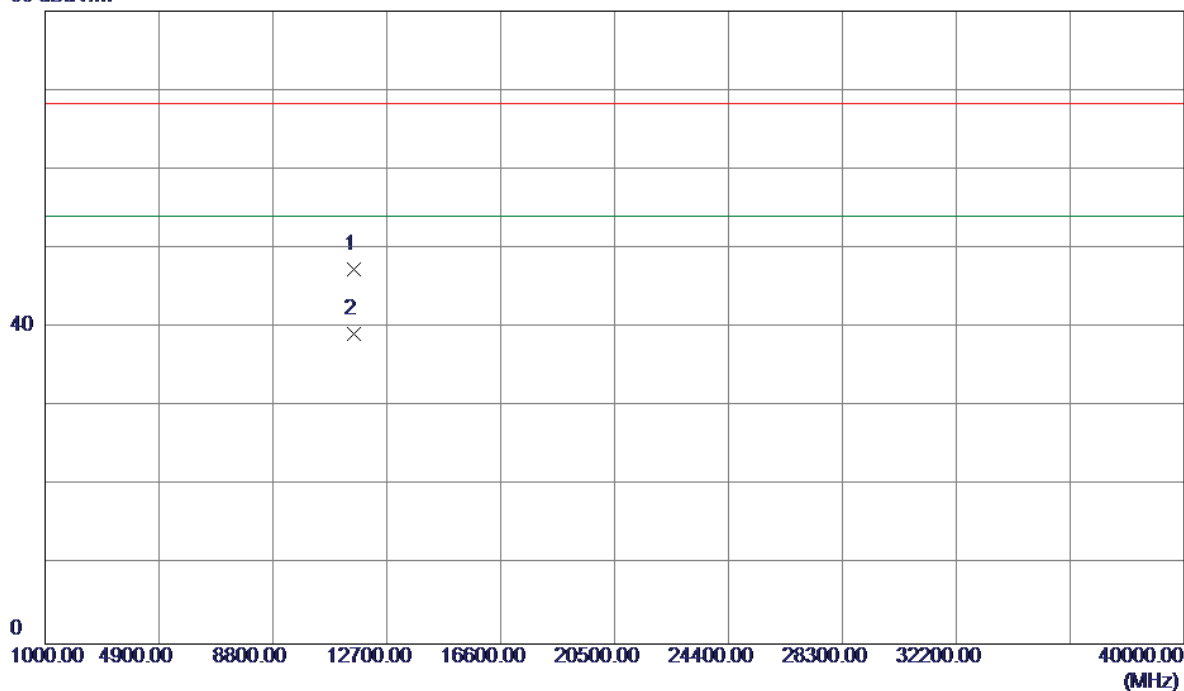

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11590.0450 | 29.60 | 17.83 | 47.43 | 68.30 | -20.87 | Peak | |
| 2 * | 11590.1650 | 21.41 | 17.83 | 39.24 | 54.00 | -14.76 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |

Horizontal

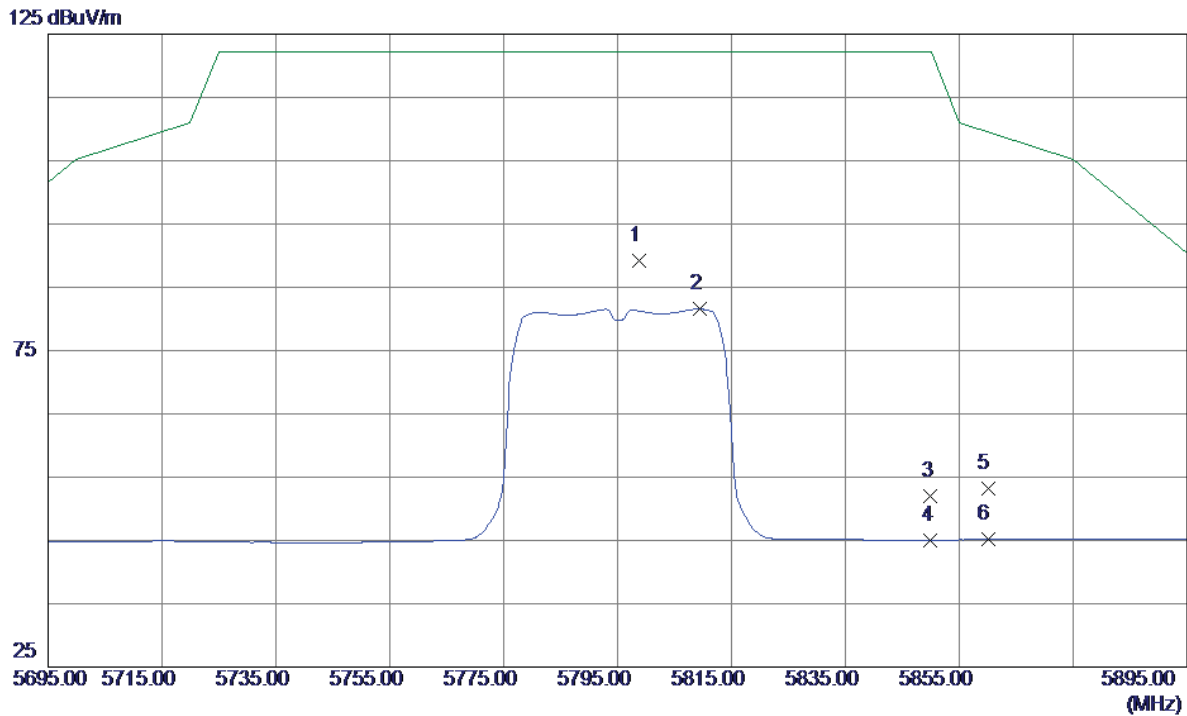


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5798.8000 | 46.39 | 42.79 | 89.18 | 122.30 | -33.12 | Peak | |
| 2 | 5809.4000 | 38.76 | 42.80 | 81.56 | 122.30 | -40.74 | AVG | |
| 3 | 5850.0000 | 9.16 | 42.84 | 52.00 | 122.30 | -70.30 | Peak | |
| 4 | 5850.0000 | 2.23 | 42.84 | 45.07 | 122.30 | -77.23 | AVG | |
| 5 | 5860.0000 | 10.31 | 42.85 | 53.16 | 109.50 | -56.34 | Peak | |
| 6 | 5860.0000 | 2.31 | 42.85 | 45.16 | 109.50 | -64.34 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |

Horizontal


80 dBuV/m

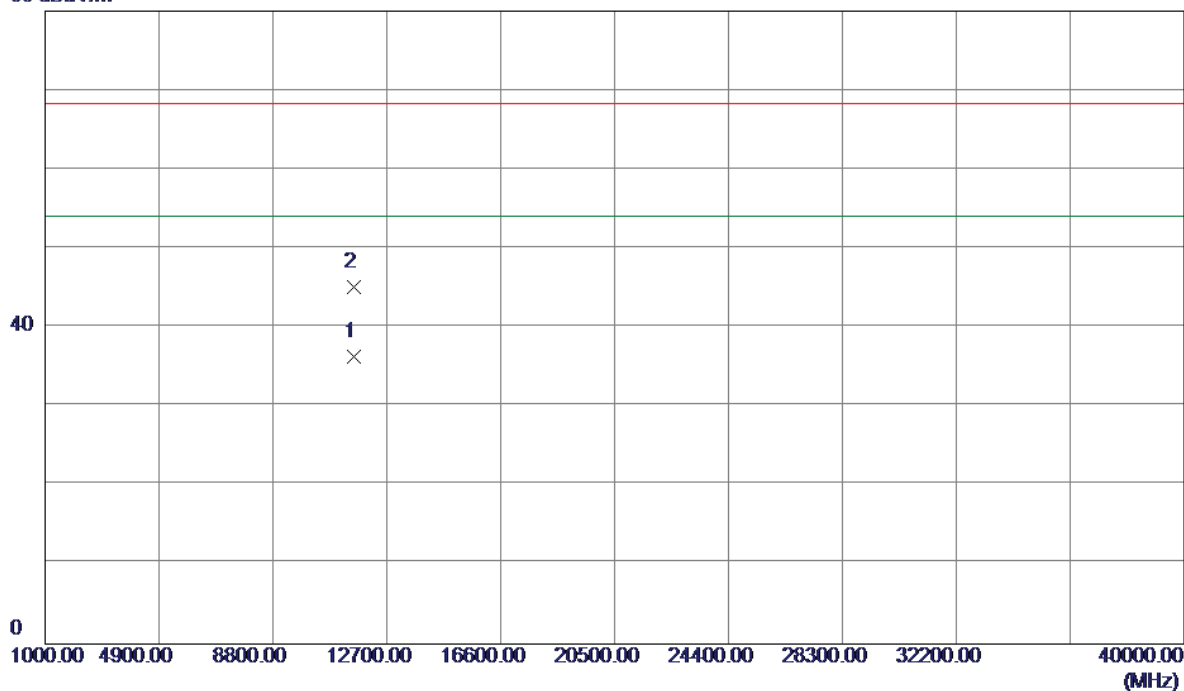

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.0250 | 18.46 | 17.83 | 36.29 | 54.00 | -17.71 | AVG | |
| 2 | 11590.2500 | 27.33 | 17.83 | 45.16 | 68.30 | -23.14 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Vertical

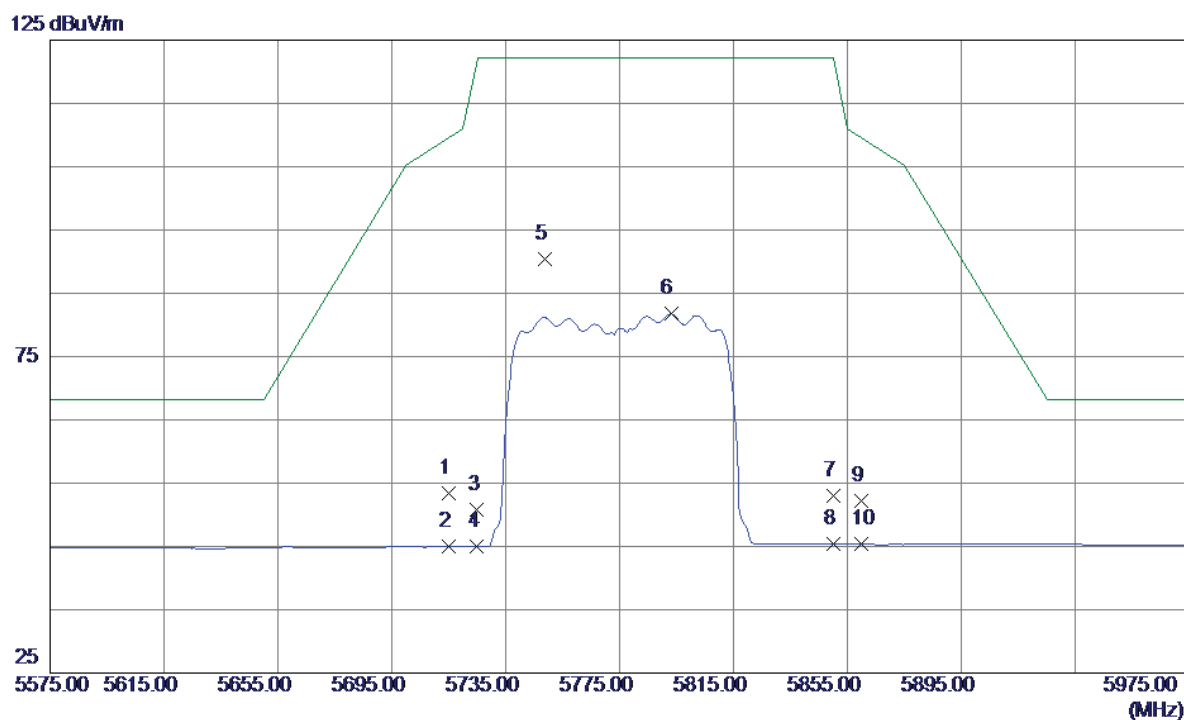


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 10.77 | 42.55 | 53.32 | 109.50 | -56.18 | Peak | |
| 2 | 5715.0000 | 2.41 | 42.55 | 44.96 | 109.50 | -64.54 | AVG | |
| 3 | 5725.0000 | 8.14 | 42.58 | 50.72 | 122.30 | -71.58 | Peak | |
| 4 | 5725.0000 | 2.35 | 42.58 | 44.93 | 122.30 | -77.37 | AVG | |
| 5 * | 5748.6000 | 47.72 | 42.66 | 90.38 | 122.30 | -31.92 | Peak | |
| 6 | 5793.0000 | 38.93 | 42.82 | 81.75 | 122.30 | -40.55 | AVG | |
| 7 | 5850.0000 | 10.06 | 43.03 | 53.09 | 122.30 | -69.21 | Peak | |
| 8 | 5850.0000 | 2.35 | 43.03 | 45.38 | 122.30 | -76.92 | AVG | |
| 9 | 5860.0000 | 9.19 | 43.06 | 52.25 | 109.50 | -57.25 | Peak | |
| 10 | 5860.0000 | 2.27 | 43.06 | 45.33 | 109.50 | -64.17 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Vertical


80 dBuV/m

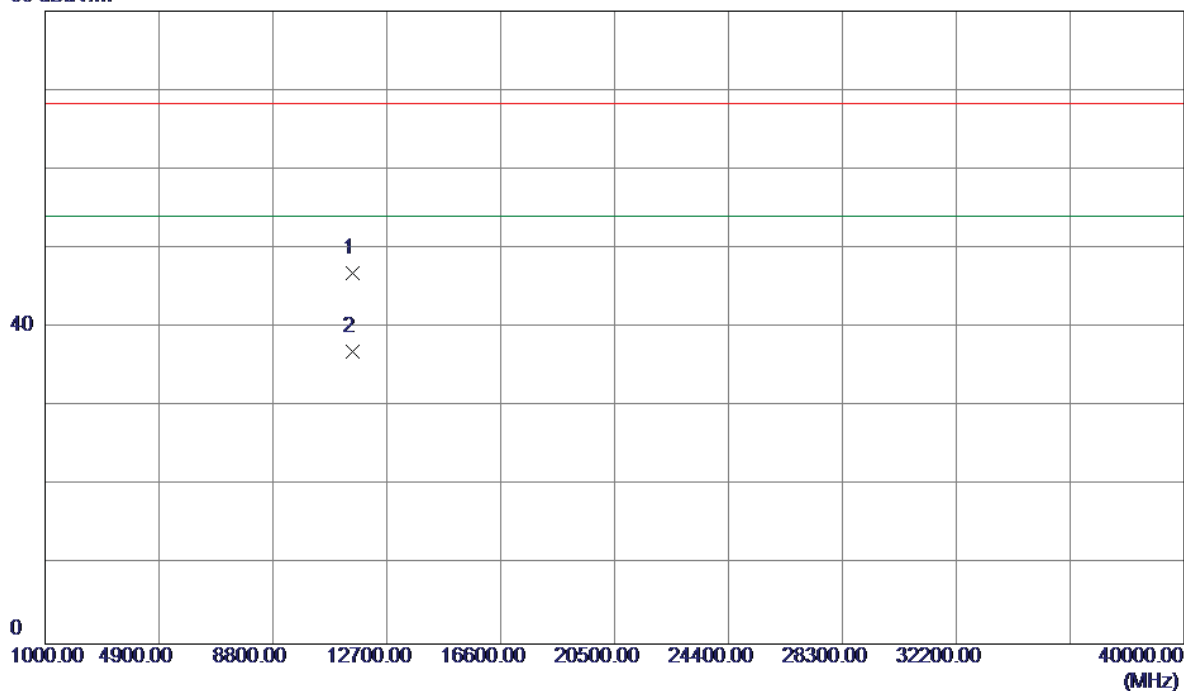

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11550.0900 | 29.04 | 17.87 | 46.91 | 68.30 | -21.39 | Peak | |
| 2 * | 11550.1950 | 19.02 | 17.87 | 36.89 | 54.00 | -17.11 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Horizontal

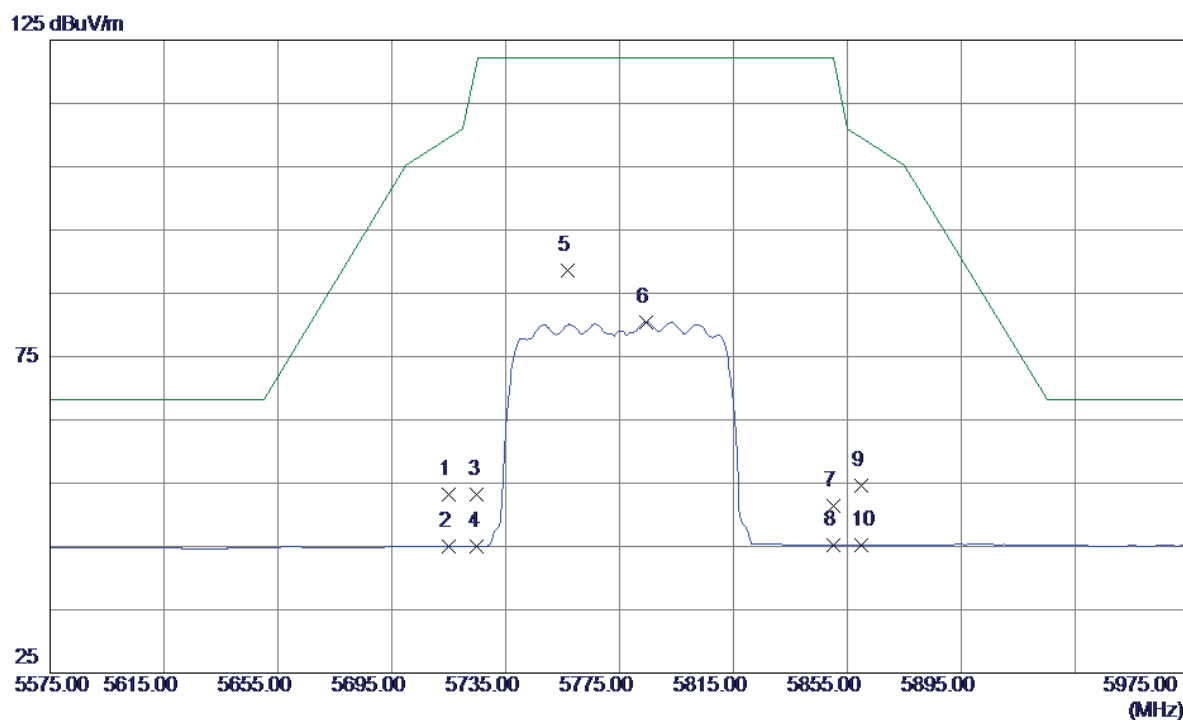


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 10.43 | 42.72 | 53.15 | 109.50 | -56.35 | Peak | |
| 2 | 5715.0000 | 2.35 | 42.72 | 45.07 | 109.50 | -64.43 | AVG | |
| 3 | 5725.0000 | 10.44 | 42.73 | 53.17 | 122.30 | -69.13 | Peak | |
| 4 | 5725.0000 | 2.34 | 42.73 | 45.07 | 122.30 | -77.23 | AVG | |
| 5 * | 5756.6000 | 45.87 | 42.76 | 88.63 | 122.30 | -33.67 | Peak | |
| 6 | 5784.2000 | 37.70 | 42.78 | 80.48 | 122.30 | -41.82 | AVG | |
| 7 | 5850.0000 | 8.59 | 42.84 | 51.43 | 122.30 | -70.87 | Peak | |
| 8 | 5850.0000 | 2.34 | 42.84 | 45.18 | 122.30 | -77.12 | AVG | |
| 9 | 5860.0000 | 11.77 | 42.85 | 54.62 | 109.50 | -54.88 | Peak | |
| 10 | 5860.0000 | 2.37 | 42.85 | 45.22 | 109.50 | -64.28 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Horizontal

80 dBuV/m

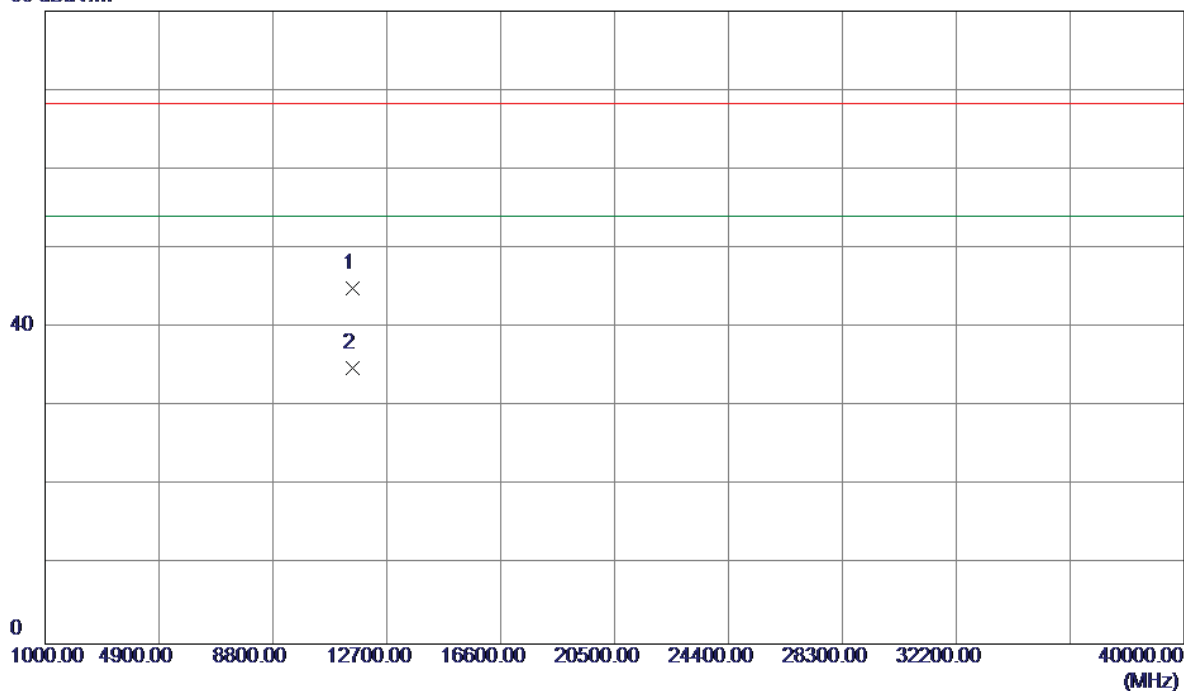

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11550.1000 | 27.11 | 17.87 | 44.98 | 68.30 | -23.32 | Peak | |
| 2 * | 11550.1250 | 17.05 | 17.87 | 34.92 | 54.00 | -19.08 | AVG | |

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

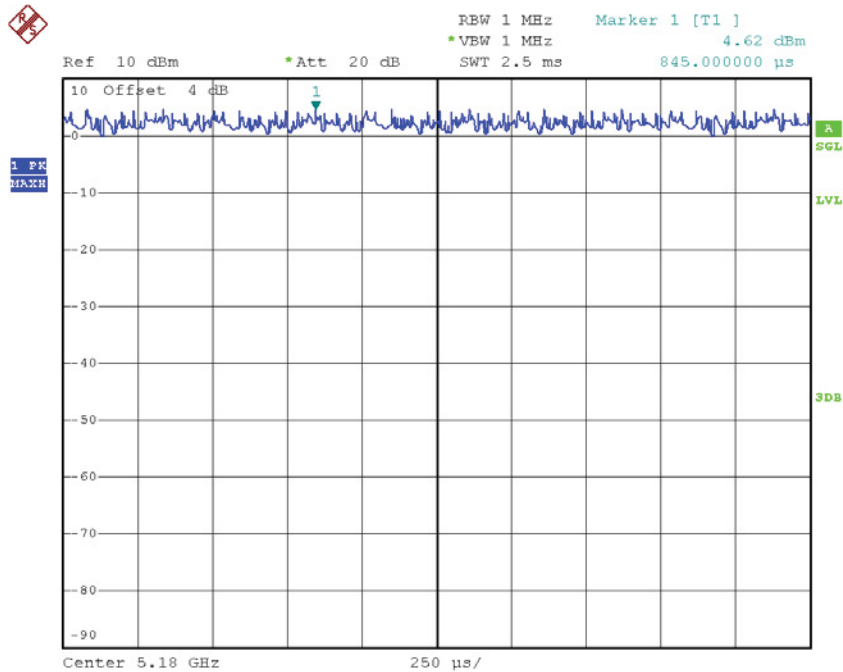

Date: 25.NOV.2016 13:43:29

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

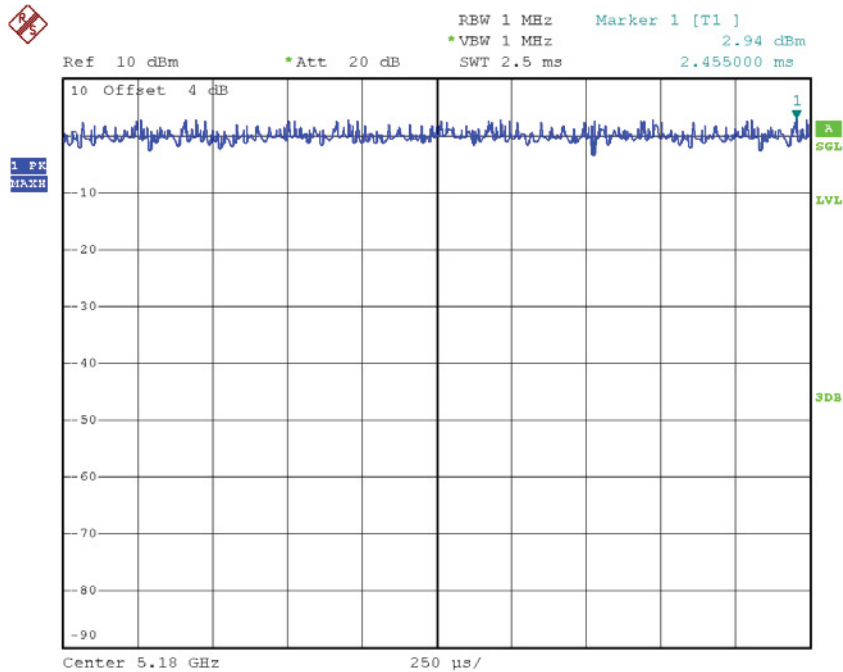

Date: 25.NOV.2016 13:51:38

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducus factor
Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

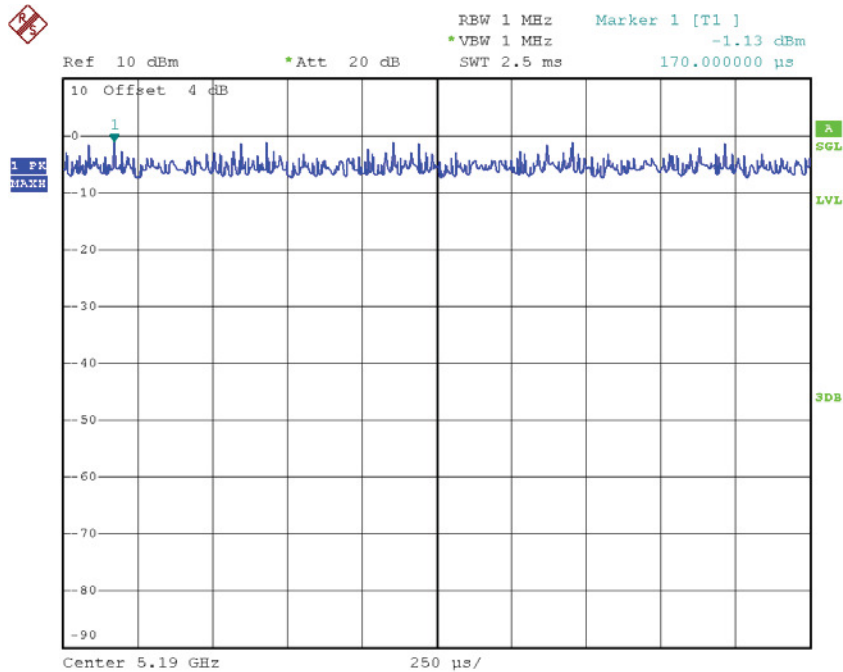

Date: 25.NOV.2016 14:16:07

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

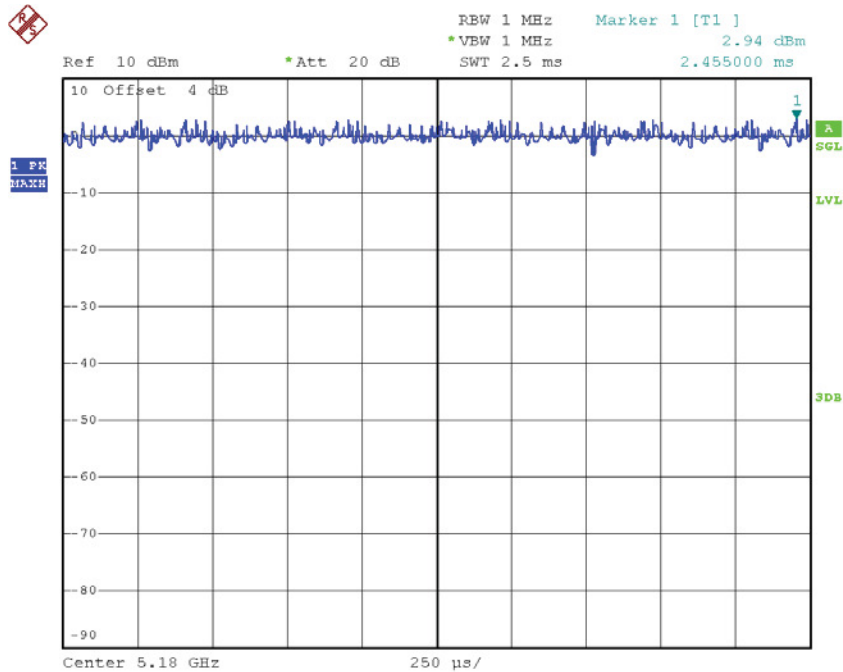

Date: 25.NOV.2016 14:10:38

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

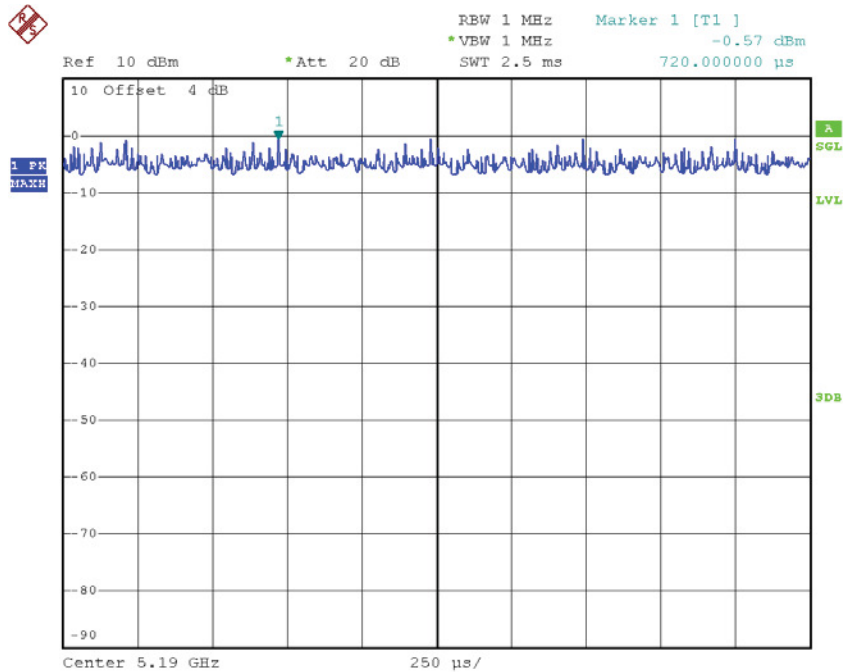

Date: 25.NOV.2016 14:43:07

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

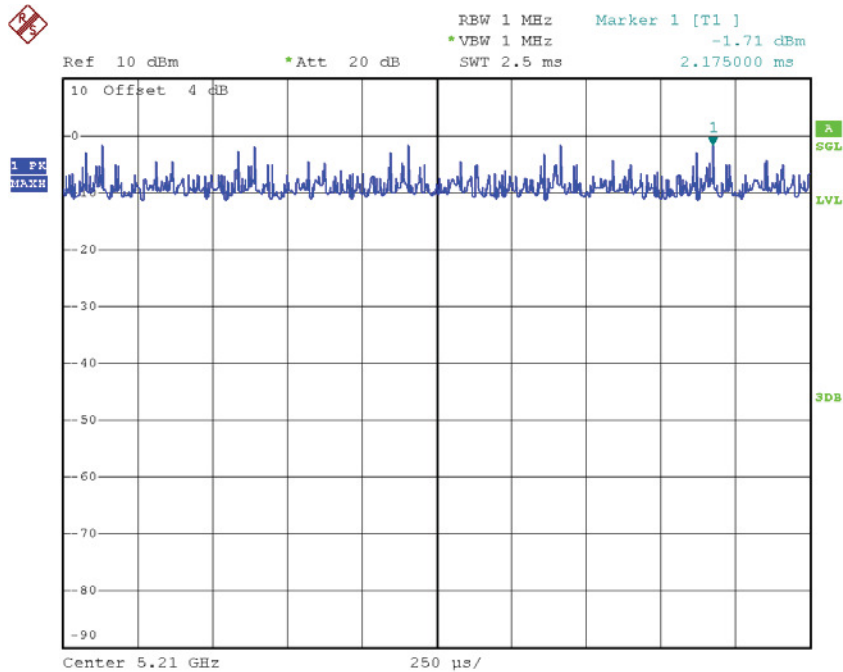

Date: 25.NOV.2016 14:56:57


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH36 | 5180 | 21.79 | 17.00 |
| CH40 | 5200 | 21.69 | 17.00 |
| CH48 | 5240 | 21.69 | 17.00 |

TX CH36

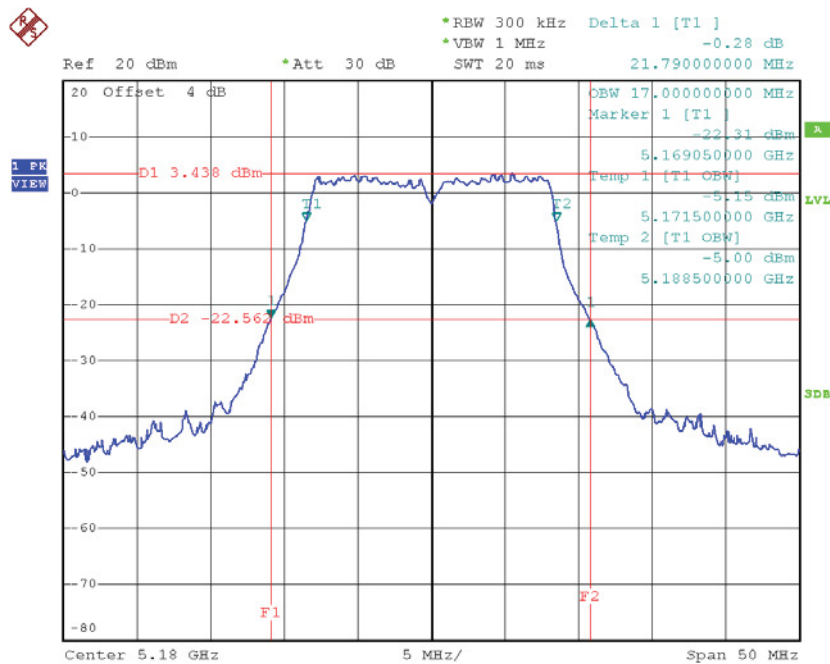


Date: 25.NOV.2016 13:43:15

TX CH40

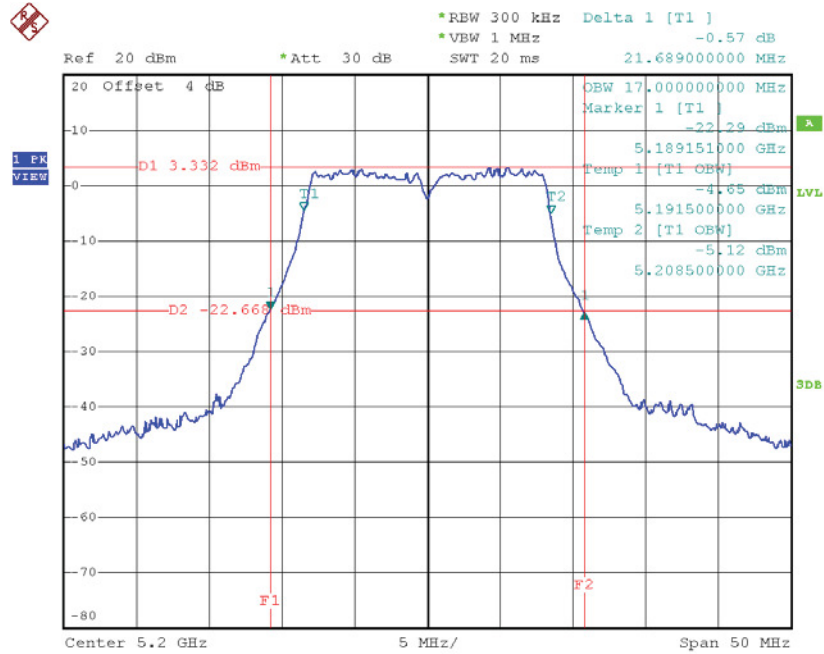

Date: 25.NOV.2016 13:44:31

TX CH48

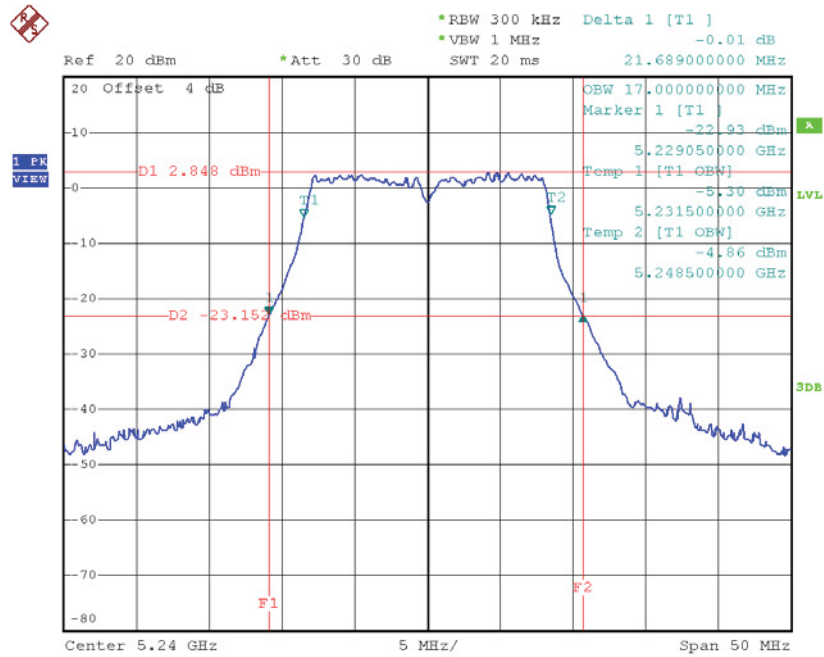


Date: 25.NOV.2016 13:45:32

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH36 | 5180 | 22.45 | 18.00 |
| CH40 | 5200 | 22.45 | 18.00 |
| CH48 | 5240 | 22.29 | 18.00 |

TX CH36

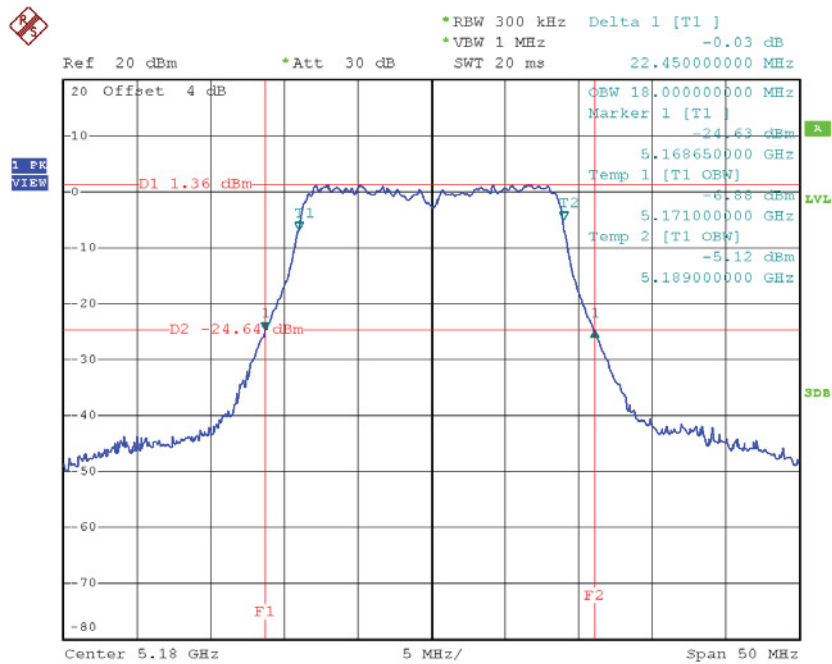


Date: 25.NOV.2016 13:51:23

TX CH40

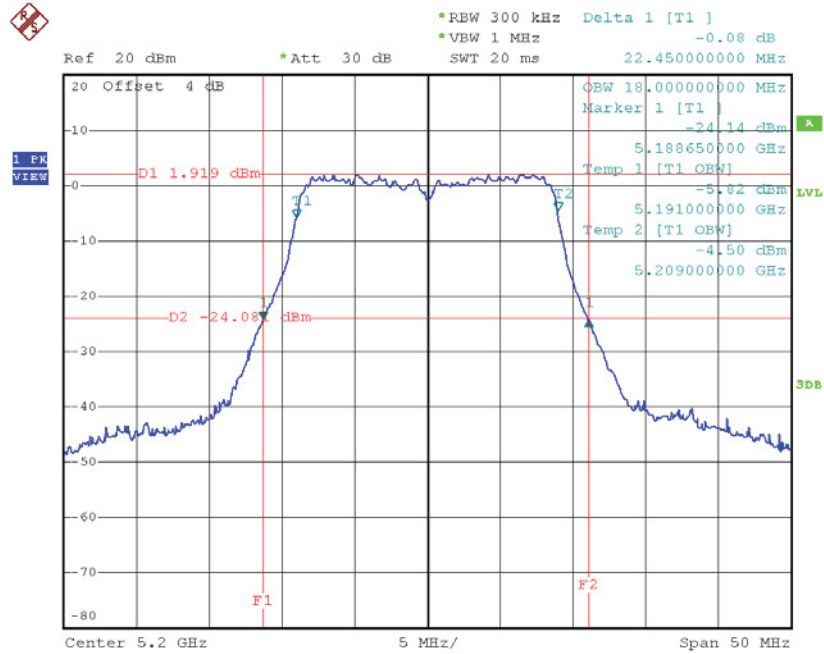

Date: 25.NOV.2016 13:52:51

TX CH48

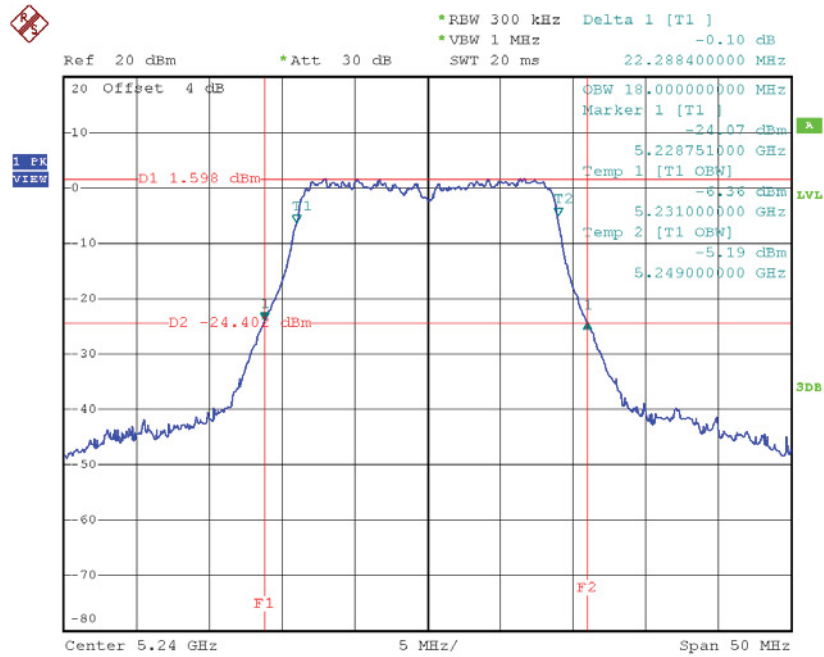


Date: 25.NOV.2016 13:53:55

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH38 | 5190 | 45.70 | 37.60 |
| CH46 | 5230 | 45.81 | 37.60 |

TX CH38

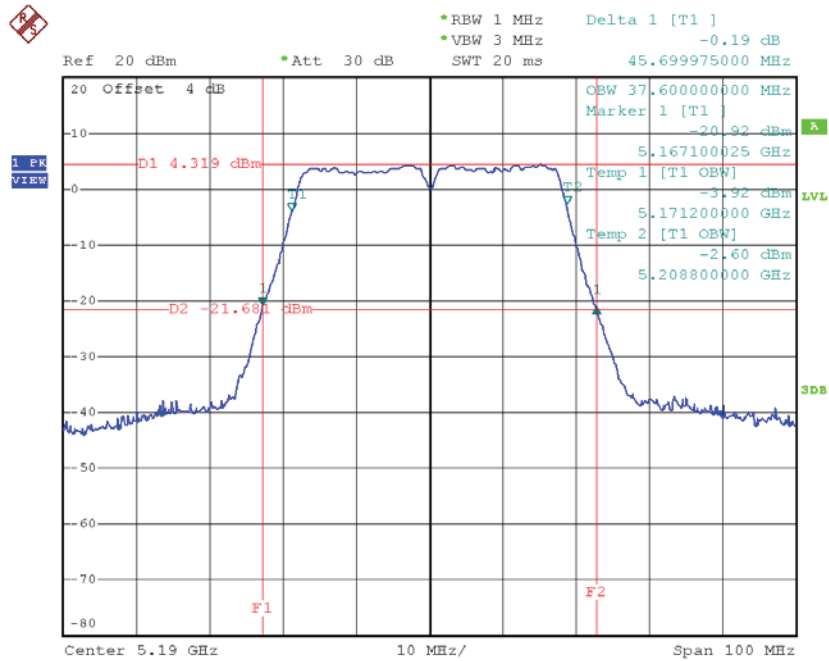

Date: 25.NOV.2016 14:15:49

TX CH46

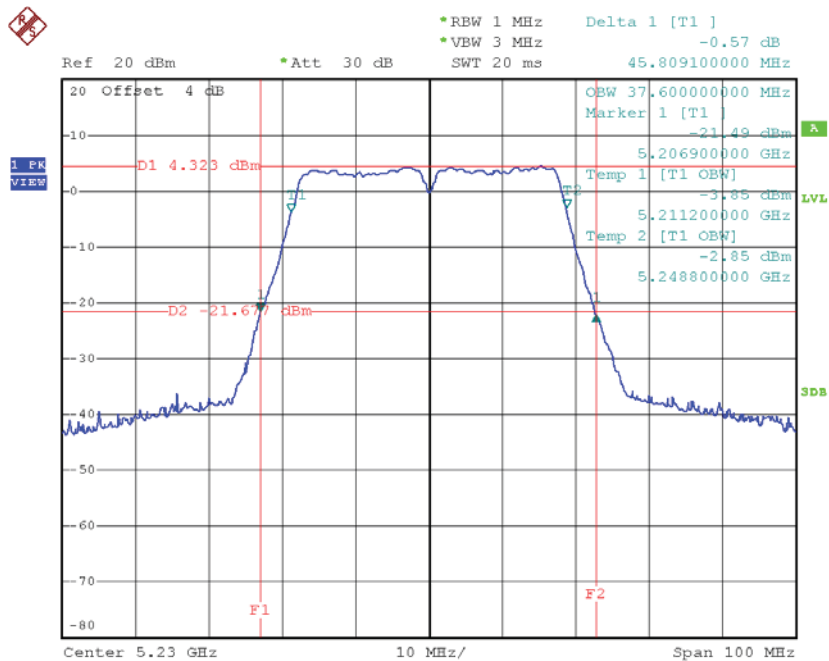


Date: 25.NOV.2016 14:17:15

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 16.70 | 16.60 | >=500 |
| CH157 | 5785 | 16.55 | 16.50 | >=500 |
| CH165 | 5825 | 16.61 | 16.50 | >=500 |

TX CH 149

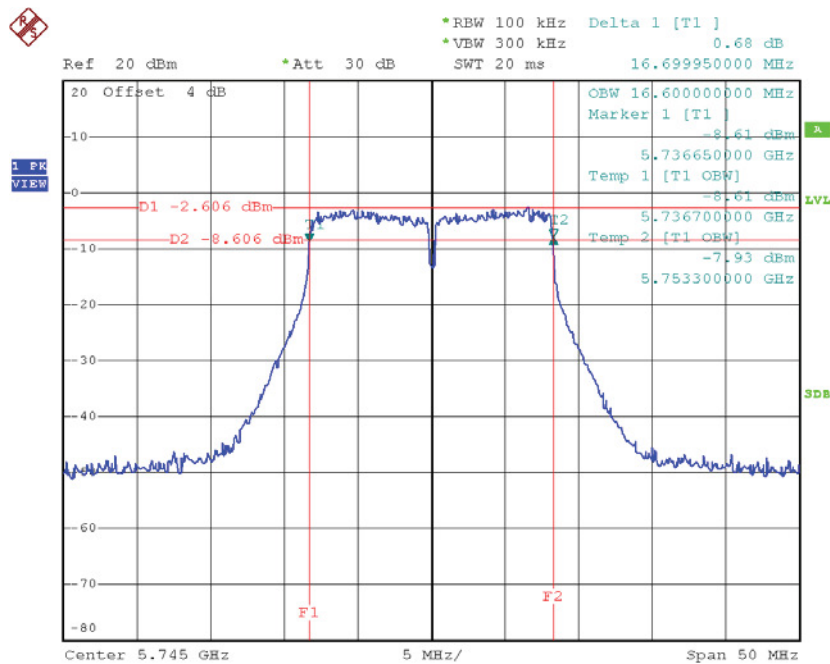


Date: 25.NOV.2016 13:47:23

TX CH 157

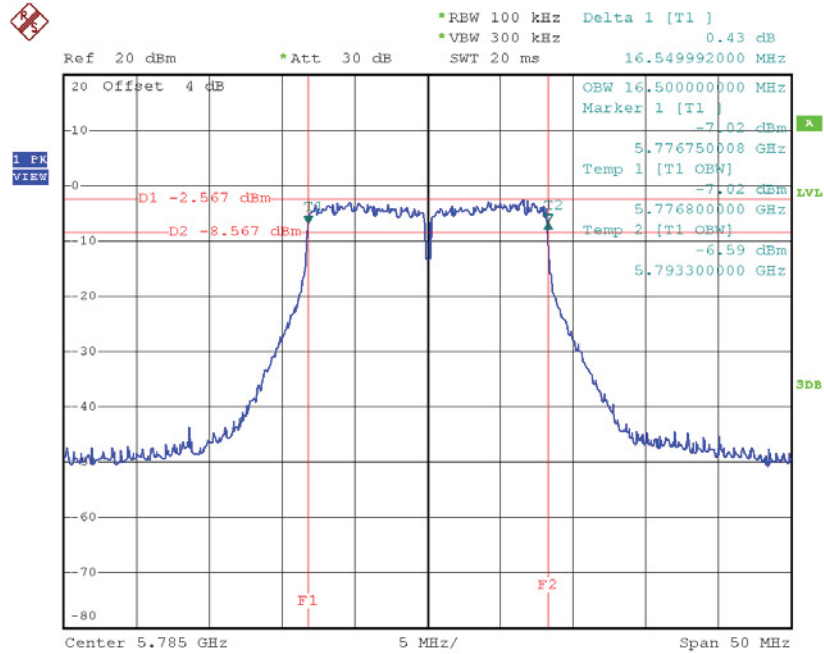

Date: 25.NOV.2016 13:48:21

TX CH 165

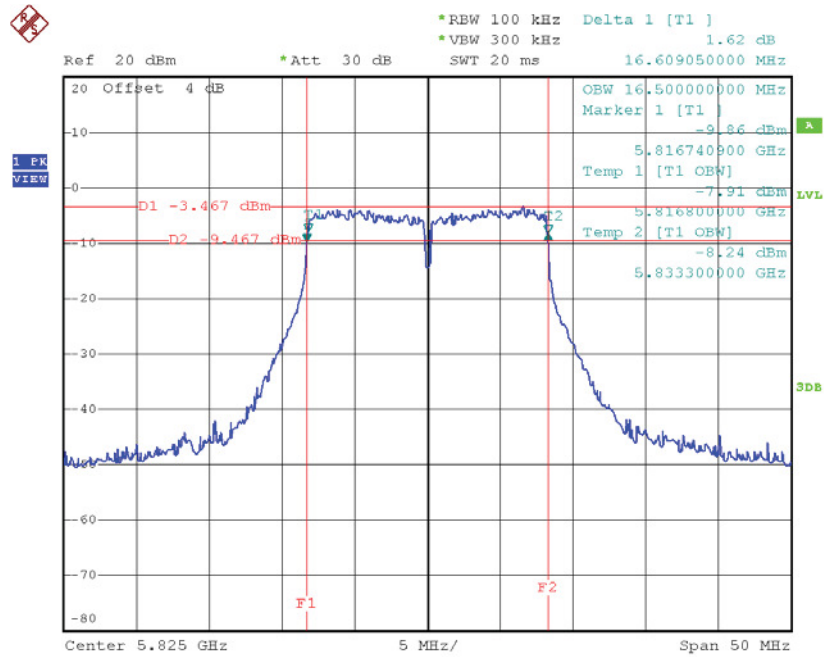


Date: 25.NOV.2016 13:49:25

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 17.85 | 17.70 | >=500 |
| CH157 | 5785 | 17.85 | 17.70 | >=500 |
| CH165 | 5825 | 17.81 | 17.70 | >=500 |

TX CH 149

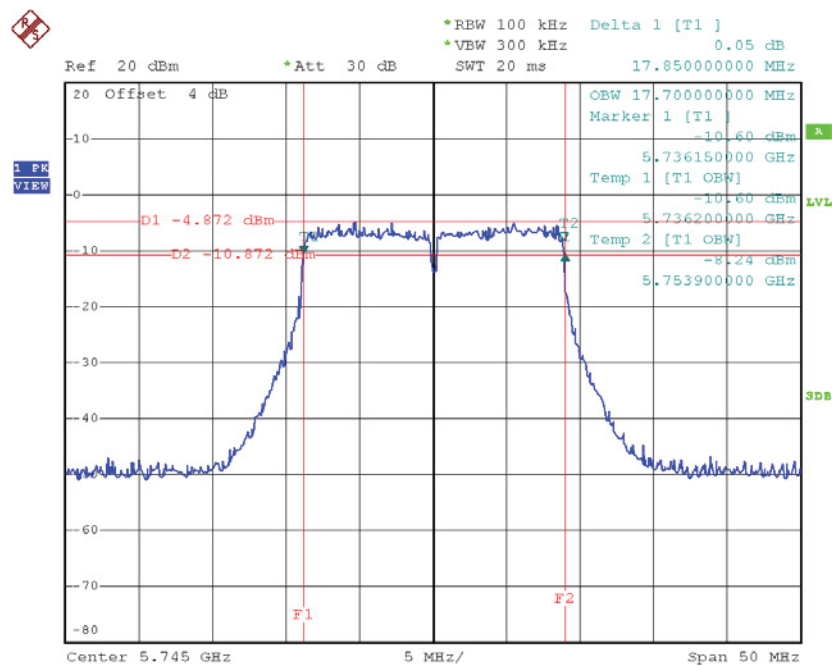


Date: 25.NOV.2016 14:00:33

TX CH 157

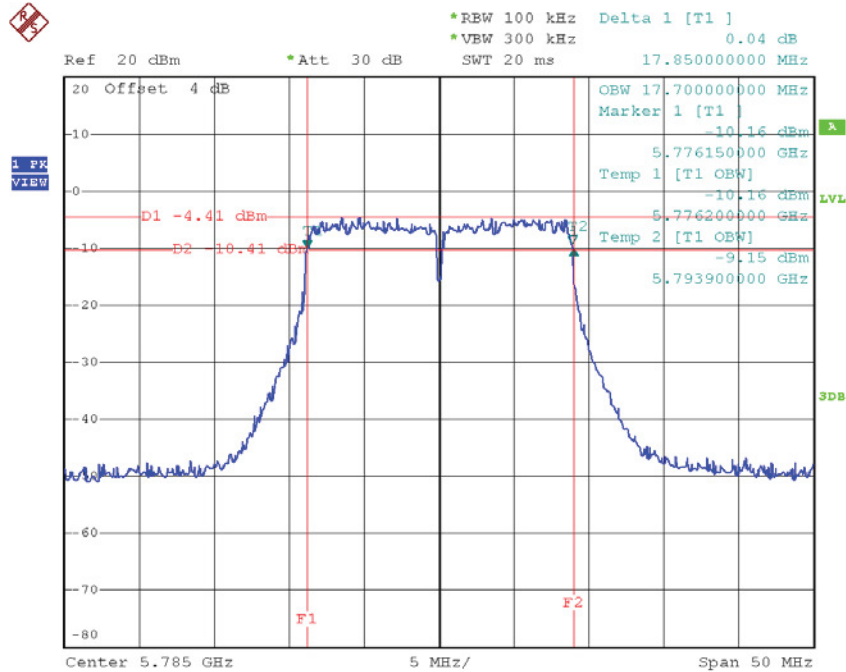

Date: 25.NOV.2016 14:01:33

TX CH 165

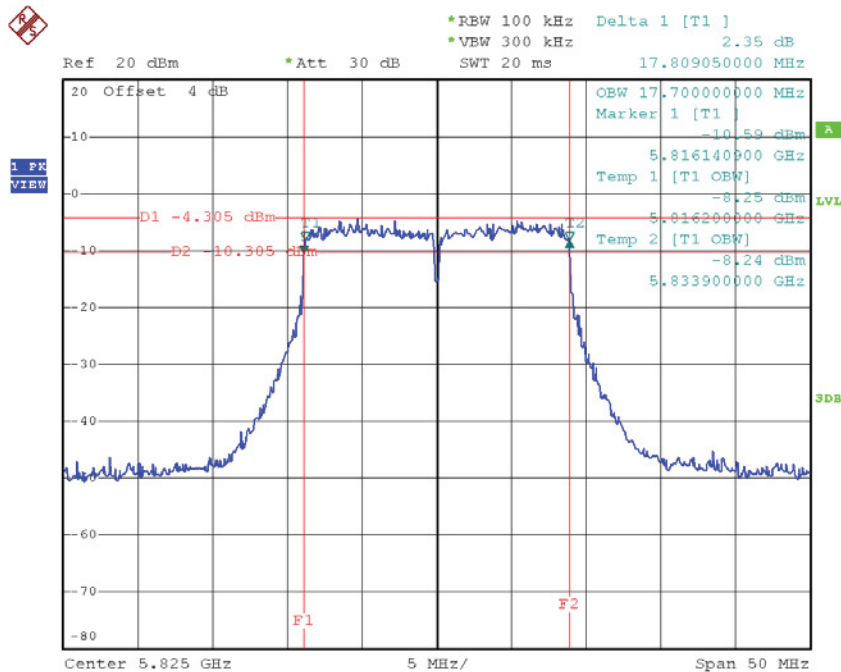


Date: 25.NOV.2016 14:02:36

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151 | 5755 | 36.70 | 36.40 | ≥ 500 |
| CH159 | 5795 | 36.70 | 36.40 | ≥ 500 |

TX CH 151

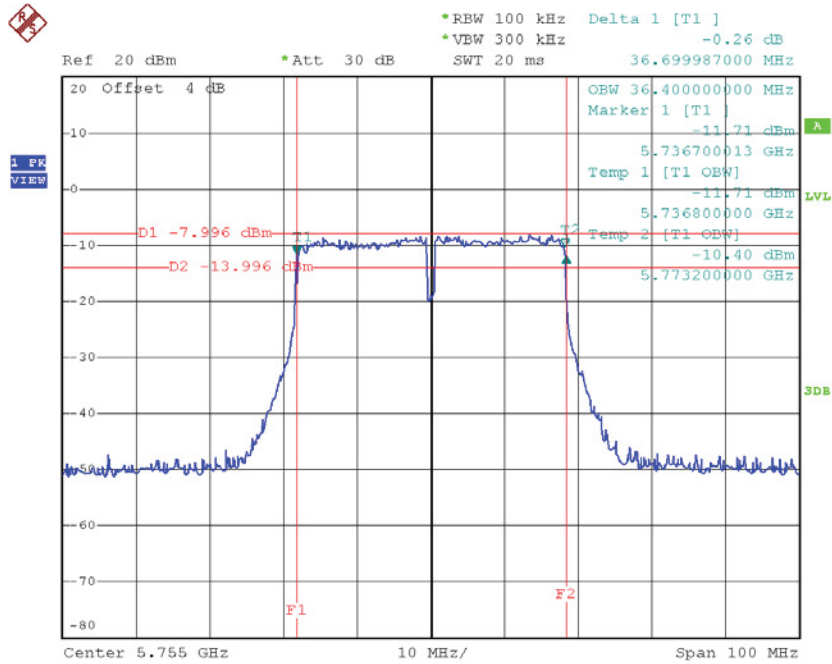

Date: 25.NOV.2016 14:18:26

TX CH 159

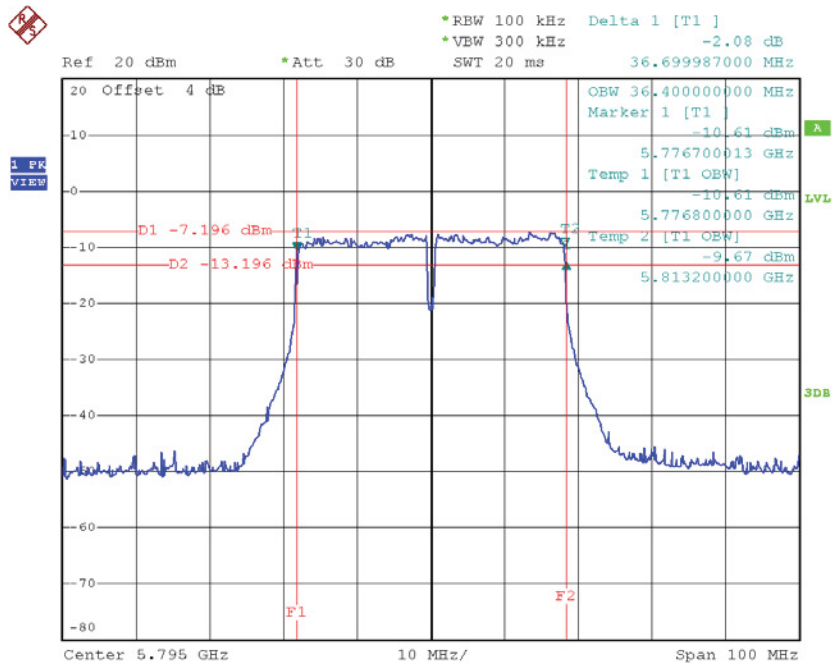


Date: 25.NOV.2016 14:19:32

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH36 | 5180 | 22.35 | 18.10 |
| CH40 | 5200 | 22.29 | 18.10 |
| CH48 | 5240 | 22.39 | 18.10 |

TX CH36

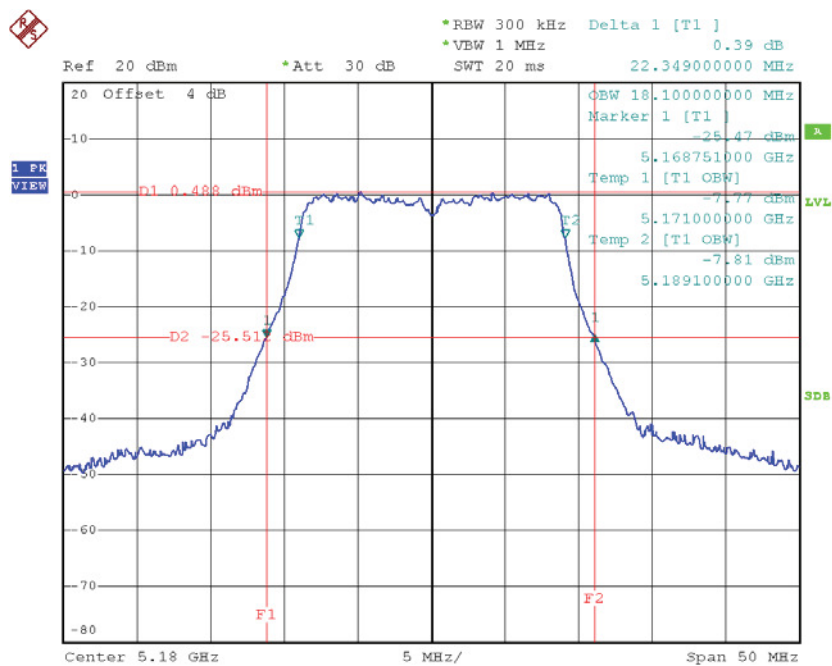


Date: 25.NOV.2016 14:05:17

TX CH40

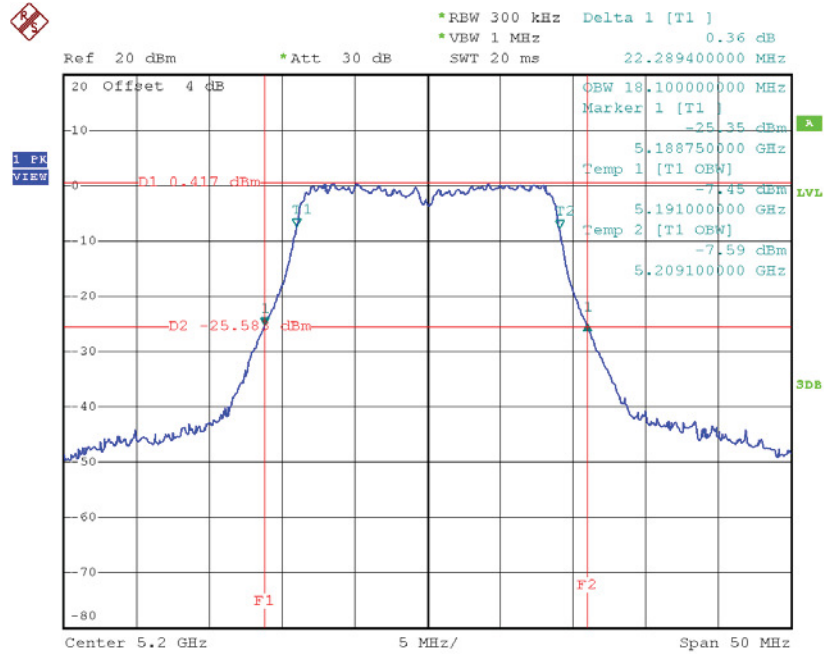

Date: 25.NOV.2016 14:06:22

TX CH48

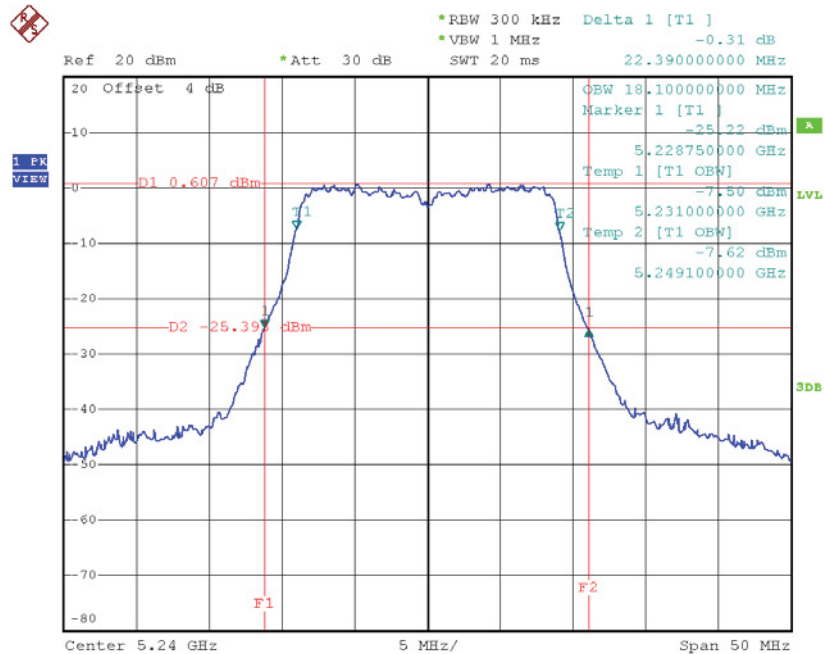


Date: 25.NOV.2016 14:07:21

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH38 | 5190 | 45.59 | 37.40 |
| CH46 | 5230 | 45.79 | 37.60 |

TX CH38

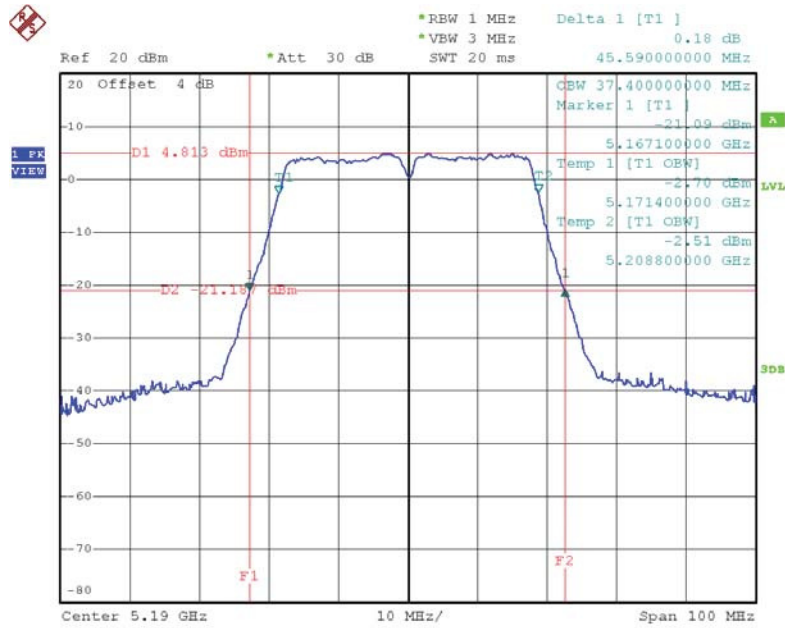

Date: 25.NOV.2016 14:42:50


TX CH46

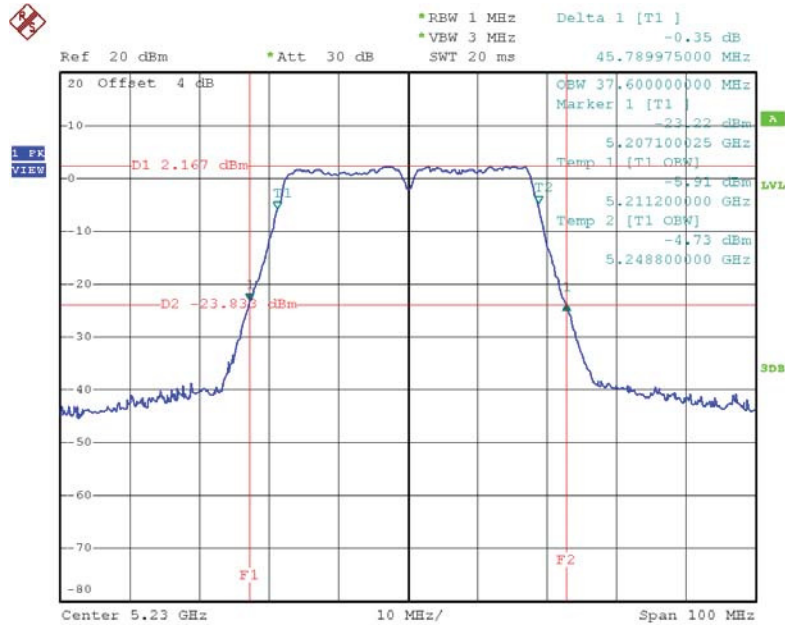

Date: 25.NOV.2016 14:44:23

Test Mode: UNII-1/TX AC80 Mode_CH42

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH42 | 5210 | 82.80 | 75.60 |

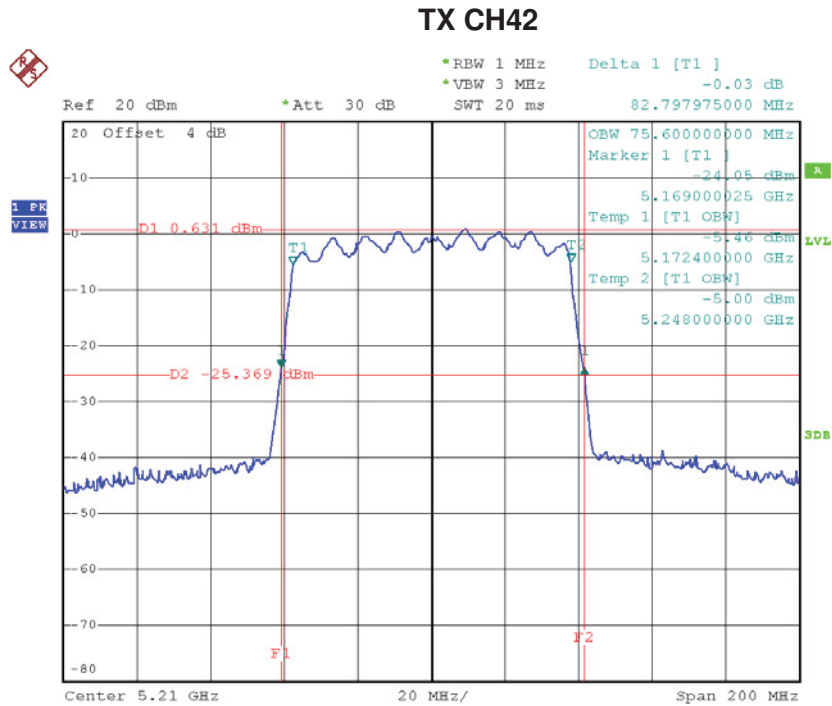


Date: 25.NOV.2016 14:56:40

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 17.85 | 17.70 | >=500 |
| CH157 | 5785 | 17.85 | 17.70 | >=500 |
| CH165 | 5825 | 17.90 | 17.70 | >=500 |

TX CH 149

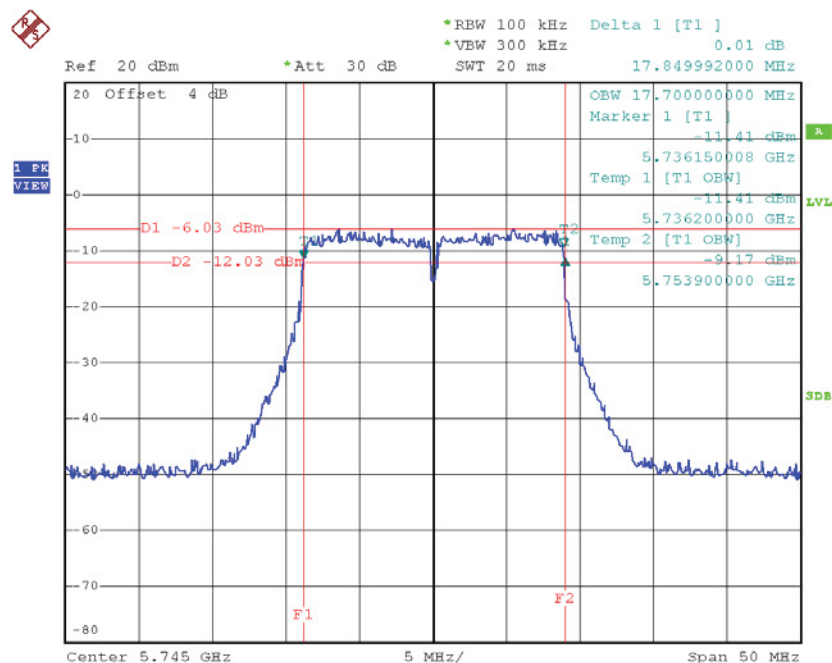


Date: 25.NOV.2016 14:09:44

TX CH 157

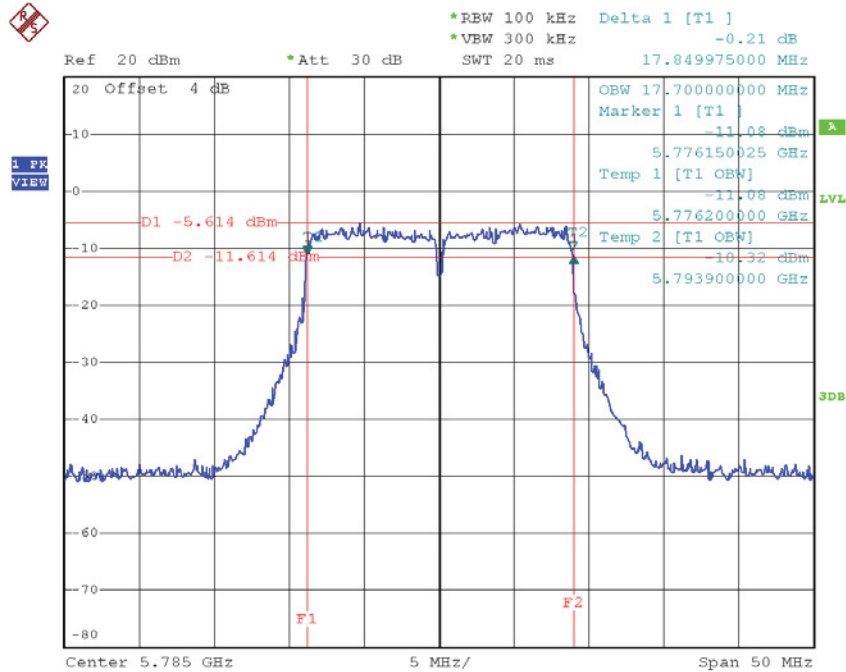

Date: 25.NOV.2016 14:10:59

TX CH 165

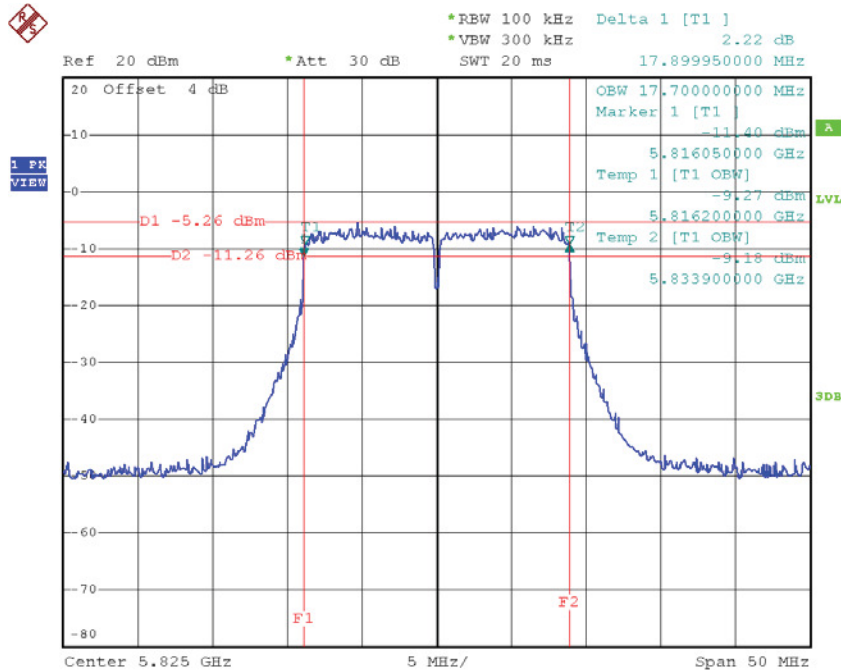


Date: 25.NOV.2016 14:14:15

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151 | 5755 | 36.70 | 36.40 | >=500 |
| CH159 | 5795 | 36.70 | 36.40 | >=500 |

TX CH 151

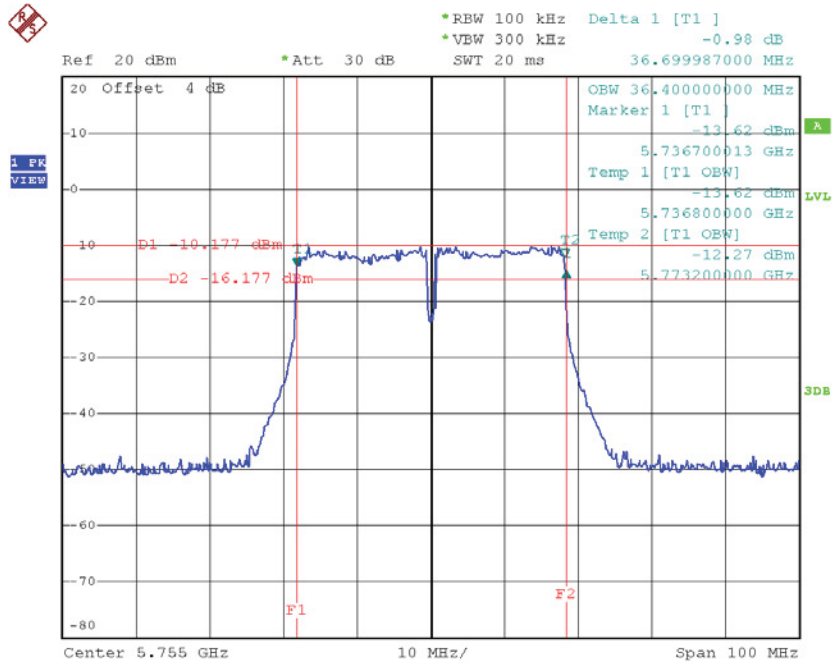

Date: 25.NOV.2016 14:52:04

TX CH 159

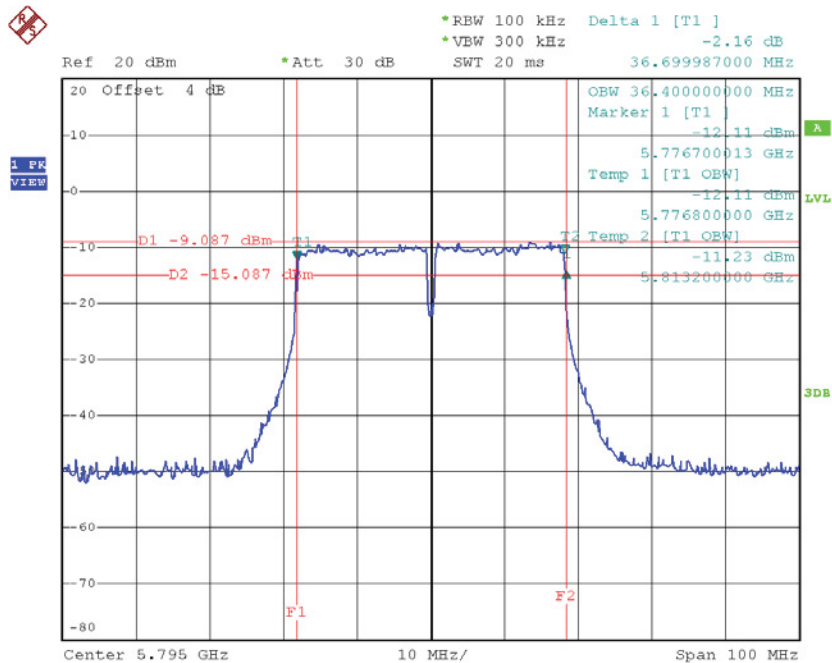


Date: 25.NOV.2016 14:53:56

Test Mode: UNII-3/ TX AC80 Mode_CH155

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH155 | 5775 | 75.00 | 75.60 | >=500 |

TX CH 155

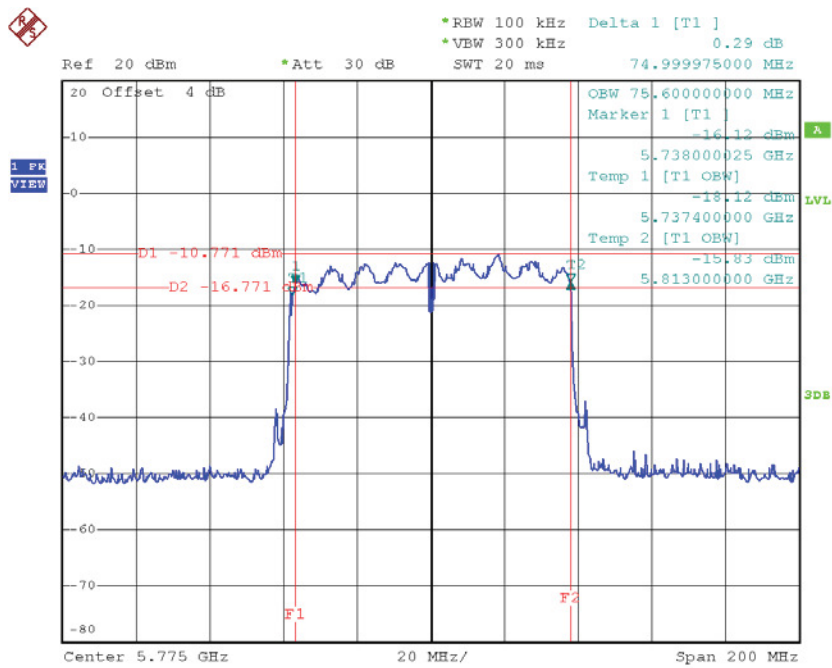

Date: 25.NOV.2016 14:58:20

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 10.88 | 0.00 | 10.88 | 30.00 | 1.00 |
| CH40 | 5200 | 10.91 | 0.00 | 10.91 | 30.00 | 1.00 |
| CH48 | 5240 | 10.82 | 0.00 | 10.82 | 30.00 | 1.00 |

Test Mode: UNII-1/TX N20 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 9.84 | 0.00 | 9.84 | 30.00 | 1.00 |
| CH40 | 5200 | 9.85 | 0.00 | 9.85 | 30.00 | 1.00 |
| CH48 | 5240 | 9.87 | 0.00 | 9.87 | 30.00 | 1.00 |

Test Mode: UNII-1/TX N40 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38 | 5190 | 9.74 | 0.00 | 9.74 | 30.00 | 1.00 |
| CH46 | 5230 | 9.69 | 0.00 | 9.69 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX A Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 10.84 | 0.00 | 10.84 | 30.00 | 1.00 |
| CH157 | 5785 | 10.91 | 0.00 | 10.91 | 30.00 | 1.00 |
| CH165 | 5825 | 10.85 | 0.00 | 10.85 | 30.00 | 1.00 |

Test Mode: UNII-3/TX N20 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 9.78 | 0.00 | 9.78 | 30.00 | 1.00 |
| CH157 | 5785 | 9.86 | 0.00 | 9.86 | 30.00 | 1.00 |
| CH165 | 5825 | 9.82 | 0.00 | 9.82 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX N40 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151 | 5755 | 9.88 | 0.00 | 9.88 | 30.00 | 1.00 |
| CH159 | 5795 | 9.94 | 0.00 | 9.94 | 30.00 | 1.00 |

Test Mode: UNII-1/TX AC20 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 8.68 | 0.00 | 8.68 | 30.00 | 1.00 |
| CH40 | 5200 | 8.89 | 0.00 | 8.89 | 30.00 | 1.00 |
| CH48 | 5240 | 8.86 | 0.00 | 8.86 | 30.00 | 1.00 |

Test Mode: UNII-1/TX AC40 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38 | 5190 | 7.81 | 0.00 | 7.81 | 30.00 | 1.00 |
| CH46 | 5230 | 7.92 | 0.00 | 7.92 | 30.00 | 1.00 |

Test Mode: UNII-1/TX AC80 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42 | 5210 | 7.88 | 0.00 | 7.88 | 30.00 | 1.00 |

Test Mode: UNII-3/TX AC20 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 8.67 | 0.00 | 8.67 | 30.00 | 1.00 |
| CH157 | 5785 | 8.78 | 0.00 | 8.78 | 30.00 | 1.00 |
| CH165 | 5825 | 8.54 | 0.00 | 8.54 | 30.00 | 1.00 |

Test Mode: UNII-3/TX AC40 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151 | 5755 | 7.83 | 0.00 | 7.83 | 30.00 | 1.00 |
| CH159 | 5795 | 7.55 | 0.00 | 7.55 | 30.00 | 1.00 |


Test Mode: UNII-3/TX AC80 Mode

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155 | 5775 | 7.82 | 0.00 | 7.82 | 30.00 | 1.00 |

ATTACHMENT G - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36 | 5180 | 0.64 | 0.00 | 0.64 | 17.00 |
| CH40 | 5200 | 0.42 | 0.00 | 0.42 | 17.00 |
| CH48 | 5240 | 0.05 | 0.00 | 0.05 | 17.00 |

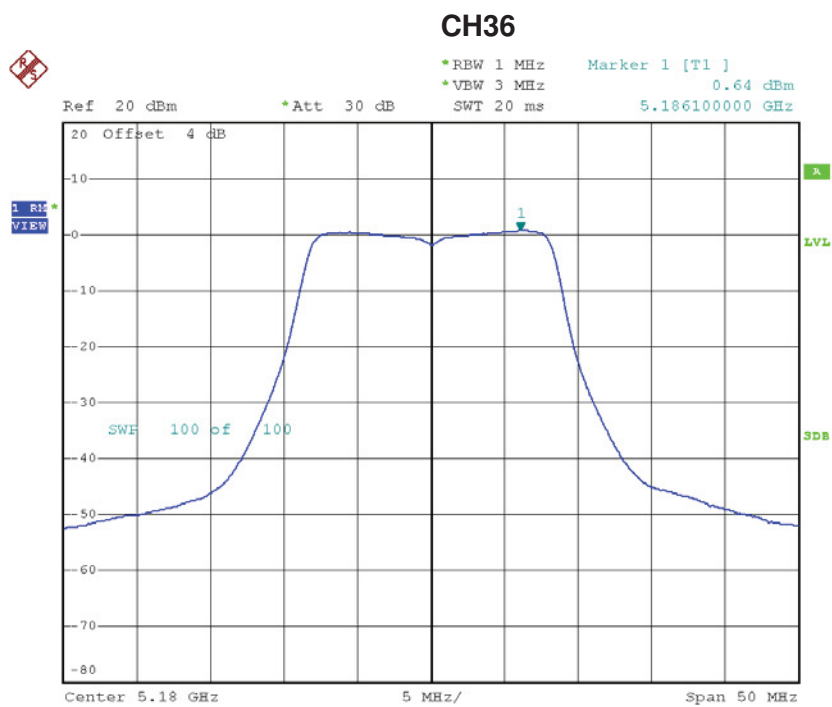


Date: 25.NOV.2016 13:43:24

CH40

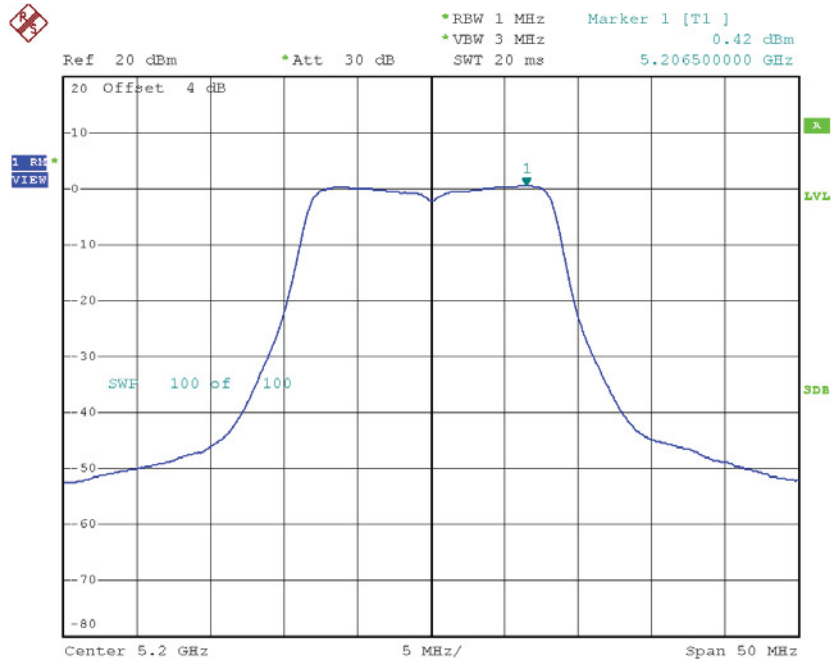

Date: 25.NOV.2016 13:44:40


CH48

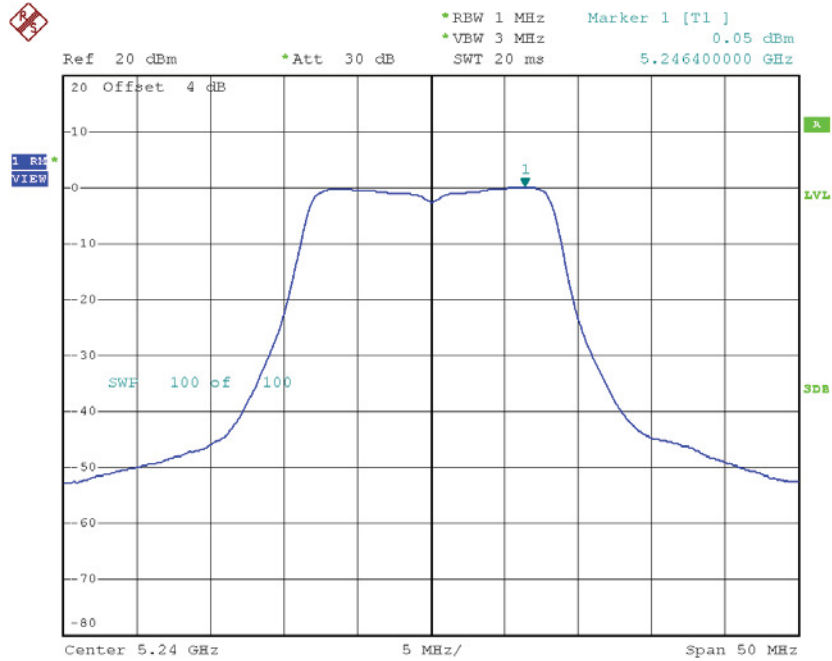

Date: 25.NOV.2016 13:45:41


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36 | 5180 | -1.59 | 0.00 | -1.59 | 17.00 |
| CH40 | 5200 | -1.01 | 0.00 | -1.01 | 17.00 |
| CH48 | 5240 | -1.30 | 0.00 | -1.30 | 17.00 |

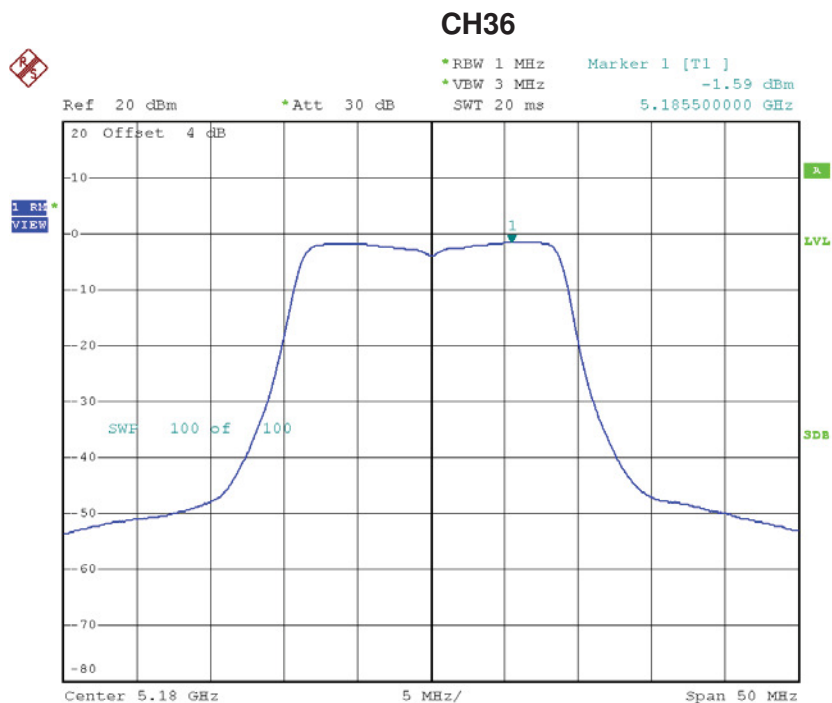


Date: 25.NOV.2016 13:51:33

CH40

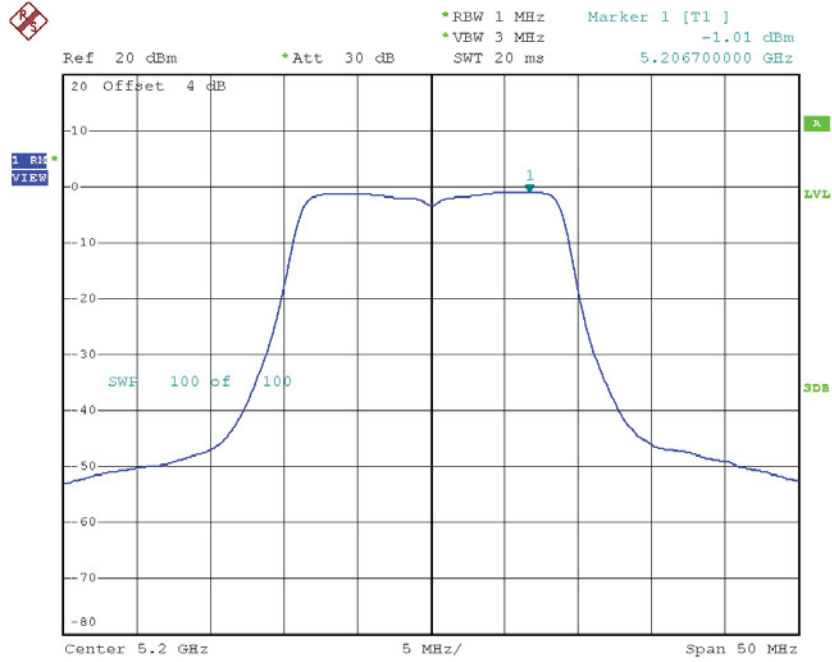

Date: 25.NOV.2016 13:53:01

CH48

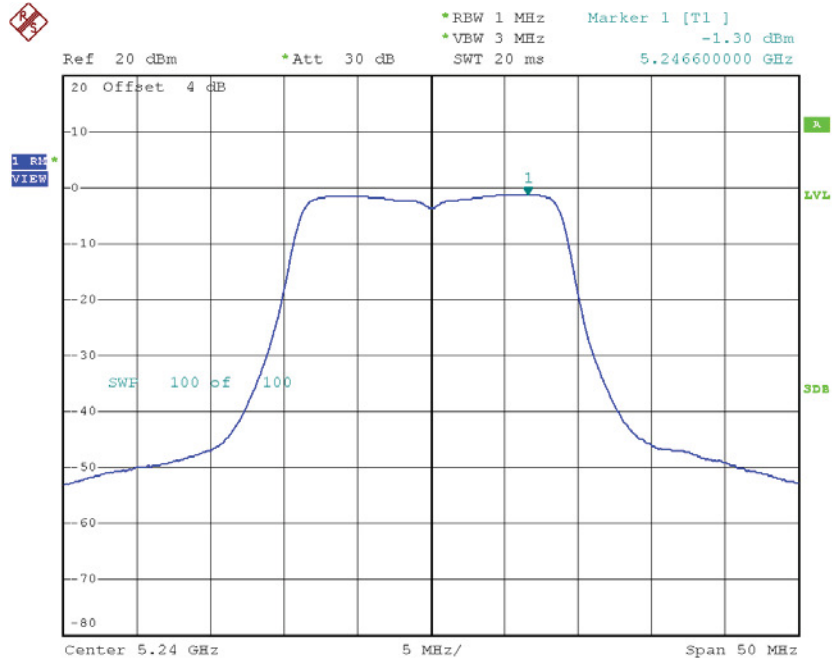


Date: 25.NOV.2016 13:54:05

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---|--------------------|
| CH38 | 5190 | -4.38 | 0.00 | -4.38 | 17.00 |
| CH46 | 5230 | -4.33 | 0.00 | -4.33 | 17.00 |

CH38

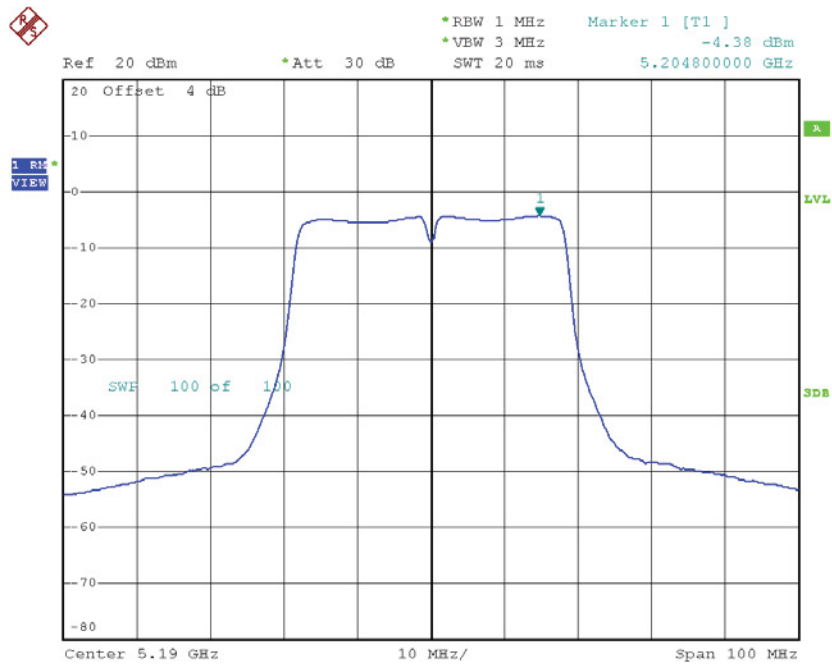

Date: 25.NOV.2016 14:16:02

CH46

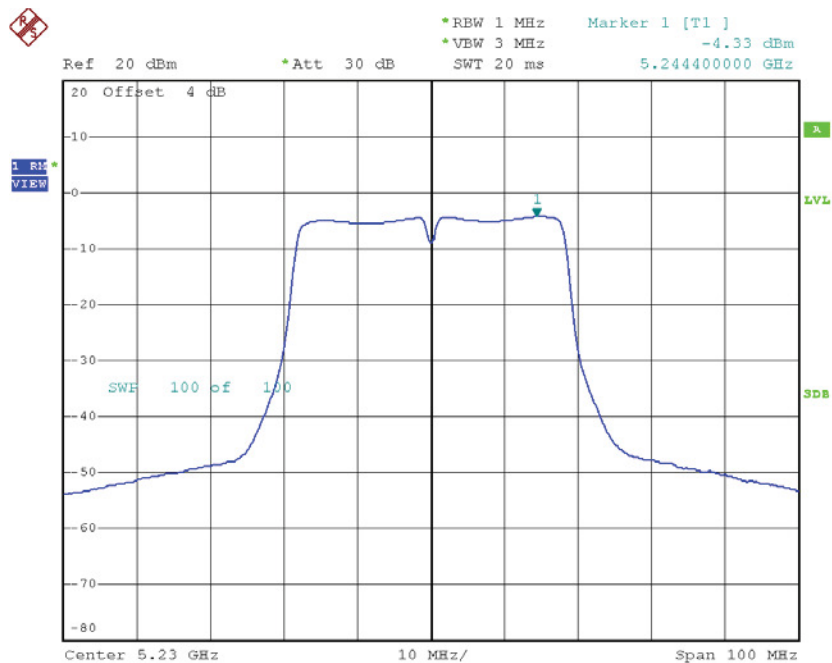


Date: 25.NOV.2016 14:17:27

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149 | 5745 | -2.29 | 0.00 | -2.29 | 30.00 |
| CH157 | 5785 | -2.75 | 0.00 | -2.75 | 30.00 |
| CH165 | 5825 | -3.55 | 0.00 | -3.55 | 30.00 |

TX CH149

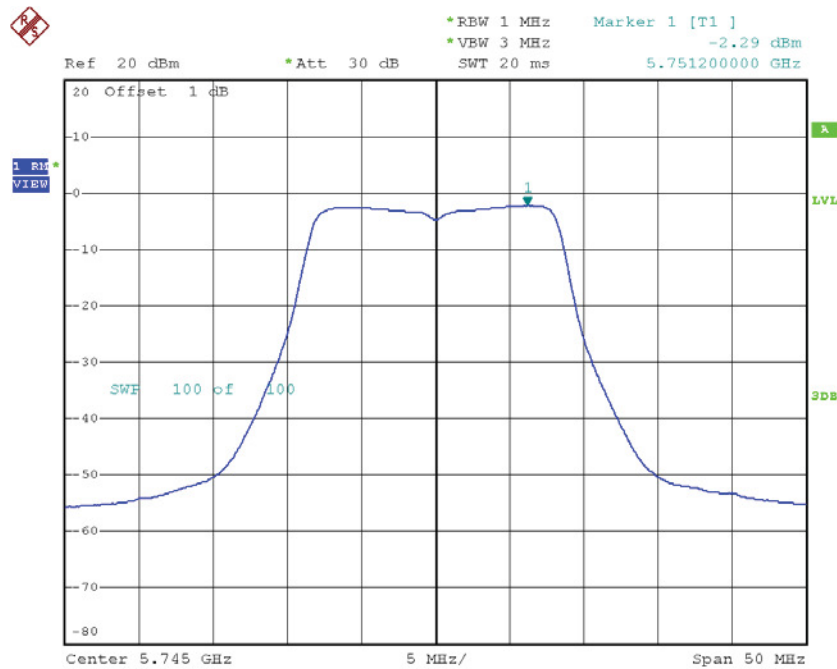


Date: 25.NOV.2016 13:46:52

TX CH157

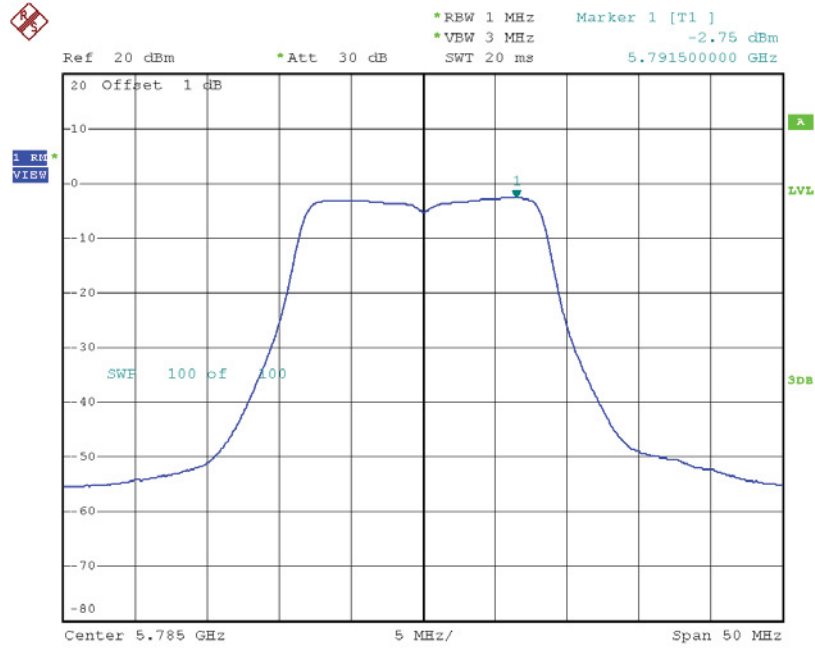

Date: 25.NOV.2016 13:48:31

TX CH165

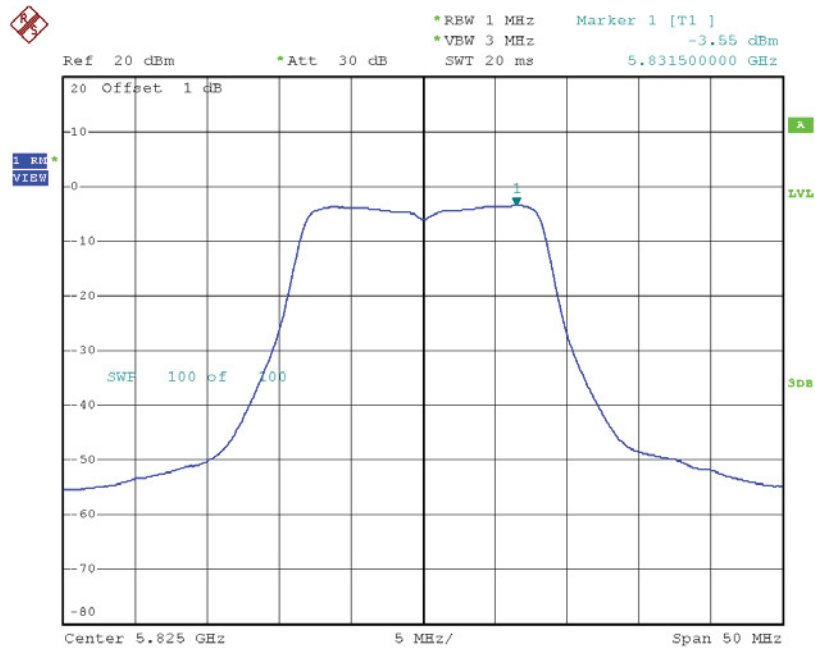


Date: 25.NOV.2016 13:49:35

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149 | 5745 | -5.17 | 0.00 | -5.17 | 30.00 |
| CH157 | 5785 | -4.61 | 0.00 | -4.61 | 30.00 |
| CH165 | 5825 | -5.05 | 0.00 | -5.05 | 30.00 |

TX CH149

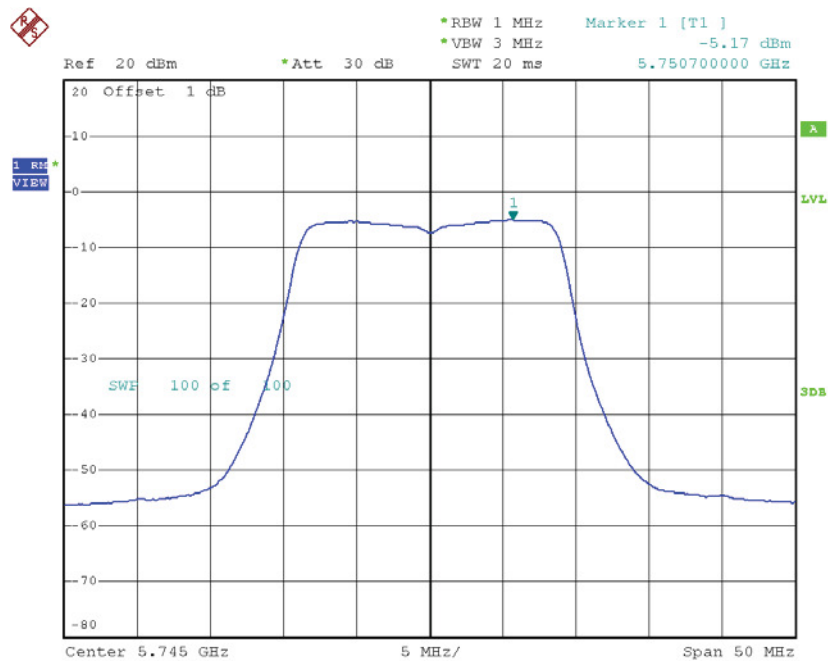


Date: 25.NOV.2016 14:00:43

TX CH157

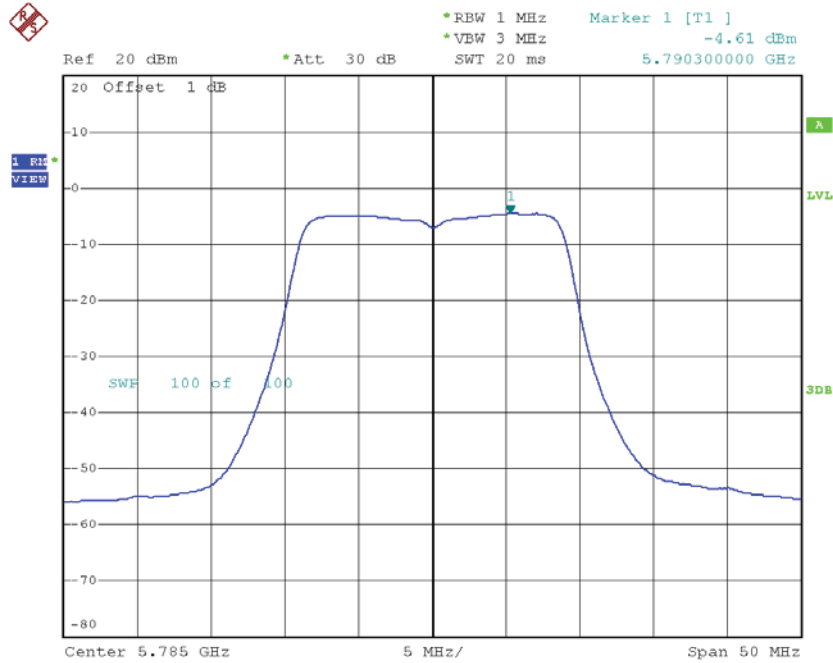

Date: 25.NOV.2016 14:01:42

TX CH165

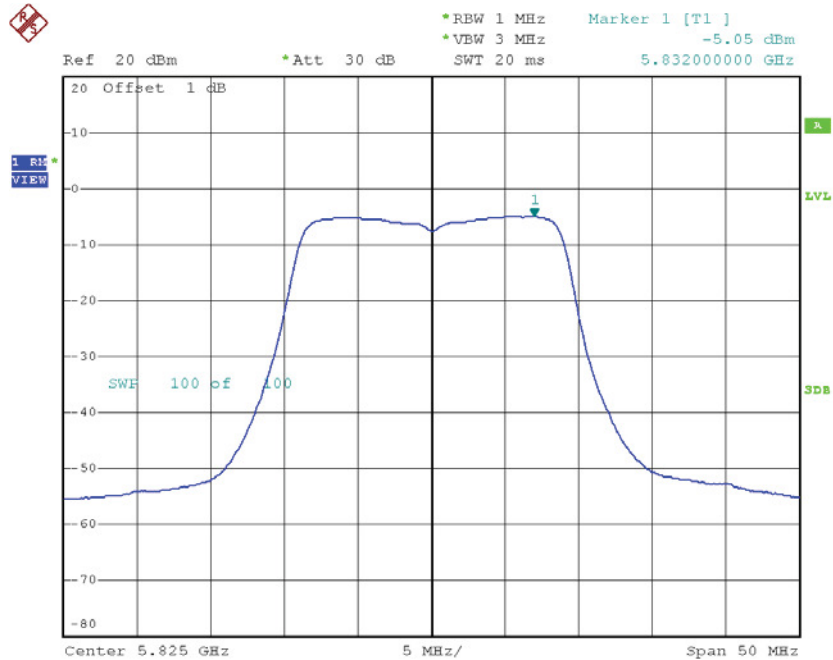


Date: 25.NOV.2016 14:02:45

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|--------------------|-------------------------------|-------------|--|-----------------------|
| CH151 | 5755 | -8.08 | 0.00 | -8.08 | 30.00 |
| CH159 | 5795 | -7.47 | 0.00 | -7.47 | 30.00 |

TX CH151

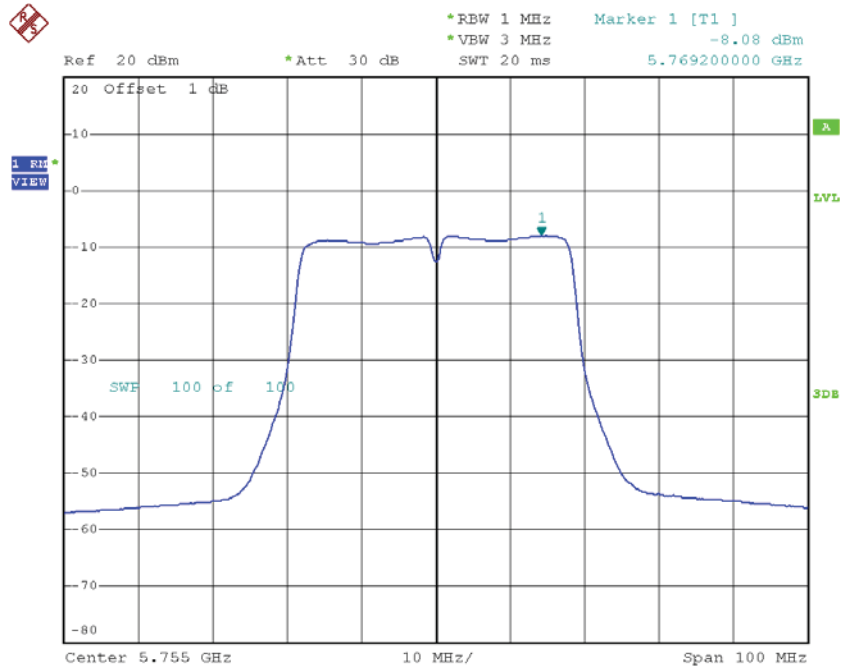

Date: 25.NOV.2016 14:18:38


TX CH159

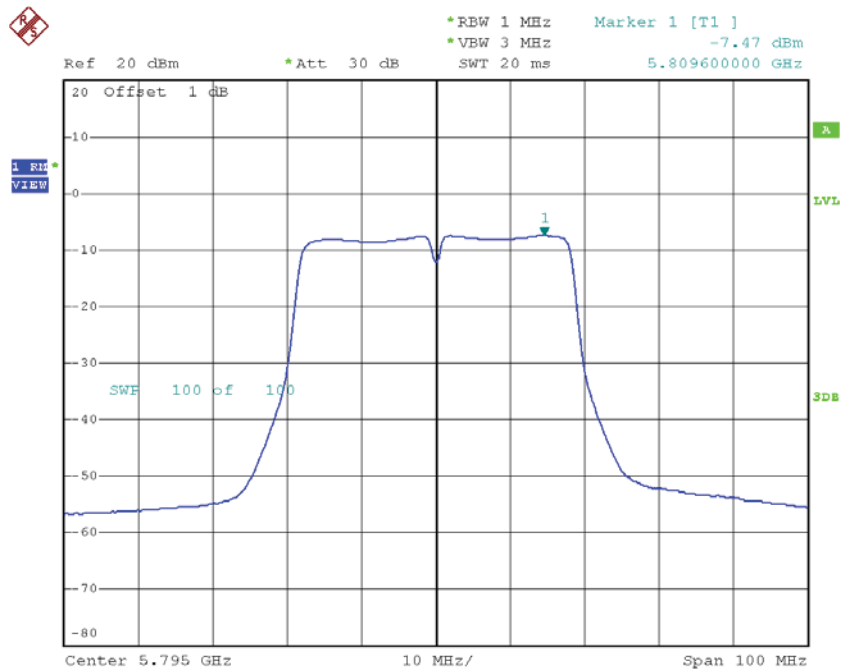

Date: 25.NOV.2016 14:19:45


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36 | 5180 | -2.47 | 0.00 | -2.47 | 17.00 |
| CH40 | 5200 | -2.54 | 0.00 | -2.54 | 17.00 |
| CH48 | 5240 | -2.30 | 0.00 | -2.30 | 17.00 |

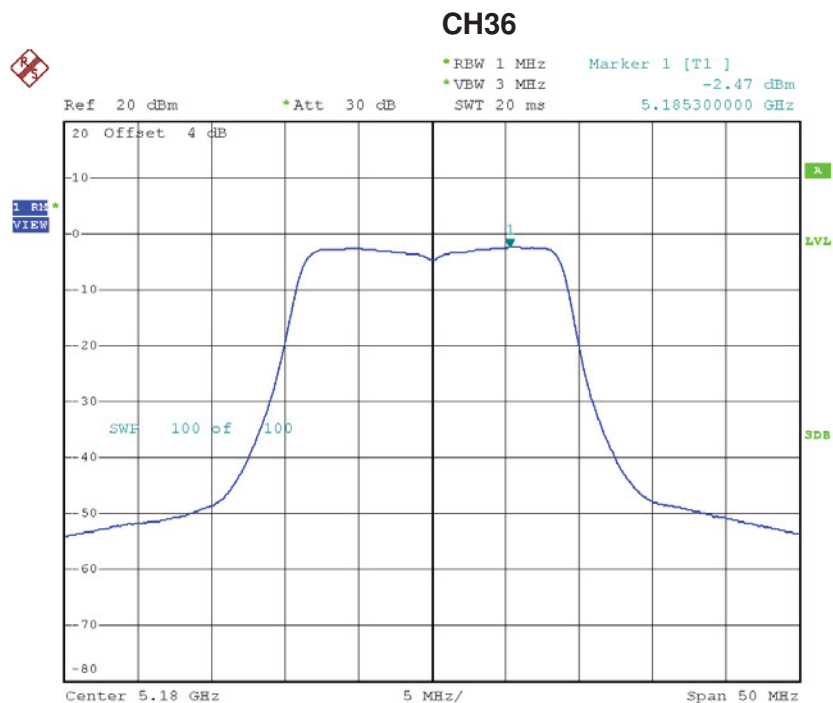


Date: 25.NOV.2016 14:05:27

CH40

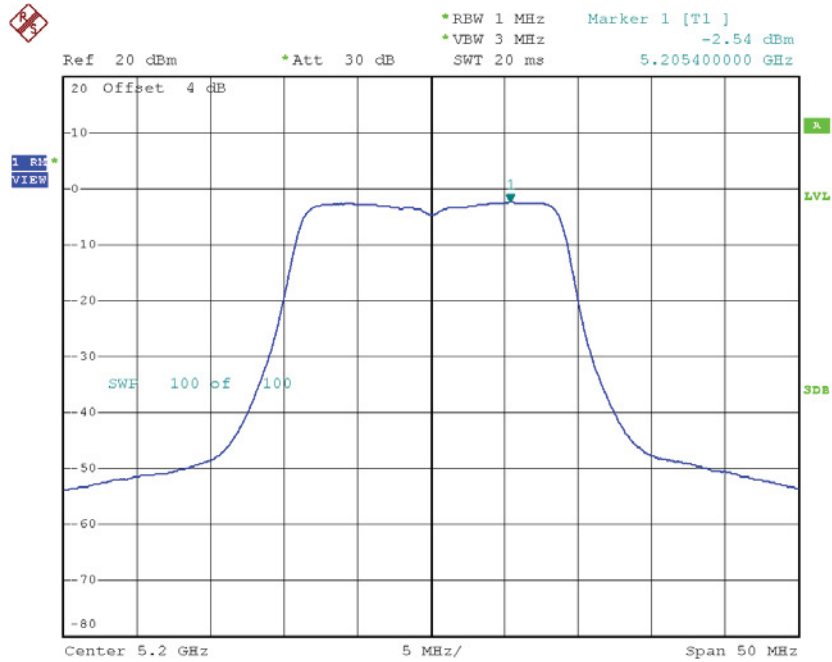

Date: 25.NOV.2016 14:06:32

CH48

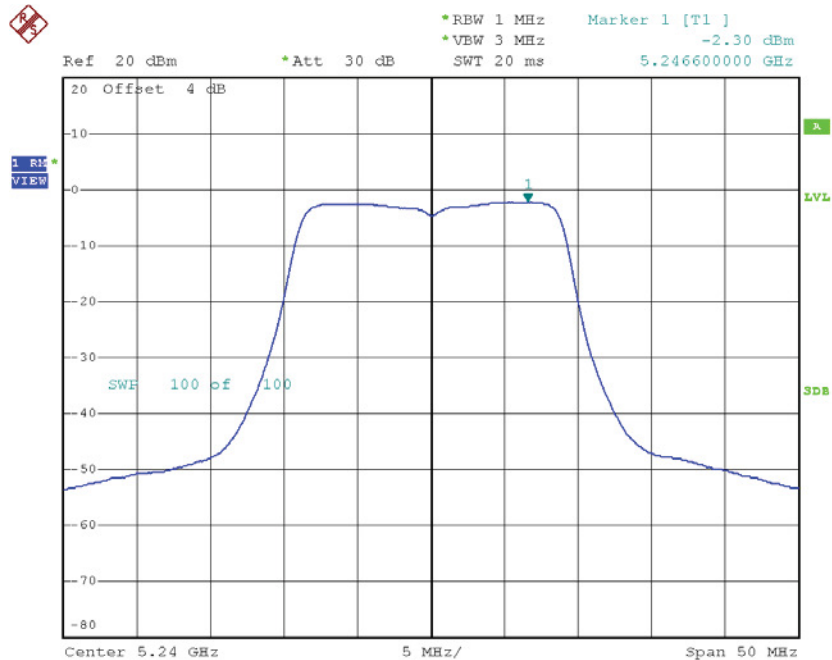


Date: 25.NOV.2016 14:07:31

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---|--------------------|
| CH38 | 5190 | -3.95 | 0.00 | -3.95 | 17.00 |
| CH46 | 5230 | -6.41 | 0.00 | -6.41 | 17.00 |

CH38

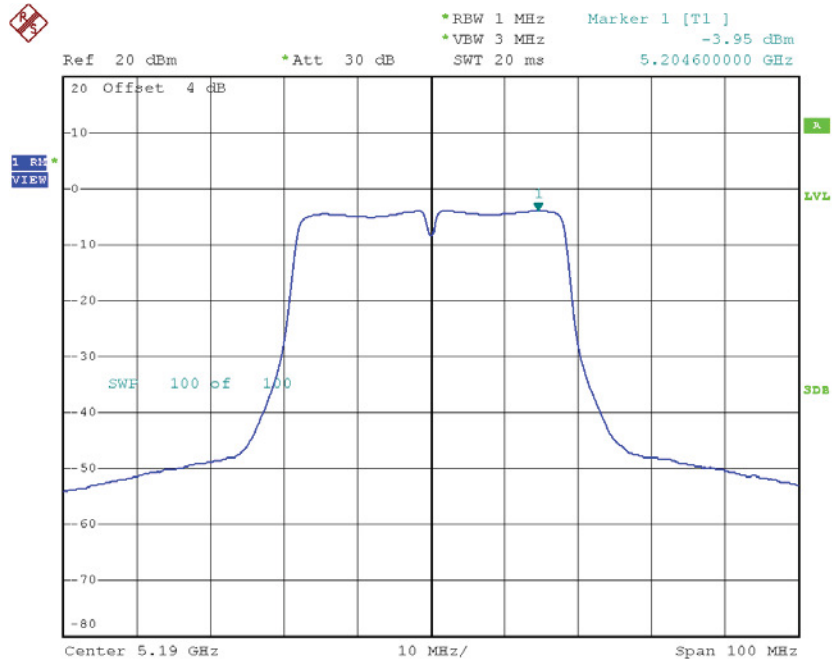

Date: 25.NOV.2016 14:43:02


CH46

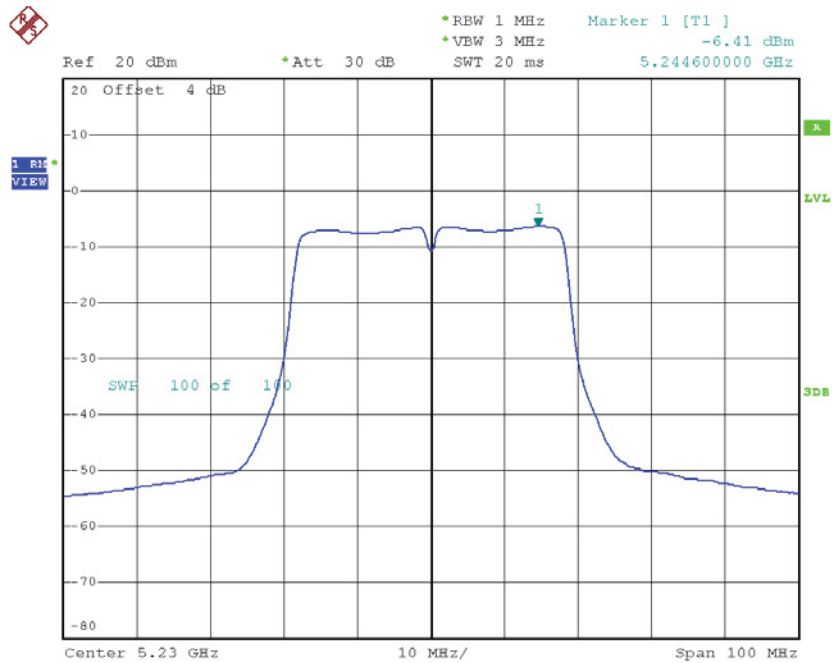

Date: 25.NOV.2016 14:44:35

Test Mode: UNII-1/TX AC80 Mode_CH42

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH42 | 5210 | -7.98 | 0.00 | -7.98 | 17.00 |

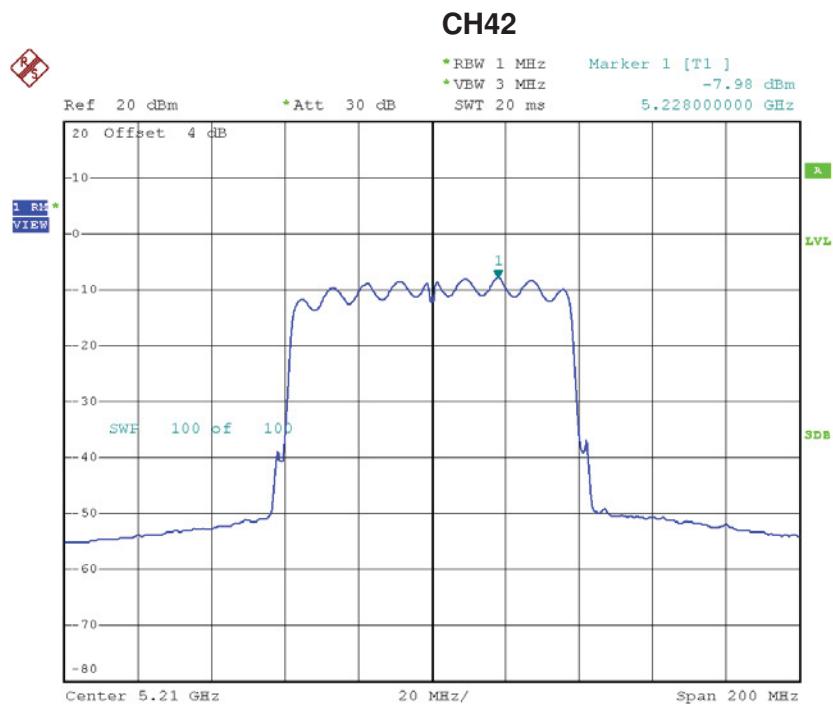


Date: 25.NOV.2016 14:56:52

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH149 | 5745 | -6.30 | 0.00 | -6.30 | 30.00 |
| CH157 | 5785 | -5.96 | 0.00 | -5.96 | 30.00 |
| CH165 | 5825 | -6.04 | 0.00 | -6.04 | 30.00 |

TX CH149

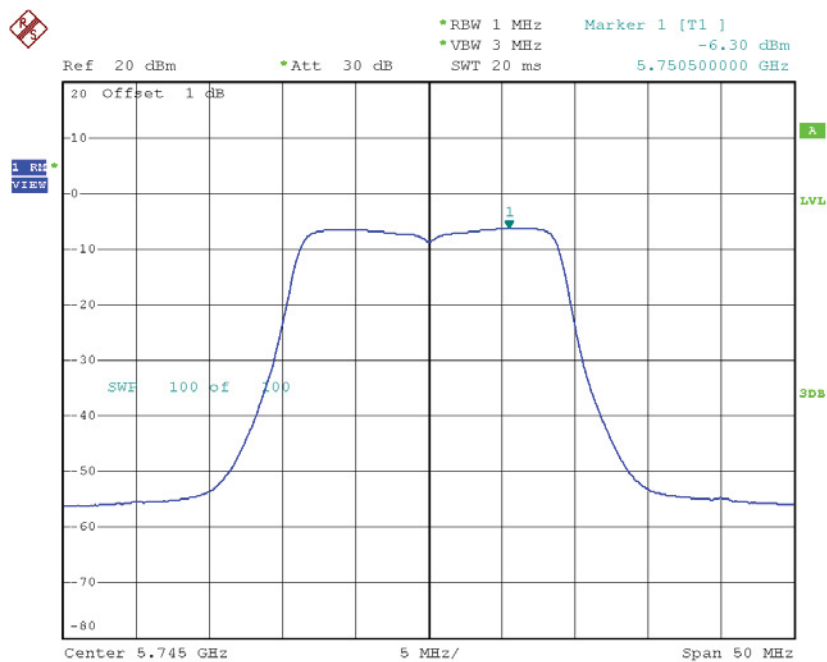


Date: 25.NOV.2016 14:09:53

TX CH157

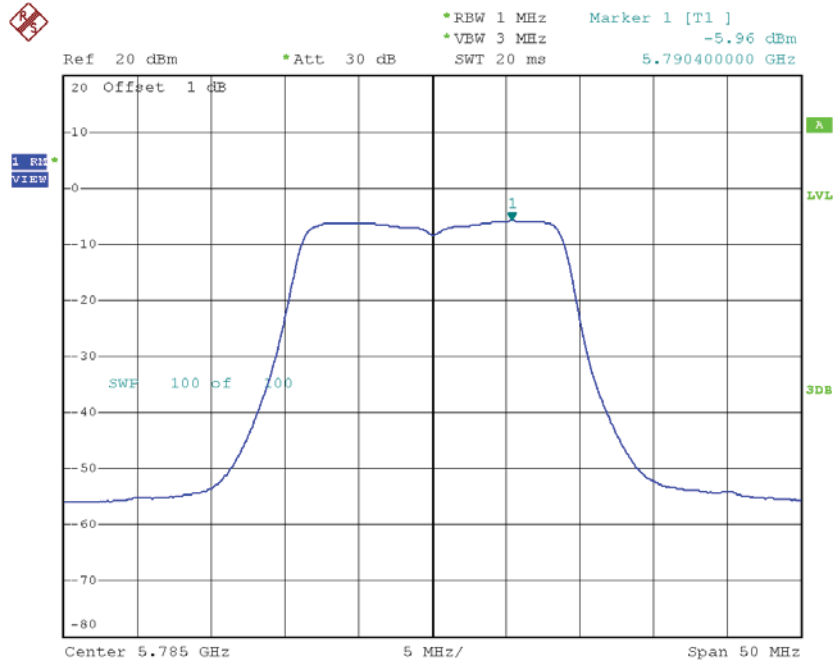

Date: 25.NOV.2016 14:11:08

TX CH165

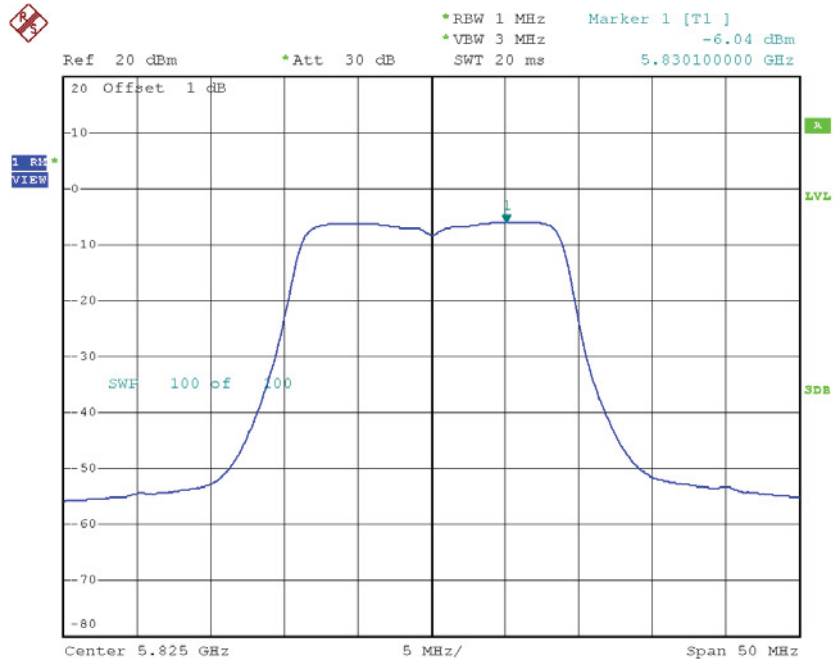


Date: 25.NOV.2016 14:14:25

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|--------------------|-------------------------------|-------------|--|-----------------------|
| CH151 | 5755 | -9.94 | 0.00 | -9.94 | 30.00 |
| CH159 | 5795 | -8.91 | 0.00 | -8.91 | 30.00 |

TX CH151

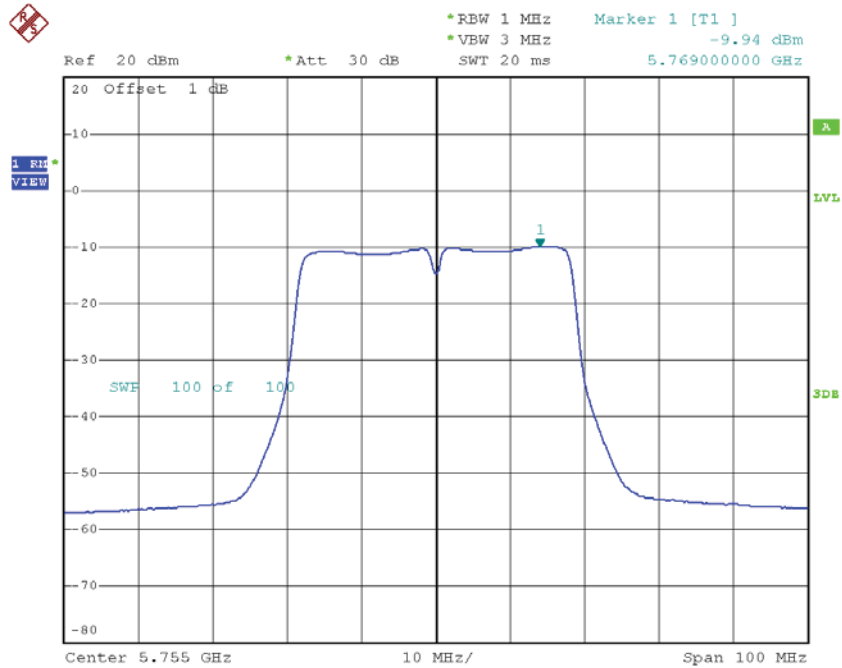

Date: 25.NOV.2016 14:52:16

TX CH159

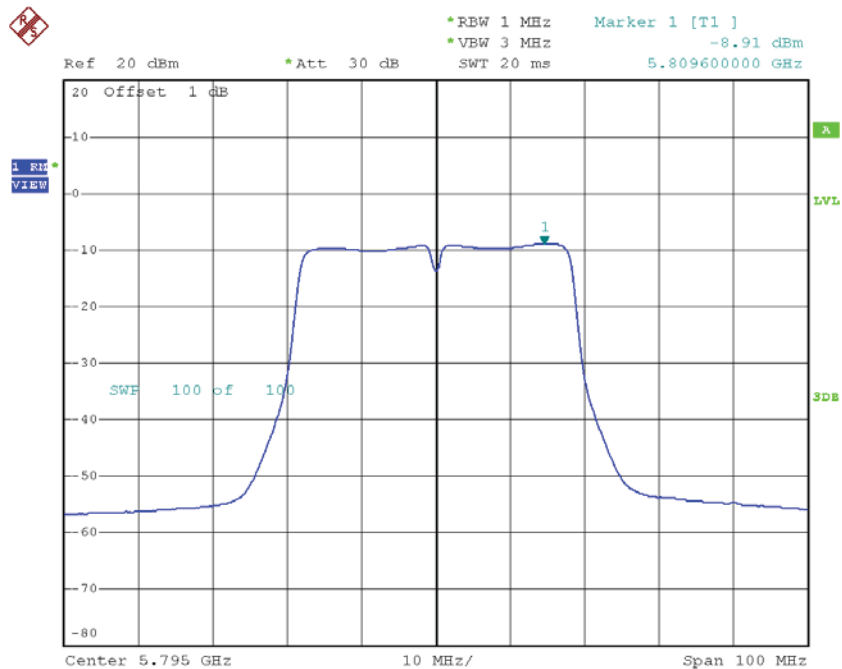


Date: 25.NOV.2016 14:54:08

Test Mode: UNII-3/ TX AC80 Mode_CH155

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|--|--------------------|
| CH155 | 5775 | -11.40 | 0.00 | -11.40 | 30.00 |

TX CH155

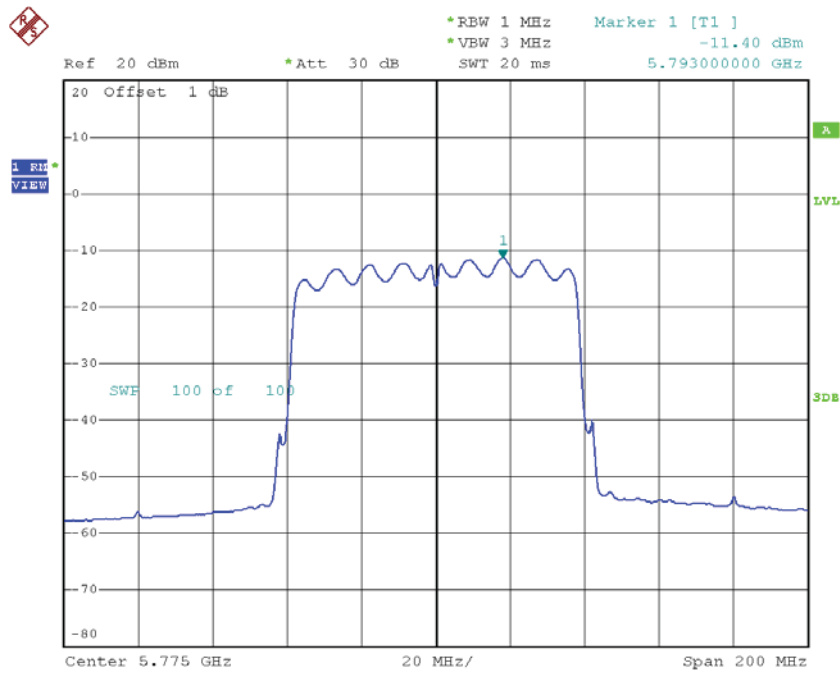

Date: 25.NOV.2016 14:58:32

ATTACHMENT H - FREQUENCY STABILITY

| | |
|------------|--------|
| Test Mode: | UNII-1 |
|------------|--------|

Voltage vs. Frequency Stability

| Voltage | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (V) | 5180.0000 |
| 132 | 5180.0350 |
| 120 | 5180.0400 |
| 108 | 5180.0350 |
| Max. Deviation (MHz) | 0.0350 |
| Max. Deviation (ppm) | 6.7568 |

Temperature vs. Frequency Stability

| Voltage | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (°C) | 5180.0000 |
| -5 | 5180.0400 |
| 5 | 5180.0400 |
| 15 | 5180.0400 |
| 25 | 5180.0400 |
| 35 | 5180.0551 |
| 45 | 5180.0400 |
| 50 | 5180.0400 |
| Max. Deviation (MHz) | 0.0551 |
| Max. Deviation (ppm) | 10.6371 |

| | |
|------------|--------|
| Test Mode: | UNII-3 |
|------------|--------|

Voltage vs. Frequency Stability

| Voltage | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (V) | 5745.0000 |
| 132 | 5745.0400 |
| 120 | 5745.0400 |
| 108 | 5745.0400 |
| Max. Deviation (MHz) | 0.0400 |
| Max. Deviation (ppm) | 6.9626 |

Temperature vs. Frequency Stability

| Voltage | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (°C) | 5745.0000 |
| -5 | 5745.0350 |
| 5 | 5745.0400 |
| 15 | 5745.0600 |
| 25 | 5745.0400 |
| 35 | 5745.0550 |
| 45 | 5745.0350 |
| 50 | 5745.0550 |
| Max. Deviation (MHz) | 0.0600 |
| Max. Deviation (ppm) | 10.4439 |