

FCC Report (Bluetooth)

Product Name : Car Multimedia Player

Trade mark : DUAL

Model No. : XDVD179BT, XDVDBT179, XVM179BT

FCC ID : 2AFXA-XDVD179BT

Report Number : BLA-EMC-201908-A54-01

Date of sample receipt : August 21, 2019

Date of Test : August 21, 2019–August 28, 2019

Date of Issue : August 28, 2019

Test standard : FCC CFR Title 47 Part 15 Subpart C Section

15.247

Test result : PASS

Prepared for:

FengShun Peiying Electro-Acoustic Co., Ltd
2nd Floor, Block F, Hongwei Industrial Area,No.6 Liuxian 2 Road,
Baocheng 70 Area, Bao'an, Shenzhen City, Guangdong Province, P.R.
China

Prepared by:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,

China

TEL: +86-755-28682673

FAX: +86-755-28682673

Compiled by:

2-0150N

Review by:

Sweet lang

Approved by:

Eman li

Date: August 28, 2019



Page 2 of 42

2 Version

Version No.	Date	Description
00	August 28, 2019	Original



Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 3 of 42

3 Contents

	Page
1 COVER PAGEFCC REPORT (BLUETOOTH)	1
2 VERSION	
3 CONTENTS	
4 TEST SUMMARY	
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 Test mode	7
5.3 TEST FACILITY	
5.4 TEST LOCATION	
5.6 DESCRIPTION OF SUPPORT UNITS	
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	
7.1 Antenna requirement	
7.1 ANTENNA REQUIREMENT	
7.3 CONDUCTED PEAK OUTPUT POWER	
7.4 20DB EMISSION BANDWIDTH	
7.5 CARRIER FREQUENCIES SEPARATION	
7.6 HOPPING CHANNEL NUMBER	
7.7 DWELL TIME	
7.9 BAND EDGE	
7.9.1 Conducted Emission Method	18
7.9.2 Radiated Emission Method	
7.10 Spurious Emission	
7.10.1 Conducted Emission Method	
8 TEST SETUP PHOTO	
9 EUT CONSTRUCTIONAL DETAILS	_
10 APPENDIX	42

 $\label{thm:condition} \mbox{Qianhai BlueAsia of Technical Services} (\mbox{Shenzhen}) \mbox{ Co., Ltd.}$

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 4 of 42

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(iii)	Pass
Dwell Time	15.247 (a)(iii)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 5 of 42

5 General Information

5.1 General Description of EUT

Product Name:	Car Multimedia Player		
Model No.:	XDVD179BT, XDVDBT179, XVM179BT		
Test Model No.:	XDVD179BT		
Remark: All above models are The differences are model nar	identical in the same PCB layout, interior structure and electrical circuits. ne for commercial purpose.		
Serial No.:	N/A		
Sample(s) Status	Engineer sample		
Hardware:	V03		
Software:	MCU Version 179-90828A SOK Version V2.11.543.3		
Operation Frequency:	2402MHz-2480MHz		
Channel numbers:	79		
Channel separation:	1MHz		
Modulation type:	GFSK, π/4-DQPSK, 8-DPSK		
Antenna Type:	PCB Antenna		
Antenna gain:	1.0dBi		
Power supply:	DC 12V		

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 6 of 42

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 7 of 42

5.2 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode.

Remark: Full battery is used , DH1, DH3, DH5 all have been tested, only worse case is reported.

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC — Designation No.: CN1252

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

•ISED — CAB identifier No.: CN0028

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.4 Test Location

All tests were performed at:

All tests were performed at:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

5.5 Other Information Requested by the Customer

None.

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number
CHILWEE	Storage battery	MH1805	N/A
Lenovo	Notebook computer	E470C	PF-10FB5C

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 8 of 42

6 Test Instruments list

Radi	ated Emission:					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-14-2019	07-13-2020
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-14-2019	07-13-2020
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Pre-amplifier	SKET	N/A	N/A	07-19-2019	07-18-2020
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2019	05-23-2020
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	03-21-2019	03-20-2020
8	Controller	SKET	N/A	N/A	N/A	N/A
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2019	05-23-2020
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2019	05-23-2020
11	Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
12	Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
13	Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

 $\label{thm:condition} \mbox{Qianhai BlueAsia of Technical Services} (\mbox{Shenzhen}) \mbox{ Co., Ltd.}$

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 9 of 42

Conduc	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2019	06-09-2020	
2	LISN	CHASE	MN2050D	1447	12-18-2018	12-17-2019	
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	07-19-2019	07-18-2020	
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A	
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2019	07-18-2020	
6	Coaxial Cable	BlueAsia	BLA-XC-05	N/A	N/A	N/A	

RF Con	ducted Test:					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2019	05-23-2020
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2019	05-23-2020
3	MXA Signal Analyzer	Agilent	N9020A	MY49100060	12-18-2018	12-17-2019
4	Vector Signal Generator	Agilent	N5182A	MY49060650	12-18-2018	12-17-2019
5	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2019	05-23-2020
6	Signal Generator	Agilent	E8257D	MY44320250	05-24-2019	05-23-2020
7	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO27	05-24-2019	05-23-2020
8	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO28	05-24-2019	05-23-2020
9	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2019	07-18-2020
10	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2019	07-18-2020

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 10 of 42

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is PCB antenna, the best case gain of the antenna is 1.0dBi



Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 11 of 42

7.2 Conducted Emissions

LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative	Test Requirement:	FCC Part15 C Section 15.207				
Class / Severity: Receiver setup: RBW=9KHz, VBW=30KHz, Sweep time=auto Limit: Frequency range (MHz) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46* 5-30 60 50 * Decreases with the logarithm of the frequency. Reference Plane LISN AUX Equipment Linder Test LIST Libt lime impedence Stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.	Test Method:	ANSI C63.10:2013				
Receiver setup: RBW=9KHz, VBW=30KHz, Sweep time=auto Limit: Frequency range (MHz) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46* 0.5-5 5-30 60 50 * Decreases with the logarithm of the frequency. Reference Plane LISN AUX Equipment Filter Ac power Equipment Filter Ac power Equipment Aux Equipment Filter Ac power Equipment LISN Aux Equipment LISN Aux Equipment Filter Ac power Equipment LISN Aux Equipment LISN Limit hashedone Stabilization Network Filter Ac power Equipment LISN Limit hashedone Stabilization Network Filter Ac power Equipment LISN Limit dBush Filter Ac power Equipment LISN Limit (dBuV) Quasi-peak Average 60 50 50 * Decreases with the logarithm of the frequency. Reference Plane LISN Limit (dBuV) Quasi-peak Average 60 50 50 * Decreases with the logarithm of the frequency. Filter Ac power Equipment LISN that provides a connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed	Test Frequency Range:	150KHz to 30MHz				
Limit: Frequency range (MHz) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46* 0.5-5 5-30 60 50 * Decreases with the logarithm of the frequency. Reference Plane LISN AUX Equipment Filter AC power Receiver Test procedure: 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.	Class / Severity:	Class B				
Test setup: Comparison of the frequency range (MHz) Quasi-peak Average	Receiver setup:	RBW=9KHz, VBW=30KHz, St	weep time=auto			
Test setup: Color	Limit:	Francisco de CAULEN	Limit (dBuV)			
Test setup: Reference Plane LISN 40cm 80cm Filter Ac power Receiver Test table/Insulation plane Rest table Plane LISN Filter Ac power Receiver Test table Plane LISN Ac power Receiver Test table Plane 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment. Test procedure: 1. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.			,			
Test setup: Reference Plane						
* Decreases with the logarithm of the frequency. Test setup: **Reference Plane **LISN						
Test setup: Reference Plane LISN 40cm 80cm Filter AC power Requipment LUSN Receiver Remark EU.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table Inegrit=0 dm Test procedure: 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.						
Test procedure: 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.	Toot cotup:					
Test procedure: 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.	rest setup.	Reference Plane				
line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed.		AUX Equipment E.U.T EMI Receiver Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network				
	Test procedure:	 line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed 				
Test Instruments: Refer to section 6.0 for details	Test Instruments:	Refer to section 6.0 for details				
Test mode: Refer to section 5.2 for details	Test mode:	Refer to section 5.2 for details				
Test results: N/A	Test results:	N/A				

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 12 of 42

7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	21dBm(for GFSK),21dBm(for EDR)
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Reference to the AppendixC: Maximum conducted output power

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 13 of 42

7.4 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)		
Test Method:	ANSI C63.10:2013		
Limit:	N/A		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement Data

Reference to the AppendixA: 20dB Emission Bandwidth

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 14 of 42

7.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	GFSK & Pi/4QPSK & 8-DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Reference to the AppendixD: Carrier frequency separation

 $\label{thm:condition} \mbox{Qianhai BlueAsia of Technical Services} (\mbox{Shenzhen}) \mbox{ Co., Ltd.}$

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 15 of 42

7.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak		
Limit:	15 channels		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement Data:

Reference to the AppendixF: Number of hopping channels

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 16 of 42

7.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak		
Limit:	0.4 Second		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement Data

Reference to the AppendixE: Time of occupancy

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 17 of 42

7.8 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201908-A54-01 Page 18 of 42

7.9 Band Edge

7.9.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)		
Test Method:	ANSI C63.10:2013		
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement Data

Reference to the AppendixG:Band edge measurements

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201908-A54-01 Page 19 of 42

7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All restriction band have been tested, and 2310MHz to 2390MHz, 2483.5MHz to 2500MHz band is the worse case				
Test site:	Measurement D	istance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
·	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak 1MHz 10Hz Av			
Limit:	Freque	Frequency Limit (dBuV/m @3m) Remark			
	Above 1	GHz	54.0 74.0		Average Value Peak Value
Test setup:	Tum Table < 150cm > 4	< 3m	Test Antenna	?	
Test Procedure:	ground at a 3 determine the 2. The EUT was antenna, which tower. 3. The antenna ground to det horizontal and measurement 4. For each sus and then the and the rotal maximum reasonable 5. The test-rece Bandwidth with 6. If the emission limit specified EUT would be margin would	s meter camber to position of the set 3 meters a ch was mounted the man and vertical polarist. pected emission antenna was to table was turned ading. eiver system was the Maximum Hon level of the Ed, then testing of the position of the Ed, then testing of the position of the position of the Ed, then testing of the position of the	The table very highest rade away from the don the top of the top o	was rotated liation. The interference of a variable of the field e antenna and was arrangents from 1 regrees to 360 k Detect Full mode was apped and the missions the sing peak, or sing	r meters above the distrength. Both are set to make the ed to its worst case meter to 4 meters 0 degrees to find the function and Specified 10dB lower than the five peak values of the nat did not have 10dB quasi-peak or
Test Instruments:	Refer to section	6.0 for details			
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



1. During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Page 20 of 42

	Test channel:	Lowest
--	---------------	--------

Peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measure- ment (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	54.90	-14.56	40.34	74.00	-33.66	Horizontal
2390.00	79.32	-14.19	65.13	74.00	-8.87	Horizontal
2310.00	54.64	-14.85	39.79	74.00	-34.21	Vertical
2390.00	75.54	-14.52	61.02	74.00	-12.98	Vertical

Average value:

Frequency (MHz)	Reading Level (dBuV	Correct factor (dB)	Measure- ment (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	41.04	-14.56	26.48	54.00	-27.52	Horizontal
2390.00	59.66	-14.19	45.47	54.00	-8.53	Horizontal
2310.00	41.20	-14.85	26.35	54.00	-27.65	Vertical
2390.00	57.76	-14.52	43.24	54.00	-10.76	Vertical

Test channel:	Highest
1 CSt Charlie.	riigiicst

Peak value:

Frequency (MHz)	Reading Level (dBuV	Correct factor (dB/m)	Measure- ment (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	67.12	-13.66	53.46	74.00	-20.54	Horizontal
2500.00	54.63	-13.57	41.06	74.00	-32.94	Horizontal
2483.50	39.17	-14.05	55.12	74.00	-18.88	Vertical
2500.00	54.36	-13.97	40.39	74.00	-33.61	Vertical

Average value:

Frequency (MHz)	Reading Level (dBuV	Correct factor (dB/m)	Measure- ment (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.64	-13.66	34.98	54.00	-19.02	Horizontal
2500.00	41.87	-13.57	28.30	54.00	-25.70	Horizontal
2483.50	52.61	-14.05	38.56	54.00	-15.44	Vertical
2500.00	43.04	-13.97	29.07	54.00	-24.93	Vertical

Remark:

- 1. Final Level =Receiver Read level + Correct factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Correct factor= Antenna Factor + Cable Loss Preamplifier Factor

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 21 of 42

7.10 Spurious Emission

7.10.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement Data

Reference to the AppendixH:Conducted SpuriousEmission

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 22 of 42

7.10.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209							
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	9kHz to 25GHz							
Test site:	Measurement Distar	nce: (3m					
Receiver setup:	Frequency		Detector	RB	W	VBW	Value	
	9KHz-150KHz	Qı	uasi-peak	200	Hz	600Hz	z Quasi-peak	
	150KHz-30MHz	Qı	uasi-peak	9KI	Ηz	30KH:	z Quasi-peak	
	30MHz-1GHz	Qı	uasi-peak	120k	ΚΗz	300KH	z Quasi-peak	
	Above 1GHz		Peak	1M	Hz	3MHz	Peak	
	Above 1GHz		Peak	1M	Hz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Value		Measurement Distance	
	0.009MHz-0.490M	1Hz	2400/F(KHz)		QP		300m	
	0.490MHz-1.705M	Hz 24000/F(k		KHz)		QP	30m	
	1.705MHz-30MH	lz 30				QP	30m	
	30MHz-88MHz		100		QP			
	88MHz-216MHz	Z	150		QP			
	216MHz-960MH	z	200		QP		3m	
	960MHz-1GHz		500		QP		JIII	
	Above 1GHz		500		Average			
	Above IGIIZ		5000		F	Peak		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.							

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Report No.: BLA-EMC-201908-A54-01 Page 23 of 42

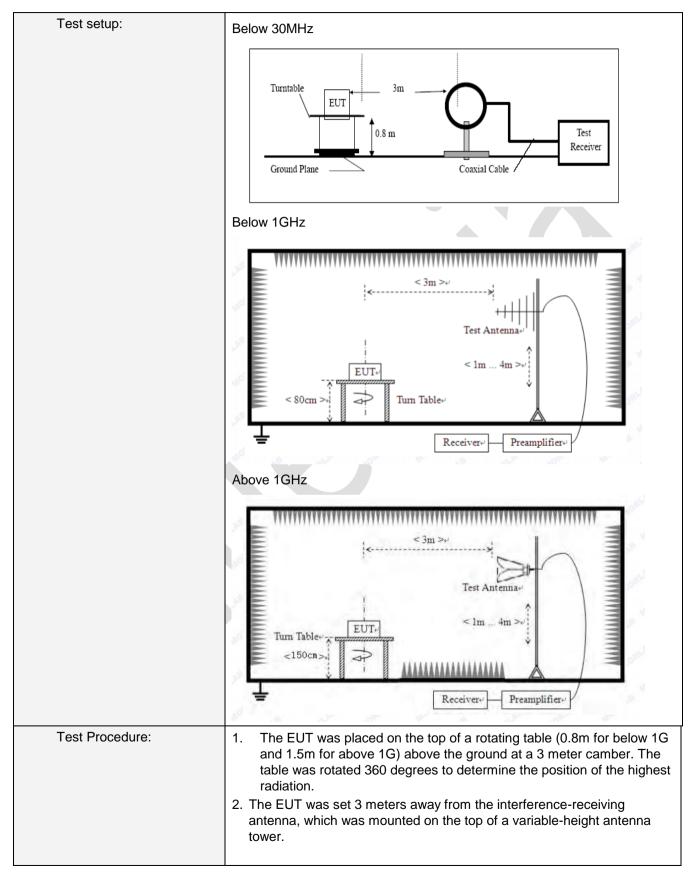

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 24 of 42

	1 dg = 1 d 1 =
	The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass
Test mode:	Refer to section 6.0 for details Refer to section 5.2 for details

Measurement data:

Remark:

- 1. During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 25 of 42


■ Below 1GHz

EUT: Car Multimedia Player Polarziation: Horizontal

Model: XDVD179BT Power Source: AC120V/60Hz

Mode: BT mode Test by: Eason

Temp./Hum.(%H): 26 °C/60%RH

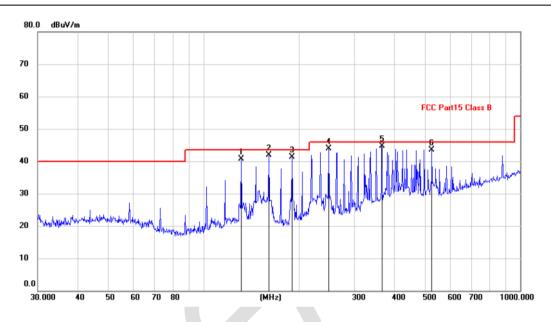

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		131.7576	27.87	12.77	40.64	43.50	-2.86	QP
2		160.9088	28.92	12.92	41.84	43.50	-1.66	QP
3		190.4050	30.98	10.27	41.25	43.50	-2.25	QP
4		248.5518	31.23	12.70	43.93	46.00	-2.07	QP
5	*	365.5391	29.14	15.47	44.61	46.00	-1.39	QP
6		526.3967	24.07	19.43	43.50	46.00	-2.50	QP

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Report No.: BLA-EMC-201908-A54-01 Page 26 of 42

EUT: Car Multimedia Player Polarziation: Vertical

Model: XDVD179BT Power Source: AC120V/60Hz

Mode: BT mode Test by: Eason

Temp./Hum.(%H): 26 °C/60%RH

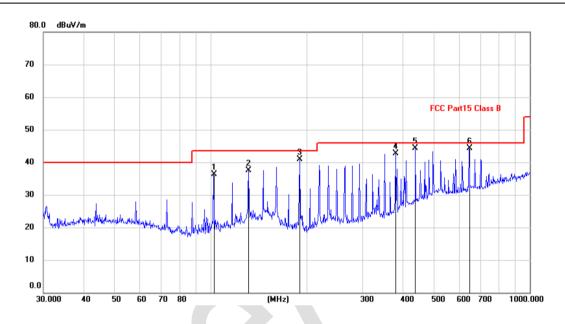

_	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		102.3597	25.66	10.56	36.22	43.50	-7.28	QP
	2		131.7576	24.76	12.77	37.53	43.50	-5.97	QP
	3		190.4050	30.65	10.27	40.92	43.50	-2.58	QP
	4		379.9141	26.80	15.92	42.72	46.00	-3.28	QP
	5		438.6553	26.81	17.42	44.23	46.00	-1.77	QP
_	6	*	645.1195	22.67	21.58	44.25	46.00	-1.75	QP
_									

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



■ Above 1GHz

Test channel: Lowest

Page 27 of 42

Peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	55.83	-7.05	48.78	74.00	-25.22	Vertical
7206.00	56.21	-2.52	53.69	74.00	-20.31	Vertical
9608.00	58.33	-2.48	55.85	74.00	-18.15	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	58.72	-7.05	51.67	74.00	-22.33	Horizontal
7206.00	59.18	-2.52	56.66	74.00	-17.34	Horizontal
9608.00	61.17	-2.48	58.69	74.00	-15.31	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	43.34	-7.05	35.69	54.00	-18.31	Vertical
7206.00	45.87	-2.52	43.35	54.00	-10.65	Vertical
9608.00	44.69	-2.48	42.21	54.00	-11.79	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	45.36	-7.05	37.25	54.00	-16.75	Horizontal
7206.00	44.48	-2.52	41.96	54.00	-12.04	Horizontal
9608.00	45.11	-2.48	42.63	54.00	-11.37	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Remark

- 1. Final Level = Receiver Read level + Correct factor
- 2. Correct factor = Antenna Factor + Cable Loss Preamplifier Factor
- 3. "*", means this data is the too weak instrument of signal is unable to test.
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 28 of 42

Test channel:	Middle

Peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	61.39	-7.25	54.14	74.00	-19.86	Vertical
7323.00	63.42	-2.68	60.74	74.00	-13.26	Vertical
9764.00	65.28	-2.54	62.74	74.00	-11.26	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	60.38	-7.25	53.13	74.00	-20.87	Horizontal
7323.00	62.84	-2.68	60.16	74.00	-13.84	Horizontal
9764.00	64.22	-2.54	61.68	74.00	-12.32	Horizontal
12205.00	*			74.00		Horizontal
14646.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	48.12	-7.25	40.87	54.00	-13.13	Vertical
7323.00	50.61	-2.68	47.93	54.00	-6.07	Vertical
9764.00	52.29	-2.54	49.75	54.00	-4.25	Vertical
12205.00	*			54.00		Vertical
14646.00	*			54.00		Vertical
4882.00	47.11	-7.25	39.86	54.00	-14.14	Horizontal
7323.00	48.94	-2.68	46.26	54.00	-7.74	Horizontal
9764.00	50.04	-2.54	47.50	54.00	-6.50	Horizontal
12205.00	*		_	54.00		Horizontal
14646.00	*			54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Correct facto
- 2. Correct factor = Antenna Factor + Cable Loss Preamplifier Factor
- 3. "*", means this data is the too weak instrument of signal is unable to test.
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 29 of 42

Test channel:	Highest

Peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	59.19	-7.31	51.88	74.00	-22.12	Vertical
7440.00	61.85	-2.74	59.11	74.00	-14.89	Vertical
9920.00	64.73	-2.63	62.10	74.00	-11.90	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	64.46	-7.31	57.15	74.00	-16.85	Horizontal
7440.00	63.34	-2.74	60.60	74.00	-13.40	Horizontal
9920.00	65.21	-2.63	62.58	74.00	-11.42	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading Level (dBuV)	Correct factor (dB)	Measurement (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	45.36	-7.31	38.05	54.00	-15.95	Vertical
7440.00	47.46	-2.74	44.72	54.00	-9.28	Vertical
9920.00	49.64	-2.63	47.01	54.00	-6.99	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	50.82	-7.31	43.51	54.00	-10.49	Horizontal
7440.00	51.47	-2.74	48.73	54.00	-5.27	Horizontal
9920.00	53.87	-2.63	51.24	54.00	-2.76	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Correct factor
- 2. Correct factor = Antenna Factor + Cable Loss Preamplifier Factor
- 3. "*", means this data is the too weak instrument of signal is unable to test.
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 30 of 42

8 Test Setup Photo

Radiated Emission

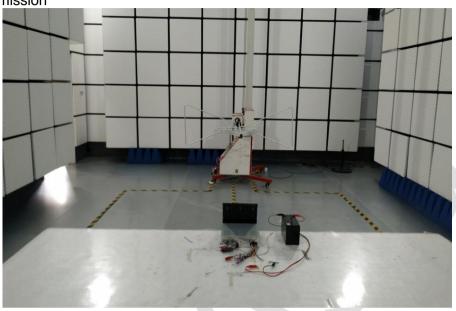



Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 31 of 42

9 EUT Constructional Details

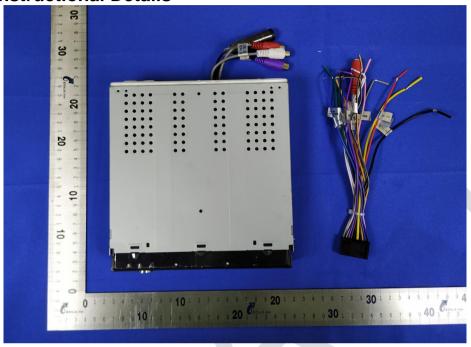

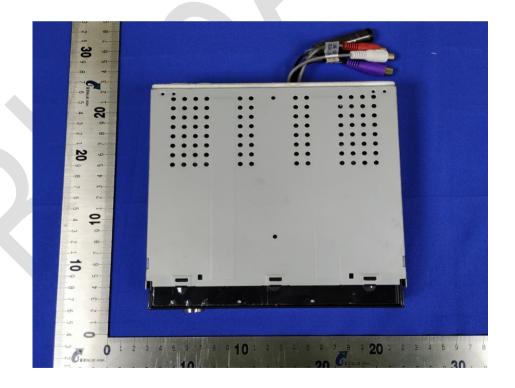


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201908-A54-01 Page 32 of 42

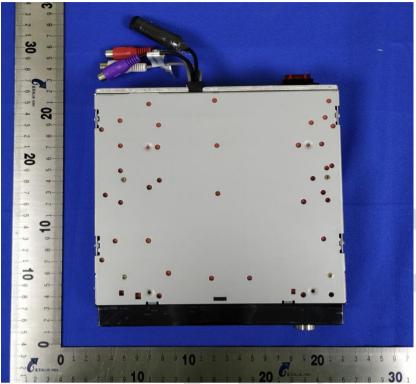

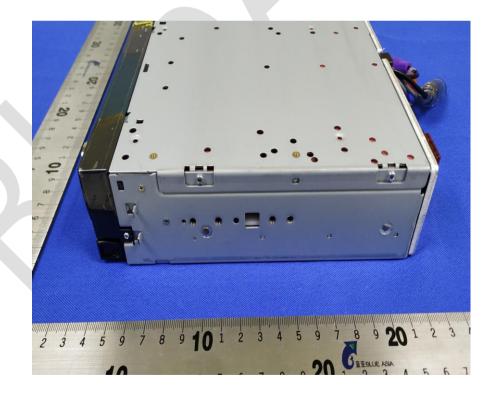


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 33 of 42

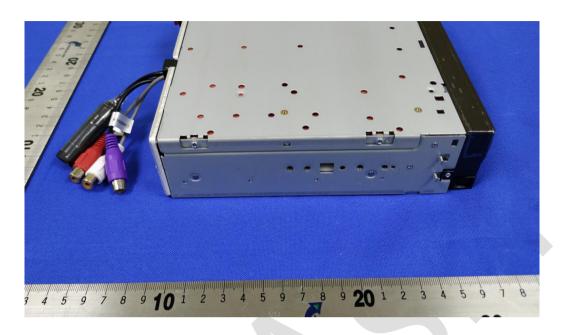




Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 34 of 42

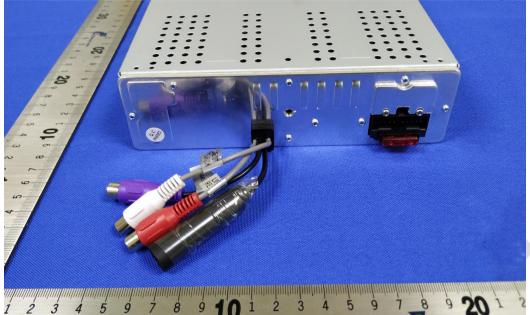

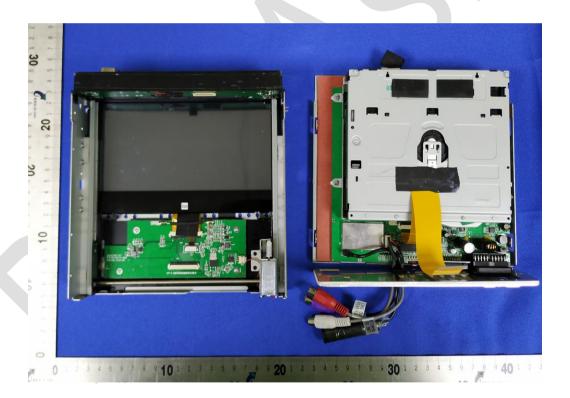

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China







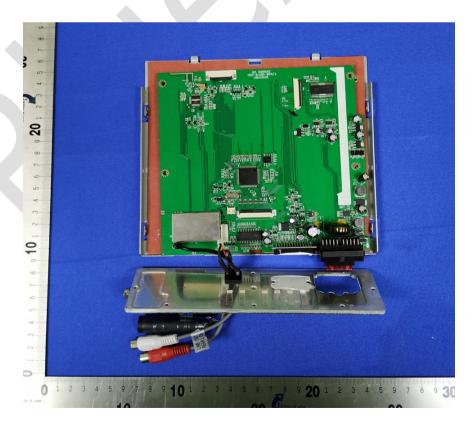


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 36 of 42

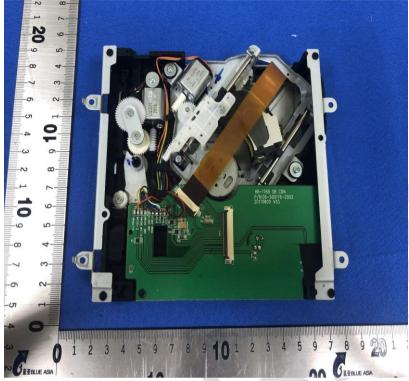




Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 37 of 42

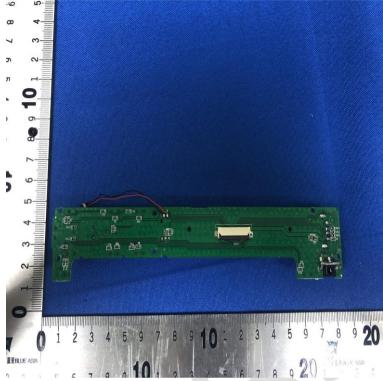

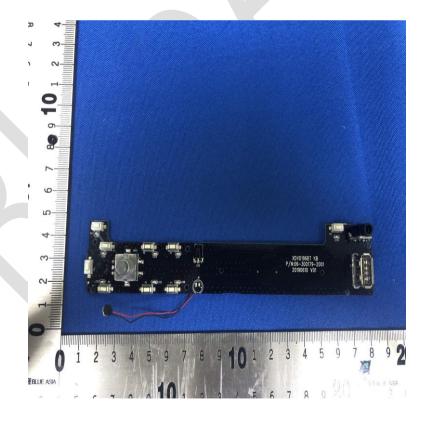


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 38 of 42

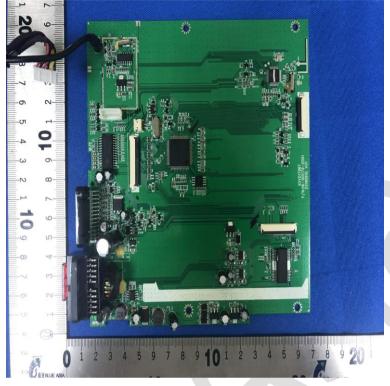

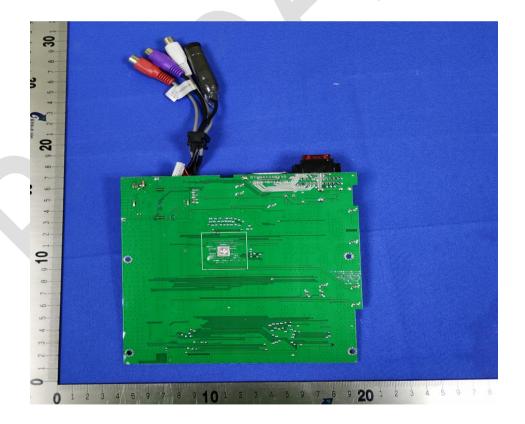

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 39 of 42





Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 40 of 42





 $\label{thm:condition} \mbox{Qianhai BlueAsia of Technical Services} (\mbox{Shenzhen}) \mbox{ Co., Ltd.}$

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 41 of 42



Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201908-A54-01 Page 42 of 42

10 Appendix

Refer to the following attachments.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China