

CS6719

CS6719-15

CS6719-16

CS6719-17

CS6719-2

CS6719-26

CS6719-27

(US)

(CA)

Abridged user's manual

Scan the QR code for support information

WHAT'S IN THE BOX

1 set for CS6719/
CS6719-15/CS6719-16/
CS6719-17

2 sets for CS6919-2/
CS6919-26/CS6919-27

1 set for CS6719/
CS6719-15/CS6719-16/
CS6719-17

2 sets for CS6919-2/
CS6919-26/CS6919-27

INSTALL AND CONNECT | MOUNT (OPTIONAL)

Install the battery

Connect and charge

Mount (optional)

1

2

3

4

IMPORTANT SAFETY INSTRUCTIONS

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

1. Read and understand all instructions.

2. Follow all warnings and instructions marked on the product.

3. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.

4. CAUTION: Do not install the telephone base at a height above 2 meters.

5. Do not use this product near water such as near a bath tub, wash bowl, kitchen sink, laundry tub or a swimming pool, or in a wet basement or shower.

6. Do not place this product on an unstable table, shelf, stand or other unstable surfaces.

7. Avoid placing the telephone system in places with extreme temperature, direct sunlight, or other electrical devices. Protect your phone from moisture, dust, corrosive liquids and fumes.

8. Slots and openings in the back or bottom of the telephone base and handset are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register. This product should not be placed in any area where proper ventilation is not provided.

9. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home or office, consult your dealer or local power company.

10. Do not allow anything to rest on the power cord. Do not install this product where the cord may be walked on.

11. Never push objects of any kind into this product through the slots in the telephone base or handset because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.

12. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the telephone base or handset other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.

13. Do not overload wall outlets and extension cords.

14. Unplug this product from the wall outlet and refer servicing to an authorized service facility under the following conditions:

- When the power supply cord or plug is damaged or frayed.
- If liquid has been spilled onto the product.
- If the product has been exposed to rain or water.
- If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operation instructions. Improper adjustment of other controls may result in damage and often requires extensive work by an authorized technician to restore the product to normal operation.
- If the product has been dropped and the telephone base and/or handset has been damaged.
- If the product exhibits a distinct change in performance.

15. Avoid using a telephone (other than cordless) during an electrical storm. There is a remote risk of electric shock from lightning.

16. Do not use the telephone to report a gas leak in the vicinity of the leak. Under certain circumstances, a spark may be created when the adapter is plugged into the power outlet, or when the handset is replaced in its cradle. This is a common event associated with the closing of any electrical circuit. The user should not plug the phone into a power outlet, and should not put a charged handset into the cradle, if the phone is located in an environment containing concentrations of flammable or flame-supporting gases, unless there is adequate ventilation. A spark in such an environment could create a fire or explosion. Such environments might include: medical use of oxygen without adequate ventilation; industrial gases (cleaning solvents; gasoline vapors; etc.); a leak of natural gas; etc.

17. Only put the handset of your telephone next to your ear when it is in normal talk mode.

18. The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.

19. For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.

20. CAUTION: Use only the batteries indicated in this manual. There may be a risk of explosion if a wrong type of battery is used for the handset. Use only the supplied rechargeable batteries or replacement batteries (BT162342/BT262342) for the handset. Do not dispose of batteries in a fire. They may explode. Disposed of used batteries according to the instruction.

- Do not use the battery in following conditions:
 - High or low extreme temperature during use, storage or transportation.
 - Replacement of a battery with an incorrect type that can defeat a safeguard.
 - Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
 - Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
 - A battery subjected to extremely low air pressure that can result in an explosion or the leakage of flammable liquid or gas.

21. Use only the adapter included with this product. Incorrect adapter polarity or voltage can seriously damage the product.

22. The applied nameplate is located at the bottom or near of the product.

SAVE THESE INSTRUCTIONS

Use only the battery provided or equivalent. To order a replacement, visit our website at www.vtechphones.com or call 1 (800) 595-9511. In Canada, go to phones.vtechcanada.com or call 1 (800) 267-7377.

Do not dispose of the battery in a fire. Check with local waste management codes for special disposal instructions.

Do not open or mutilate the battery. Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte may be toxic if swallowed.

Exercise care in handling batteries in order not to create a short circuit with conductive materials.

Charge the battery provided with this product only in accordance with the instructions and limitations specified in this manual.

Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless telephones):

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless telephones and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients

- Should keep wireless telephones at least six inches from the pacemaker.
- Should NOT place wireless telephones directly over the pacemaker, such as in a breast pocket, when it is turned ON.
- Should use the wireless telephone at the ear opposite the pacemaker.

WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless telephones.

ABOUT CORDLESS TELEPHONES

- Privacy:** The same features that make a cordless telephone convenient create some limitations. Telephone calls are transmitted between the telephone base and the cordless handset by radio waves, so there is a possibility that the cordless telephone conversations could be intercepted by radio receiving equipment within range of the cordless handset. For this reason, you should not think of cordless telephone conversations as being as private as those on corded telephones.
- Electrical power:** The telephone base of this cordless telephone must be connected to a working electrical outlet. The electrical outlet should not be controlled by a wall switch. Calls cannot be made from the cordless handset if the telephone base is unplugged, switched off or if the electrical power is interrupted.
- Potential TV interference:** Some cordless telephones operate at frequencies that may cause interference to televisions and VCRs. To minimize or prevent such interference, do not place the telephone base of the cordless telephone near or on top of a TV or VCR. If interference is experienced, moving the cordless telephone farther away from the TV or VCR often reduces or eliminates the interference.
- Rechargeable batteries:** Exercise care in handling batteries in order not to create a short circuit with conducting material such as rings, bracelets and keys. The battery or conductor may overheat and cause harm. Observe proper polarity between the battery and the battery charger.
- Nickel-metal hydride rechargeable batteries:** Dispose of these batteries in a safe manner. Do not burn or puncture the battery. Like other batteries of this type, if burned or punctured, they could release caustic material which could cause injury.

SETUP

After the telephone is installed or power returns following a power outage and battery depletion, the handset will prompt you to set the date and time.

Date and time

Follow the steps below to set the date and time. For example, if the date is 25 July, 2023, and the time is 11:07 AM:

When the handset prompts you to set the date and time:

Date:MM/DD/YY

11:07 AM

1/25

1. Press MENU.

2. Press ▼/▲ to scroll to Settings, then press SELECT.

Date:07/27/YY

Date:07/25/23

3. Press SELECT to select LCD language.

4. Press ▼/▲ to choose your desired language and press SELECT.

Time:12:00 PM

Time:11:07 PM

5. Press SELECT to save.

NOTE: If you have skipped the prompt, you can set up again by pressing MENU. Scroll to choose Set date/time and press SELECT. Then, follow the steps above.

OVERVIEW

Telephone base

1 – IN USE light

Flashes when there is an incoming call, or another telephone sharing the same line is in use.

On when the telephone is in use.

2 – FIND HANDSET

Page all system handsets.

3 – Charging pole

4 – Charge light

Charger

1 – Charging pole

Handset

16 – TALK/FLASH

Make or answer a call.

13 – TALK/FLASH

Make or answer a call.

17 – MUTE

Mute the microphone during a call.

18 – MUTE

Mute the microphone during a call.

19 – MUTE

Mute the microphone during a call.

20 – MUTE

Mute the microphone during a call.

21 – MUTE

Mute the microphone during a call.

22 – MUTE

Mute the microphone during a call.

23 – MUTE

Mute the microphone during a call.

24 – MUTE

Mute the microphone during a call.

25 – MUTE

Mute the microphone during a call.

26 – MUTE

Mute the microphone during a call.

27 – MUTE

Mute the microphone during a call.

28 – MUTE

Mute the microphone during a call.

29 – MUTE

Mute the microphone during a call.

30 – MUTE

Mute the microphone during a call.

31 – MUTE

Mute the microphone during a call.

32 – MUTE

Mute the microphone during a call.

33 – MUTE

Mute the microphone during a call.

34 – MUTE

Mute the microphone during a call.

35 – MUTE

Mute the microphone during a call.

36 – MUTE

Mute the microphone during a call.

37 – MUTE

Mute the microphone during a call.

38 – MUTE

Mute the microphone during a call.

39 – MUTE

Mute the microphone during a call.

40 – MUTE

Mute the microphone during a call.

41 – MUTE

Mute the microphone during a call.

42 – MUTE

Mute the microphone during a call.

43 – MUTE

Mute the microphone during a call.

44 – MUTE

Mute the microphone during a call.

45 – MUTE

Mute the microphone during a call.

46 – MUTE

Mute the microphone during a call.

47 – MUTE

Mute the microphone during a call.

48 – MUTE

Mute the microphone during a call.

49 – MUTE

Mute the microphone during a call.

50 – MUTE

Mute the microphone during a call.

51 – MUTE

Mute the microphone during a call.

52 – MUTE

Mute the microphone during a call.

53 – MUTE

Mute the microphone during a call.

54 – MUTE

Mute the microphone during a call.

55 – MUTE

Mute the microphone during a call.

56 – MUTE

Mute the microphone during a call.

57 – MUTE

Mute the microphone during a call.

58 – MUTE

Mute the microphone during a call.

59 – MUTE

Mute the microphone during a call.

60 – MUTE

Mute the microphone during a call.

61 – MUTE

Mute the microphone during a call.

62 – MUTE

Mute the microphone during a call.

63 – MUTE

Mute the microphone during a call.

64 – MUTE

Mute the microphone during a call.

65 – MUTE

Mute the microphone during a call.

66 – MUTE

Mute the microphone during a call.

67 – MUTE

Mute the microphone during a call.

68 – MUTE

Mute the microphone during a call.

69 – MUTE

Mute the microphone during a call.

70 – MUTE

Mute the microphone during a call.

71 – MUTE

Mute the microphone during a call.

72 – MUTE

Mute the microphone during a call.

73 – MUTE

Mute the microphone during a call.

74 – MUTE

Mute the microphone during a call.

75 – MUTE

Mute the microphone during a call.

76 – MUTE

Mute the microphone during a call.

77 – MUTE

Mute the microphone during a call.

78 – MUTE

Mute the microphone during a call.

79 – MUTE

Mute the microphone during a call.

80 – MUTE

Mute the microphone during a call.

81 – MUTE

Mute the microphone during a call.

82 – MUTE

Mute the microphone during a call.

83 – MUTE

Mute the microphone during a call.

84 – MUTE

Mute the microphone during a call.

85 – MUTE

Mute the microphone during a call.

86 – MUTE

Mute the microphone during a call.

87 – MUTE

Mute the microphone during a call.

88 – MUTE

Mute the microphone during a call.

89 – MUTE

Mute the microphone during a call.

90 – MUTE

Mute the microphone during a call.

91 – MUTE

Mute the microphone during a call.

92 – MUTE

Mute the microphone during a call.

93 – MUTE

Mute the microphone during a call.

94 – MUTE

Mute the microphone during a call.

95 – MUTE

Mute the microphone during a call.

96 – MUTE

Mute the microphone during a call.

97 – MUTE

Mute the microphone during a call.

98 – MUTE

Mute the microphone during a call.

99 – MUTE

Mute the microphone during a call.

100 – MUTE

Mute the microphone during a call.

101 – MUTE

Mute the microphone during a call.

102 – MUTE

Mute the microphone during a call.

103 – MUTE

Mute the microphone during a call.

104 – MUTE

Mute the microphone during a call.

105 – MUTE

Mute the microphone during a call.

106 – MUTE

Mute the microphone during a call.

107 – MUTE

Mute the microphone during a call.

108 – MUTE

Mute the microphone during a call.

109 – MUTE

Mute the microphone during a call.

110 – MUTE

Mute the microphone during a call.

111 – MUTE

Mute the microphone during a call.

112 – MUTE

Mute the microphone during a call.

113 – MUTE

Mute the microphone during a call.

114 – MUTE

Mute the microphone during a call.

115 – MUTE

Mute the microphone during a call.

116 – MUTE

Mute the microphone during a call.

117 – MUTE

Mute the microphone during a call.

118 – MUTE

Mute the microphone during a call.

119 – MUTE

Mute the microphone during a call.

120 – MUTE

Mute the microphone during a call.

121 – MUTE

Mute the microphone during a call.

122 – MUTE

Mute the microphone during a call.

123 – MUTE

Mute the microphone during a call.

124 – MUTE

Mute the microphone during a call.

125 – MUTE

Mute the microphone during a call.

126 – MUTE

Mute the microphone during a call.

127 – MUTE

Mute the microphone during a call.

128 – MUTE

Mute the microphone during a call.

129 – MUTE

Mute the microphone during a call.

130 – MUTE

Mute the microphone during a call.

131 – MUTE

Mute the microphone during a call.

132 – MUTE

Mute the microphone during a call.

133 – MUTE

Mute the microphone during a call.

134 – MUTE

Mute the microphone during a call.

135 – MUTE

Mute the microphone during a call.

136 – MUTE

Mute the microphone during a call.

137 – MUTE

Mute the microphone during a call.

138 – MUTE

Mute the microphone during a call.

139 – MUTE

Mute the microphone during a call.

140 – MUTE

Mute the microphone during a call.

141 – MUTE

Mute the microphone during a call.

142 – MUTE

Mute the microphone during a call.

143 – MUTE

Mute the microphone during a call.

144 – MUTE

Mute the microphone during a call.

145 – MUTE

Mute the microphone during a call.

146 – MUTE

Mute the microphone during a call.

147 – MUTE

Mute the microphone during a call.

148 – MUTE

Mute the microphone during a call.

149 – MUTE

Mute the microphone during a call.

150 – MUTE

Mute the microphone during a call.

151 – MUTE

Mute the microphone during a call.

152 – MUTE

Mute the microphone during a call.

153 – MUTE

Mute the microphone during a call.

154 – MUTE

Mute the microphone during a call.

155 – MUTE

Mute the microphone during a call.

156 – MUTE

Mute the microphone during a call.

157 – MUTE

Mute the microphone during a call.

158 – MUTE

Mute the microphone during a call.

159 – MUTE

Mute the microphone during a call.

160 – MUTE

Mute the microphone during a call.

161 – MUTE

Mute the microphone during a call.

162 – MUTE

Mute the microphone during a call.

163 – MUTE

Mute the microphone during a call.

164 – MUTE

Mute the microphone during a call.

165 – MUTE

Mute the microphone during a call.

166 – MUTE

Mute the microphone during a call.

167 – MUTE

Mute the microphone during a call.

168 – MUTE

Mute the microphone during a call.

169 – MUTE

Mute the microphone during a call.

170 – MUTE

Mute the microphone during a call.

171 – MUTE

Mute the microphone during a call.

172 – MUTE

Mute the microphone during a call.

173 – MUTE

Mute the microphone during a call.

174 – MUTE

Mute the microphone during a call.

175 – MUTE

Mute the microphone during a call.

176 – MUTE

Mute the microphone during a call.

177 – MUTE

Mute the microphone during a call.

178 – MUTE

Mute the microphone during a call.

179 – MUTE

Mute the microphone during a call.

180 – MUTE

Mute the microphone during a call.

181 – MUTE

Mute the microphone during a call.

182 – MUTE

Mute the microphone during a call.

183 – MUTE

Mute the microphone during a call.

184 – MUTE

Mute the microphone during a call.

185 – MUTE

Mute the microphone during a call.

186 – MUTE

Mute the microphone during a call.

187 – MUTE

Mute the microphone during a call.

188 – MUTE

Mute the microphone during a call.

189 – MUTE

Mute the microphone during a call.

190 – MUTE

Mute the microphone during a call.

191 – MUTE

Mute the microphone during a call.

192 – MUTE

Mute the microphone during a call.

193 – MUTE

Mute the microphone during a call.

194 – MUTE

Mute the microphone during a call.

195 – MUTE

Mute the microphone during a call.

196 – MUTE

Mute the microphone during a call.

197 – MUTE

Mute the microphone during a call.

198 – MUTE

Mute the microphone during a call.

199 – MUTE

Mute the microphone during a call.

200 – MUTE

Mute the microphone during a call.

201 – MUTE

Mute the microphone during a call.

202 – MUTE

Mute the microphone during a call.

203 – MUTE

Mute the microphone during a call.

204 – MUTE

Mute the microphone during a call.

205 – MUTE

Mute the microphone during a call.

206 – MUTE

Mute the microphone during a call.

207 – MUTE

Mute the microphone during a call.

208 – MUTE

Mute the microphone during a call.

209 – MUTE

Mute the microphone during a call.

210 – MUTE

Mute the microphone during a call.

211 – MUTE

Mute the microphone during a call.

212 – MUTE

Mute the microphone during a call.

213 – MUTE

Mute the microphone during a call.

214 – MUTE

Mute the microphone during a call.

215 – MUTE

Mute the microphone during a call.

216 – MUTE

Mute the microphone during a call.

217 – MUTE

Mute the microphone during a call.

218 – MUTE

Mute the microphone during a call.

219 – MUTE

Mute the microphone during a call.

220 – MUTE

Mute the microphone during a call.

221 – MUTE

Mute the microphone during a call.

222 – MUTE

Mute the microphone during a call.

223 – MUTE

Mute the microphone during a call.

224 – MUTE

Mute the microphone during a call.

225 – MUTE

Mute the microphone during a call.

226 – MUTE

Mute the microphone during a call.

227 – MUTE

Mute the microphone during a call.

228 – MUTE

Mute the microphone during a call.

229 – MUTE

Mute the microphone during a call.

230 – MUTE

Mute the microphone during a call.

231 – MUTE

Mute the microphone during a call.

232 – MUTE

Mute the microphone during a call.

233 – MUTE

Mute the microphone during a call.

234 – MUTE

Mute the microphone during a call.

235 – MUTE

Mute the microphone during a call.

236 – MUTE

Mute the microphone during a call.

237 – MUTE

Mute the microphone during a call.

238 – MUTE

Mute the microphone during a call.

239 – MUTE

Mute the microphone during a call.

240 – MUTE

Mute the microphone during a call.

241 – MUTE

Mute the microphone during a call.

242 – MUTE

Mute the microphone during a call.

243 – MUTE

Mute the microphone during a call.

244 – MUTE

Mute the microphone during a call.

245 – MUTE

Mute the microphone during a call.

246 – MUTE

Mute the microphone during a call.

247 – MUTE

Mute the microphone during a call.

248 – MUTE

Mute the microphone during a call.

249 – MUTE

Mute the microphone during a call.

250 – MUTE

Mute the microphone during a call.

251 – MUTE

Mute the microphone during a call.

252 – MUTE

Mute the microphone during a call.

253 – MUTE

Mute the microphone during a call.

254 – MUTE

Mute the microphone during a call.

255 – MUTE

Mute the microphone during a call.

256 – MUTE

Mute the microphone during a call.

257 – MUTE

Mute the microphone during a call.

258 – MUTE

Mute the microphone during a call.

259 – MUTE

Mute the microphone during a call.

260 – MUTE

Mute the microphone during a call.

261 – MUTE

Mute the microphone during a call.

262 – MUTE

Mute the microphone during a call.

263 – MUTE

Mute the microphone during a call.

264 – MUTE

Mute the microphone during a call.

265 – MUTE

Mute the microphone during a call.

266 – MUTE

Mute the microphone during a call.

267 – MUTE

Mute the microphone during a call.

268 – MUTE

Mute the microphone during a call.

269 – MUTE

Mute the microphone during a call.

270 – MUTE

Mute the microphone during a call.

271 – MUTE

Mute the microphone during a call.

272 – MUTE

Mute the microphone during a call.

273 – MUTE

Mute the microphone during a call.

274 – MUTE

Mute the microphone during a call.

275 – MUTE

Mute the microphone during a call.

276 – MUTE

Mute the microphone during a call.

277 – MUTE

Mute the microphone during a call.

278 – MUTE

Mute the microphone during a call.

279 – MUTE

Mute the microphone during a call.

280 – MUTE

Mute the microphone during a call.

281 – MUTE

Mute the microphone during a call.

282 – MUTE

Mute the microphone during a call.

283 – MUTE

Mute the microphone during a call.

284 – MUTE

Mute the microphone during a call.

285 – MUTE

Mute the microphone during a call.

286 – MUTE

Mute the microphone during a call.

287 – MUTE

Mute the microphone during a call.

288 – MUTE

Mute the microphone during a call.

289 – MUTE

Mute the microphone during a call.

290 – MUTE

Mute the microphone during a call.

291 – MUTE

Mute the microphone during a call.

292 – MUTE

Mute the microphone during a call.

293 – MUTE

Mute the microphone during a call.

294 – MUTE

Mute the microphone during a call.

295 – MUTE

Mute the microphone during a call.

296 – MUTE

Mute the microphone during a call.

297 – MUTE

Mute the microphone during a call.

298 – MUTE

Mute the microphone during a call.

299 – MUTE

Mute the microphone during a call.

300 – MUTE

Mute the microphone during a call.

301 – MUTE

Mute the microphone during a call.

302 – MUTE

Mute the microphone during a call.

303 – MUTE

Mute the microphone during a call.

304 – MUTE

Mute the microphone during a call.

305 – MUTE

Mute the microphone during a call.

306 – MUTE

Mute the microphone during a call.

307 – MUTE

Mute the microphone during a call.

308 – MUTE

Mute the microphone during a call.

REDIAL LIST

Each handset stores the last 10 telephone numbers dialed. When there are already 10 entries, the oldest entry is deleted to make room for the new entry.

Review and dial a redial list entry

- Press **REDIAL** when the handset is not in use.
- Press ▼, ▲ or **REDIAL** repeatedly until the desired entry displays.
- Press TALK or 📞 to dial.

Delete a redial list entry

- When the desired redial entry displays, press **DELETE**.

INTERCOM

Use the intercom features for conversations between two handsets.

- Press **INT** on your handset when not in use. Use the dialing keys to enter a destination handset number if necessary.
- To answer the intercom call, press TALK, 📞, **INT** or any dialing key on the destination handset.
- To end the intercom call, press **OFF** or place the handset back in the telephone base or charger.

Answer an incoming call during an intercom call

If you receive an incoming call during an intercom call, there is an alert tone.

- To answer the outside call, press TALK. The intercom call ends automatically.
- To end the intercom call without answering the outside call, press **OFF**. The telephone continues to ring.

Call transfer using intercom

While on an outside call, you can use the intercom feature to transfer the call from one handset to another.

- Press **INT** on your handset during a call. The current call is put on hold. Use the dialing keys to enter a destination handset number if necessary.
- To answer the intercom call on the destination handset, press TALK, 📞, **INT** or any dialing key on the destination handset. You can now have a private conversation before transferring the call.
- From this intercom call, you have the following options:
 - You can let the destination handset join you on the outside call in a three-way conversation. Press and hold **INT** on the originating handset.

- You can transfer the call. Press **OFF**, or place your handset back in the telephone base or charger. The destination handset is then connected to the outside call.
- You can press **INT** to switch between the outside call (**Outside call** displays) and the intercom call (**Intercom** displays).
- The destination handset can end the intercom call by pressing **OFF**, or by placing the handset back in the telephone base or charger. The outside call continues with the original system handset.

PHONEBOOK

The phonebook can store up to 50 entries, which are shared by all handsets. Each entry may consist of a telephone number up to 30 digits, and a name up to 15 characters.

Add a phonebook entry

- Enter the number when the phone is not in use. Press **MENU**, then go to Step 3.
 - OR-** Press **MENU** when the phone is not in use, then scroll to **Phonebook** and press **SELECT**. Press **SELECT** again to choose **Add new entry**.
- Use the dialing keys to enter the number.
 - OR-** Copy a number from the redial list by pressing **REDIAL** and then press ▼, ▲ or **REDIAL** repeatedly to select a number. Press **SELECT** to copy the number.
- Press **SELECT** to move on to enter the name.
- Use the dialing keys to enter the name. Additional key presses show other characters of that particular key.
- Press **SELECT** to save.

While entering names and numbers, you can:

- Press **DELETE** to backspace and erase a digit or character.
- Press and hold **DELETE** to erase the entire entry.
- Press ▼ or ▲ to move the cursor to the left or right.
- Press and hold **PAUSE** to insert a dialing pause (for entering numbers only).
- Press **0** to add a space (for entering names only).
- Press **TO** ✕ to add ✕ (✕ appears) or **0** ## to add ## (## appears) (for entering phone numbers only).

Review a phonebook entry

Entries are sorted alphabetically.

- Press 📞 when the phone is not in use.
- Scroll to browse through the phonebook, or use the dialing keys to start a name search.

-OR-

- Press **MENU** when the phone is not in use.
- Scroll to **Phonebook**, and then press **SELECT**.
- Scroll to **Review**, and then press **SELECT**.
- Scroll to browse through the phonebook.

Delete a phonebook entry

- When the desired entry displays, press **DELETE**.
- When the handset displays **Delete entry?**, press **SELECT**.

Edit a phonebook entry

- Search for or review the phonebook entries (see **Review a phonebook entry**).
- When the desired entry displays, press **SELECT**.
- Use the dialing keys to edit the number, then press **SELECT**.
- Use the dialing keys to edit the name, then press **SELECT** to save.

Dial a phonebook entry

- Search for or review the phonebook entries (see **Review a phonebook entry**).
- When the desired entry appears, press TALK or 📞 to dial.

CALLER ID

If you subscribe to caller ID service, information about each caller appears after the first or second ring. If you answer a call before the caller information appears on the screen, it will not be saved in the caller ID log.

The caller ID log stores up to 50 entries. Each entry has up to 24 digits for the phone number and 15 characters for the name.

If the telephone number has more than 15 digits, only the last 15 digits appear. If the name has more than 15 characters, only the first 15 characters are shown and saved in the caller ID log.

Review a caller ID log entry

- Press **CID** when the phone is not in use.
- Scroll to browse through the caller ID log.

-OR-

- Press **MENU** when the phone is not in use.
- Scroll to **Caller ID log**, and then press **SELECT**.
- Press **SELECT** to choose **Review**.
- Scroll to browse through the caller ID log.
 - Press ➡ repeatedly to show different dialing options.
 - Press **1** repeatedly if you need to add or remove 1 in front of the phone number.

Missed call indicator

When there are calls that have not been reviewed in the caller ID log, the handset displays **XX missed calls**.

Each time you review a caller ID log entry marked **NEW**, the number of missed calls decreases by one.

When you have reviewed all the missed calls, the missed call indicator no longer displays.

If you do not want to review the missed calls one by one, press and hold **CANCEL** on the idle handset to erase the missed call indicator. All the entries are then considered old.

Dial a caller ID log entry

- Search for or review the caller ID log entries (see **Review a caller ID log entry**).
- When the desired entry appears, press TALK or 📞 to dial.

Save a caller ID log entry to the phonebook

- Search for or review the caller ID log entries (see **Review a caller ID log entry**).
- When the desired caller ID log entry displays, press **SELECT**.
- Use the dialing keys to edit the number, if necessary. Then press **SELECT**.
- Use the dialing keys to edit the name, if necessary. Then press **SELECT** to save.

Delete the caller ID log entries

- Search for or review the caller ID log entries (see **Review a caller ID log entry**).
- When the desired caller ID log entry displays, press **DELETE**.

To delete all caller ID log entries:

- Press **MENU** when the phone is not in use.
- Scroll to **Caller ID log** and then press **SELECT**.
- Scroll to **Delete all** and then press **SELECT**.
- When the screen shows **Delete all?**, press **SELECT** to confirm.

SOUND SETTINGS

Key tone

You can turn the key tone on or off.

- Press **MENU** when the handset is not in use.
- Scroll to **Settings** and then press **SELECT**.
- Scroll to choose **Key tone**, then press **SELECT**.
- Scroll to choose**On** or **Off**, then press **SELECT** to save.

Ringer tone

You can choose from different ringer tones for each handset.

- Press **MENU** when the handset is not in use.
- Scroll to **Ringers** and then press **SELECT**.
- Scroll to choose **Ringer tone**, then press **SELECT**.
- Scroll to sample each ringer tone, then press **SELECT** to save.

- NOTE:** If you turn off the ringer volume, you will not hear ringer tone samples.

Ringer volume

You can adjust the handset ringer volume level, or turn the ringer off.

- Press **MENU** when the handset is not in use.
- Scroll to **Ringers** and then press **SELECT**.
- Press **SELECT** again to choose **Ringer volume**.
- Press ▼ or ▲ to sample each volume level, then press **SELECT** to save.

- NOTE:** When the ringer volume is set to **OFF**, the handset still rings when you press **FIND HANDESET** at the telephone base.

Temporary ringer silencing

When the telephone is ringing, you can temporarily silence the ringer without disconnecting the call. The next call rings normally at the preset volume.

To silence the handset ringer:

- Press **OFF** or **MUTE** on the handset. The handset displays 🔇 and **Ringer muted** briefly.

Quiet mode

You can turn on the quiet mode for a period of time. During this period, all tones (except paging tone) and call screening are muted.

- Press and hold **QUIET #** on the handset when it is not in use.
 - Use the dialing keys (**0-9**) to enter the duration, and then press **SELECT** to save.
- To turn off the quiet mode, press and hold **QUIET #** on the handset when it is not in use.

RETRIEVE VOICEMAIL FROM TELEPHONE SERVICE

Voicemail is a feature available from most telephone service providers. It may be included with your telephone service, or may be optional. Fees may apply.

Retrieve voicemail

When you received a voicemail, the handset displays 📧 and **New voicemail**. To retrieve, you typically dial an access number provided by your telephone service provider, and then enter a security code. Contact your telephone service provider for instructions on how to configure the voicemail settings and listen to messages.

- NOTE:** After you have listened to all new voicemail messages, the indicators on the handset turn off automatically.

Set your voicemail number

You can save your access number on each handset for easy access to your voicemail. After you saved the voicemail number, you can press and hold 📧 1 to retrieve voicemail.

- Press **MENU** when the phone is not in use.
- Scroll to **Settings** and then press **SELECT**.
- Scroll to **Voicemail #** and then press **SELECT**.
- Use the dialing keys to enter the voicemail number (up to 30 digits).
- Press **SELECT** to save.

Clear the new voicemail indicators

If you have retrieved your voicemail while away from home, and the handset still displays the new voicemail indicators, use this feature to clear the indicators.

- NOTE:** This feature clears the indicators only, it does not delete your voicemail messages.

- Press **MENU** when the phone is not in use.
- Scroll to **Settings** and then press **SELECT**.
- Scroll to **Clr voicemail** and then press **SELECT**.
- Press **SELECT** again to confirm. You hear a confirmation tone.

ECO MODE

This power conserving technology reduces power consumption for optimal battery performance. The ECO mode activates automatically whenever the handset is synchronized with the telephone base.

GENERAL PRODUCT CARE

Taking care of your telephone

Your cordless telephone contains sophisticated electronic parts, so it must be treated with care.

Avoid rough treatment

Place the handset down gently. Save the original packing materials to protect your telephone if you ever need to ship it.

Avoid water

Your telephone can be damaged if it gets wet. Do not use the handset outdoors in the rain, or handle it with wet hands. Do not install the telephone base near a sink, bathtub or shower.

Electrical storms

Electrical storms can sometimes cause power surges harmful to electronic equipment. For your own safety, take caution when using electrical appliances during storms.

Cleaning your telephone

Your telephone has a durable plastic casing that should retain its luster for many years. Clean it only with a dry non-abrasive cloth. Do not use dampened cloth or cleaning solvents of any kind.

NEED HELP?


For operations and guides to help you using your telephone, and for the latest information and supports, go and check the online help topics and online FAQs.

Use your smartphone or mobile device to access our online help.

- Go to <https://help.vttechphones.com/CS6719> (US); OR <https://phones.vtechcanada.com/en/support/general/manuals?model=CS6719> (Canada)

- Scan the QR code on the right. Launch the camera app or QR code scanner app on your smartphone or tablet. Hold the device's camera up to the QR code and frame it. Tap the notification to trigger the redirection of the online help.
- If the QR code is not clearly displayed, adjust your camera's focus by moving your device closer or further away until it is clear.

You can also call our Customer Support at 1 (800) 595-9511 [in US] or 1 (800) 267-7377 [in Canada] for help.

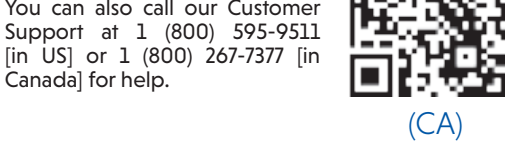

(For the US only)



FOR C-UL COMPLIANCE ONLY

Mesures de sécurité importantes

Afin de réduire les risques d'incendie, de blessures corporelles ou d'électrocution, suivez toujours ces mesures préventives de base lorsque vous utilisez votre téléphone :

- Utilisez et comprenez bien toutes les instructions.
- Observez toutes les instructions et mises en garde inscrites sur l'appareil.
- Débranchez ce téléphone de la prise murale avant de le nettoyer. N'utilisez pas de nettoyeurs liquides ni en aérosol. N'utilisez qu'un chiffon doux et légèrement humecté.
- ATTENTION:** Ne pas installer le socle téléphonique à une hauteur supérieure à 2 mètres.
- N'utilisez pas ce produit près de l'eau, tel que près d'un bain, d'un lavabo, d'un évier de cuisine, d'un bac de lavage ou d'une piscine, ou dans un sous-sol humide ou sous la douche.
- Ne déposez pas ce téléphone sur un chariot, support ou table chancelants. L'appareil pourrait tomber et être sérieusement endommagé.
- Évitez d'installer le système téléphonique dans les endroits soumis à une température extrême, à la lumière directe du soleil ou à proximité immédiate d'appareils électriques ou électroniques. Protégez votre téléphone contre les sources d'humidité, la poussière, les vapeurs et les liquides corrosifs.
- Le boîtier de l'appareil est doté de fentes et d'ouvertures d'aération situées à l'arrière ou en dessous. Afin d'empêcher la surchauffe, ces ouvertures ne doivent pas être obstruées par l'appareil sur un lit, divan, tapis ou autre surface similaires. Ne placez pas cet appareil à proximité d'un élément de chauffage ni d'une plinthe électrique. De plus, ne l'installez pas dans une unité murale ou un cabinet fermé qui ne possède pas d'aération adéquate.
- Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur les étiquettes de l'appareil. Si vous ne connaissez pas le voltage de votre maison, consultez votre marchand ou votre fournisseur d'électricité.
- Ne déposez rien sur le cordon d'alimentation. Installez cet appareil dans un endroit sécuritaire, à où personne ne pourra trébucher sur la ligne d'alimentation ni le cordon téléphonique modulaire.
- N'insérez jamais d'objets à travers les fentes et ouvertures de cet appareil, car ils pourraient toucher à des points de tension dangereux ou court-circuiter des pièces, ce qui constituerait un risque d'incendie ou d'électrocution. N'échappez pas de liquides dans l'appareil.
- Afin de réduire les risques d'électrocution, ne démontez pas l'appareil, mais apportez-le plutôt à un centre de service qualifié s'il doit être réparé. En enlevant le couvercle, vous vous exposez à des tensions dangereuses ou autres dangers similaires. Un montage inadéquat peut être à l'origine d'une électrocution lors d'une utilisation ultérieure de l'appareil. Débranchez l'appareil avant de procéder au nettoyage. Utilisez un chiffon humide et doux.
- Ne surchargez pas les prises de courant et les rallonges.
- Débranchez cet appareil de la prise de courant et communiquez avec le département de service à la clientèle de Vtech dans les cas suivants :
 - Lorsque le cordon d'alimentation est endommagé ou écorché.
 - Si du liquide a été échappé dans l'appareil.
 - Si l'appareil a été exposé à une source d'humidité telle que la pluie ou l'eau.
 - Si le produit ne fonctionne pas normalement en respectant les instructions de fonctionnement. Réglez uniquement les commandes indiquées dans le s instructions de fonctionnement. Les réglages incorrects

- des autres commandes pourraient provoquer un dommage qui pourrait exiger un travail exhaustif de la part d'un technicien autorisé afin de rétablir le fonctionnement normal de l'appareil.
- Si le produit a été échappé et que le socle et/ou le combiné a été endommagé.
- Si le produit affiche une nette diminution de sa performance.
- Évitez d'utiliser un téléphone (autre qu'un sans fil) pendant un orage. Les éclairs peuvent être à l'origine d'une électrocution.
- N'utilisez pas le téléphone pour rapporter une fuite de gaz à proximité de la fuite. En certaines circonstances, une flammeçhe pourrait être provoquée lorsque l'adaptateur est branché à une prise de courant, ou lorsque le combiné est déposé sur le socle. Ceci est un événement commun associé à la fermeture d'un circuit électrique. L'utilisateur ne devrait pas brancher le téléphone à une prise de courant, et ne devrait pas déposer le combiné chargé sur le socle, si le téléphone se trouve à proximité d'un endroit comportant des concentrations de gaz inflammables, à moins que la ventilation soit adéquate. Une flammeçhe dans un tel endroit pourrait provoquer un incendie ou une explosion. De tels environnements peuvent comprendre des endroits où l'on utilise de l'oxygène médical sans ventilation adéquate; des gaz industriels (dissolvants de nettoyage, des vapeurs d'essence, etc.); une fuite de gaz naturel, etc.
- Ne placez que le combiné de votre téléphone près de votre oreille lorsqu'en mode de conversation.
- Ces adaptateurs ont été conçus pour être orientés en position verticale ou montés au sol. Les broches ne sont pas conçues pour maintenir l'adaptateur en place si celui-ci est banché dans une prise au plafond ou sous une table/airmoire.
- Pour le MATERIEL RACCORDE PAR PRISE DE COURANT, le socle de prise de courant doit être installé à proximité du matériel et doit être aisément accessible.
- ⚠ MISE EN GARDE:** Il peut y avoir un risque d'explosion si vous utilisez le mauvais type de piles pour le téléphone. N'utilisez que les piles rechargeables insus les piles de rechange (BT1A242/BT62342). N'incinerez pas les piles. Celles-ci risqueraient d'exploser. Mettre au rebut les batteries usagées conformément aux instructions du fabricant. Débrancher les lignes téléphoniques avant le remplacement des piles.
- Évite d'utiliser la batterie dans les conditions suivantes:
 - des températures extrêmes faibles ou élevées
 - l'absence d'un batterie pendant l'utilisation, le stockage ou le transport.
 - remplacement d'une batterie par un type incorrect pouvant supprimer une protection.
 - mise au rebut d'une batterie dans un feu ou dans un four chaud, ou écrasement mécanique ou coupure d'une batterie, susceptible de provoquer une explosion.
 - maintien d'une batterie dans un environnement à très haute température pouvant provoquer une explosion ou la fuite de liquide ou de gaz inflammables.
 - batterie soumise à une pression de l'air extrêmement faible pouvant provoquer une explosion ou la fuite de liquide ou de gaz inflammables.
- N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril.
- La plaque signalétique appliquée est située au bas où à proximité du produit.

CONSERVEZ CES INSTRUCTIONS

Pile

- N'utilisez que la pile incluse ou l'équivalent.
- Ne jetez pas la pile au feu. Vérifiez les instructions spécifiques de mise au rebut publiées aux autorités locales.
- N'ouvrez pas et ne mettez pas la pile. L'électrolyte qui s'en échapperait est corrosif et pourrait causer des brûlures ou des blessures aux yeux ou à la peau. L'électrolyte est toxique si avalé.
- Soyez prudents lorsque vous manipulez les piles afin d'éviter les courts-circuits provoqués par des matériaux conducteurs.
- Rechargez la pile incluse avec cet appareil, selon les instructions et limites spécifiées dans ce guide d'utilisation.

Stimulateurs cardiaques implantés dans l'organisme

Les stimulateurs cardiaques (s'applique uniquement aux téléphones numériques sans fil) :

L'organisme "Wireless Technology Research, LLC (WTR)", une firme de recherche indépendante, a mené une évaluation pluridisciplinaire des interférences entre les téléphones sans fil portatifs et les stimulateurs cardiaques implantés dans l'organisme. Appuyée par l'Administration des aliments et drogues (FDA) des États-Unis, la firme WTR recommande aux médecins :

Avis aux détenteurs de stimulateurs cardiaques

- Si ils doivent utiliser le téléphone sans fil à une distance d'au moins six pouces du stimulateur cardiaque.
- Si ls ne doivent PAS placer le téléphone sans fil directement sur le stimulateur cardiaque, tel que dans une poche de chemise, lorsque celui-ci est en marche.
- Si ils doivent utiliser le téléphone sans fil en appuyant sur l'oreille qui se trouve dans la direction opposée au stimulateur cardiaque.

L'étude effectuée par l'organisme WRS n'a pas identifié de risque pour les détenteurs de stimulateurs cardiaques causés par les gens qui utilisent un téléphone sans fil à proximité de ceux-ci.

À propos des téléphones sans fil

Confidentialité - Les mêmes caractéristiques qui constituent des avantages pour les téléphones sans fil affichent également des restrictions. Les appels téléphoniques sont transmis entre le combiné sans fil et le socle par le biais d'ondes radio ; il y a donc la possibilité que vos conversations téléphoniques sans fil soient interceptées par des équipements de réception radio se trouvant dans la portée du combiné sans fil. Pour cette raison, vous ne devez pas percevoir les communications téléphoniques sans fil comme étant aussi confidentielles que celles des téléphones à cordons.

Alimentation électrique : Le socle de ce téléphone sans fil doit être branché à une prise électrique fonctionnelle. La prise électrique ne doit pas être contrôlée par un interrupteur mural. Les appels ne pourront pas être effectués du combiné sans fil si le socle est débranché ou mis hors tension ou si le courant est coupé.

Possibilité d'interférences aux téléviseurs : Certains téléviseurs sans fil fonctionnent avec des fréquences pouvant causer des interférences aux téléviseurs et aux magnétoscopes. Pour réduire ou prévenir de telles interférences, ne placez pas le socle du téléphone sans fil près ou sur un téléviseur ou magnétoscope. S'il y a présence de parasites, il est conseillé d'éloigner le téléphone sans fil du téléviseur ou du magnétoscope afin de réduire possiblement les interférences.

Piles rechargeables : Manipulez les piles avec soin afin de ne pas les court-circuiter avec des bagues, bracelets ou clés. Les piles ou le conducteur peut surchauffer et causer des blessures. Respectez la polarité adéquate entre la pile et le chargeur.


This Class B digital apparatus complies with Canadian requirement:

CAN ICES-3 (B)/NMB-3(B).

FCC Part 68 and ACTA

This equipment complies with Part 68 of the FCC rules and with technical requirements adopted by the Administrative Council for Terminal Equipment of ACTA. The label on the back or bottom of this equipment contains, among other things, a product identifier in the format US:AAAEQ##TXXXX. This identifier must be provided to your telephone service provider upon request.

THE RBRC SEAL

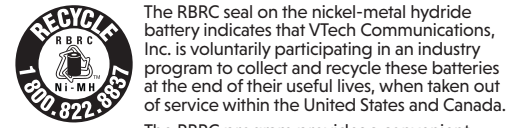

The RBRC Seal on the nickel-metal hydride battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC program provides a convenient alternative to placing used nickel-metal hydride batteries into the trash or municipal waste, which may be illegal in your area. VTech's participation in RBRC makes it easy for you to drop off the spent battery at local retailers participating in the RBRC program or at authorized VTech product service centers. Please call **1 (800) 8 BATTERY®** for information on NI-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2Recycle, Inc.

FCC, ACTA and IC REGULATIONS

FCC Part 15

NOTE: This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- WARNING:** Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with Part 15 of the FCC rules. Operation is subject to the following