

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

Issued test report consists of 158 pages

Page 1 (158)

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC) Anechoic chamber registration no.: 3463 (IC) TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 166/98
Deutscher
Akkreditierungs
Rat

Independent ETSI compliance test house



Accredited Bluetooth<sup>TM</sup> Test Facility (BQTF)

Test report no.: 4\_0902-15-03/03 FCC Part 24/22/15 myX3-2a (B2003a+) FCC ID: M9H95X32A

CETECOM – ICT Services GmbH Untertürkheimerstr. 6-10 66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0 Fax: + 49 (0) 681 / 598-9075



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 2 (158)

### **Table of Contents**

#### 1 General information

- 1.1 Notes
- **Testing laboratory** 1.2
- Details of applicant 1.3
- Application details 1.4
- 1.5 Test item
- **Test standards** 1.6
- 2 **Technical test**
- 2.1 2.2 Summary of test results
- Test report
- 1 **General information**

#### 1.1 **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### 1.2 **Testing laboratory**

**CETECOM ICT Services GmbH** Untertürkheimer Straße 6 - 10 66117 Saarbrücken

Germany

: +49 681 598 - 9100 Telefone Telefax : +49 681 598 - 9075 E-mail : info@ict.cetecom.de : www.cetecom-ict.de Internet

#### **Accredited testing laboratory**

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-166/98

**Listed by**: Federal Communications Commission (FCC)

**Identification/Registration No: 90462** 

Accredited Bluetooth<sup>™</sup> Test Facility (BQTF)

BLUETOOTH<sup>™</sup> is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM



#### 1.3 Details of applicant

Name : SAGEM SA

Street : 2-4, rue du Petit Albi

City : F-95800 Cergy Saint-Christophe

**Country**: France

Telephone: +33 1 30 73 37 37 Telefax: +33 1 34 25 74 16 Contact: Mr. Jean Marquet Telephone: +33 1 30 73 37 37

e-mail : Jean.marquet@sagem.com

1.4 Application details

Date of receipt of application : 2003-07-31 Date of receipt of test item : 2003-07-31

Date of test : 2003-07-31 -2003-08-05 and 2003-11-03/06

1.5 Test item

Type of equipment : Dual Band PCS Mobile Phone (PCS 850/1900 MHz)

Type designation : MyX3-2A (B2003a+)

Manufacturer : Sagem SA

Street

City

Country

Serial numbers : IMEI :010240.00.000046.0

Additional information: :

Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz

Type of modulation : 300KGXW / 300KG7W

Number of channels : 300 (PCS1900) and 125 (PCS850)

Antenna : Integral antenna

Power supply : 3,8V DC Li-ion Battery

Output power GSM 850 : cond.: 32.9 dBm Peak , ERP: 26.0 dBm (Burst);

EIRP: 28.1 dBm (Burst)

Output power GSM 1900 : cond : 31.5 dBm Peak , ERP: 29.1 dBm (Burst);

EIRP: 31.2 dBm (Burst)

Type of equipment : Temperature range :  $-30^{\circ}\text{C} - +60^{\circ}\text{C}$ 

FCC - ID : M9H95X32A

IC

Hardware : V0x Software : J 3,EE

1.6 Test standards: FCC Part 24, 22

FCC Part 15



2 Technical test

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link).

#### **Remarks:**

For AC-conducted measurements we used three different AC chargers, (18 599 601-3, 18805593-9 and DTC3515 045E040E).

The last two only informative, not for US market.

We also tested the phone with a headset (23812517-0), with a cigar lighter adapter (CLA4-3102) combined with a data cable (23810787-0).

Test setups:

Radiated measurements: Car kit A17-BA10-010 and Mobile

Conducted measurements: Mobile with every charger

Part15: Mobile with each part of the ancillary equipment.

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### **FINAL VERDICT: PASS**

**Technical responsibility for area of testing:** 

2003-12-02 RSC 8411 Berg M.

Date Section Name Signature

Technical responsibility for area of testing:

2003-12-02 RSC8412 Hausknecht D. Signature

Date Section Name Signature



2.2 Test report

**TEST REPORT** 

Test report no.: 4\_0902-15-03/03



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 6 (158) TEST REPORT REFERENCE LIST OF MEASUREMENTS PARAMETER TO BE MEASURED **PAGE** Part PCS 1900 **POWER OUTPUT** 7 **SUBCLAUSE § 24.232** FREQUENCY STABILITY **SUBCLAUSE § 24.235** 9 AFC FREQ ERROR vs. VOLTAGE **10** AFC FREQ ERROR vs. TEMPERATURE 10 **EMISSIONS LIMITS** 12 **§24.238 CONDUCTED SPURIOUS EMISSIONS** 29 BLOCK EDGE COMPLIANCE FOR BLOCK A AND C 38 **OCCUPIED BANDWIDTH** 40 **§2.989 CONDUCTED EMISSIONS** § 15.107/207 47 PART PCS850 **POWER OUTPUT** SUBCLAUSE § 22.913 53 55 FREQUENCY STABILITY **SUBCLAUSE § 22.355** AFC FREQ ERROR vs. VOLTAGE **56** AFC FREQ ERROR vs. TEMPERATURE 56 **EMISSIONS LIMITS §22.917 58 CONDUCTED SPURIOUS EMISSIONS** 73 BLOCK EDGE REQUIREMENTS FOR BLOCK 1 TO BLOCK 4 **82 OCCUPIED BANDWIDTH §2.989** 84 **EMISSION LIMITATIONS FOR CELLULAR §22.917(F)** 91 ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT PART 15.109 99 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS 136 **Test site** 138 Photographs of the equipment 142



#### **POWER OUTPUT**

**SUBCLAUSE § 24.232** 

#### **Summary:**

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### **Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

#### Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

#### **Power Measurements:**

#### **Conducted:**

Frequency	Power Step	Peak Output Power	Average Output Power
(MHz)	•	(dBm)	(dBm)
1850.2	0	31.5	31.4
1880.0	0	31.1	31.0
1909.8	0	30.4	30.3
Measuremen	t uncertainty	±0.5	5 dB



#### **EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

#### Method of Measurement:

- 1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. A "reference path loss" is established as Pin + 2.1 Pr.
- 3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
- 5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
- 6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi.

#### Limits:

Power Step	Burst PEAK EIRP (dBm)
0	<33

#### Power Measurements (Radiated)

Frequency	Power Step		EAK EIRP Bm)	MODULATION AVERAGE (dBm)	
(MHz)		EIRP	ERP	EIRP	ERP
1850.2	0	31.0	28.9	25.0	22.9
1880.0	0	31.0	28.9	25.0	22.9
1909.8	0	31.2	29.1	25.2	23.1
Measurement uncertainty			±3	3 dB	



#### FREQUENCY STABILITY

**SUBCLAUSE § 24.235** 

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the mobile station to overnight soak at -30 C.
- 3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal 3.8 Volts. Vary supply voltage from minimum
- 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.8 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
- 6. Subject the mobile station to overnight soak at +60 C.
- 7. With the mobile station, powered with 3.8 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.8 V dc.




## AFC FREQ ERROR vs. VOLTAGE


Voltage	Frequency Error	Frequency Error	Frequency Error
(V)	(Hz)	(%)	(ppm)
3.3	91	0,00000484	0,0484
3.4	92	0,00000489	0,0489
3.5	71	0,00000378	0,0378
3.6	67	0,00000356	0,0356
3.7	53	0,00000282	0,0282
3.8	65	0,00000346	0,0346
3.9	83	0,00000441	0,0441
4.0	72	0,00000383	0,0383
4.1	78	0,00000415	0,0415
4.2	75	0,00000399	0,0399
4.3	79	0,00000420	0,0420
4.4	83	0,00000441	0,0441

## AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE	Frequency Error	Frequency Error	Frequency Error
(°C)	(Hz)	(%)	(ppm)
-30	-104	-0,00000553	-0,0553
-20	-82	-0,00000436	-0,0436
-10	-89	-0,00000473	-0,0473
±0.0	-96	-0,00000511	-0,0511
+10	-91	-0,00000484	-0,0484
+20	53	0,00000282	0,0282
+30	85	0,00000452	0,0452
+40	100	0,00000532	0,0532
+50	107	0,00000569	0,0569
+60	121	0,00000644	0,0644



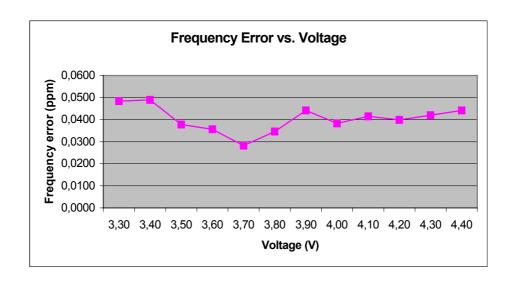

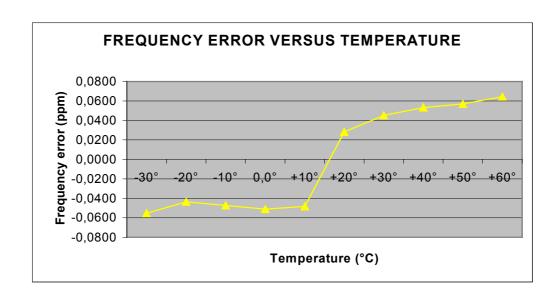



#### **EMISSIONS LIMITS**

**§24.238** 

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.



#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

#### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

	EMIS	SSION LIMITAT	IONS	
f (MHz)	amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
		CH 512		
1850.2	31.0	-13.0		carrier
5550.6	-46.9	(44.0 dBc)	77.9	complies
		CH 661		
1880.0	31.0	-13.0		carrier
5640.0	-44.3	(44.0 dBc)	75.3	complies
		CH 810		
1909.8	31.2	-13.0		carrier
5729.4	-39.4	(44.2 dBc)	70.6	complies
9549.0	-40.5		31.7	complies
Measurement	uncertainty		± 0.5dB	



### Traffic-Mode (this is valid for all 3 channels PCS 850 and PCS 1900 up to 30 MHz)

EUT: myX-4a Manufacturer: Sagem SA

Operating Condition: Data cable, AC/DC Charger, traffic mofe


Test Site: Cetecom, Room 6

Rera M.

Operator: Berg M.
Test Specification: 115V / 60 Hz

Comment:

Start of Test: 03.09.03 / 08:21:22

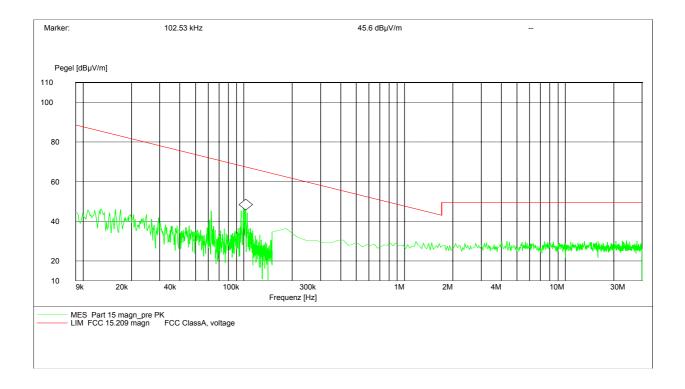

# For peak measurement we use 100 kHz RBW/VBW For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz 9 kHz for 150 kHz to 30 MHz


#### Limits

### **SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



### Channel 512 (up to 4 GHz)

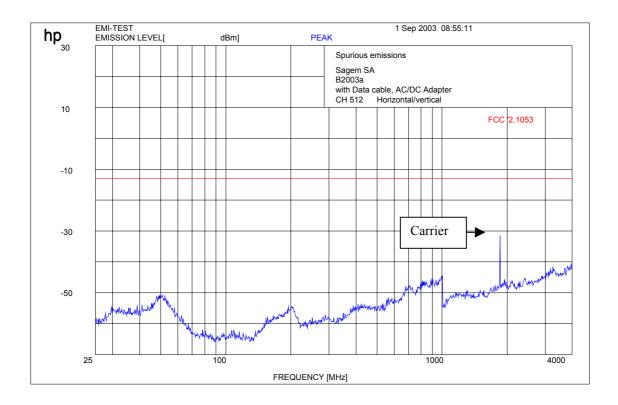


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter

The second peak at the right side of the carrier is the signal from the base station simulator.




### Channel 512 (up to 12 GHz)

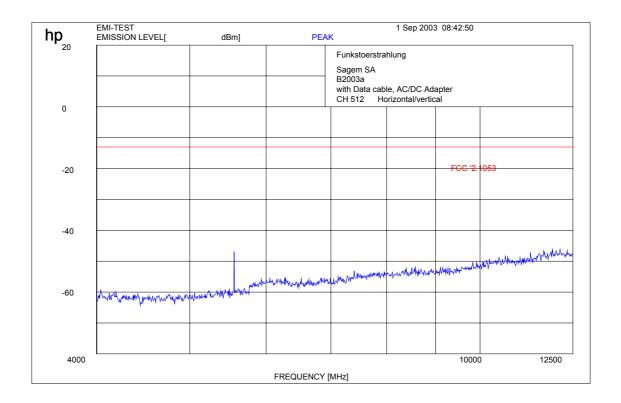

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$ 




### **Channel 512:- 25 GHz**

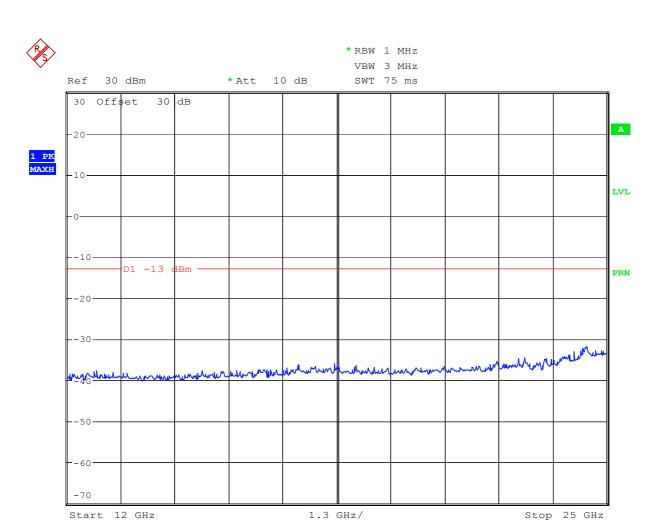

Date: 1.SEP.2003 13:29:21



Channel 661 (up to 4 GHz)

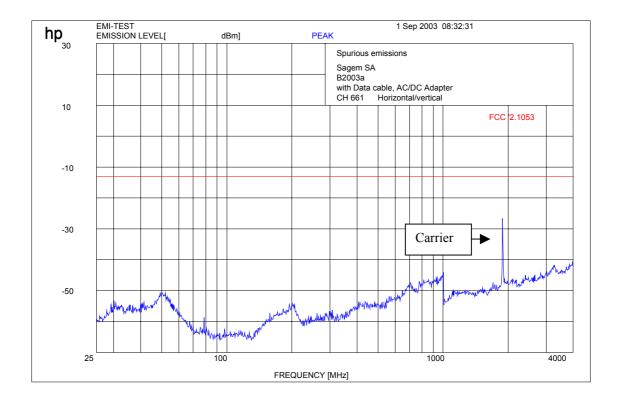


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter.

The second peak at the right side of the carrier is the signal from the base station simulator.



### Channel 661 (up to 12 GHz)

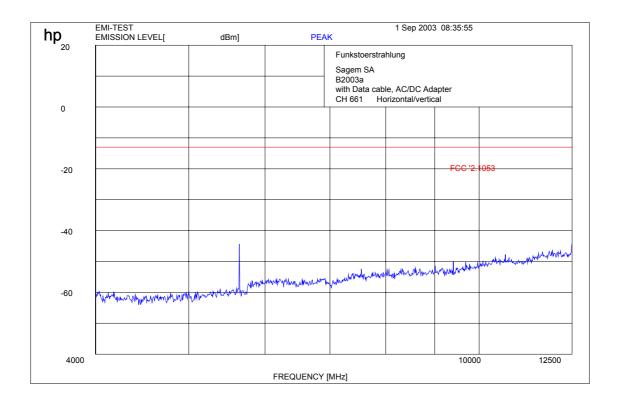

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$ 




Stop 25 GHz

Test report no..: 4\_0902-15-03/03 Issue Date: 2003-09-03 Page 20 (158)

**Channel 661: -25 GHz** 



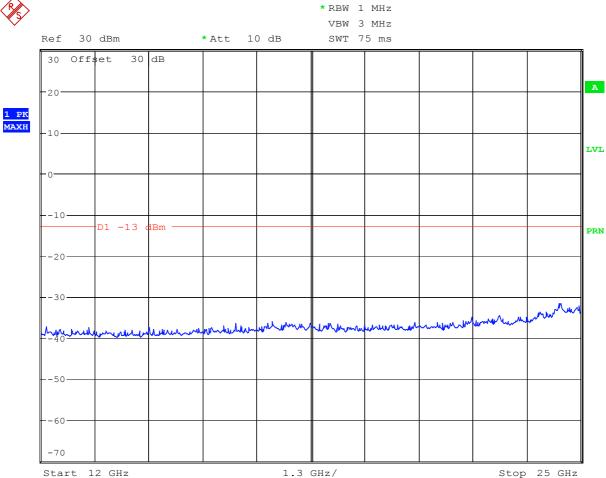


1.SEP.2003 13:28:47

Start 12 GHz



### Channel 810 up to 4 GHz

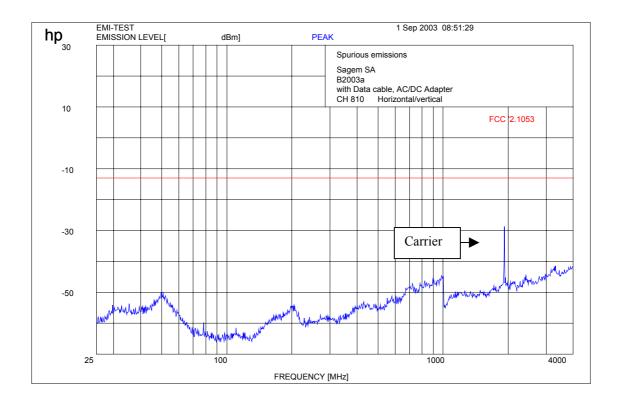


f < 1 GHz : RBW/VBW : 100 kHz  $f \ge 1 \text{GHz} : \text{RBW/VBW} 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter




## Channel 810 up to 12 GHz

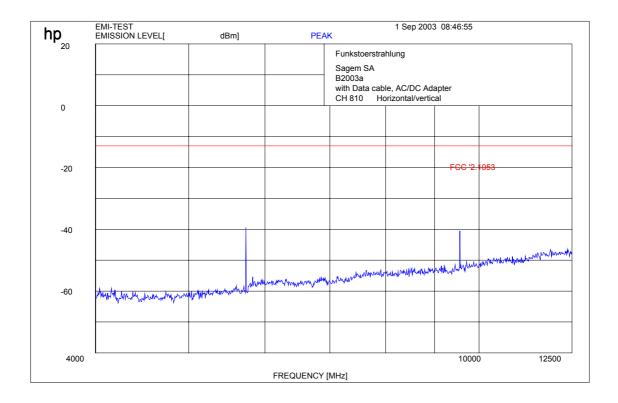

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



**Channel 810: -25 GHz** 

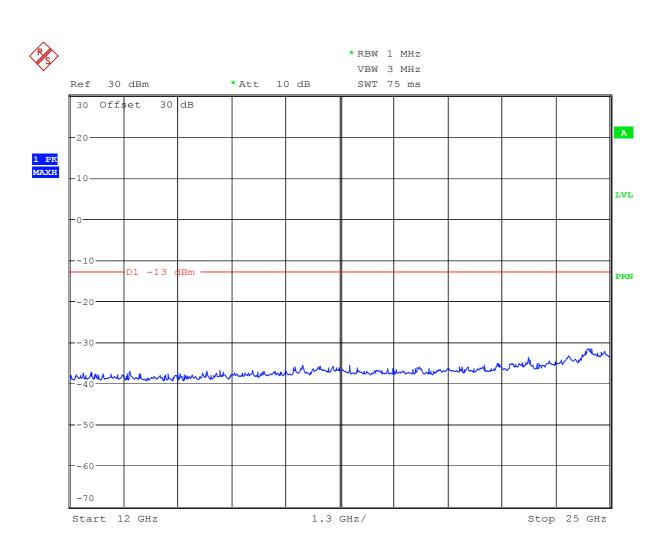

Date: 1.SEP.2003 13:32:17



## **RECEIVER SPURIOUS RADIATION Radiated**

§ 15.109

		SPU	RIOUS E	MISSIONS	LEVEL (μ	V/m)		
Cl	H 512,661,8	10						
f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)
34.2	QP	11.0						
67.9	QP	6.6						
81.2	QP	16.6						
123.2	QP	10.8						
Measui	rement unce	ertainty			±3 (	dB		

f < 1 GHz: RBW/VBW: 100 kHz H = Horizontal; V= Vertical

1

**f≥1GHz: RBW/VBW: 1 MHz** 

ŕ

### Measurement distance see table

Limits

**SUBCLAUSE § 15.109** 

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3



### Idle-Mode (this is valid for all 3 channels, PCS 850 and PCS 1900 up to 30 MHz)

FCC Rule 47

#### Part 15.209 Magnetics

EUT: myX-4a (family B2003a)

Manufacturer: Sagem SA


Operating Condition: Data cable, AC/DC Charger, Idle mode

Test Site: Cetecom, Room 6

Operator: Berg M. Test Specification: 15.109/15.209

Comment:

Start of Test: 03.09.03 / 08:27:55

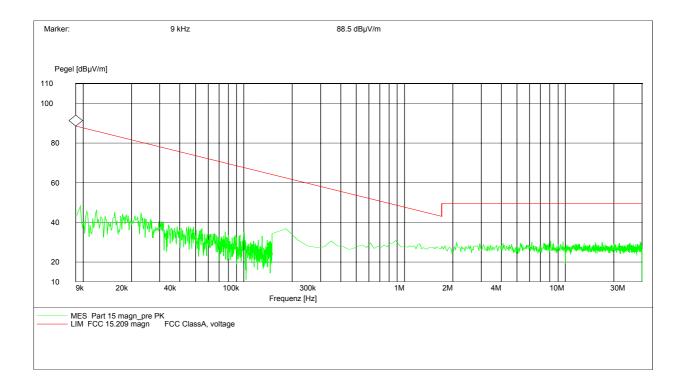


### For peak measurement we use 100 kHz RBW/VBW For CISPR QP measurement we use 200 Hz from 9 kHz to 150 kHz, 9 kHz for 150 kHz to 30 MHz

Limits SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30




Idle-Mode (this is valid for all 3 channels and up to 4 GHz)

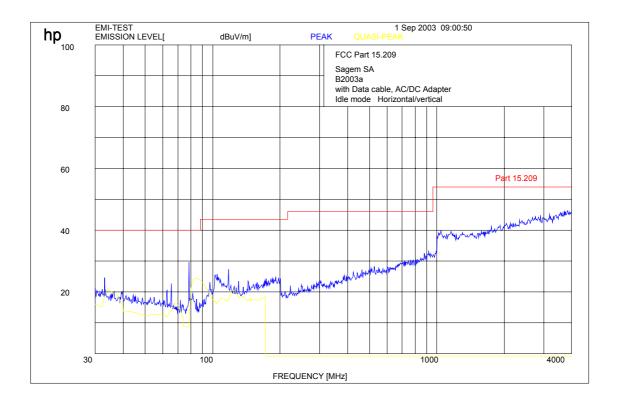

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 




### Idle-Mode (this is valid for all 3 channels and up to 12 GHz)

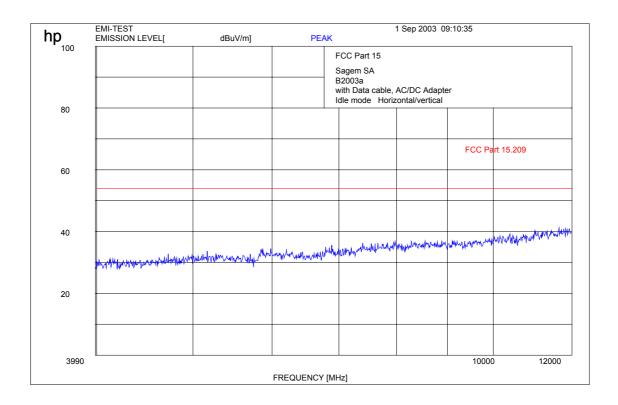

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{GHz}$ : RBW/VBW 1 MHz



### Idle-Mode (this is valid for all 3 channels and up to 25 GHz)

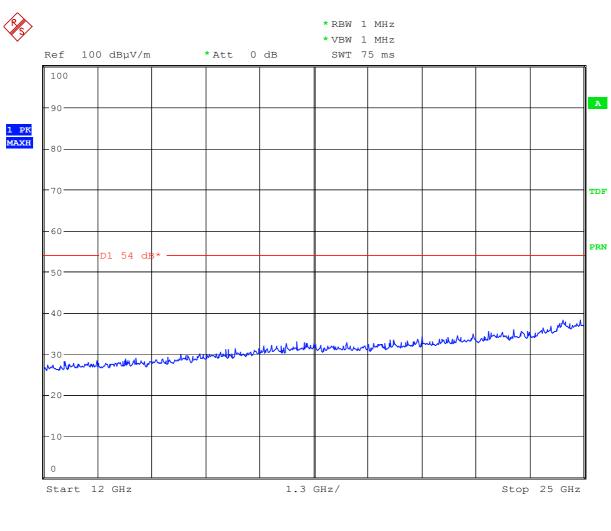

Date: 1.SEP.2003 13:43:05

For this measurement we used a special wideband horn antenna and a low noise preamp.



#### **CONDUCTED SPURIOUS EMISSIONS**

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### **USPCS Transmitter**

### **Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

	EMI	SSION LIMITATI	ONS	
f (MHz)	amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
· / 1	•	CH 512		
1850.2	31.5	-13.0		carrier
1845.00	-13.93	(44.5 dBc)	45.43	complies
9239.6	-27.88		59.38	complies
		СН 661		
1880.0	31.1	-13.0		carrier
1875.99	-29.31	(44.1 dBc)	60.41	complies
9402.08	-24.55		55.65	complies
		CH 810		
1909.8	30.4	-13.0		carrier
1905.84	-36.39	(43.4 dBc)	66.79	complies
1910.02	-13.47		43.87	complies
9533.33	-27.33		57.73	complies
Measurement t	uncertainty		± 0.5dB	



#### **Measurements:**


Channel: 512

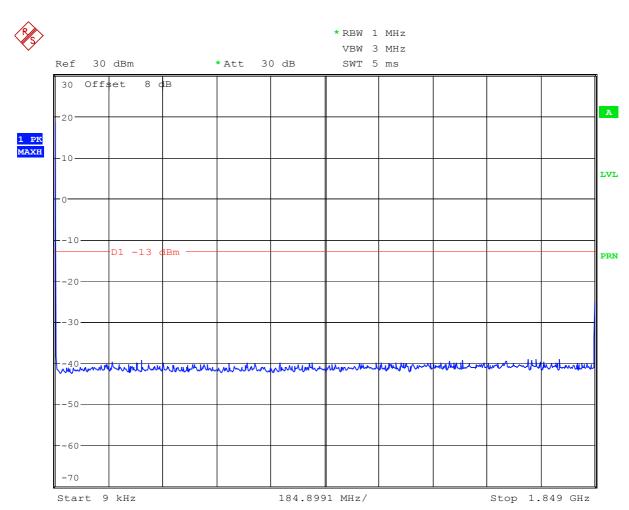

Date: 1.SEP.2003 14:03:17




### **Channel 512**

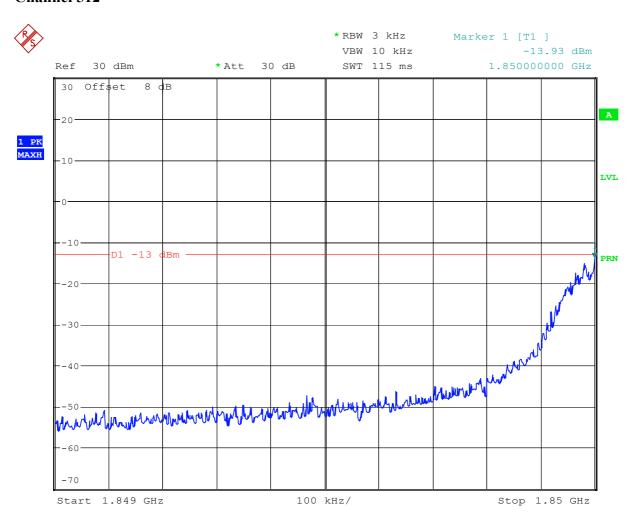

Date: 1.SEP.2003 14:16:43




### **Channel 512**

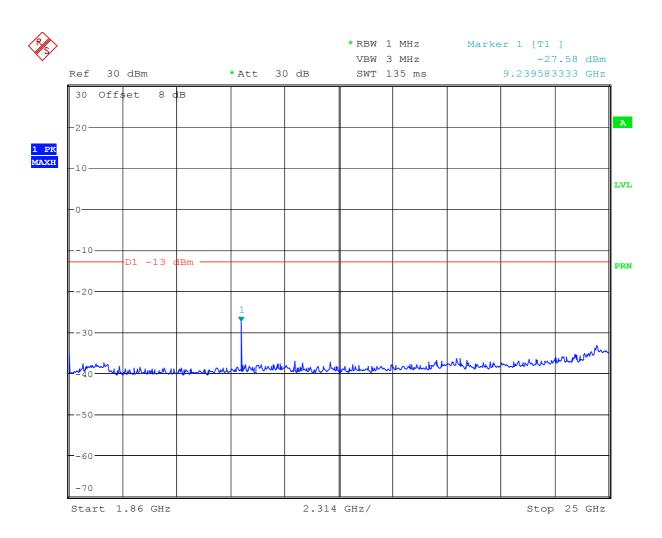

Date: 1.SEP.2003 14:04:54




### **Channel 661**

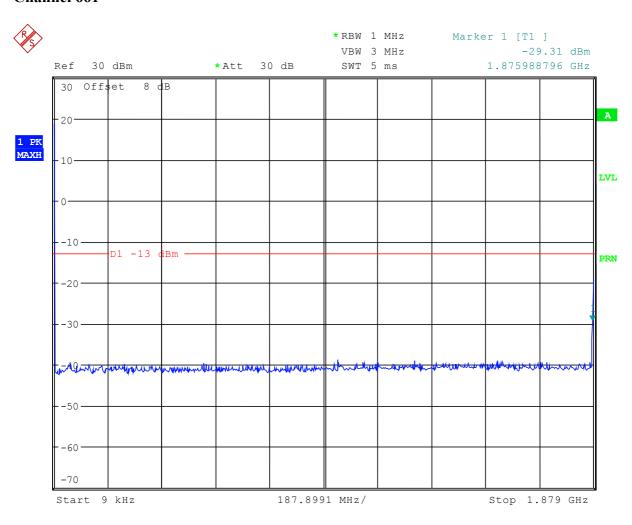

Date: 1.SEP.2003 14:07:45




### **Channel 661**

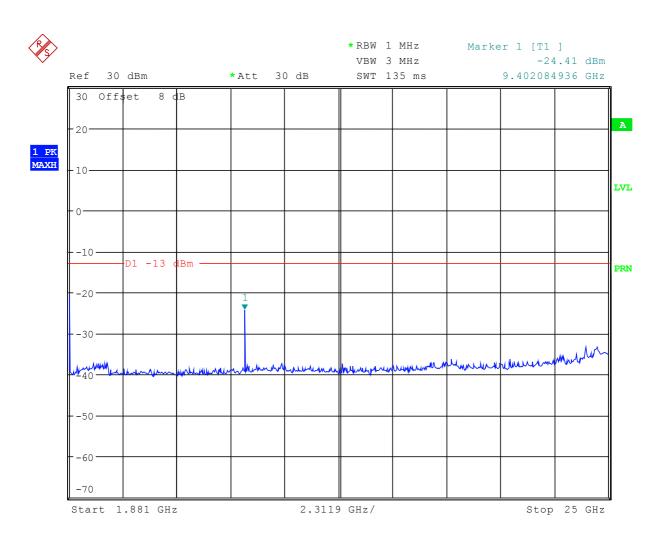

Date: 1.SEP.2003 14:06:29




### **Channel 810**

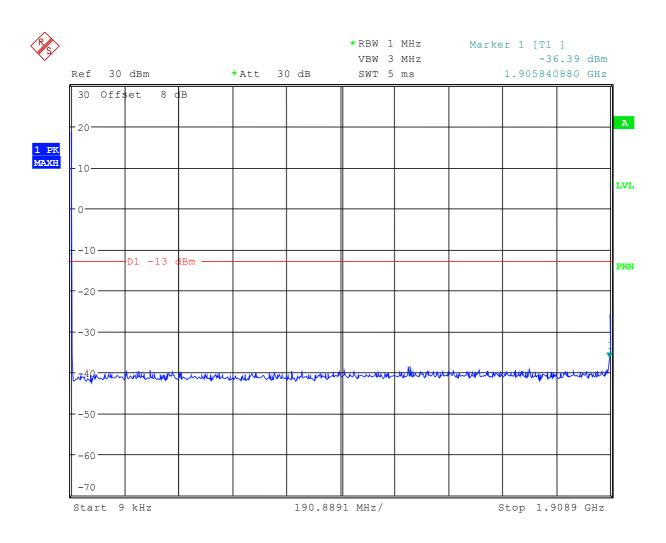

Date: 1.SEP.2003 14:09:14




### **Channel 810**

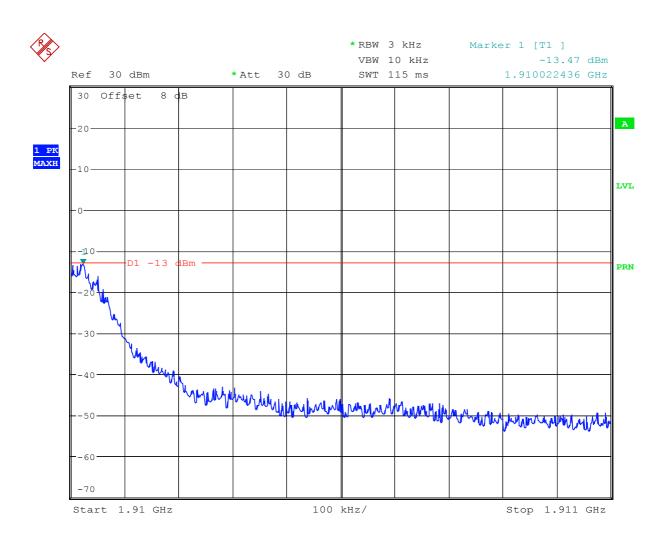

Date: 1.SEP.2003 14:10:37



### **Channel 810**

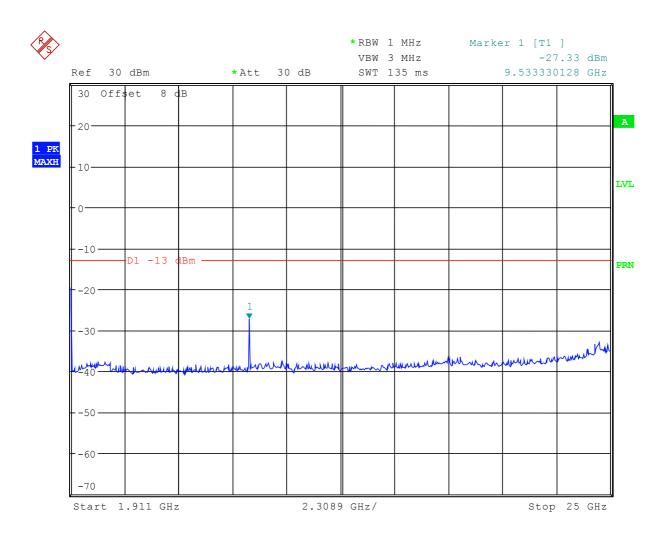

Date: 1.SEP.2003 14:14:59




### BLOCK EDGE COMPLIANCE FOR BLOCK A AND C

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


# **Measurements: Block A Channel 512**

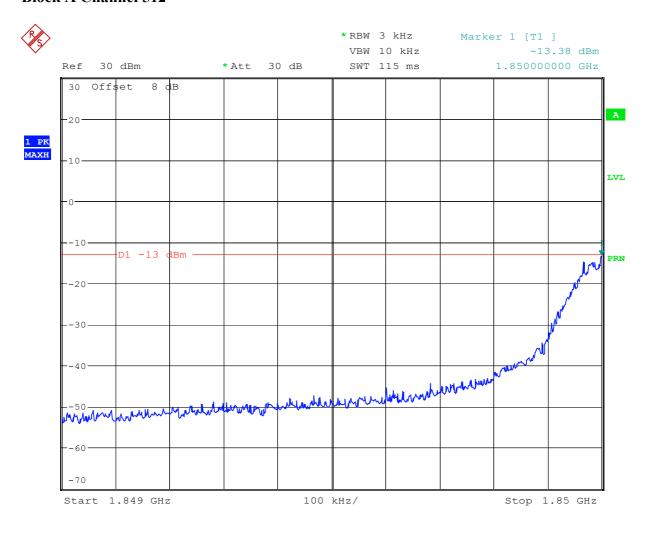

Date: 1.SEP.2003 14:22:45



### **Block C Channel 810**

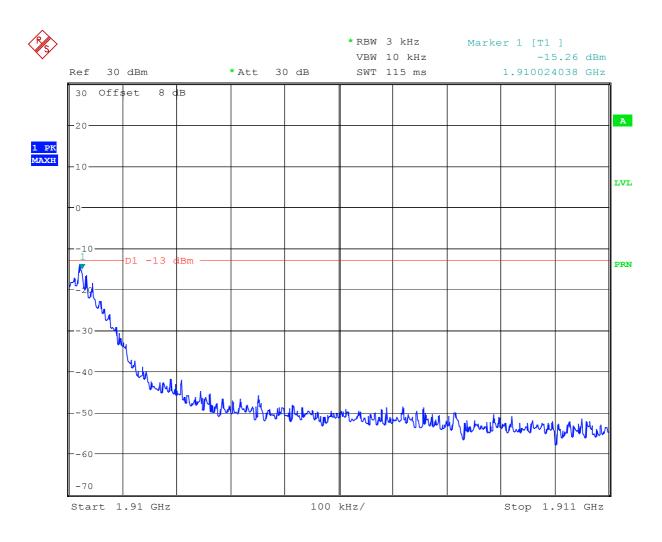

Date: 1.SEP.2003 14:47:48



### **OCCUPIED BANDWIDTH**

**§2.989** 

#### **Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	296.474	331.731
1880.0 MHz	299.679	333.333
1909.8 MHz	288.462	322.115

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 299.7 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.




### Channel 512 99% Occupied Bandwidth

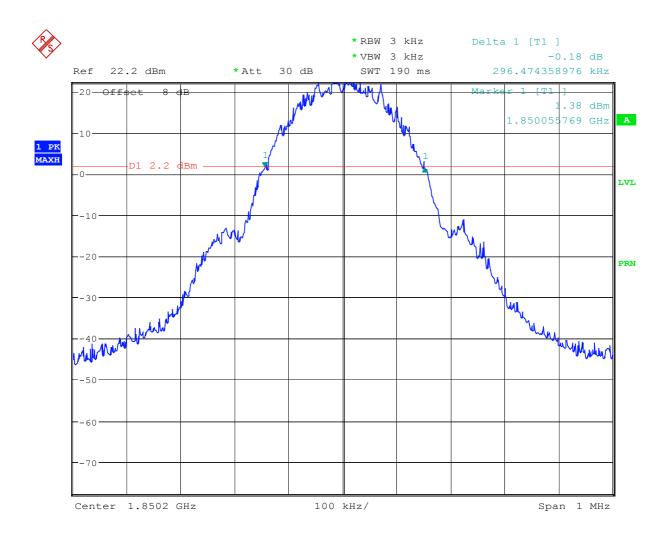

Date: 1.SEP.2003 15:05:49




# Channel 512 -26 dBc Bandwidth

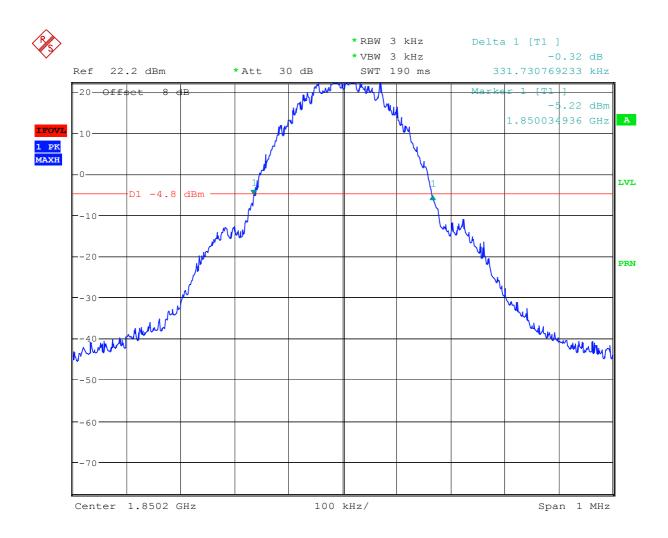

Date: 1.SEP.2003 15:07:08




### Channel 661 99% Occupied Bandwidth

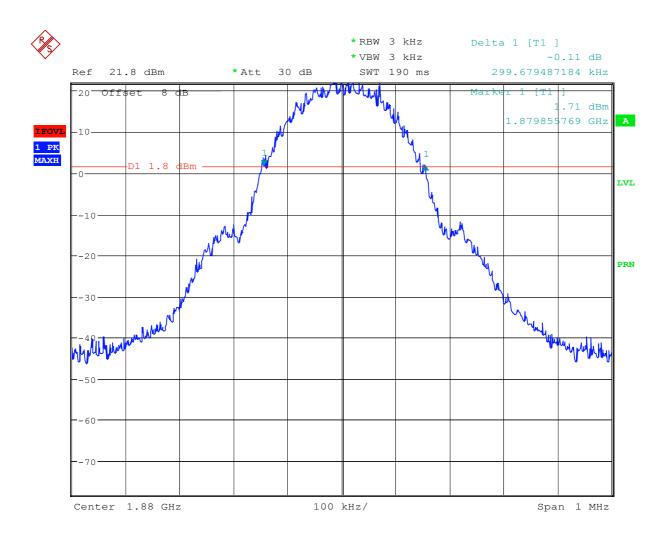

Date: 1.SEP.2003 15:11:36




# Channel 661 -26 dBc Bandwidth

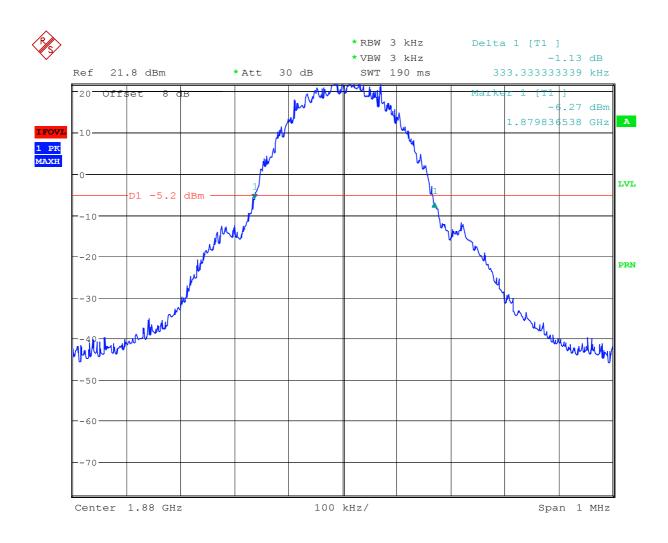

Date: 1.SEP.2003 15:12:49




### Channel 810 99% Occupied Bandwidth

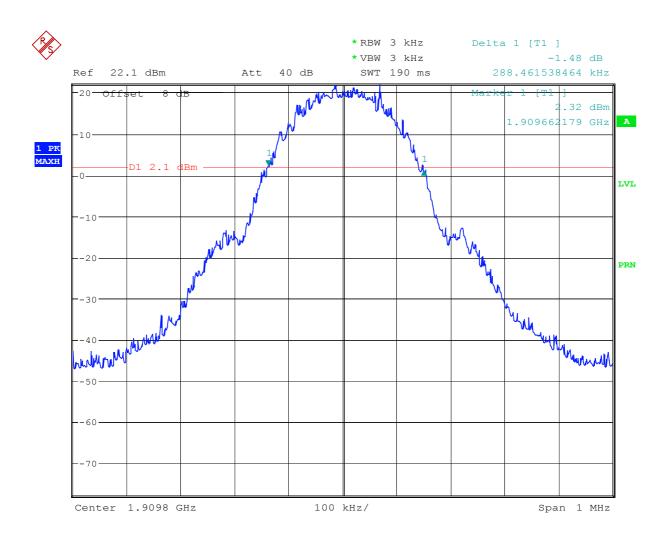

Date: 1.SEP.2003 15:15:44



# Channel 810 -26 dBc Bandwidth

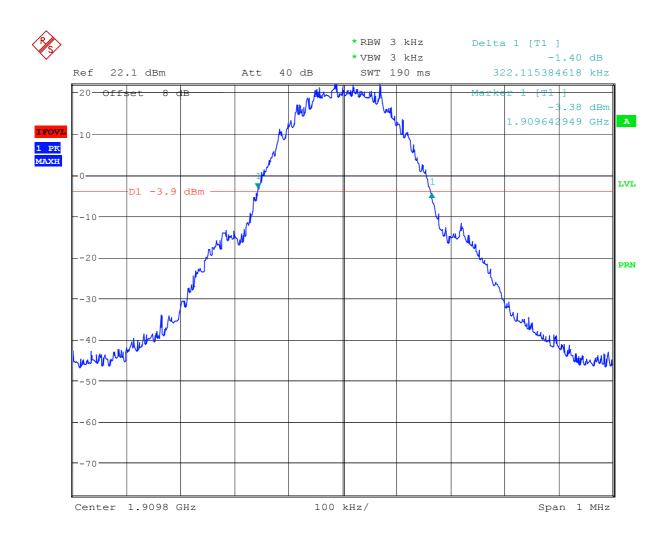

Date: 1.SEP.2003 15:16:34



### **CONDUCTED EMISSIONS**

§ 15.107/207


#### CISPR 22 (Valid for PCS 850 and PCS1900)

EUT: myX3-2a + charger 18 599 601-3

Manufacturer: Sagem

Operating Condition: TCH 850/1900 MHz

Test Site: Room 006
Operator: Weiden
Test Specification: EN 55022
Comment: 115 V / 60 Hz

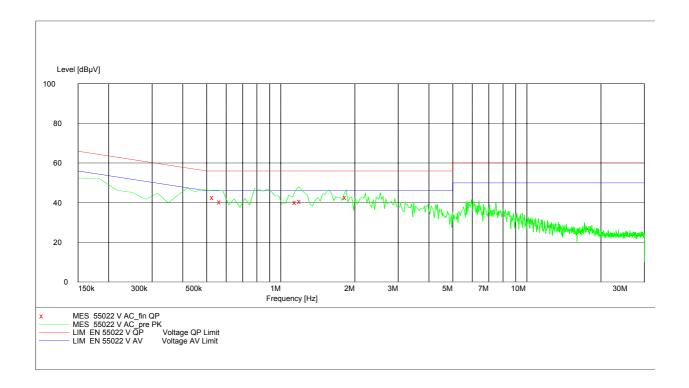

#### MEASUREMENT RESULT: "55022 V AC fin QP"


			_ ·	-		
Frequency	Level 7	Transd L	imit Ma	argin L	ine	PΕ
MHz	dΒμ <sup>γ</sup>	J dB	dΒμV	dB		
0.540000	42.60	10.4	56	13.4	N	GND
0.577500	40.30	10.4	56	15.7	N	GND
1.170000	40.10	10.3	56	15.9	L1	FLO
1.222500	40.70	10.3	56	15.3	L1	FLO
1.867500	42.60	10.4	56	13.4	L1	GND



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 48 (158)

EUT: myX3-2a + charger 18 599 601-3

Manufacturer: Sagem Operating Condition: Idle mode Test Site: Room 006 Weiden Operator: Test Specification: EN 55022 115V / 60 Hz Comment:

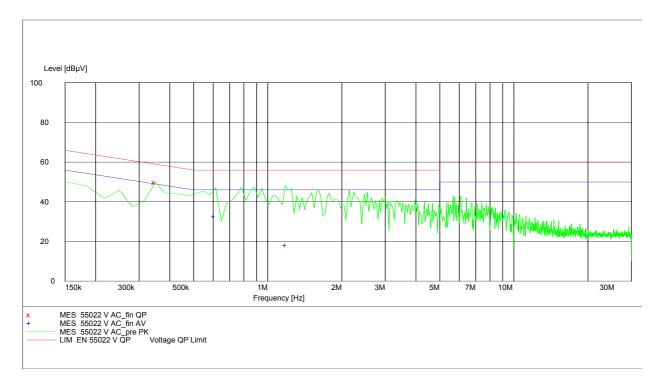

MEASUREMENT RESULT: "55022 V AC\_fin QP"
Frequency Level Transd Limit Margin Line PΕ MHz dΒμV dВ dΒμV dВ

0.352500 49.90 10.7 59 9.1 L1 FLO

MEASUREMENT RESULT: "55022 V AC fin AV"

Frequency Level Transd Limit Margin Line

dВ dBuV MHz dBuV

32.40 0.615000 10.4 46 13.6 L1 FLO 1.200000 18.00 10.3 46 28.0 L1 FLO

#### Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	

<sup>\*</sup> Decreases with the logarithm of the frequency.



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 49 (158)


#### CISPR 22 (Valid for PCS 850 and PCS1900)

EUT: myX3-2a + charger 18 805 593-9

Manufacturer: Sagem

Operating Condition: TCH 850/1900 MHz

Test Site: Room 006 Operator: Weiden Test Specification: EN 55022 230V 50 Hz Comment:

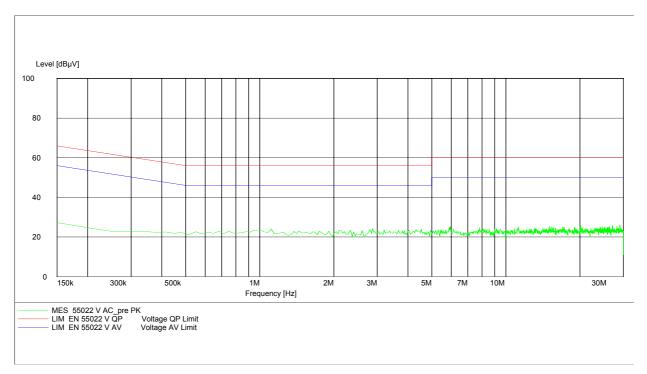

### SCAN TABLE: "EN 55022 V"

Short Description: Voltage Mains 1.60

Start Stop Detector Meas. Step ΙF Transducer

Time Bandw.

Frequency Frequency Width 150.0 kHz 30.0 MHz 7.5 kHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458




#### CISPR 22 (Valid for PCS 850 and PCS1900)

EUT: myX3-2a + charger 18 805 593-9

Manufacturer: Sagem
Operating Condition: Idle mode
Test Site: Room 006
Operator: Weiden
Test Specification: EN 55022

Comment:

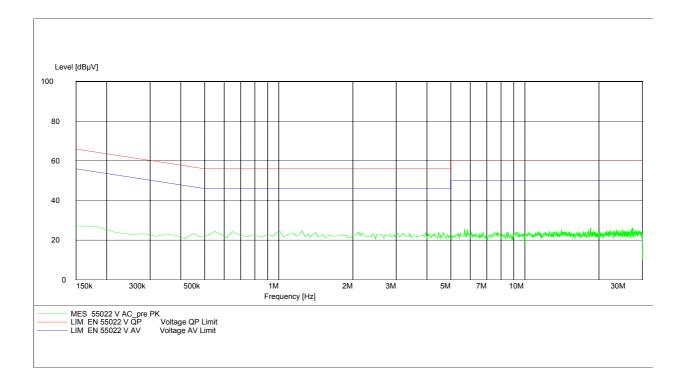

#### Limit § 15.207

Conducted Limit (dBuV)		
Quasi-peak	Average	
66 to 56 *	56 to 46 *	
56	46	
60	50	
	Quasi-peak 66 to 56 * 56	

<sup>\*</sup> Decreases with the logarithm of the frequency.



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 51 (158)


#### CISPR 22 (Valid for PCS 850 and PCS1900)

EUT: myX3-2a + charger DTC3515 045E040E

Manufacturer: Sagem

Operating Condition: TCH 850 / 1900 MHz

Room 006 Test Site: Weiden Operator: Test Specification: EN 55022 230 V / 50 Hz Comment:

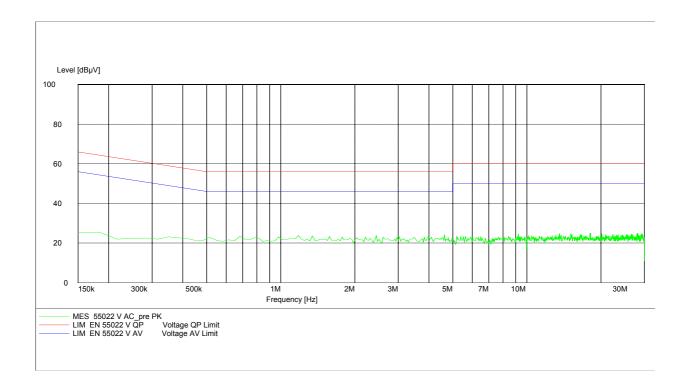

#### SCAN TABLE: "EN 55022 V"


Short Description: Voltage Mains 1.60
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458



#### CISPR 22 (Valid for PCS 850 and PCS1900)

EUT: myX3-2a + charger DTC3515 045E040E

Manufacturer: Sagem
Operating Condition: Idle mode
Test Site: Room 006
Operator: Weiden
Test Specification: EN 55022
Comment: 230 V / 50 Hz

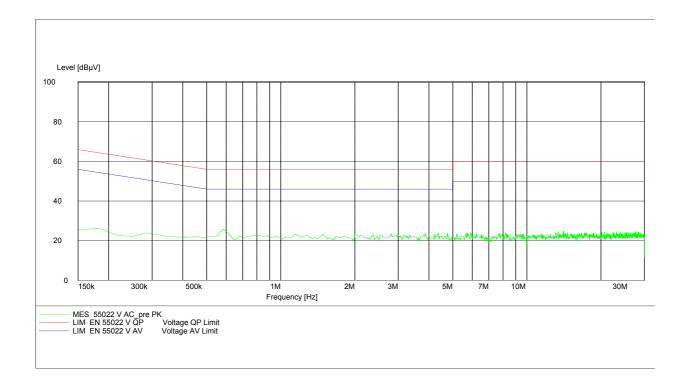

### Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	

<sup>\*</sup> Decreases with the logarithm of the frequency.



### PART PCS 850

#### **POWER OUTPUT**

SUBCLAUSE § 22.913

### **Summery:**

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### **Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

#### Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

#### **Power Measurements:**

#### **Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	32.8	32.7
836.4	5	32.9	32.8
848.8	5	32.8	32.7
Measuremen	t uncertainty	±0.5	i dB



#### **ERP Measurements**

Description: This is the test for the maximum radiated power from the phone. Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP. Method of Measurement:

- 1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. A "reference path loss" is established as Pin + 2.1 Pr.
- 3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
- 5. The EUT is then put into pulse mode at its maximum power level (Power Step 5).
- 6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 22.913 (a). The "reference path loss" from Step 1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi.

#### Limits:

Power Step	Burst Peak (dBm)
0	<33

#### Power Measurements (Radiated)

Frequency	Power Step	BURST Peak (dBm)			ON AVERAGE Bm)
(MHz)		EIRP	ERP	EIRP	ERP
824.2	5	28.1	26.0	22.1	20.0
836.4	5	28.0	25.9	22.0	19.9
848.8	5	27.9	25.8	21.9	19.8
Measurement unce	ertainty	±3 dB			



#### FREQUENCY STABILITY

**SUBCLAUSE § 22.355** 

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER...

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the mobile station to overnight soak at -30 C.
- 3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum
- 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
- 6. Subject the mobile station to overnight soak at +60 C.
- 7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.8 V dc.




### AFC FREQ ERROR vs. VOLTAGE


Voltage	Frequency Error	Frequency Error	Frequency Error
(V)	(Hz)	(%)	(ppm)
3.3	41	0,00000482	0,0482
3.4	29	0,00000341	0,0341
3.5	28	0,00000329	0,0329
3.6	25	0,00000294	0,0294
3.7	22	0,00000259	0,0259
3.8	20	0,00000235	0,0235
3.9	22	0,00000259	0,0259
4.0	17	0,00000200	0,0200
4.1	22	0,00000259	0,0259
4.2	23	0,00000271	0,0271
4.3	26	0,00000306	0,0306
4.4	20	0,00000235	0,0235

### AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE	Frequency Error	Frequency Error	Frequency Error
(°C)	(Hz)	(%)	(ppm)
-30	-37	-0,00000435	-0,0435
-20	-33	-0,00000388	-0,0388
-10	-29	-0,00000341	-0,0341
±0.0	-20	-0,00000235	-0,0235
+10	-20	-0,00000235	-0,0235
+20	22	0,00000259	0,0259
+30	17	0,00000200	0,0200
+40	18	0,00000212	0,0212
+50	18	0,00000212	0,0212
+60	19	0,00000224	0,0224



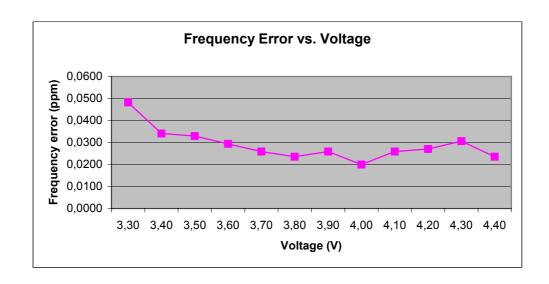

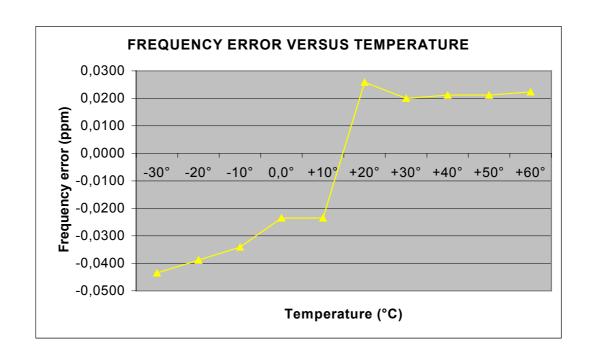



#### **EMISSIONS LIMITS**

**§22.917** 

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### **Measurement Limit:**

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.



#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-22:


The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

	EMIS	SSION LIMITAT	IONS	
f (MHz)	amplitude of emission ERP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
		CH 128		
824.2	26.0	-13.0		carrier
1648.4	-36.4	(39.0 dBc)	62.4	complies
4121.0	-40.5		66.5	complies
4945.9	-39.1		65.1	complies
5759.4	-51.7		77.7	complies
6593.6	-51.6		77.6	complies
8242.0	-49.4		75.4	complies
		CH 189		
836.4	25.9	-13.0		carrier
1672.8	-28.8	(38.9 dBc)	54.7	complies
4182.0	-33.2		59.1	complies
5018.4	-39.0		64.9	complies
5854.8	-48.6		74.7	complies
6691.2	-47.7		73.6	complies
		CH 251		
848.8	25.8	-13.0		carrier
1697.6	-26.6	(38.8 dBc)	52.4	complies
4244.0	-32.9		58.7	complies
5092.8	-36.6		62.4	complies
5941.6	-51.9		77.7	complies
8488.0	-50.7		76.5	complies
Measurement u	ncertainty		± 0.5dB	



### Channel 128 (up to 4 GHz)

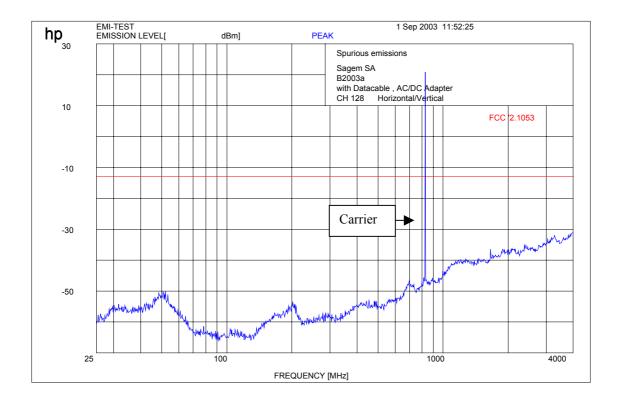


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter



### Channel 128 (up to 12 GHz)

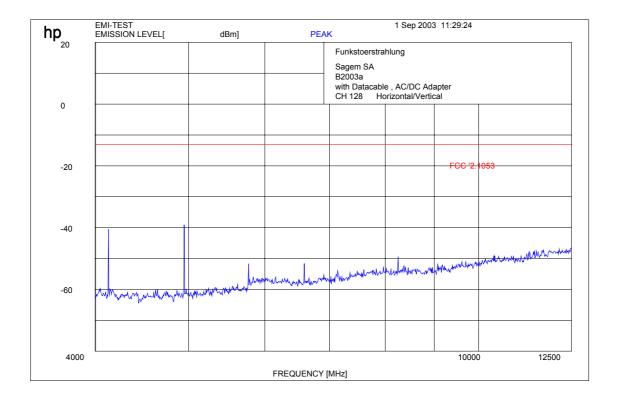


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{GHz}$ : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter




### **Channel 128:-25 GHz**

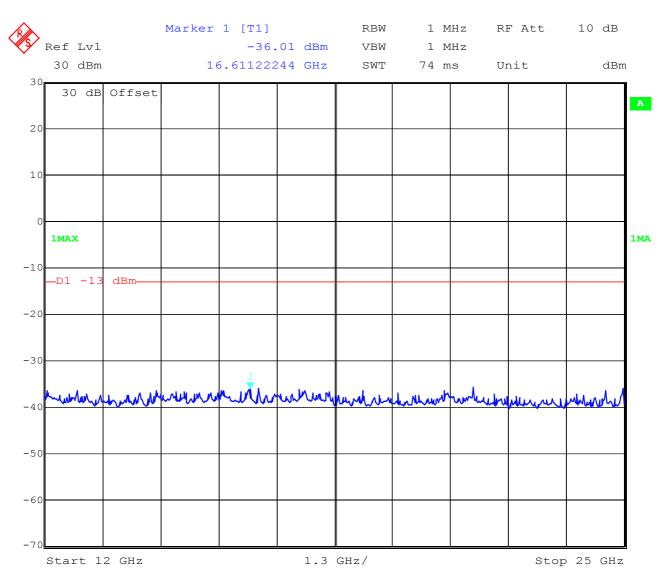

Date: 2.SEP.2003 08:59:58



Channel 189 (up to 4 GHz)

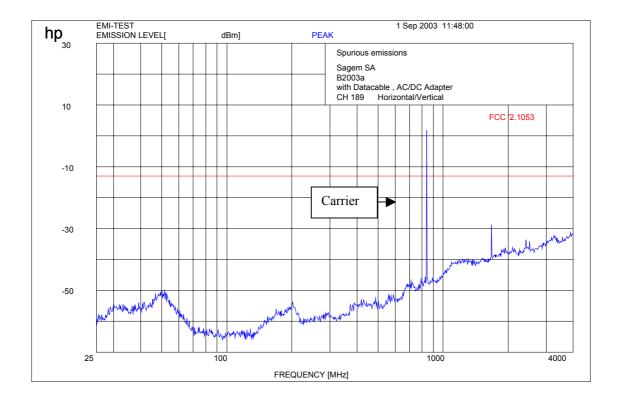


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{GHz}$ : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter



### Channel 189 (up to 12 GHz)

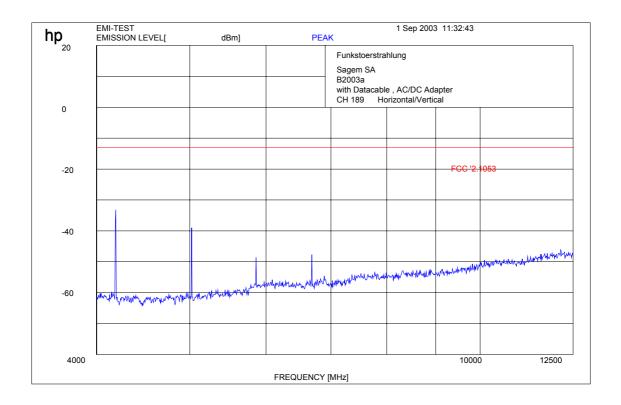


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{GHz}$ : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter




**Channel 189: -25 GHz** 

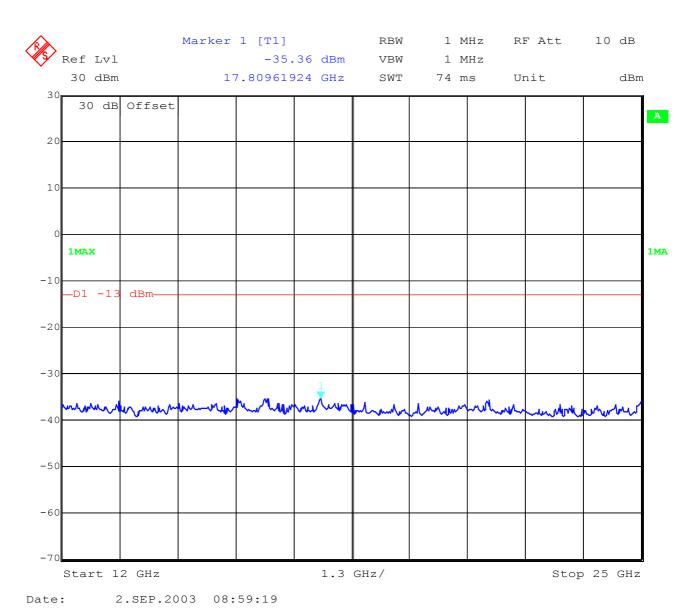



### Channel 251 up to 4 GHz

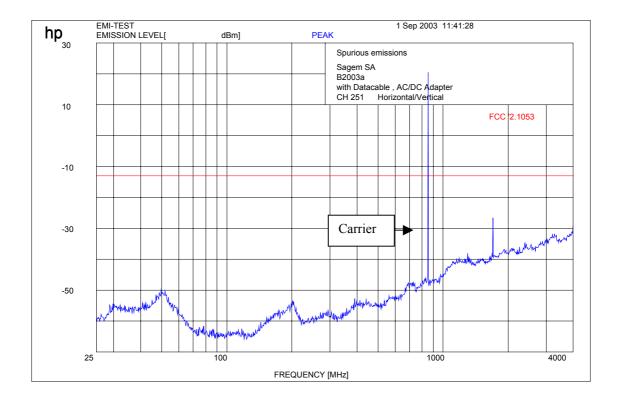


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter



### Channel 251 up to 12 GHz

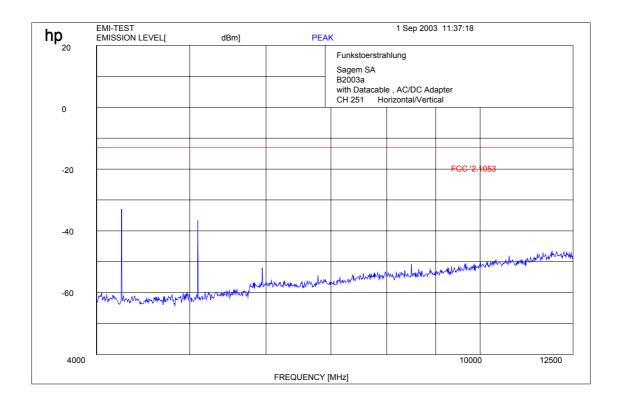


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter



**Channel 251: -25 GHz** 

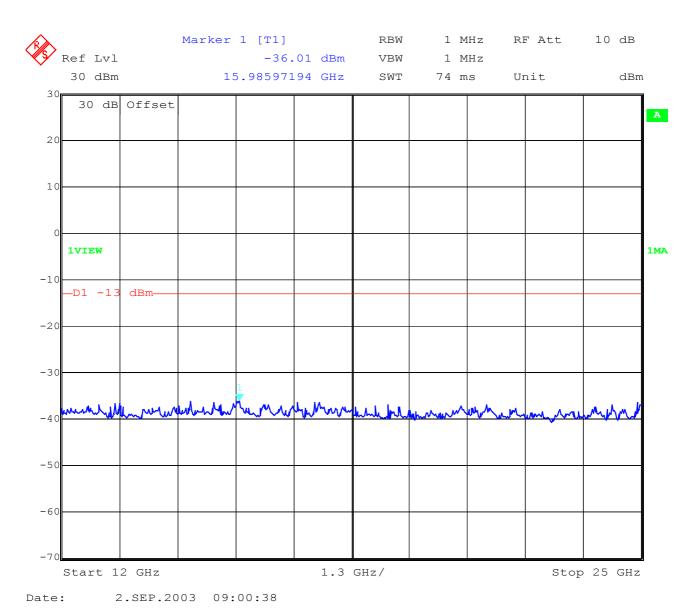

17 - 24



# **RECEIVER SPURIOUS RADIATION Radiated**

§ 15.109

	SPURIOUS EMISSIONS LEVEL (μV/m)								
CH 512,661,810									
f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	
68.2	QP	7.5							
99.36	QP	14.1							
123.2	QP	11.7							
Measurement uncertainty			±3 dB						

f < 1 GHz: RBW/VBW: 100 kHz

H = Horizontal; V= Vertical

**f≥1GHz: RBW/VBW: 1 MHz** 

### Measurement distance see table


Limits

**SUBCLAUSE § 15.109** 

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3




# Idle-Mode (this is valid for all channels and up to 4 GHz)

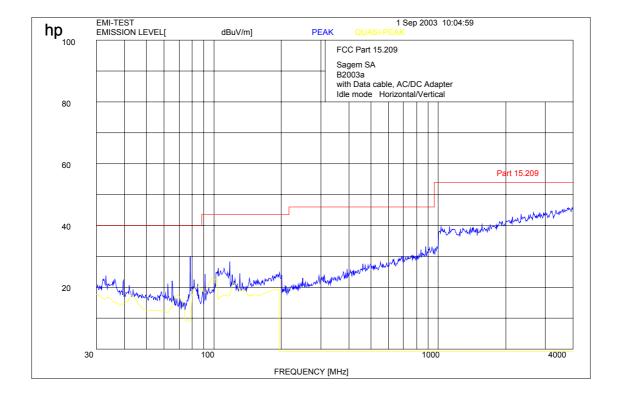

f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 




### Idle-Mode (this is valid for all channels and up to 12 GHz)

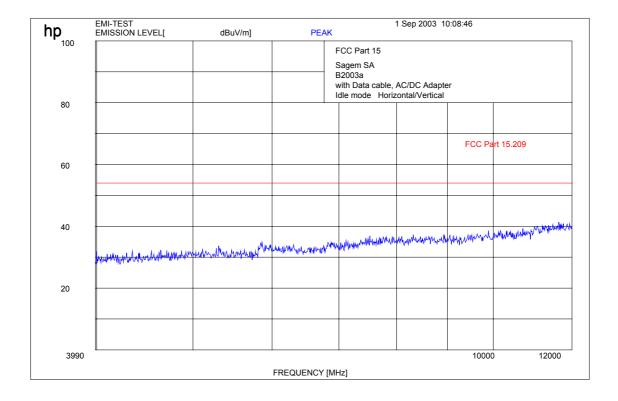

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



### this is valid for all 3 channels and up to 25 GHz

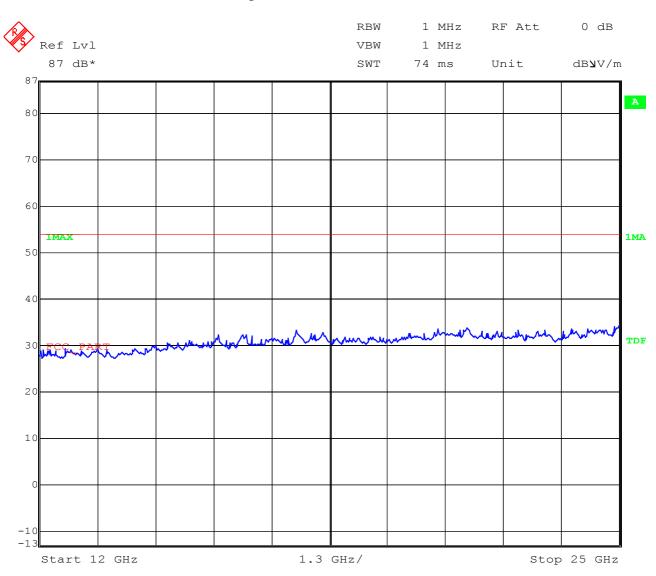

Date: 2.SEP.2003 08:48:37



#### CONDUCTED SPURIOUS EMISSIONS

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

# **USPCS Transmitter**

#### **Channel Frequency**

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)	amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results	
<u>.</u>		CH 128			
13.20 824,2	-27.02 32.8	-13.0 (45.80 dBc)	59.82	complies carrier	
823.998	-13.23		46.03	complies	
		CH 189			
11.72	-26.28	-13.0	59.18	complies	
836,4	32.9	(45.90 dBc)		carrier	
		CH 251			
13.20	-27.34	-13.0	60.14	complies	
848,8	32.8	(45.80 dBc)		carrier	
849.0	-13.81		46.61	complies	
Measurement u	ncertainty		± 0.5dB		



**Measurements:** 


Channel: 128

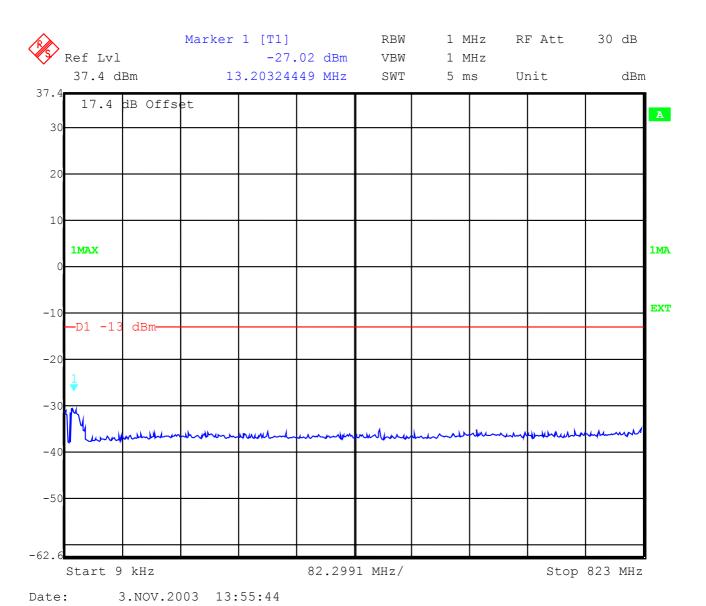

64




#### **Channel 128**

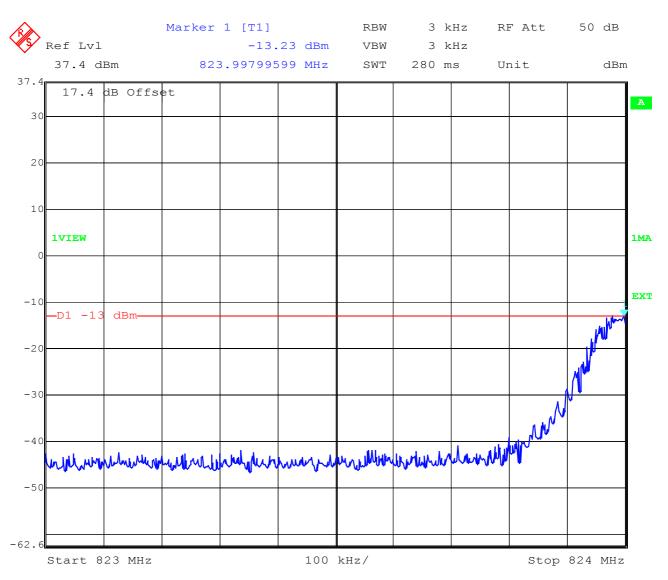

Date: 3.NOV.2003 13:41:33




#### **Channel 128**

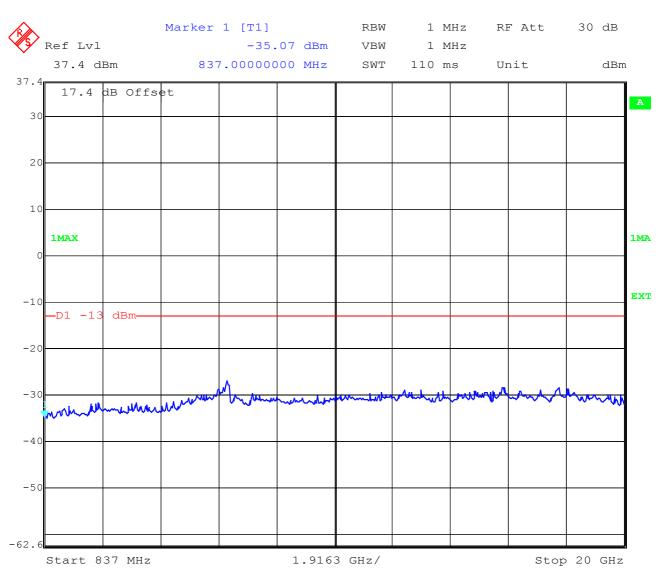

Date: 3.NOV.2003 13:42:59




#### **Channel 189**

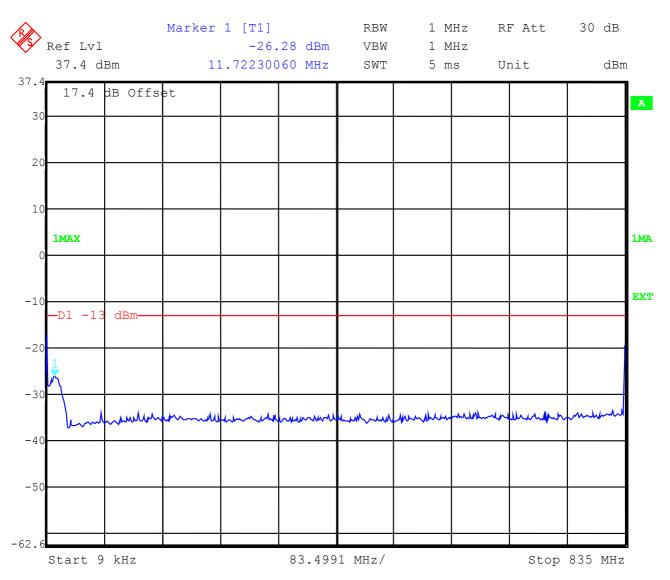

Date: 3.NOV.2003 13:47:03




#### **Channel 189**

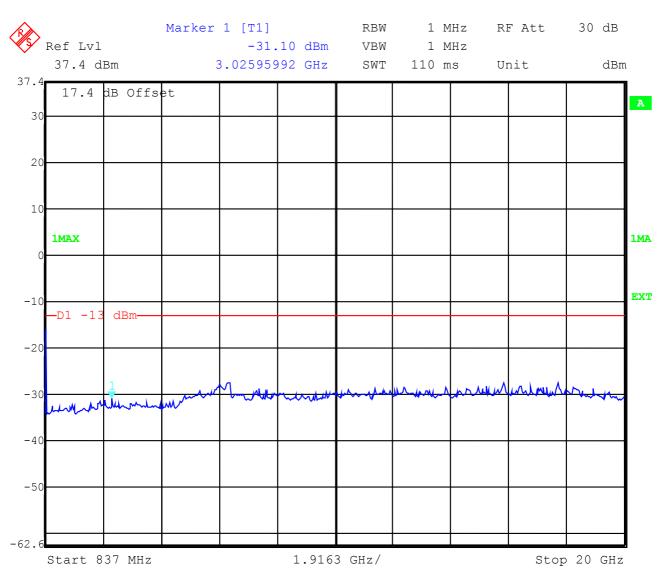

Date: 3.NOV.2003 13:53:46




#### **Channel 251**

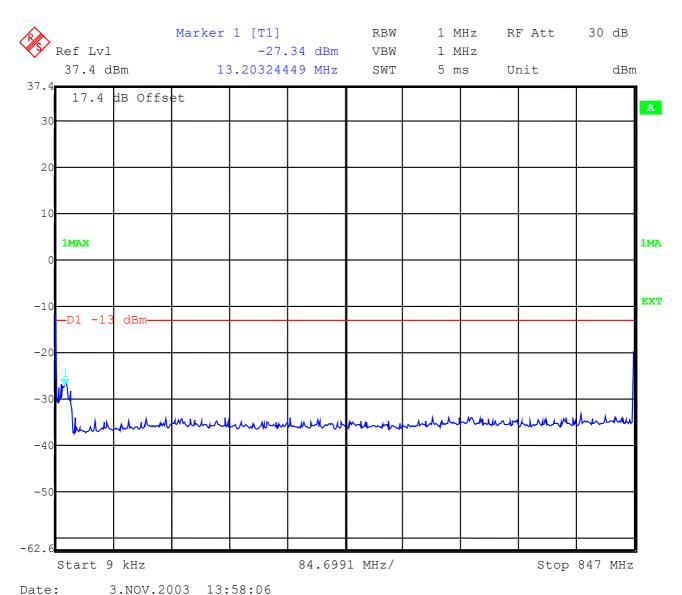




#### **Channel 251**

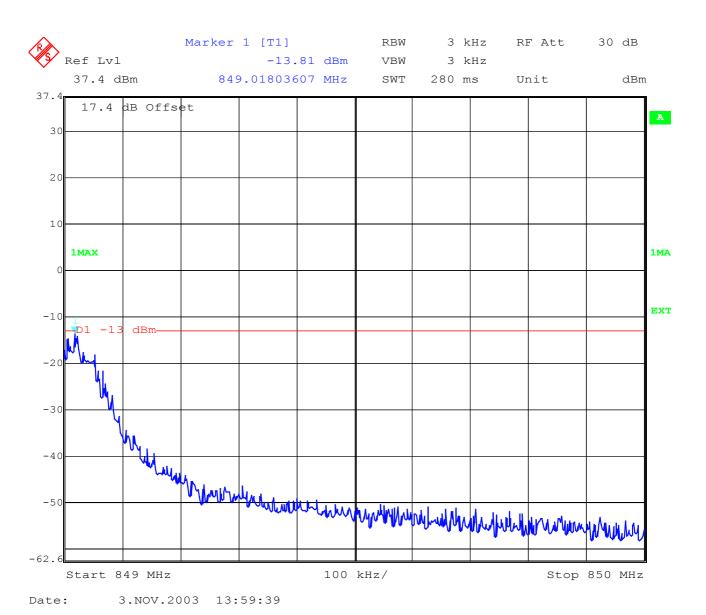



#### Channel 251

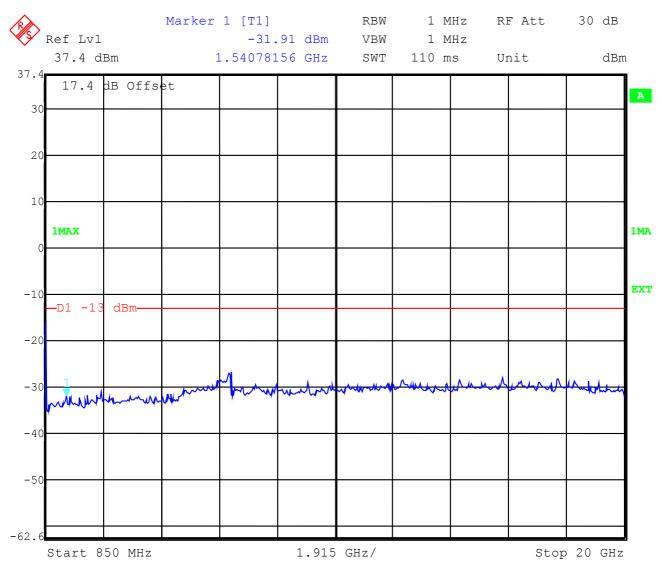

Date: 3.NOV.2003 14:01:17




#### **BLOCK EDGE REQUIREMENTS**

#### **Measurement Limit:**

Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


#### Measurements: Block 1 Channel 128

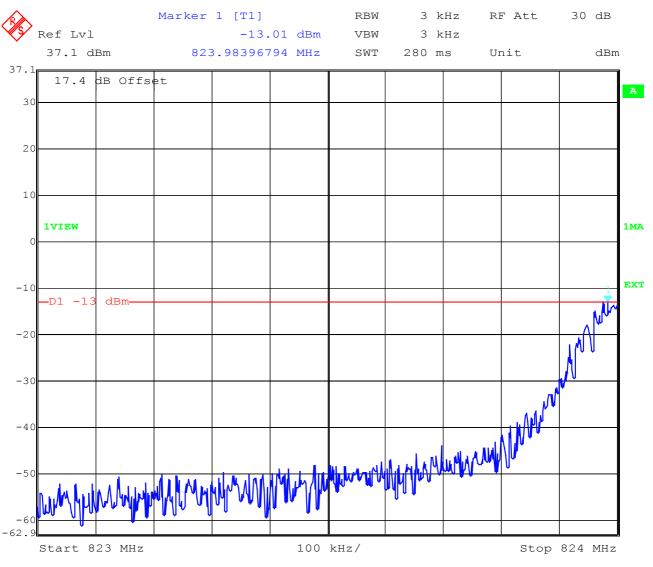

Date: 3.NOV.2003 14:21:38



#### **Block 4 Channel 251**

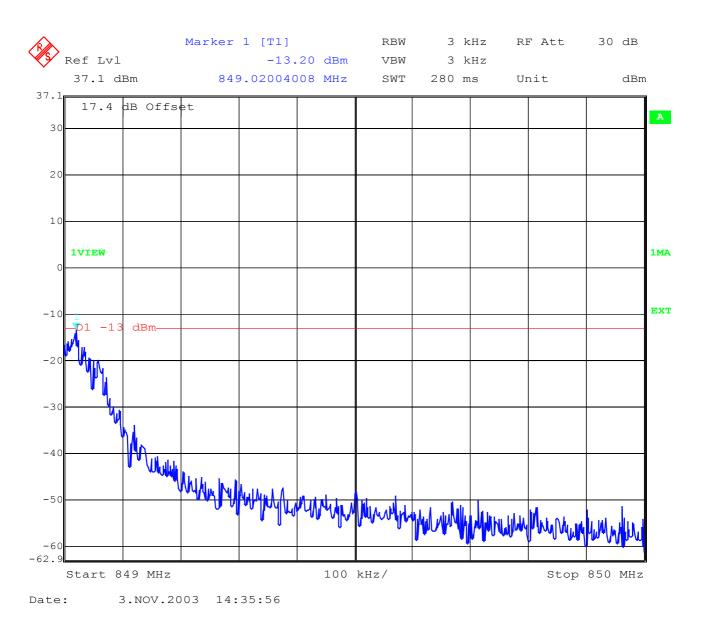



#### **OCCUPIED BANDWIDTH**

**§2.989** 

#### **Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
824.2 MHz	286.573	320.641
836.4 MHz	286.573	322.645
848.8 MHz	298.597	318.637

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 299 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.




### Channel 128 99% Occupied Bandwidth

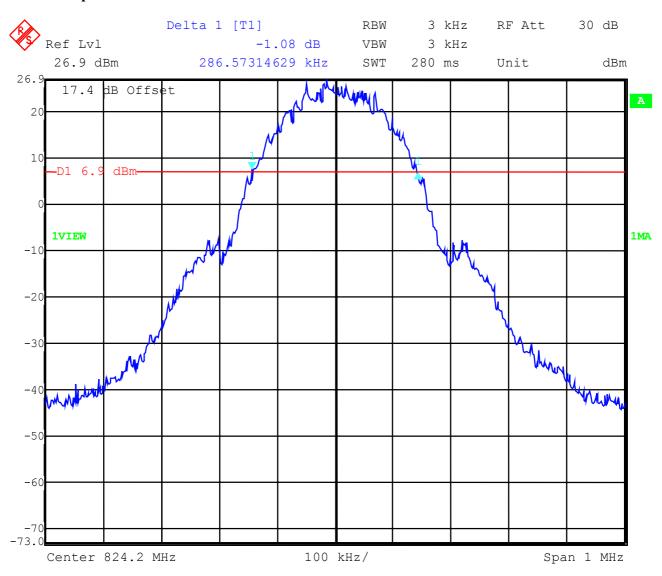

Date: 3.NOV.2003 09:59:20




# Channel 128 -26 dBc Bandwidth

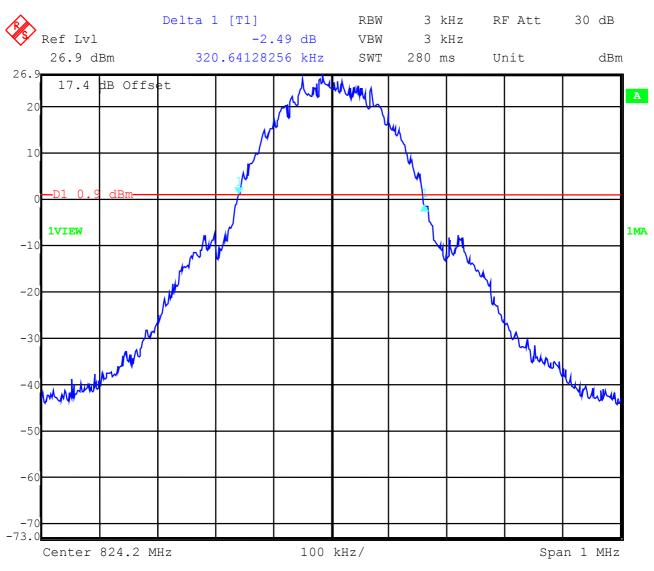

Date: 3.NOV.2003 09:59:58




### Channel 189 99% Occupied Bandwidth

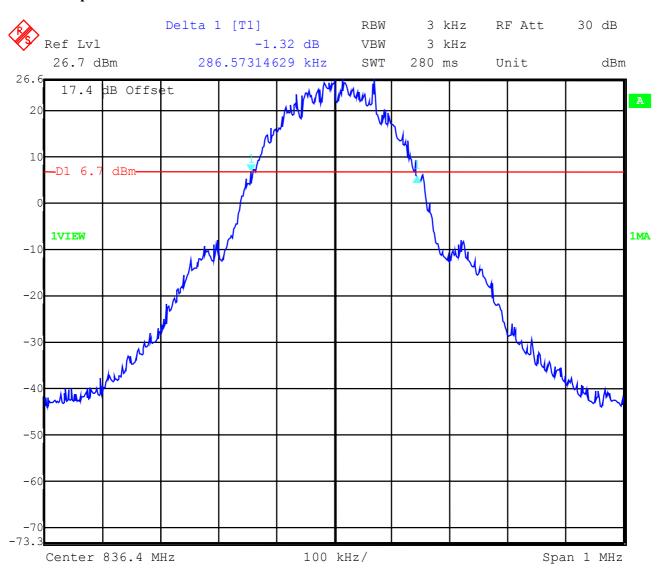

Date: 3.NOV.2003 09:54:53




# Channel 189 -26 dBc Bandwidth

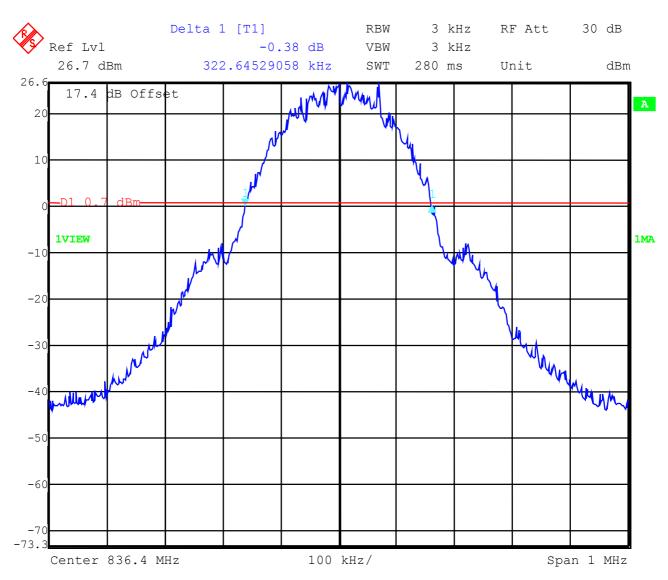

Date: 3.NOV.2003 09:55:28




# Channel 251 99% Occupied Bandwidth

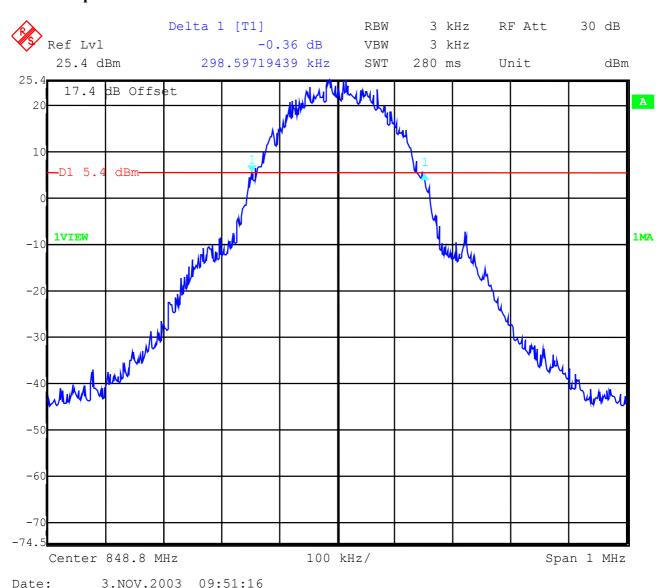



# Channel 251 -26 dBc Bandwidth

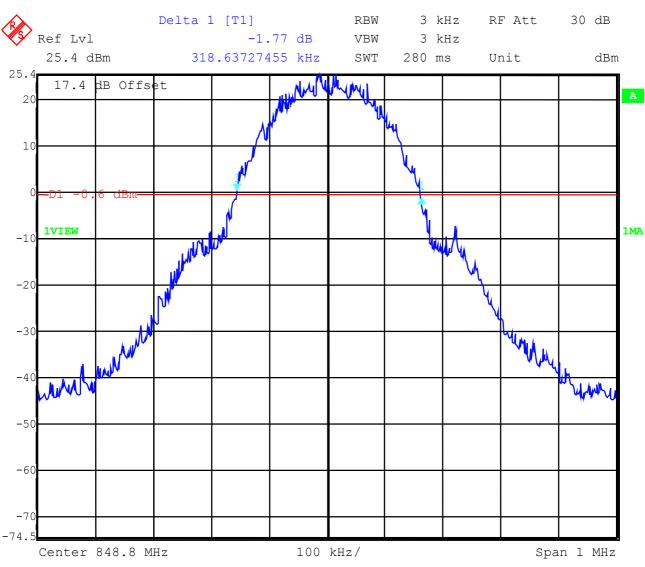

Date: 3.NOV.2003 09:51:49




#### EMISSION LIMITATIONS FOR CELLULAR §22.917(F)

Mobile emissions in the base frequency range

All peaks are below -80 dBm in the base frequency range.

#### Idle Mode base station frequency range A

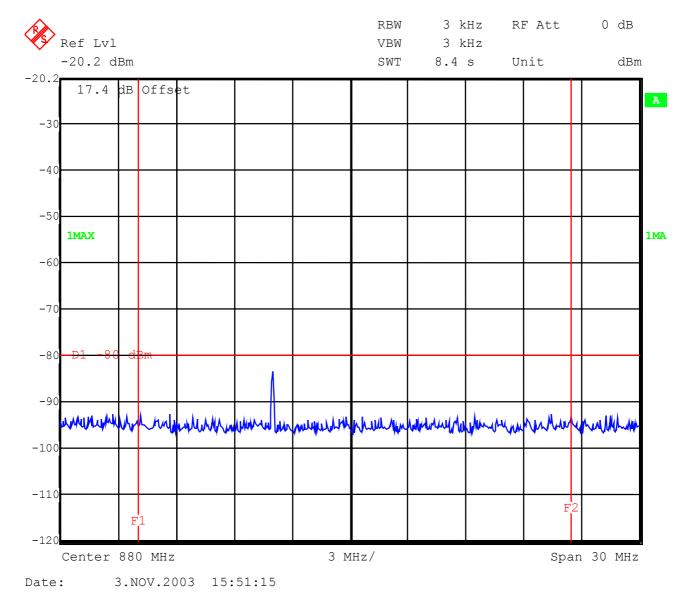


F1 = 869 MHz, F2 = 891.5 MHz

LIMITS §22.917(f)



Mobile emissions in the base frequency range Idle Mode base station frequency range B

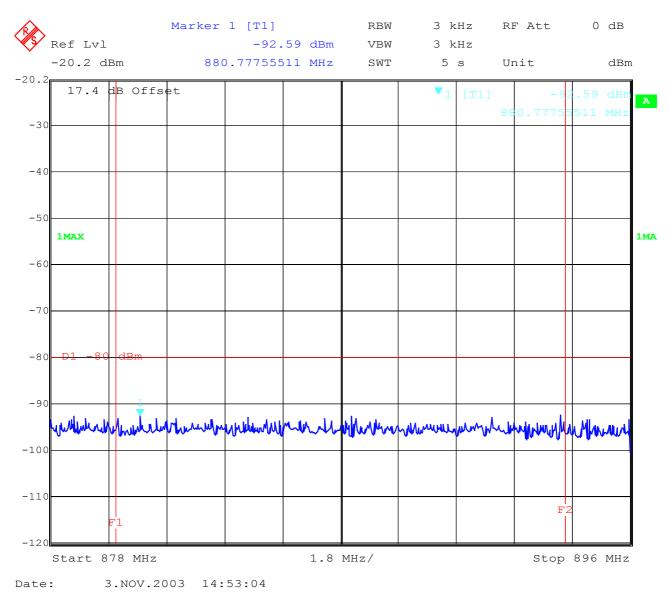


F1 = 880 MHz, F2 = 894 MHz

LIMITS §22.917(f)



Mobile emissions in the base frequency range

### TX Mode CH 128 base station frequency range A

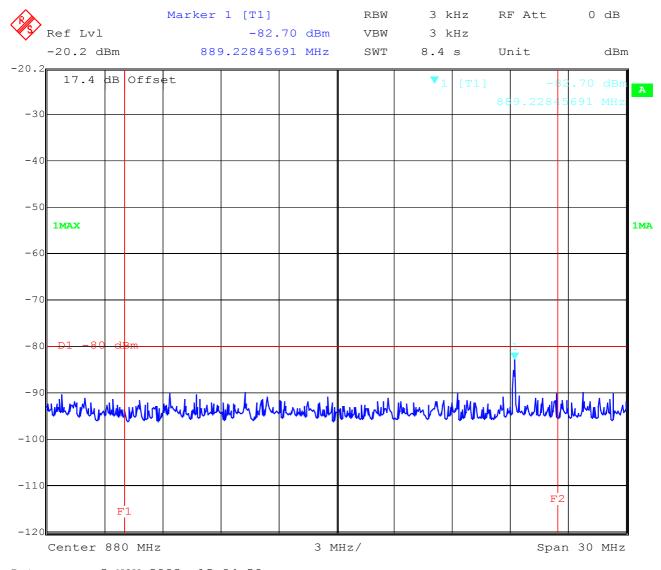

Date: 3.NOV.2003 15:04:59


F1 = 869 MHz, F2 = 891.5 MHz

LIMITS §22.917(f)



Mobile emissions in the base frequency range

### TX Mode CH 189 base station frequency range A

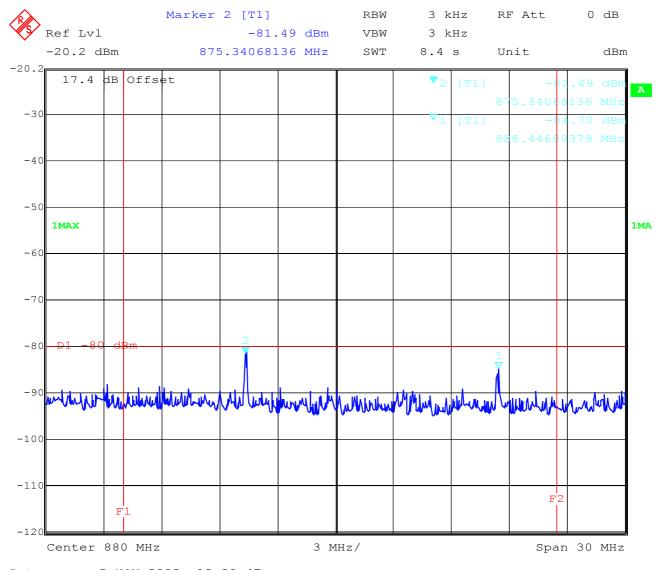

Date: 3.NOV.2003 15:00:47

F1 = 869 MHz, F2 = 891.5 MHz


LIMITS §22.917(f)



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 95 (158)

Mobile emissions in the base frequency range

### TX Mode CH 251 base station frequency range A

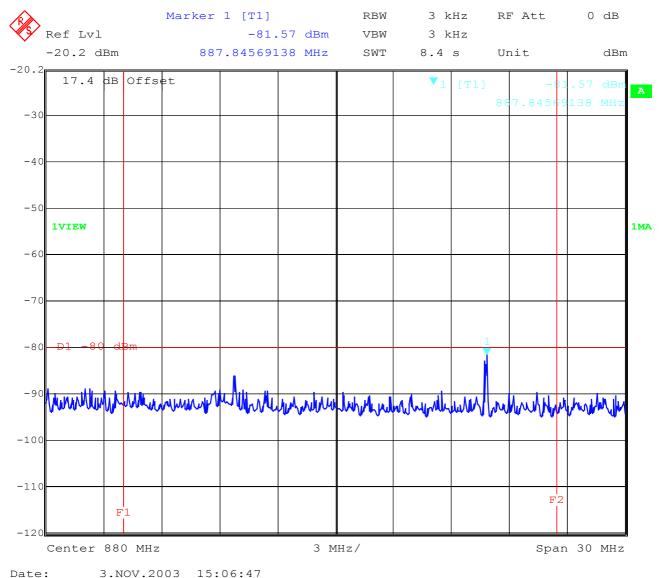


F1 = 869 MHz, F2 = 891.5 MHz

**LIMITS** §22.917(f)



Mobile emissions in the base frequency range

### TX Mode CH 128 base station frequency range B

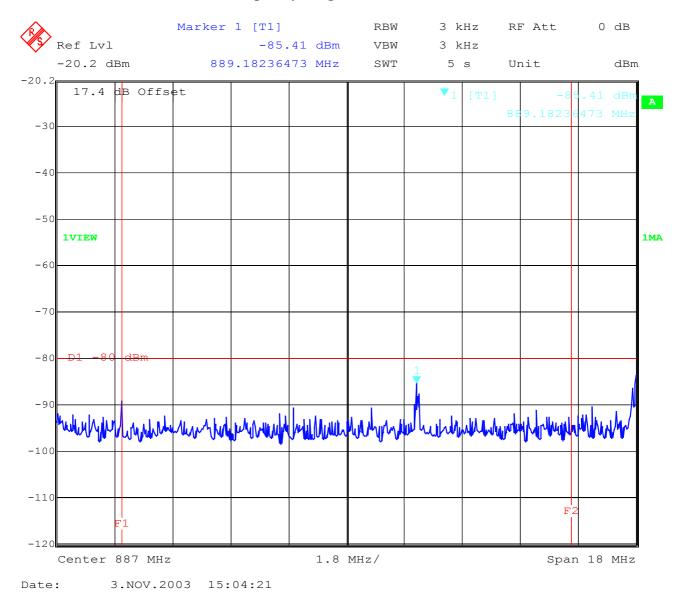


F1 = 880 MHz, F2 = 894 MHz

LIMITS §22.917(f)



Mobile emissions in the base frequency range

#### TX Mode CH 189 base station frequency range B

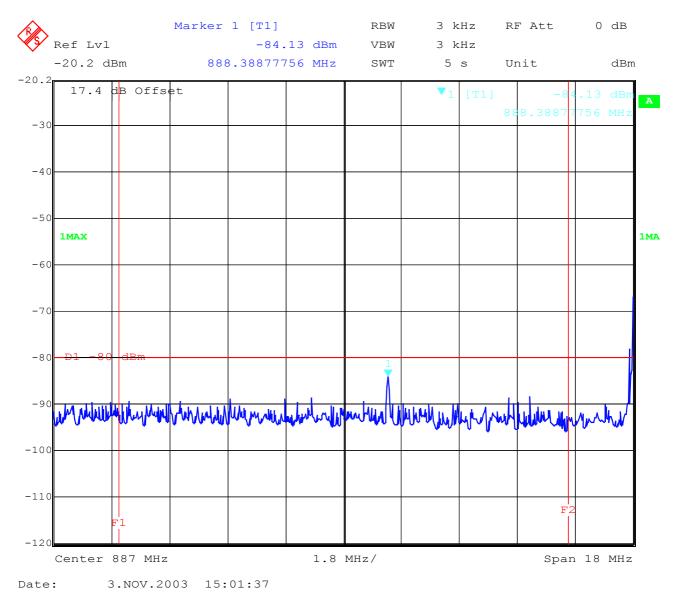


F1 = 880 MHz, F2 = 894 MHz

LIMITS §22.917(f)



Mobile emissions in the base frequency range

#### TX Mode CH 251 base station frequency range B

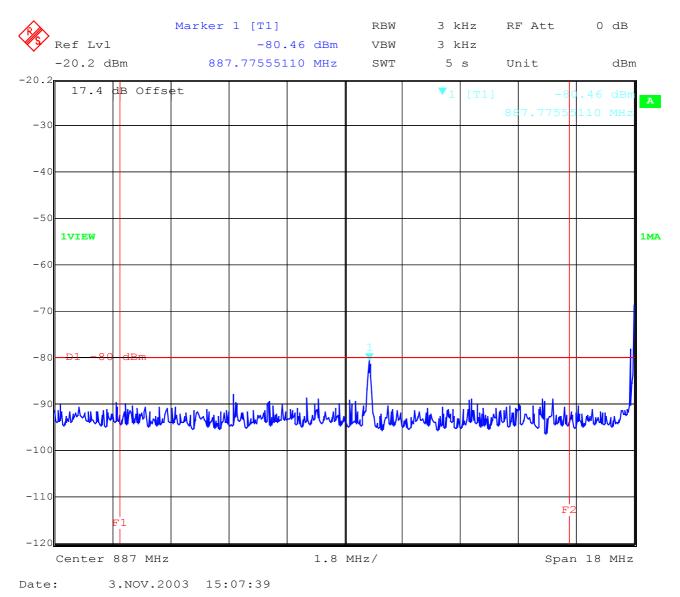

F1 = 880 MHz, F2 = 894 MHz

LIMITS §22.917(f)



#### ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT PART 15.109

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

#### **Ancillary equipment:**

Set up 1: myX3-2a with Head-set 23812517-0

Set up 2: myX3-2a with Car kit A17-BA10-010

Set up 3: myX3-2a with Cigar lighter adapter 23811253-7



#### **Spurious Emissions**

Set up 1: myX3-2a with Head-set 23812517-0

	SPURIOUS EMISSIONS LEVEL (μV/m)							
CH 189		CH 661		Idle mode(850/1900)				
f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)
1672.8	PK	229.1	5642.3	AV	25.7			
2509.2	PK	229.1				no traceable peak found		
3345.6	PK	89.1						
4182.0	AV	421.7						
5018.4	PK	363.1						
5854.8	PK	93.3						
6691.2	PK	88.1						
Measurement uncertainty ±3 dB								

f < 1 GHz : RBW/VBW : 100 kHz  $f \ge 1 \text{GHz} : \text{RBW/VBW} : 1 \text{ MHz}$ 

#### Measurement distance see table

Limits

**SUBCLAUSE § 15.109** 

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	500 / 54 dBμV/m	3



### Part 15 Magnetics (Valid for PCS 850 and PCS1900)

EUT: myX3-2a (family B2003a)

Manufacturer: Sagem SA

Operating Condition: traffic mode with Headset


Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209

Comment:

Start of Test: 03.09.03 / 08:31:59

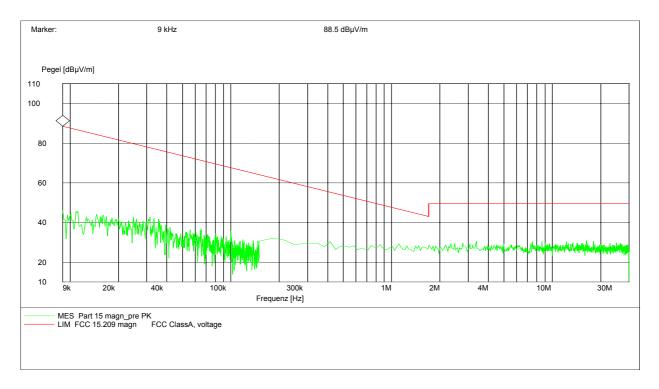

For peak measurement we use 100 kHz RBW/VBW For CISPR QP measurement we use 200 Hz from 9 kHz to 150 kHz, 9 kHz for 150 kHz to 30 MHz

Limits

**SUBCLAUSE § 15.109** 

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



#### FCC Rule 47

### Part 15 Magnetics (Valid for PCS 850 and PCS1900)

EUT: myX3-2a (family B2003a)

Manufacturer: Sagem SA

Operating Condition: Idle mode with Headset


Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209

Comment:

Start of Test: 03.09.03 / 08:36:59

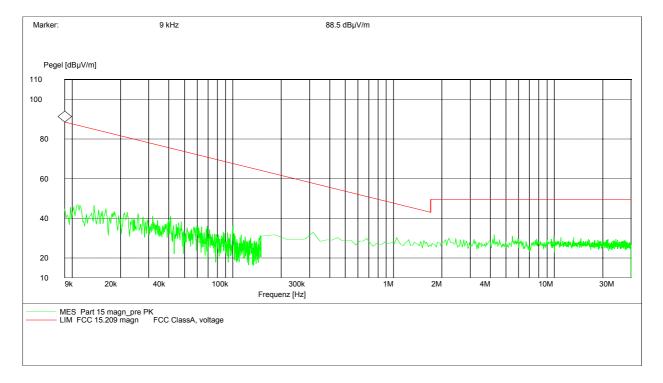

For peak measurement we use 100 kHz RBW/VBW For CISPR QP measurement we use 200 Hz from 9 kHz to 150 kHz, 9 kHz for 150 kHz to 30 MHz

#### Limits

**SUBCLAUSE § 15.109** 


Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBμV/m	30



#### **SPURIOUS RADIATION**

§ 15.109

CH 189 up to 4 GHz

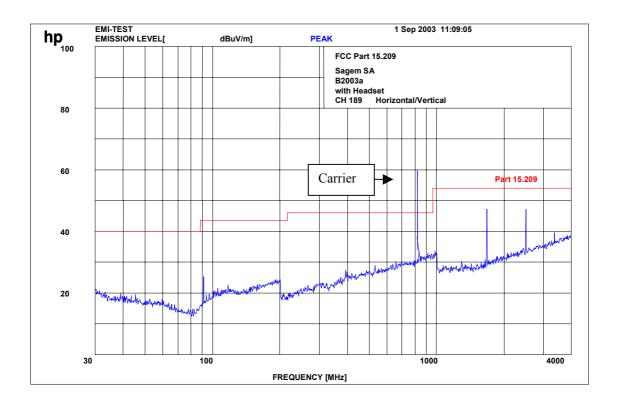

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 


Carrier suppressed with a rejection filter



**SPURIOUS RADIATION** 

§ 15.109

**CH 189 up to 12 GHz** 

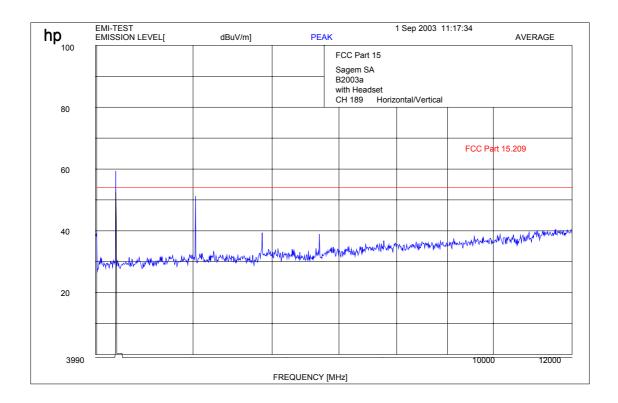

f < 1 GHz: RBW/VBW: 100 kHz f ≥ 1GHz: RBW/VBW 1 MHz


Carrier suppressed with a rejection filter



# **SPURIOUS RADIATION**

§ 15.109

#### **CH 189 up to 25 GHz**

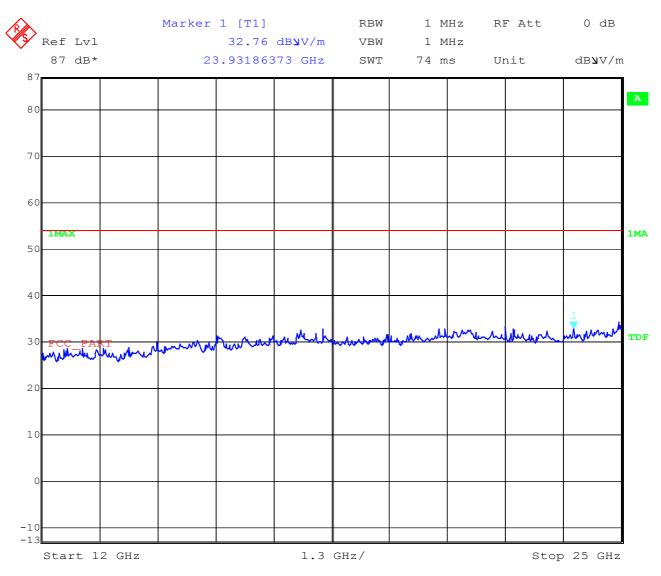


Date: 2.SEP.2003 08:50:36



# **SPURIOUS RADIATION**

§ 15.109

CH 661 up to 4 GHz

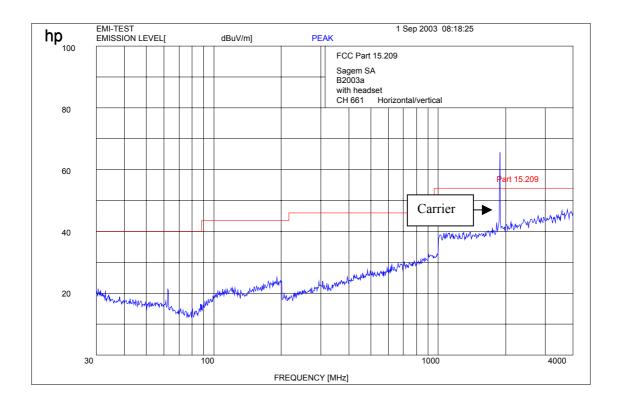

f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 


Carrier suppressed with a rejection filter



#### **SPURIOUS RADIATION**

§ 15.109

CH 661 up to 12 GHz

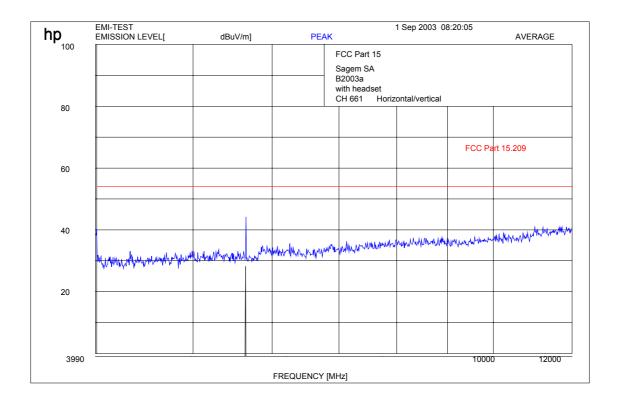

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 


Carrier suppressed with a rejection filter



**SPURIOUS RADIATION** 

§ 15.109

**CH 661 up to 25 GHz** 

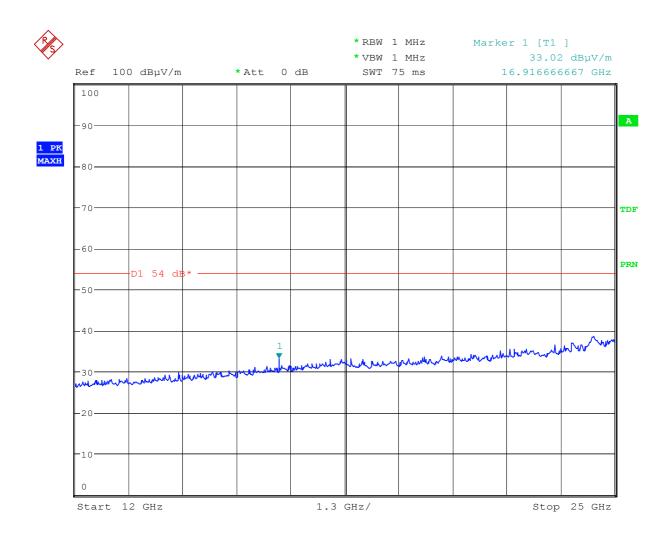


Date: 1.SEP.2003 13:44:00



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 4 GHz (valid for 850 and 1900 MHz)

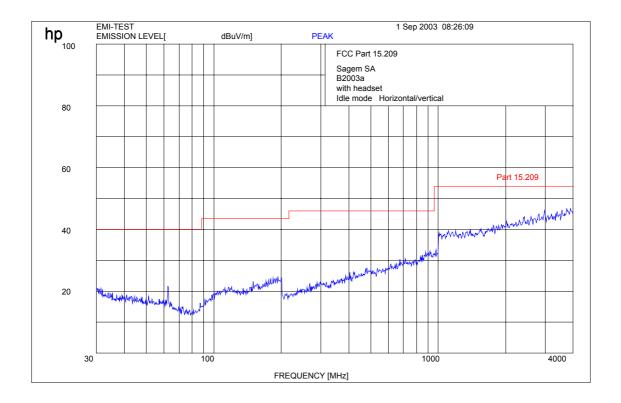


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 12 GHz (valid for 850 and 1900 MHz)

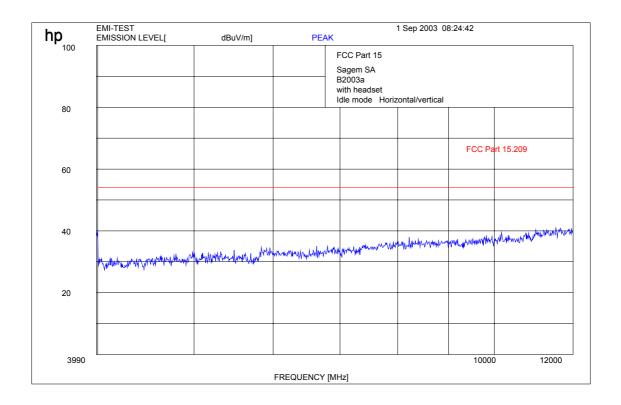


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 25 GHz (valid for 850 and 1900 MHz)

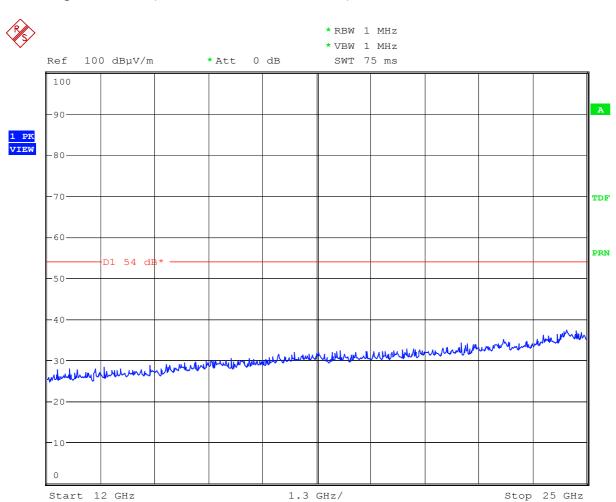

Date: 1.SEP.2003 13:44:23



#### **Spurious Emissions**

Set up 2: myX3-2a with Car kit A17-BA10-010

	SPURIOUS EMISSIONS LEVEL (μV/m)							
CH 189				CH 661		Idle mode(850/1900)		
f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)
1672.8	PK	489.8						
2509.2	PK	213.8	< 12 GHz no traceable peak found		no traceable peak found		k found	
3345.6	PK	173.8	15041.7	PK	51.8			
5018.4	PK	234.4						
5854.8	PK	83.2						
Measur	rement und	certainty			±3	dB		

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$ 

#### Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	500 / 54 dBμV/m	3



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 113 (158)

#### Part 15 Magnetics (Valid for PCS 850 and PCS1900)

EUT: myX3-2a (family B2003a)

Manufacturer: Sagem SA

Operating Condition: traffic mode with Car Kit


Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209

13.2V DC Comment:

Start of Test: 03.09.03 / 08:47:43

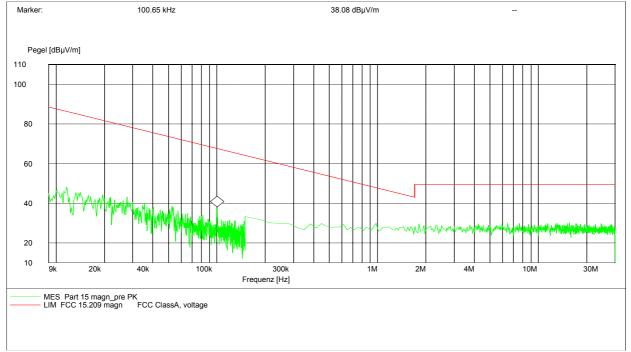

#### Limits

#### **SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



#### FCC Rule 47

#### Part 15 Magnetics (Valid for PCS 850 and PCS1900)

EUT: myX3-2a (family B2003a)

Manufacturer: Sagem SA

Operating Condition: idle mode with Car Kit


Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209

Comment: 13.2V DC

Start of Test: 03.09.03 / 08:57:40

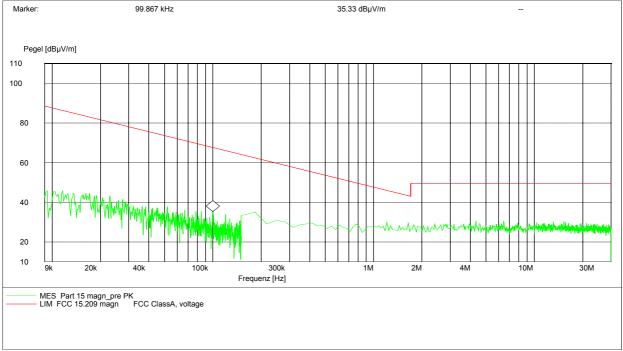

#### Limits

**SUBCLAUSE § 15.109** 


Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



#### **SPURIOUS RADIATION**

§ 15.109

CH 189 up to 4 GHz

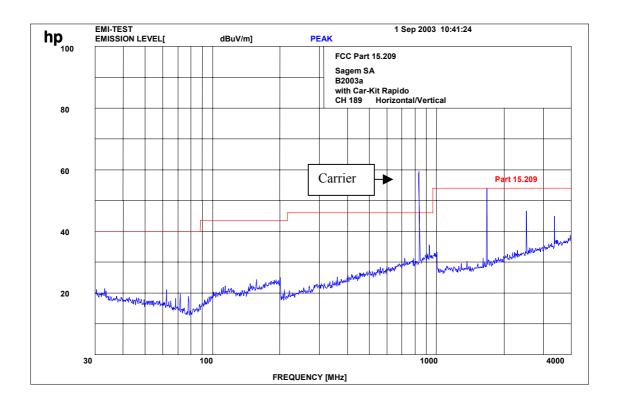


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



**SPURIOUS RADIATION** 

§ 15.109

**CH 189 up to 12 GHz** 

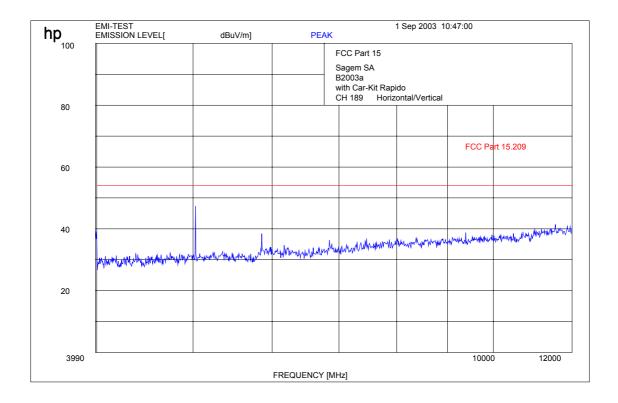


f < 1 GHz: RBW/VBW: 100 kHz f ≥ 1GHz: RBW/VBW 1 MHz



#### **SPURIOUS RADIATION**

§ 15.109

#### **CH 189 up to 25 GHz**

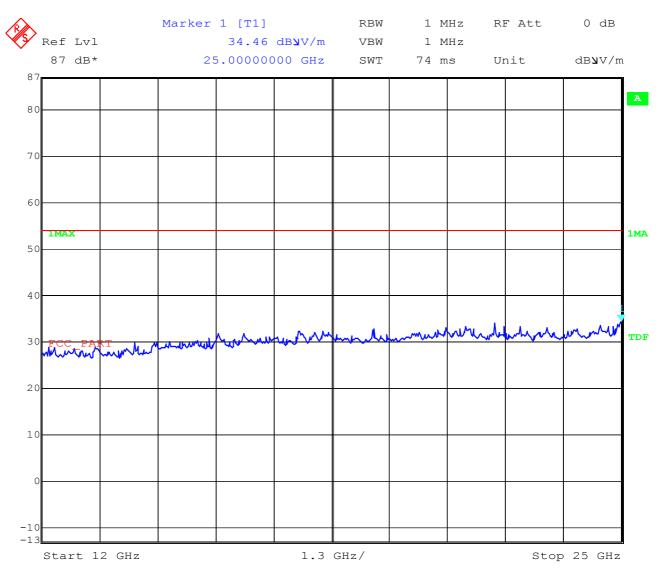


Date: 2.SEP.2003 08:55:13



#### **SPURIOUS RADIATION**

§ 15.109

CH 661 up to 4 GHz

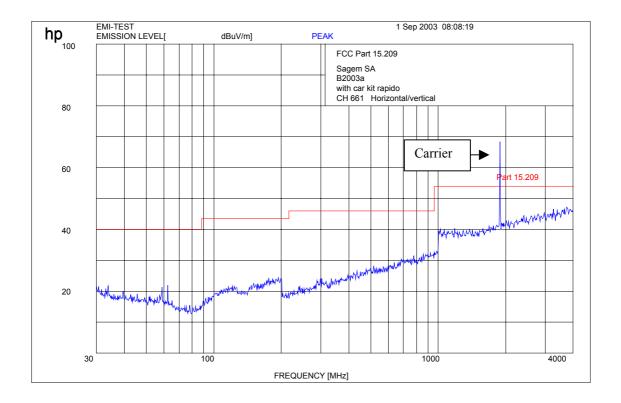


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



**SPURIOUS RADIATION** 

§ 15.109

CH 661 up to 12 GHz

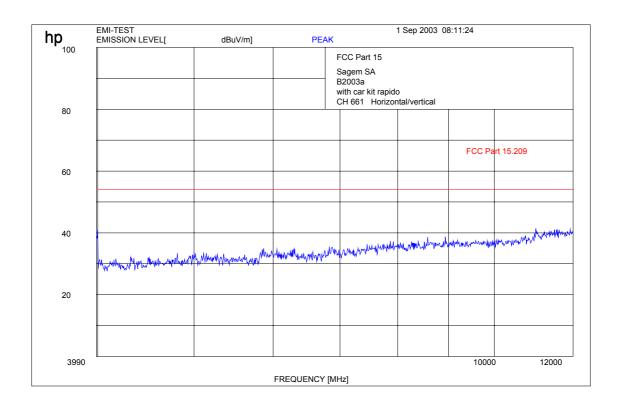


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

**CH 661 up to 25 GHz** 

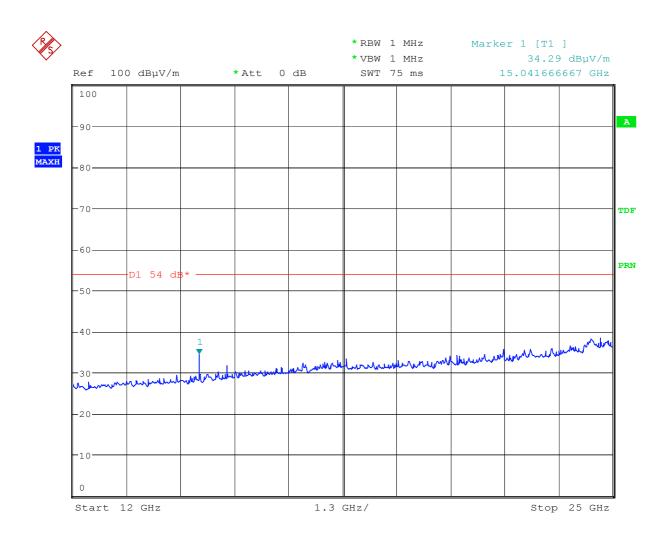


Date: 1.SEP.2003 13:47:30



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 4 GHz (valid for 850 and 1900 MHz)

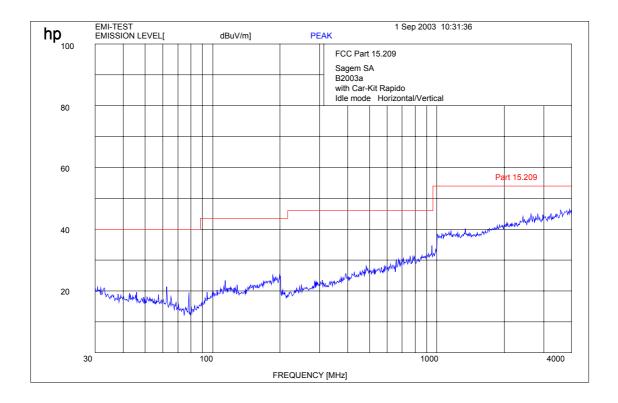


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 12 GHz (valid for 850 and 1900 MHz)

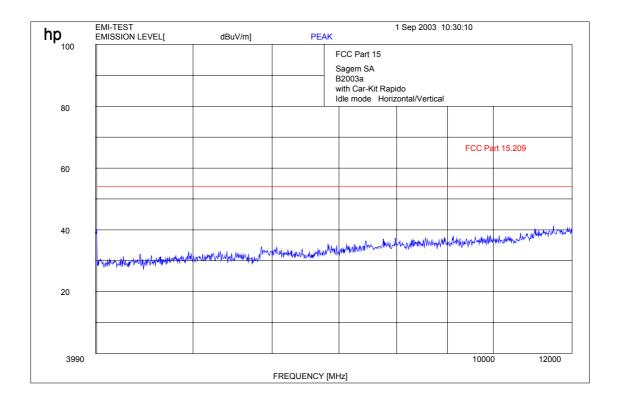


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

#### § 15.109

#### Idle mode up to 25 GHz (valid for 850 and 1900 MHz)

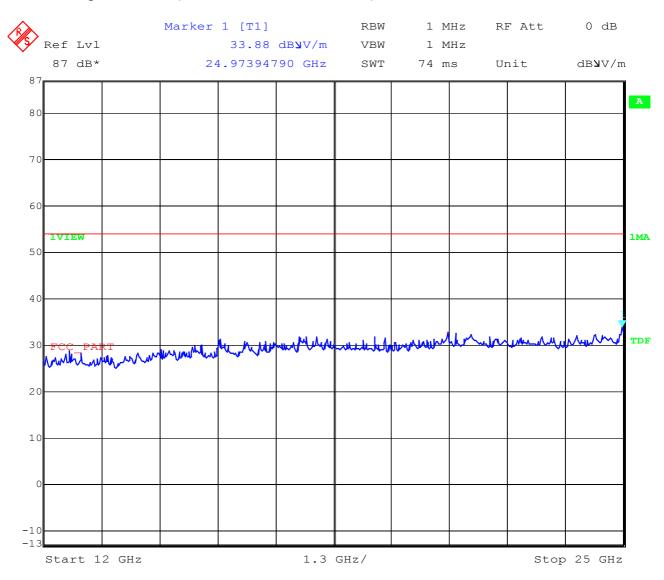

Date: 2.SEP.2003 08:50:14



#### **Spurious Emissions**

Set up 3: myX3-2a with Cigar lighter adapter 23811253-7

	SPURIOUS EMISSIONS LEVEL (μV/m)							
CH 189			СН 661		Idle mode(850/1900)			
f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)
50.37	QP	23.4	31.97	QP	53.7	31.97	QP	53.7
131.93	QP	10.7	43.28	QP	55.6	43.28	QP	55.6
1672.8	PK	218.8	3760.0	AV	104.7			
2509.2	PK	288.4	15041.7	PK	53.0			
3345.6	PK	254.1						
4182.0	AV	451.9						
5018.4	AV	141.3						
5854.8	AV	108.4						
Measui	ement un	certainty			±3	dB		

f < 1 GHz : RBW/VBW : 100 kHz  $f \ge 1 \text{GHz} : \text{RBW/VBW} : 1 \text{ MHz}$ 

#### Measurement distance see table

## Limits

#### **SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	500 / 54 dBμV/m	3



Test report no..: 4 0902-15-03/03 Issue Date: 2003-09-03 Page 125 (158)

#### Part 15 Magnetics (Valid for PCS 850 and PCS1900) Limits

EUT: myX3-2a (family B2003a) **SUBCLAUSE § 15.109** 


Manufacturer: Sagem SA Operating Condition: traffic mode with Lighter charger

Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209 13,2 V DC Comment:

Start of Test: 03.09.03 / 08:41:37

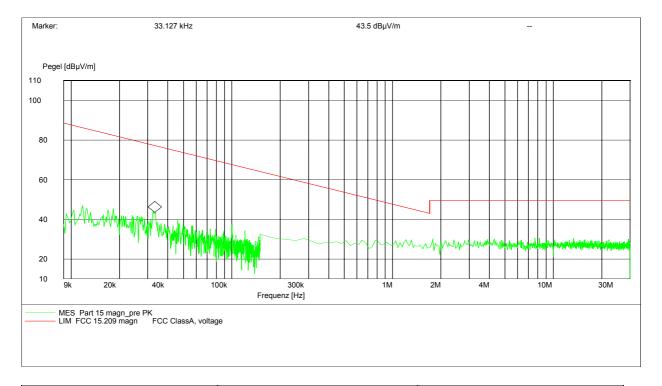

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



#### FCC Rule 47

#### Part 15 Magnetics (Valid for PCS 850 and PCS1900)

EUT: myX3-2a (family B2003a)

Manufacturer: Sagem SA


Operating Condition: idle mode with Lighter charger

Test Site: Cetecom, Room 6

Operator: Berg M.

Test Specification: 15.109/15.209 Comment: 13.2V DC

Start of Test: 03.09.03 / 08:44:14

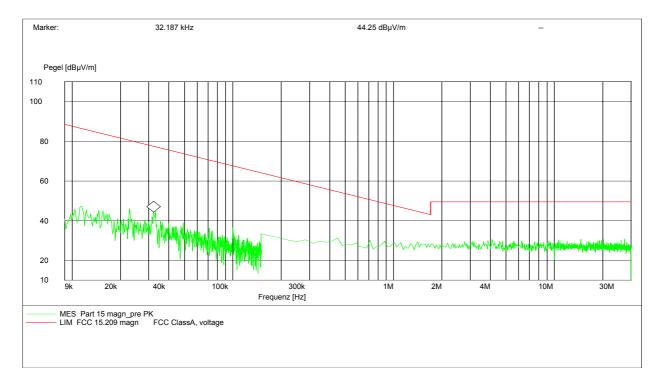

#### Limits

#### **SUBCLAUSE § 15.109**


Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30 / 29.5 dBμV/m	30



#### **SPURIOUS RADIATION**

§ 15.109

CH 189 up to 4 GHz

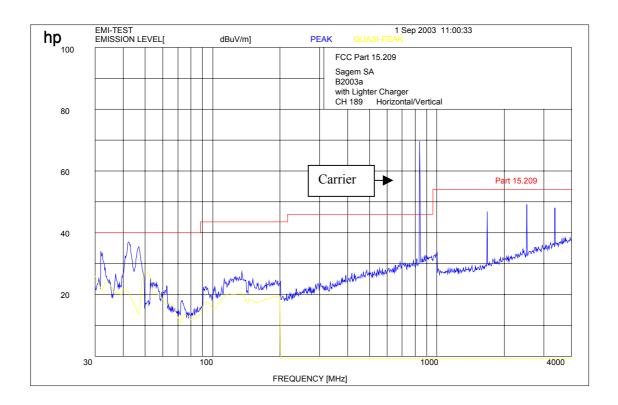


 $f < 1 \text{ GHz} : RBW/VBW} : 100 \text{ kHz}$   $f \ge 1 \text{ GHz} : RBW/VBW} 1 \text{ MHz}$ 



**SPURIOUS RADIATION** 

§ 15.109

**CH 189 up to 12 GHz** 

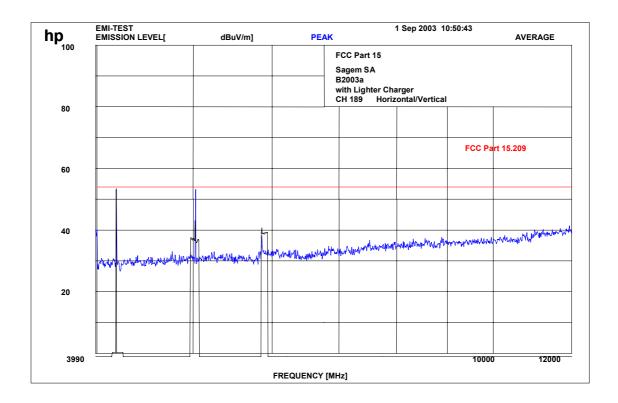


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

#### **CH 189 up to 25 GHz**

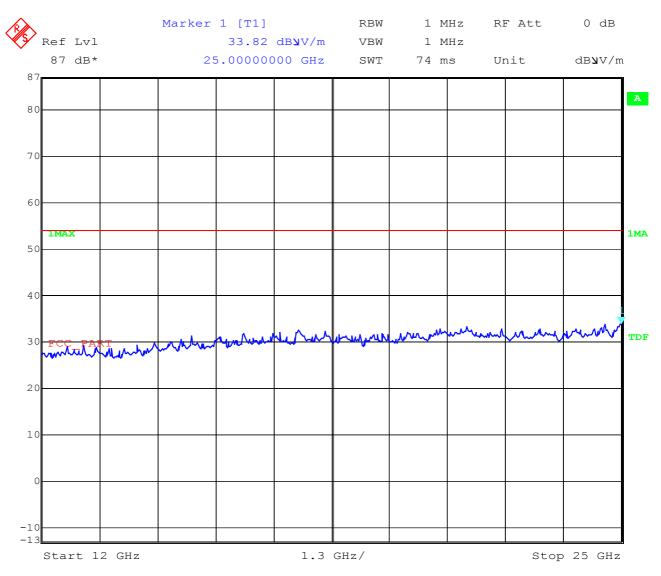


Date: 2.SEP.2003 08:53:52



#### **SPURIOUS RADIATION**

§ 15.109

CH 661 up to 4 GHz

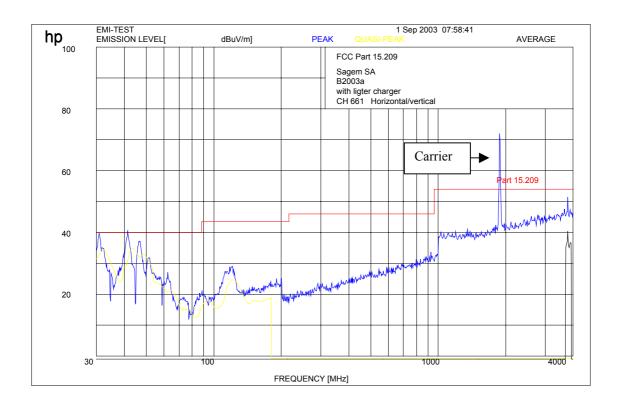


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

**CH 661 up to 12 GHz** 

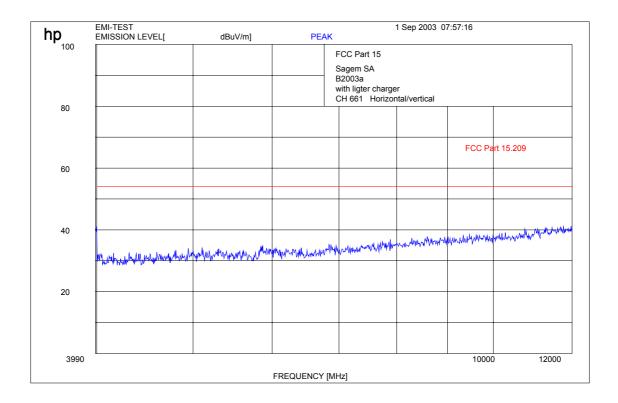


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



**SPURIOUS RADIATION** 

§ 15.109

CH 661 up to 25 GHz

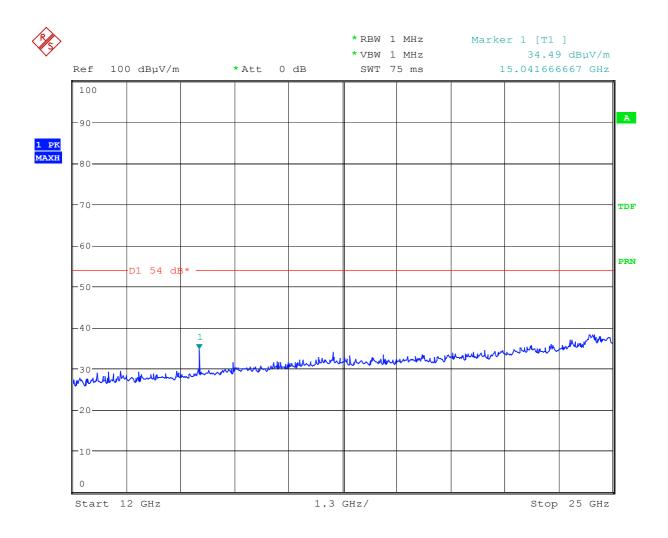


Date: 1.SEP.2003 13:45:18



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 4 GHz (valid for 850 and 1900 MHz)

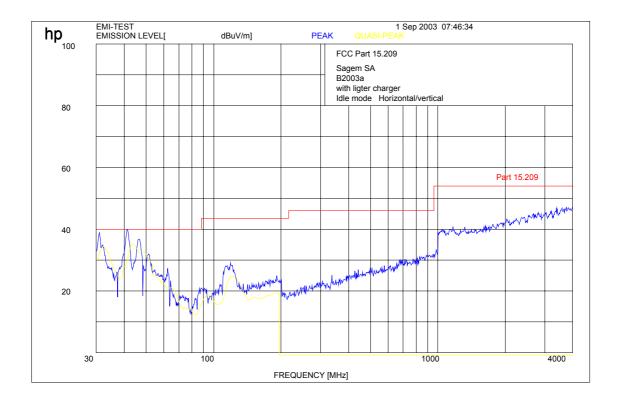


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 12 GHz (valid for 850 and 1900 MHz)

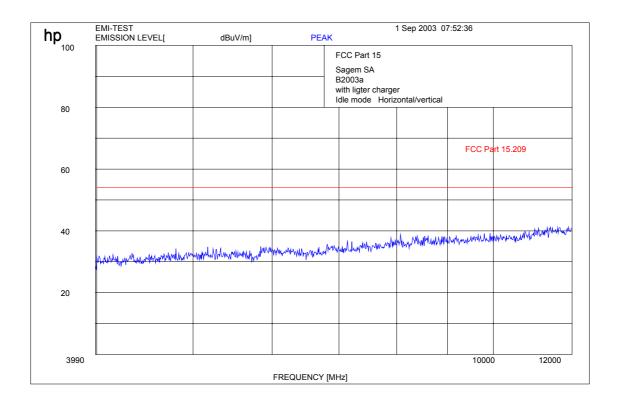


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



#### **SPURIOUS RADIATION**

§ 15.109

Idle mode up to 25 GHz (valid for 850 and 1900 MHz)

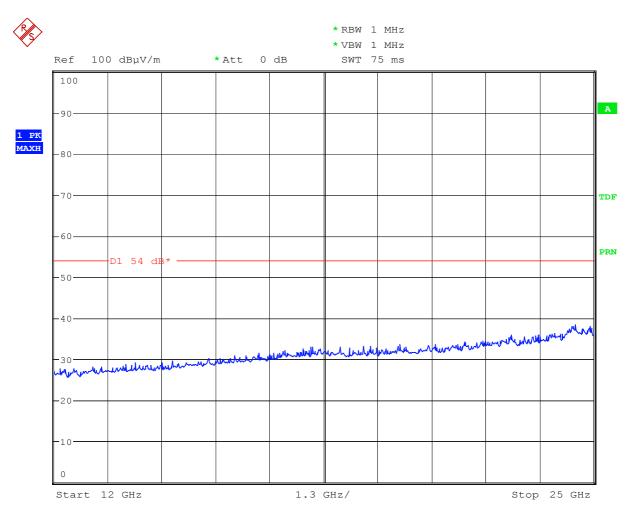

Date: 1.SEP.2003 13:45:44



#### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No         Instrument/Ancillary         Type         Manufacturer         Serial No.           01         Spectrum Analyzer         8566 A         Hewlett-Packard         1925A00860           02         Analyzer Display         8566 A         Hewlett-Packard         1925A00860           03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2248A07027           06         Signal Generator         8662 A         Hewlett-Packard         2215G00867           07         Signal Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A10056           15         Mod	1	<u> </u>	T		
02         Analyzer Display         8566 A         Hewlett-Packard         1925A00860           03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2248007027           06         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         264*           16         Frequency	No	Instrument/Ancillary	Type	Manufacturer	Serial No.
03         Oscilloscope         7633         Tektronix         230054           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2848A07027           06         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic		Spectrum Analyzer		Hewlett-Packard	1925A00257
04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 043/010           05         System Power Supply         6038 A         Hewlett-Packard         2848A07027           06         Signal Generator         8111 A         Hewlett-Packard         2215G00867           07         Signal Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         2747A05306           17         Anechoic Chamber	02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
Analyzer   05   System Power Supply   6038 A   Hewlett-Packard   2848A07027   06   Signal Generator   8111 A   Hewlett-Packard   2215G00867   07   Signal Generator   8662 A   Hewlett-Packard   2224A01012   08   Function Generator   AFGU   Rohde & Schwarz   862 48/032   09   Regulating Transformer   MPL   Erfi   91350   10   LISN   NNLA 8120   Schwarzbeck   8120331   11   Relay-Matrix   PSU   Rohde & Schwarz   893 285/020   12   Power-Meter   436 A   Hewlett-Packard   2101A12378   13   Power-Sensor   8484 A   Hewlett-Packard   2237A00616   15   Modulation Meter   9008   Racal-Dana   2647   16   Frequency Counter   5340 A   Hewlett-Packard   1532A03899   17   Anechoic Chamber     MWB   87400/002   18   Spectrum Analyzer   85660 B   Hewlett-Packard   2747A05306   19   Analyzer Display   85662 A   Hewlett-Packard   2816A16541   20   Quasi Peak Adapter   85650 A   Hewlett-Packard   2811A01131   21   RF-Preselector   85685 A   Hewlett-Packard   2813A00768   22   Biconical Antenna   3104   Emco   3758   23   Log. Per. Antenna   3146   Emco   2130   24   Double Ridged Horn   3115   Emco   3088   25   EMI-Testreceiver   ESAI   Rohde & Schwarz   863 1800/13   28   Log. Per. Antenna   HK 116   Rohde & Schwarz   862 771/008   29   Relay-Switch-Unit   RSU   Rohde & Schwarz   862 771/008   30   Highpass   HM985955   FSY Microwave   001   Amplifier   31   Amplifier   PSM 7   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz   834 621/004   34   EMI Test Receiver   ESMI   Rohde & Schwarz	03	Oscilloscope	7633	Tektronix	230054
05         System Power Supply         6038 A         Hewlett-Packard         2848A07027           06         Signal Generator         8111 A         Hewlett-Packard         2215G00867           07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber	04	Radio Communication	CMTA 54	Rohde & Schwarz	894 043/010
06         Signal Generator         8111 A         Hewlett-Packard         2215G00867           07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2207A10156           14         Power-Sensor         8484 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber		Analyzer			
07         Signal Generator         8662 A         Hewlett-Packard         2224A01012           08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2207A10156           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A10616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber	05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
08         Function Generator         AFGU         Rohde & Schwarz         862 480/032           09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85685 A         Hewlett-Packard         2811A01131           21         RF-Preselector	06	Signal Generator	8111 A	<b>Hewlett-Packard</b>	2215G00867
09         Regulating Transformer         MPL         Erfi         91350           10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber	07	Signal Generator	8662 A	<b>Hewlett-Packard</b>	2224A01012
10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna	08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
10         LISN         NNLA 8120         Schwarzbeck         8120331           11         Relay-Matrix         PSU         Rohde & Schwarz         893 285/020           12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna	09	Regulating Transformer	MPL	Erfi	91350
12         Power-Meter         436 A         Hewlett-Packard         2101A12378           13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anchoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Analyzer-Display         ES	10		NNLA 8120	Schwarzbeck	8120331
13         Power-Sensor         8484 A         Hewlett-Packard         2237A10156           14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display	11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
14         Power-Sensor         8482 A         Hewlett-Packard         2237A00616           15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna	12	Power-Meter	436 A	Hewlett-Packard	2101A12378
15         Modulation Meter         9008         Racal-Dana         2647           16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit </td <td>13</td> <td>Power-Sensor</td> <td>8484 A</td> <td>Hewlett-Packard</td> <td>2237A10156</td>	13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
16         Frequency Counter         5340 A         Hewlett-Packard         1532A03899           17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpas	14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
17         Anechoic Chamber          MWB         87400/002           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpa	15	Modulation Meter	9008	Racal-Dana	2647
18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A05306           19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         825 584/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber	16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
19         Analyzer Display         85662 A         Hewlett-Packard         2816A16541           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber	17	Anechoic Chamber		MWB	87400/002
20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A01131           21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz	18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
21         RF-Preselector         85685 A         Hewlett-Packard         2833A00768           22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz	19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
22         Biconical Antenna         3104         Emco         3758           23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
23         Log. Per. Antenna         3146         Emco         2130           24         Double Ridged Horn         3115         Emco         3088           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 180/013           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 771/008           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 945/013           28         Log. Per. Antenna         HL 223         Rohde & Schwarz         825 584/002           29         Relay-Switch-Unit         RSU         Rohde & Schwarz         375 339/002           30         Highpass         HM985955         FSY Microwave         001           31         Amplifier         P42-GA29         Tron-Tech         B 23602           32         Anechoic Chamber         Frankonia           33         Control Computer         PSM 7         Rohde & Schwarz         834 621/004           34         EMI Test Receiver         ESMI         Rohde & Schwarz         827 063/010	21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
24Double Ridged Horn3115Emco308825EMI-TestreceiverESAIRohde & Schwarz863 180/01326EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 771/00827Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	22	Biconical Antenna	3104	Emco	3758
25EMI-TestreceiverESAIRohde & Schwarz863 180/01326EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 771/00827Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	23	Log. Per. Antenna	3146	Emco	2130
25EMI-TestreceiverESAIRohde & Schwarz863 180/01326EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 771/00827Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	24	Double Ridged Horn	3115	Emco	3088
27Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	25		ESAI	Rohde & Schwarz	863 180/013
27Biconical AntennaHK 116Rohde & Schwarz888 945/01328Log. Per. AntennaHL 223Rohde & Schwarz825 584/00229Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
29Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	27		HK 116	Rohde & Schwarz	888 945/013
29Relay-Switch-UnitRSURohde & Schwarz375 339/00230HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
30HighpassHM985955FSY Microwave00131AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	29	· ·	RSU	Rohde & Schwarz	
31AmplifierP42-GA29Tron-TechB 2360232Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	30		HM985955		001
32Anechoic ChamberFrankonia33Control ComputerPSM 7Rohde & Schwarz834 621/00434EMI Test ReceiverESMIRohde & Schwarz827 063/010	31	0 1	P42-GA29		B 23602
33 Control Computer PSM 7 Rohde & Schwarz 834 621/004 34 EMI Test Receiver ESMI Rohde & Schwarz 827 063/010					
34 EMI Test Receiver ESMI Rohde & Schwarz 827 063/010			PSM 7		834 621/004
		•			




## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

<b>N</b> .T	T / // ***	TD.	3.6	0 111
No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn	3115	EMCO	9107-3696
	Antenna 1-26.5 GHz			
50	Microw. Sys. Amplifier	8317A	Hewlett Packard	3123A00105
	0.5- 26.5 GHz			
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66	<u> </u>			
67				
68				
ــــــــــــــــــــــــــــــــــــــ	<u> </u>		<u> </u>	



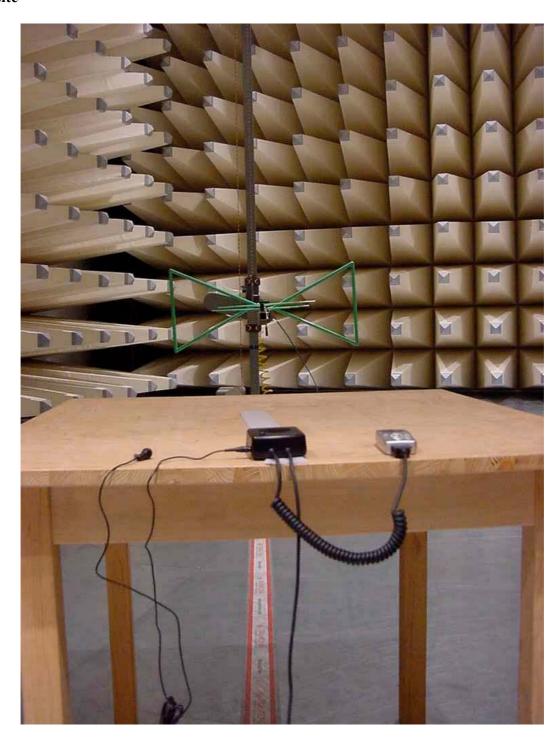




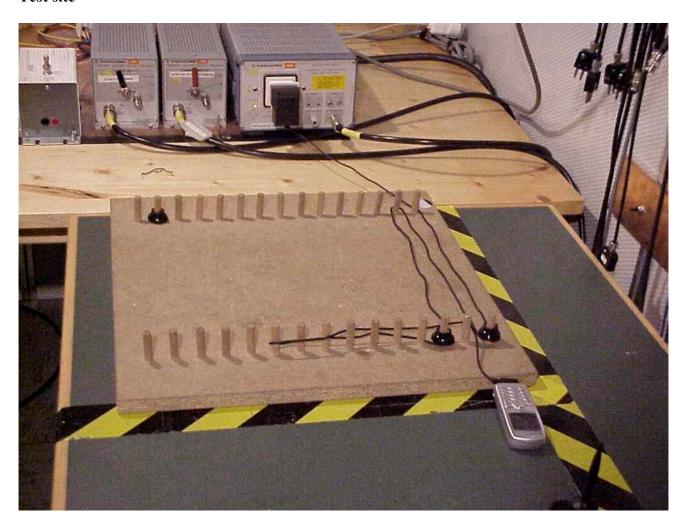







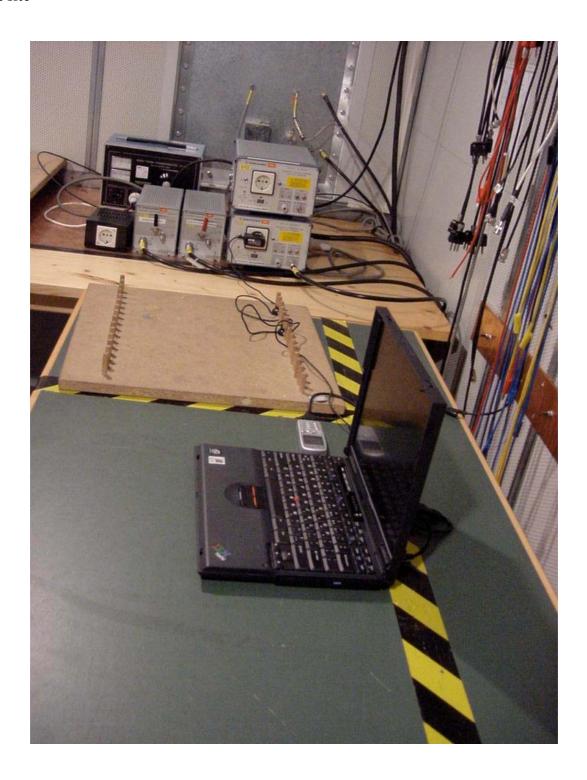



### **Photographs of the equipment**





## **Photographs of the equipment**





## **Photographs of the equipment**






















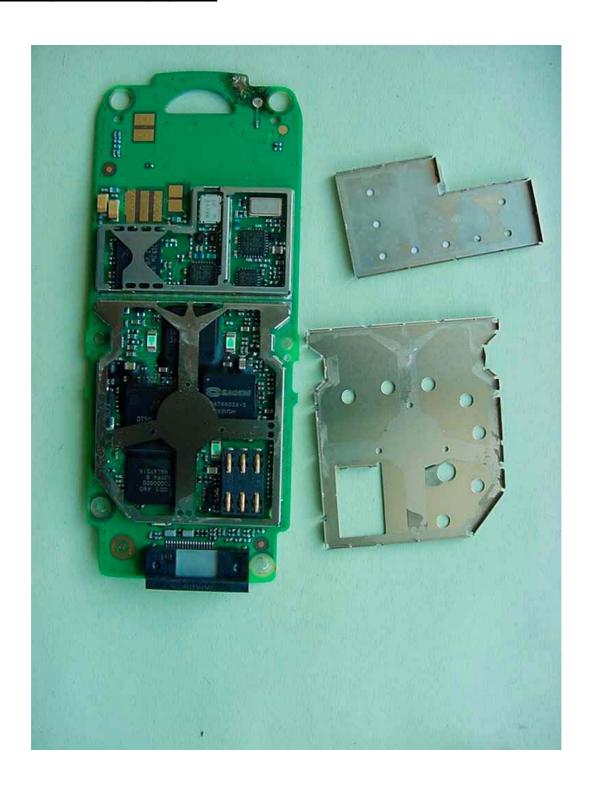







#### Photographs of the equipment

DTC3515 045E040E





#### **Photographs of the equipment**

18 599 601-3





### Photographs of the equipment





### **Photographs of the equipment**

**CLA4-3102** 





## Photographs of the equipment






### Photographs of the equipment





### **Photographs of the equipment**

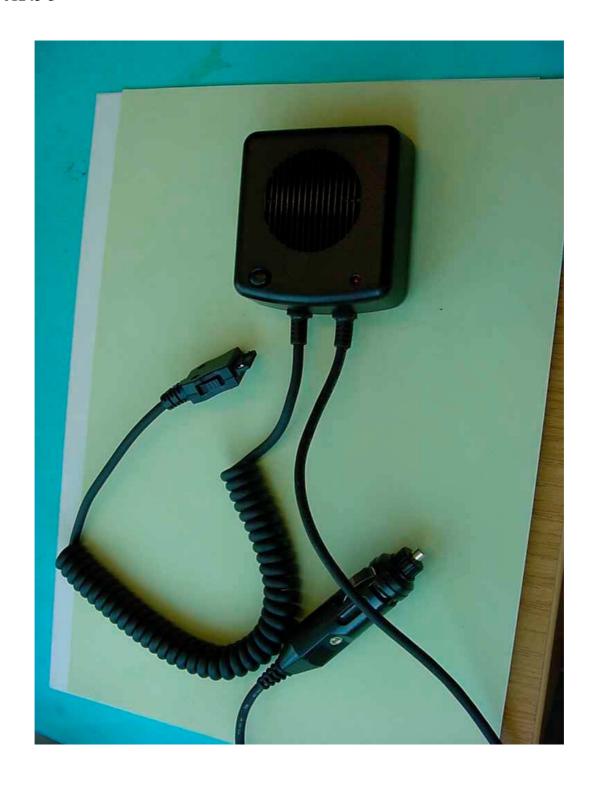



#### Photographs of the equipment

