
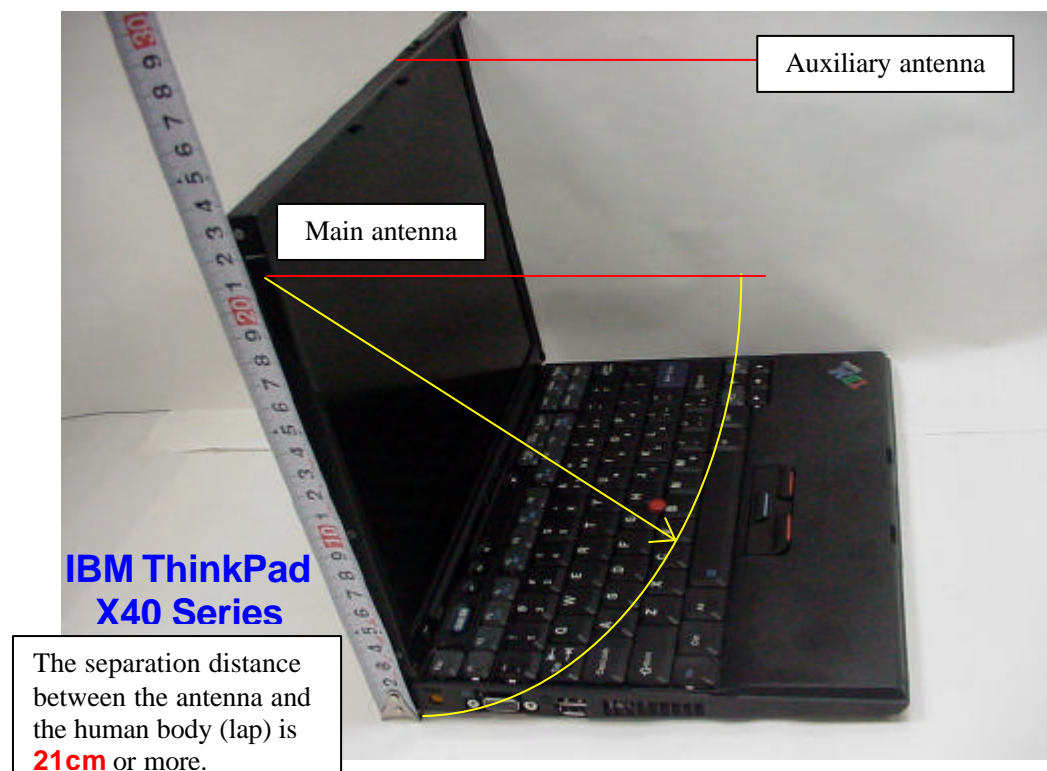


RF Exposure evaluation

1. RF Exposure evaluation for the applying LMA transmitter

As shown below, the all transmission antennas of both host PC devices (IBM ThinkPad X30 and X40 Series) are located at the upper portions of each display (LCD) section, and the separation distance between each antenna and the human body is 20cm or more. Therefore the applying LMA transmitter and each antenna system is categorized as a mobile device by FCC CFR 47 Section 2.1091.

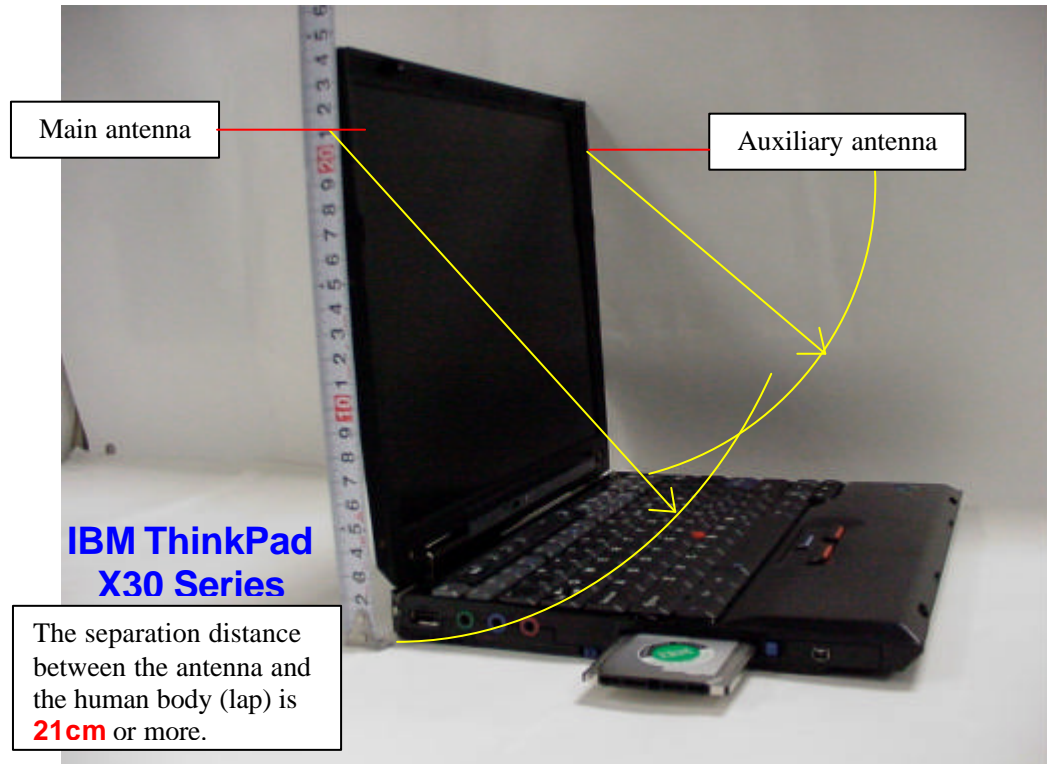

[MPE evaluation]

The following table shows the highest conducted peak output power values of the applying modular device, and the maximum peak antenna gains of each host device.

Transmission mode	P : conducted peak output power
2.4GHz band DSSS	17.11dBm (51.4mW)
2.4GHz band OFDM	13.30dBm (21.4mW)

Host PC model	G : peak antenna gain
ThinkPad X30 Series	1.28 dBi (Auxiliary antenna)
ThinkPad X40 Series	1.67 dBi (Auxiliary antenna)

With those results, the maximum power density at 20cm distance is calculated as follows.

IBM ThinkPad X30 Series

Transmission mode	EIRP = P + G (dBm)	EIRP (mW)	Max. power density $S = \text{EIRP} / (4 \times 20^2 \times \pi)$
2.4GHz band DSSS	18.39	69.0	0.0137 mW/ cm ²
2.4GHz band OFDM	14.58	28.7	0.0057 mW/ cm ²

IBM ThinkPad X40 Series

Transmission mode	EIRP = P + G (dBm)	EIRP (mW)	Max. power density $S = \text{EIRP} / (4 \times 20^2 \times \pi)$
2.4GHz band DSSS	18.78	75.5	0.0150 mW/ cm ²
2.4GHz band OFDM	14.97	31.4	0.0063 mW/ cm ²



Since the applying modular transmitter device does not function to emit the radio frequency from both diversity antennas simultaneously, the above results are the maximum values of RF exposure to the persons, and are far below the MPE limit (1.0 mW/ cm²). Therefore the LMA transmitter meets the MPE requirements for general Population/Uncontrolled exposure.

2. RF Exposure evaluation with co-located Bluetooth transmitters

Collocated Bluetooth options for ThinkPad X30 Series (X31)

The specific laptop PC, IBM ThinkPad X30 Series (X31) supports three kinds of Bluetooth devices as follows.



Option type	FCC ID	Grantee Name	Product Name	Granted Date	Power in Test Report
USB	PI4BT-ULTRA	TDK Systems Europe Ltd.	Bluetooth Ultraport Module	May/22/2001	1.4 mW
PCMCIA	PI4BT-IBM-PCII		Bluetooth PC Card II	August/21/2001	1.0mW
Built-in LMA Transmitter	ANO20020100MTN	IBM Japan, Ltd.	IBM integrated Bluetooth III with 56K Modem	February/26/2003	2.58mW

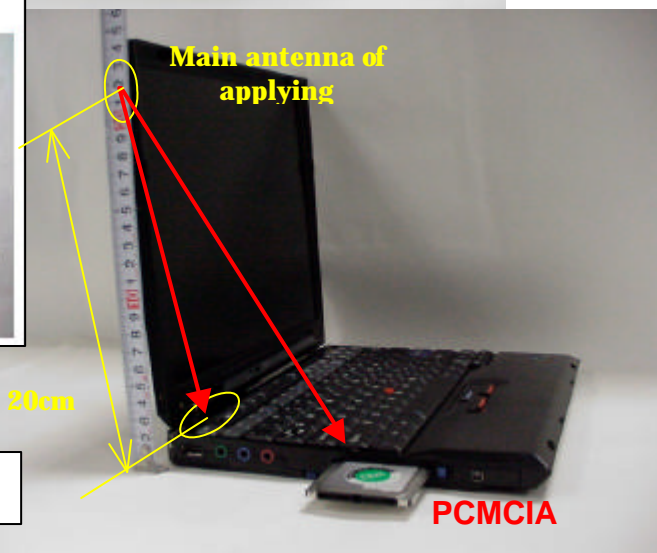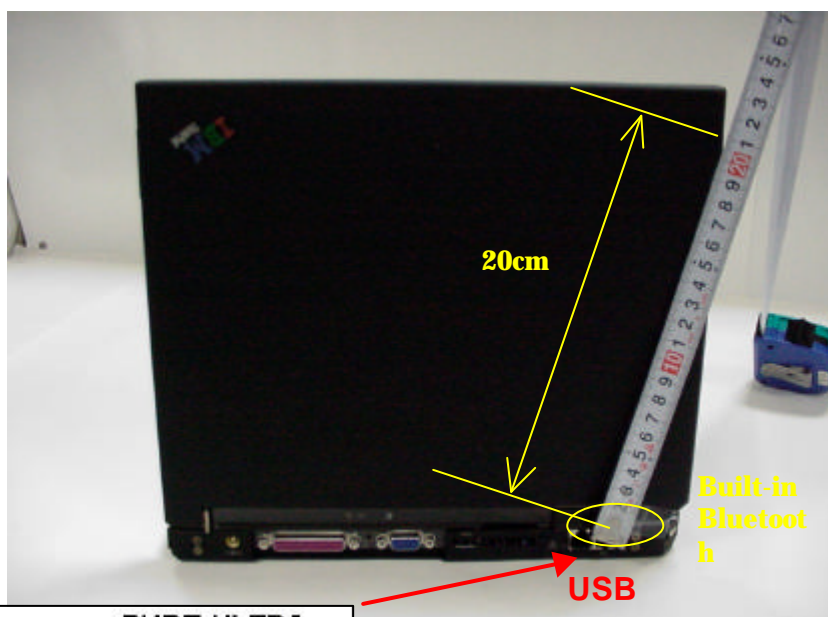

[Co-located Bluetooth options for ThinkPad X40 Series](#)

The specific laptop PC, IBM ThinkPad X40 Series supports the following co-located Bluetooth device.

Option type	FCC ID	Grantee Name	Product Name	Granted Date	Power in Test Report
Built-in LMA Transmitter	ANO20020100MTN	IBM Japan, Ltd.	IBM integrated Bluetooth III with 56K Modem	Under Class II process for the host (X40)	2.50mW

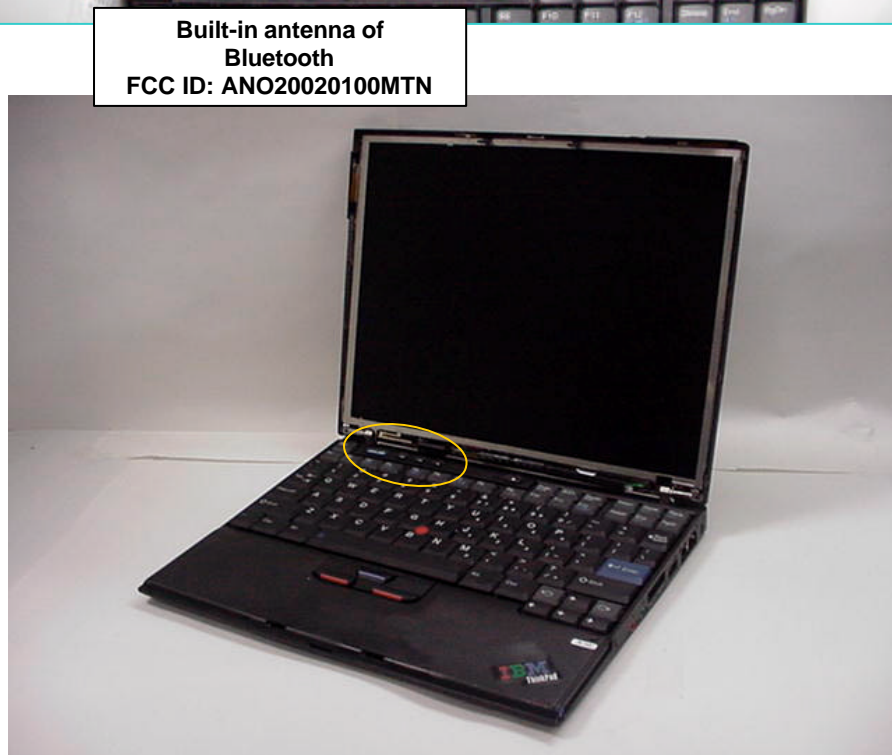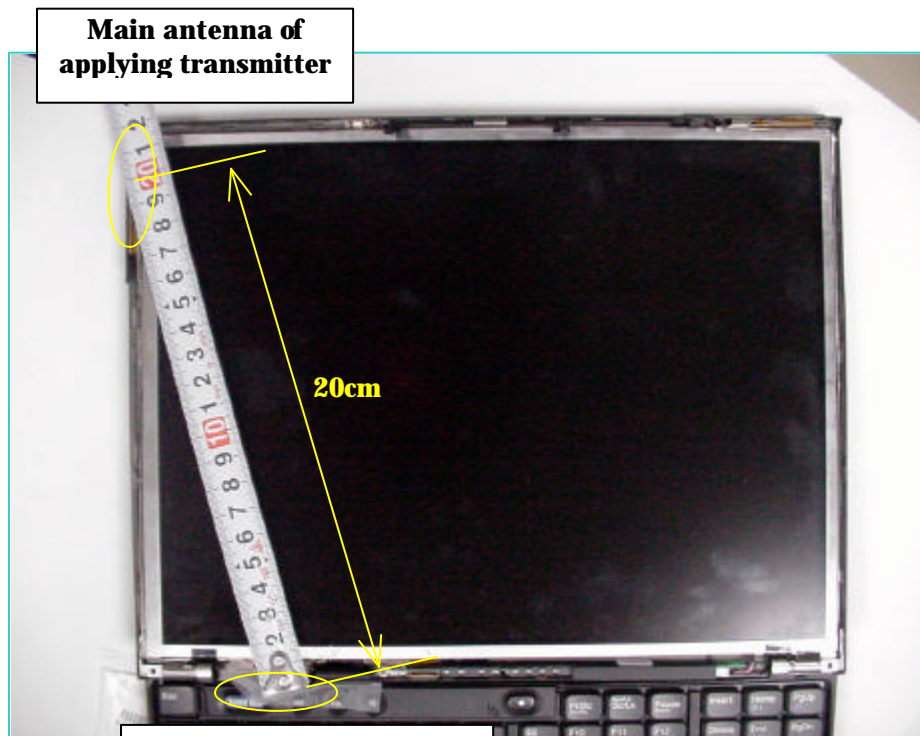

The main and auxiliary antennas located at LCD section of each host device (ThinkPad X30 Series, or X40 Series) are assembled apart from each Bluetooth antenna shown in the previous pages with 20 cm or more.

Therefore, those co-located Bluetooth transmitters are allowed to evaluate the RF exposure compliance independently of the applying modular transmitter. In other word, the SAR testing for the applying transmitter in co-locating with those Bluetooth transmitters is not required, when the Bluetooth transmitters could satisfy the RF exposure requirement with those own transmission powers.

When a customer operates the applying PC on one's lap, the sufficient separation distance (minimum 20cm) between the above Bluetooth antennas and the person's body (lap) can not be maintained.

But the footnote of the Section 3 in Supplement C to OET Bulletin 65 states :

“¹⁴ If a device, its antenna or other radiating structures are operating at closer than 2.5 cm from a person's body or in contact with the body, SAR evaluation may be necessary when the output is more than 50 – 100 mW, depending on the device operating configurations and exposure conditions.”

The total output power of the three Bluetooth transmitters in the previous table does not exceed 5mW (far below 50mW). Therefore these transmitters also satisfy the RF exposure requirement regarding CFR 47 Part 15.247(b)(4) without a SAR compliance test report, and can operate with the applying transmitter simultaneously.

IBM Web site provides customers the grant conditions for the co-locating use and approved co-located Bluetooth devices. See the next page.

3. IBM Web site

Note) The info for the applying LMA transmitter is not available until the product announcement.

<http://www.pc.ibm.com/qtechinfo/MIGR-53286.html>

The screenshot shows the IBM PC support website. The main heading is "TP Wireless Systems – Approved wireless Mini PCI options and additional RF option devices receive FCC certification". Below this, it lists "Applicable countries/regions" as "United States" and "Service hints & tips". A section titled "Affected configurations" states: "Additional RF Option devices receive FCC certification for use on:". A table follows, detailing the compatibility of various LMA adapters with different ThinkPad models.

LMA (Limited Modular Approval) adapters	FCC IDs	Approved ThinkPad models	PC options allowed multiple transmission		
			#1	#2	#3
IBM 11b/g Wireless LAN Mini PCI Adapter	ANO20030500CMR	X30 Series (X31)	O	O	O
		X40 Series	O	NG	NG
Intel PRO/Wireless 2200BG Mini-PCI Adapter	ANO20040501CX2	X30 Series (X31)	O	O	O
		X40 Series	O	NG	NG

Below the table, there is a "back to previous page" link. A "NOTES:" section explains that "NG" means "Not authorized to use by the FCC rule, or not recognized by BIOS". It lists three specific configurations with their FCC IDs and option names: #1 (FCC ID: ANO20020100MTN, Option Name: IBM Integrated Bluetooth with 56K Modem), #2 (FCC ID: PI4BT-ULTRA, Option Name: Bluetooth UltraPort Module from IBM), and #3 (FCC ID: PI4BT-IBM-PCII, Option Name: Bluetooth PC Card II). A "Solution" section refers to the "Service and Troubleshooting Guide" for more information. A "Use of wireless options" section provides three steps for users to ensure proper use of wireless features. The footer includes the document ID (MIGR-53286), last modified date (2003-01-31), and copyright notice (© 2003 IBM Corporation).