

TEST REPORT FOR SAR TESTING

Report No: SRTC2021-9004(F)-21122402(H)

Product Name: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: SRQ-ZTE9045

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R. China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1. GENERAL INFORMATION.....	3
1.1 NOTES OF THE TEST REPORT.....	3
1.2 INFORMATION ABOUT THE TESTING LABORATORY.....	3
1.3 APPLICANT’S DETAILS.....	3
1.4 MANUFACTURER’S DETAILS.....	3
1.5 TEST ENVIRONMENT.....	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	5
2.1 FINAL EQUIPMENT BUILD STATUS.....	5
2.2 SUPPORT EQUIPMENT.....	6
3. REFERENCE SPECIFICATION.....	7
4. TEST CONDITIONS.....	8
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH.....	8
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	8
4.3 SAR MEASUREMENT SET-UP.....	8
4.4 PHANTOMS.....	9
4.5 TISSUE SIMULANTS.....	9
4.6 DESCRIPTION OF THE TEST PROCEDURE.....	10
5 RESULT SUMMARY.....	13
6 TEST RESULT.....	17
6.1 MEASUREMENT RESULT.....	17
6.2 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	86
6.3 RF EXPOSURE CONDITIONS.....	87
6.4 SYSTEM CHECKING.....	89
6.5 SAR TEST RESULT.....	91
6.6 SAR MEASUREMENT VARIABILITY.....	134
6.7 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	135
7 MEASUREMENT UNCERTAINTY.....	136
8 TEST EQUIPMENTS.....	138

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R. China
City:	Beijing
Country or Region:	P.R. China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Registration Number	239125
Designation Number	CN1267

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021.12.27
Testing Start Date:	2022.01.05
Testing End Date:	2021. 01.20

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	22	35

Normal Supply Voltage (Vdc.):	3.8V
-------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipent Build Status

Wireless Technology and Frequency Bands	☒ GSM Band: GSM850/1900 ☒ WCDMA Band: FDD II/IV/V ☒ LTE Band: 2/4/5/7/UL_7C/12/13/28/38/66 DL: CA_4A-7A, CA_7C, CA_66A-66A, CA_4A-5A, CA_7A-5A, CA_2A-28A, CA_7A-28A ☒ Wi-Fi Band: 2.4GHz/5GHz ☒ BT/BLE
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (GMSK/8PSK) WCDMA ☒ UMTS Rel. 99 ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☒ HSPA+ (Rel. 7)(Downlink only) ☒ DC-HSDPA (Rel. 8) LTE ☒ QPSK ☒ 16QAM ☒ 64QAM Wi-Fi2.4GHz (802.11b/g/n/ax) ☒ 802.11b ☒ 802.11g ☒ 802.11n (20MHz/40MHz) ☐ 802.11ax (20MHz) Wi-Fi5GHz ☒ 802.11a ☒ 802.11n (20MHz/40MHz) ☒ 802.11ac (20MHz/40MHz/80MHz) ☐ 802.11ax (20MHz/40MHz/80MHz) Bluetooth ☒ BR(GFSK) ☒ EDR($\pi/4$ DQPSK , 8-DPSK) ☒ BLE(GFSK)
Duty Cycle*	GPRS/EDGE: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% LTE(FDD): 100% LTE(TDD): 63.3% maximum Bluetooth: 79.7% (DH5), 45.4% (2DH5),79.3% (3DH5) BLE: 89.5%(LE 1Mbps) WIFI 2.4GHz: 11b 99.22% 11g 95% 11n20 94.38% 11n40 89.72% WIFI 5GHz UNII-1: 11a 94.83% 11n20 93.95% 11n40 93.95% 11ac20 93.93% 11ac40 89% 11ac80 82.74% WIFI 5GHz UNII-3: 11a 94.92% 11n20 94.21% 11n40 94.21% 11ac20 94.04% 11ac40 89.22% 11ac80 82.7%

Multi-Slot Class for GPRS/EDGE	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up ☐ Class 33- Four Up
Mobile Phone Capability	☐ Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒ Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐ Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM	Not Supported
Note	For licensed cellular network duty cycle is inherent. For unlicensed network WLAN Duty cycle is depends on the data traffic, and the traffic allocation in operating mode could be the most conservative condition which with 100% duty cycle. SAR measurement also use non signalling mode, so the duty factor shall be taken into consideration.
H/W Version	ZTE 9045HW1.0
S/W Version	MyOS11.0.0_9045_TEL
IMEI	IMEI1: 862521050003898 IMEI2: 862521050003914 IMEI3: 862521050003849

2.2 Support Equipment

Equipment	Battery
Type	Li-Lon
Manufacturer	SCUD (FUJIAN) ELECTRONICS CO.,LTD
Model Number	Li3949T44P8h906450-5A
Nominal Voltage	3.89V

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2021	Radio frequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 447498 D02	v02r01	SAR MEASUREMENT PROCEDURES FOR USB DONGLE TRANSMITTERS
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth is large than 15cm in the used SAM phantoms in flat section, and the depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the

robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528. All tests were carried out using simulants whose dielectric parameters were within $\pm 10\%$ below 3GHz and $\pm 5\%$ above 3GHz of the recommended values when use DASY system according to KDB865664D01. All tests were carried out within 24 hours of measuring the dielectric parameters.

Tissue Stimulant Recipes	
Name	Broadband tissue-equivalent liquid
Type	HBBL600-6000V6 Simulating Liquid
Note: The stimulant could be the same for head and body.	

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

4.6.2 Test Exposure Conditions

4.6.2.1 Head Configuration

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is normally determined according to the actual scene which might be the worst use condition for general exposure. The device's front and rear were oriented facing the phantom since these orientations give higher results for most regular portable devices.

4.6.2.3 Hotspot Configuration

Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~4GHz) and 10mm x 10mm (from 4GHz~6GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location.

When the reported 1g-SAR estimated by area scan is less than 1.40 w/kg.

Zoom scan was performed by using the configuration mentioned below or more conservative scan area and step to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

Below 3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

2GHz-3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

3GHz-4GHz: 28mmX28mmX28mm scan area with 7 mm X7 mm X4 mm steps

4GHz-5GHz: 25mmX25mmX24mm scan area with 5 mm X5 mm X3 mm steps

5GHz-6GHz: 25mmX25mmX22mm scan area with 5 mm X5 mm X2 mm steps

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A triradiate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

5 RESULT SUMMARY


The maximum reported SAR values for all exposure conditions are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Standalone Transmission Summary					
Exposure Position	Frequency Band MAIN	SAR Result(W/kg)	Highest SAR Result(W/kg)	Limit(W/kg)	Verdict
Head	GSM850	0.13	0.72	1.60	Pass
	GSM1900	0.10			
	WCDMA Band II	0.17			
	WCDMA Band IV	0.15			
	WCDMA Band V	0.15			
	LTE Band2	0.20			
	LTE Band4	0.14			
	LTE Band5	0.14			
	LTE Band7	0.68			
	LTE Band7C	0.72			
	LTE Band12	0.06			
	LTE Band28	0.09			
	LTE Band38	0.63			
	LTE Band66	0.13			
Body-Worn	GSM850	0.68	1.19	1.60	Pass
	GSM1900	0.54			
	WCDMA Band II	1.10			
	WCDMA Band IV	1.06			
	WCDMA Band V	0.39			
	LTE Band2	0.97			
	LTE Band4	0.88			
	LTE Band5	0.38			
	LTE Band7	1.19			
	LTE Band7C	0.90			
	LTE Band12	0.17			
	LTE Band13	0.19			

	LTE Band28	0.22			
	LTE Band38	0.25			
	LTE Band66	0.95			
Hotspot	GSM850	0.68	1.19	1.60	Pass
	GSM1900	0.67			
	WCDMA Band II	1.19			
	WCDMA Band IV	1.06			
	WCDMA Band V	0.39			
	LTE Band2	1.19			
	LTE Band4	0.88			
	LTE Band5	0.38			
	LTE Band7	1.19			
	LTE Band7C	1.04			
	LTE Band12	0.21			
	LTE Band13	0.19			
	LTE Band28	0.22			
	LTE Band38	0.34			
	LTE Band66	0.95			

Standalone Transmission Summary					
Exposure Position	Frequency Band MAIN	SAR Result(W/kg)	Highest SAR Result(W/kg)	Limit(W/kg)	Verdict
Head	BT/BLE	0.09	1.23	1.60	Pass
	WLAN2.4GHz	0.88			
	WLAN5GHz UNII-1	1.19			
	WLAN5GHz UNII-3	1.23			
Body-Worn	BT/BLE	0.00	0.29	1.60	Pass
	WLAN2.4GHz	0.29			
	WLAN5GHz UNII-1	0.18			
	WLAN5GHz UNII-3	0.28			
Hotspot	BT/BLE	0.00	0.69	1.60	Pass
	WLAN2.4GHz	0.35			
	WLAN5GHz UNII-1	0.58			
	WLAN5GHz UNII-3	0.69			

Simultaneous Transmission Summary				
Exposure Position	Mode	Highest SAR Result(W/kg)	Limit(W/kg)	Verdict
Head	LTE Band7C+BT +WLAN5GHz	1.49	1.60	Pass
Body-Worn	LTE Band7+WLAN2.4GHz	1.48	1.60	Pass
Hotspot	LTE Band7+WLAN2.4GHz	1.48	1.60	Pass

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and issued by: Ms.Li Jin 	Approved date: 2022/01/26

6 TEST RESULT

6.1 Measurement result

GSM Measurement result

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

GSM850

TX Mode	TX slot	Burst Power (dBm)			Tuneup Tolerance (dBm)	Frame power(dBm)			Tuneup Tolerance (dBm)
		Frequency/Channel				Frequency/Channel			
		824.2	836.6	848.8		824.2	836.6	848.8	
		128	190	251		128	190	251	
GSM	1 Tx slot	33.38	33.46	33.51	34.00	24.35	24.43	24.48	24.50
GPRS/EGPRS (GMSK)	1 Tx slot	33.28	33.36	33.40	33.50	24.25	24.33	24.37	24.50
	2 Tx slots	31.33	31.39	31.44	31.50	25.31	25.37	25.42	25.50
	3 Tx slots	29.57	29.62	29.64	30.00	25.31	25.36	25.38	25.50
	4 Tx slots	27.59	27.67	27.70	28.00	24.58	24.66	24.69	25.00
EGPRS (8PSK)	1 Tx slot	26.41	25.95	25.58	26.50	17.38	16.92	16.55	17.50
	2 Tx slots	25.19	24.92	25.34	25.50	19.17	18.90	19.32	19.50
	3 Tx slots	23.09	23.71	23.09	24.00	18.83	19.45	18.83	19.50
	4 Tx slots	20.91	20.73	21.08	21.50	17.90	17.72	18.07	18.50

PCS 1900

TX Mode	TX slot	Burst Power (dBm)			Tuneup Tolerance (dBm)	Frame power(dBm)			Tuneup Tolerance (dBm)
		Frequency/Channel				Frequency/Channel			
		1850	1880	1910		1850	1880	1910	
		512	661	810		512	661	810	
GSM	1 Tx slot	29.27	28.93	29.26	29.50	20.24	19.90	20.23	20.50
GPRS/ EGPRS (GMSK)	1 Tx slot	29.15	28.79	29.14	29.50	20.12	19.76	20.11	20.50
	2 Tx slots	27.19	27.22	27.29	27.50	21.17	21.20	21.27	21.50
	3 Tx slots	25.66	25.69	25.78	26.00	21.40	21.43	21.52	22.00
	4 Tx slots	23.71	23.73	23.80	24.00	20.70	20.72	20.79	21.00
EGPRS (8PSK)	1 Tx slot	25.37	24.97	25.13	25.50	16.34	15.94	16.10	16.50
	2 Tx slots	24.87	24.64	24.55	25.00	18.85	18.62	18.53	19.00
	3 Tx slots	22.65	22.64	22.11	23.00	18.39	18.38	17.85	18.50
	4 Tx slots	20.87	20.67	19.86	21.00	17.86	17.66	16.85	18.00

According to the frame average conducted power as above, the SAR measurements are performed with **2Tx slots (2 uplink 3Downlink)** of GPRS850 and **3Tx slots (3 uplink 2Downlink)** of GPRS1900.

WCDMA Measurement result

Release 99

The following procedures are according to FCC KDB Publication 941225 D01.

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	RMC mode AMR mode	12.2kbps RMC 12.2kbps RMC in 3.4 kbps SRB
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Release 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Release 6

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (S F)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (S F)	β_{ed} (code s)	CM (⁽²⁾ (dB)	MP R (dB)	AG ⁽⁴⁾ Index	E-TF CI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of

DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Release 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

Release 8

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

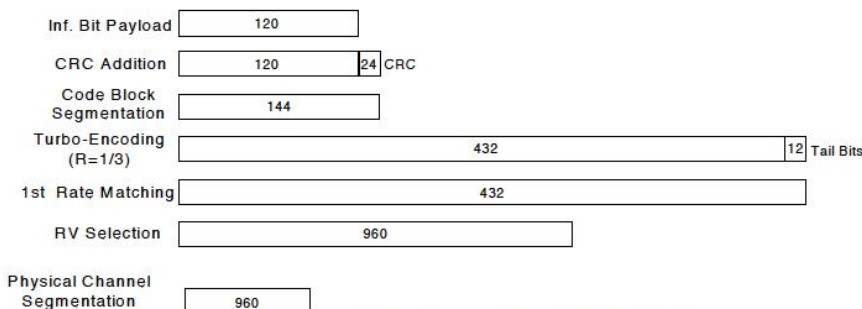


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

WCDMA

WCDMA band II

Mode		RF Output Power(dBm)			Tuneup Tolerance (dBm)
		9262	9400	9538	
		1852.4	1880	1907.6	
Release 99	RMC,12.2kbps	23.28	22.60	22.61	23.5
HSDPA	Subtest1	22.22	22.37	22.37	22.5
	Subtest2	22.28	22.29	22.30	22.5
	Subtest3	22.22	22.23	22.25	22.5
	Subtest4	22.22	22.25	22.29	22.5
HSUPA	Subtest1	19.43	19.53	19.54	20.0
	Subtest2	20.25	20.31	20.42	20.5
	Subtest3	20.52	20.52	20.64	21.0
	Subtest4	20.29	20.35	20.43	20.5
	Subtest5	22.27	22.39	22.35	22.5
HSPA+	QPSK	22.25	22.26	22.35	22.5
	16QAM	22.21	22.28	22.31	22.5
DC-HSDPA	Subtest1	22.22	22.30	22.36	22.5
	Subtest2	21.90	22.01	22.00	22.5
	Subtest3	22.10	22.17	22.14	22.5
	Subtest4	21.76	21.83	21.83	22.0

WCDMA band IV

Mode		RF Output Power(dBm)			Tuneup Tolerance (dBm)
		1312	1413	1513	
		1712.4	1732.6	1752.6	
Release 99	RMC,12.2kbps	23.23	23.34	23.39	23.5
HSDPA	Subtest1	23.24	23.26	23.47	23.5
	Subtest2	23.20	23.26	23.42	23.5
	Subtest3	23.14	23.20	23.33	23.5
	Subtest4	23.16	23.26	23.35	23.5
HSUPA	Subtest1	22.39	22.47	22.51	23.0
	Subtest2	22.73	22.86	22.92	23.0
	Subtest3	23.04	23.14	23.25	23.5
	Subtest4	22.80	22.92	22.99	23.0
	Subtest5	23.21	23.26	23.42	23.5
HSPA+	QPSK	23.14	23.24	23.36	23.5
	16QAM	23.16	23.21	23.34	23.5
DC-HSDPA	Subtest1	23.23	23.35	23.32	23.5
	Subtest2	23.21	23.30	23.31	23.5
	Subtest3	23.22	23.24	23.11	23.5
	Subtest4	23.22	23.30	23.28	23.5

WCDMA band V


Mode		RF Output Power(dBm)			Tuneup Tolerance (dBm)
		4132	4183	4233	
		826.4	836.6	846.6	
Release 99	RMC,12.2kbps	24.09	23.85	23.61	24.5
HSDPA	Subtest1	23.72	23.70	23.50	24.0
	Subtest2	23.68	23.71	23.50	24.0
	Subtest3	23.62	23.68	23.51	24.0
	Subtest4	23.62	23.68	23.51	24.0
HSUPA	Subtest1	21.16	20.91	21.00	21.5
	Subtest2	21.45	21.57	21.47	22.0
	Subtest3	21.66	21.78	21.66	22.0
	Subtest4	21.20	21.00	21.09	21.5
	Subtest5	23.70	23.72	23.54	24.0
HSPA+	QPSK	23.22	23.27	23.07	23.5
	16QAM	23.22	23.24	23.03	23.5
DC-HSDPA	Subtest1	23.07	22.87	22.71	23.5
	Subtest2	22.75	22.73	22.55	23.0
	Subtest3	22.46	22.45	22.26	22.5
	Subtest4	22.35	22.34	22.15	22.5

Note: UMTS SAR was tested under Rel.99 RMC 12.2kbps mode per KDB Publication 941225 D01.for other higher release configuration, SAR was not required since any average output power was not more than 0.25 dB higher than the RMC level.

LTE Measurement result


General description:

FDD-LTE frame structure

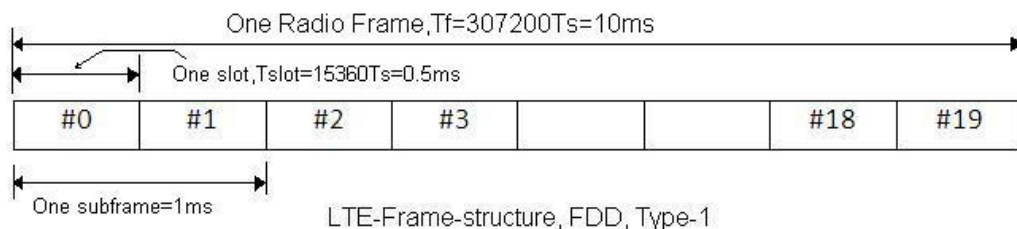

Type 1 is used as LTE FDD frame structure. As shown in the figure above, an LTE TDD frame is made of total 20 slots, each of 0.5ms. Two consecutive time slots will form one subframe. 10 such subframes form one radio frame. One subframe duration is about 1 ms. and the duty cycle is inherent as 100%

TDD-LTE frame structure

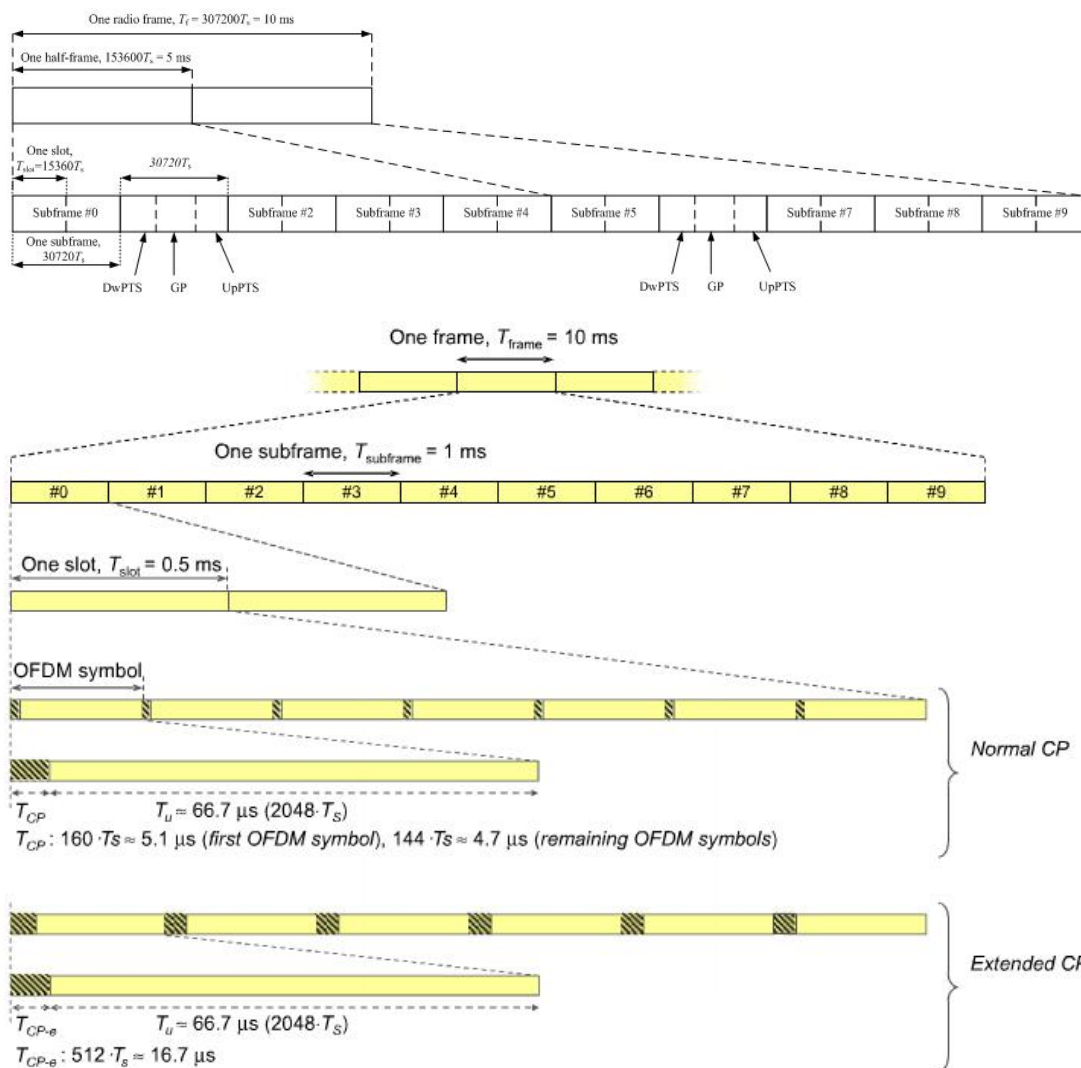

Uplink-downlink configuration

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Special sub-frame configuration

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-	-	-
8	$24144 \cdot T_s$			-	-	-

Special sub-frame with cyclic prefix uplink

Special sub-frame configuration		Duty factor with normal cyclic prefix in uplink	Duty factor with extended cyclic prefix in uplink
Normal cyclic prefix in downlink	0~4	7.13%	8.33%
	5~9	14.3%	16.7%
Extended cyclic prefix in downlink	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

So we perform SAR test with maximum duty factor equal to 63.3% by using uplink-downlink configuration 0.

Note: One sub-frame is $30720T_s=1\text{ms}$, when UpPTS(uplink) in special sub-frame with extended cyclic prefix, duty factor = $5120/30720=0.167$. There are 5 sub-frames in half frame(3up link),so the final duty factor is $(30720*3+5120)/(30720*5)=63.3\%$ which we used to evaluate the SAR compliance (worst case)

LTE Band 2

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18607	18900	19193	Tune-up
				1850.7	1880	1909.3	Tolerance
1.4	QPSK	1	0	23.09	22.89	23.14	23.5
		1	3	23.06	22.68	22.93	23.5
		1	5	23.13	22.55	23.08	23.5
		3	0	23.02	22.93	23.22	23.5
		3	1	23.06	22.86	23.17	23.5
		3	3	23.15	22.67	23.07	23.5
		6	0	22.03	21.97	22.14	22.5
	16QAM	1	0	22.78	22.06	22.29	23.0
		1	3	22.77	22.12	22.36	23.0
		1	5	22.72	21.94	22.28	23.0
		3	0	22.18	21.75	22.39	22.5
		3	1	22.25	21.80	22.34	22.5
		3	3	22.19	21.70	22.48	22.5
		6	0	21.37	20.99	21.35	21.5
	64QAM	1	0	20.77	20.65	21.17	21.5
		1	3	20.90	20.75	21.35	21.5
		1	5	20.98	20.58	21.34	21.5
		3	0	21.12	21.29	21.35	21.5
		3	1	21.07	21.30	21.47	21.5
		3	3	21.14	21.16	21.28	21.5
		6	0	18.96	18.91	19.02	19.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18615	18900	19185	Tune-up Tolerance
				1851.5	1880	1908.5	
3	QPSK	1	0	23.13	23.08	23.32	23.5
		1	8	23.19	22.91	23.33	23.5
		1	14	22.94	23.12	23.33	23.5
		8	0	22.05	21.97	22.14	22.5
		8	4	22.11	21.75	22.16	22.5
		8	7	22.10	21.79	22.13	22.5
		15	0	22.08	21.95	22.13	22.5
	16QAM	1	0	23.03	22.18	22.16	23.5
		1	8	23.21	22.06	22.18	23.5
		1	14	22.93	22.07	22.14	23.0
		8	0	21.49	21.11	21.30	21.5
		8	4	21.46	21.01	21.21	21.5
		8	7	21.34	20.90	21.27	21.5
		15	0	21.30	21.07	21.34	21.5
	64QAM	1	0	21.91	20.26	22.12	22.5
		1	8	21.81	20.13	22.10	22.5
		1	14	21.72	20.02	22.02	22.5
		8	0	18.78	18.92	18.96	19.0
		8	4	18.88	18.95	19.00	19.0
		8	7	18.86	18.91	18.90	19.0
		15	0	18.75	18.94	18.97	19.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18625	18900	19175	Tune-up Tolerance
				1852.5	1880	1907.5	
5	QPSK	1	0	23.20	23.19	23.32	23.5
		1	12	23.14	22.89	23.41	23.5
		1	24	23.10	22.77	23.39	23.5
		12	0	22.23	21.94	22.28	22.5
		12	7	22.05	21.80	22.22	22.5
		12	13	22.07	21.79	22.22	22.5
		25	0	22.04	22.01	22.18	22.5
	16QAM	1	0	21.82	22.37	22.07	22.5
		1	12	21.60	22.07	22.04	22.5
		1	24	21.56	21.95	22.06	22.5
		12	0	21.15	20.89	21.26	21.5
		12	7	21.14	20.75	21.25	21.5
		12	13	21.10	20.73	21.27	21.5
		25	0	21.29	21.08	21.34	21.5
	64QAM	1	0	20.93	21.48	21.26	21.5
		1	12	20.75	21.06	21.31	21.5
		1	24	20.73	21.95	21.26	22.0
		12	0	18.73	18.84	18.83	19.0
		12	7	18.93	19.00	19.07	19.5
		12	13	18.84	18.84	18.98	19.0
		25	0	18.70	18.85	18.92	19.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18650	18900	19150	Tune-up Tolerance
				1855	1880	1905	
10	QPSK	1	0	23.22	23.55	23.05	24.0
		1	25	23.07	23.07	23.09	23.5
		1	49	23.15	22.93	23.16	23.5
		25	0	21.98	22.19	22.05	22.5
		25	12	22.02	21.95	22.18	22.5
		25	25	22.03	21.87	22.14	22.5
		50	0	21.99	21.99	22.26	22.5
	16QAM	1	0	23.15	23.36	22.59	23.5
		1	25	23.01	22.74	22.46	23.5
		1	49	23.16	22.39	22.59	23.5
		25	0	21.26	21.42	21.37	21.5
		25	12	21.20	21.16	21.38	21.5
		25	25	21.25	21.03	21.49	21.5
		50	0	21.13	20.96	21.28	21.5
	64QAM	1	0	21.88	21.38	21.47	22.0
		1	25	21.75	20.86	21.45	22.0
		1	49	21.90	20.71	21.56	22.0
		25	0	18.75	19.04	18.87	19.5
		25	12	18.94	19.12	18.99	19.5
		25	25	19.27	19.33	19.33	19.5
		50	0	18.99	19.19	19.04	19.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18675	18900	19125	Tune-up Tolerance
				1857.5	1880	1902.5	
15	QPSK	1	0	23.23	23.62	22.78	24.0
		1	37	23.14	23.12	22.88	23.5
		1	74	23.33	23.08	23.02	23.5
		36	0	22.00	22.16	22.01	22.5
		36	29	22.21	21.70	22.17	22.5
		36	30	22.10	21.71	22.18	22.5
		75	0	22.03	21.86	22.22	22.5
	16QAM	1	0	23.02	23.10	22.40	23.5
		1	37	23.03	22.48	22.64	23.5
		1	74	23.35	22.36	22.67	23.5
		36	0	21.17	21.42	21.13	21.5
		36	29	21.33	21.05	21.27	21.5
		36	30	21.34	21.00	21.29	21.5
		75	0	21.25	21.12	21.29	21.5
	64QAM	1	0	21.77	21.34	22.17	22.5
		1	37	21.73	20.79	22.23	22.5
		1	74	21.99	21.04	22.35	22.5
		36	0	18.81	19.09	18.99	19.5
		36	29	19.05	19.10	18.94	19.5
		36	30	19.07	19.12	18.97	19.5
		75	0	19.00	19.10	19.06	19.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				18700	18900	19100	Tune-up Tolerance
				1860	1880	1900	
20	QPSK	1	0	23.14	23.56	22.85	24.0
		1	49	23.17	23.09	22.95	23.5
		1	99	23.31	23.13	23.11	23.5
		50	0	22.06	22.49	21.93	22.5
		50	24	22.16	22.02	22.03	22.5
		50	50	22.30	21.97	22.20	22.5
		100	0	22.17	21.94	22.03	22.5
	16QAM	1	0	22.25	22.38	22.89	23.0
		1	49	22.33	21.89	23.08	23.5
		1	99	22.50	21.91	23.22	23.5
		50	0	21.21	21.75	21.06	22.0
		50	24	21.39	21.11	21.24	21.5
		50	50	21.45	21.03	21.27	21.5
		100	0	21.32	21.12	21.27	21.5
	64QAM	1	0	21.29	21.90	22.06	22.5
		1	49	21.35	21.33	22.10	22.5
		1	99	21.67	21.30	22.32	22.5
		50	0	19.26	19.37	19.39	19.5
		50	24	19.29	19.13	19.06	19.5
		50	50	19.52	19.43	19.23	20.0
		100	0	19.37	19.38	19.31	19.5

DLCA_2A-28A

Aggregated BW	Modulation	PCC RB Size	SCC RB offset	Conducted power with DL SCC active (dBm)			
				18700	18900	19100	Tune-up
				1860	1880	1900	Tolerance
20+20	QPSK	1	0	21.94	22.36	21.65	22.5
		1	49	21.97	21.89	21.75	22.0
		1	99	22.11	21.93	21.91	22.5
		50	0	20.86	21.29	20.73	21.5
		50	24	20.96	20.82	20.83	21.0
		50	50	21.10	20.77	21.00	21.5
		100	0	20.97	20.74	20.83	21.0
	16QAM	1	0	21.05	21.18	21.69	22.0
		1	49	21.13	20.69	21.88	22.0
		1	99	21.30	20.71	22.02	22.5
		50	0	20.01	20.55	19.86	21.0
		50	24	20.19	19.91	20.04	20.5
		50	50	20.25	19.83	20.07	20.5
		100	0	20.12	19.92	20.07	20.5
	64QAM	1	0	20.09	20.70	20.86	21.0
		1	49	20.15	20.13	20.90	21.0
		1	99	20.47	20.10	21.12	21.5
		50	0	18.06	18.17	18.19	18.5
		50	24	18.09	17.93	17.86	18.5
		50	50	18.32	18.23	18.03	18.5
		100	0	18.17	18.18	18.11	18.5

LTE Band 4

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				19957	20175	20393	Tune-up
				1710.7	1732.5	1754.3	Tolerance
1.4	QPSK	1	0	23.15	23.54	23.82	24.0
		1	3	22.98	23.38	23.41	23.5
		1	5	22.93	23.32	23.44	23.5
		3	0	23.01	23.41	23.31	23.5
		3	1	23.08	23.36	23.36	23.5
		3	3	23.03	23.31	23.29	23.5
		6	0	22.04	22.32	22.40	22.5
	16QAM	1	0	22.05	23.01	22.68	23.5
		1	3	22.20	23.08	22.65	23.5
		1	5	22.25	23.01	22.71	23.5
		3	0	22.24	22.42	22.15	22.5
		3	1	22.24	22.49	22.14	22.5
		3	3	22.40	22.46	22.25	22.5
		6	0	21.17	21.67	21.54	22.0
	64QAM	1	0	21.13	20.98	22.30	22.5
		1	3	21.17	20.97	22.40	22.5
		1	5	21.20	21.02	22.29	22.5
		3	0	21.28	21.45	21.82	22.0
		3	1	21.23	21.31	21.82	22.0
		3	3	21.23	21.48	21.82	22.0
		6	0	19.10	19.95	19.80	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				19965	20175	20385	Tune-up Tolerance
				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.04	23.52	23.81	24.0
		1	8	23.09	23.54	23.74	24.0
		1	14	23.11	23.46	23.84	24.0
		8	0	22.08	22.16	22.32	22.5
		8	4	21.94	22.25	22.33	22.5
		8	7	21.95	22.24	22.45	22.5
		15	0	22.01	22.20	22.31	22.5
	16QAM	1	0	22.94	22.75	22.69	23.0
		1	8	23.06	22.82	22.62	23.5
		1	14	22.95	22.78	22.68	23.0
		8	0	21.29	21.42	21.68	22.0
		8	4	21.29	21.51	21.57	22.0
		8	7	21.10	21.50	21.70	22.0
		15	0	21.15	21.36	21.50	21.5
	64QAM	1	0	21.75	21.09	23.08	23.5
		1	8	21.75	21.17	23.11	23.5
		1	14	21.84	21.11	23.03	23.5
		8	0	19.27	19.69	19.82	20.0
		8	4	19.37	19.77	19.83	20.0
		8	7	19.38	19.77	19.78	20.0
		15	0	19.24	19.76	19.90	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				19975	20175	20375	Tune-up Tolerance
				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.05	23.27	23.60	24.0
		1	12	22.95	23.22	23.56	24.0
		1	24	22.94	23.31	23.58	24.0
		12	0	22.04	22.26	22.34	22.5
		12	7	22.06	22.30	22.39	22.5
		12	13	21.97	22.20	22.27	22.5
		25	0	21.99	22.31	22.33	22.5
	16QAM	1	0	21.74	22.96	22.06	23.0
		1	12	21.69	22.98	22.07	23.0
		1	24	21.67	22.90	22.01	23.0
		12	0	21.03	21.29	21.31	21.5
		12	7	21.07	21.38	21.30	21.5
		12	13	21.07	21.36	21.26	21.5
		25	0	21.12	21.33	21.34	21.5
	64QAM	1	0	20.58	22.42	21.47	22.5
		1	12	20.61	22.45	21.41	22.5
		1	24	20.54	22.47	21.52	22.5
		12	0	19.21	19.53	19.90	20.0
		12	7	19.46	19.76	20.02	20.5
		12	13	19.41	19.67	19.84	20.0
		25	0	19.22	19.61	19.87	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20000	20175	20350	Tune-up Tolerance
				1715	1732.5	1750	
10	QPSK	1	0	23.04	23.31	23.40	23.5
		1	25	23.04	23.38	23.19	23.5
		1	49	23.10	23.32	23.32	23.5
		25	0	21.97	22.29	22.17	22.5
		25	12	21.87	22.30	22.17	22.5
		25	25	21.95	22.33	22.41	22.5
		50	0	21.87	22.34	22.23	22.5
	16QAM	1	0	22.96	22.89	22.78	23.0
		1	25	22.88	23.11	22.58	23.5
		1	49	23.04	23.07	22.73	23.5
		25	0	21.21	21.40	21.32	21.5
		25	12	21.08	21.34	21.55	22.0
		25	25	21.12	21.45	21.58	22.0
		50	0	21.18	21.56	21.39	22.0
	64QAM	1	0	21.80	20.86	21.97	22.0
		1	25	21.70	21.04	21.89	22.0
		1	49	21.80	21.03	21.91	22.0
		25	0	19.53	19.75	20.14	20.5
		25	12	19.72	19.91	20.16	20.5
		25	25	19.96	20.23	20.27	20.5
		50	0	19.71	19.99	20.12	20.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20025	20175	20325	Tune-up Tolerance
				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.03	23.22	23.19	23.5
		1	37	22.99	23.42	23.02	23.5
		1	74	23.17	23.42	23.23	23.5
		36	0	21.95	22.19	22.36	22.5
		36	29	22.02	22.25	22.36	22.5
		36	30	22.03	22.26	22.31	22.5
		75	0	22.00	22.22	22.01	22.5
	16QAM	1	0	22.17	22.99	22.74	23.0
		1	37	22.23	23.05	22.60	23.5
		1	74	22.35	23.08	22.71	23.5
		36	0	21.15	21.42	21.46	21.5
		36	29	21.22	21.61	21.33	22.0
		36	30	21.23	21.45	21.34	21.5
		75	0	21.16	21.37	21.21	21.5
	64QAM	1	0	21.68	21.05	22.28	22.5
		1	37	21.66	21.12	22.02	22.5
		1	74	21.92	21.10	22.36	22.5
		36	0	19.54	19.77	19.83	20.0
		36	29	19.64	19.96	19.80	20.0
		36	30	19.65	19.99	19.82	20.0
		75	0	19.63	19.91	19.86	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20050	20175	20300	Tune-up Tolerance
				1720	1732.5	1745	
20	QPSK	1	0	22.88	23.13	22.97	23.5
		1	49	22.86	23.28	23.20	23.5
		1	99	23.11	23.35	23.13	23.5
		50	0	21.84	22.18	22.49	22.5
		50	24	22.12	22.37	22.50	22.5
		50	50	22.16	22.34	22.24	22.5
		100	0	22.05	22.33	22.49	22.5
	16QAM	1	0	22.71	22.25	23.02	23.5
		1	49	22.70	22.70	23.07	23.5
		1	99	22.90	22.60	23.02	23.5
		50	0	21.21	21.34	21.42	21.5
		50	24	21.22	21.35	21.54	22.0
		50	50	21.25	21.32	21.41	21.5
		100	0	21.06	21.33	21.53	22.0
	64QAM	1	0	21.16	21.79	22.15	22.5
		1	49	21.27	21.93	22.25	22.5
		1	99	21.35	21.99	22.14	22.5
		50	0	19.79	19.92	20.07	20.5
		50	24	19.70	19.91	19.93	20.0
		50	50	20.00	20.31	20.14	20.5
		100	0	19.86	20.09	20.11	20.5

DLCA_4A-5A

Aggregated BW	Modulation	PCC RB Size	SCC RB offset	Conducted power with DL SCC active (dBm)			
				20050	20175	20300	Tune-up
				1720	1732.5	1745	Tolerance
20+20	QPSK	1	0	22.76	23.01	22.85	23.5
		1	49	22.74	23.16	23.08	23.5
		1	99	22.99	23.23	23.01	23.5
		50	0	21.72	22.06	22.37	22.5
		50	24	22.00	22.25	22.38	22.5
		50	50	22.04	22.22	22.12	22.5
		100	0	21.93	22.21	22.37	22.5
	16QAM	1	0	22.59	22.13	22.90	23.0
		1	49	22.58	22.58	22.95	23.0
		1	99	22.78	22.48	22.90	23.0
		50	0	21.09	21.22	21.30	21.5
		50	24	21.10	21.23	21.42	21.5
		50	50	21.13	21.20	21.29	21.5
		100	0	20.94	21.21	21.41	21.5
	64QAM	1	0	21.04	21.67	22.03	22.5
		1	49	21.15	21.81	22.13	22.5
		1	99	21.23	21.87	22.02	22.5
		50	0	19.67	19.80	19.95	20.0
		50	24	19.58	19.79	19.81	20.0
		50	50	19.88	20.19	20.02	20.5
		100	0	19.74	19.97	19.99	20.0

DLCA_4A-7A

Aggregated BW	Modulation	PCC RB Size	PCC RB offset	Conducted power with DL SCC active (dBm)			
				20050	20175	20300	Tune-up
				1720	1732.5	1745	Tolerance
20+20	QPSK	1	0	22.93	23.14	22.98	23.5
		1	49	22.88	23.29	23.22	23.5
		1	99	23.11	23.36	23.15	23.5
		50	0	21.89	22.22	22.52	23.0
		50	24	22.12	22.38	22.52	23.0
		50	50	22.17	22.35	22.28	22.5
		100	0	22.07	22.37	22.51	23.0
	16QAM	1	0	22.71	22.26	23.04	23.5
		1	49	22.74	22.72	23.07	23.5
		1	99	22.92	22.62	23.04	23.5
		50	0	21.24	21.37	21.44	21.5
		50	24	21.25	21.36	21.56	22.0
		50	50	21.28	21.35	21.42	21.5
		100	0	21.09	21.37	21.57	22.0
	64QAM	1	0	21.16	21.83	22.18	22.5
		1	49	21.29	21.97	22.28	22.5
		1	99	21.37	22.00	22.16	22.5
		50	0	19.84	19.94	20.11	20.5
		50	24	19.70	19.92	19.98	20.0
		50	50	20.02	20.33	20.16	20.5
		100	0	19.88	20.12	20.16	20.5

LTE Band 5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20407	20525	20643	Tune-up
				824.7	836.5	848.3	Tolerance
1.4	QPSK	1	0	24.07	23.86	24.23	24.5
		1	3	23.95	23.85	23.91	24.0
		1	5	23.83	23.87	23.81	24.0
		3	0	23.68	23.82	23.86	24.0
		3	1	23.80	23.86	23.87	24.0
		3	3	23.87	23.72	23.87	24.0
		6	0	22.96	22.71	22.96	23.0
	16QAM	1	0	23.07	23.26	23.04	23.5
		1	3	23.12	23.30	23.09	23.5
		1	5	23.10	23.30	23.13	23.5
		3	0	23.20	23.03	22.53	23.5
		3	1	23.31	23.03	22.55	23.5
		3	3	23.16	22.99	22.60	23.5
		6	0	22.14	22.10	22.00	22.5
	64QAM	1	0	22.14	21.63	22.51	23.0
		1	3	22.06	21.60	22.54	23.0
		1	5	22.11	21.57	22.46	22.5
		3	0	22.33	21.67	22.40	22.5
		3	1	22.06	21.70	22.48	22.5
		3	3	22.18	21.65	22.47	22.5
		6	0	19.40	19.67	19.02	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20415	20525	20635	Tune-up Tolerance
				825.5	836.5	847.5	
3	QPSK	1	0	24.08	23.88	24.30	24.5
		1	8	24.16	23.93	24.18	24.5
		1	14	23.80	23.96	24.15	24.5
		8	0	22.85	22.67	22.88	23.0
		8	4	22.90	22.64	22.75	23.0
		8	7	22.73	22.70	22.89	23.0
		15	0	22.88	22.77	22.76	23.0
	16QAM	1	0	23.03	23.24	22.58	23.5
		1	8	22.85	23.28	22.53	23.5
		1	14	22.79	23.25	22.80	23.5
		8	0	22.04	21.83	22.01	22.5
		8	4	21.93	21.85	21.92	22.0
		8	7	21.80	22.04	21.88	22.5
		15	0	22.07	21.86	21.93	22.5
	64QAM	1	0	22.51	21.48	22.83	23.0
		1	8	22.52	21.44	22.87	23.0
		1	14	22.37	21.56	22.69	23.0
		8	0	19.53	19.52	19.31	20.0
		8	4	19.60	19.49	19.18	20.0
		8	7	19.57	19.39	18.99	20.0
		15	0	19.48	19.50	19.13	19.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20425	20525	20625	Tune-up Tolerance
				826.5	836.5	846.5	
5	QPSK	1	0	23.86	23.68	24.05	24.5
		1	12	23.67	23.65	24.08	24.5
		1	24	23.68	23.66	23.98	24.0
		12	0	22.94	22.62	22.79	23.0
		12	7	22.68	22.63	22.89	23.0
		12	13	22.77	22.68	22.90	23.0
		25	0	22.75	22.65	22.73	23.0
	16QAM	1	0	22.79	23.34	22.69	23.5
		1	12	22.54	23.32	22.71	23.5
		1	24	22.37	23.32	22.76	23.5
		12	0	22.03	21.71	21.93	22.5
		12	7	21.87	21.82	21.91	22.0
		12	13	21.88	21.78	21.86	22.0
		25	0	21.89	21.77	21.98	22.0
	64QAM	1	0	21.60	22.97	21.89	23.0
		1	12	21.41	22.91	21.90	23.0
		1	24	21.23	22.87	21.91	23.0
		12	0	19.42	19.40	19.63	20.0
		12	7	19.60	19.43	19.39	20.0
		12	13	19.45	19.17	18.95	19.5
		25	0	19.37	19.31	19.31	19.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20450	20525	20600	Tune-up Tolerance
				829	836.5	844	
10	QPSK	1	0	23.85	24.04	23.68	24.5
		1	25	23.64	23.73	23.70	24.0
		1	49	23.65	23.81	23.81	24.0
		25	0	22.62	22.69	22.64	23.0
		25	12	22.64	22.68	22.64	23.0
		25	25	22.68	22.62	22.71	23.0
		50	0	22.65	22.72	22.73	23.0
	16QAM	1	0	23.05	23.46	22.97	23.5
		1	25	22.79	23.45	23.05	23.5
		1	49	22.80	23.58	23.13	24.0
		25	0	21.82	21.85	22.11	22.5
		25	12	21.87	21.83	22.02	22.5
		25	25	21.70	21.77	21.98	22.0
		50	0	21.88	22.04	21.93	22.5
	64QAM	1	0	22.61	21.47	22.65	23.0
		1	25	22.42	21.54	22.64	23.0
		1	49	22.36	21.59	22.85	23.0
		25	0	19.69	19.75	20.32	20.5
		25	12	19.77	19.60	20.08	20.5
		25	25	19.78	19.52	19.61	20.0
		50	0	19.71	19.64	19.92	20.0

LTE Band 7(full power)

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20775	21100	21425	Tune-up
				2502.5	2535	2567.5	Tolerance
5	QPSK	1	0	23.35	23.52	23.13	24.0
		1	12	23.49	23.45	22.45	23.5
		1	24	23.40	22.66	22.21	23.5
		12	0	22.32	22.58	21.55	23.0
		12	7	22.19	22.47	21.70	22.5
		12	13	22.20	21.70	21.31	22.5
		25	0	22.25	22.54	21.55	23.0
	16QAM	1	0	22.12	22.02	22.25	22.5
		1	12	21.66	22.00	21.66	22.0
		1	24	21.87	21.19	21.33	22.0
		12	0	20.72	20.92	19.88	21.0
		12	7	21.04	20.91	20.11	21.5
		12	13	21.06	19.99	20.00	21.5
		25	0	21.10	21.16	20.17	21.5
	64QAM	1	0	20.89	20.77	20.83	21.0
		1	12	21.22	20.55	20.42	21.5
		1	24	20.75	19.63	20.52	21.0
		12	0	18.53	17.63	17.95	19.0
		12	7	18.92	17.90	18.15	19.0
		12	13	18.96	17.83	18.02	19.0
		25	0	18.77	17.67	18.02	19.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20800	21100	21400	Tune-up Tolerance
				2505	2535	2565	
10	QPSK	1	0	23.51	23.66	22.90	24.0
		1	25	23.20	23.76	23.33	24.0
		1	49	23.17	22.08	22.51	23.5
		25	0	22.16	22.45	22.08	22.5
		25	12	22.11	22.46	22.26	22.5
		25	25	22.20	21.66	21.63	22.5
		50	0	22.19	22.55	22.32	23.0
	16QAM	1	0	22.40	23.01	21.70	23.5
		1	25	23.03	23.02	21.85	23.5
		1	49	22.97	21.40	20.98	23.0
		25	0	21.22	21.16	20.51	21.5
		25	12	20.74	21.14	20.77	21.5
		25	25	20.61	20.21	20.24	21.0
		50	0	20.73	21.15	20.82	21.5
	64QAM	1	0	21.44	21.21	21.10	21.5
		1	25	21.26	20.80	21.57	22.0
		1	49	21.11	19.13	21.02	21.5
		25	0	18.09	17.65	18.25	18.5
		25	12	18.43	17.92	18.30	18.5
		25	25	18.97	18.26	18.48	19.0
		50	0	18.49	17.98	18.31	18.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20825	21100	21375	Tune-up Tolerance
				2507.5	2535	2562.5	
15	QPSK	1	0	23.45	23.58	22.49	24.0
		1	37	23.35	23.72	22.98	24.0
		1	74	23.24	21.70	22.12	23.5
		36	0	22.17	22.49	21.79	22.5
		36	29	22.06	21.78	22.29	22.5
		36	30	22.08	21.63	22.29	22.5
		75	0	22.08	22.52	22.10	23.0
	16QAM	1	0	23.27	22.98	21.67	23.5
		1	37	23.12	23.14	22.08	23.5
		1	74	22.26	21.14	21.34	22.5
		36	0	20.79	21.53	20.27	22.0
		36	29	20.71	20.35	20.78	21.0
		36	30	20.74	20.18	20.82	21.0
		75	0	20.73	21.15	20.47	21.5
	64QAM	1	0	21.42	20.70	21.21	21.5
		1	37	21.14	20.81	21.52	22.0
		1	74	21.03	18.92	21.21	21.5
		36	0	18.25	17.72	18.65	19.0
		36	29	18.89	18.05	18.38	19.0
		36	30	18.93	18.08	18.40	19.0
		75	0	18.70	17.97	18.58	19.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20850	21100	21350	Tune-up Tolerance
				2510	2535	2560	
20	QPSK	1	0	23.68	23.68	22.32	24.0
		1	49	23.20	23.77	22.60	24.0
		1	99	23.49	22.13	22.48	23.5
		50	0	22.28	22.82	21.89	23.0
		50	24	22.42	22.82	22.11	23.0
		50	50	22.46	21.27	22.52	23.0
		100	0	22.46	22.93	22.14	23.0
	16QAM	1	0	22.36	22.39	21.99	22.5
		1	49	22.01	22.67	22.45	23.0
		1	99	22.19	20.75	22.00	22.5
		50	0	20.89	21.54	20.03	22.0
		50	24	20.73	21.19	20.22	21.5
		50	50	20.59	19.53	20.80	21.0
		100	0	20.63	21.06	20.33	21.5
	64QAM	1	0	21.36	21.56	21.17	22.0
		1	49	21.14	21.88	21.60	22.0
		1	99	21.08	19.94	21.58	22.0
		50	0	18.19	17.85	19.15	19.5
		50	24	18.48	17.91	18.69	19.0
		50	50	18.75	18.46	18.66	19.0
		100	0	18.47	18.16	18.95	19.0

LTE Band 7(reduce power)

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20775	21100	21425	Tune-up
				2502.5	2535	2567.5	Tolerance
5	QPSK	1	0	17.41	17.83	18.60	19.0
		1	12	17.55	17.76	17.92	18.0
		1	24	17.46	16.97	17.68	18.0
		12	0	16.38	16.89	17.02	17.5
		12	7	16.25	16.78	17.17	17.5
		12	13	16.26	16.01	16.78	17.0
		25	0	16.31	16.85	17.02	17.5
	16QAM	1	0	16.18	16.33	17.72	18.0
		1	12	15.72	16.31	17.13	17.5
		1	24	15.93	15.50	16.80	17.0
		12	0	14.78	15.23	15.35	15.5
		12	7	15.10	15.22	15.58	16.0
		12	13	15.12	14.30	15.47	15.5
		25	0	15.16	15.47	15.64	16.0
	64QAM	1	0	14.95	15.08	16.30	16.5
		1	12	15.28	14.86	15.89	16.0
		1	24	14.81	13.94	15.99	16.0
		12	0	12.59	11.94	13.42	13.5
		12	7	12.98	12.21	13.62	14.0
		12	13	13.02	12.14	13.49	13.5
		25	0	12.83	11.98	13.49	13.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20800	21100	21400	Tune-up Tolerance
				2505	2535	2565	
10	QPSK	1	0	17.57	17.97	18.37	18.5
		1	25	17.26	18.07	18.80	19.0
		1	49	17.23	16.39	17.98	18.0
		25	0	16.22	16.76	17.55	18.0
		25	12	16.17	16.77	17.73	18.0
		25	25	16.26	15.97	17.10	17.5
		50	0	16.25	16.86	17.79	18.0
	16QAM	1	0	16.46	17.32	17.17	17.5
		1	25	17.09	17.33	17.32	17.5
		1	49	17.03	15.71	16.45	17.5
		25	0	15.28	15.47	15.98	16.0
		25	12	14.80	15.45	16.24	16.5
		25	25	14.67	14.52	15.71	16.0
		50	0	14.79	15.46	16.29	16.5
	64QAM	1	0	15.50	15.52	16.57	17.0
		1	25	15.32	15.11	17.04	17.5
		1	49	15.17	13.44	16.49	16.5
		25	0	12.15	11.96	13.72	14.0
		25	12	12.49	12.23	13.77	14.0
		25	25	13.03	12.57	13.95	14.0
		50	0	12.55	12.29	13.78	14.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20825	21100	21375	Tune-up Tolerance
				2507.5	2535	2562.5	
15	QPSK	1	0	17.51	17.89	17.96	18.0
		1	37	17.41	18.03	18.45	18.5
		1	74	17.30	16.01	17.59	18.0
		36	0	16.23	16.80	17.26	17.5
		36	29	16.12	16.09	17.76	18.0
		36	30	16.14	15.94	17.76	18.0
		75	0	16.14	16.83	17.57	18.0
	16QAM	1	0	17.33	17.29	17.14	17.5
		1	37	17.18	17.45	17.55	18.0
		1	74	16.32	15.45	16.81	17.0
		36	0	14.85	15.84	15.74	16.0
		36	29	14.77	14.66	16.25	16.5
		36	30	14.80	14.49	16.29	16.5
		75	0	14.79	15.46	15.94	16.0
	64QAM	1	0	15.48	15.01	16.68	17.0
		1	37	15.20	15.12	16.99	17.0
		1	74	15.09	13.23	16.68	17.0
		36	0	12.31	12.03	14.12	14.5
		36	29	12.95	12.36	13.85	14.0
		36	30	12.99	12.39	13.87	14.0
		75	0	12.76	12.28	14.05	14.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				20850	21100	21350	Tune-up Tolerance
				2510	2535	2560	
20	QPSK	1	0	18.04	18.29	18.09	18.5
		1	49	17.87	18.11	18.15	18.5
		1	99	18.00	17.19	18.40	18.5
		50	0	16.63	17.17	16.24	17.5
		50	24	16.77	17.17	16.46	17.5
		50	50	16.81	15.62	16.87	17.0
		100	0	16.81	17.28	16.49	17.5
	16QAM	1	0	16.42	16.70	17.46	17.5
		1	49	16.07	16.98	17.92	18.0
		1	99	16.25	15.06	17.47	17.5
		50	0	14.95	15.85	15.50	16.0
		50	24	14.79	15.50	15.69	16.0
		50	50	14.65	13.84	16.27	16.5
		100	0	14.69	15.37	15.80	16.0
	64QAM	1	0	15.42	15.87	16.64	17.0
		1	49	15.20	16.19	17.07	17.5
		1	99	15.14	14.25	17.05	17.5
		50	0	12.25	12.16	14.62	15.0
		50	24	12.54	12.22	14.16	14.5
		50	50	12.81	12.77	14.13	14.5
		100	0	12.53	12.47	14.42	14.5

LTE Band 7C(full power)

Aggregated BW	Modulation	PCC	SCC	Total Conducted power(dBm)			
				Range			Tune-up Tolerance
				Low	Mid	High	
10+20	QPSK	1@49	0@0	23.64	23.87	22.51	24.0
		1@49	1@0	22.88	22.75	21.49	23.0
		25@25	50@0	21.02	21.65	20.53	22.0
		50@0	100@0	19.89	19.98	18.04	20.0
20+10		1@99	0@0	23.75	23.94	22.46	24.0
		1@99	1@0	22.72	22.68	21.51	23.0
		50@50	25@0	20.96	21.50	20.47	21.5
		100@0	50@0	19.86	20.14	18.08	20.5
15+10		1@74	0@0	23.66	23.93	22.64	24.0
		1@74	1@0	22.75	22.72	21.45	23.0
		37@38	25@0	21.02	21.51	20.53	22.0
		75@0	50@0	19.87	19.96	18.01	20.0
15+15		1@74	0@0	23.81	23.95	22.59	24.0
		1@74	1@0	22.72	22.66	21.44	23.0
		37@38	37@0	21.09	21.63	20.58	22.0
		75@0	75@0	19.78	19.96	18.05	20.0
15+20		1@74	0@0	23.71	23.92	22.58	24.0
		1@74	1@0	22.90	22.62	21.49	23.0
		37@38	50@0	21.05	21.56	20.64	22.0
		75@0	100@0	19.84	20.03	17.94	20.5
20+15		1@99	0@0	23.63	23.85	22.54	24.0
		1@99	1@0	22.81	22.60	21.31	23.0
		50@50	37@0	21.11	21.68	20.64	22.0
		100@0	75@0	19.85	20.08	17.94	20.5
20+20		1@99	0@0	23.81	23.96	22.65	24.0
		1@99	1@0	22.90	22.76	21.51	23.0
		50@50	50@0	21.15	21.68	20.65	22.0
		100@0	100@0	19.94	20.15	19.09	20.5

LTE Band 7C(reduce power)

Aggregated BW	Modulation	PCC	SCC	Total Conducted power(dBm)			
				Range			Tune-up Tolerance
				Low	Mid	High	
10+20	QPSK	1@49	0@0	17.70	18.18	17.98	18.5
		1@49	1@0	16.94	17.06	16.96	17.5
		25@25	50@0	15.08	15.96	16.00	16.0
		50@0	100@0	13.95	14.29	13.51	14.5
20+10		1@99	0@0	17.81	18.25	17.93	18.5
		1@99	1@0	16.78	16.99	16.98	17.0
		50@50	25@0	15.02	15.81	15.94	16.0
		100@0	50@0	13.92	14.45	13.55	14.5
15+10		1@74	0@0	17.72	18.24	18.11	18.5
		1@74	1@0	16.81	17.03	16.92	17.5
		37@38	25@0	15.08	15.82	16.00	16.0
		75@0	50@0	13.93	14.27	13.48	14.5
15+15		1@74	0@0	17.87	18.26	18.06	18.5
		1@74	1@0	16.78	16.97	16.91	17.0
		37@38	37@0	15.15	15.94	16.05	16.5
		75@0	75@0	13.84	14.27	13.52	14.5
15+20		1@74	0@0	17.77	18.23	18.05	18.5
		1@74	1@0	16.96	16.93	16.96	17.0
		37@38	50@0	15.11	15.87	16.11	16.5
		75@0	100@0	13.90	14.34	13.41	14.5
20+15		1@99	0@0	17.69	18.16	18.01	18.5
		1@99	1@0	16.87	16.91	16.78	17.0
		50@50	37@0	15.17	15.99	16.11	16.5
		100@0	75@0	13.91	14.39	13.41	14.5
20+20		1@99	0@0	17.87	18.27	18.12	18.5
		1@99	1@0	16.96	17.07	16.98	17.5
		50@50	50@0	15.21	15.99	16.12	16.5
		100@0	100@0	14.00	14.46	13.56	14.5

DLCA_7C

Aggregated BW	Modulation	PCC RB Size	PCC RB offset	Conducted power with DL SCC active (dBm)			
				20850	21100	21350	Tune-up
				2510	2535	2560	Tolerance
20+20	QPSK	1	0	23.43	23.44	22.04	23.5
		1	49	23.24	23.78	22.63	24.0
		1	99	23.20	21.88	22.22	23.5
		50	0	22.02	22.52	21.63	23.0
		50	24	22.12	22.53	21.85	23.0
		50	50	22.20	20.98	22.24	22.5
		100	0	22.19	22.66	21.84	23.0
	16QAM	1	0	22.38	22.41	22.04	22.5
		1	49	22.02	22.68	22.50	23.0
		1	99	22.20	20.78	22.02	22.5
		50	0	20.94	21.57	20.05	22.0
		50	24	20.73	21.19	20.27	21.5
		50	50	20.62	19.54	20.81	21.0
		100	0	20.67	21.09	20.35	21.5
	64QAM	1	0	21.38	21.57	21.19	22.0
		1	49	21.18	21.89	21.62	22.0
		1	99	21.12	19.96	21.63	22.0
		50	0	18.23	17.86	19.18	19.5
		50	24	18.48	17.95	18.71	19.0
		50	50	18.78	18.50	18.68	19.0
		100	0	18.50	18.19	18.97	19.0

DLCA_7A-5A

Aggregated BW	Modulation	PCC RB Size	SCC RB offset	Conducted power with DL SCC active (dBm)			
				20850	21100	21350	Tune-up
				2510	2535	2560	Tolerance
20+20	QPSK	1	0	22.48	22.48	21.12	22.5
		1	49	22.00	22.57	21.40	23.0
		1	99	22.29	20.93	21.28	22.5
		50	0	21.08	21.62	20.69	22.0
		50	24	21.22	21.62	20.91	22.0
		50	50	21.26	20.07	21.32	21.5
		100	0	21.26	21.73	20.94	22.0
	16QAM	1	0	21.16	21.19	20.79	21.5
		1	49	20.81	21.47	21.25	21.5
		1	99	20.99	19.55	20.80	21.0
		50	0	19.69	20.34	18.83	20.5
		50	24	19.53	19.99	19.02	20.0
		50	50	19.39	18.33	19.60	20.0
		100	0	19.43	19.86	19.13	20.0
	64QAM	1	0	20.16	20.36	19.97	20.5
		1	49	19.94	20.68	20.40	21.0
		1	99	19.88	18.74	20.38	20.5
		50	0	16.99	16.65	17.95	18.0
		50	24	17.28	16.71	17.49	17.5
		50	50	17.55	17.26	17.46	18.0
		100	0	17.27	16.96	17.75	18.0

DLCA_7A-28A

Aggregated BW	Modulation	PCC RB Size	SCC RB offset	Conducted power with DL SCC active (dBm)			
				20850	21100	21350	Tune-up
				2510	2535	2560	Tolerance
20+20	QPSK	1	0	22.18	22.18	20.82	22.5
		1	49	21.70	22.27	21.10	22.5
		1	99	21.99	20.63	20.98	22.0
		50	0	20.78	21.32	20.39	21.5
		50	24	20.92	21.32	20.61	21.5
		50	50	20.96	19.77	21.02	21.5
		100	0	20.96	21.43	20.64	21.5
	16QAM	1	0	20.86	20.89	20.49	21.0
		1	49	20.51	21.17	20.95	21.5
		1	99	20.69	19.25	20.50	21.0
		50	0	19.39	20.04	18.53	20.5
		50	24	19.23	19.69	18.72	20.0
		50	50	19.09	18.03	19.30	19.5
		100	0	19.13	19.56	18.83	20.0
	64QAM	1	0	19.86	20.06	19.67	20.5
		1	49	19.64	20.38	20.10	20.5
		1	99	19.58	18.44	20.08	20.5
		50	0	16.69	16.35	17.65	18.0
		50	24	16.98	16.41	17.19	17.5
		50	50	17.25	16.96	17.16	17.5
		100	0	16.97	16.66	17.45	17.5

LTE Band 12

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				23017	23095	23173	Tune-up Tolerance
				699.7	707.5	715.3	
1.4	QPSK	1	0	23.72	23.98	24.10	24.5
		1	3	23.67	23.84	23.77	24.0
		1	5	23.68	23.89	23.77	24.0
		3	0	23.67	23.68	23.75	24.0
		3	1	23.72	23.77	23.76	24.0
		3	3	23.71	23.77	23.73	24.0
		6	0	22.77	22.77	22.68	23.0
	16QAM	1	0	22.94	23.39	23.15	23.5
		1	3	23.00	23.22	23.18	23.5
		1	5	23.00	23.29	23.22	23.5
		3	0	23.06	22.98	22.45	23.5
		3	1	23.03	22.92	22.47	23.5
		3	3	23.05	22.93	22.55	23.5
		6	0	21.98	22.15	21.94	22.5
	64QAM	1	0	21.92	21.59	22.40	22.5
		1	3	21.97	21.56	22.45	22.5
		1	5	21.90	21.61	22.39	22.5
		3	0	21.94	21.51	22.39	22.5
		3	1	22.01	21.61	22.46	22.5
		3	3	21.92	21.63	22.34	22.5
		6	0	20.05	20.60	19.43	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				23025	23095	23165	Tune-up Tolerance
				700.5	707.5	714.5	
3	QPSK	1	0	23.88	23.97	24.06	24.5
		1	8	23.93	23.92	24.01	24.5
		1	14	23.92	23.87	24.06	24.5
		8	0	22.74	22.69	22.81	23.0
		8	4	22.82	22.68	22.75	23.0
		8	7	22.71	22.75	22.85	23.0
		15	0	22.73	22.63	22.80	23.0
	16QAM	1	0	23.77	23.41	22.61	24.0
		1	8	22.93	23.33	22.59	23.5
		1	14	22.93	23.23	22.62	23.5
		8	0	21.87	21.81	21.81	22.0
		8	4	21.60	21.87	21.88	22.0
		8	7	21.91	21.80	21.86	22.0
		15	0	21.87	21.98	21.80	22.0
	64QAM	1	0	22.41	21.56	22.79	23.0
		1	8	22.39	21.52	22.72	23.0
		1	14	22.35	21.59	22.70	23.0
		8	0	20.17	20.24	19.84	20.5
		8	4	20.27	20.41	19.64	20.5
		8	7	20.16	20.47	19.45	20.5
		15	0	20.08	20.40	19.75	20.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				23035	23095	23155	Tune-up Tolerance
				701.5	707.5	713.5	
5	QPSK	1	0	23.86	23.73	23.93	24.0
		1	12	23.80	23.67	24.05	24.5
		1	24	23.84	23.74	24.00	24.0
		12	0	22.60	22.83	22.80	23.0
		12	7	22.78	22.69	22.83	23.0
		12	13	22.64	22.74	22.78	23.0
		25	0	22.74	22.73	22.81	23.0
	16QAM	1	0	22.32	22.73	22.70	23.0
		1	12	22.24	22.81	22.65	23.0
		1	24	22.27	22.76	22.66	23.0
		12	0	21.85	21.63	21.81	22.0
		12	7	21.84	21.70	21.87	22.0
		12	13	21.82	21.73	21.72	22.0
		25	0	21.83	21.72	21.92	22.0
	64QAM	1	0	21.47	22.90	21.83	23.0
		1	12	21.36	22.84	21.86	23.0
		1	24	21.45	22.91	21.89	23.0
		12	0	20.03	20.04	19.97	20.5
		12	7	20.06	20.35	19.88	20.5
		12	13	19.64	20.40	19.38	20.5
		25	0	19.77	20.24	19.70	20.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				23060	23095	23130	Tune-up Tolerance
				704	707.5	711	
10	QPSK	1	0	23.94	24.03	23.63	24.5
		1	25	23.99	23.89	23.47	24.0
		1	49	23.85	23.88	23.87	24.0
		25	0	22.75	22.84	22.72	23.0
		25	12	22.86	22.72	22.70	23.0
		25	25	22.73	22.63	22.81	23.0
		50	0	22.89	22.71	22.60	23.0
	16QAM	1	0	23.68	23.55	23.28	24.0
		1	25	23.68	23.30	23.14	24.0
		1	49	23.69	23.35	23.23	24.0
		25	0	22.05	21.92	21.95	22.5
		25	12	21.92	21.92	21.87	22.0
		25	25	21.88	21.95	21.92	22.0
		50	0	21.90	21.70	21.78	22.0
	64QAM	1	0	22.37	21.61	22.22	22.5
		1	25	22.52	21.59	22.23	23.0
		1	49	22.32	21.59	22.42	22.5
		25	0	20.93	20.38	19.39	21.0
		25	12	20.63	20.52	19.96	21.0
		25	25	20.62	21.15	20.09	21.5
		50	0	20.74	20.78	19.69	21.0

LTE Band 13

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				23205	23230	23255	Tune-up Tolerance
				779.5	782	784.5	
5	QPSK	1	0	23.79	23.80	23.87	24.0
		1	12	23.64	23.69	23.94	24.0
		1	24	23.61	23.76	23.91	24.0
		12	0	22.82	22.73	22.81	23.0
		12	7	22.74	22.69	22.70	23.0
		12	13	22.78	22.67	22.77	23.0
		25	0	22.69	22.56	22.64	23.0
	16QAM	1	0	22.52	22.85	22.54	23.0
		1	12	22.46	22.72	22.52	23.0
		1	24	22.39	22.72	22.53	23.0
		12	0	21.98	21.87	21.79	22.0
		12	7	22.19	21.92	21.71	22.5
		12	13	22.13	21.49	21.83	22.5
		25	0	22.13	22.05	21.82	22.5
	64QAM	1	0	21.51	23.29	22.02	23.5
		1	12	21.69	23.18	21.40	23.5
		1	24	21.61	22.76	21.86	23.0
		12	0	19.51	19.97	19.62	20.0
		12	7	20.00	19.97	19.54	20.0
		12	13	19.90	19.61	19.30	20.0
		25	0	19.65	19.82	19.47	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)	
				23230	Tune-up Tolerance
				782	
10	QPSK	1	0	23.81	24.0
		1	25	23.62	24.0
		1	49	23.70	24.0
		25	0	22.72	23.0
		25	12	22.72	23.0
		25	25	22.66	23.0
		50	0	22.66	23.0
	16QAM	1	0	22.96	24.0
		1	25	22.85	24.0
		1	49	22.90	24.0
		25	0	22.13	22.5
		25	12	22.07	22.5
		25	25	21.75	22.0
		50	0	22.16	22.5
	64QAM	1	0	22.55	23.0
		1	25	22.75	23.0
		1	49	22.37	22.5
		25	0	20.02	20.5
		25	12	20.09	20.5
		25	25	19.84	20.0
		50	0	19.91	20.0

LTE Band 28

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				27225	27375	27645	Tune-up Tolerance
				704.5	719.5	746.5	
3	QPSK	1	0	23.91	24.15	24.24	24.5
		1	8	23.92	24.19	24.20	24.5
		1	14	23.87	24.30	24.21	24.5
		8	0	22.84	22.94	22.91	23.0
		8	4	22.72	23.05	22.86	23.5
		8	7	22.75	22.97	22.86	23.0
		15	0	22.83	23.10	22.83	23.5
	16QAM	1	0	23.87	23.41	22.97	24.0
		1	8	23.79	23.53	22.88	24.0
		1	14	23.79	23.52	22.87	24.0
		8	0	22.20	22.12	22.00	22.5
		8	4	22.19	22.27	21.85	22.5
		8	7	22.55	22.18	22.15	23.0
		15	0	22.04	22.23	21.96	22.5
	64QAM	1	0	22.62	21.86	22.98	23.0
		1	8	22.47	21.97	22.88	23.0
		1	14	22.84	21.85	22.86	23.0
		8	0	20.43	20.33	20.69	21.0
		8	4	20.58	20.62	20.81	21.0
		8	7	20.63	20.70	20.81	21.0
		15	0	20.45	20.55	20.86	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				27235	27385	27635	Tune-up Tolerance
				705.5	720.5	745.5	
5	QPSK	1	0	23.76	23.96	24.12	24.5
		1	12	23.77	24.02	24.08	24.5
		1	24	23.70	24.03	23.97	24.5
		12	0	22.79	23.14	22.98	23.5
		12	7	22.86	23.01	22.98	23.5
		12	13	22.75	23.12	22.92	23.5
		25	0	22.71	23.14	22.88	23.5
	16QAM	1	0	22.60	22.99	23.36	23.5
		1	12	22.42	23.24	23.29	23.5
		1	24	22.36	23.18	23.27	23.5
		12	0	21.93	21.86	21.90	22.0
		12	7	22.28	22.02	21.90	22.5
		12	13	22.18	22.01	21.84	22.5
		25	0	22.43	22.16	22.19	22.5
	64QAM	1	0	21.54	22.19	22.06	22.5
		1	12	21.88	22.23	21.98	22.5
		1	24	21.43	22.31	21.96	22.5
		12	0	20.33	20.33	20.67	21.0
		12	7	20.71	20.82	20.83	21.0
		12	13	20.75	20.94	20.78	21.0
		25	0	20.46	20.66	20.73	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				27260	27410	27610	Tune-up Tolerance
				708	723	743	
10	QPSK	1	0	23.78	24.01	23.75	24.5
		1	25	23.77	24.08	23.93	24.5
		1	49	23.74	24.06	23.88	24.5
		25	0	22.83	23.05	22.69	23.5
		25	12	22.75	22.97	23.01	23.5
		25	25	22.64	23.02	22.94	23.5
		50	0	22.66	23.03	23.04	23.5
	16QAM	1	0	22.99	23.77	22.90	24.0
		1	25	22.96	23.81	22.92	24.0
		1	49	22.96	23.58	22.88	24.0
		25	0	22.16	22.26	21.88	22.5
		25	12	21.84	22.14	22.14	22.5
		25	25	22.18	22.04	22.08	22.5
		50	0	21.76	22.28	22.18	22.5
	64QAM	1	0	22.45	21.69	23.67	24.0
		1	25	22.45	21.90	23.69	24.0
		1	49	22.44	21.66	23.49	23.5
		25	0	20.46	20.72	21.65	22.0
		25	12	20.86	21.19	21.21	21.5
		25	25	21.03	21.38	21.15	21.5
		50	0	20.72	21.06	21.34	21.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				27285	27435	27585	Tune-up Tolerance
				710.5	725.5	740.5	
15	QPSK	1	0	23.84	24.01	23.75	24.5
		1	37	23.80	24.08	23.49	24.5
		1	74	24.02	23.94	23.71	24.5
		36	0	22.77	23.09	22.79	23.5
		36	29	22.73	22.90	23.06	23.5
		36	30	22.72	22.88	23.03	23.5
		75	0	22.72	23.01	22.67	23.5
	16QAM	1	0	23.89	23.38	23.29	24.0
		1	37	23.70	23.43	22.99	24.0
		1	74	24.07	23.31	23.30	24.5
		36	0	21.88	22.19	22.26	22.5
		36	29	21.85	22.20	22.18	22.5
		36	30	21.85	22.10	22.15	22.5
		75	0	22.33	22.18	21.73	22.5
	64QAM	1	0	22.55	21.56	23.21	23.5
		1	37	22.78	21.55	22.96	23.0
		1	74	22.71	21.50	23.13	23.5
		36	0	20.65	21.26	21.10	21.5
		36	29	20.65	20.80	20.28	21.0
		36	30	20.65	20.79	20.27	21.0
		75	0	20.64	21.03	20.67	21.5

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				27310	27460	27560	Tune-up Tolerance
				713	728	738	
20	QPSK	1	0	23.85	24.12	23.61	24.5
		1	49	23.58	24.04	23.41	24.5
		1	99	23.94	23.75	23.58	24.0
		50	0	22.72	23.06	22.88	23.5
		50	24	22.80	22.94	22.76	23.0
		50	50	22.96	23.02	23.02	23.5
		100	0	22.64	22.89	22.78	23.0
	16QAM	1	0	23.09	23.06	23.65	24.0
		1	49	22.72	22.91	23.40	23.5
		1	99	23.23	22.97	23.49	23.5
		50	0	21.96	22.25	22.06	22.5
		50	24	21.96	22.17	22.16	22.5
		50	50	22.09	23.54	22.01	24.0
		100	0	21.64	22.11	22.14	22.5
	64QAM	1	0	23.04	22.75	22.80	23.5
		1	49	22.81	22.70	22.94	23.0
		1	99	23.25	22.74	22.71	23.5
		50	0	21.50	21.21	20.72	21.5
		50	24	21.31	20.76	20.93	21.5
		50	50	21.67	21.46	20.54	22.0
		100	0	21.56	21.31	20.65	22.0

LTE Band 38

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				37775	38000	38225	Tune-up Tolerance
				2572.5	2595	2617.5	
5	QPSK	1	0	22.97	23.16	23.15	23.5
		1	12	23.00	23.26	23.17	23.5
		1	24	23.16	23.16	23.22	23.5
		12	0	22.53	22.85	22.74	23.0
		12	7	22.53	22.73	22.81	23.0
		12	13	22.59	22.69	22.75	23.0
		25	0	22.56	22.69	22.83	23.0
	16QAM	1	0	22.74	22.68	22.85	23.0
		1	12	22.92	22.69	22.83	23.0
		1	24	22.88	22.62	22.95	23.0
		12	0	21.90	22.52	22.39	23.0
		12	7	21.99	22.37	22.29	22.5
		12	13	21.97	22.42	22.39	22.5
		25	0	22.23	22.54	22.51	23.0
	64QAM	1	0	21.73	22.32	22.34	22.5
		1	12	21.63	22.42	22.45	22.5
		1	24	21.73	22.29	22.40	22.5
		12	0	20.67	20.64	20.55	21.0
		12	7	20.71	20.68	20.63	21.0
		12	13	20.61	20.56	20.59	21.0
		25	0	20.68	20.75	20.98	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				37800	38000	38200	Tune-up Tolerance
				2575	2595	2615	
10	QPSK	1	0	22.97	23.19	23.20	23.5
		1	25	23.07	23.16	23.13	23.5
		1	49	23.06	23.18	23.13	23.5
		25	0	22.31	22.69	22.76	23.0
		25	12	22.45	22.82	22.68	23.0
		25	25	22.41	22.74	22.71	23.0
		50	0	22.52	22.83	22.73	23.0
	16QAM	1	0	23.19	23.47	22.77	23.5
		1	25	22.97	23.54	22.72	24.0
		1	49	23.08	23.51	22.73	24.0
		25	0	22.02	22.17	22.38	22.5
		25	12	22.15	22.31	22.31	22.5
		25	25	22.05	22.15	22.34	22.5
		50	0	22.13	22.42	22.22	22.5
	64QAM	1	0	22.79	22.07	22.53	23.0
		1	25	22.75	22.25	22.49	23.0
		1	49	22.66	22.14	22.42	23.0
		25	0	20.36	20.54	20.87	21.0
		25	12	20.40	20.63	20.83	21.0
		25	25	20.26	20.63	20.86	21.0
		50	0	20.75	20.73	20.88	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				37825	38000	38175	Tune-up Tolerance
				2577.5	2595	2612.5	
15	QPSK	1	0	22.92	23.03	23.33	23.5
		1	37	22.94	23.19	23.41	23.5
		1	74	23.07	23.19	23.43	23.5
		36	0	22.57	22.61	22.85	23.0
		36	29	22.58	22.66	22.68	23.0
		36	30	22.59	22.67	22.67	23.0
		75	0	22.53	22.82	22.76	23.0
	16QAM	1	0	23.16	23.31	22.43	23.5
		1	37	23.01	23.51	22.48	24.0
		1	74	23.11	23.43	22.42	23.5
		36	0	22.02	22.18	22.30	22.5
		36	29	22.07	22.28	22.18	22.5
		36	30	22.09	22.19	22.17	22.5
		75	0	22.15	22.31	22.28	22.5
	64QAM	1	0	22.75	21.74	22.50	23.0
		1	37	22.63	21.93	22.51	23.0
		1	74	22.91	22.14	22.43	23.0
		36	0	20.62	20.73	20.79	21.0
		36	29	20.71	20.75	20.79	21.0
		36	30	20.62	20.77	20.79	21.0
		75	0	20.50	20.81	20.86	21.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				37850	38000	38150	Tune-up Tolerance
				2580	2595	2610	
20	QPSK	1	0	22.97	23.25	23.32	23.5
		1	49	23.01	23.48	23.30	23.5
		1	99	22.95	23.46	23.29	23.5
		50	0	22.50	22.78	22.62	23.0
		50	24	22.51	22.82	22.88	23.0
		50	50	22.51	22.80	22.76	23.0
		100	0	22.55	22.79	22.92	23.0
	16QAM	1	0	22.65	22.61	22.48	23.0
		1	49	22.75	22.82	22.47	23.0
		1	99	22.91	22.75	22.34	23.0
		50	0	22.11	22.36	22.24	22.5
		50	24	22.20	22.29	22.40	22.5
		50	50	22.16	22.34	22.39	22.5
		100	0	22.17	22.33	22.41	22.5
	64QAM	1	0	22.51	22.53	22.44	23.0
		1	49	22.45	22.74	22.38	23.0
		1	99	22.70	22.56	22.51	23.0
		50	0	20.60	20.74	20.95	21.0
		50	24	20.69	20.74	21.00	21.0
		50	50	20.68	20.74	20.94	21.0
		100	0	20.63	20.74	20.76	21.0

LTE Band 66

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				131979	132422	132665	Tune-up Tolerance
				1710.7	1755	1779.3	
1.4	QPSK	1	0	22.78	23.56	23.33	24.0
		1	3	22.79	23.38	23.14	23.5
		1	5	22.83	23.41	23.12	23.5
		3	0	22.90	23.28	23.39	23.5
		3	1	22.94	23.32	23.41	23.5
		3	3	23.04	23.34	23.30	23.5
		6	0	21.89	22.34	22.36	22.5
	16QAM	1	0	22.16	22.99	22.42	23.0
		1	3	22.26	22.98	22.54	23.0
		1	5	22.30	23.00	22.48	23.0
		3	0	22.25	22.52	22.60	23.0
		3	1	22.20	22.40	22.65	23.0
		3	3	22.16	22.51	22.57	23.0
		6	0	21.20	21.81	21.99	22.0
	64QAM	1	0	21.13	21.98	21.86	22.0
		1	3	21.04	21.98	21.82	22.0
		1	5	21.19	21.95	21.82	22.0
		3	0	21.28	21.71	21.99	22.0
		3	1	21.24	21.86	22.03	22.5
		3	3	21.25	21.88	21.93	22.0
		6	0	18.85	19.51	19.17	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				131987	132422	132657	Tune-up Tolerance
				1711.5	1755	1778.5	
3	QPSK	1	0	23.07	23.43	23.53	24.0
		1	8	23.04	23.40	23.53	24.0
		1	14	23.13	23.46	23.45	23.5
		8	0	21.95	22.38	22.37	22.5
		8	4	22.03	22.39	22.36	22.5
		8	7	22.05	22.34	22.28	22.5
		15	0	21.96	22.35	22.30	22.5
	16QAM	1	0	22.76	22.73	22.89	23.0
		1	8	22.76	22.68	22.79	23.0
		1	14	22.72	22.75	22.82	23.0
		8	0	21.09	21.82	21.88	22.0
		8	4	21.12	21.90	21.91	22.0
		8	7	21.05	21.86	21.86	22.0
		15	0	21.24	21.77	21.65	22.0
	64QAM	1	0	20.77	21.16	21.63	22.0
		1	8	20.79	21.24	21.59	22.0
		1	14	20.77	21.21	21.59	22.0
		8	0	19.06	19.60	19.31	20.0
		8	4	19.17	19.62	19.33	20.0
		8	7	19.18	19.57	19.28	20.0
		15	0	19.15	19.61	19.32	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				131997	132422	132647	Tune-up Tolerance
				1712.5	1755	1777.5	
5	QPSK	1	0	23.17	23.31	23.40	23.5
		1	12	23.13	23.38	23.35	23.5
		1	24	23.13	23.38	23.29	23.5
		12	0	22.02	22.34	22.36	22.5
		12	7	22.03	22.44	22.42	22.5
		12	13	21.94	22.28	22.32	22.5
		25	0	21.98	22.46	22.31	22.5
	16QAM	1	0	21.86	23.05	23.14	23.5
		1	12	21.71	22.86	22.99	23.0
		1	24	21.82	23.00	22.96	23.0
		12	0	21.08	21.87	21.65	22.0
		12	7	20.98	21.72	21.62	22.0
		12	13	21.00	21.86	21.51	22.0
		25	0	21.03	21.94	21.75	22.0
	64QAM	1	0	21.02	22.91	21.55	23.0
		1	12	21.14	22.96	21.88	23.0
		1	24	21.02	22.92	21.75	23.0
		12	0	19.01	19.59	19.25	20.0
		12	7	19.28	19.71	19.34	20.0
		12	13	19.12	19.56	19.15	20.0
		25	0	19.13	19.58	19.21	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				132022	132422	132622	Tune-up Tolerance
				1715	1755	1775	
10	QPSK	1	0	23.09	23.47	23.50	23.5
		1	25	23.05	23.54	23.64	24.0
		1	49	23.06	23.48	23.56	24.0
		25	0	21.94	22.35	22.44	22.5
		25	12	21.90	22.30	22.40	22.5
		25	25	22.10	22.26	22.41	22.5
		50	0	22.05	22.30	22.39	22.5
	16QAM	1	0	22.80	23.01	22.87	23.5
		1	25	22.80	23.06	22.93	23.5
		1	49	22.81	22.96	22.71	23.0
		25	0	21.07	21.82	21.62	22.0
		25	12	21.09	21.80	21.59	22.0
		25	25	21.54	21.72	21.78	22.0
		50	0	21.16	21.87	21.59	22.0
	64QAM	1	0	20.83	21.23	21.49	21.5
		1	25	20.74	21.78	21.28	22.0
		1	49	21.34	21.64	21.46	22.0
		25	0	19.29	19.77	19.71	20.0
		25	12	19.47	19.76	19.69	20.0
		25	25	19.71	19.92	19.62	20.0
		50	0	19.50	19.84	19.68	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				132047	132422	132597	Tune-up Tolerance
				1717.5	1755	1772.5	
15	QPSK	1	0	22.98	23.27	23.56	24.0
		1	37	23.01	23.42	23.62	24.0
		1	74	23.17	23.45	23.55	24.0
		36	0	21.91	22.42	22.32	22.5
		36	29	22.11	22.40	22.31	22.5
		36	30	21.96	22.33	22.38	22.5
		75	0	22.08	22.43	22.31	22.5
	16QAM	1	0	22.11	22.59	22.91	23.0
		1	37	22.06	22.71	22.93	23.0
		1	74	22.42	22.71	22.80	23.0
		36	0	21.08	21.49	21.66	22.0
		36	29	21.55	21.79	21.60	22.0
		36	30	21.55	21.79	21.59	22.0
		75	0	21.52	21.92	21.60	22.0
	64QAM	1	0	21.78	20.81	21.36	22.0
		1	37	22.15	21.25	21.40	22.5
		1	74	22.15	21.00	21.57	22.5
		36	0	19.36	20.06	19.65	20.5
		36	29	19.45	19.82	19.55	20.0
		36	30	19.46	19.82	19.55	20.0
		75	0	19.45	19.76	19.55	20.0

BW	Modulation	RB Size	RB Offset	Conducted power(dBm)			
				132072	132422	132572	Tune-up Tolerance
				1720	1755	1770	
20	QPSK	1	0	22.89	23.42	23.29	23.5
		1	49	22.92	23.41	23.34	23.5
		1	99	23.14	23.46	23.38	23.5
		50	0	21.97	22.30	22.35	22.5
		50	24	22.09	22.34	22.48	22.5
		50	50	22.13	22.32	22.35	22.5
		100	0	22.01	22.47	22.47	22.5
	16QAM	1	0	22.19	22.44	22.69	23.0
		1	49	22.16	22.39	22.65	23.0
		1	99	22.28	22.46	22.61	23.0
		50	0	21.07	21.56	21.42	22.0
		50	24	21.62	21.92	21.55	22.0
		50	50	21.64	21.88	21.53	22.0
		100	0	21.53	21.61	21.66	22.0
	64QAM	1	0	21.11	22.37	22.14	22.5
		1	49	21.54	22.36	22.19	22.5
		1	99	21.37	22.00	22.42	22.5
		50	0	19.63	20.15	19.97	20.5
		50	24	19.55	19.76	19.62	20.0
		50	50	19.83	19.79	19.68	20.0
		100	0	19.70	19.94	19.79	20.0

DLCA_66A-66A

Aggregated BW	Modulation	PCC RB Size	SCC RB offset	Conducted power with DL SCC active (dBm)			
				132072	132422	132572	Tune-up
				1720	1755	1770	Tolerance
20+20	QPSK	1	0	22.74	23.27	23.14	23.5
		1	49	22.77	23.26	23.19	23.5
		1	99	22.99	23.31	23.23	23.5
		50	0	21.82	22.15	22.20	22.5
		50	24	21.94	22.19	22.33	22.5
		50	50	21.98	22.17	22.20	22.5
		100	0	21.86	22.32	22.32	22.5
	16QAM	1	0	22.04	22.29	22.54	23.0
		1	49	22.01	22.24	22.50	22.5
		1	99	22.13	22.31	22.46	22.5
		50	0	20.92	21.41	21.27	21.5
		50	24	21.47	21.77	21.40	22.0
		50	50	21.49	21.73	21.38	22.0
		100	0	21.38	21.46	21.51	22.0
	64QAM	1	0	20.96	22.22	21.99	22.5
		1	49	21.39	22.21	22.04	22.5
		1	99	21.22	21.85	22.27	22.5
		50	0	19.48	20.00	19.82	20.0
		50	24	19.40	19.61	19.47	20.0
		50	50	19.68	19.64	19.53	20.0
		100	0	19.55	19.79	19.64	20.0

WIFI 2.4G

Test Mode	Tones/ RU Index	Freq(MHz)	Antenna	Average power output (dBm)	Tune up
802.11b	NA	2412	Chain0	16.42	17.5
802.11b	NA	2437	Chain0	17.09	
802.11b	NA	2462	Chain0	16.15	
802.11g	NA	2412	Chain0	14.28	15.5
802.11g	NA	2437	Chain0	15.04	
802.11g	NA	2462	Chain0	13.79	
802.11n HT20	NA	2412	Chain0	13.86	15.0
802.11n HT20	NA	2437	Chain0	14.55	
802.11n HT20	NA	2462	Chain0	13.61	
802.11n HT40	NA	2422	Chain0	12.87	14.5
802.11n HT40	NA	2437	Chain0	14.19	
802.11n HT40	NA	2452	Chain0	13.00	

WIFI 5G

Mode	Tones/ RUIndex	Freq (MHz)	Antenna	Conducted average power output(dBm)	Tune up
802.11a	NA	5180	Chain0	13.28	13.5
802.11a	NA	5220	Chain0	13.00	
802.11a	NA	5240	Chain0	12.44	
802.11n HT20	NA	5180	Chain0	10.52	11.0
802.11n HT20	NA	5220	Chain0	10.06	
802.11n HT20	NA	5240	Chain0	10.43	
802.11n HT40	NA	5190	Chain0	10.14	10.5
802.11n HT40	NA	5230	Chain0	10.27	
802.11ac VHT20	NA	5180	Chain0	7.82	9.5
802.11ac VHT20	NA	5220	Chain0	7.97	
802.11ac VHT20	NA	5240	Chain0	9.43	
802.11ac VHT40	NA	5190	Chain0	9.81	10.0
802.11ac VHT40	NA	5230	Chain0	9.24	
802.11ac VHT80	NA	5210	Chain0	9.02	9.5

Mode	Tones/ RUIndex	Freq (MHz)	Antenna	Conducted average power output(dBm)	Tune up
802.11a	NA	5745	Chain0	13.55	14.0
802.11a	NA	5785	Chain0	13.23	
802.11a	NA	5825	Chain0	13.05	
802.11n HT20	NA	5745	Chain0	11.02	11.5
802.11n HT20	NA	5785	Chain0	9.89	
802.11n HT20	NA	5825	Chain0	10.93	
802.11n HT40	NA	5755	Chain0	10.14	10.5
802.11n HT40	NA	5795	Chain0	9.95	
802.11ac VHT20	NA	5745	Chain0	10.00	10.5
802.11ac VHT20	NA	5785	Chain0	9.60	
802.11ac VHT20	NA	5825	Chain0	10.46	
802.11ac VHT40	NA	5755	Chain0	9.12	9.5
802.11ac VHT40	NA	5795	Chain0	9.18	
802.11ac VHT80	NA	5775	Chain0	7.65	8.0

BT

Modulation type	Conducted Average Power(dBm)			Tune-up Tolerance
	2402MHz	2440MHz	2480MHz	
GFSK(DH5)	-1.28	-0.29	-0.31	0
$\pi/4$ DQPSK(2DH5)	-4.49	-3.51	-3.55	-3.5
8DPSK(3DH5)	-1.81	-0.87	-0.89	-0.

BLE

Modulation type	Freq(MHz)	Conducted Average Power(dBm)	Tune-up Tolerance
GFSK(LE 1Mbps)	2402	6.16	6.5
	2440	4.93	5.0
	2480	5.17	5.5

6.2 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Method1:

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f}(\text{GHz}) \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

Note: Anyway, We evaluated SAR for BT/WIFI, so there is no need to consider this part.

6.3 RF exposure conditions

Refer to the follow picture “Antenna information” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

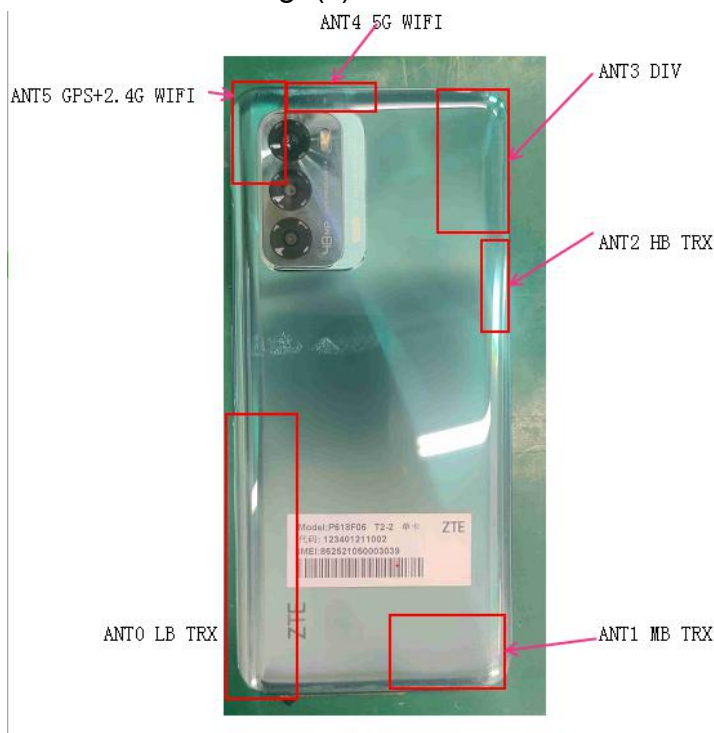

All of Implementation antenna

ANT0 Antenna(TRX):

GSM :850 WCDMA:B5 LTE FDD:B5/B13/B12/B28AB

ANT1 Main Antenna(TRX):

GSM :1800/1900 WCDMA:B2/B4 LTE FDD:B2/B4/B66

ANT2 Main Antenna(TRX):

LTE FDD:B7 LTE TDD:B38

DIV Antenna(RX):

GSM :850/1800/1900 WCDMA:B2/B4/B5 LTE FDD:B4/B5/B7/B12/B13/B28/B66
LTE TDD:B38

5G WIFI Antenna

5.2-5.8GHz

GPS+2.4G WIFI Antenna

1570MHz~1600MHz 2.4-2.5GHz

Considered the separation distance between antennas to sides, Position listed as below shall be evaluated.

2/3/4G SAR Head test Position: Left Cheek, Left Tilt, Right Cheek, Right Tilt

ANT0 antenna: SAR Body test Position: back, front, Bottom, Right

ANT1 antenna: SAR Body test Position: back, front, Bottom, Left

ANT2 antenna: SAR Body test Position: back, front, Left

WiFi/BT SAR Head test Position: Left Cheek, Left Tilt, Right Cheek, Right Tilt

ANT4 antenna: SAR Body test Position: back, front, Top

ANT5 antenna: SAR Body test Position: back, front, Top, Right

Note1*: For hotspot mode, it's not necessary test Rear and Front position for several bands which there is no "hotspot power reduction" scheme. Because we already test these positions without hotspot mode in Body Exposure conditions.

6.4 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Freq.(MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)	Verdict
750	ϵ_r	43.07	41.9	2.78	± 10	Pass
	$\sigma[\text{S/m}]$	0.93	0.89	-4.94	± 10	Pass
835	ϵ_r	42.99	41.50	3.58	± 10	Pass
	$\sigma[\text{S/m}]$	0.93	0.90	2.78	± 10	Pass
900	ϵ_r	40.05	41.50	-3.51	± 10	Pass
	$\sigma[\text{S/m}]$	1.01	0.97	4.02	± 10	Pass
1800	ϵ_r	39.31	40.00	-1.72	± 10	Pass
	$\sigma[\text{S/m}]$	1.40	1.40	-0.29	± 10	Pass
2000	ϵ_r	41.31	40.00	3.28	± 10	Pass
	$\sigma[\text{S/m}]$	1.47	1.40	4.79	± 10	Pass
2450	ϵ_r	40.83	39.20	4.17	± 10	Pass
	$\sigma[\text{S/m}]$	1.74	1.80	-3.61	± 10	Pass
2600	ϵ_r	38.65	39.00	-0.89	± 10	Pass
	$\sigma[\text{S/m}]$	1.92	1.96	-2.09	± 10	Pass
5200	ϵ_r	36.68	36.00	1.88	± 5	Pass
	$\sigma[\text{S/m}]$	4.67	4.66	0.15	± 5	Pass
5800	ϵ_r	36.37	35.30	3.04	± 5	Pass
	$\sigma[\text{S/m}]$	5.40	5.27	2.54	± 5	Pass

Note: For DASY system, the conservative tolerance 5% could expand to 10% when the frequency under 3GHz

A system check measurement was made following once the determination of the dielectric parameters of the simulant, using the dipole validation kit. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date	Freq. (MHz)	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2022.01.06	750	1g	8.56	8.40	1.90	±10
2022.01.07	835	1g	9.28	9.38	-1.07	±10
2022.01.08	900	1g	10.72	10.9	-1.65	±10
2022.01.09	1800	1g	40.00	38.9	2.83	±10
2022.01.10	2000	1g	42.56	41.0	3.80	±10
2022.01.11	2450	1g	50.76	53.0	-4.23	±10
2022.01.12	2600	1g	56.08	56.5	-0.74	±10
2022.01.13	5200	1g	73.40	75.9	-3.29	±10
2022.01.14	5800	1g	79.60	78.5	1.4	±10

6.5 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
b) All configurations for each device position in a), e.g., antenna extended and retracted, and
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Duty Factor = 1 / Duty Cycle(%)

For cellular network:

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor

For WLAN

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor * Duty factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.

3. The distance between the EUT and the phantom bottom is 10mm.

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 850

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dB m)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
GSM850	Exposure condition	Position	Channel				First	Second	First	Second
GPRS/EDG E GMSK	Head	Left Cheek	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.102	---	0.105	---
			H	31.44	31.50	1.01	---	---	---	---
		Left tilt	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.056	---	0.058	---
			H	31.44	31.50	1.01	---	---	---	---
		Right Cheek	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.123	---	0.127	---
			H	31.44	31.50	1.01	---	---	---	---
		Right tilt	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.087	---	0.090	---
			H	31.44	31.50	1.01	---	---	---	---
GPRS/EDG E GMSK	Body-worn	Back	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.659	---	0.679	---
			H	31.44	31.50	1.01	---	---	---	---
		Front	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.431	---	0.444	---
			H	31.44	31.50	1.01	---	---	---	---
GPRS/EDG E GMSK	Hotspot	Back	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.659	---	0.679	---
			H	31.44	31.50	1.01	---	---	---	---
		Front	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.431	---	0.444	---
			H	31.44	31.50	1.01	---	---	---	---
		Top	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	---	---	---	---
			H	31.44	31.50	1.01	---	---	---	---
		Bottom	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.127	---	0.131	---
			H	31.44	31.50	1.01	---	---	---	---
		Left	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	---	---	---	---

			H	31.44	31.50	1.01	---	---	---	---
		Right	L	31.33	31.50	1.04	---	---	---	---
			M	31.39	31.50	1.03	0.216	---	0.222	---
			H	31.44	31.50	1.01	---	---	---	---

Mode: GSM 1900

fL (MHz)=1850.2MHz

fM (MHz)=1880.0MHz

fH (MHz)=1909.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dB m)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
GSM1900	Exposure condition	Position	Channel				First	Second	First	Second
GPRS/EDG E GMSK	Head	Left Cheek	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.092	---	0.098	---
			H	25.78	26.00	1.05	---	---	---	---
		Left tilt	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.069	---	0.074	---
			H	25.78	26.00	1.05	---	---	---	---
		Right Cheek	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.096	---	0.103	---
			H	25.78	26.00	1.05	---	---	---	---
		Right tilt	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.070	---	0.075	---
			H	25.78	26.00	1.05	---	---	---	---
GPRS/EDG E GMSK	Body-worn	Back	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.502	---	0.537	---
			H	25.78	26.00	1.05	---	---	---	---
		Front	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.346	---	0.370	---
			H	25.78	26.00	1.05	---	---	---	---
GPRS/EDG E GMSK	Hotspot	Back	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.502	---	0.537	---
			H	25.78	26.00	1.05	---	---	---	---
		Front	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.346	---	0.370	---
			H	25.78	26.00	1.05	---	---	---	---
		Top	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	---	---	---	---
			H	25.78	26.00	1.05	---	---	---	---
		Bottom	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.623	---	0.667	---
			H	25.78	26.00	1.05	---	---	---	---
		Left	L	25.66	26.00	1.08	---	---	---	---
			M	25.69	26.00	1.07	0.180	---	0.193	---
			H	25.78	26.00	1.05	---	---	---	---
		Right	L	25.66	26.00	1.08	---	---	---	---

			M	25.69	26.00	1.07	---	---	---	---
			H	25.78	26.00	1.05	---	---	---	---

Mode: WCDMA BAND II

fL (MHz)=1852.4MHz fM (MHz)=1880MHz fH (MHz)= 1907.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WCDMA II	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.119	---	0.146	---
			H	22.61	23.50	1.23	---	---	---	---
		Left tilt	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.061	---	0.075	---
			H	22.61	23.50	1.23	---	---	---	---
		Right Cheek	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.142	---	0.175	---
			H	22.61	23.50	1.23	---	---	---	---
		Right tilt	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.075	---	0.092	---
			H	22.61	23.50	1.23	---	---	---	---
RMC	Body-worn	Back	L	23.28	23.50	1.05	0.933	0.932	0.980	0.979
			M	22.60	23.50	1.23	0.881	0.880	1.084	1.082
			H	22.61	23.50	1.23	0.880	0.898	1.082	1.105
		Front	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.530	---	0.652	---
			H	22.61	23.50	1.23	---	---	---	---
RMC	Hotspot	Back	L	23.28	23.50	1.05	0.933	0.932	0.980	0.979
			M	22.60	23.50	1.23	0.881	0.880	1.084	1.082
			H	22.61	23.50	1.23	0.880	0.898	1.082	1.105
		Front	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.530	---	0.652	---
			H	22.61	23.50	1.23	---	---	---	---
		Top	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	---	---	---	---
			H	22.61	23.50	1.23	---	---	---	---
		Bottom	L	23.28	23.50	1.05	1.021	1.018	1.072	1.069
			M	22.60	23.50	1.23	0.970	0.968	1.193	1.191
			H	22.61	23.50	1.23	0.968	0.967	1.191	1.189
		Left	L	23.28	23.50	1.05	---	---	---	---
			M	22.60	23.50	1.23	0.284	---	0.349	---
			H	22.61	23.50	1.23	---	---	---	---
		Right	L	23.28	23.50	1.05	---	---	---	---

			M	22.60	23.50	1.23	---	---	---	---
			H	22.61	23.50	1.23	---	---	---	---

Mode: WCDMA BAND IV

fL (MHz)=1712.4MHz fM (MHz)=1732.5MHz

fH (MHz)= 1752.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WCDMA IV	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.113	---	0.118	---
			H	23.39	23.50	1.03	---	---	---	---
		Left tilt	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.062	---	0.064	---
			H	23.39	23.50	1.03	---	---	---	---
		Right Cheek	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.143	---	0.149	---
			H	23.39	23.50	1.03	---	---	---	---
		Right tilt	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.086	---	0.089	---
			H	23.39	23.50	1.03	---	---	---	---
RMC	Body-worn	Back	L	23.23	23.50	1.06	1.000	0.997	1.060	1.057
			M	23.34	23.50	1.04	1.020	1.018	1.061	1.059
			H	23.39	23.50	1.03	1.026	1.017	1.057	1.048
		Front	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.524	---	0.545	---
			H	23.39	23.50	1.03	---	---	---	---
RMC	Hotspot	Back	L	23.23	23.50	1.06	1.000	0.997	1.060	1.057
			M	23.34	23.50	1.04	1.020	1.018	1.061	1.059
			H	23.39	23.50	1.03	1.026	1.017	1.057	1.048
		Front	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.524	---	0.545	---
			H	23.39	23.50	1.03	---	---	---	---
		Top	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	---	---	---	---
			H	23.39	23.50	1.03	---	---	---	---
		Bottom	L	23.23	23.50	1.06	0.945	0.944	1.002	1.001
			M	23.34	23.50	1.04	0.998	0.997	1.038	1.037
			H	23.39	23.50	1.03	1.000	0.998	1.030	1.028
		Left	L	23.23	23.50	1.06	---	---	---	---
			M	23.34	23.50	1.04	0.207	---	0.215	---
			H	23.39	23.50	1.03	---	---	---	---
		Right	L	23.23	23.50	1.06	---	---	---	---

			M	23.34	23.50	1.04	---	---	---	---
			H	23.39	23.50	1.03	---	---	---	---

Mode: WCDMA BAND V

fL (MHz)=826.4MHz fM (MHz)=836.4MHz fH (MHz)= 846.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WCDMA V	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.112	---	0.130	---
			H	23.61	24.50	1.23	---	---	---	---
		Left tilt	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.052	---	0.060	---
			H	23.61	24.50	1.23	---	---	---	---
		Right Cheek	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.133	---	0.154	---
			H	23.61	24.50	1.23	---	---	---	---
		Right tilt	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.058	---	0.067	---
			H	23.61	24.50	1.23	---	---	---	---
RMC	Body-worn	Back	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.334	---	0.387	---
			H	23.61	24.50	1.23	---	---	---	---
		Front	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.221	---	0.256	---
			H	23.61	24.50	1.23	---	---	---	---
RMC	Hotspot	Back	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.334	---	0.387	---
			H	23.61	24.50	1.23	---	---	---	---
		Front	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.221	---	0.256	---
			H	23.61	24.50	1.23	---	---	---	---
		Top	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	---	---	---	---
			H	23.61	24.50	1.23	---	---	---	---
		Bottom	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	0.129	---	0.150	---
			H	23.61	24.50	1.23	---	---	---	---
		Left	L	24.09	24.50	1.10	---	---	---	---
			M	23.85	24.50	1.16	---	---	---	---
			H	23.61	24.50	1.23	---	---	---	---
		Right	L	24.09	24.50	1.10	---	---	---	---

			M	23.85	24.50	1.16	0.221	---	0.256	---
			H	23.61	24.50	1.23	---	---	---	---

Mode: LTE Band 2

fL (MHz)=1860 MHz

fM (MHz)=1880MHz

fH (MHz)= 1900MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE2	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.162	---	0.180	---
			H	22.85	24.00	1.30	---	---	---	---
		Left tilt	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.114	---	0.127	---
			H	22.85	24.00	1.30	---	---	---	---
		Right Cheek	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.183	---	0.203	---
			H	22.85	24.00	1.30	---	---	---	---
		Right tilt	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.128	---	0.142	---
			H	22.85	24.00	1.30	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.14	24.00	1.22	0.791	0.790	0.965	0.964
			M	23.56	24.00	1.11	0.870	0.867	0.966	0.962
			H	22.85	24.00	1.30	0.711	0.710	0.924	0.923
		Front	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.512	---	0.568	---
			H	22.85	24.00	1.30	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.14	24.00	1.22	0.791	0.790	0.965	0.964
			M	23.56	24.00	1.11	0.870	0.867	0.966	0.962
			H	22.85	24.00	1.30	0.711	0.710	0.924	0.923
		Front	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.512	---	0.568	---
			H	22.85	24.00	1.30	---	---	---	---
		Top	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	---	---	---	---
			H	22.85	24.00	1.30	---	---	---	---
		Bottom	L	23.14	24.00	1.22	0.956	0.955	1.166	1.165
			M	23.56	24.00	1.11	1.072	1.071	1.190	1.189
			H	22.85	24.00	1.30	0.900	0.897	1.170	1.166
		Left	L	23.14	24.00	1.22	---	---	---	---
			M	23.56	24.00	1.11	0.246	---	0.273	---
			H	22.85	24.00	1.30	---	---	---	---
		Right	L	23.14	24.00	1.22	---	---	---	---

QPSK 50%RB	Head	Left Cheek	M	23.56	24.00	1.11	---	---	---	---
			H	22.85	24.00	1.30	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Left tilt	M	22.49	22.50	1.00	0.161	---	0.161	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Right Cheek	M	22.49	22.50	1.00	0.112	---	0.112	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Right tilt	M	22.49	22.50	1.00	0.181	---	0.181	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
QPSK 50%RB	Body-worn	Back	M	22.49	22.50	1.00	0.125	---	0.125	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Front	M	22.49	22.50	1.00	0.787	0.785	0.874	0.871
			H	21.93	22.50	1.14	0.865	0.864	0.865	0.864
			L	22.06	22.50	1.11	0.710	0.708	0.809	0.807
QPSK 50%RB	Hotspot	Back	M	22.49	22.50	1.00	---	---	---	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Front	M	22.49	22.50	1.00	0.510	---	0.510	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Top	M	22.49	22.50	1.00	---	---	---	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
		Bottom	M	22.49	22.50	1.00	0.951	0.950	1.056	1.055
			H	21.93	22.50	1.14	1.070	1.068	1.070	1.068
			L	22.06	22.50	1.11	0.897	0.896	1.023	1.021
		Left	M	22.49	22.50	1.00	---	---	---	---
			H	21.93	22.50	1.14	0.243	---	0.243	---
			L	22.06	22.50	1.11	---	---	---	---
		Right	M	22.49	22.50	1.00	---	---	---	---
			H	21.93	22.50	1.14	---	---	---	---
			L	22.06	22.50	1.11	---	---	---	---
QPSK 100%RB	Head	Left Cheek	M	22.49	22.50	1.00	---	---	---	---
			H	21.94	22.50	1.14	0.140	---	0.160	---

		Left tilt	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.097	---	0.111	---
		Right Cheek	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.158	---	0.180	---
		Right tilt	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.108	---	0.123	---
		Back	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	0.781	0.780	0.843	0.842
			M	21.94	22.50	1.14	0.757	0.756	0.863	0.862
QPSK 100%RB	Body-worn	Front	H	22.03	22.50	1.11	0.708	0.706	0.786	0.784
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.440	---	0.502	---
QPSK 100%RB	Hotspot	Back	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	0.781	0.780	0.843	0.842
			M	21.94	22.50	1.14	0.757	0.756	0.863	0.862
		Front	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.440	---	0.502	---
		Top	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	---	---	---	---
		Bottom	H	22.03	22.50	1.11	0.874	0.873	0.970	0.969
			L	22.17	22.50	1.08	0.950	0.948	1.026	1.024
			M	21.94	22.50	1.14	0.915	0.914	1.043	1.042
		Left	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	0.210	---	0.239	---
		Right	H	22.03	22.50	1.11	---	---	---	---
			L	22.17	22.50	1.08	---	---	---	---
			M	21.94	22.50	1.14	---	---	---	---

Mode: LTE Band 4

fL (MHz)=1720 MHz

fM (MHz)=1732.5MHz

fH (MHz)= 1745MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE4	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.131	---	0.136	---
			H	23.13	23.50	1.09	---	---	---	---
		Left tilt	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.092	---	0.096	---
			H	23.13	23.50	1.09	---	---	---	---
		Right Cheek	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.138	---	0.144	---
			H	23.13	23.50	1.09	---	---	---	---
		Right tilt	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.098	---	0.102	---
			H	23.13	23.50	1.09	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.11	23.50	1.09	0.800	0.799	0.872	0.871
			M	23.35	23.50	1.04	0.846	0.845	0.880	0.879
			H	23.13	23.50	1.09	0.800	0.799	0.872	0.871
		Front	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.441	---	0.459	---
			H	23.13	23.50	1.09	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.11	23.50	1.09	0.800	0.799	0.872	0.871
			M	23.35	23.50	1.04	0.846	0.845	0.880	0.879
			H	23.13	23.50	1.09	0.800	0.799	0.872	0.871
		Front	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.441	---	0.459	---
			H	23.13	23.50	1.09	---	---	---	---
		Top	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	---	---	---	---
			H	23.13	23.50	1.09	---	---	---	---
		Bottom	L	23.11	23.50	1.09	0.782	0.781	0.852	0.851
			M	23.35	23.50	1.04	0.822	0.820	0.855	0.853
			H	23.13	23.50	1.09	0.782	0.781	0.852	0.851
		Left	L	23.11	23.50	1.09	---	---	---	---
			M	23.35	23.50	1.04	0.164	---	0.171	---
			H	23.13	23.50	1.09	---	---	---	---
		Right	L	23.11	23.50	1.09	---	---	---	---

			M	23.35	23.50	1.04	---	---	---	---
			H	23.13	23.50	1.09	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.130	---	0.134	---
			H	22.50	22.50	1.00	---	---	---	---
		Left tilt	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.090	---	0.093	---
			H	22.50	22.50	1.00	---	---	---	---
		Right Cheek	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.136	---	0.140	---
			H	22.50	22.50	1.00	---	---	---	---
		Right tilt	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.097	---	0.100	---
			H	22.50	22.50	1.00	---	---	---	---
QPSK 50%RB	Body-worn	Back	L	22.12	22.50	1.09	0.796	0.794	0.868	0.865
			M	22.37	22.50	1.03	0.845	0.845	0.870	0.870
			H	22.50	22.50	1.00	0.796	0.794	0.796	0.794
		Front	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.438	---	0.451	---
			H	22.50	22.50	1.00	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.12	22.50	1.09	0.796	0.794	0.868	0.865
			M	22.37	22.50	1.03	0.845	0.845	0.870	0.870
			H	22.50	22.50	1.00	0.796	0.794	0.796	0.794
		Front	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.438	---	0.451	---
			H	22.50	22.50	1.00	---	---	---	---
		Top	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	---	---	---	---
			H	22.50	22.50	1.00	---	---	---	---
		Bottom	L	22.12	22.50	1.09	0.780	0.778	0.850	0.848
			M	22.37	22.50	1.03	0.821	0.819	0.846	0.844
			H	22.50	22.50	1.00	0.780	0.778	0.780	0.778
		Left	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	0.163	---	0.168	---
			H	22.50	22.50	1.00	---	---	---	---
		Right	L	22.12	22.50	1.09	---	---	---	---
			M	22.37	22.50	1.03	---	---	---	---
			H	22.50	22.50	1.00	---	---	---	---
QPSK 100%RB	Head	Left Cheek	L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.128	---	0.133	---

		Left tilt	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.087	---	0.090	---
		Right Cheek	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.134	---	0.139	---
		Right tilt	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.095	---	0.099	---
		Back	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	0.772	0.773	0.857	0.858
			M	22.33	22.50	1.04	0.831	0.830	0.864	0.863
QPSK 100%RB	Body-worn	Front	H	22.49	22.50	1.00	0.792	0.791	0.792	0.791
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.433	---	0.450	---
		Back	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	0.792	0.791	0.879	0.878
			M	22.33	22.50	1.04	0.843	0.844	0.877	0.878
QPSK 100%RB	Hotspot	Top	H	22.49	22.50	1.00	0.792	0.791	0.792	0.791
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.435	---	0.452	---
		Bottom	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	0.762	0.760	0.846	0.844
			M	22.33	22.50	1.04	0.803	0.804	0.835	0.836
		Left	H	22.49	22.50	1.00	0.778	0.775	0.778	0.775
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	0.161	---	0.167	---
		Right	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	---	---	---	---
		Hotspot	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	---	---	---	---
		Body-worn	H	22.49	22.50	1.00	---	---	---	---
			L	22.05	22.50	1.11	---	---	---	---
			M	22.33	22.50	1.04	---	---	---	---

Mode: LTE Band 5

fL (MHz)=829 MHz

fM (MHz)=836.5MHz

fH (MHz)= 844MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE5	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.118	---	0.131	---
			H	23.68	24.50	1.21	---	---	---	---
		Left tilt	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.064	---	0.071	---
			H	23.68	24.50	1.21	---	---	---	---
		Right Cheek	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.126	---	0.140	---
			H	23.68	24.50	1.21	---	---	---	---
		Right tilt	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.071	---	0.079	---
			H	23.68	24.50	1.21	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.340	---	0.377	---
			H	23.68	24.50	1.21	---	---	---	---
		Front	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.178	---	0.198	---
QPSK 1RB	Hotspot	Back	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.340	---	0.377	---
			H	23.68	24.50	1.21	---	---	---	---
		Front	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.178	---	0.198	---
			H	23.68	24.50	1.21	---	---	---	---
		Top	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	---	---	---	---
			H	23.68	24.50	1.21	---	---	---	---
		Bottom	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	0.081	---	0.090	---
			H	23.68	24.50	1.21	---	---	---	---
		Left	L	23.85	24.50	1.16	---	---	---	---
			M	24.04	24.50	1.11	---	---	---	---
			H	23.68	24.50	1.21	---	---	---	---
		Right	L	23.85	24.50	1.16	---	---	---	---

			M	24.04	24.50	1.11	0.166	---	0.184	---
			H	23.68	24.50	1.21	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.116	---	0.126	---
			H	22.71	23.00	1.07	---	---	---	---
		Left tilt	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.062	---	0.068	---
			H	22.71	23.00	1.07	---	---	---	---
		Right Cheek	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.125	---	0.136	---
			H	22.71	23.00	1.07	---	---	---	---
		Right tilt	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.069	---	0.075	---
			H	22.71	23.00	1.07	---	---	---	---
QPSK 50%RB	Body-worn	Back	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.338	---	0.368	---
			H	22.71	23.00	1.07	---	---	---	---
		Front	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.176	---	0.192	---
			H	22.71	23.00	1.07	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.338	---	0.368	---
			H	22.71	23.00	1.07	---	---	---	---
		Front	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.176	---	0.192	---
			H	22.71	23.00	1.07	---	---	---	---
		Top	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	---	---	---	---
			H	22.71	23.00	1.07	---	---	---	---
		Bottom	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.078	---	0.085	---
			H	22.71	23.00	1.07	---	---	---	---
		Left	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	---	---	---	---
			H	22.71	23.00	1.07	---	---	---	---
		Right	L	22.68	23.00	1.08	---	---	---	---
			M	22.62	23.00	1.09	0.164	---	0.179	---
			H	22.71	23.00	1.07	---	---	---	---

Mode: LTE Band 7

fL (MHz)=2510 MHz

fM (MHz)=2535MHz

fH (MHz)= 2560MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE7	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	17.87	18.50	1.16	---	---	---	---
			M	18.11	18.50	1.09	0.260	---	0.283	---
			H	18.15	18.50	1.08	---	---	---	---
		Left tilt	L	17.87	18.50	1.16	---	---	---	---
			M	18.11	18.50	1.09	0.106	---	0.116	---
			H	18.15	18.50	1.08	---	---	---	---
		Right Cheek	L	17.87	18.50	1.16	---	---	---	---
			M	18.15	18.50	1.08	0.629	---	0.679	---
			H	18.11	18.50	1.09	---	---	---	---
		Right tilt	L	17.87	18.50	1.16	---	---	---	---
			M	18.15	18.50	1.08	0.259	---	0.280	---
			H	18.11	18.50	1.09	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.20	24.00	1.20	0.980	0.978	1.176	1.174
			M	23.77	24.00	1.05	1.136	1.136	1.193	1.193
			H	22.60	24.00	1.38	0.832	0.833	1.148	1.150
		Front	L	23.20	24.00	1.20	---	---	---	---
			M	23.77	24.00	1.05	0.833	---	0.875	---
			H	22.60	24.00	1.38	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.20	24.00	1.20	0.980	0.978	1.176	1.174
			M	23.77	24.00	1.05	1.136	1.136	1.193	1.193
			H	22.60	24.00	1.38	0.832	0.833	1.148	1.150
		Front	L	23.20	24.00	1.20	---	---	---	---
			M	23.77	24.00	1.05	0.833	---	0.875	---
			H	22.60	24.00	1.38	---	---	---	---
		Top	L	23.20	24.00	1.20	---	---	---	---
			M	23.77	24.00	1.05	---	---	---	---
			H	22.60	24.00	1.38	---	---	---	---
		Bottom	L	23.20	24.00	1.20	---	---	---	---
			M	23.77	24.00	1.05	---	---	---	---
			H	22.60	24.00	1.38	---	---	---	---
		Left	L	23.20	24.00	1.20	0.983	0.982	1.180	1.178
			M	23.77	24.00	1.05	1.137	1.135	1.194	1.192
			H	22.60	24.00	1.38	0.841	0.840	1.161	1.159
		Right	L	23.20	24.00	1.20	---	---	---	---
			M	23.77	24.00	1.05	---	---	---	---
			H	22.60	24.00	1.38	---	---	---	---

QPSK 50%RB	Head	Left Cheek	L	16.77	17.50	1.18	---	---	---	---
			M	17.17	17.50	1.08	0.258	---	0.279	---
			H	16.46	17.50	1.27	---	---	---	---
		Left tilt	L	16.77	17.50	1.18	---	---	---	---
			M	17.17	17.50	1.08	0.105	---	0.113	---
			H	16.46	17.50	1.27	---	---	---	---
		Right Cheek	L	16.77	17.50	1.18	---	---	---	---
			M	17.17	17.50	1.08	0.628	---	0.678	---
			H	16.46	17.50	1.27	---	---	---	---
		Right tilt	L	16.77	17.50	1.18	---	---	---	---
			M	17.17	17.50	1.08	0.257	---	0.278	---
			H	16.46	17.50	1.27	---	---	---	---
QPSK 50%RB	Body-worn	Back	L	22.42	23.00	1.14	0.978	0.976	1.115	1.113
			M	22.82	23.00	1.04	1.135	1.137	1.180	1.182
			H	22.11	23.00	1.23	0.830	0.830	1.021	1.021
		Front	L	22.42	23.00	1.14	---	---	---	---
			M	22.82	23.00	1.04	0.831	---	0.864	---
			H	22.11	23.00	1.23	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.42	23.00	1.14	0.978	0.976	1.115	1.113
			M	22.82	23.00	1.04	1.138	1.137	1.184	1.182
			H	22.11	23.00	1.23	0.830	0.830	1.021	1.021
		Front	L	22.42	23.00	1.14	---	---	---	---
			M	22.82	23.00	1.04	0.831	---	0.864	---
			H	22.11	23.00	1.23	---	---	---	---
		Top	L	22.42	23.00	1.14	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.11	23.00	1.23	---	---	---	---
		Bottom	L	22.42	23.00	1.14	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.11	23.00	1.23	---	---	---	---
		Left	L	22.42	23.00	1.14	0.981	0.982	1.118	1.119
			M	22.82	23.00	1.04	1.140	1.140	1.186	1.186
			H	22.11	23.00	1.23	0.839	0.840	1.032	1.033
		Right	L	22.42	23.00	1.14	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.11	23.00	1.23	---	---	---	---
QPSK 100%RB	Head	Left Cheek	L	16.81	17.50	1.17	---	---	---	---
			M	17.28	17.50	1.05	0.256	---	0.269	---
			H	16.49	17.50	1.26	---	---	---	---
		Left	L	16.81	17.50	1.17	---	---	---	---

		tilt	M	17.28	17.50	1.05	0.102	---	0.107	---
			H	16.49	17.50	1.26	---	---	---	---
		Right Cheek	L	16.81	17.50	1.17	---	---	---	---
			M	17.28	17.50	1.05	0.625	---	0.656	---
			H	16.49	17.50	1.26	---	---	---	---
		Right tilt	L	16.81	17.50	1.17	---	---	---	---
			M	17.28	17.50	1.05	0.255	---	0.268	---
			H	16.49	17.50	1.26	---	---	---	---
QPSK 100%RB	Body-worn	Back	L	22.46	23.00	1.13	0.976	0.975	1.103	1.102
			M	22.93	23.00	1.02	1.135	1.133	1.158	1.156
			H	22.14	23.00	1.22	0.827	0.820	1.009	1.000
		Front	L	22.46	23.00	1.13	---	---	---	---
			M	22.93	23.00	1.02	0.829	---	0.846	---
			H	22.14	23.00	1.22	---	---	---	---
QPSK 100%RB	Hotspot	Back	L	22.46	23.00	1.13	0.976	0.975	1.103	1.102
			M	22.93	23.00	1.02	1.135	1.133	1.158	1.156
			H	22.14	23.00	1.22	0.827	0.820	1.009	1.000
		Front	L	22.46	23.00	1.13	---	---	---	---
			M	22.93	23.00	1.02	0.829	---	0.846	---
			H	22.14	23.00	1.22	---	---	---	---
		Top	L	22.46	23.00	1.13	---	---	---	---
			M	22.93	23.00	1.02	---	---	---	---
			H	22.14	23.00	1.22	---	---	---	---
		Bottom	L	22.46	23.00	1.13	---	---	---	---
			M	22.93	23.00	1.02	---	---	---	---
			H	22.14	23.00	1.22	---	---	---	---
		Left	L	22.46	23.00	1.13	0.977	0.978	1.104	1.105
			M	22.93	23.00	1.02	1.138	1.136	1.161	1.159
			H	22.14	23.00	1.22	0.836	0.833	1.020	1.016
		Right	L	22.46	23.00	1.13	---	---	---	---
			M	22.93	23.00	1.02	---	---	---	---
			H	22.14	23.00	1.22	---	---	---	---

Note: Head exposure condition, receiver trigger power reduce, so receiver on with reduced power. (LTE Band7 and band7C with reduced power is the same working scheme)

Mode: LTE Band 7C

fL (MHz)=2510 MHz

fM (MHz)=2535MHz

fH (MHz)= 2560MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE7C	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	17.87	18.50	1.16	---	---	---	---
			M	18.27	18.50	1.05	0.403	---	0.423	---
			H	18.12	18.50	1.09	---	---	---	---
		Left tilt	L	17.87	18.50	1.16	---	---	---	---
			M	18.27	18.50	1.05	0.191	---	0.201	---
			H	18.12	18.50	1.09	---	---	---	---
		Right Cheek	L	17.87	18.50	1.16	---	---	---	---
			M	18.27	18.50	1.05	0.683	---	0.717	---
			H	18.12	18.50	1.09	---	---	---	---
		Right tilt	L	17.87	18.50	1.16	---	---	---	---
			M	18.27	18.50	1.05	0.331	---	0.348	---
			H	18.12	18.50	1.09	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.81	24.00	1.04	0.865	0.866	0.900	0.901
			M	23.96	24.00	1.01	0.893	0.892	0.902	0.901
			H	22.65	24.00	1.36	0.661	0.660	0.899	0.898
		Front	L	23.81	24.00	1.04	---	---	---	---
			M	23.96	24.00	1.01	0.573	---	0.579	---
			H	22.65	24.00	1.36	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.81	24.00	1.04	0.865	0.866	0.900	0.901
			M	23.96	24.00	1.01	0.893	0.892	0.902	0.901
			H	22.65	24.00	1.36	0.661	0.660	0.899	0.898
		Front	L	23.81	24.00	1.04	---	---	---	---
			M	23.96	24.00	1.01	0.573	---	0.579	---
			H	22.65	24.00	1.36	---	---	---	---
		Top	L	23.81	24.00	1.04	---	---	---	---
			M	23.96	24.00	1.01	0.133	---	0.134	---
			H	22.65	24.00	1.36	---	---	---	---
		Bottom	L	23.81	24.00	1.04	---	---	---	---
			M	23.96	24.00	1.01	---	---	---	---
			H	22.65	24.00	1.36	---	---	---	---
		Left	L	23.81	24.00	1.04	0.999	0.998	1.039	1.038
			M	23.96	24.00	1.01	1.030	1.028	1.040	1.038
			H	22.65	24.00	1.36	0.730	0.731	0.993	0.994
		Right	L	23.81	24.00	1.04	---	---	---	---

QPSK 50%RB	Head	Left Cheek	M	23.96	24.00	1.01	---	---	---	---
			H	22.65	24.00	1.36	---	---	---	---
			L	15.21	16.50	1.35	---	---	---	---
		Left tilt	M	15.99	16.50	1.12	0.376	---	0.421	---
			H	16.12	16.50	1.09	---	---	---	---
			L	15.21	16.50	1.35	---	---	---	---
		Right Cheek	M	15.99	16.50	1.12	0.179	---	0.200	---
			H	16.12	16.50	1.09	---	---	---	---
			L	15.21	16.50	1.35	---	---	---	---
		Right tilt	M	15.99	16.50	1.12	0.638	---	0.715	---
			H	16.12	16.50	1.09	---	---	---	---
			L	15.21	16.50	1.35	---	---	---	---
QPSK 50%RB	Body-worn	Back	M	21.15	22.00	1.22	0.715	0.713	0.872	0.870
			M	21.68	22.00	1.08	0.822	0.821	0.888	0.887
			H	20.65	22.00	1.36	0.588	0.589	0.799	0.801
		Front	L	21.15	22.00	1.22	---	---	---	---
			M	21.68	22.00	1.08	0.533	---	0.576	---
			H	20.65	22.00	1.36	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	21.15	22.00	1.22	0.715	0.713	0.872	0.870
			M	21.68	22.00	1.08	0.822	0.821	0.888	0.887
			H	20.65	22.00	1.36	0.588	0.589	0.799	0.801
		Front	L	21.15	22.00	1.22	---	---	---	---
			M	21.68	22.00	1.08	0.533	---	0.576	---
			H	20.65	22.00	1.36	---	---	---	---
		Top	L	21.15	22.00	1.22	---	---	---	---
			M	21.68	22.00	1.08	0.122	---	0.132	---
			H	20.65	22.00	1.36	---	---	---	---
		Bottom	L	21.15	22.00	1.22	---	---	---	---
			M	21.68	22.00	1.08	---	---	---	---
			H	20.65	22.00	1.36	---	---	---	---
		Left	L	21.15	22.00	1.22	0.842	0.843	1.027	1.028
			M	21.68	22.00	1.08	0.868	0.868	0.938	0.938
			H	20.65	22.00	1.36	0.615	0.617	0.836	0.840
		Right	L	21.15	22.00	1.22	---	---	---	---
			M	21.68	22.00	1.08	---	---	---	---
			H	20.65	22.00	1.36	---	---	---	---
QPSK 100%RB	Head	Left Cheek	L	14.00	14.50	1.12	---	---	---	---
			M	14.46	14.50	1.01	0.371	---	0.374	---

		Left tilt	H	13.56	14.50	1.24	---	---	---	---
			L	14.00	14.50	1.12	---	---	---	---
			M	14.46	14.50	1.01	0.174	---	0.176	---
		Right Cheek	H	13.56	14.50	1.24	---	---	---	---
			L	14.00	14.50	1.12	---	---	---	---
			M	14.46	14.50	1.01	0.632	---	0.639	---
		Right tilt	H	13.56	14.50	1.24	---	---	---	---
			L	14.00	14.50	1.12	---	---	---	---
			M	14.46	14.50	1.01	0.305	---	0.308	---
		Back	H	13.56	14.50	1.24	---	---	---	---
			L	14.00	14.50	1.12	---	---	---	---
			M	14.46	14.50	1.01	0.632	---	0.639	---
QPSK 100%RB	Body-worn	Back	L	19.94	20.50	1.14	0.709	0.762	0.808	0.869
			M	20.15	20.50	1.08	0.783	0.788	0.846	0.851
			H	19.09	20.50	1.38	0.541	0.580	0.746	0.800
		Front	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	0.530	---	0.572	---
			H	19.09	20.50	1.38	---	---	---	---
		Top	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	0.120	---	0.130	---
			H	19.09	20.50	1.38	---	---	---	---
QPSK 100%RB	Hotspot	Back	L	19.94	20.50	1.14	0.709	0.762	0.808	0.869
			M	20.15	20.50	1.08	0.783	0.788	0.846	0.851
			H	19.09	20.50	1.38	0.541	0.580	0.746	0.800
		Front	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	0.530	---	0.572	---
			H	19.09	20.50	1.38	---	---	---	---
		Top	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	0.120	---	0.130	---
			H	19.09	20.50	1.38	---	---	---	---
		Bottom	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	---	---	---	---
			H	19.09	20.50	1.38	---	---	---	---
		Left	L	19.94	20.50	1.14	0.813	0.873	0.927	0.995
			M	20.15	20.50	1.08	0.839	0.902	0.906	0.974
			H	19.09	20.50	1.38	0.591	0.633	0.815	0.874
		Right	L	19.94	20.50	1.14	---	---	---	---
			M	20.15	20.50	1.08	---	---	---	---
			H	19.09	20.50	1.38	---	---	---	---

Mode: LTE Band 12

fL (MHz)=704 MHz

fM (MHz)=707.5MHz

fH (MHz)= 711MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(d Bm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE12	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.051	---	0.057	---
			H	23.63	24.50	1.22	---	---	---	---
		Left tilt	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.029	---	0.032	---
			H	23.63	24.50	1.22	---	---	---	---
		Right Cheek	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.054	---	0.060	---
			H	23.63	24.50	1.22	---	---	---	---
		Right tilt	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.032	---	0.036	---
			H	23.63	24.50	1.22	---	---	---	---
QPSK 1RB	Body-wor n	Back	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.152	---	0.169	---
			H	23.63	24.50	1.22	---	---	---	---
		Front	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.087	---	0.097	---
			H	23.63	24.50	1.22	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.152	---	0.169	---
			H	23.63	24.50	1.22	---	---	---	---
		Front	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.087	---	0.097	---
			H	23.63	24.50	1.22	---	---	---	---
		Top	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	---	---	---	---
			H	23.63	24.50	1.22	---	---	---	---
		Bottom	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.054	---	0.060	---
			H	23.63	24.50	1.22	---	---	---	---
		Left	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	---	---	---	---
			H	23.63	24.50	1.22	---	---	---	---
		Right	L	23.94	24.50	1.14	---	---	---	---
			M	24.03	24.50	1.11	0.187	---	0.208	---
			H	23.63	24.50	1.22	---	---	---	---
QPSK	Head	Left	L	22.86	23.00	1.03	---	---	---	---

50%RB		Cheek	M	22.71	23.00	1.07	0.048	---	0.051	---
			H	22.70	23.00	1.07	---	---	---	---
		Left tilt	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.027	---	0.029	---
			H	22.70	23.00	1.07	---	---	---	---
		Right Cheek	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.052	---	0.056	---
			H	22.70	23.00	1.07	---	---	---	---
		Right tilt	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.030	---	0.032	---
			H	22.70	23.00	1.07	---	---	---	---
QPSK 50%RB	Body-wor n	Back	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.150	---	0.161	---
			H	22.70	23.00	1.07	---	---	---	---
		Front	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.086	---	0.092	---
			H	22.70	23.00	1.07	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.150	---	0.161	---
			H	22.70	23.00	1.07	---	---	---	---
		Front	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.086	---	0.092	---
			H	22.70	23.00	1.07	---	---	---	---
		Top	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	---	---	---	---
			H	22.70	23.00	1.07	---	---	---	---
		Bottom	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.052	---	0.056	---
			H	22.70	23.00	1.07	---	---	---	---
		Left	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	---	---	---	---
			H	22.70	23.00	1.07	---	---	---	---
		Right	L	22.86	23.00	1.03	---	---	---	---
			M	22.71	23.00	1.07	0.186	---	0.199	---
			H	22.70	23.00	1.07	---	---	---	---

Mode: LTE Band 13

fL (MHz)=782 MHz fM (MHz)=782MHz fH (MHz)= 782MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE13	Exposure	Position	Channel				First	Second	First	Second

The State Radio_monitoring_center Testing Center (SRTC)

Tel: 86-10-57996183

Fax: 86-10-57996388

Page number: 117 of 143

V3.0.0

	condition									
QPSK 1RB	Head	Left Cheek	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.085	---	0.088	---
			H	23.81	24.00	1.04	---	---	---	---
		Left tilt	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.054	---	0.056	---
			H	23.81	24.00	1.04	---	---	---	---
		Right Cheek	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.092	---	0.096	---
			H	23.81	24.00	1.04	---	---	---	---
		Right tilt	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.065	---	0.068	---
			H	23.81	24.00	1.04	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.178	---	0.185	---
			H	23.81	24.00	1.04	---	---	---	---
		Front	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.109	---	0.113	---
			H	23.81	24.00	1.04	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.178	---	0.185	---
			H	23.81	24.00	1.04	---	---	---	---
		Front	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.109	---	0.113	---
			H	23.81	24.00	1.04	---	---	---	---
		Top	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	---	---	---	---
			H	23.81	24.00	1.04	---	---	---	---
		Bottom	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.042	---	0.044	---
			H	23.81	24.00	1.04	---	---	---	---
		Left	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	---	---	---	---
			H	23.81	24.00	1.04	---	---	---	---
		Right	L	23.81	24.00	1.04	---	---	---	---
			M	23.81	24.00	1.04	0.151	---	0.157	---
			H	23.81	24.00	1.04	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.080	---	0.086	---

		Left tilt	H	22.72	23.00	1.07	---	---	---	---
			L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.051	---	0.055	---
		Right Cheek	H	22.72	23.00	1.07	---	---	---	---
			L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.089	---	0.095	---
		Right tilt	H	22.72	23.00	1.07	---	---	---	---
			L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.063	---	0.067	---
QPSK 50%RB	Body-worn	Back	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.172	---	0.184	---
			H	22.72	23.00	1.07	---	---	---	---
		Front	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.104	---	0.111	---
			H	22.72	23.00	1.07	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.172	---	0.184	---
			H	22.72	23.00	1.07	---	---	---	---
		Front	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.104	---	0.111	---
			H	22.72	23.00	1.07	---	---	---	---
		Top	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	---	---	---	---
			H	22.72	23.00	1.07	---	---	---	---
		Bottom	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.040	---	0.043	---
			H	22.72	23.00	1.07	---	---	---	---
		Left	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	---	---	---	---
			H	22.72	23.00	1.07	---	---	---	---
		Right	L	22.72	23.00	1.07	---	---	---	---
			M	22.72	23.00	1.07	0.146	---	0.156	---
			H	22.72	23.00	1.07	---	---	---	---

Mode: LTE Band 28

fL (MHz)=713 MHz fM (MHz)=728MHz fH (MHz)= 738MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE28	Exposure condition	Position	Channel				First	Second	First	Second

QPSK 1RB	Head	Left Cheek	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.061	---	0.066	---
			H	23.61	24.50	1.23	---	---	---	---
		Left tilt	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.043	---	0.047	---
			H	23.61	24.50	1.23	---	---	---	---
		Right Cheek	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.086	---	0.094	---
			H	23.61	24.50	1.23	---	---	---	---
		Right tilt	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.051	---	0.056	---
			H	23.61	24.50	1.23	---	---	---	---
QPSK 1RB	Body-wor n	Back	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.200	---	0.218	---
			H	23.61	24.50	1.23	---	---	---	---
		Front	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.110	---	0.120	---
			H	23.61	24.50	1.23	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.200	---	0.218	---
			H	23.61	24.50	1.23	---	---	---	---
		Front	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.110	---	0.120	---
			H	23.61	24.50	1.23	---	---	---	---
		Top	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	---	---	---	---
			H	23.61	24.50	1.23	---	---	---	---
		Bottom	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.047	---	0.051	---
			H	23.61	24.50	1.23	---	---	---	---
		Left	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	---	---	---	---
			H	23.61	24.50	1.23	---	---	---	---
		Right	L	23.85	24.50	1.16	---	---	---	---
			M	24.12	24.50	1.09	0.049	---	0.053	---
			H	23.61	24.50	1.23	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.059	---	0.065	---
			H	22.88	23.50	1.15	---	---	---	---
		Left	L	22.72	23.50	1.20	---	---	---	---

		tilt	M	23.06	23.50	1.11	0.041	---	0.046	---
			H	22.88	23.50	1.15	---	---	---	---
		Right Cheek	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.081	---	0.090	---
			H	22.88	23.50	1.15	---	---	---	---
		Right tilt	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.048	---	0.053	---
			H	22.88	23.50	1.15	---	---	---	---
QPSK 50%RB	Body-wor n	Back	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.195	---	0.216	---
			H	22.88	23.50	1.15	---	---	---	---
		Front	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.107	---	0.119	---
			H	22.88	23.50	1.15	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.195	---	0.216	---
			H	22.88	23.50	1.15	---	---	---	---
		Front	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.107	---	0.119	---
			H	22.88	23.50	1.15	---	---	---	---
		Top	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	---	---	---	---
			H	22.88	23.50	1.15	---	---	---	---
		Bottom	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.045	---	0.050	---
			H	22.88	23.50	1.15	---	---	---	---
		Left	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	---	---	---	---
			H	22.88	23.50	1.15	---	---	---	---
		Right	L	22.72	23.50	1.20	---	---	---	---
			M	23.06	23.50	1.11	0.047	---	0.052	---
			H	22.88	23.50	1.15	---	---	---	---

Mode: LTE Band 38

fL (MHz)=2580 MHz

fM (MHz)=831.5MHz

fH (MHz)= 841.5MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE38	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left	L	23.01	23.50	1.12	---	---	---	---
		Cheek	M	23.48	23.50	1.00	0.372	---	0.372	---

		Left tilt	H	23.30	23.50	1.05	---	---	---	---
			L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.145	---	0.145	---
		Right Cheek	H	23.30	23.50	1.05	---	---	---	---
			L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.627	---	0.627	---
		Right tilt	H	23.30	23.50	1.05	---	---	---	---
			L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.203	---	0.203	---
QPSK 1RB	Body-worn	Back	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.252	---	0.252	---
			H	23.30	23.50	1.05	---	---	---	---
		Front	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.170	---	0.170	---
			H	23.30	23.50	1.05	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.252	---	0.252	---
			H	23.30	23.50	1.05	---	---	---	---
		Front	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.170	---	0.170	---
			H	23.30	23.50	1.05	---	---	---	---
		Top	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	---	---	---	---
			H	23.30	23.50	1.05	---	---	---	---
		Bottom	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	---	---	---	---
			H	23.30	23.50	1.05	---	---	---	---
		Left	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	0.335	---	0.335	---
			H	23.30	23.50	1.05	---	---	---	---
		Right	L	23.01	23.50	1.12	---	---	---	---
			M	23.48	23.50	1.00	---	---	---	---
			H	23.30	23.50	1.05	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.356	---	0.370	---
			H	22.88	23.00	1.03	---	---	---	---
		Left tilt	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.138	---	0.144	---
			H	22.88	23.00	1.03	---	---	---	---

		Right Cheek	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.593	---	0.617	---
			H	22.88	23.00	1.03	---	---	---	---
		Right tilt	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.194	---	0.202	---
			H	22.88	23.00	1.03	---	---	---	---
QPSK 50%RB	Body-worn	Back	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.240	---	0.250	---
			H	22.88	23.00	1.03	---	---	---	---
		Front	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.161	---	0.167	---
			H	22.88	23.00	1.03	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.240	---	0.250	---
			H	22.88	23.00	1.03	---	---	---	---
		Front	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.161	---	0.167	---
			H	22.88	23.00	1.03	---	---	---	---
		Top	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.88	23.00	1.03	---	---	---	---
		Bottom	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.88	23.00	1.03	---	---	---	---
		Left	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	0.320	---	0.333	---
			H	22.88	23.00	1.03	---	---	---	---
		Right	L	22.51	23.00	1.12	---	---	---	---
			M	22.82	23.00	1.04	---	---	---	---
			H	22.88	23.00	1.03	---	---	---	---

Mode: LTE Band 66

fL (MHz)=1720 MHz

fM (MHz)=2595MHz

fH (MHz)= 2610MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
LTE66	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.125	---	0.126	---
			H	23.38	23.50	1.03	---	---	---	---
		Left	L	23.14	23.50	1.09	---	---	---	---

		tilt	M	23.46	23.50	1.01	0.088	---	0.089	---
			H	23.38	23.50	1.03	---	---	---	---
		Right Cheek	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.132	---	0.133	---
			H	23.38	23.50	1.03	---	---	---	---
		Right tilt	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.094	---	0.095	---
			H	23.38	23.50	1.03	---	---	---	---
QPSK 1RB	Body-worn	Back	L	23.14	23.50	1.09	0.779	0.778	0.849	0.848
			M	23.46	23.50	1.01	0.945	0.943	0.954	0.952
			H	23.38	23.50	1.03	0.912	0.910	0.939	0.937
		Front	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.493	---	0.498	---
			H	23.38	23.50	1.03	---	---	---	---
QPSK 1RB	Hotspot	Back	L	23.14	23.50	1.09	0.779	0.778	0.849	0.848
			M	23.46	23.50	1.01	0.945	0.943	0.954	0.952
			H	23.38	23.50	1.03	0.912	0.910	0.939	0.937
		Front	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.493	---	0.498	---
			H	23.38	23.50	1.03	---	---	---	---
		Top	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	---	---	---	---
			H	23.38	23.50	1.03	---	---	---	---
		Bottom	L	23.14	23.50	1.09	0.747	0.745	0.814	0.812
			M	23.46	23.50	1.01	0.850	0.848	0.859	0.856
			H	23.38	23.50	1.03	0.821	0.820	0.846	0.845
		Left	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	0.205	---	0.207	---
			H	23.38	23.50	1.03	---	---	---	---
		Right	L	23.14	23.50	1.09	---	---	---	---
			M	23.46	23.50	1.01	---	---	---	---
			H	23.38	23.50	1.03	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.120	---	0.125	---
			H	22.48	22.50	1.00	---	---	---	---
		Left tilt	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.084	---	0.087	---
			H	22.48	22.50	1.00	---	---	---	---
		Right Cheek	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.127	---	0.132	---

		Right tilt	H	22.48	22.50	1.00	---	---	---	---
			L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.090	---	0.094	---
			H	22.48	22.50	1.00	---	---	---	---
QPSK 50%RB	Body-worn	Back	L	22.09	22.50	1.10	0.745	0.744	0.820	0.818
			M	22.34	22.50	1.04	0.911	0.910	0.947	0.946
			H	22.48	22.50	1.00	0.869	0.868	0.869	0.868
		Front	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.476	---	0.495	---
			H	22.48	22.50	1.00	---	---	---	---
QPSK 50%RB	Hotspot	Back	L	22.09	22.50	1.10	0.745	0.744	0.820	0.818
			M	22.34	22.50	1.04	0.911	0.910	0.947	0.946
			H	22.48	22.50	1.00	0.869	0.868	0.869	0.868
		Front	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.476	---	0.495	---
			H	22.48	22.50	1.00	---	---	---	---
		Top	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	---	---	---	---
			H	22.48	22.50	1.00	---	---	---	---
		Bottom	L	22.09	22.50	1.10	0.715	0.714	0.787	0.785
			M	22.34	22.50	1.04	0.817	0.818	0.850	0.851
			H	22.48	22.50	1.00	0.788	0.790	0.788	0.790
		Left	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	0.198	---	0.206	---
			H	22.48	22.50	1.00	---	---	---	---
		Right	L	22.09	22.50	1.10	---	---	---	---
			M	22.34	22.50	1.04	---	---	---	---
			H	22.48	22.50	1.00	---	---	---	---
QPSK 100%RB	Head	Left Cheek	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.119	---	0.120	---
			H	22.47	22.50	1.01	---	---	---	---
		Left tilt	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.081	---	0.082	---
			H	22.47	22.50	1.01	---	---	---	---
		Right Cheek	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.128	---	0.129	---
			H	22.47	22.50	1.01	---	---	---	---
		Right tilt	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.090	---	0.091	---
			H	22.47	22.50	1.01	---	---	---	---

QPSK 100%RB	Body-worn	Back	L	22.01	22.50	1.12	0.731	0.729	0.819	0.816
			M	22.47	22.50	1.01	0.908	0.909	0.917	0.918
			H	22.47	22.50	1.01	0.857	0.858	0.866	0.867
		Front	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.473	---	0.478	---
			H	22.47	22.50	1.01	---	---	---	---
QPSK 100%RB	Hotspot	Back	L	22.01	22.50	1.12	0.731	0.729	0.819	0.816
			M	22.47	22.50	1.01	0.908	0.909	0.917	0.918
			H	22.47	22.50	1.01	0.857	0.858	0.866	0.867
		Front	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.473	---	0.478	---
			H	22.47	22.50	1.01	---	---	---	---
		Top	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	---	---	---	---
			H	22.47	22.50	1.01	---	---	---	---
		Bottom	L	22.01	22.50	1.12	0.691	0.689	0.774	0.772
			M	22.47	22.50	1.01	0.792	0.790	0.800	0.798
			H	22.47	22.50	1.01	0.758	0.759	0.766	0.767
		Left	L	22.01	22.50	1.12	---	---	---	---
			M	22.47	22.50	1.01	0.189	---	0.191	---
			H	22.47	22.50	1.01	---	---	---	---
		Right	L	22.89	23.50	1.15	---	---	---	---
			M	23.42	23.50	1.02	---	---	---	---
			H	23.29	23.50	1.05	---	---	---	---

Mode: Wi-Fi 2.4GHz

fL (MHz)=2412MHz fM (MHz)=2437MHz fH (MHz)= 2462MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty cycle	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WLAN2.4 GHz	Exposure condition	Position	Channel						First	Second	First	Second
802.11b	Head	Left Cheek	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.333	---	0.369	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Left tilt	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.796	---	0.882	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---

		Right Cheek	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.272	---	0.302	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Right tilt	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.334	---	0.370	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
802.11b	Body-worn	Back	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.260	---	0.288	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Front	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.202	---	0.224	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
802.11b	Hotspot	Back	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.260	---	0.288	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Front	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.202	---	0.224	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Top	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.312	---	0.346	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Bottom	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	---	---	---	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Left	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	---	---	---	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---
		Right	L	16.42	17.50	1.28	99%	1.01	---	---	---	---
			M	17.09	17.50	1.10	99%	1.01	0.163	---	0.181	---
			H	16.15	17.50	1.36	99%	1.01	---	---	---	---

Mode: Wi-Fi 5.2GHz

fL (MHz)=5210MHz fM (MHz)=5220MHz

fH (MHz)= 5240MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(dBm)	Scaling factor	Duty cycle	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WLAN5GHz UNII-1	Exposure condition	Position	Channel						First	Second	First	Second
802.11a	Head	Left Cheek	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.749	---	0.885	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Left tilt	L	13.28	13.50	1.05	95%	1.05	1.067	1.065	1.181	1.179
			M	13.00	13.50	1.12	95%	1.05	1.010	1.008	1.193	1.191
			H	12.44	13.50	1.28	95%	1.05	0.877	0.876	1.184	1.182
		Right Cheek	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.435	---	0.514	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Right tilt	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.531	---	0.627	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
802.11a	Body-wor n	Back	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.150	---	0.177	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Front	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.134	---	0.158	---
802.11a	Hotspot	Back	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.150	---	0.177	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Front	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.134	---	0.158	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Top	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	0.492	---	0.581	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Bottom	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	---	---	---	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Left	L	13.28	13.50	1.05	95%	1.05	---	---	---	---
			M	13.00	13.50	1.12	95%	1.05	---	---	---	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---
		Right	L	13.28	13.50	1.05	95%	1.05	---	---	---	---

			M	13.00	13.50	1.12	95%	1.05	0.103	---	0.122	---
			H	12.44	13.50	1.28	95%	1.05	---	---	---	---

Mode: Wi-Fi 5.8GHz

fL (MHz)=5745MHz

fM (MHz)=5785MHz

fH (MHz)= 5825MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up(d Bm)	Scaling factor	Duty cycle	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
WLAN5GHz UNII-3	Exposure condition	Position	Channel						First	Second	First	Second
802.11a	Head	Left Cheek	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.717	---	0.899	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Left tilt	L	13.55	14.00	1.11	95%	1.05	0.996	0.995	1.165	1.164
			M	13.23	14.00	1.19	95%	1.05	0.982	0.980	1.231	1.229
			H	13.05	14.00	1.24	95%	1.05	0.940	0.941	1.228	1.229
		Right Cheek	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.455	---	0.570	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Right tilt	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.575	---	0.721	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
802.11a	Body-wor n	Back	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.222	---	0.278	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Front	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.192	---	0.241	---
802.11a	Hotspot	Back	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.222	---	0.278	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Front	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.192	---	0.241	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Top	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.548	---	0.687	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Bottom	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	---	---	---	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Left	L	13.55	14.00	1.11	95%	1.05	---	---	---	---
			M	13.23	14.00	1.19	95%	1.05	0.002	---	0.003	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---
		Right	L	13.55	14.00	1.11	95%	1.05	---	---	---	---

			M	13.23	14.00	1.19	95%	1.05	0.001	---	0.001	---
			H	13.05	14.00	1.24	95%	1.05	---	---	---	---

Mode: Bluetooth

fL (MHz)=2402MHz fM (MHz)=2440MHz

fH (MHz)= 2480MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Duty cycle	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
BT	Exposure condition	Position	Channel						First	Second	First	Second
BLE	Head	Left Cheek	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.072	---	0.082	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Left tilt	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.051	---	0.058	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Right Cheek	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.041	---	0.047	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Right tilt	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.022	---	0.025	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
BLE	Body-worn	Back	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.001	---	0.001	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Front	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.001	---	0.001	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
BLE	Hotspot (Support Bluetooth Thetering)	Back	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.001	---	0.001	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Front	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.001	---	0.001	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Top	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	0.002	---	0.002	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Bottom	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	---	---	---	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Left	L	6.16	6.50	1.08	90%	1.12	---	---	---	---
			M	4.90	5.00	1.02	90%	1.12	---	---	---	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---
		Right	L	6.16	6.50	1.08	90%	1.12	---	---	---	---

			M	4.90	5.00	1.02	90%	1.12	0.001	---	0.001	---
			H	5.17	5.50	1.08	90%	1.12	---	---	---	---

6.6 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.7 Simultaneous Transmission SAR Analysis

	WWAN		WLAN / BT
1)	one of the bands supported by the Device	+	WLAN (2.4GHz SISO)
2)		+	WLAN (5GHz SISO)
3)		+	Bluetooth
4)		+	WLAN (5GHz SISO) + Bluetooth

Exposure condition	Position	WWAN +BT	WWAN +WLAN2.4GHz	WWAN +WLAN5GHz	WWAN +BT +WLAN5GHz	Simultaneous Transmission	
Head	Left cheek	0.505	0.792	1.322	1.404	LTE Band7C+BT +WLAN5GHz	1.404
	Left tilt	0.259	1.083	1.432	1.490	LTE Band7C+BT +WLAN5GHz	1.490
	Right cheek	0.764	1.019	1.288	1.334	LTE Band7C+BT +WLAN5GHz	1.334
	Right tilt	0.373	0.718	1.068	1.093	LTE Band7C+BT +WLAN5GHz	1.093
Body worn	Back	1.194	1.481	1.471	1.472	LTE Band7+WLAN2.4GHz	1.481
	Front	0.876	1.099	1.115	1.116	LTE Band7+BT +WLAN5GHz	1.116
Hotspot	Back	1.194	1.481	1.471	1.472	LTE Band7+WLAN2.4GHz	1.481
	Front	0.876	1.099	1.115	1.116	LTE Band7+BT +WLAN5GHz	1.116
	Top	0.137	0.480	0.821	0.824	LTE Band7C+BT+WLAN5GHz	0.824
	Bottom	1.193	1.193	1.193	1.193	WCDMA Band II	1.193
	Left	1.194	1.194	1.196	1.196	LTE Band7+WLAN5GHz	1.196
	Right	0.257	0.437	0.378	0.379	WCDMA Band V+WLAN2.4GHz	0.437

According to the above tables, SAR values < 1.6W/kg meet the compliance.

7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^P	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c _i) 1g	(c _i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v _i) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^p	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	√3	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the ‘advanced extrapolation’ algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	546	2021.08.25	2022.08.24
DAE	DAE4	720	2021.10.08	2022.10.07
Dosimetric E-field Probe	EX3DV4	3708	2021.10.20	2022.10.19
Dosimetric E-field Probe	ES3DV3	3127	2021.08.27	2022.08.26
Dipole Validation Kit	D750V3	1101	2020.10.16	2023.10.15
Dipole Validation Kit	D835V2	4d023	2020.10.16	2023.10.15
Dipole Validation Kit	D900V2	171	2020.09.17	2023.09.16
Dipole Validation Kit	D1800V2	2d084	2020.09.18	2023.09.17
Dipole Validation Kit	D2000V2	1009	2020.10.14	2023.10.13
Dipole Validation Kit	D2450V2	738	2020.10.13	2023.10.12
Dipole Validation Kit	D2600V2	1166	2019.11.08	2022.11.07
Dipole Validation Kit	D5GHzV2	1079	2020.10.10	2023.10.09

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2021.08.20	2022.08.19
Signal Generator	SML 03	103514	2021.08.20	2022.08.19
Power meter	E4417A	MY45101182	2021.08.20	2022.08.19
Power meter	E4417A	MY45101004	2021.08.20	2022.08.19
Power Sensor	E4412A	MY41502214	2021.08.20	2022.08.19
Power Sensor	E4412A	MY41502130	2021.08.20	2022.08.19
Power Sensor	E9300B	MY41496001	2021.08.20	2022.08.19
Power Sensor	E9300B	MY41496003	2021.08.20	2022.08.19
Communication Tester	E5515C	MY48367401	2021.08.20	2022.08.19
Communication Tester	CMW500	161702	2021.08.20	2022.08.19
Communication Tester	MT8820C	6201300660	2021.08.20	2022.08.19
Communication Tester	MT8821C	6201547819	2021.08.20	2022.08.19
Vector Network Analyzer	E5071C	MY43030474	2021.08.20	2022.08.19
Calibration Kit	85054D	MY39200751	2021.08.20	2022.08.19

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
 - a) After a dipole is damaged and properly repaired to meet required specifications.
 - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
 - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times$ 0.2) or not meeting the required 20 dB minimum return-loss requirement.
 - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement

Dipole

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

Dipole450 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	59.1 Ω +0.06j Ω	55.5 Ω +6.40j Ω
Return loss	-21.6 dB	-21.9 dB

Dipole750 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.8 Ω -4.02j Ω	53.7 Ω -1.63j Ω
Return loss	-25.5 dB	-28.2dB

Dipole835 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	54.5 Ω -6.16j Ω	52.6 Ω -2.37j Ω
Return loss	-34.1 dB	-29.3dB

Dipole900 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.0 Ω -5.24j Ω	49.1 Ω -6.69j Ω
Return loss	-23.2 dB	-23.4dB

Dipole1450 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	54.7 Ω +3.95j Ω	52.4 Ω -1.35j Ω
Return loss	-33.1 dB	-31.5dB

Dipole1800 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	44.2 Ω +5.06j Ω	48.9 Ω -2.71j Ω
Return loss	-31.8 dB	-30.6dB

Dipole2000 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.9Ω-3.37jΩ	49.4Ω-2.46jΩ
Return loss	-28.4 dB	-31.9dB

Dipole2450 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.2Ω-9.98jΩ	53.3Ω+6.38jΩ
Return loss	-19.9 dB	-23.1dB

Dipole2600 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	50.4Ω+6.71jΩ	47.9Ω-7.80jΩ
Return loss	-23.5 dB	-21.7dB

Dipole3500 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.3Ω-10.48jΩ	52.6Ω+3.5jΩ
Return loss	-29.5 dB	-27.4dB

Dipole3700 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	46.0Ω+6.99jΩ	48.3Ω+1.1jΩ
Return loss	-34.5 dB	-33.6dB

Dipole3900 TSL Parameters (3900MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.8Ω-11.48jΩ	48.3Ω-4.9jΩ
Return loss	-28.7 dB	-25.6dB

Dipole3900 TSL Parameters (4100MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.6Ω+9.70jΩ	59.0Ω-0.8jΩ
Return loss	-17.1 dB	-21.6dB

Dipole4200 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	43.9Ω+1.52jΩ	48.3Ω+1.10jΩ
Return loss	-33.5 dB	-33.6dB

Dipole4600 TSL Parameters (4500MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	46.0Ω-1.14jΩ	46.4Ω-4.5jΩ
Return loss	-27.2 dB	-24.5dB

Dipole4600 TSL Parameters (4600MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	49.0Ω-7.87jΩ	51.8Ω-6.35jΩ
Return loss	-20.7 dB	-23.8dB

Dipole4600 TSL Parameters (4700MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	55.0Ω+0.91jΩ	55.9Ω-3.20jΩ
Return loss	-26.2 dB	-24.0dB

Dipole4900 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	45.8Ω-1.40jΩ	50.6Ω-5.2jΩ
Return loss	-26.7 dB	-25.7dB

Dipole5GHz TSL Parameters (5200MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.2Ω+13.89jΩ	50.2Ω-10.0jΩ
Return loss	-17.0 dB	-20.0dB

Dipole5GHz TSL Parameters (5300MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	52.0Ω-11.40jΩ	47.2Ω-7.33jΩ
Return loss	-18.4 dB	-21.9dB

Dipole5GHz TSL Parameters (5500MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.6Ω+6.61jΩ	52.0Ω-7.96jΩ
Return loss	-18.6 dB	-21.9dB

Dipole5GHz TSL Parameters (5600MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.6Ω+7.31jΩ	55.7Ω-3.78jΩ

Return loss	-22.1 dB	-23.8dB
-------------	----------	---------

Dipole5GHz TSL Parameters (5800MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.6Ω-5.96jΩ	53.7Ω-5.87jΩ
Return loss	-19.0 dB	-23.5dB