

01_GSM850_GPRS (2 Tx slots)_Right Cheek_0mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.364 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.378 W/kg; SAR (10g) = 0.293 W/kg;

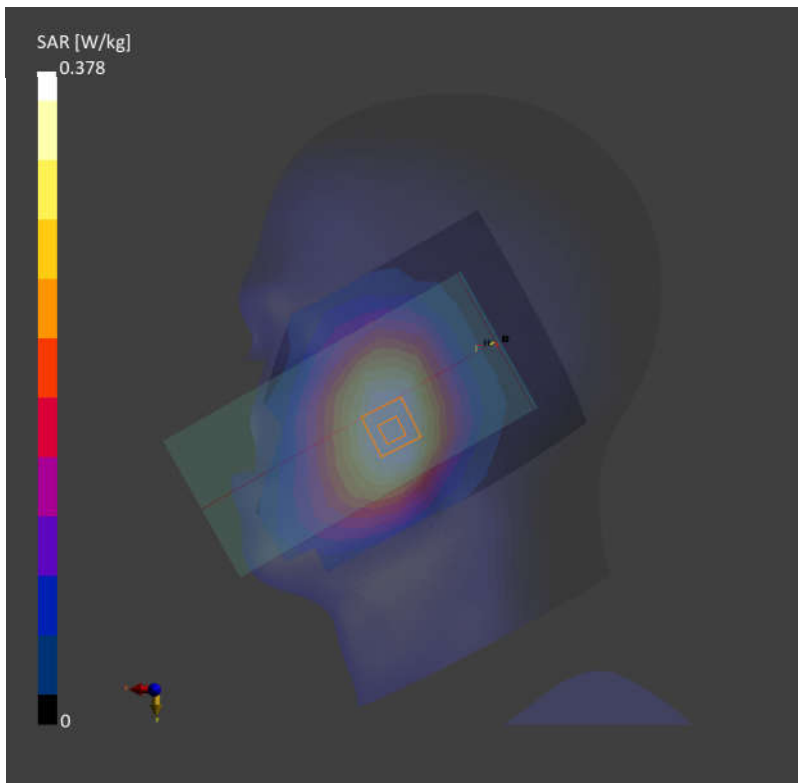

02_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.285 W/kg; SAR (10g) = 0.196 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.300 W/kg; SAR (10g) = 0.233 W/kg;

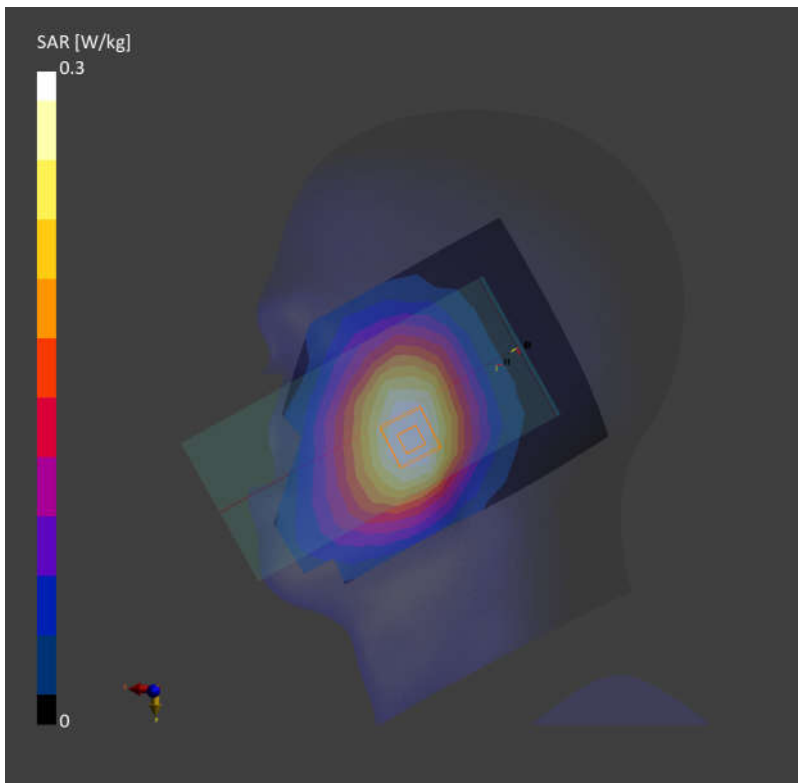

03_LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.213 W/kg; SAR (10g) = 0.168 W/kg;

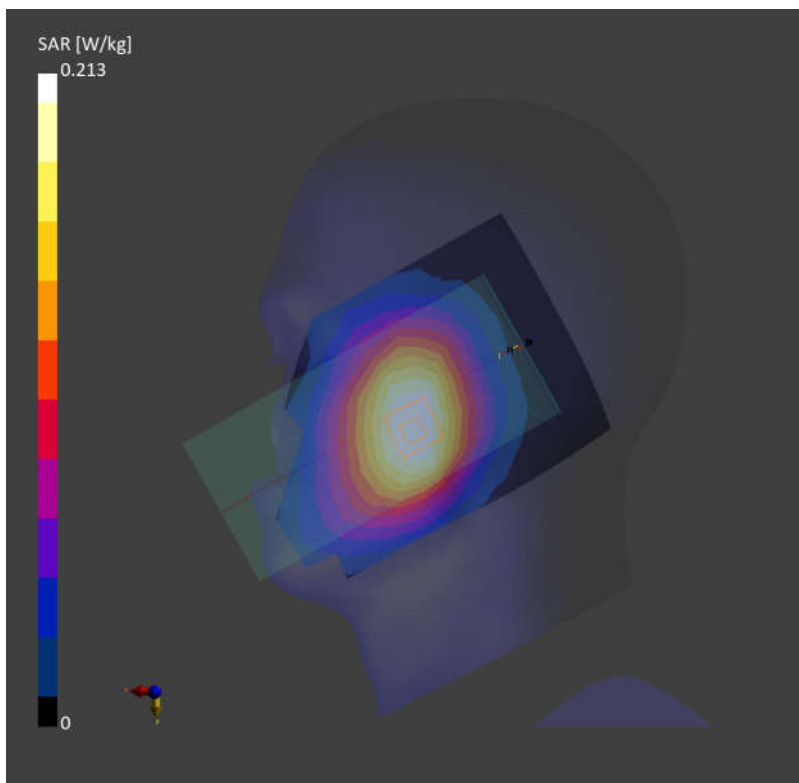

04_FR1 n26_20M_QPSK_50RB_28Offset_Right Cheek_0mm_Ch166300

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.184 W/kg; SAR (10g) = 0.127 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.191 W/kg; SAR (10g) = 0.149 W/kg;

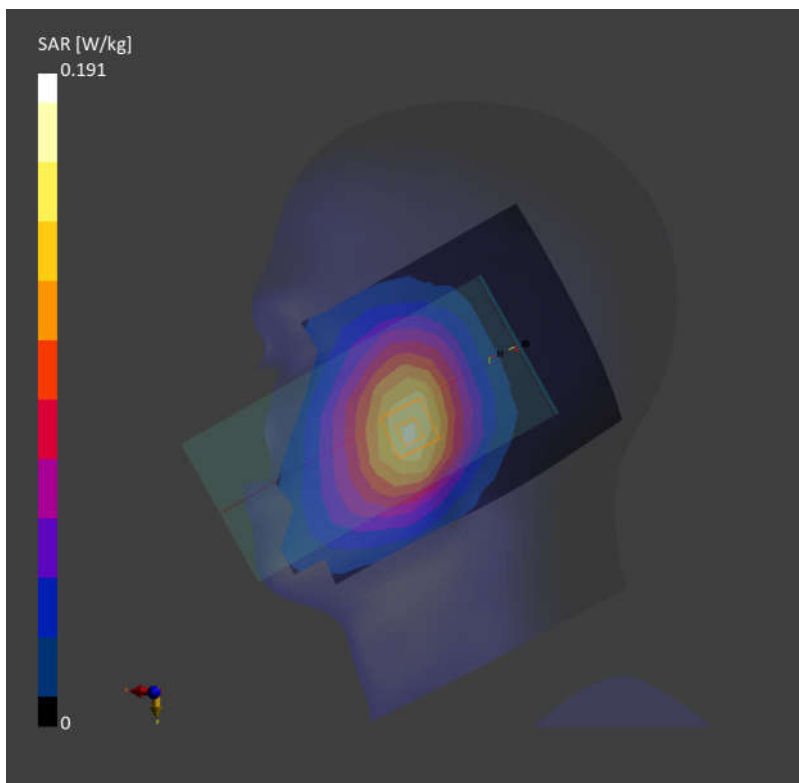

05_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch661

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.068 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.148 W/kg; SAR (10g) = 0.092 W/kg;

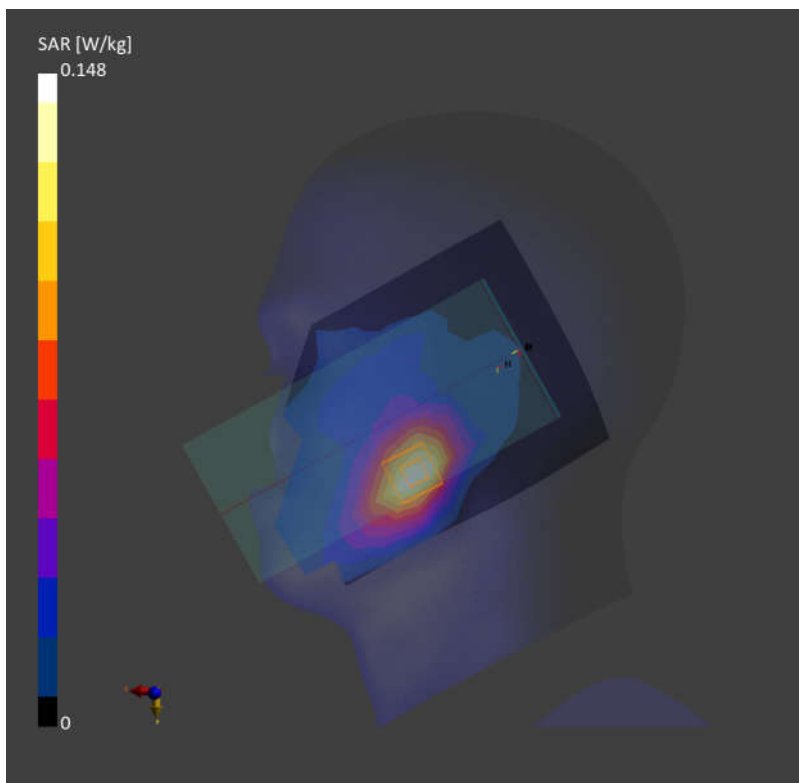

06_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.114 W/kg; SAR (10g) = 0.066 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.120 W/kg; SAR (10g) = 0.075 W/kg;

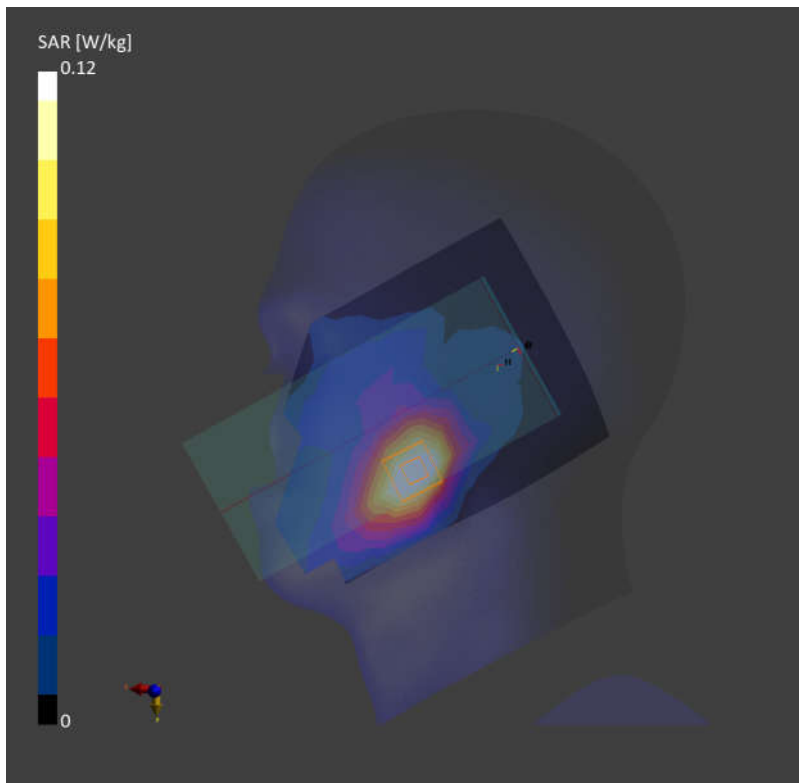

07_LTE Band 2_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch18900

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.072 W/kg; SAR (10g) = 0.041 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.079 W/kg; SAR (10g) = 0.048 W/kg;

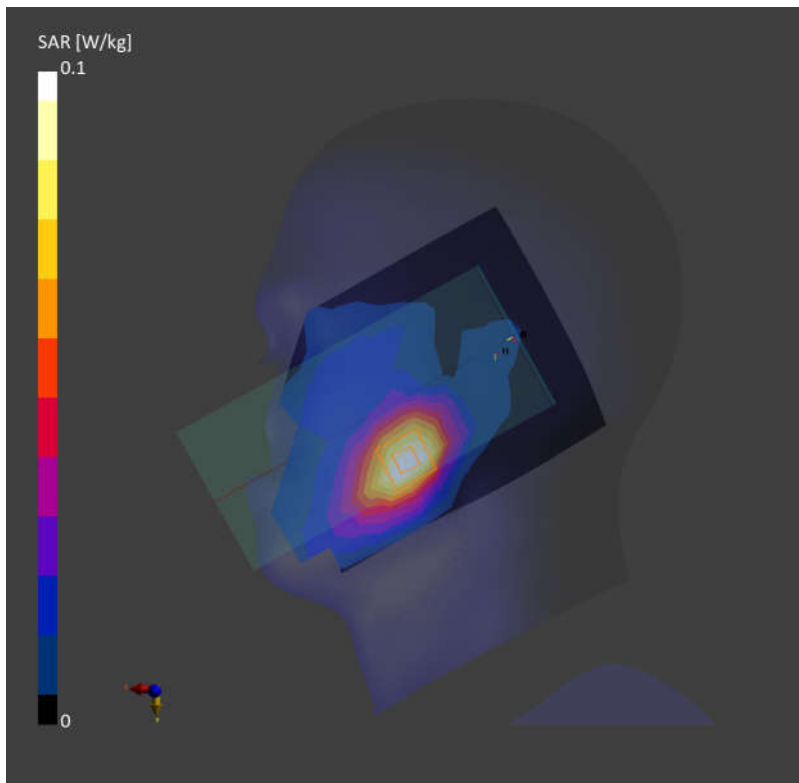

08_LTE Band 7_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch21100

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.291 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.677 W/kg; SAR (10g) = 0.301 W/kg;

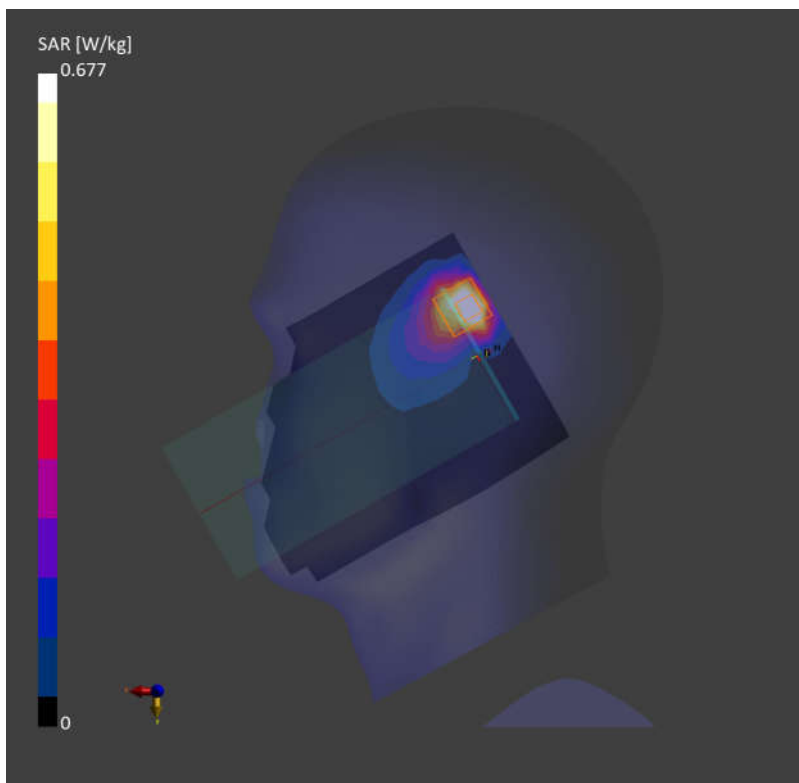

09_LTE Band 41_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch39750

Communication System: Band 41; Frequency: 2506.000

Medium: HSL. Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.269 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.676 W/kg; SAR (10g) = 0.292 W/kg;

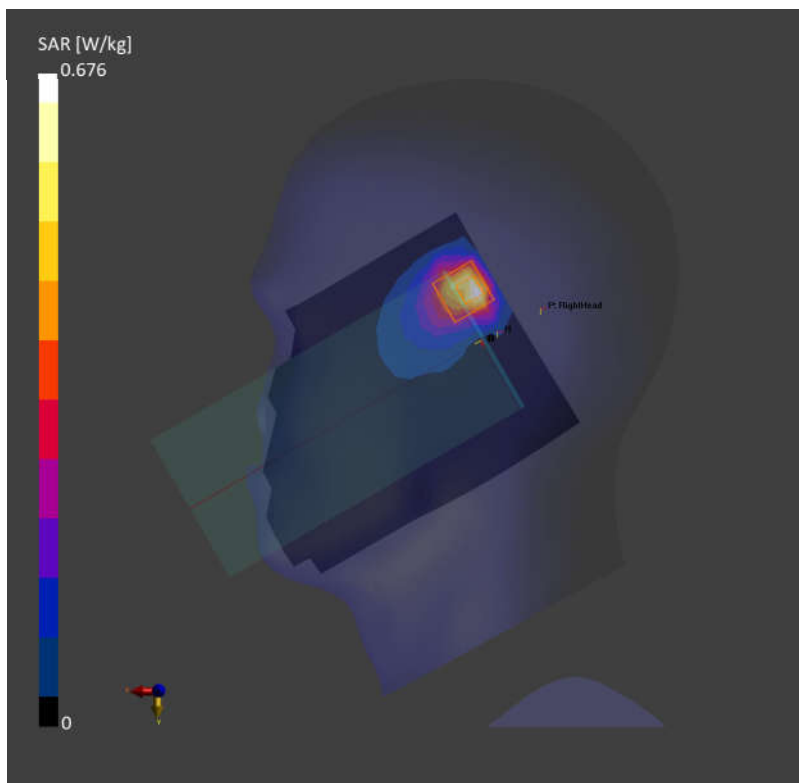

10_FR1 n7_40M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch507000

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.601 W/kg; SAR (10g) = 0.308 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.590 W/kg; SAR (10g) = 0.305 W/kg;

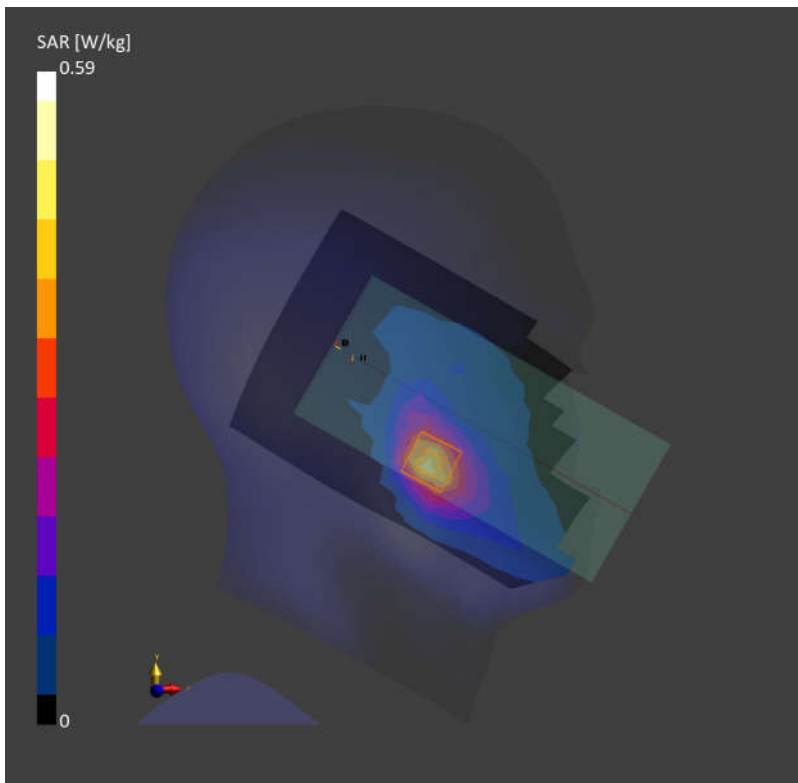

11_FR1 n41_100M_QPSK_1RB_1Offset_Right Tilted_0mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.297 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.304 W/kg;

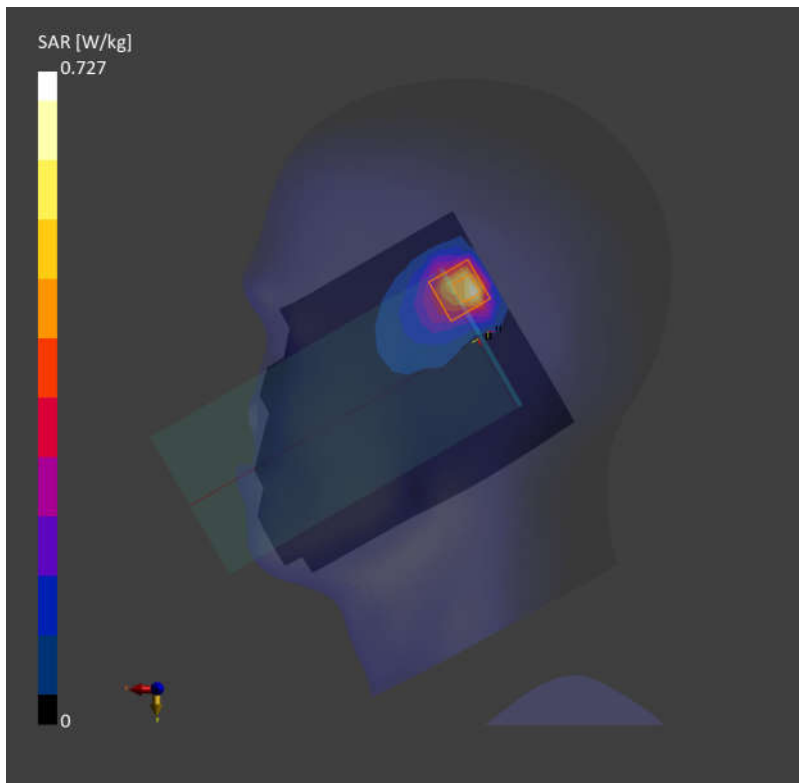

12_LTE Band 42_20M_QPSK_1RB_0Offset_Left Tilted_0mm_Ch42190

Communication System: Band 42; Frequency: 3460.000

Medium: HSL. Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.84$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.701 W/kg; SAR (10g) = 0.296 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.301 W/kg;

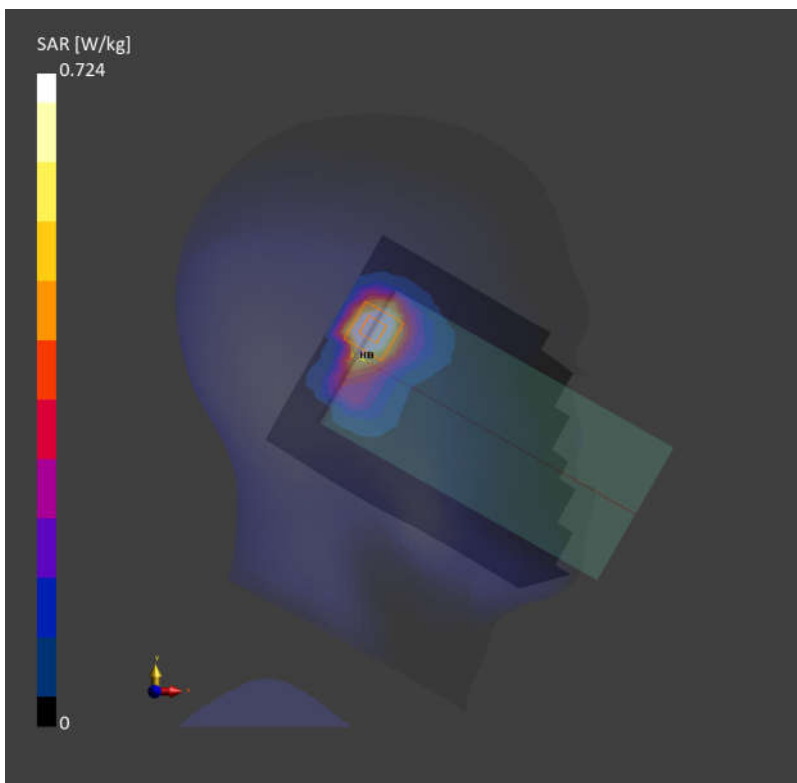

13_FR1 n77 Part 27O_100M_QPSK_1RB_1Offset_Left Tilted_0mm_Ch656000

Communication System: Band n77; Frequency: 3840.000

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.22$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.676 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.706 W/kg; SAR (10g) = 0.294 W/kg;

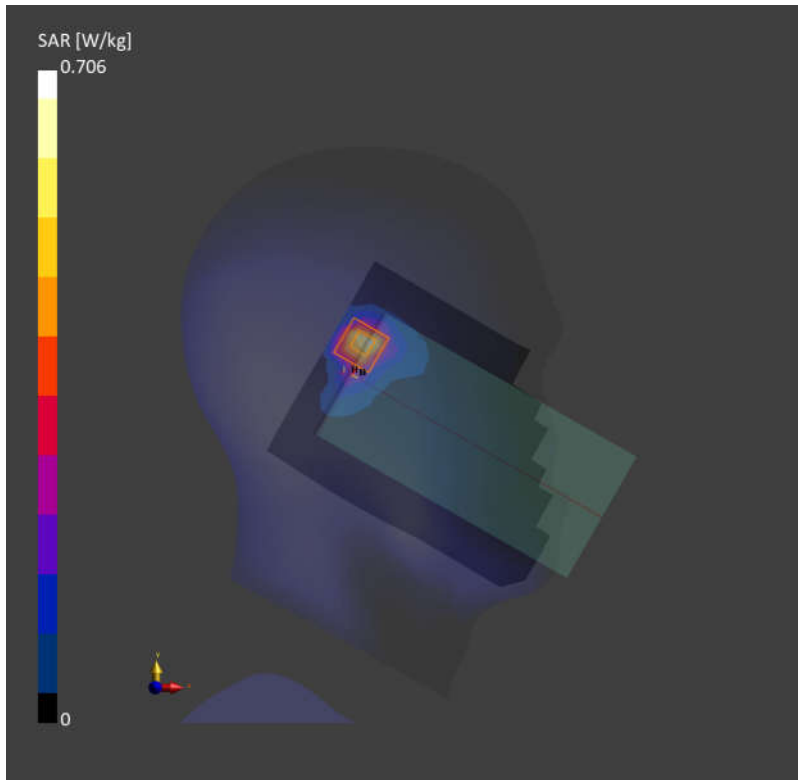

14_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.871 W/kg; SAR (10g) = 0.466 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.896 W/kg; SAR (10g) = 0.481 W/kg;

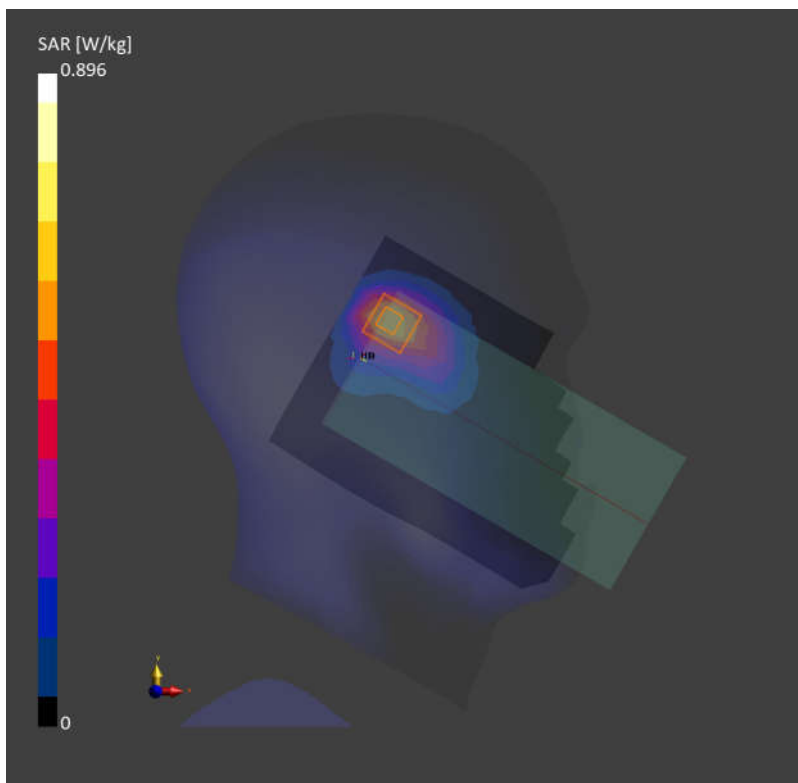

15_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: WLAN 2.4GHz; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.286 W/kg; SAR (10g) = 0.161 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.166 W/kg;

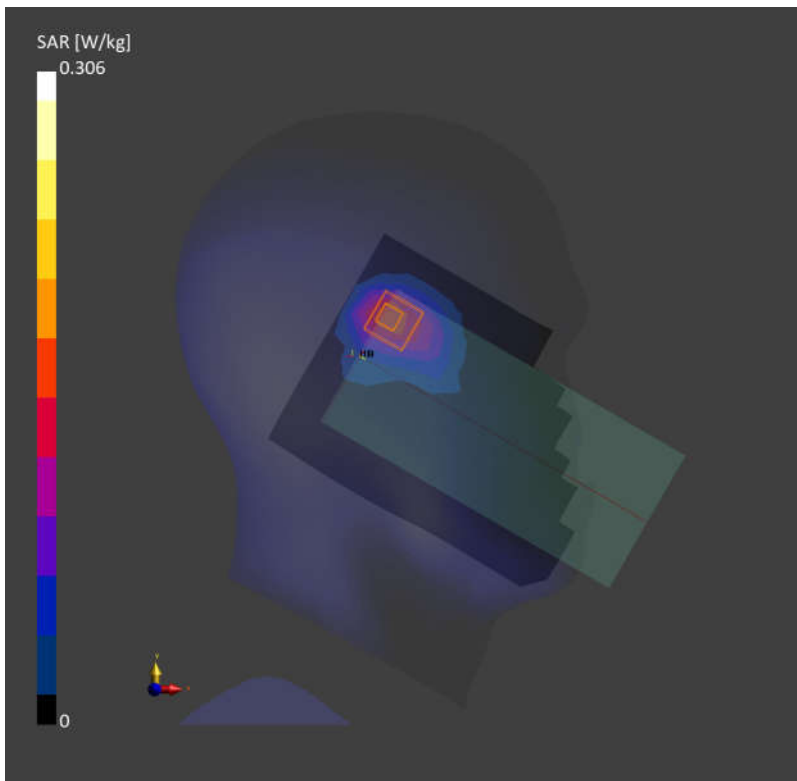

16_WLAN5GHz_802.11n-HT40 MCS0_Left Tilted_0mm_Ch62

Communication System: WLAN 5GHz; Frequency: 5310.000

Medium: HSL. Medium parameters used: $f = 5310.000$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.201 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.189 W/kg;

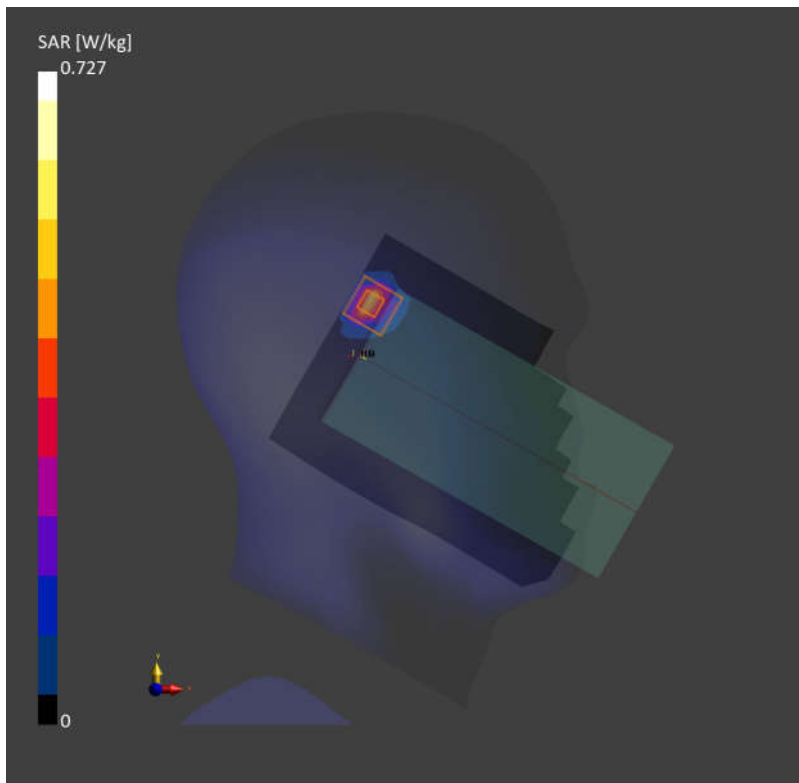

17_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_0mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.000

Medium: HSL. Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.653 W/kg; SAR (10g) = 0.202 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.700 W/kg; SAR (10g) = 0.186 W/kg;

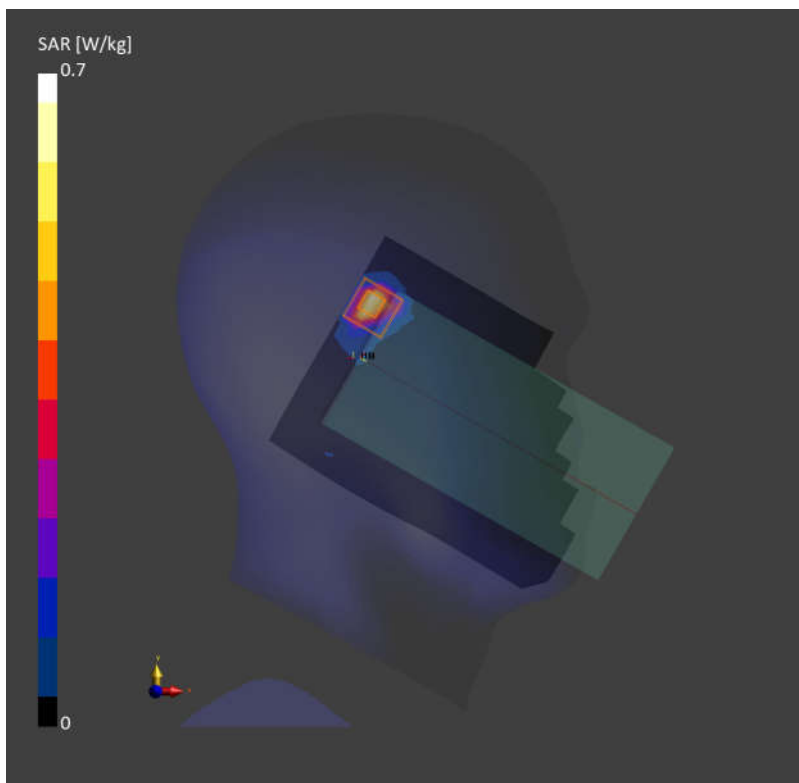

18_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.755 W/kg; SAR (10g) = 0.206 W/kg;

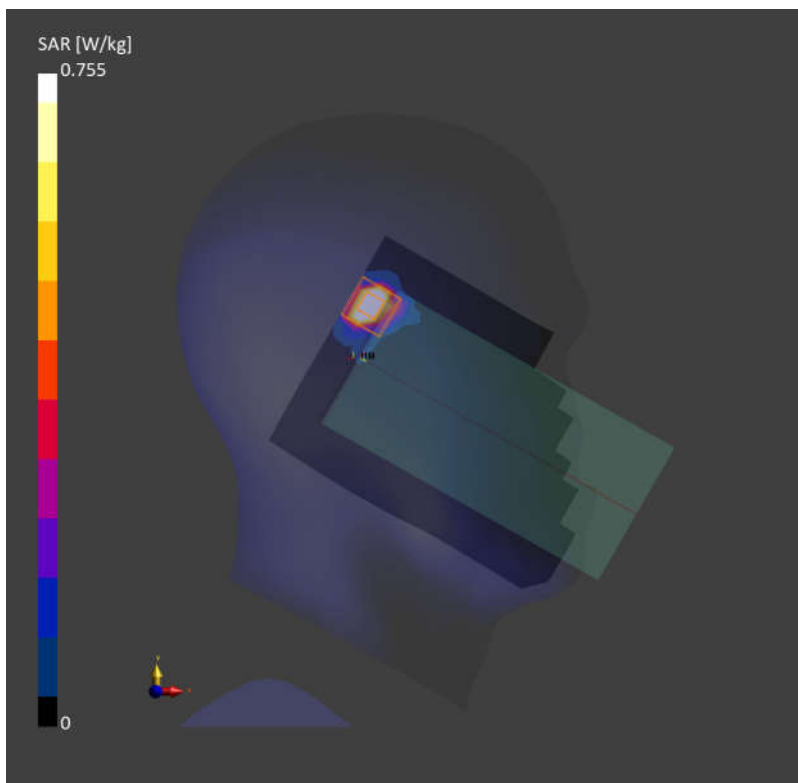

19_GSM850_GPRS (2 Tx slots)_Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.965 W/kg; SAR (10g) = 0.618 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = -0.06 dB

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.674 W/kg;

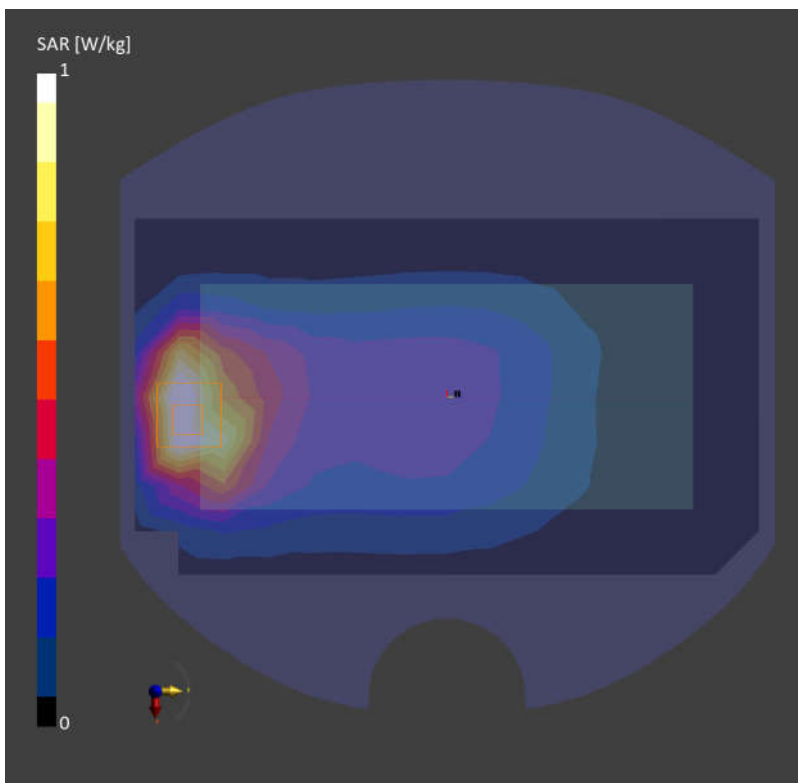

20_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.656 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.589 W/kg;

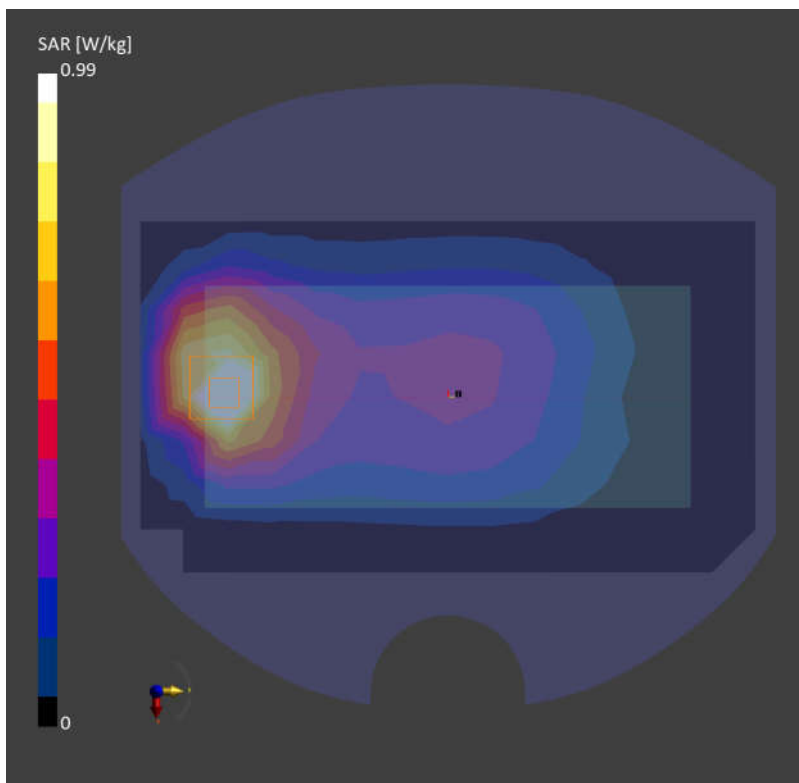

21_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.608 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.502 W/kg;

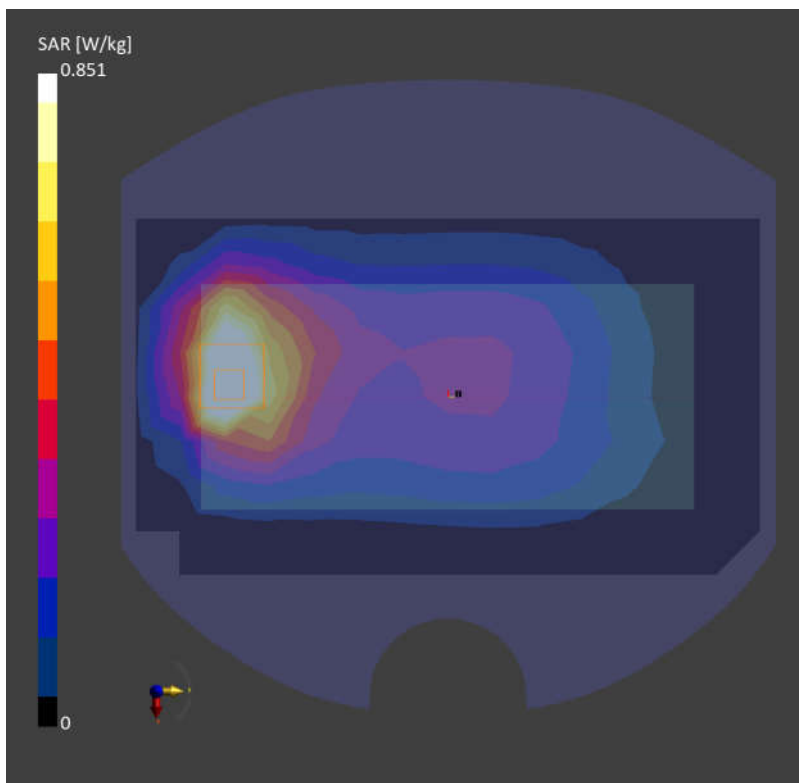

22_FR1 n26_20M_QPSK_1RB_1Offset_Back_5mm_Ch166300

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.729 W/kg; SAR (10g) = 0.444 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.377 W/kg;

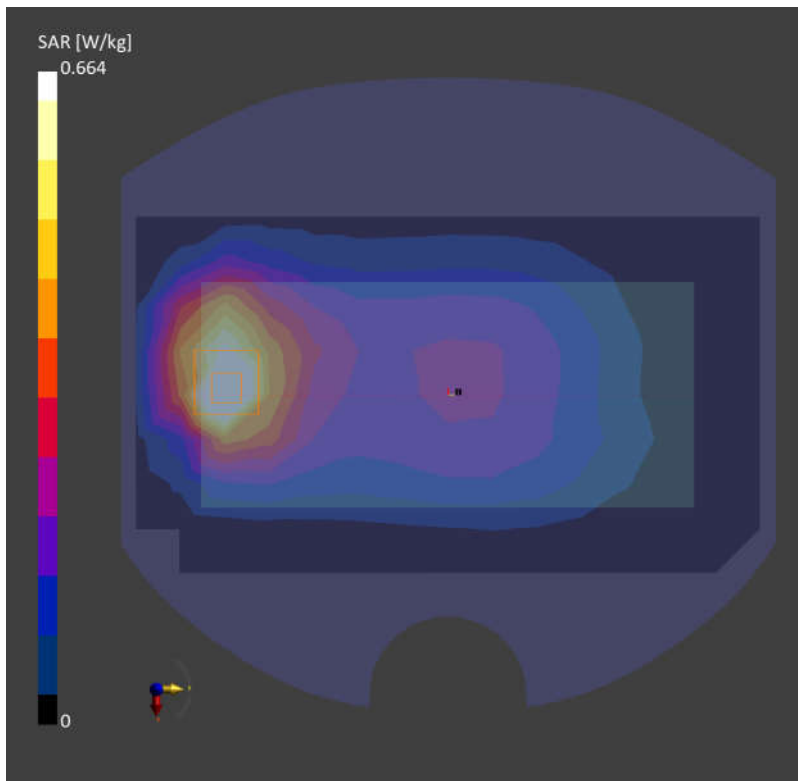

23_GSM1900_GPRS (4 Tx slots)_Bottom Side_5mm_Ch512

Communication System: PCS 1900; Frequency: 1850.200

Medium: HSL. Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.893 W/kg; SAR (10g) = 0.447 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.946 W/kg; SAR (10g) = 0.457 W/kg;

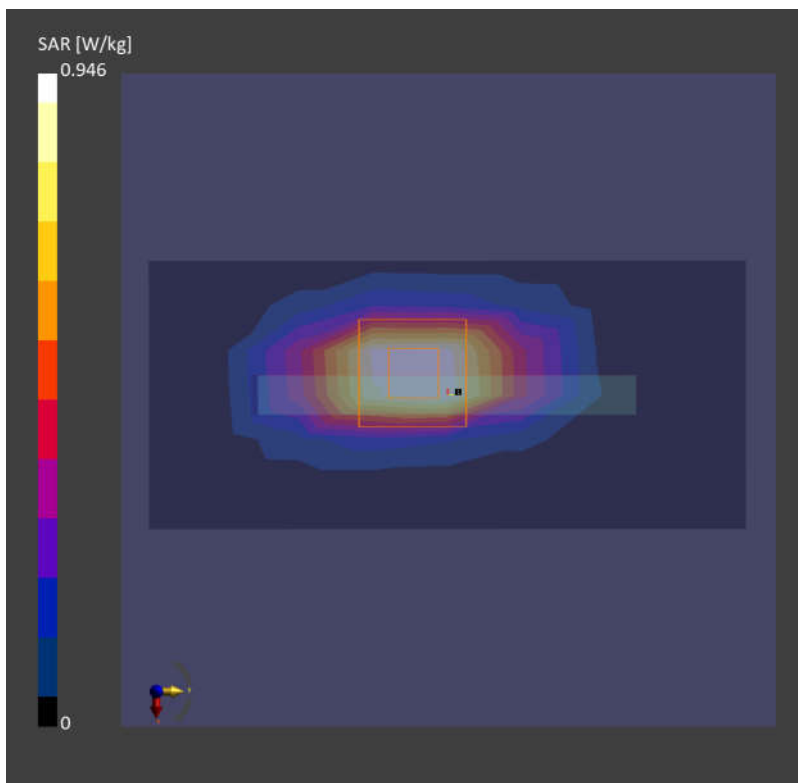

24_WCDMA II_RMC 12.2Kbps_Bottom Side_5mm_Ch9262

Communication System: Band 2; Frequency: 1852.400

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.854 W/kg; SAR (10g) = 0.431 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.959 W/kg; SAR (10g) = 0.457 W/kg;

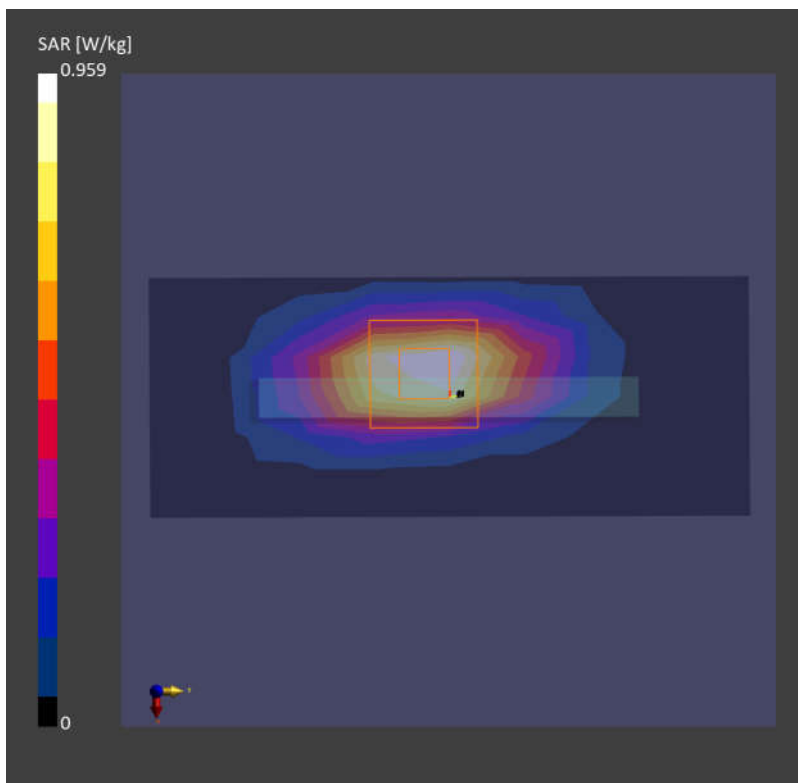

25_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch18900

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.522 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.930 W/kg; SAR (10g) = 0.498 W/kg;

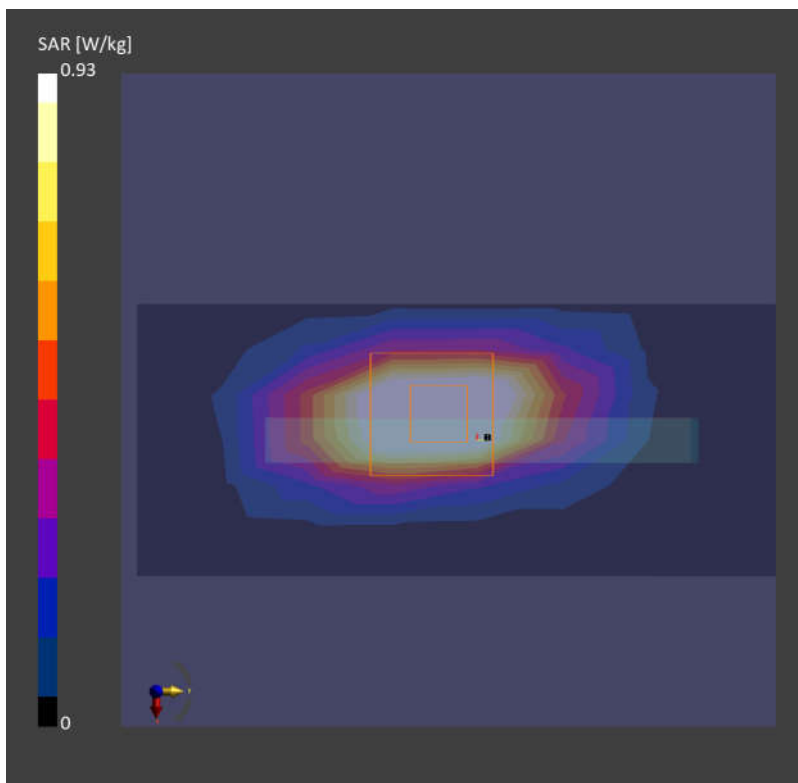

26_LTE Band 7_20M_QPSK_1RB_0Offset_Back_5mm_Ch21100

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.499 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.983 W/kg; SAR (10g) = 0.472 W/kg;

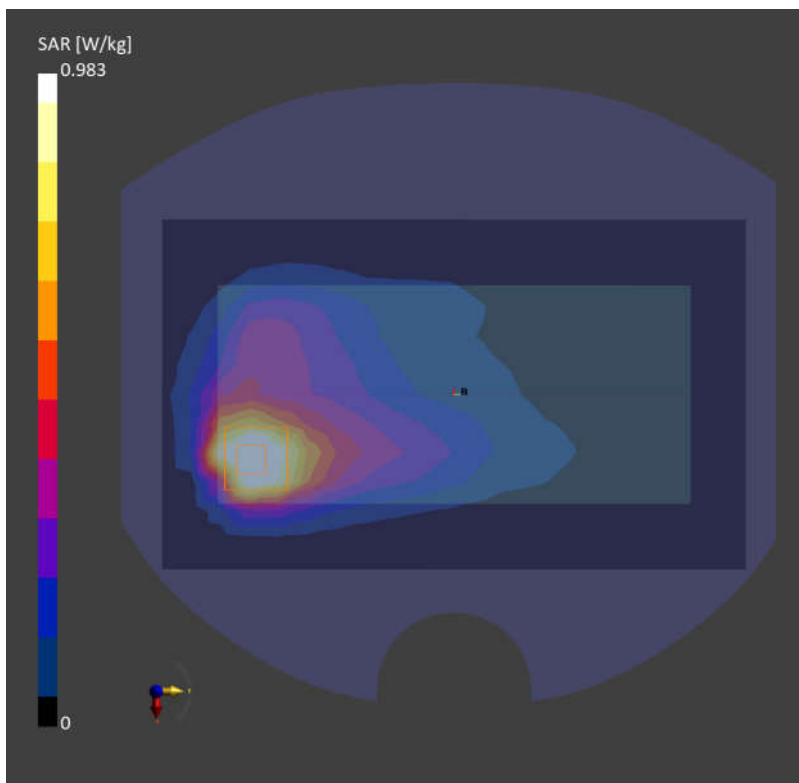

27_LTE Band 41_20M_QPSK_1RB_0Offset_Back_5mm_Ch41055

Communication System: Band 41; Frequency: 2636.500

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.394 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.939 W/kg; SAR (10g) = 0.423 W/kg;

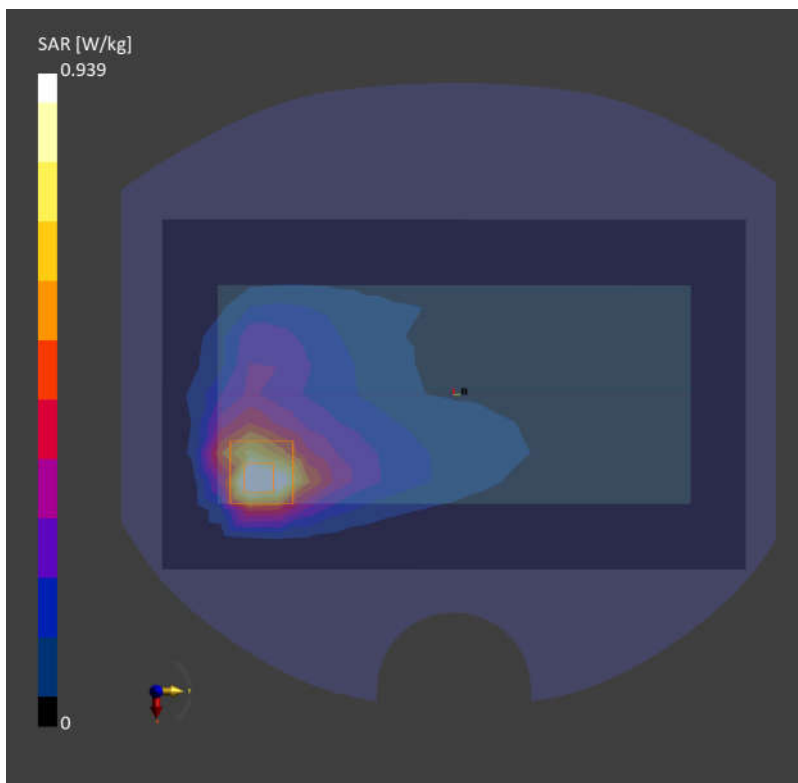

28_FR1 n7_40M_QPSK_108RB_54Offset_Back_5mm_Ch507000

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.376 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.957 W/kg; SAR (10g) = 0.439 W/kg;

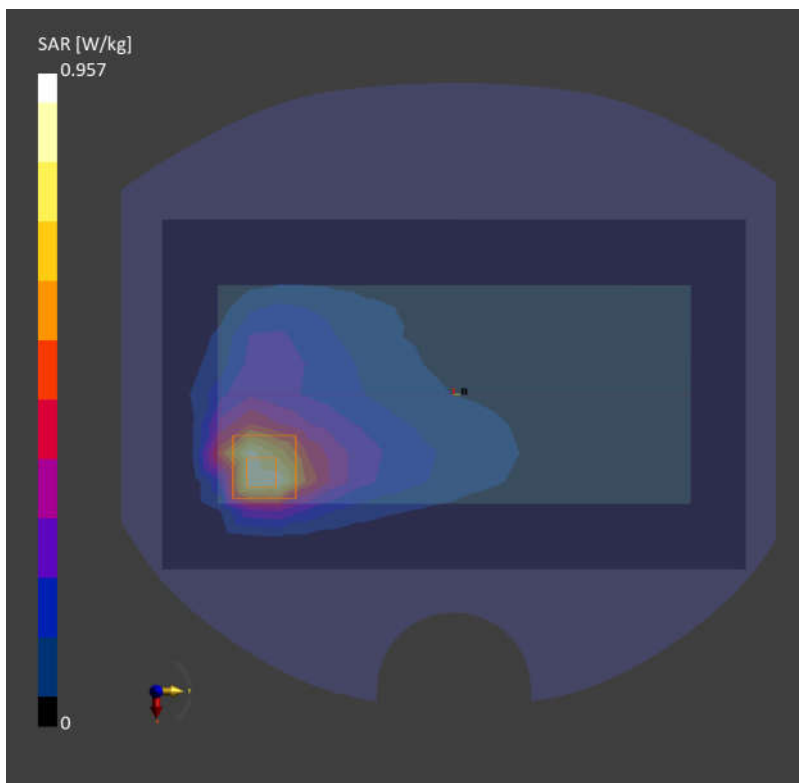

29_FR1 n41_100M_QPSK_135RB_69Offset_Back_5mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.177 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.456 W/kg; SAR (10g) = 0.211 W/kg;

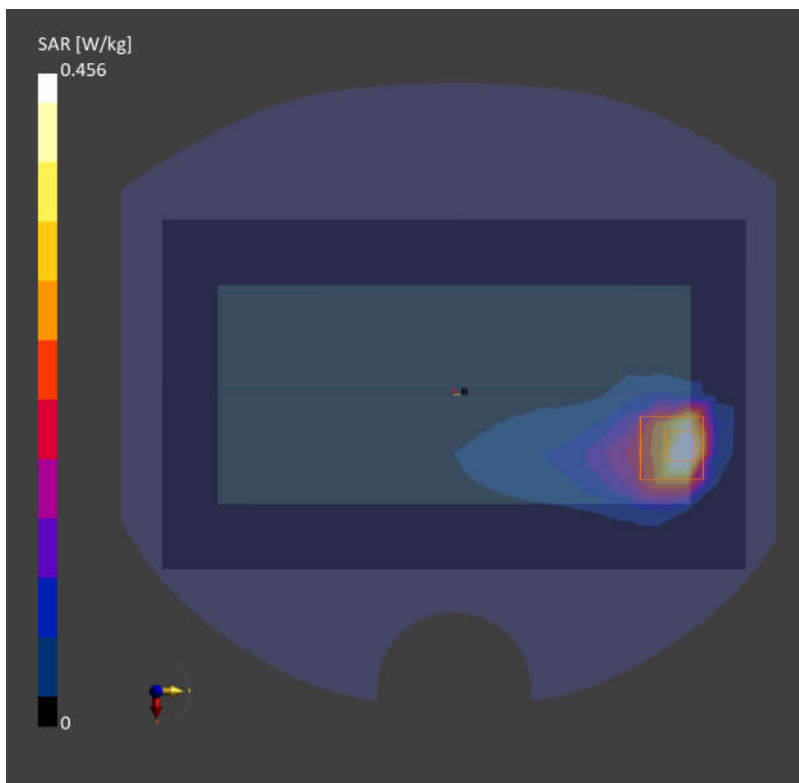

30_LTE Band 42_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch42590

Communication System: Band 42; Frequency: 3500.000

Medium: HSL. Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.80$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.191 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.461 W/kg; SAR (10g) = 0.185 W/kg;

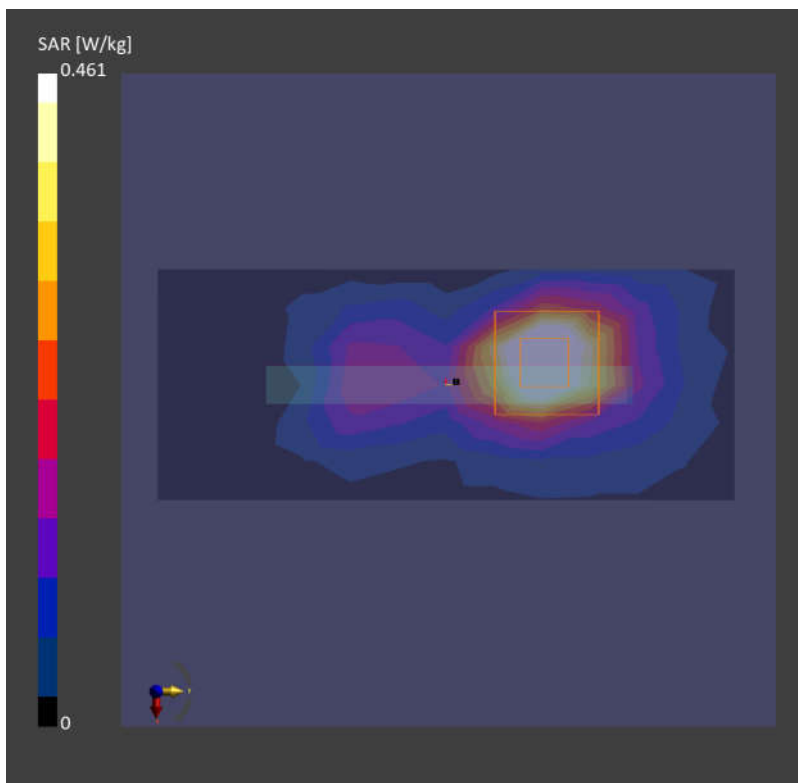

31_FR1 n77 Part 27O HPUE_100M_QPSK_1RB_1Offset_Back_5mm_Ch656000

Communication System: Band n77; Frequency: 3840.000

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.275 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.268 W/kg;

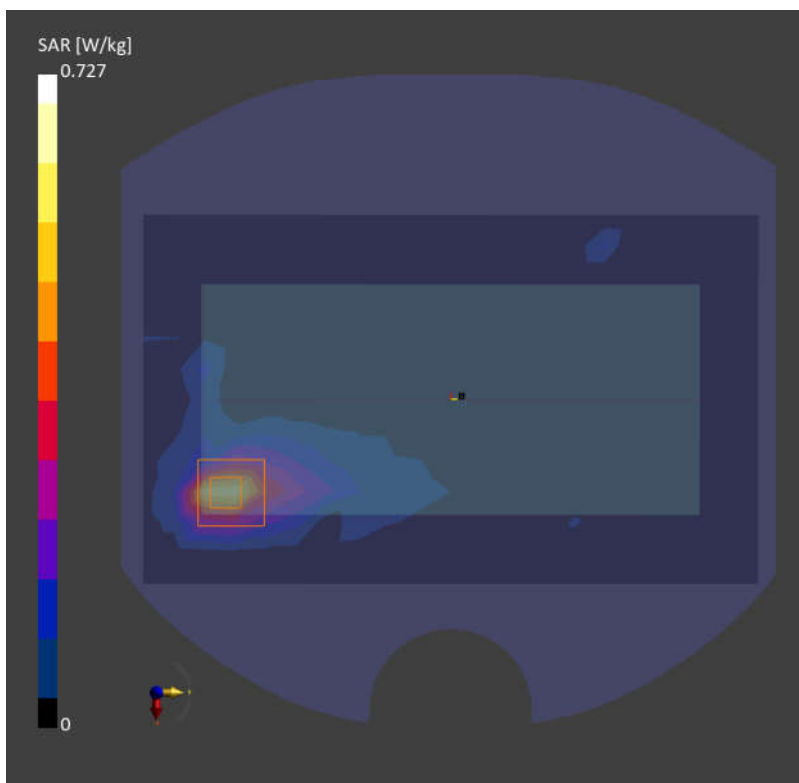

32_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.513 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.531 W/kg; SAR (10g) = 0.263 W/kg;

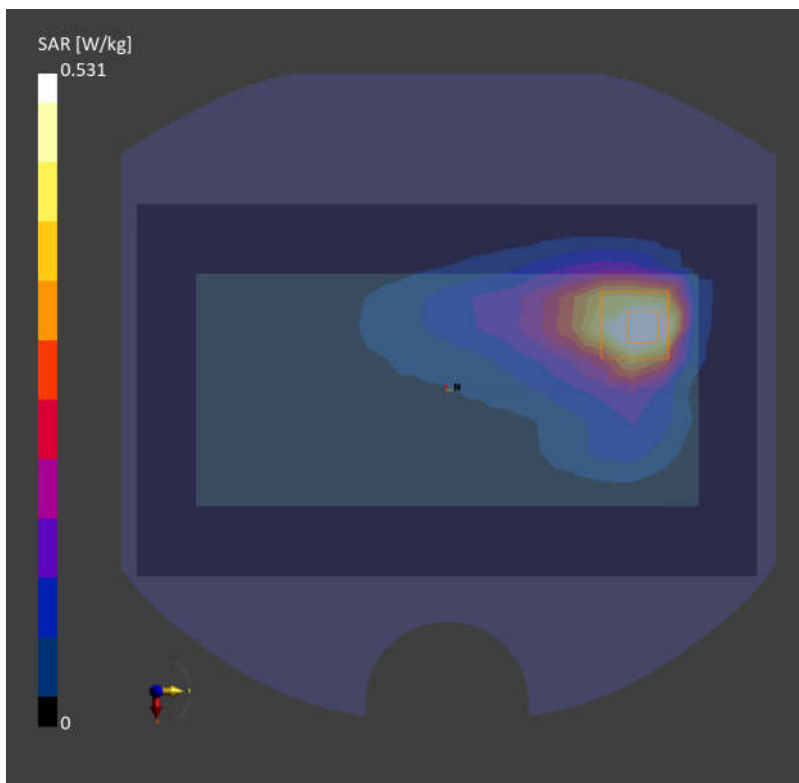

33_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.230 W/kg; SAR (10g) = 0.113 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.235 W/kg; SAR (10g) = 0.108 W/kg;

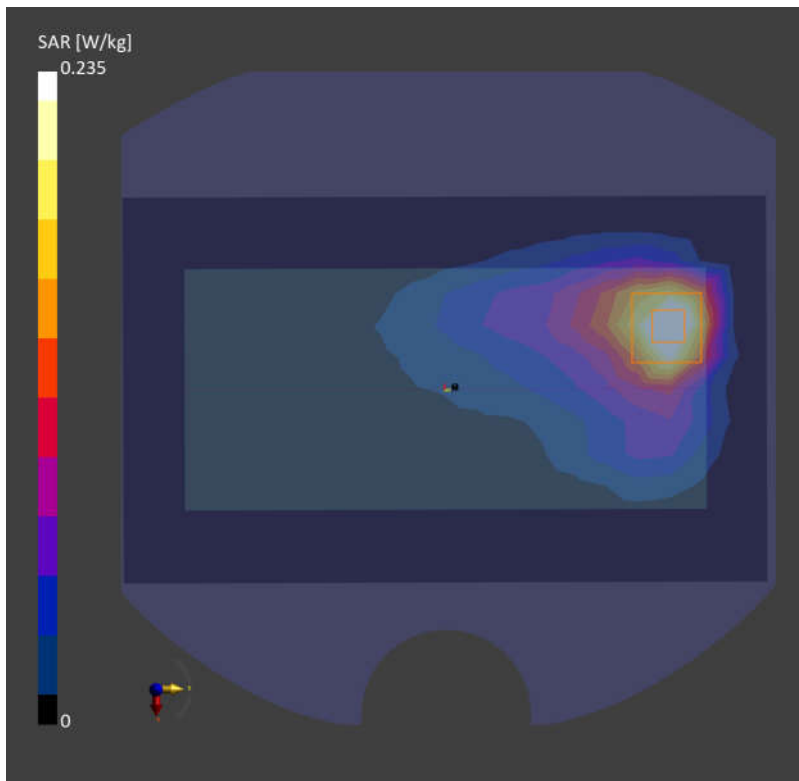

34_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch42

Communication System: WLAN 5GHz; Frequency: 5210.000

Medium: HSL. Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.51$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.491 W/kg; SAR (10g) = 0.122 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.513 W/kg; SAR (10g) = 0.138 W/kg;

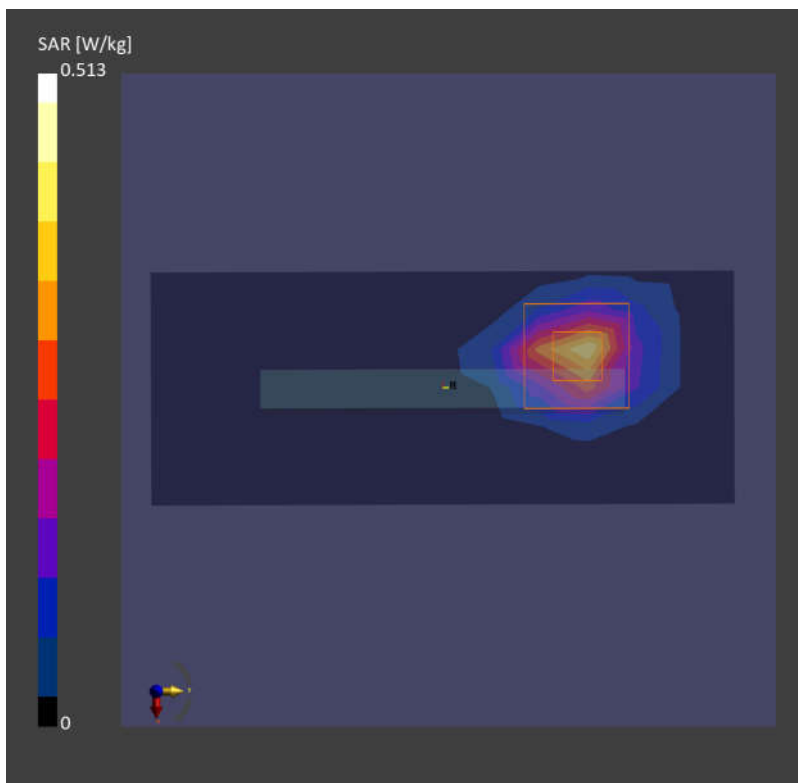

35_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.448 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.150 W/kg;

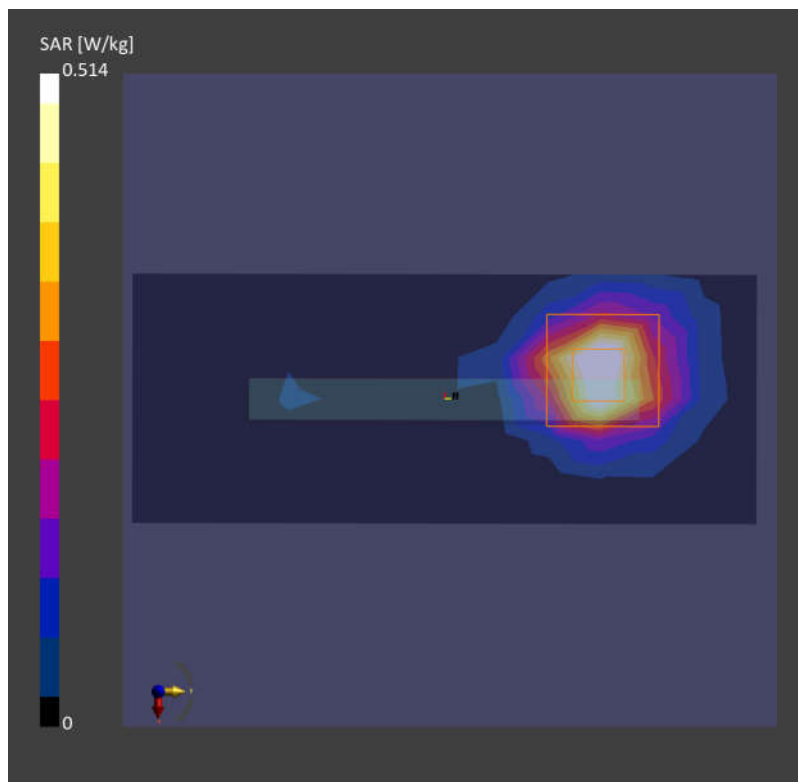

36_GSM850_GPRS (2 Tx slots)_Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.965 W/kg; SAR (10g) = 0.618 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.674 W/kg;

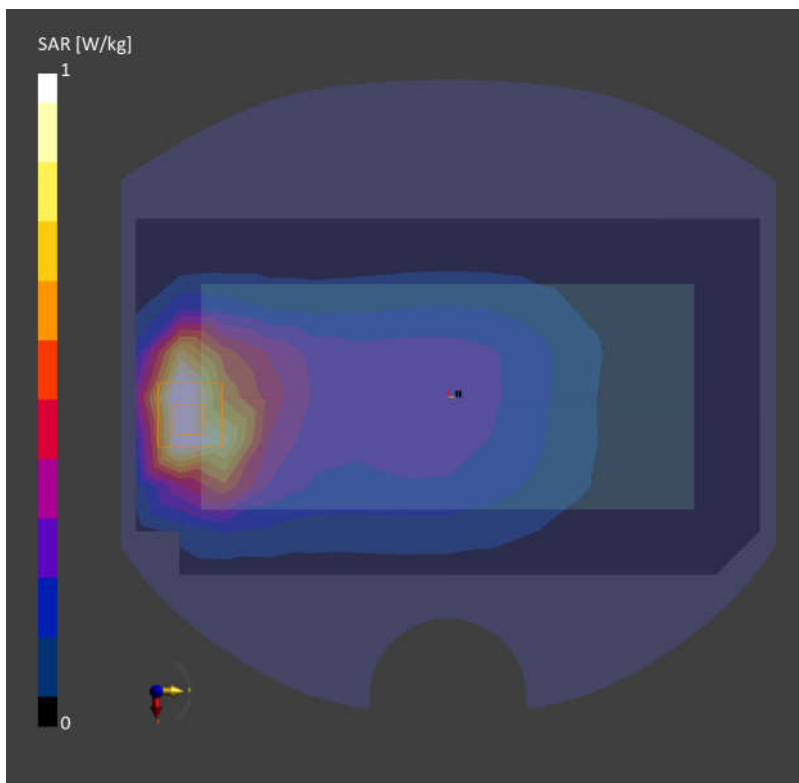

37_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.656 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.589 W/kg;

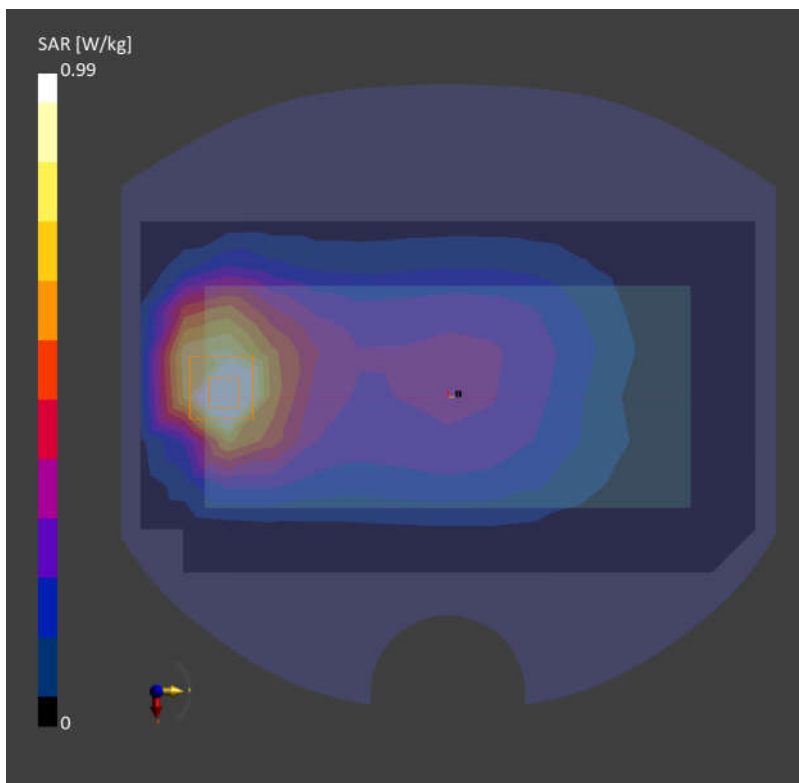

38_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.608 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.502 W/kg;

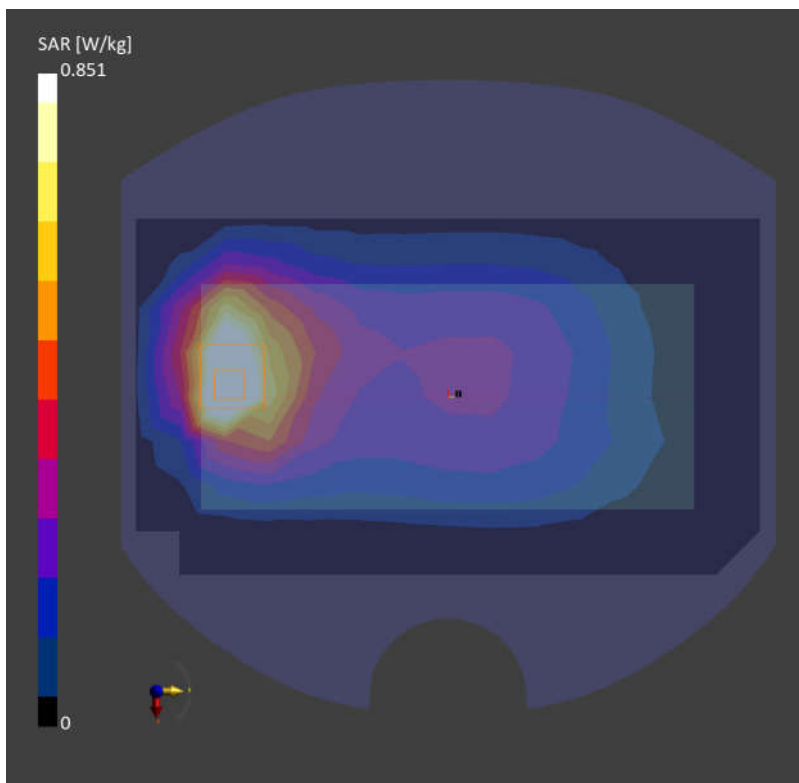

39_FR1 n26_20M_QPSK_1RB_1Offset_Back_5mm_Ch166300

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.729 W/kg; SAR (10g) = 0.444 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.377 W/kg;

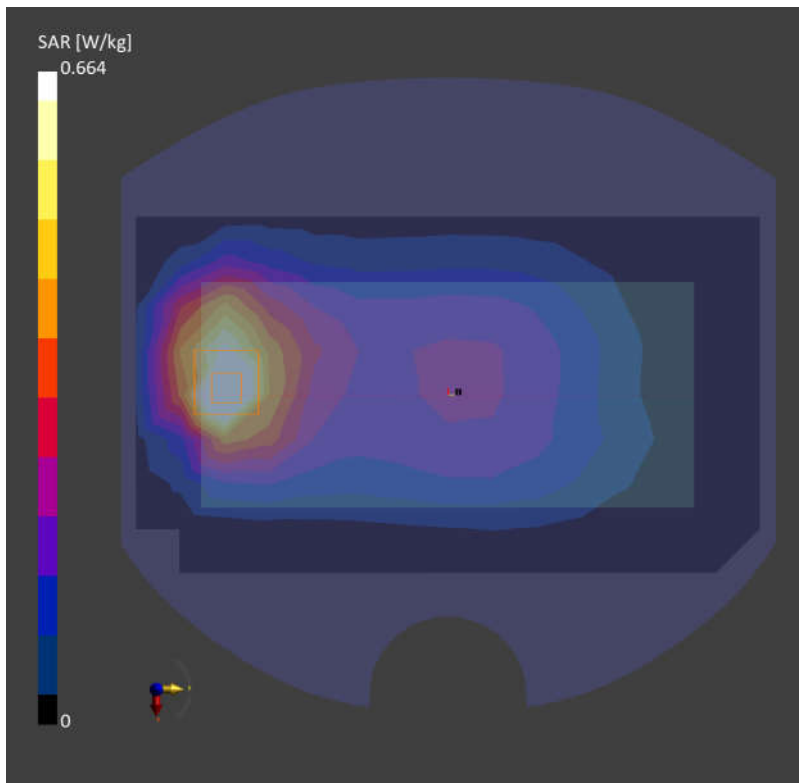

40_GSM1900_GPRS (4 Tx slots)_Back_5mm_Ch512

Communication System: PCS 1900; Frequency: 1850.200

Medium: HSL. Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.973 W/kg; SAR (10g) = 0.492 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.991 W/kg; SAR (10g) = 0.509 W/kg;

