



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



## FCC SAR Compliance Test Report

**Product Name:** Smart Phone

**Model:** LDN-L01

**Report No.:** SYBH(Z-SAR)001032018-2

**FCC ID:** QISLDN-L01

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Deng Zhao</i>
DATE	2018-03-21	2018-03-21

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C  
Tel: +86 755 28780808 Fax: +86 755 89652518

---

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## Table of Contents

1	General Information.....	6
1.1	Statement of Compliance .....	6
1.2	RF exposure limits .....	7
1.3	EUT Description .....	8
1.3.1	General Description .....	10
1.3.2	Power reduction specification .....	11
1.4	Test specification(s) .....	12
1.5	Testing laboratory .....	12
1.6	Applicant and Manufacturer .....	12
1.7	Application details .....	12
1.8	Ambient Condition.....	12
2	SAR Measurement System .....	13
2.1	SAR Measurement Set-up .....	13
2.2	Test environment .....	14
2.3	Data Acquisition Electronics description.....	14
2.4	Probe description .....	15
2.5	Phantom description .....	16
2.6	Device holder description .....	17
2.7	Test Equipment List .....	18
3	SAR Measurement Procedure .....	19
3.1	Scanning procedure .....	19
3.2	Spatial Peak SAR Evaluation .....	20
3.3	Data Storage and Evaluation .....	21
4	System Verification Procedure .....	23
4.1	Tissue Verification.....	23
4.2	System Check.....	26
4.3	System check Procedure .....	27
5	SAR measurement variability and uncertainty .....	28
5.1	SAR measurement variability .....	28
5.2	SAR measurement uncertainty .....	28
6	SAR Test Configuration.....	29
6.1	Test Positions Configuration .....	29
6.1.1	General considerations .....	29
6.1.2	Head Exposure Condition .....	29
6.1.3	Body-worn Exposure Condition .....	30
6.1.4	Hotspot Exposure Condition .....	30
6.1.5	Product Specific 10-g SAR Exposure Condition.....	31
6.2	3G SAR Test Reduction Procedure .....	31
6.3	GSM Test Configuration .....	31
6.4	UMTS Test Configuration .....	32
6.5	LTE Test Configuration .....	38
6.6	WiFi Test Configuration .....	40
6.6.1	Initial Test Position Procedure .....	40
6.6.2	Initial Test Configuration Procedure .....	40
6.6.3	Sub Test Configuration Procedure .....	40
6.6.4	WiFi 2.4G SAR Test Procedures .....	41
6.6.5	OFDM Transmission Mode SAR Test Channel Selection Requirements .....	42
6.7	Power Reduction Specification .....	43
6.7.1	Capacitive proximity sensor power reduction test configurations.....	43
6.7.2	Infrared proximity sensor power reduction test Configuration .....	50
7	SAR Measurement Results .....	53
7.1	Conducted power measurements.....	53
7.1.1	Conducted power measurements of GSM850 .....	54
7.1.2	Conducted power measurements of GSM1900 .....	55
7.1.3	Conducted power measurements of UMTS Band 5 .....	56
7.1.4	Conducted power measurements of UMTS Band 2 .....	57
7.1.5	Conducted power measurements of LTE Band 5.....	58
7.1.1	Conducted power measurements of LTE Band 7.....	60
7.1.2	Conducted power measurements of WiFi 2.4G.....	64

---

7.1.3	Conducted power measurements of BT .....	65
7.2	SAR measurement Results .....	66
7.2.1	SAR measurement Result of GSM850 .....	68
7.2.2	SAR measurement Result of GSM1900 .....	70
7.2.3	SAR measurement Result of UMTS Band 5 .....	74
7.2.4	SAR measurement Result of UMTS Band 2 .....	76
7.2.5	SAR measurement Result of LTE Band 5 .....	80
7.2.6	SAR measurement Result of LTE Band 7 .....	82
7.2.7	SAR measurement Result of WiFi 2.4G .....	85
7.3	Multiple Transmitter Evaluation .....	87
7.3.1	Stand-alone SAR test exclusion .....	88
7.3.2	Simultaneous Transmission Possibilities .....	90
7.3.3	SAR Summation Scenario .....	91
7.3.4	Simultaneous Transmission Conclusion .....	91
	Appendix A. System Check Plots .....	92
	Appendix B. SAR Measurement Plots .....	92
	Appendix C. Calibration Certificate .....	92
	Appendix D. Photo documentation .....	92

---

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2018-03-21	Deng Zhao

# 1 General Information

## 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for LDN-L01 are as below Table 1.

Band	Max Reported SAR(W/kg)			
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)	Product Specific 10-g SAR (0mm)**
GSM850	0.28	0.36	0.55	/
GSM1900	0.09	<b>0.80</b>	1.03	2.49
UMTS B5	0.21	0.41	0.46	/
UMTS B2	0.08	0.77	<b>1.29</b>	<b>2.80</b>
LTE Band 5	0.16	0.25	0.26	/
LTE Band 7	0.24	0.28	0.48	/
WiFi 2.4G	<b>0.30</b>	0.10	0.23	/
<b>The highest reported SAR for Head, Body Worn, Hotspot, Product Specific 10-g SAR and Simultaneous transmission exposure conditions are 0.30 W/kg, 0.80 W/kg, 1.29 W/kg, 2.80 W/kg and 1.48 W/kg per KDB690783 D01.</b>				

Table 1:Summary of test result

Note:

- 1)\* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- 2)\*\* For Product Specific 10-g SAR operation, this device has been tested and meets the 10-g SAR limits of 4.0 W/kg for general population/ uncontrolled exposure according to ANSI C95.1:1992/IEEE C95.1:1991

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 W/kg</b>	8.00 W/kg
<b>Spatial Average SAR**</b> (Whole Body)	0.08 W/kg	0.40 W/kg
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	<b>4.00 W/kg</b>	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

### Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation

### 1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	LDN-L01		
FCC ID :	QISLDN-L01		
SN:	8XEBB18227150023 8XEBB18227150090 8XEBB18227150085 8XEBB18227150001 8XEBB18227150026 8XEBB18227150084 8XEBB18227155751		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL1LDNM		
Software Version :	LDN-L01 8.0.0.112M(C900)		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band 2/5, LTE Band 5/7, WiFi 2.4G,BT		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),,LTE(QPSK/16QAM), WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band 5	824-849	869-894
	UMTS Band 2	1850-1910	1930-1990
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	BT	2402-2480	
	WiFi 2.4G	2412-2462	
	NFC	13.65	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(UMTS Band 5)		
	3, tested with power control “all 1”(UMTS Band 2)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
Test Channels (low-mid-high):	128-190-251(GSM850)		



	512-661-810(GSM1900)
	4132-4182-4233(UMTS Band 5)
	9262-9400-9538(UMTS Band 2)
	20407-20525-20643(LTE Band 5 BW=1.4MHz)
	20415-20525-20635(LTE Band 5 BW=3MHz)
	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	20775-21100-21425(LTE Band 7 BW=5MHz)
	20800-21100-21400(LTE Band 7 BW=10MHz)
	20825-21100-21375(LTE Band 7 BW=15MHz)
	20850-21100-21350(LTE Band 7 BW=20MHz)
	802.11b/g/n 20M:1-6-11
	802.11n 40M:3-6-9 (WiFi 2.4G)
	BT:0-19-39-78

Table 3:Device information and operating configuration

### 1.3.1 General Description

LDN-L01 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is B1 and B2 and B5 and B8. The LTE frequency band is B1 and B3 and B5 and B7 and B8 and B20. But only GSM850 and GSM1900, UMTS frequency B2 and B5, LTE frequency B5 and B7 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS, NFC, WIFI etc. Externally it provides one micro SD card (it can also used as SIM card interface), earphone port (to provide voice service) and one SIM card interface. LDN-L01 is single SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacturer/trademark	Note	Description
Rechargeable Li-ion	Huawei (Manufacturer :SCUD)	Main	Battery Model: HB366481ECW-11 Rated capacity: Nominal Voltage: +3.82V Charging Voltage: +4.35V
		sub	
	Huawei (Manufacturer :Desay)	Main	
		sub	
	Huawei (Manufacturer :Sunwoda)	Main	
		sub	

### 1.3.2 Power reduction specification

#### 1) Power reduction triggered by proximity sensor and hotspot (2G&3G&4G Main antenna)

This device uses a capacitive proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device per KDB616217.

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios: To reduce the output power of main antennas during body operating configurations.

A fixed level power reduction is also applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Hotspot on + capacitive sensor on	Hotspot off + capacitive sensor on	Hotspot on + capacitive sensor off	Other conditions
GSM 1900	4.0	4.0	4.0	0
UMTS Band 2	2.1	2.1	2.1	0
LTE Band 7	4.0	4.0	4.0	0

#### 3) Power reduction triggered by infrared proximity sensor(WiFi antenna)

The device uses an infrared proximity sensor to reduce the output power of WiFi antenna when VoWiFi or WiFi + 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario.

The following tables summarize the key power reduction information. The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 7 of this report.

Band	Power Reduction Level Amount (dB)		
	infrared proximity sensor on		infrared proximity sensor off
	WiFi Antenna and 2G&3G&4G antenna (Voice mode) simultaneous transmission	infrared proximity sensor On VoWiFi (Voice mode)	Full Power (Other conditions)
WiFi 2.4G 802.11b	4.0	4.0	0
WiFi 2.4G 802.11g	3.0	3.0	0
WiFi 2.4G 802.11n (20M)	1.0	1.0	0

#### 1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1, Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT # 2174.01 & 2174.02 & 2174.03

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2018-03-13
End Date of test	2018-03-20

#### 1.8 Ambient Condition

Ambient temperature	18°C – 25°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

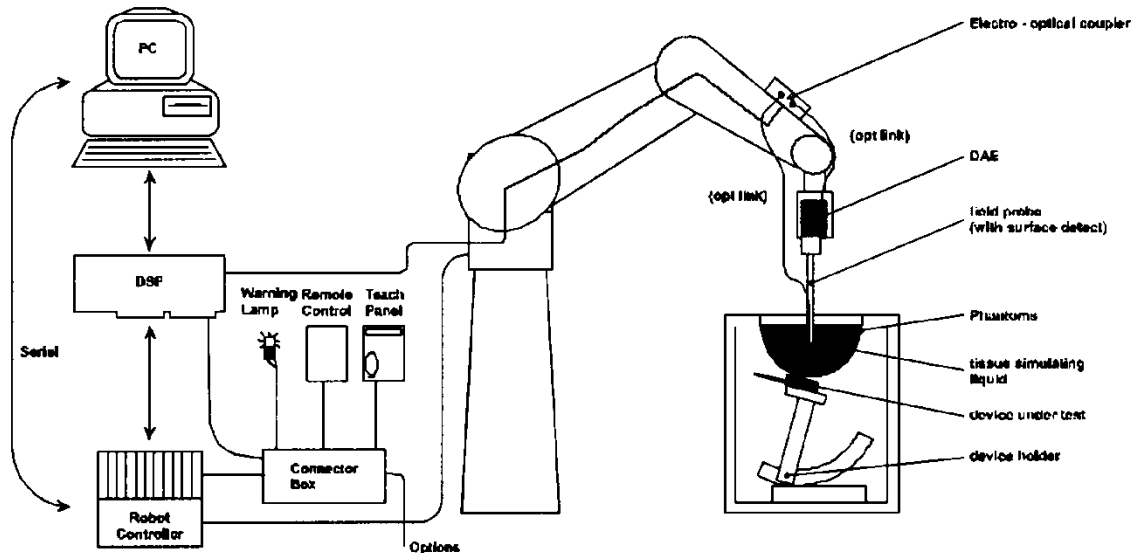

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.


The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

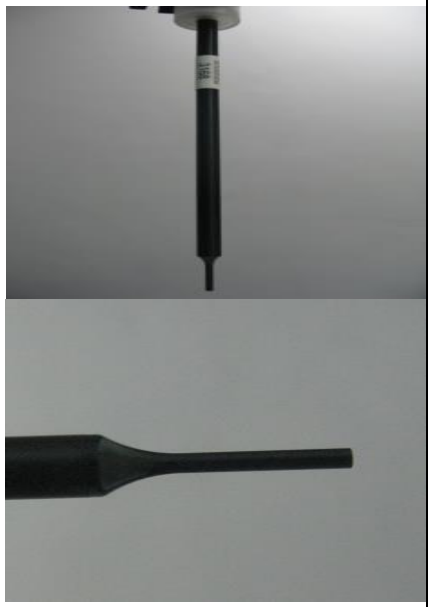Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	


### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	




## 2.5 Phantom description


### SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
<p>The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.</p>		

The following figure shows the definition of reference point:

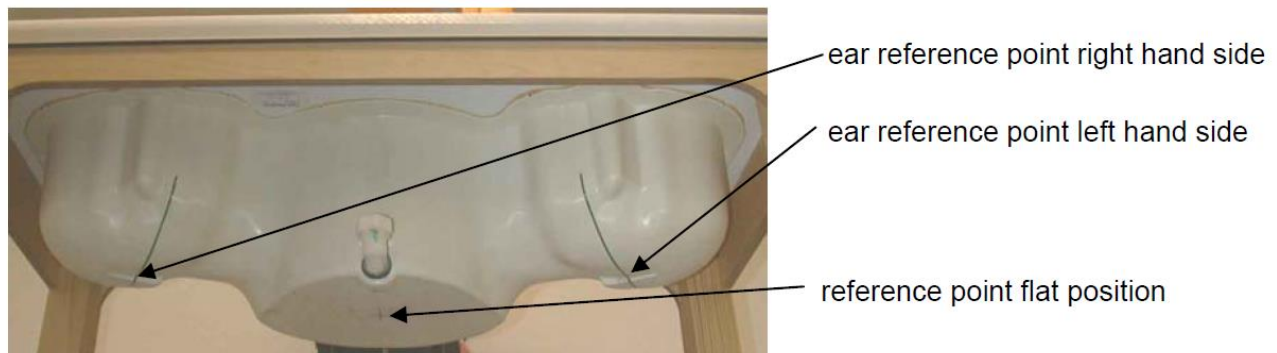

### ELI4 Phantom

ELI4 Phantom		
Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
<p>The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.</p>		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity  $2 \leq \epsilon_r \leq 5$  at  $\leq 3$  GHz,  $3 \leq \epsilon_r \leq 4$  at  $> 3$  GHz and a loss tangent  $\leq 0.05$ .



## 2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\sigma = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of  $\pm 1^\circ$  in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2017-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2017-04-27	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2016-04-20	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2017-09-20	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2017-11-15	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2017-07-21	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2017-07-21	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2017-04-27	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2017-12-30	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	158850	2017-06-13	One year
<input checked="" type="checkbox"/>	Anritsu	Radio Communication Analyser	MT8821C	6201735100	2017-06-01	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2017-12-31	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	E8257D	MY56440071	2017-12-24	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	311190	2017-05-26	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2017-07-17	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2017-07-07	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY57150002	2017-04-20	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130007	2017-04-10	One year
<input checked="" type="checkbox"/>	Anritsu	Signal Analyzer	MS2690A	6261767335	2017-10-24	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

### 3 SAR Measurement Procedure

#### 3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{ mm}$  and 4-6 GHz- $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ , 3-4 GHz-  $\leq 4\text{mm}$  and 4-6GHz- $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{\text{Zoom}}(n-1)$	≥22mm

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points( with 8mm horizontal resolution) or 7 x 7 x 7 points( with 5mm horizontal resolution) or 8 x 8 x 7 points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V <sub>i</sub>	= compensated signal of channel i	(i = x, y, z)
	U <sub>i</sub>	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp <sub>i</sub>	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be

evaluated:

$$\begin{aligned} \text{E-field probes:} \quad E_i &= (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2} \\ \text{H-field probes:} \quad H_i &= (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f \end{aligned}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i (i = x, y, z)  
 [mV/(V/m)<sup>2</sup>] for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with  $\text{SAR}$  = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{\text{tot}}$  = total electric field strength in V/m  
 $H_{\text{tot}}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M $\Omega$ + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

#### ☒ Simulating Head Liquid (HBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Esters, Emulsifiers, Inhibitors	10-30%
Sodium salt	8-25%

#### ☒ Simulating Body Liquid (MBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%



Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5% )		Liquid Temp.	Test Date
		Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	$\Delta\epsilon_r$	$\Delta\sigma$		
835MHz Head	825	41.60	0.90	40.82	0.933	-1.88%	3.63%	21.8°C	2018/3/14
	835	41.50	0.90	40.81	0.938	-1.66%	4.22%		
	850	41.50	0.92	40.81	0.945	-1.66%	2.68%		
835MHz Head	825	41.60	0.90	42.72	0.927	2.69%	2.97%	21.6°C	2018/3/14
	835	41.50	0.90	42.69	0.930	2.87%	3.34%		
	850	41.50	0.92	42.63	0.937	2.72%	1.85%		
1900MHz Head	1850	40.00	1.40	40.90	1.375	2.25%	-1.79%	21.4°C	2018/3/13
	1880	40.00	1.40	40.86	1.394	2.15%	-0.43%		
	1900	40.00	1.40	40.84	1.406	2.10%	0.43%		
	1910	40.00	1.40	40.82	1.412	2.05%	0.86%		
2450MHz Head	2410	39.30	1.76	37.89	1.783	-3.59%	1.31%	21.9°C	2018/3/19
	2435	39.20	1.79	37.87	1.792	-3.39%	0.11%		
	2450	39.20	1.80	37.84	1.802	-3.47%	0.11%		
	2460	39.20	1.81	37.84	1.811	-3.47%	0.06%		
2600MHz Head	2510	39.12	1.86	38.57	1.866	-1.41%	0.32%	22.1°C	2018/3/18
	2535	39.10	1.89	38.52	1.886	-1.48%	-0.21%		
	2560	39.00	1.92	38.48	1.907	-1.33%	-0.52%		
	2600	39.00	1.96	38.42	1.938	-1.49%	-1.12%		
835MHz Body	825	55.20	0.97	56.54	0.955	2.43%	-1.60%	21.8°C	2018/3/14
	835	55.20	0.97	56.58	0.961	2.50%	-0.94%		
	850	55.20	0.99	56.65	0.968	2.63%	-2.18%		
835MHz Body	825	55.20	0.97	53.86	0.935	-2.43%	-3.65%	21.6°C	2018/3/14
	835	55.20	0.97	53.84	0.941	-2.46%	-2.97%		
	850	55.20	0.99	53.79	0.951	-2.55%	-3.97%		
1900MHz Body	1850	53.30	1.52	51.76	1.462	-2.89%	-3.82%	21.8°C	2018/3/15
	1880	53.30	1.52	51.71	1.483	-2.98%	-2.43%		
	1900	53.30	1.52	51.69	1.498	-3.02%	-1.38%		
	1910	53.30	1.52	51.70	1.506	-3.00%	-0.92%		
2450MHz Body	2410	52.80	1.91	51.37	1.871	-2.71%	-2.04%	21.4°C	2018/3/19
	2435	52.70	1.94	51.33	1.894	-2.60%	-2.37%		
	2450	52.70	1.95	51.31	1.908	-2.64%	-2.15%		
	2460	52.70	1.96	51.30	1.918	-2.66%	-2.14%		
2600MHz Body	2510	52.62	2.03	54.90	2.023	4.33%	-0.34%	22.1°C	2018/3/19
	2535	52.59	2.07	54.81	2.048	4.22%	-1.06%		
	2560	52.57	2.09	54.72	2.073	4.09%	-0.81%		
	2600	52.50	2.16	54.58	2.113	3.96%	-2.18%		

Table 5: Measured Tissue Parameter



Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 System Check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10% )		Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	$\Delta$ 1-g	$\Delta$ 10-g	
835MHz Head	9.30	6.05	9.52	6.24	2.37%	3.14%	2018/3/14
835MHz Head	9.30	6.05	9.44	6.16	1.51%	1.82%	2018/3/14
1900MHz Head	39.10	20.50	39.64	20.60	1.38%	0.49%	2018/3/13
2450MHz Head	51.20	23.90	51.20	23.68	0.00%	-0.92%	2018/3/19
2600MHz Head	58.70	26.10	56.00	25.08	-4.60%	-3.91%	2018/3/18
835MHz Body	9.41	6.20	9.60	6.28	2.02%	1.29%	2018/3/14
835MHz Body	9.41	6.20	9.20	6.40	-2.23%	3.23%	2018/3/14
1900MHz Body	39.40	20.80	39.04	21.76	-0.91%	4.62%	2018/3/15
2450MHz Body	50.10	23.50	51.60	25.36	2.99%	7.91%	2018/3/19
2600MHz Body	55.90	24.90	55.20	26.24	-1.25%	5.38%	2018/3/19

Table 6: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SAM. It is fed with a power of 250 mW(below 3GHz) or 100mW(3-6GHz). To adjust this power, a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

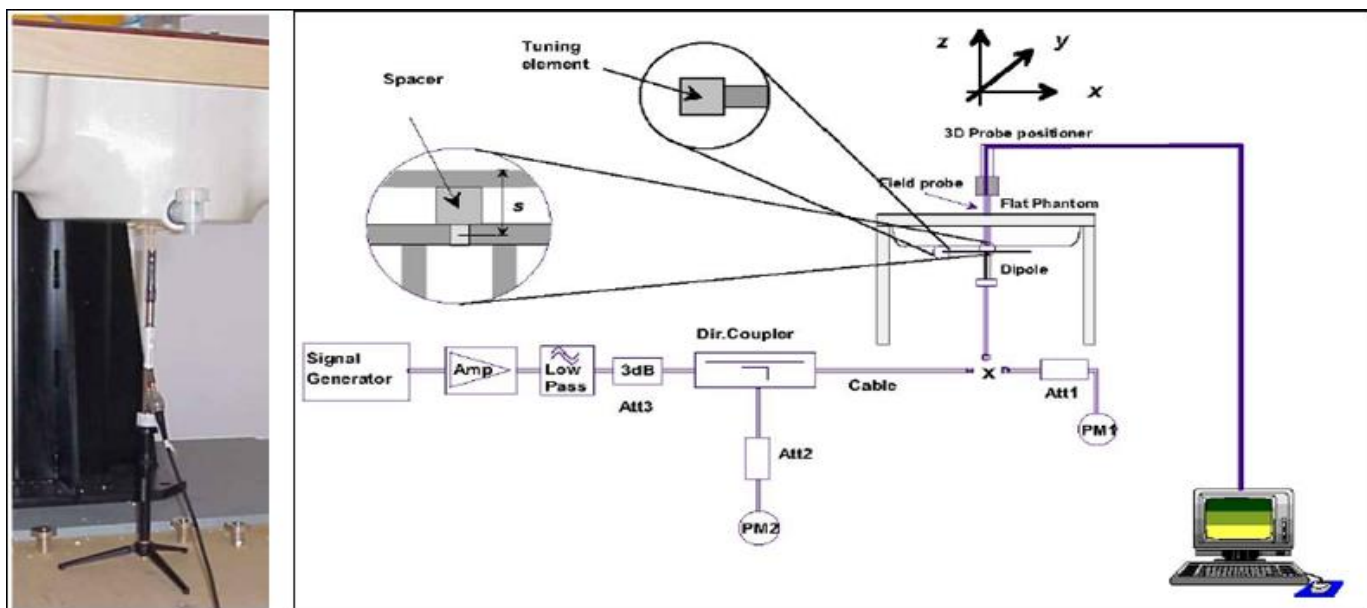

## 5 SAR measurement variability and uncertainty

### 5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

### 5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6 SAR Test Configuration

### 6.1 Test Positions Configuration

#### 6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

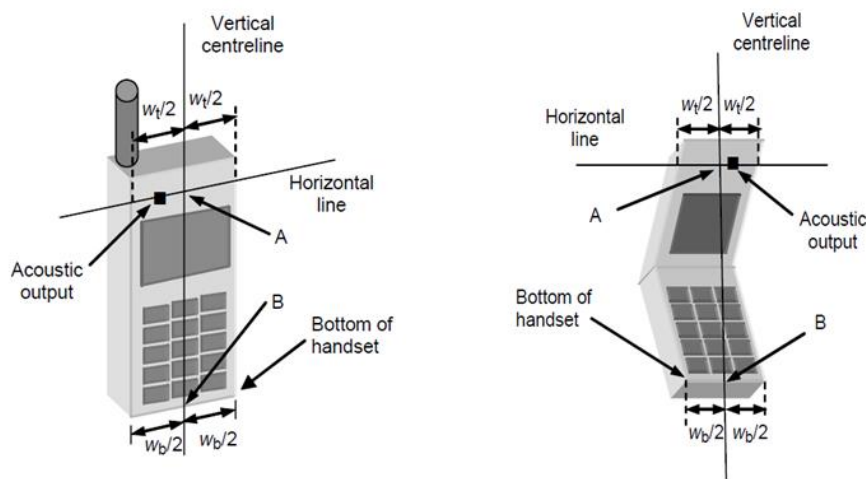


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

#### 6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

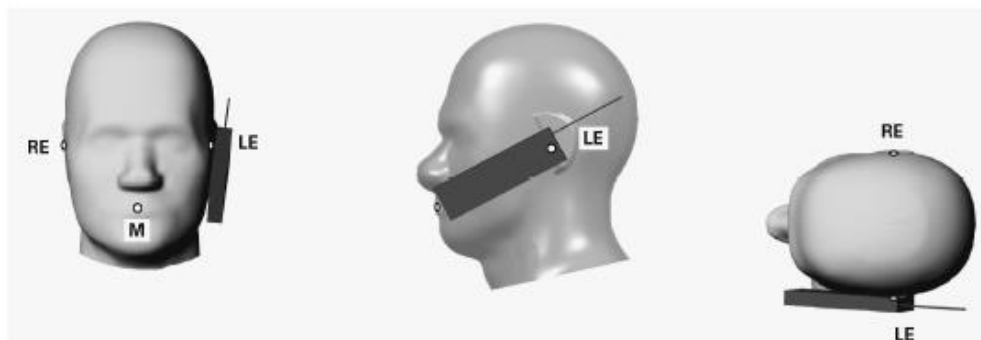


Figure 2 Front, Side and Top View of Cheek Position



Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

### 6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

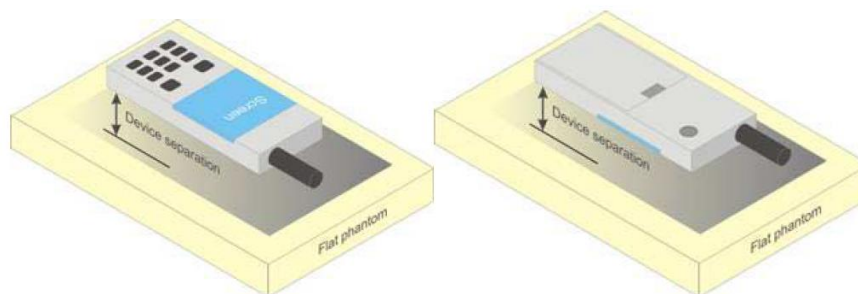


Figure 4 Test position for Body-Worn device

### 6.1.4 Hotspot Exposure Condition

Per FCC KDB 941225D06, the SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is  $> 9 \text{ cm} \times 5 \text{ cm}$ , a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

### 6.1.5 Product Specific 10-g SAR Exposure Condition

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

### 6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### 6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8 PSK.



## 6.4 UMTS Test Configuration

### 1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

### 2) WCDMA

#### a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

#### b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

### 3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK$ ,  $\Delta NACK$ ,  $\Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.



Sub-test <sup>⌘</sup>	$\beta_c$ <sup>⌘</sup>	$\beta_d$ <sup>⌘</sup>	$\beta_d$ (SF) <sup>⌘</sup>	$\beta_c/\beta_d$ <sup>⌘</sup>	$\beta_{hs}(1)$ <sup>⌘</sup>	CM(dB)(2) <sup>⌘</sup>	MPR (dB) <sup>⌘</sup>
1 <sup>⌘</sup>	2/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	2/15 <sup>⌘</sup>	4/15 <sup>⌘</sup>	0.0 <sup>⌘</sup>	0 <sup>⌘</sup>
2 <sup>⌘</sup>	12/15(3) <sup>⌘</sup>	15/15(3) <sup>⌘</sup>	64 <sup>⌘</sup>	12/15(3) <sup>⌘</sup>	24/15 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0 <sup>⌘</sup>
3 <sup>⌘</sup>	15/15 <sup>⌘</sup>	8/15 <sup>⌘</sup>	64 <sup>⌘</sup>	15/8 <sup>⌘</sup>	30/15 <sup>⌘</sup>	1.5 <sup>⌘</sup>	0.5 <sup>⌘</sup>
4 <sup>⌘</sup>	15/15 <sup>⌘</sup>	4/15 <sup>⌘</sup>	64 <sup>⌘</sup>	15/4 <sup>⌘</sup>	30/15 <sup>⌘</sup>	1.5 <sup>⌘</sup>	0.5 <sup>⌘</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8$       $A_{hs} = \beta_{hs}/\beta_c = 30/15$       $\beta_{hs} = 30/15 * \beta_c$   
Note 2 : CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>⌘</sup>  
Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>⌘</sup>

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600

16	15	1	27952	345600
----	----	---	-------	--------

Table 9:HSDPA UE category

#### 4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>2</sup>	$\beta_d$ (SF) <sup>2</sup>	$\beta_c/\beta_d$ <sup>2</sup>	$\beta_{hs}$ <sup>1</sup>	$\beta_{ec}$ <sup>2</sup>	$\beta_{ed}$ <sup>2</sup>	$\beta_{ec}$ (SF) <sup>2</sup>	$\beta_{ed}$ (code) <sup>2</sup>	CM <sup>3</sup> (dB) <sup>2</sup>	MP R <sup>2</sup> (dB) <sup>2</sup>	AG <sup>4</sup> Index <sup>2</sup>	E- TFC I <sup>2</sup>
1 <sup>2</sup>	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64 <sup>2</sup>	11/15 <sup>(3)</sup>	22/15 <sup>2</sup>	209/225 <sup>2</sup>	1039/225 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	1.0 <sup>2</sup>	0.0 <sup>2</sup>	20 <sup>2</sup>	75 <sup>2</sup>
2 <sup>2</sup>	6/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	6/15 <sup>2</sup>	12/15 <sup>2</sup>	12/15 <sup>2</sup>	94/75 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	3.0 <sup>2</sup>	2.0 <sup>2</sup>	12 <sup>2</sup>	67 <sup>2</sup>
3 <sup>2</sup>	15/15 <sup>2</sup>	9/15 <sup>2</sup>	64 <sup>2</sup>	15/9 <sup>2</sup>	30/15 <sup>2</sup>	30/15 <sup>2</sup>	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 <sup>2</sup>	2 <sup>2</sup>	2.0 <sup>2</sup>	1.0 <sup>2</sup>	15 <sup>2</sup>	92 <sup>2</sup>
4 <sup>2</sup>	2/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	2/15 <sup>2</sup>	4/15 <sup>2</sup>	2/15 <sup>2</sup>	56/75 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	3.0 <sup>2</sup>	2.0 <sup>2</sup>	17 <sup>2</sup>	71 <sup>2</sup>
5 <sup>2</sup>	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64 <sup>2</sup>	15/15 <sup>(4)</sup>	30/15 <sup>2</sup>	24/15 <sup>2</sup>	134/15 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	1.0 <sup>2</sup>	0.0 <sup>2</sup>	21 <sup>2</sup>	81 <sup>2</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8  $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference<sup>2</sup>

Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ <sup>2</sup>

Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ <sup>2</sup>

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g<sup>2</sup>

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.<sup>2</sup>

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11:HSUPA UE category

## 5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

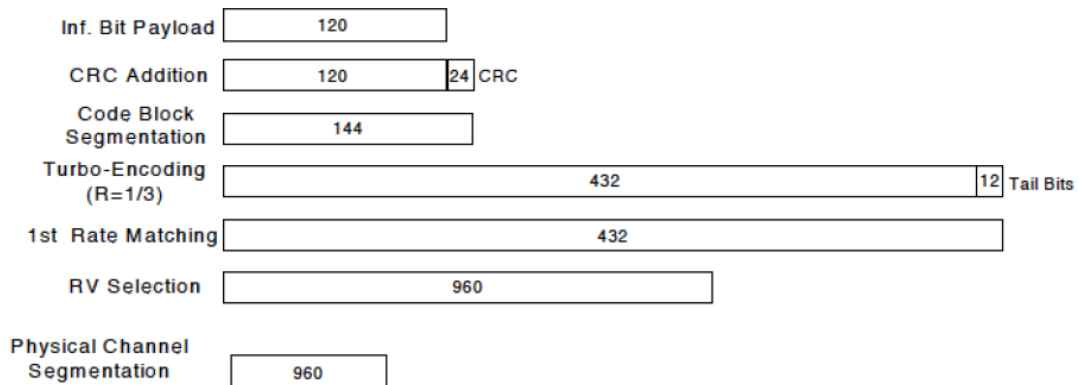


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>2</sup>	$\beta_d$ (SF) <sup>2</sup>	$\beta_c/\beta_d$ <sup>2</sup>	$\beta_{hs}(1)$ <sup>2</sup>	CM(dB)(2) <sup>2</sup>	MPR (dB) <sup>2</sup>
1 <sup>2</sup>	2/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	2/15 <sup>2</sup>	4/15 <sup>2</sup>	0.0 <sup>2</sup>	0 <sup>2</sup>
2 <sup>2</sup>	12/15(3) <sup>2</sup>	15/15(3) <sup>2</sup>	64 <sup>2</sup>	12/15(3) <sup>2</sup>	24/15 <sup>2</sup>	1.0 <sup>2</sup>	0 <sup>2</sup>
3 <sup>2</sup>	15/15 <sup>2</sup>	8/15 <sup>2</sup>	64 <sup>2</sup>	15/8 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>
4 <sup>2</sup>	15/15 <sup>2</sup>	4/15 <sup>2</sup>	64 <sup>2</sup>	15/4 <sup>2</sup>	30/15 <sup>2</sup>	1.5 <sup>2</sup>	0.5 <sup>2</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI=8      $A_{hs} = \beta_{hs}/\beta_c = 30/15$       $\beta_{hs} = 30/15 * \beta_c$   
Note 2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.

6.The device doesn't support carrier aggregation for it just can operate in Release 8.

## 6) HSPA+

Per KDB941225D01, SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	$\beta_c$ (Note3)	$\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{EC}$	$\beta_{ed1}$ (2xSF2) (Note 4)	$\beta_{ed2}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105
<p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 30/15</math> with <math>\beta_{HS} = 30/15 * \beta_c</math>.</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).</p> <p>Note 3: DPDCH is not configured, therefore the <math>\beta_c</math> is set to 1 and <math>\beta_d = 0</math> by default.</p> <p>Note 4: <math>\beta_{ed}</math> can not be set directly; it is set by Absolute Grant Value.</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.</p>											

## 6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

### 3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS\_01" on the base station simulator.

### 4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.



iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## 6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Per KDB 248227D01, a minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The *reported* SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4 \text{ W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8 \text{ W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### 6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8 \text{ W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

### 6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to



initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

#### 6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

##### A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

##### B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

##### C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### **6.6.5 OFDM Transmission Mode SAR Test Channel Selection Requirements**

For 2.4 GHz band, When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc), the lower order 802.11 mode (i.e., 802.11g is chosen over 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channel, either according to the default or additional power measurement requirement, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 6.7 Power Reduction Specification

### 6.7.1 Capacitive proximity sensor power reduction test configurations

This device uses a proximity sensor that shares the same metallic electrode as the main transmitting antenna to facilitate triggering in typical user interactivity with the device.

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body/hotspot exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance.

The following tables summarize the key power reduction information for proximity sensor. The test procedures in KDB 616217 should be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Hotspot on + capacitive sensor on	Hotspot off + capacitive sensor on	Hotspot on + capacitive sensor off	Other conditions
GSM 1900	4.0	4.0	4.0	0
UMTS Band 2	2.1	2.1	2.1	0
LTE Band 7	4.0	4.0	4.0	0

Band	Sensor Trigger Distance
GSM 1900	Front side:8mm Back side: 14mm Bottom side: 12mm
UMTS Band 2	Front side:8mm Back side: 14mm Bottom side: 12mm
LTE Band 7	Front side:8mm Back side: 14mm Bottom side: 12mm


Note:

- 1) For body-worn SAR, no additional SAR test with sensor off is required since the sensor triggering distance is < 15mm. Body-worn SAR is tested at the full power level.
- 2) For hotspot SAR, no additional SAR test with sensor off is required since the power level in hotspot mode with sensor off and sensor on are the same.
- 3) For Product Specific 10-g SAR, additional SAR test with sensor off is required at the conservative sensor triggering distance minus 1mm for the required test positions per KDB 616217

## 1) Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the front side, back side and bottom side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

the proximity sensor triggering distance measurement method are as below:

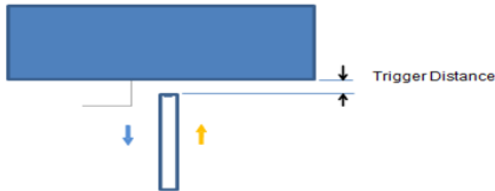

Picture: Proximity sensor triggering distances assessment Bottom Side




Picture: Proximity sensor triggering distances assessment Front Side and Back side

**Table: Summary of Trigger Distances**


Band(MHz)	Trigger distance-Front Side		Trigger distance-Back Side		Trigger distance-Bottom Side	
	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom
GSM 1900	8mm	9mm	14mm	14mm	12mm	13mm
UMTS Band 2	8mm	9mm	14mm	14mm	12mm	13mm
LTE Band 7	8mm	9mm	14mm	14mm	12mm	13mm

The detailed conducted power measurement data to determine the triggering distances is as below:


The DUT(Front side) is moved towards the flat phantom(hotspot off):

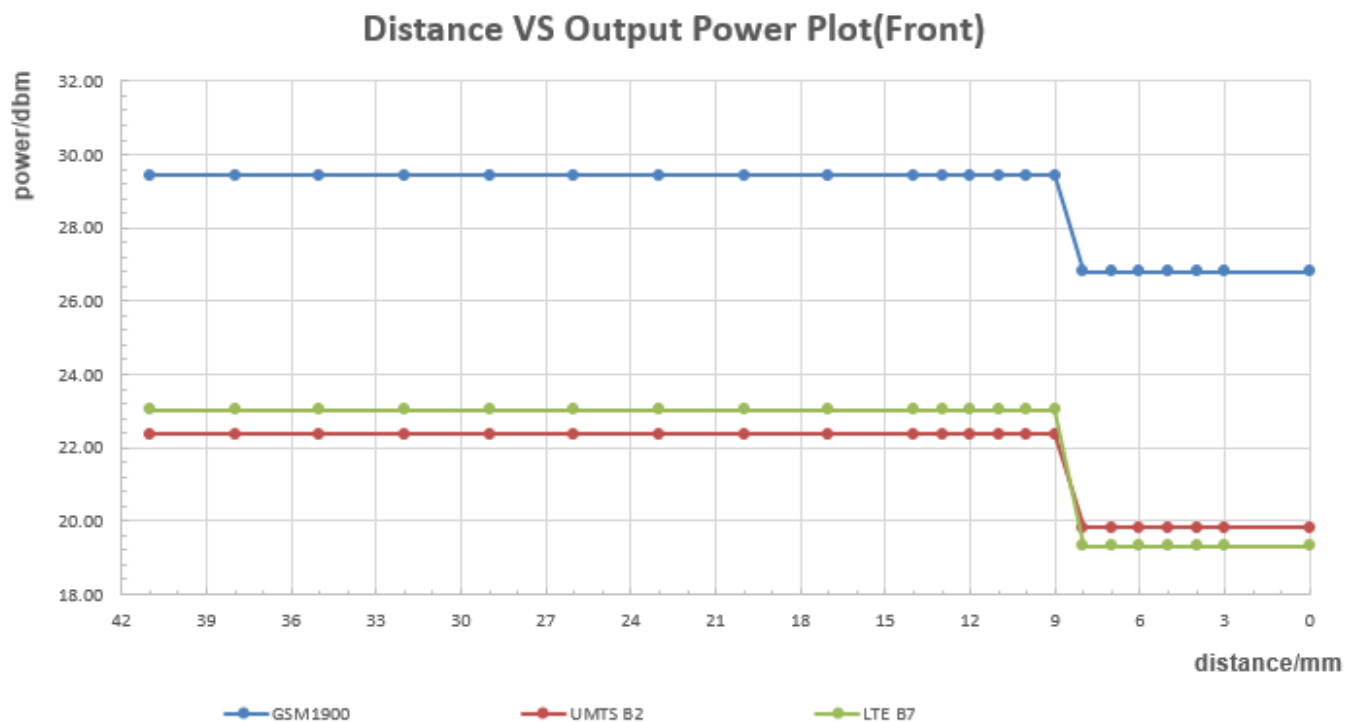


The DUT(Back side) is moved towards the flat phantom(hotspot off):

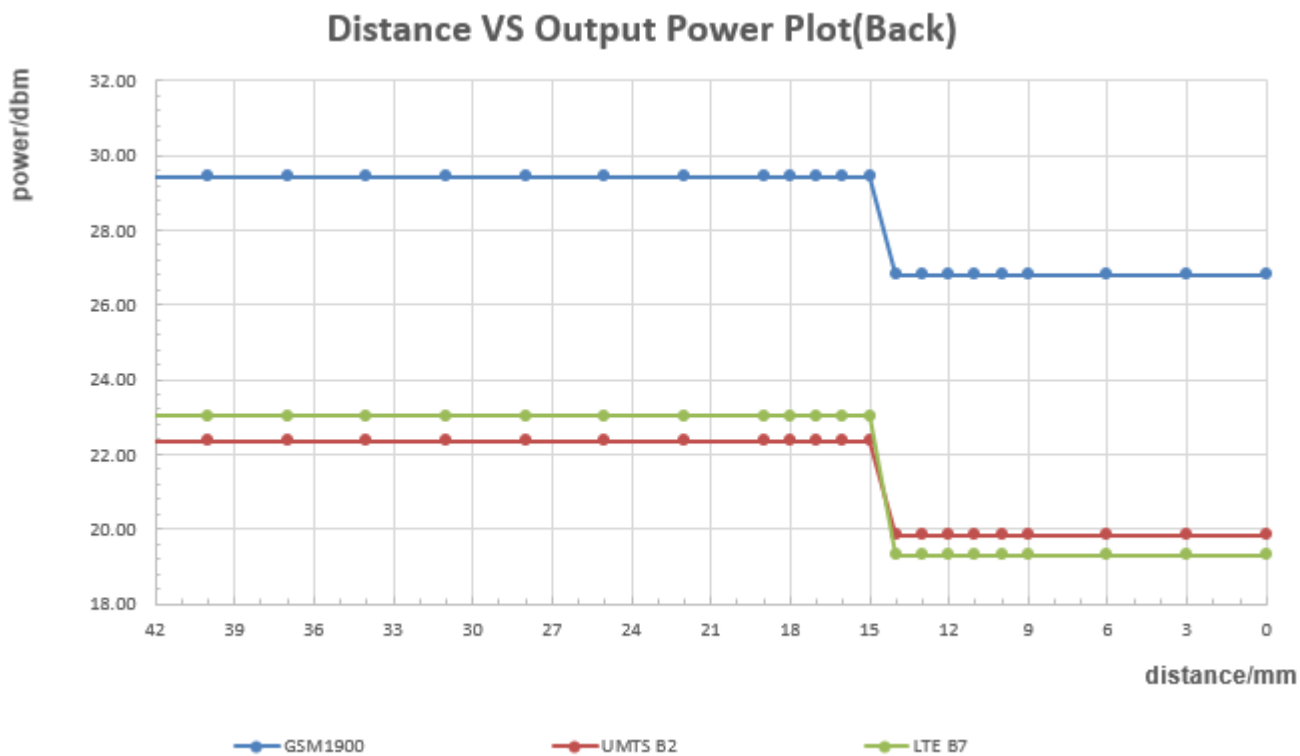


The DUT(Bottom side) is moved towards the flat phantom(hotspot off):

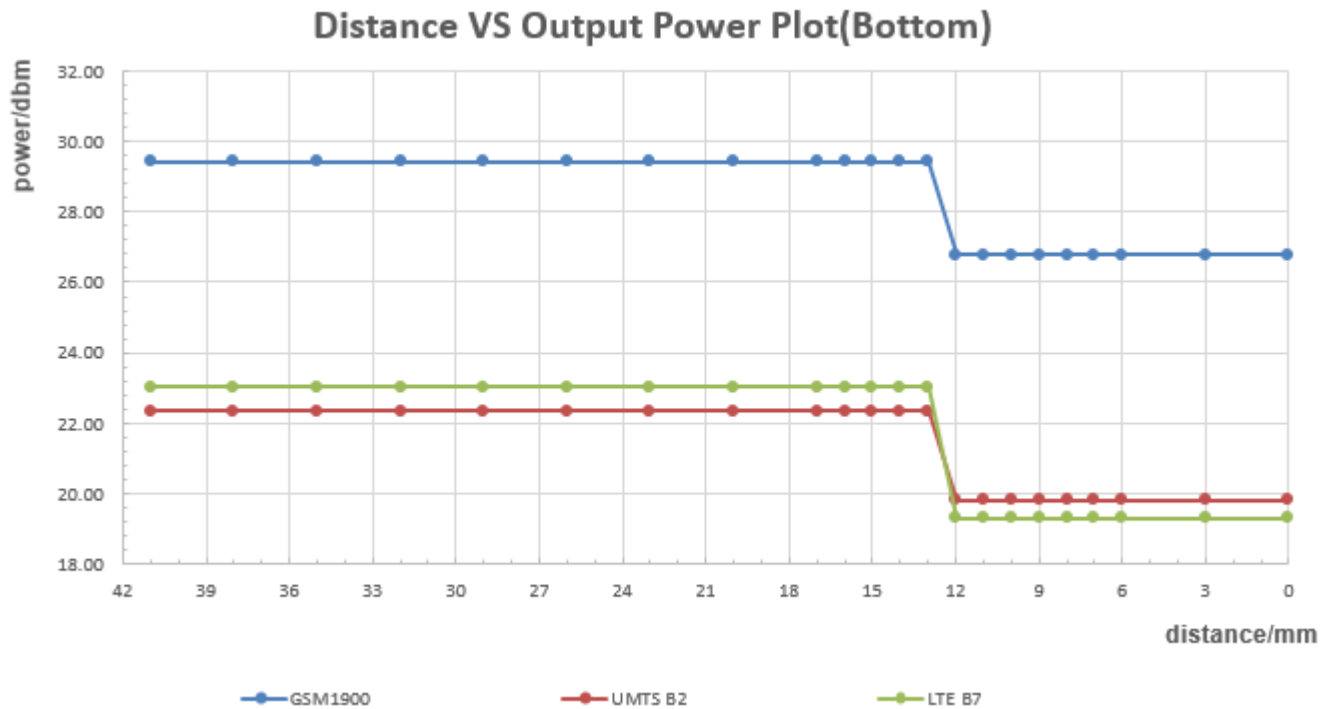


The DUT(Front side) is moved away from the flat phantom(hotspot off):

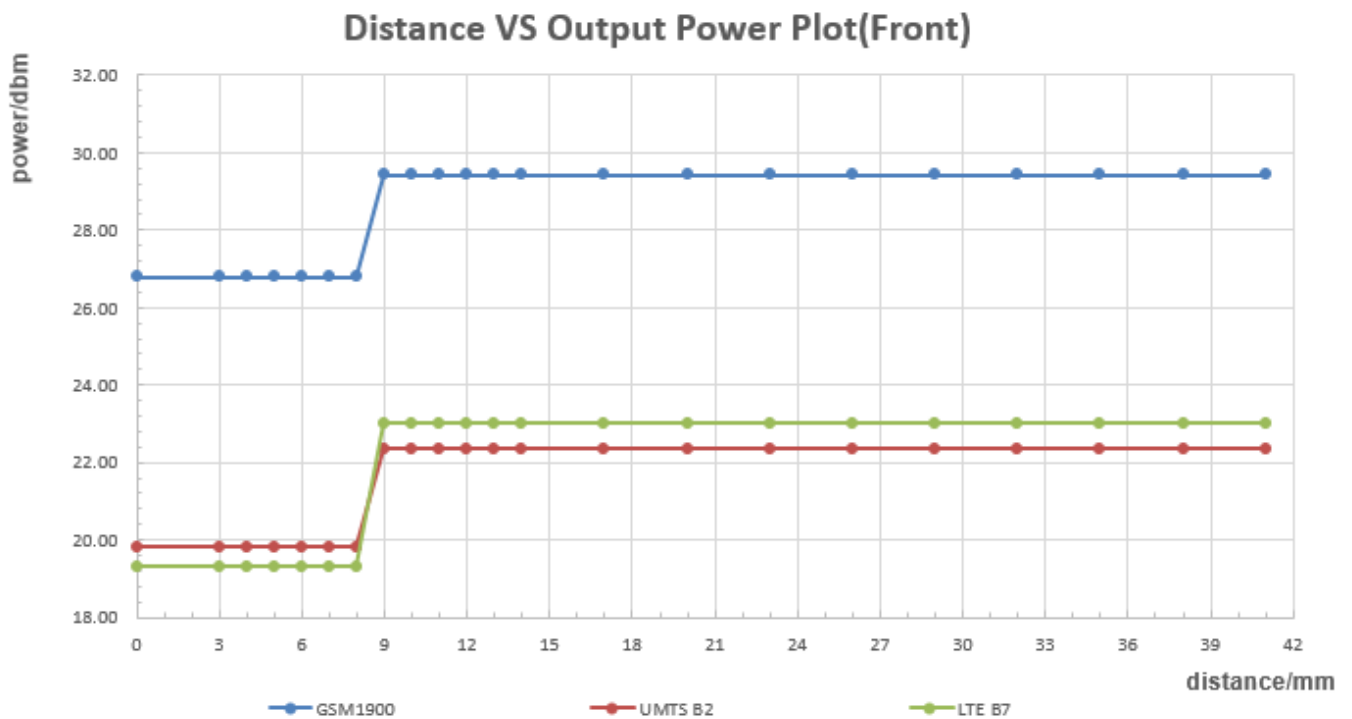

The DUT(Back side) is moved away from the flat phantom(hotspot off):

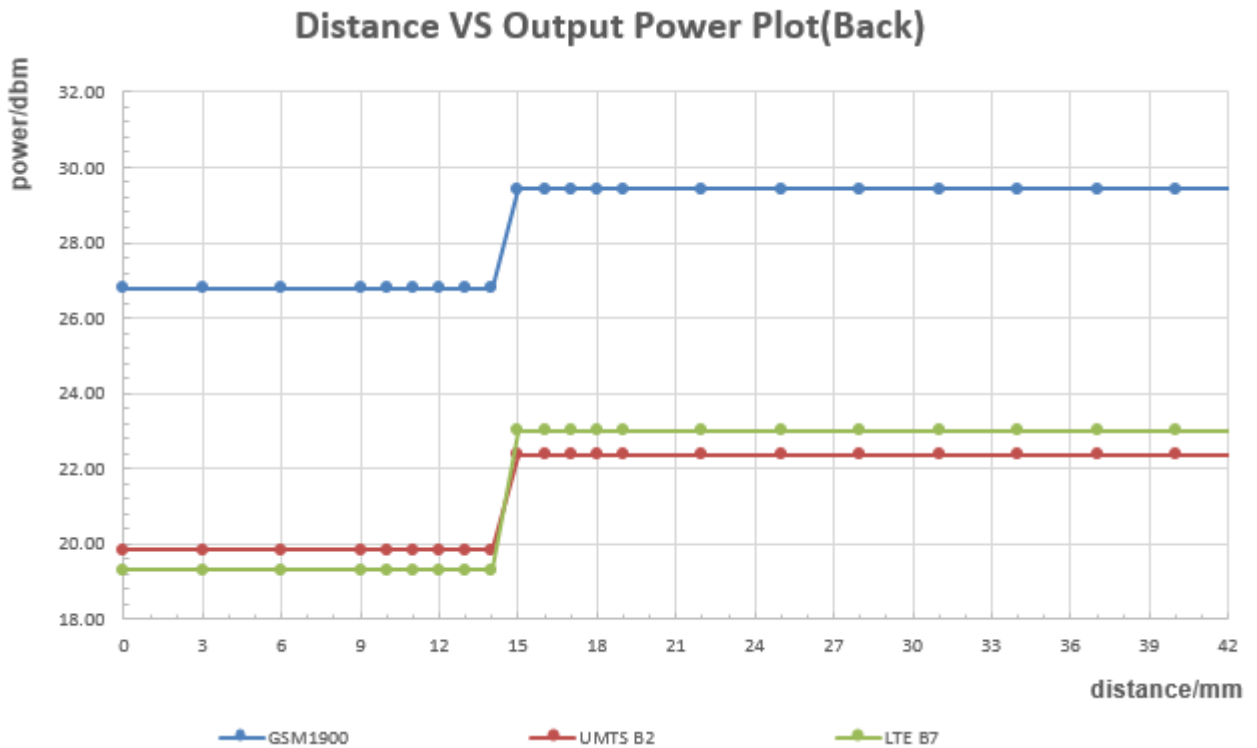

The DUT(Bottom side) is moved away from the flat phantom(hotspot off):

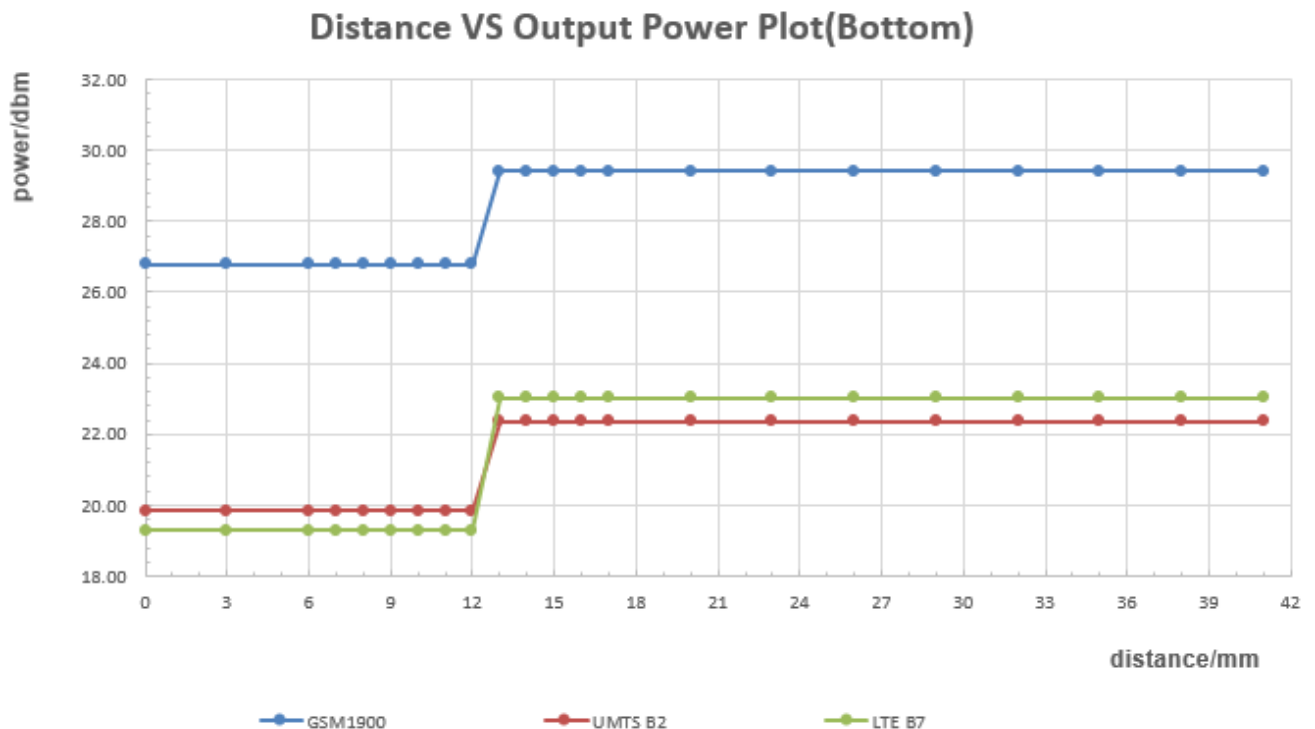

**Conclusion:** It can be ensured that the proximity sensor can be valid triggered.



## 2) Procedures for determining antenna and proximity sensor coverage


There is no spatial offset between the Main antenna and the proximity sensor element, so procedures for determining the proximity sensor coverage does not need to be assessed per KDB616217.

## 3) Procedures for determining device tilt angle influences to proximity sensor triggering

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about Bottom side for angles up to  $\pm 45^\circ$ . If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to  $\pm 45^\circ$ .

The proximity sensor triggering tilt angle measurement method are as below:

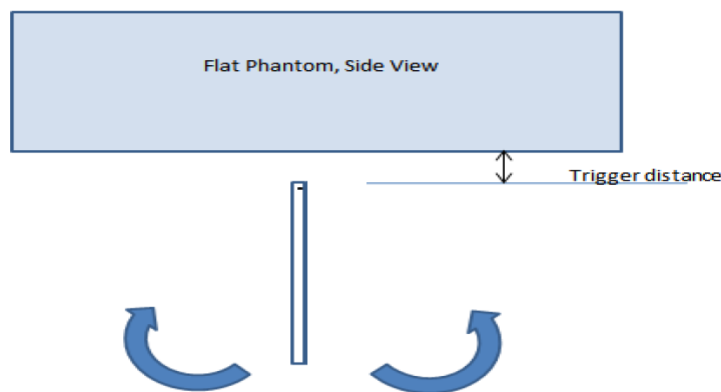

**Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering(Bottom side)**

Band(MHz)	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status										
		$-45^\circ$	$-35^\circ$	$-25^\circ$	$-15^\circ$	$-5^\circ$	$0^\circ$	$5^\circ$	$15^\circ$	$25^\circ$	$35^\circ$	$45^\circ$
GSM 1900	12mm	on	on	on	on	on	on	on	on	on	on	on
UMTS Band 2	12mm	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7	12mm	on	on	on	on	on	on	on	on	on	on	on

**Conclusion:** It can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition (GSM 1900, UMTS Band 2,LTE Band 7)

## 6.7.2 Infrared proximity sensor power reduction test Configuration

The device uses an infrared proximity sensor to reduce the output power of WiFi antenna when VoWiFi or WiFi + 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario or body front side scenario.

A specific external test software and chipset based internal test modes are used in sensor triggering power measurement validation tests. It can be ensured that the unmodified settings in production units, including maximum output power, amplifier gain and other RF performance or tuning parameters, are used for SAR measurement.

In this section, the following procedure is used to determine the triggering distances, coverage and tilt angle influences per FCC KDB 616217 D04 §6.

### 1) Procedures for determining proximity sensor triggering distances

The procedure per FCC KDB 616217 D04 §6.2 is used to determine the triggering distances. As the proximity sensor locates on the front face of the device and detects objects approaching only from the front side, so triggering distance only need to be checked for the front side when device is under voice mode (VoWiFi or WiFi + 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario or body front side scenario).

FCC KDB 616217 D04v01§6.2, the proximity sensor triggering distance measurement results are as below:



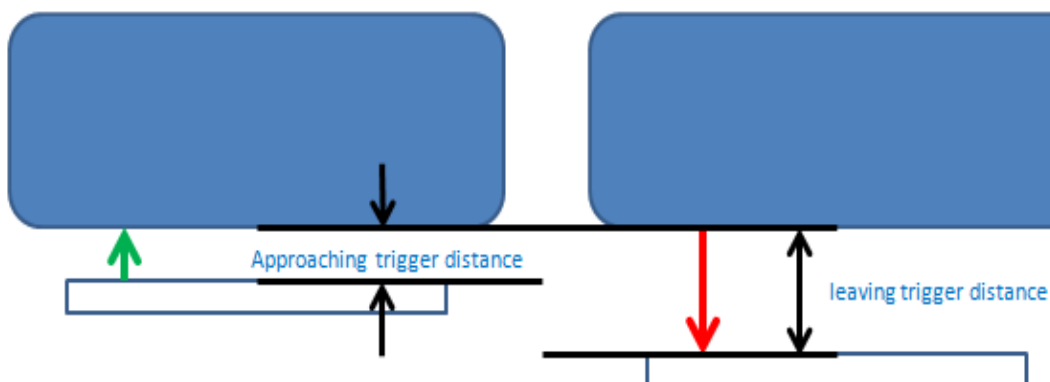


Figure : Proximity sensor triggering distances assessment (Front side only)

The DUT is moved towards from the flat phantom (VoWiFi or WiFi + 2G&3G&4G antenna voice mode simultaneous transmission ):

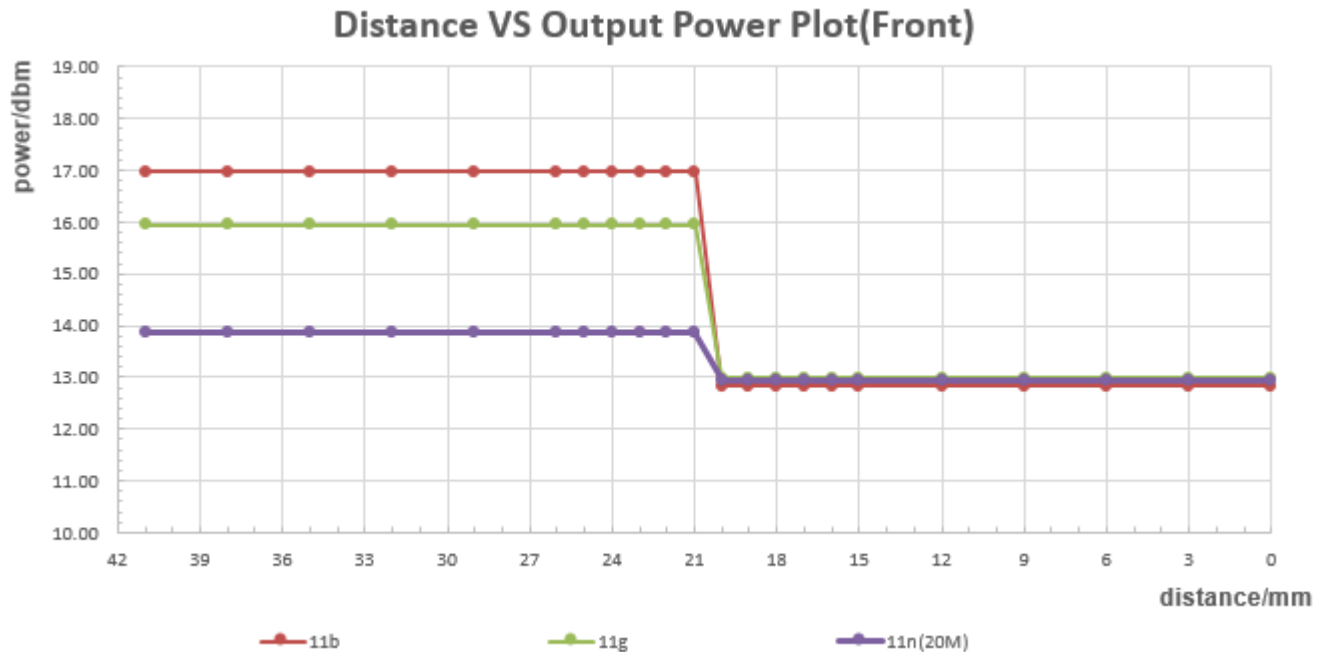

The DUT is moved away from the flat phantom(VoWiFi or WiFi + 2G&3G&4G antenna voice mode simultaneous transmission):

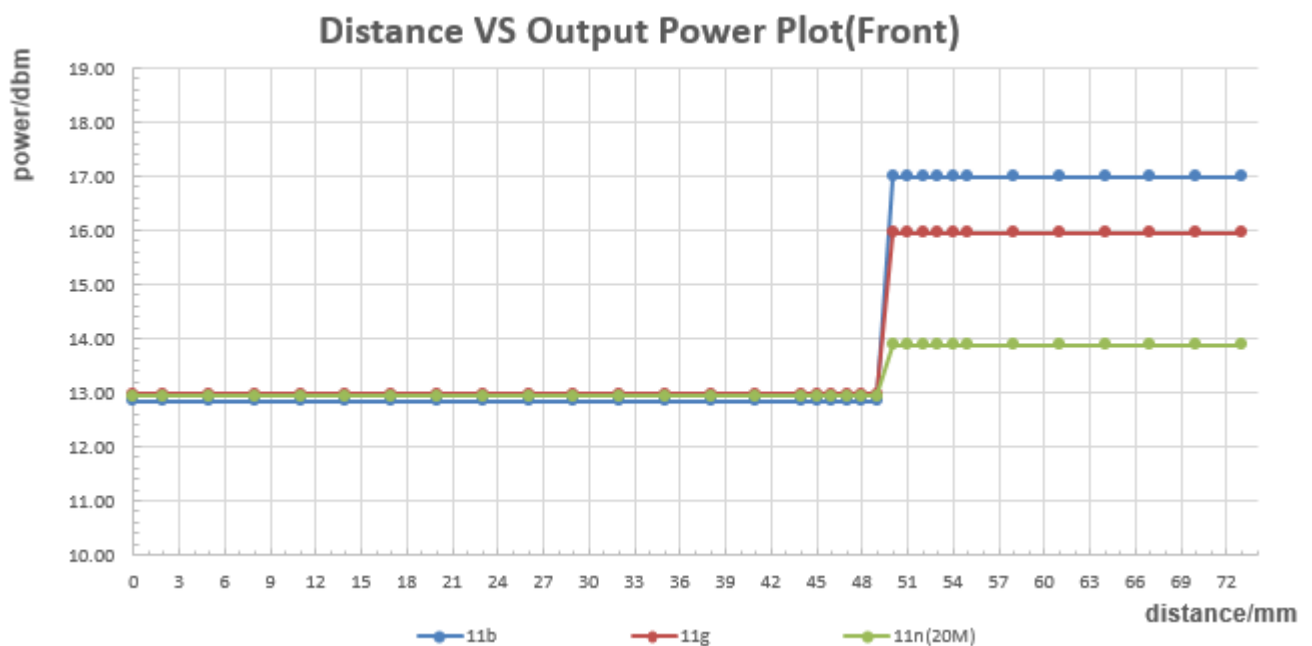

## 2) Procedures for determining antenna and proximity sensor coverage

The IR proximity sensor triggering power reduction is only applicable for the front side, not including the edges. For front side view, there is no spatial offset between the WiFi antenna and the proximity sensor element. The scene does not exist when the antenna is next to the user but the sensor is laterally further away, so procedures for determining the proximity sensor coverage per FCC KDB 616217§6.3 does not need to be assessed.

### 3 ) Procedures for determining device tilt angle influences to proximity sensor triggering

The following procedure is used to determine the triggering angle. Distance need to be check when device under voice mode so that sensor is working.

For Head exposure condition, device tilt angle influences to proximity sensor triggering is determined as below:

Firstly, the DUT was positioned directly touch the Head SAM phantom (Left&Right hand touch cheek position). Rotate the DUT around the ear reference point of the phantom in 5° increments until the DUT is 15° tilted or more away from the touch cheek position at 0°.

Secondly, the DUT is positioned at 15° or more away from the touch cheek position and moved towards the SAM phantom in 5° increments until the DUT directly touch the SAM phantom at 0° (Left & Right hand touch cheek position).

The DUT is moved towards and away from SAM phantom:

Angle between phantom to DUT in degree	0°	5°	10°	15°	20°	25°	30°
Condition of Sensor power reduction (VoWiFi or Wi-Fi + 2G&3G&4G antenna voice)	on	on	on	on	on	on	on

**Conclusion:** Based on the validation results above, angle tilt coverage can ensure that the proximity sensor is valid triggered for all required Head test positions (Left/Right Hand Touched cheek and Left/Right Hand tilted 15 °).

### 4) Summary SAR test Plan for Infrared Proximity sensor power reduction scenarios

a) For Head SAR compliance: The device supports VoWiFi function. Head SAR for Wi-Fi antenna is evaluated at reduced power levels according to the real usage scenarios.

b) For other scenarios: Standalone SAR compliance for Wi-Fi antenna is still tested at the maximum output power level without any power reduction. The more conservative SAR results are used to ensure Body SAR compliance for both standalone and simultaneous transmission scenarios. So additional SAR test at the sensor triggering distance minus 1mm with the maximum output power level per KDB 616217D04 is not required.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore, one coding scheme per mode was selected for conducted power measurements.

### 7.1.1 Conducted power measurements of GSM850

GSM850		Tune-up	Burst-Averaged output Power (dBm)			Division Factors	Tune-up	Frame-Averaged output Power (dBm)		
		Max.	128CH	190CH	251CH		Max.	128CH	190CH	251CH
GSM (CS)		34.00	32.17	<b>32.37</b>	32.42	-9.19	24.81	22.98	23.18	23.23
GPRS (GMSK)	1 Tx Slot	34.00	32.18	32.32	32.48	-9.19	24.81	22.99	23.13	23.29
	2 Tx Slots	31.00	29.36	29.41	29.44	-6.13	24.87	23.23	23.28	23.31
	3 Tx Slots	29.80	27.96	27.86	27.92	-4.42	25.38	23.54	23.44	23.50
	4 Tx Slots	<b>29.00</b>	<b>27.20</b>	<b>27.25</b>	<b>27.03</b>	<b>-3.18</b>	<b>25.82</b>	<b>24.02</b>	<b>24.07</b>	<b>23.85</b>
EDGE (8PSK)	1 Tx Slot	27.10	25.88	26.93	25.62	-9.19	17.91	16.69	17.74	16.43
	2 Tx Slots	24.10	23.15	22.99	22.90	-6.13	17.97	17.02	16.86	16.77
	3 Tx Slots	22.90	22.19	22.42	22.46	-4.42	18.48	17.77	18.00	18.04
	4 Tx Slots	23.10	21.69	21.38	21.29	-3.18	19.92	18.51	18.20	18.11

Table 13: Conducted power measurement results of GSM850

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.2 Conducted power measurements of GSM1900

GSM1900		Tune-up	Burst-Averaged output Power (dBm)			Division Factors	Tune-up	Frame-Averaged output Power (dBm)		
		Max.	512CH	661CH	810CH		Max.	512CH	661CH	810CH
GSM (CS)		30.80	29.24	<b>29.43</b>	29.25	-9.19	21.61	20.05	20.24	20.06
GPRS (GMSK)	1 Tx Slot	30.80	29.10	29.20	29.04	-9.19	21.61	19.91	20.01	19.85
	2 Tx Slots	27.80	26.00	26.14	25.91	-6.13	21.67	19.87	20.01	19.78
	3 Tx Slots	26.80	24.88	24.90	24.78	-4.42	22.38	20.46	20.48	20.36
	4 Tx Slots	<b>26.50</b>	<b>24.68</b>	<b>24.87</b>	<b>24.64</b>	<b>-3.18</b>	<b>23.32</b>	<b>21.50</b>	<b>21.69</b>	<b>21.46</b>
EDGE (8PSK)	1 Tx Slot	26.60	25.12	24.89	24.91	-9.19	17.41	15.93	15.70	15.72
	2 Tx Slots	23.60	22.22	22.18	22.02	-6.13	17.47	16.09	16.05	15.89
	3 Tx Slots	23.40	21.87	21.72	21.54	-4.42	18.98	17.45	17.30	17.12
	4 Tx Slots	23.10	21.42	21.28	21.09	-3.18	19.92	18.24	18.10	17.91

Table 14: Conducted power measurement results of GSM1900(Full power)

GSM1900		Tune-up	Burst-Averaged output Power (dBm)			Division Factors	Tune-up	Frame-Averaged output Power (dBm)		
		Max.	512CH	661CH	810CH		Max.	512CH	661CH	810CH
GSM (CS)		26.80	26.61	26.79	26.58	-9.19	17.61	17.42	17.60	17.39
GPRS (GMSK)	1 Tx Slot	26.80	26.43	26.63	26.40	-9.19	17.61	17.24	17.44	17.21
	2 Tx Slots	23.80	23.04	22.70	22.97	-6.13	17.67	16.91	16.57	16.84
	3 Tx Slots	<b>22.30</b>	<b>21.36</b>	<b>21.31</b>	<b>21.28</b>	<b>-4.42</b>	<b>17.88</b>	<b>16.94</b>	<b>16.89</b>	<b>16.86</b>
	4 Tx Slots	20.80	19.81	19.95	19.67	-3.18	17.62	16.63	16.77	16.49
EDGE (8PSK)	1 Tx Slot	23.50	23.47	23.48	23.26	-9.19	14.31	14.28	14.29	14.07
	2 Tx Slots	20.50	20.25	20.12	20.02	-6.13	14.37	14.12	13.99	13.89
	3 Tx Slots	19.00	18.67	18.50	18.32	-4.42	14.58	14.25	14.08	13.90
	4 Tx Slots	17.50	17.18	17.29	17.04	-3.18	14.32	14.00	14.11	13.86

Table 15: Conducted power measurement results of GSM1900(Hotspot on/Sensor on/ Hotspot on+Sensor on)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.3 Conducted power measurements of UMTS Band 5

UMTS Band 5		Tune-up	Average Power (dBm)		
		Max.	4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>25.00</b>	23.39	<b>23.41</b>	23.48
	12.2kbps AMR	25.00	23.28	23.40	23.35
HSDPA	Subtest 1	24.00	22.40	22.39	22.23
	Subtest 2	24.00	22.22	22.02	22.29
	Subtest 3	23.50	21.99	21.97	21.94
	Subtest 4	23.50	21.80	21.93	21.98
HSUPA	Subtest 1	23.50	21.98	21.64	21.89
	Subtest 2	23.00	20.92	20.71	20.79
	Subtest 3	22.50	21.19	20.75	21.11
	Subtest 4	23.00	21.07	21.22	21.67
	Subtest 5	23.50	22.36	22.31	22.42

Table 16: Conducted power measurement results of UMTS Band 5

Note: 1) The conducted power of UMTS Band 5 is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).

3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.



#### 7.1.4 Conducted power measurements of UMTS Band 2

UMTS Band 2		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.60	22.28	<b>22.36</b>	22.27
	12.2kbps AMR	23.60	22.27	22.49	22.25
HSDPA	Subtest 1	22.60	21.27	21.57	21.27
	Subtest 2	22.60	21.22	21.54	21.30
	Subtest 3	22.10	20.77	20.81	20.71
	Subtest 4	22.10	20.76	20.79	20.73
HSUPA	Subtest 1	22.60	21.17	20.67	21.25
	Subtest 2	21.60	19.99	20.22	19.78
	Subtest 3	21.10	19.61	20.03	20.10
	Subtest 4	22.10	20.73	20.27	20.71
	Subtest 5	22.60	21.33	21.36	21.34

Table 17: Conducted power measurement results of UMTS Band 2 (Full power)

UMTS Band 2		Tune-up	Average Power (dBm)		
		Max.	9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>21.50</b>	<b>19.67</b>	<b>19.83</b>	<b>19.89</b>
	12.2kbps AMR	21.50	19.65	19.77	19.81
HSDPA	Subtest 1	20.50	18.87	18.69	18.93
	Subtest 2	20.50	18.85	18.73	18.84
	Subtest 3	20.00	18.37	18.30	18.35
	Subtest 4	20.00	18.40	18.24	18.33
HSUPA	Subtest 1	20.50	18.24	18.03	18.69
	Subtest 2	19.50	17.75	17.88	17.93
	Subtest 3	19.00	17.43	17.10	17.89
	Subtest 4	20.00	17.88	18.10	18.40
	Subtest 5	20.50	18.90	18.99	18.93

Table 18: Conducted power measurement results of UMTS Band 2 (Hotspot on/Sensor on/ Hotspot on+Sensor on)

Note: 1) The conducted power of UMTS Band 2 is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).

3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.5 Conducted power measurements of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.00	22.54	22.67	22.63
		1	3	24.00	22.70	22.68	22.80
		1	5	24.00	22.62	22.67	22.70
		3	0	24.00	22.61	22.66	22.68
		3	2	24.00	22.71	22.65	22.85
		3	3	24.00	22.83	22.61	22.71
		6	0	23.00	21.78	21.69	21.81
	16QAM	1	0	22.00	21.23	21.67	21.51
		1	3	22.00	21.11	21.82	21.51
		1	5	22.00	21.29	21.82	21.50
		3	0	22.00	21.73	21.50	21.75
		3	2	22.00	21.72	21.54	21.74
		3	3	22.00	21.66	21.96	21.67
		6	0	21.00	20.87	20.73	20.79
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.00	22.65	22.54	22.70
		1	7	24.00	22.79	22.65	22.77
		1	14	24.00	22.71	22.61	22.83
		8	0	23.00	21.92	21.81	21.73
		8	4	23.00	21.76	21.80	21.85
		8	7	23.00	21.72	21.78	21.87
		15	0	23.00	21.81	21.78	21.71
	16QAM	1	0	23.00	21.68	21.69	21.64
		1	7	23.00	21.94	21.55	22.04
		1	14	23.00	21.74	21.55	21.73
		8	0	22.00	21.01	20.65	20.86
		8	4	22.00	20.66	20.67	20.97
		8	7	22.00	20.63	20.71	20.87
		15	0	22.00	20.85	20.68	20.90

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.00	22.41	22.39	22.32
		1	13	24.00	22.52	22.61	22.71
		1	24	24.00	22.55	22.47	22.78
		12	0	23.00	21.87	21.72	21.61
		12	6	23.00	21.77	21.79	21.83
		12	13	23.00	21.75	21.70	21.77
		25	0	23.00	21.90	21.72	21.68
	16QAM	1	0	23.00	20.87	21.76	20.94
		1	13	23.00	20.96	21.81	21.26
		1	24	23.00	21.02	21.73	21.16
		12	0	22.00	20.71	20.67	20.37
		12	6	22.00	20.71	20.63	20.70
		12	13	22.00	20.59	20.55	20.71
		25	0	22.00	20.88	20.53	20.61
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.00	22.61	22.72	22.47
		1	25	24.00	<b>22.93</b>	22.69	22.70
		1	49	24.00	22.61	22.56	22.56
		25	0	23.00	21.80	21.70	21.68
		25	13	23.00	<b>21.92</b>	21.77	21.74
		25	25	23.00	21.84	21.72	21.84
		50	0	23.00	21.80	21.70	21.60
	16QAM	1	0	23.00	21.44	21.36	21.49
		1	25	23.00	21.25	21.53	21.92
		1	49	23.00	21.15	21.32	22.02
		25	0	22.00	20.96	20.86	20.59
		25	13	22.00	21.07	20.94	20.74
		25	25	22.00	21.03	20.62	20.72
		50	0	22.00	20.57	20.68	20.52

Table 19: Conducted power measurement results of LTE Band 5

### 7.1.1 Conducted power measurements of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	24.00	22.56	22.38	22.91
		1	13	24.00	22.98	22.64	22.99
		1	24	24.00	22.65	22.53	22.74
		12	0	23.00	21.75	21.66	21.83
		12	6	23.00	21.90	21.80	21.89
		12	13	23.00	21.85	21.84	21.80
		25	0	23.00	21.77	21.76	21.81
	16QAM	1	0	23.00	21.53	21.83	21.15
		1	13	23.00	21.47	22.09	21.14
		1	24	23.00	21.20	21.95	21.11
		12	0	22.00	20.90	20.67	20.79
		12	6	22.00	20.89	20.75	20.83
		12	13	22.00	20.83	20.85	20.55
		25	0	22.00	20.68	20.75	20.73
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	24.00	22.75	22.76	23.08
		1	25	24.00	23.32	23.05	23.18
		1	49	24.00	22.77	22.66	22.95
		25	0	23.00	21.74	21.76	21.88
		25	13	23.00	21.90	21.82	21.94
		25	25	23.00	21.87	21.72	21.85
		50	0	23.00	21.76	21.75	21.83
	16QAM	1	0	23.00	21.68	20.88	21.39
		1	25	23.00	21.68	21.80	22.10
		1	49	23.00	20.95	21.05	21.37
		25	0	22.00	20.68	20.99	21.00
		25	13	22.00	20.96	20.76	20.97
		25	25	22.00	20.83	20.70	20.98
		50	0	22.00	20.83	20.72	20.96

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	24.00	22.88	22.60	22.76
		1	38	24.00	23.24	22.72	22.87
		1	74	24.00	22.88	22.54	22.79
		36	0	23.00	21.88	21.71	21.88
		36	18	23.00	21.80	21.79	22.06
		36	39	23.00	21.81	21.77	21.93
		75	0	23.00	21.72	21.68	21.76
	16QAM	1	0	23.00	21.87	20.83	21.72
		1	38	23.00	21.83	21.29	22.02
		1	74	23.00	21.08	21.02	21.82
		36	0	22.00	20.93	20.70	20.80
		36	18	22.00	21.03	20.83	20.98
		36	39	22.00	20.86	20.85	20.93
		75	0	22.00	20.75	20.87	20.81
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	24.00	22.16	22.70	22.54
		1	50	24.00	22.64	23.02	<b>23.05</b>
		1	99	24.00	22.35	22.89	22.74
		50	0	23.00	21.82	21.76	21.82
		50	25	23.00	21.95	21.79	<b>22.00</b>
		50	50	23.00	21.84	21.79	21.88
		100	0	23.00	21.94	21.71	21.85
	16QAM	1	0	23.00	21.73	21.69	21.48
		1	50	23.00	22.04	22.55	22.35
		1	99	23.00	21.55	22.10	21.96
		50	0	22.00	20.87	20.67	20.77
		50	25	22.00	20.99	20.75	20.98
		50	50	22.00	20.88	20.73	20.85
		100	0	22.00	20.88	20.73	20.92

Table 20: Conducted power measurement results of LTE Band 7 (Full power)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20775CH	21100CH	21425CH
5MHz	QPSK	1	0	20.00	18.76	18.63	18.89
		1	13	20.00	18.82	18.61	18.96
		1	24	20.00	18.77	18.56	18.81
		12	0	20.00	18.71	18.80	18.91
		12	6	20.00	18.85	18.94	18.97
		12	13	20.00	18.81	18.87	18.88
		25	0	20.00	18.73	18.79	18.89
	16QAM	1	0	20.00	18.23	18.80	18.11
		1	13	20.00	18.36	18.94	18.20
		1	24	20.00	18.28	18.62	18.06
		12	0	20.00	18.53	18.88	18.84
		12	6	20.00	18.90	19.00	18.89
		12	13	20.00	18.92	19.04	18.90
		25	0	20.00	18.78	18.82	18.76
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20800CH	21100CH	21400CH
10MHz	QPSK	1	0	20.00	18.74	18.67	18.65
		1	25	20.00	19.14	19.09	19.07
		1	49	20.00	18.83	18.63	18.70
		25	0	20.00	18.77	18.73	18.84
		25	13	20.00	18.76	18.91	19.01
		25	25	20.00	18.72	18.88	18.79
		50	0	20.00	18.73	18.81	18.78
	16QAM	1	0	20.00	18.69	17.95	18.19
		1	25	20.00	18.72	19.02	19.22
		1	49	20.00	18.53	18.48	18.24
		25	0	20.00	18.61	18.65	18.69
		25	13	20.00	18.94	18.84	18.97
		25	25	20.00	18.79	18.80	18.77
		50	0	20.00	18.83	18.71	18.75

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20825CH	21100CH	21375CH
15MHz	QPSK	1	0	20.00	18.99	18.33	18.80
		1	38	20.00	19.04	18.81	18.82
		1	74	20.00	18.98	18.82	18.62
		36	0	20.00	18.73	18.61	18.79
		36	18	20.00	18.81	18.83	18.96
		36	39	20.00	18.82	18.84	18.92
		75	0	20.00	18.72	18.76	18.73
	16QAM	1	0	20.00	18.92	18.22	18.88
		1	38	20.00	18.88	18.85	19.40
		1	74	20.00	17.97	18.83	18.59
		36	0	20.00	18.83	18.68	18.77
		36	18	20.00	19.00	18.92	18.86
		36	39	20.00	18.91	18.91	18.82
		75	0	20.00	18.79	18.74	18.78
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
				Max.	20850CH	21100CH	21350CH
20MHz	QPSK	1	0	20.00	18.24	18.64	18.43
		1	50	20.00	18.68	<b>19.30</b>	19.05
		1	99	20.00	18.31	18.82	18.57
		50	0	20.00	18.75	18.62	18.80
		50	25	20.00	18.86	18.89	<b>19.00</b>
		50	50	20.00	18.76	18.84	18.87
		100	0	20.00	18.86	18.78	18.85
	16QAM	1	0	20.00	18.91	18.43	18.37
		1	50	20.00	19.30	19.52	19.28
		1	99	20.00	18.93	18.65	18.48
		50	0	20.00	18.94	18.68	18.65
		50	25	20.00	19.05	18.84	18.94
		50	50	20.00	18.83	18.89	18.82
		100	0	20.00	18.84	18.74	18.79

Table 21: Conducted power measurement results of LTE Band 7 (Hotspot on/Sensor on/ Hotspot on+Sensor on)

### 7.1.2 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Mode	Duty ratio	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	97.51%	1	2412	1Mbps	18	16.89	No
		6	2437		18	<b>16.98</b>	Yes
		11	2462		18	16.94	No
802.11g	86.87%	1	2412	6Mbps	15.5	14.26	No
		6	2437		17	15.95	No
		11	2462		17	15.97	No
802.11n 20M	85.92%	1	2412	MCS0	15	14.07	No
		6	2437		15	13.88	No
		11	2462		15	13.91	No
802.11n 40M	86.57%	3	2422	MCS0	14	13.64	No
		6	2437		14	13.52	No
		9	2452		14	13.34	No

Table 22: Conducted power measurement results of WiFi 2.4G(Full power level).

Mode	Duty ratio	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	97.51%	1	2412	1Mbps	14	<b>13.39</b>	Yes
		6	2437		14	12.84	No
		11	2462		14	12.95	No
802.11g	86.87%	1	2412	6Mbps	14	13.24	No
		6	2437		14	12.98	No
		11	2462		14	12.99	No
802.11n 20M	85.92%	1	2412	MCS0	14	13.08	No
		6	2437		14	12.85	No
		11	2462		14	12.93	No
802.11n 40M	86.57%	3	2422	MCS0	14	13.64	No
		6	2437		14	13.52	No
		9	2452		14	13.34	No

Table 23: Conducted power measurement results of WiFi 2.4G(proximity sensor reduction power level).

Note: The Average conducted power of WiFi is measured with RMS detector.



### 7.1.3 Conducted power measurements of BT

The output power of BT antenna is as the following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	9.50	8.85	9.17	7.65
2DH5	9.50	7.82	8.11	6.58
3DH5	9.50	7.82	8.12	6.57

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BLE	2.0	-0.54	-0.34	-1.90

Table 24: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

## 7.2 SAR measurement Results

### General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .When the maximum output power variation across the required test channels is  $> \frac{1}{2}\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/Kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45\text{W/Kg}$ , only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq 1.2\text{ W/kg}$ , no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5\text{ W/kg}$ , or  $> 7.0\text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

### GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

**UMTS Notes:**

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

**LTE Notes:**

1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices. The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

3) According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR is tested using a fixed periodic duty factor according to the highest transmission duty factor (63.33%) implemented for the device and supported by the defined 3GPP LTE TDD configurations.

**WiFi Notes:**

Per KDB248227D01:

1) When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested..

2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations

4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

## 7.2.1 SAR measurement Result of GSM850

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	190/836.6	GSM	0.192	0.146	-0.11	32.37	34.00	0.279	Battery 1#	Yes
Left tilt	/	190/836.6	GSM	0.156	0.117	-0.05	32.37	34.00	0.227	Battery 1#	/
Right touch	/	190/836.6	GSM	0.178	0.140	-0.04	32.37	34.00	0.259	Battery 1#	/
Right tilt	/	190/836.6	GSM	0.170	0.127	-0.12	32.37	34.00	0.247	Battery 1#	/
Left touch	/	190/836.6	GSM	0.182	0.139	-0.14	32.37	34.00	0.265	Battery 2#	/
Left touch	/	190/836.6	GSM	0.163	0.123	-0.09	32.37	34.00	0.237	Battery 3#	/
Left touch	/	190/836.6	GSM	0.162	0.121	-0.12	32.37	34.00	0.236	Battery 4#	/
Left touch	/	190/836.6	GSM	0.124	0.093	-0.07	32.37	34.00	0.180	Battery 5#	/
Left touch	/	190/836.6	GSM	0.159	0.120	-0.10	32.37	34.00	0.231	Battery 6#	/

Table 25: Head SAR test results of GSM850

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	190/836.6	GSM	0.135	0.110	-0.19	32.37	34.00	0.196	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.236	0.191	-0.05	32.37	34.00	0.343	Battery 1#	/
Back Side	15mm	190/836.6	GSM	0.224	0.197	-0.14	32.37	34.00	0.326	Battery 2#	/
Back Side	15mm	190/836.6	GSM	0.244	0.198	-0.04	32.37	34.00	0.355	Battery 3#	/
Back Side	15mm	190/836.6	GSM	0.243	0.197	-0.09	32.37	34.00	0.354	Battery 4#	/
Back Side	15mm	190/836.6	GSM	0.224	0.183	-0.15	32.37	34.00	0.326	Battery 5#	/
Back Side	15mm	190/836.6	GSM	0.246	0.202	0.00	32.37	34.00	0.358	Battery 6#	Yes

Table 26: Body-Worn SAR test results of GSM850

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	190/836.6	GPRS 4TS	0.120	0.076	0.02	27.25	29.00	0.180	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.238	0.139	0.15	27.25	29.00	0.356	Battery 1#	/
Left Side	10mm	190/836.6	GPRS 4TS	0.136	0.092	0.02	27.25	29.00	0.203	Battery 1#	/
Right Side	10mm	190/836.6	GPRS 4TS	0.169	0.112	-0.19	27.25	29.00	0.253	Battery 1#	/
Bottom Side	10mm	190/836.6	GPRS 4TS	0.061	0.038	-0.02	27.25	29.00	0.091	Battery 1#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.228	0.135	0.16	27.25	29.00	0.341	Battery 2#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.253	0.150	0.16	27.25	29.00	0.379	Battery 3#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.313	0.253	-0.18	27.25	29.00	0.468	Battery 4#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.305	0.250	-0.05	27.25	29.00	0.456	Battery 5#	/
Back Side	10mm	190/836.6	GPRS 4TS	0.368	0.302	0.02	27.25	29.00	0.551	Battery 6#	Yes

Table 27: Hotspot SAR test results of GSM850

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conduct ed Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SA R Plot.
				1-g	10-g						
Left touch	/	661/1880	GSM	0.038	0.022	-0.10	29.43	30.80	0.053	Battery 1#	/
Left tilt	/	661/1880	GSM	0.038	0.022	-0.01	29.43	30.80	0.052	Battery 1#	/
Right touch	/	661/1880	GSM	0.055	0.035	-0.02	29.43	30.80	0.075	Battery 1#	/
Right tilt	/	661/1880	GSM	0.036	0.019	-0.05	29.43	30.80	0.049	Battery 1#	/
Right touch	/	661/1880	GSM	0.056	0.036	-0.18	29.43	30.80	0.077	Battery 2#	/
Right touch	/	661/1880	GSM	0.059	0.038	-0.06	29.43	30.80	0.081	Battery 3#	/
Right touch	/	661/1880	GSM	0.055	0.035	0.19	29.43	30.80	0.076	Battery 4#	/
Right touch	/	661/1880	GSM	0.062	0.040	0.17	29.43	30.80	0.085	Battery 5#	Yes
Right touch	/	661/1880	GSM	0.047	0.030	-0.08	29.43	30.80	0.064	Battery 6#	/

Table 28: Head SAR test results of GSM1900

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conduct ed Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SA R Plot.
				1-g	10-g						
Front Side	15mm	661/1880	GSM	0.185	0.103	-0.09	29.43	30.80	0.254	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.448	0.270	-0.13	29.43	30.80	0.614	Battery 1#	/
Back Side	15mm	661/1880	GSM	0.438	0.264	-0.07	29.43	30.80	0.600	Battery 2#	/
Back Side	15mm	661/1880	GSM	0.384	0.235	0.00	29.43	30.80	0.526	Battery 3#	/
Back Side	15mm	661/1880	GSM	0.577	0.347	0.01	29.43	30.80	0.791	Battery 4#	/
Back Side	15mm	661/1880	GSM	0.581	0.347	0.04	29.43	30.80	0.796	Battery 5#	Yes
Back Side	15mm	661/1880	GSM	0.526	0.318	-0.05	29.43	30.80	0.721	Battery 6#	/

Table 29: Body-Worn SAR test results of GSM1900

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	661/1880	GPRS 3TS	0.326	0.189	0.09	21.31	22.30	0.409	Battery 1#	/
Back Side	10mm	661/1880	GPRS 3TS	0.638	0.354	0.06	21.31	22.30	0.801	Battery 1#	/
Back Side	10mm	512/1850.2	GPRS 3TS	0.725	0.407	0.01	21.36	22.30	0.900	Battery 1#	/
Back Side	10mm	810/1909.8	GPRS 3TS	0.359	0.185	-0.04	21.28	22.30	0.454	Battery 1#	/
Left Side	10mm	661/1880	GPRS 3TS	0.020	0.012	-0.12	21.31	22.30	0.025	Battery 1#	/
Right Side	10mm	661/1880	GPRS 3TS	0.035	0.020	-0.13	21.31	22.30	0.044	Battery 1#	/
Bottom Side	10mm	661/1880	GPRS 3TS	0.697	0.402	-0.04	21.31	22.30	0.875	Battery 1#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.731	0.423	-0.05	21.36	22.30	0.908	Battery 1#	/
Bottom Side	10mm	810/1909.8	GPRS 3TS	0.471	0.269	-0.11	21.28	22.30	0.596	Battery 1#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.829	0.476	0.11	21.36	22.30	1.029	Battery 2#	Yes
Bottom Side-Repeated	10mm	512/1850.2	GPRS 3TS	0.822	0.473	0.12	21.36	22.30	1.021	Battery 3#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.681	0.392	-0.04	21.36	22.30	0.846	Battery 3#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.645	0.368	0.14	21.36	22.30	0.801	Battery 4#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.710	0.404	0.17	21.36	22.30	0.882	Battery 5#	/
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.647	0.369	0.17	21.36	22.30	0.803	Battery 6#	/

Table 30: Hotspot SAR test results of GSM1900



Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
				1-g	10-g						
Front Side	10mm	661/1880	GPRS 3TS	0.326	0.189	0.09	21.31	26.80	1.154	Battery 1#	Yes
Back Side	10mm	661/1880	GPRS 3TS	0.638	0.354	0.06	21.31	26.80	2.259	Battery 1#	No
Back Side	10mm	512/1850.2	GPRS 3TS	0.725	0.407	0.01	21.36	26.80	2.537	Battery 1#	No
Back Side	10mm	810/1909.8	GPRS 3TS	0.359	0.185	-0.04	21.28	26.80	1.280	Battery 1#	No
Left Side	10mm	661/1880	GPRS 3TS	0.020	0.012	-0.12	21.31	26.80	0.072	Battery 1#	Yes
Right Side	10mm	661/1880	GPRS 3TS	0.035	0.020	-0.13	21.31	26.80	0.124	Battery 1#	Yes
Bottom Side	10mm	661/1880	GPRS 3TS	0.697	0.402	-0.04	21.31	26.80	2.467	Battery 1#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.731	0.423	-0.05	21.36	26.80	2.558	Battery 1#	No
Bottom Side	10mm	810/1909.8	GPRS 3TS	0.471	0.269	-0.11	21.28	26.80	1.679	Battery 1#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.829	0.476	0.11	21.36	26.80	2.901	Battery 2#	No
Bottom Side-Repeated	10mm	512/1850.2	GPRS 3TS	0.822	0.473	0.12	21.36	26.8	2.877	Battery 2#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.681	0.392	-0.04	21.36	26.80	2.383	Battery 3#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.645	0.368	0.14	21.36	26.80	2.257	Battery 4#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.710	0.404	0.17	21.36	26.80	2.485	Battery 5#	No
Bottom Side	10mm	512/1850.2	GPRS 3TS	0.647	0.369	0.17	21.36	26.80	2.264	Battery 6#	No

Product Specific 10-g SAR	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Back Side	0mm	661/1880	GPRS 3TS	2.890	1.260	0.13	21.31	22.30	1.583	Battery 1#	/
Bottom Side	0mm	661/1880	GPRS 3TS	3.980	1.820	0.13	21.31	22.30	2.286	Battery 1#	/
Bottom Side	0mm	512/1850.2	GPRS 3TS	2.880	1.340	-0.16	21.36	22.30	1.664	Battery 1#	/
Bottom Side	0mm	810/1909.8	GPRS 3TS	3.190	1.440	-0.13	21.28	22.30	1.821	Battery 1#	/
Bottom Side	0mm	661/1880	GPRS 3TS	3.290	1.510	-0.12	21.31	22.30	1.897	Battery 2#	/
Bottom Side	0mm	661/1880	GPRS 3TS	3.140	1.450	-0.19	21.31	22.30	1.821	Battery 3#	/
Bottom Side	0mm	661/1880	GPRS 3TS	3.370	1.540	-0.12	21.31	22.30	1.934	Battery 4#	/
Bottom Side	0mm	661/1880	GPRS 3TS	3.980	1.980	-0.15	21.31	22.30	2.487	Battery 5#	Yes
Bottom Side	0mm	661/1880	GPRS 3TS	3.370	1.550	-0.19	21.31	22.30	1.947	Battery 6#	/
Additional SAR Test with SAR sensor off(hotspot off)											
Back Side	13mm	661/1880	GPRS 4TS	0.841	0.496	0.07	24.87	26.50	0.722	Battery 5#	/
Bottom Side	11mm	661/1880	GPRS 4TS	1.330	0.771	0.05	24.87	26.50	1.122	Battery 5#	/

Table 31: Product Specific 10-g SAR test results of GSM1900

### 7.2.3 SAR measurement Result of UMTS Band 5

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	4182/836.4	RMC	0.147	0.115	-0.01	23.41	25.00	0.212	Battery 1#	Yes
Left tilt	/	4182/836.4	RMC	0.097	0.068	0.07	23.41	25.00	0.139	Battery 1#	/
Right touch	/	4182/836.4	RMC	0.141	0.098	0.07	23.41	25.00	0.203	Battery 1#	/
Right tilt	/	4182/836.4	RMC	0.088	0.068	-0.11	23.41	25.00	0.126	Battery 1#	/
Left touch	/	4182/836.4	RMC	0.106	0.074	-0.19	23.41	25.00	0.153	Battery 2#	/
Left touch	/	4182/836.4	RMC	0.126	0.088	-0.09	23.41	25.00	0.182	Battery 3#	/
Left touch	/	4182/836.4	RMC	0.118	0.091	-0.07	23.41	25.00	0.170	Battery 4#	/
Left touch	/	4182/836.4	RMC	0.101	0.071	0.10	23.41	25.00	0.146	Battery 5#	/
Left touch	/	4182/836.4	RMC	0.133	0.093	0.08	23.41	25.00	0.192	Battery 6#	/

Table 32: Head SAR test results of UMTS Band 5

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	4182/836.4	RMC	0.130	0.092	-0.02	23.41	25.00	0.187	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.235	0.193	0.01	23.41	25.00	0.339	Battery 1#	/
Back Side	15mm	4182/836.4	RMC	0.265	0.218	-0.06	23.41	25.00	0.382	Battery 2#	/
Back Side	15mm	4182/836.4	RMC	0.283	0.232	0.03	23.41	25.00	0.408	Battery 3#	Yes
Back Side	15mm	4182/836.4	RMC	0.233	0.165	-0.02	23.41	25.00	0.336	Battery 4#	/
Back Side	15mm	4182/836.4	RMC	0.209	0.148	-0.10	23.41	25.00	0.301	Battery 5#	/
Back Side	15mm	4182/836.4	RMC	0.211	0.149	-0.01	23.41	25.00	0.304	Battery 6#	/

Table 33: Body-Worn SAR test results of UMTS Band 5

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	4182/836.4	RMC	0.131	0.092	-0.01	23.41	25.00	0.189	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.268	0.225	-0.11	23.41	25.00	0.386	Battery 1#	/
Left Side	10mm	4182/836.4	RMC	0.205	0.138	-0.06	23.41	25.00	0.296	Battery 1#	/
Right Side	10mm	4182/836.4	RMC	0.186	0.126	-0.08	23.41	25.00	0.268	Battery 1#	/
Bottom Side	10mm	4182/836.4	RMC	0.058	0.038	-0.16	23.41	25.00	0.083	Battery 1#	/
Back Side	10mm	4182/836.4	RMC	0.305	0.254	0.13	23.41	25.00	0.440	Battery 2#	/
Back Side	10mm	4182/836.4	RMC	0.319	0.264	0.07	23.41	25.00	0.460	Battery 3#	Yes
Back Side	10mm	4182/836.4	RMC	0.232	0.164	0.00	23.41	25.00	0.335	Battery 4#	/
Back Side	10mm	4182/836.4	RMC	0.241	0.171	-0.02	23.41	25.00	0.348	Battery 5#	/
Back Side	10mm	4182/836.4	RMC	0.232	0.164	-0.07	23.41	25.00	0.335	Battery 6#	/

Table 34: Hotspot SAR test results of UMTS Band 5

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.4 SAR measurement Result of UMTS Band 2

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	9400/1880	RMC	0.042	0.024	0.15	22.36	23.60	0.055	Battery 1#	/
Left tilt	/	9400/1880	RMC	0.043	0.026	0.09	22.36	23.60	0.057	Battery 1#	/
Right touch	/	9400/1880	RMC	0.056	0.036	0.07	22.36	23.60	0.074	Battery 1#	/
Right tilt	/	9400/1880	RMC	0.052	0.026	0.12	22.36	23.60	0.069	Battery 1#	/
Right touch	/	9400/1880	RMC	0.062	0.040	0.13	22.36	23.60	0.083	Battery 2#	Yes
Right touch	/	9400/1880	RMC	0.062	0.039	0.04	22.36	23.60	0.083	Battery 3#	/
Right touch	/	9400/1880	RMC	0.062	0.040	0.11	22.36	23.60	0.083	Battery 4#	/
Right touch	/	9400/1880	RMC	0.061	0.038	0.02	22.36	23.60	0.081	Battery 5#	/
Right touch	/	9400/1880	RMC	0.060	0.038	-0.12	22.36	23.60	0.080	Battery 6#	/

Table 35: Head SAR test results of UMTS Band 2

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	9400/1880	RMC	0.183	0.103	-0.03	22.36	23.60	0.243	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.398	0.242	0.06	22.36	23.60	0.530	Battery 1#	/
Back Side	15mm	9400/1880	RMC	0.445	0.270	0.04	22.36	23.60	0.592	Battery 2#	/
Back Side	15mm	9400/1880	RMC	0.468	0.283	-0.03	22.36	23.60	0.623	Battery 3#	/
Back Side	15mm	9400/1880	RMC	0.575	0.341	0.00	22.36	23.60	0.765	Battery 4#	Yes
Back Side	15mm	9400/1880	RMC	0.466	0.282	0.18	22.36	23.60	0.620	Battery 5#	/
Back Side	15mm	9400/1880	RMC	0.486	0.293	0.03	22.36	23.60	0.647	Battery 6#	/

Table 36: Body-Worn SAR test results of UMTS Band 2

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	9400/1880	RMC	0.200	0.107	-0.19	19.83	21.50	0.294	Battery 1#	/
Back Side	10mm	9400/1880	RMC	0.568	0.318	0.10	19.83	21.50	0.834	Battery 1#	/
Back Side	10mm	9262/1852.4	RMC	0.668	0.377	0.10	19.67	21.50	1.018	Battery 1#	/
Back Side	10mm	9538/1907.6	RMC	0.528	0.289	0.09	19.89	21.50	0.765	Battery 1#	/
Left Side	10mm	9400/1880	RMC	0.030	0.017	-0.17	19.83	21.50	0.044	Battery 1#	/
Right Side	10mm	9400/1880	RMC	0.050	0.028	-0.04	19.83	21.50	0.073	Battery 1#	/
Bottom Side	10mm	9400/1880	RMC	0.718	0.410	-0.19	19.83	21.50	1.055	Battery 1#	/
Bottom Side	10mm	9262/1852.4	RMC	0.759	0.438	0.19	19.67	21.50	1.157	Battery 1#	/
Bottom Side	10mm	9538/1907.6	RMC	0.595	0.340	0.19	19.89	21.50	0.862	Battery 1#	/
Bottom Side	10mm	9262/1852.4	RMC	0.593	0.336	0.19	19.83	21.50	0.871	Battery 2#	/
Bottom Side	10mm	9262/1852.4	RMC	0.593	0.308	-0.14	19.67	21.50	0.904	Battery 3#	/
Bottom Side	10mm	9262/1852.4	RMC	0.735	0.422	0.16	19.67	21.50	1.120	Battery 4#	/
Bottom Side	10mm	9262/1852.4	RMC	0.846	0.487	0.16	19.67	21.50	1.289	Battery 5#	Yes
Bottom Side-holder perturbation verification	10mm	9262/1852.4	RMC	0.702	0.401	-0.19	19.67	21.50	1.070	Battery 5#	/
Bottom Side-Repeated	10mm	9262/1852.4	RMC	0.772	0.442	0.19	19.67	21.50	1.177	Battery 5#	/
Bottom Side	10mm	9262/1852.4	RMC	0.684	0.393	0.19	19.67	21.50	1.042	Battery 5#	/
Bottom Side	10mm	9262/1852.4	RMC	0.772	0.442	0.19	19.67	21.50	1.177	Battery 6#	/

Table 37: Hotspot SAR test results of UMTS Band 2

Note: According to 201610 FCC TCB workshop RF exposure slides, when the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
				1-g	10-g						
Front Side	10mm	9400/1880	RMC	0.200	0.107	-0.19	19.83	23.60	0.476	Battery 1#	Yes
Back Side	10mm	9400/1880	RMC	0.568	0.318	0.10	19.83	23.60	1.353	Battery 1#	No
Back Side	10mm	9262/1852.4	RMC	0.668	0.377	0.10	19.67	23.60	1.651	Battery 1#	No
Back Side	10mm	9538/1907.6	RMC	0.528	0.289	0.09	19.89	23.60	1.241	Battery 1#	No
Left Side	10mm	9400/1880	RMC	0.030	0.017	-0.17	19.83	23.60	0.072	Battery 1#	Yes
Right Side	10mm	9400/1880	RMC	0.050	0.028	-0.04	19.83	23.60	0.119	Battery 1#	Yes
Bottom Side	10mm	9400/1880	RMC	0.718	0.410	-0.19	19.83	23.60	1.711	Battery 1#	No
Bottom Side	10mm	9262/1852.4	RMC	0.759	0.438	0.19	19.67	23.60	1.876	Battery 1#	No
Bottom Side	10mm	9538/1907.6	RMC	0.595	0.340	0.19	19.89	23.60	1.398	Battery 1#	No
Bottom Side	10mm	9400/1880	RMC	0.593	0.336	0.19	19.83	23.60	1.413	Battery 2#	No
Bottom Side	10mm	9262/1852.4	RMC	0.593	0.308	-0.14	19.67	23.60	1.466	Battery 3#	No
Bottom Side	10mm	9262/1852.4	RMC	0.735	0.422	0.16	19.67	23.60	1.817	Battery 4#	No
Bottom Side	10mm	9262/1852.4	RMC	0.846	0.487	0.16	19.67	23.60	2.091	Battery 5#	No
Bottom Side-holder perturbation verification	10mm	9262/1852.4	RMC	0.702	0.401	-0.19	19.67	23.60	1.735	Battery 5#	No
Bottom Side-Repeated	10mm	9262/1852.4	RMC	0.772	0.442	0.19	19.67	23.60	1.908	Battery 5#	No
Bottom Side	10mm	9262/1852.4	RMC	0.684	0.393	0.19	19.67	23.60	1.691	Battery 5#	No
Bottom Side	10mm	9262/1852.4	RMC	0.772	0.442	0.19	19.67	23.60	1.908	Battery 6#	No

Product Specific 10-g SAR	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Back Side	0mm	9400/1880	RMC	3.710	1.600	0.16	19.83	21.50	2.350	Battery 1#	/
Back Side	0mm	9262/1852.4	RMC	3.720	1.630	0.17	19.67	21.50	2.484	Battery 1#	/
Back Side	0mm	9538/1907.6	RMC	3.340	1.260	0.16	19.89	21.50	1.825	Battery 1#	/
Bottom Side	0mm	9400/1880	RMC	3.780	1.690	-0.09	19.83	21.50	2.482	Battery 1#	/
Bottom Side	0mm	9262/1852.4	RMC	4.040	1.840	-0.12	19.67	21.50	2.804	Battery 1#	Yes
Bottom Side	0mm	9538/1907.6	RMC	3.100	1.330	-0.09	19.89	21.50	1.927	Battery 1#	/
Bottom Side	0mm	9262/1852.4	RMC	3.990	1.820	0.17	19.67	21.50	2.774	Battery 2#	/
Bottom Side	0mm	9262/1852.4	RMC	3.930	1.810	0.12	19.67	21.50	2.759	Battery 3#	/
Bottom Side	0mm	9262/1852.4	RMC	3.730	1.680	0.19	19.67	21.50	2.560	Battery 4#	/
Bottom Side	0mm	9262/1852.4	RMC	4.050	1.840	-0.10	19.67	21.50	2.804	Battery 5#	/
Bottom Side	0mm	9262/1852.4	RMC	3.680	1.680	-0.12	19.67	21.50	2.560	Battery 6#	/
Additional SAR Test with SAR sensor off(hotspot off)											
Back Side	13mm	9400/1880	RMC	0.569	0.331	-0.01	22.36	23.60	0.440	Battery 1#	/
Bottom Side	11mm	9400/1880	RMC	1.120	0.650	-0.18	22.36	23.60	0.865	Battery 1#	/

Table 38: Product Specific 10-g SAR test results of UMTS Band 2



## 7.2.5 SAR measurement Result of LTE Band 5

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	20450/829	10M QPSK 1RB#25	0.115	0.085	0.01	22.93	24.00	0.147	Battery 1#	/
Left tilt	/	20450/829	10M QPSK 1RB#25	0.097	0.065	0.06	22.93	24.00	0.124	Battery 1#	/
Right touch	/	20450/829	10M QPSK 1RB#25	0.094	0.070	-0.06	22.93	24.00	0.120	Battery 1#	/
Right tilt	/	20450/829	10M QPSK 1RB#25	0.112	0.083	0.08	22.93	24.00	0.143	Battery 1#	/
Left touch	/	20450/829	10M QPSK 50%RB#13	0.088	0.062	0.01	21.92	23.00	0.113	Battery 1#	/
Left tilt	/	20450/829	10M QPSK 50%RB#13	0.074	0.051	0.01	21.92	23.00	0.095	Battery 1#	/
Right touch	/	20450/829	10M QPSK 50%RB#13	0.085	0.058	0.05	21.92	23.00	0.108	Battery 1#	/
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.122	0.081	0.02	21.92	23.00	0.156	Battery 1#	Yes
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.084	0.056	0.05	21.92	23.00	0.108	Battery 2#	/
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.087	0.057	0.00	21.92	23.00	0.111	Battery 3#	/
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.084	0.056	0.04	21.92	23.00	0.108	Battery 4#	/
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.087	0.058	-0.11	21.92	23.00	0.112	Battery 5#	/
Right tilt	/	20450/829	10M QPSK 50%RB#13	0.086	0.058	0.04	21.92	23.00	0.110	Battery 6#	/

Table 39: Head SAR test results of LTE Band 5

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	20450/829	10M QPSK 1RB#25	0.080	0.062	-0.02	22.93	24.00	0.102	Battery 1#	/
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.145	0.111	0.08	22.93	24.00	0.186	Battery 1#	/
Front Side	15mm	20450/829	10M QPSK 50%RB#13	0.062	0.045	0.02	21.92	23.00	0.080	Battery 1#	/
Back Side	15mm	20450/829	10M QPSK 50%RB#13	0.116	0.082	-0.04	21.92	23.00	0.149	Battery 1#	/
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.140	0.107	-0.02	22.93	24.00	0.179	Battery 2#	/
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.198	0.161	0.15	22.93	24.00	0.253	Battery 3#	Yes
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.139	0.114	-0.18	22.93	24.00	0.178	Battery 4#	/
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.154	0.126	-0.01	22.93	24.00	0.197	Battery 5#	/
Back Side	15mm	20450/829	10M QPSK 1RB#25	0.152	0.125	-0.16	22.93	24.00	0.194	Battery 6#	/

Table 40: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20450/829	10M QPSK 1RB#25	0.122	0.075	0.02	22.93	24.00	0.156	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.166	0.098	0.01	22.93	24.00	0.212	Battery 1#	/
Left Side	10mm	20450/829	10M QPSK 1RB#25	0.112	0.075	-0.06	22.93	24.00	0.143	Battery 1#	/
Right Side	10mm	20450/829	10M QPSK 1RB#25	0.129	0.087	-0.12	22.93	24.00	0.165	Battery 1#	/
Bottom Side	10mm	20450/829	10M QPSK 1RB#25	0.048	0.030	0.06	22.93	24.00	0.061	Battery 1#	/
Front Side	10mm	20450/829	10M QPSK 50%RB#13	0.118	0.073	-0.18	21.92	23.00	0.151	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 50%RB#13	0.153	0.103	-0.05	21.92	23.00	0.196	Battery 1#	/
Left Side	10mm	20450/829	10M QPSK 50%RB#13	0.087	0.058	0.02	21.92	23.00	0.112	Battery 1#	/
Right Side	10mm	20450/829	10M QPSK 50%RB#13	0.113	0.075	0.03	21.92	23.00	0.145	Battery 1#	/
Bottom Side	10mm	20450/829	10M QPSK 50%RB#13	0.043	0.027	-0.04	21.92	23.00	0.054	Battery 1#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.180	0.107	0.08	22.93	24.00	0.230	Battery 2#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.153	0.091	-0.18	22.93	24.00	0.196	Battery 3#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.152	0.095	-0.06	22.93	24.00	0.194	Battery 4#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.192	0.121	-0.16	22.93	24.00	0.246	Battery 5#	/
Back Side	10mm	20450/829	10M QPSK 1RB#25	0.200	0.126	-0.19	22.93	24.00	0.256	Battery 6#	Yes

Table 41: Hotspot SAR test results of LTE Band 5

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.6 SAR measurement Result of LTE Band 7

Test Position of Head	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	21350/2560	20M QPSK 1RB#50	0.139	0.073	0.01	23.05	24.00	0.173	Battery 1#	/
Left tilt	/	21350/2560	20M QPSK 1RB#50	0.121	0.054	0.11	23.05	24.00	0.151	Battery 1#	/
Right touch	/	21350/2560	20M QPSK 1RB#50	0.184	0.088	0.02	23.05	24.00	0.229	Battery 1#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.192	0.087	0.18	23.05	24.00	0.239	Battery 1#	Yes
Left touch	/	21350/2560	20M QPSK 50%RB#25	0.111	0.058	0.04	22.00	23.00	0.140	Battery 1#	/
Left tilt	/	21350/2560	20M QPSK 50%RB#25	0.110	0.052	0.15	22.00	23.00	0.138	Battery 1#	/
Right touch	/	21350/2560	20M QPSK 50%RB#25	0.137	0.064	0.08	22.00	23.00	0.172	Battery 1#	/
Right tilt	/	21350/2560	20M QPSK 50%RB#25	0.130	0.062	0.11	22.00	23.00	0.164	Battery 1#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.168	0.075	-0.05	23.05	24.00	0.209	Battery 2#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.171	0.077	0.05	23.05	24.00	0.213	Battery 3#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.165	0.074	0.10	23.05	24.00	0.205	Battery 4#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.166	0.074	0.09	23.05	24.00	0.207	Battery 5#	/
Right tilt	/	21350/2560	20M QPSK 1RB#50	0.163	0.075	0.03	23.05	24.00	0.203	Battery 6#	/

Table 42: Head SAR test results of LTE Band 7

Test Position of Body-Worn	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.163	0.088	-0.07	23.05	24.00	0.203	Battery 1#	/
Back Side	15mm	21350/2560	20M QPSK 1RB#50	0.123	0.068	-0.12	23.05	24.00	0.153	Battery 1#	/
Front Side	15mm	21350/2560	20M QPSK 50%RB#25	0.131	0.073	-0.06	22.00	23.00	0.165	Battery 1#	/
Back Side	15mm	21350/2560	20M QPSK 50%RB#25	0.133	0.074	-0.19	22.00	23.00	0.167	Battery 1#	/
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.127	0.073	0.11	23.05	24.00	0.158	Battery 2#	/
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.151	0.082	-0.15	23.05	24.00	0.188	Battery 3#	/
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.135	0.074	-0.11	23.05	24.00	0.168	Battery 4#	/
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.159	0.086	-0.12	23.05	24.00	0.198	Battery 5#	/
Front Side	15mm	21350/2560	20M QPSK 1RB#50	0.227	0.134	0.14	23.05	24.00	0.283	Battery 6#	Yes

Table 43: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	21100/2535	20M QPSK 1RB#50	0.117	0.067	0.15	19.30	20.00	0.137	Battery 1#	/
Back Side	10mm	21100/2535	20M QPSK 1RB#50	0.235	0.126	0.16	19.30	20.00	0.276	Battery 1#	/
Left Side	10mm	21100/2535	20M QPSK 1RB#50	0.080	0.041	0.10	19.30	20.00	0.094	Battery 1#	/
Right Side	10mm	21100/2535	20M QPSK 1RB#50	0.065	0.034	-0.17	19.30	20.00	0.076	Battery 1#	/
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.365	0.198	0.07	19.30	20.00	0.429	Battery 1#	/
Front Side	10mm	21350/2560	20M QPSK 50%RB#25	0.107	0.059	0.18	19.00	20.00	0.135	Battery 1#	/
Back Side	10mm	21350/2560	20M QPSK 50%RB#25	0.221	0.118	-0.04	19.00	20.00	0.278	Battery 1#	/
Left Side	10mm	21350/2560	20M QPSK 50%RB#25	0.080	0.042	0.11	19.00	20.00	0.101	Battery 1#	/
Right Side	10mm	21350/2560	20M QPSK 50%RB#25	0.063	0.032	-0.19	19.00	20.00	0.079	Battery 1#	/
Bottom Side	10mm	21350/2560	20M QPSK 50%RB#25	0.342	0.181	-0.01	19.00	20.00	0.431	Battery 1#	/
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.374	0.200	0.15	19.30	20.00	0.439	Battery 2#	/
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.405	0.216	0.18	19.30	20.00	0.476	Battery 3#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.345	0.186	0.10	19.30	20.00	0.405	Battery 4#	/
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.337	0.184	0.04	19.30	20.00	0.396	Battery 5#	/
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.341	0.186	0.11	19.30	20.00	0.401	Battery 6#	/

Table 44: Hotspot SAR test results of LTE Band 7

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured SAR(W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled-up 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
				1-g	10-g						
Front Side	10mm	21100/2535	20M QPSK 1RB#50	0.117	0.067	0.15	19.30	24.00	0.345	Battery 1#	Yes
Back Side	10mm	21100/2535	20M QPSK 1RB#50	0.235	0.126	0.16	19.30	24.00	0.694	Battery 1#	Yes
Left Side	10mm	21100/2535	20M QPSK 1RB#50	0.080	0.041	0.10	19.30	24.00	0.235	Battery 1#	Yes
Right Side	10mm	21100/2535	20M QPSK 1RB#50	0.065	0.034	-0.17	19.30	24.00	0.192	Battery 1#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.365	0.198	0.07	19.30	24.00	1.077	Battery 1#	Yes
Front Side	10mm	21350/2560	20M QPSK 50%RB#25	0.107	0.059	0.18	19.00	23.00	0.269	Battery 1#	Yes
Back Side	10mm	21350/2560	20M QPSK 50%RB#25	0.221	0.118	-0.04	19.00	23.00	0.555	Battery 1#	Yes
Left Side	10mm	21350/2560	20M QPSK 50%RB#25	0.080	0.042	0.11	19.00	23.00	0.201	Battery 1#	Yes
Right Side	10mm	21350/2560	20M QPSK 50%RB#25	0.063	0.032	-0.19	19.00	23.00	0.157	Battery 1#	Yes
Bottom Side	10mm	21350/2560	20M QPSK 50%RB#25	0.342	0.181	-0.01	19.00	23.00	0.859	Battery 1#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.374	0.200	0.15	19.30	24.00	1.104	Battery 2#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.405	0.216	0.18	19.30	24.00	1.195	Battery 3#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.345	0.186	0.10	19.30	24.00	1.018	Battery 4#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.337	0.184	0.04	19.30	24.00	0.995	Battery 5#	Yes
Bottom Side	10mm	21100/2535	20M QPSK 1RB#50	0.341	0.186	0.11	19.30	24.00	1.006	Battery 6#	Yes

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.7 SAR measurement Result of WiFi 2.4G

Test Position of Head	Dist.	Test Channel /Freq. (MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
Left touch	/	1/2412	802.10 b	0.257	0.254	0.117	0.09	98%	0.260	13.39	14.00	0.300	Battery 1#	Yes
Left tilt	/	1/2412	802.11 b	0.233	0.240	0.101	-0.19	98%	0.246	13.39	14.00	0.283	Battery 1#	/
Right touch	/	1/2412	802.11 b	0.102	0.097	0.045	0.17	98%	0.100	13.39	14.00	0.115	Battery 1#	/
Right tilt	/	1/2412	802.11 b	0.144	0.156	0.068	0.10	98%	0.160	13.39	14.00	0.184	Battery 1#	/
Left touch	/	1/2412	802.11 b	0.239	0.225	0.105	-0.06	98%	0.231	13.39	14.00	0.266	Battery 2#	/
Left touch	/	1/2412	802.11 b	0.163	0.179	0.083	0.10	98%	0.184	13.39	14.00	0.211	Battery 3#	/
Left touch	/	1/2412	802.11 b	0.200	0.206	0.096	-0.10	98%	0.211	13.39	14.00	0.243	Battery 4#	/
Left touch	/	1/2412	802.11 b	0.186	0.189	0.088	-0.13	98%	0.194	13.39	14.00	0.223	Battery 5#	/
Left touch	/	1/2412	802.11 b	0.178	0.168	0.080	0.19	98%	0.172	13.39	14.00	0.198	Battery 6#	/

Table 45: Head SAR test results of WiFi 2.4G

Test Position of Body-Worn	Dist.	Test Channel /Freq. (MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
Front Side	15mm	6/2437	802.11 b	0.062	0.064	0.039	-0.16	98%	0.066	16.98	18.00	0.083	Battery 1#	/
Back Side	15mm	6/2437	802.11 b	0.034	/	/	0.02	98%	/	16.98	18.00	/	Battery 1#	/
Front Side	15mm	6/2437	802.11 b	0.052	0.051	0.030	-0.03	98%	0.053	16.98	18.00	0.067	Battery 2#	/
Front Side	15mm	6/2437	802.11 b	0.056	0.056	0.033	-0.11	98%	0.057	16.98	18.00	0.072	Battery 3#	/
Front Side	15mm	6/2437	802.11 b	0.063	0.066	0.039	0.03	98%	0.067	16.98	18.00	0.085	Battery 4#	/
Front Side	15mm	6/2437	802.11 b	0.069	0.070	0.042	-0.14	98%	0.072	16.98	18.00	0.091	Battery 5#	/
Front Side	15mm	6/2437	802.11 b	0.076	0.077	0.046	-0.19	98%	0.079	16.98	18.00	0.099	Battery 6#	Yes

Table 46: Body-Worn SAR test results of WiFi 2.4G

Test Position of Hotspot	Dist.	Test Channel /Freq. (MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	Measured SAR(W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g								
Front Side	10mm	6/2437	802.11 b	0.120	/	/	0.14	98%	/	16.98	18.00	/	Battery 1#	/
Back Side	10mm	6/2437	802.11 b	0.086	/	/	-0.18	98%	/	16.98	18.00	/	Battery 1#	/
Right Side	10mm	6/2437	802.11 b	0.017	/	/	0.12	98%	/	16.98	18.00	/	Battery 1#	/
Top Side	10mm	6/2437	802.11 b	0.159	0.174	0.096	-0.11	98%	0.178	16.98	18.00	0.226	Battery 1#	Yes
Top Side	10mm	6/2437	802.11 b	0.139	0.150	0.082	-0.17	98%	0.154	16.98	18.00	0.195	Battery 2#	/
Top Side	10mm	6/2437	802.11 b	0.150	0.174	0.095	-0.17	98%	0.178	16.98	18.00	0.226	Battery 3#	/
Top Side	10mm	6/2437	802.11 b	0.141	0.162	0.088	-0.13	98%	0.166	16.98	18.00	0.210	Battery 4#	/
Top Side	10mm	6/2437	802.11 b	0.054	0.056	0.030	-0.17	98%	0.058	16.98	18.00	0.073	Battery 5#	/
Top Side	10mm	6/2437	802.11 b	0.103	0.118	0.063	-0.14	98%	0.121	16.98	18.00	0.153	Battery 6#	/

Table 47: Hotspot SAR test results of WiFi 2.4G


Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.



### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance.

The location of the antennas inside the device is shown as below picture:

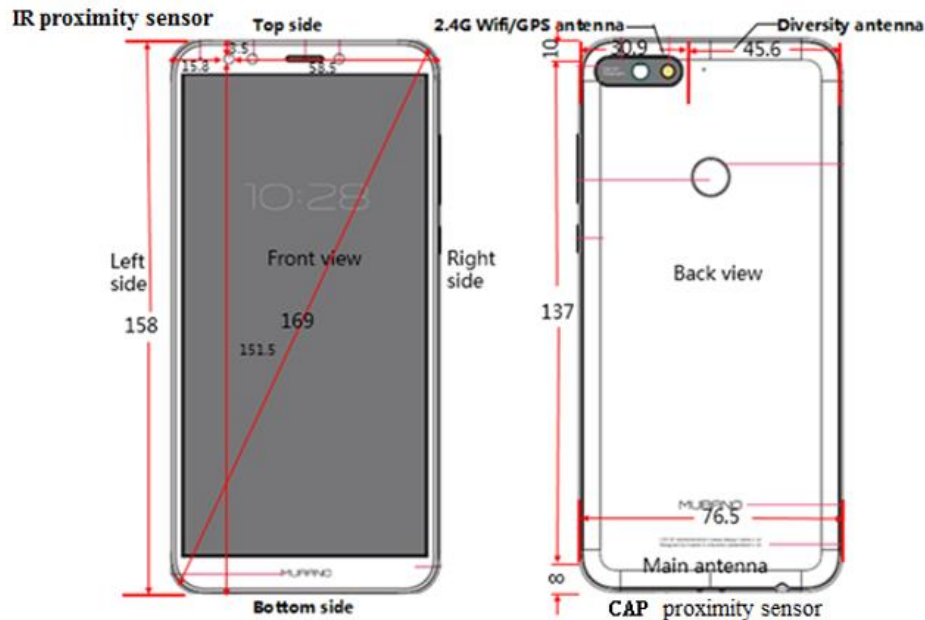

Note:

- 1) Diversity antenna is used to improve the acceptance of performance of the main antenna. it does not have a transmitter function.
- 2) The overall dimension of the device (Length\* Width) is 158mm\*76.5mm . Per KDB 648474 D04, because the diagonal distance of this device is > 160mm, it is considered a “Phablet” device.
- 3) The NFC antenna is integrated onto the Back cover. The SAR tests were performed with the Battery cover. Per KDB648474 D04 Phones with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the phone. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot/ Product Specific SAR *	Yes	Yes	Yes	Yes	No	Yes
WiFi 2.4G/BT antenna	Hotspot/ Product Specific SAR *	Yes	Yes	No	Yes	Yes	No

Table 48: Sides for Hotspot SAR testing

Note:

- 1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot and/or Product Specific SAR if the antenna-to-edge distance is greater than 2.5cm.
- 2)\*- Per KDB 648474 D04, when hotspot mode applies, Product Specific 10-g SAR SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg;



### 7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for Product Specific 10-g SAR SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Head	9.50	8.91	5	2.480	2.81	3.00	Yes
BT	Body-worn	9.50	8.91	15	2.480	0.94	3.00	Yes
BT	Hotspot	9.50	8.91	10	2.480	1.40	3.00	Yes
BT	Product Specific 10-g SAR	9.50	8.91	5	2.480	2.81	7.50	Yes

Table 49: Standalone SAR test exclusion for BT

Note:

1)\* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ , where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5 \text{ mm}$ , a distance of  $5 \text{ mm}$  is applied to determine SAR test exclusion

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)*
BT	Head	9.50	8.91	5	2.480	7.50	0.374
BT	Body-worn	9.50	8.91	15	2.480	7.50	0.125
BT	Hotspot	9.50	8.91	10	2.450	7.50	0.186
BT	Product Specific 10-g SAR	9.50	8.91	5	2.480	18.75	0.150

Table 50: Estimated SAR calculation for BT

Note:

1) \* - maximum possible output power declared by manufacturer

### 7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous Tx Combination	Head	Body-worn	Hotspot (10mm)	Product Specific 10-g (0mm)
1	GSM Voice + BT	Yes	Yes	NA	Yes
2	GSM DATA + BT	N/A	Yes	Yes	Yes
3	GSM Voice + WiFi	Yes	Yes	NA	Yes
4	GSM DATA + WiFi	N/A	Yes	Yes	Yes
5	UMTS + BT	Yes*	Yes	Yes	Yes
6	UMTS + WiFi	Yes*	Yes	Yes	Yes
7	LTE + WiFi	Yes*	Yes	Yes	Yes
8	LTE + BT	Yes	Yes	Yes	Yes

Table 51: Simultaneous Transmission Possibilities

Note:

- 1) The WiFi and Bluetooth can't transmit simultaneously, because they share the same antenna.
- 2) The device does not support DTM function. Body-worn accessory testing is typically associated with voice operations.
- 3) \* VoLTE or pre-installed VOIP applications are considered.

### 7.3.3 SAR Summation Scenario

Test Position		Main antenna SARMax						WiFi/BT antenna SARMax		$\Sigma$ 1-g or 10-g SAR (1.6W/kg or 4.0W/kg Limit)
		GSM850	GSM1900	UMTS B2	UMTS B5	LTE B5	LTE B7	WiFi 2.4G	BT	
Head	Left touch	0.279	0.053	0.055	0.212	0.147	0.173	0.300	0.374	0.653
	Left tilt	0.227	0.052	0.057	0.139	0.124	0.151	0.283	0.374	0.601
	Right touch	0.259	0.085	0.083	0.203	0.120	0.229	0.115	0.374	0.633
	Right tilt	0.247	0.049	0.069	0.126	0.156	0.239	0.184	0.374	0.621
Body Worn	Front Side	0.196	0.254	0.243	0.187	0.102	0.283	0.099	0.125	0.408
	Back Side	0.358	0.796	0.765	0.408	0.253	0.167	0.099	0.125	0.921
Hotspot	Front Side	0.180	0.409	0.294	0.189	0.156	0.137	0.226	0.186	0.635
	Back Side	0.551	0.900	1.018	0.460	0.256	0.276	0.226	0.186	1.244
	Left Side	0.203	0.025	0.044	0.296	0.143	0.100	/	0.186	0.482
	Right Side	0.253	0.044	0.073	0.268	0.165	0.078	0.226	0.186	0.494
	Top Side	/	/	/	/	/	/	0.226	0.186	0.226
	Bottom Side	0.091	1.029	1.289	0.083	0.061	0.476	/	0.186	<b>1.475</b>
Product Specific 10-g SAR	Front Side	/	0.580	/	/	/	/	/	0.150	0.730
	Back Side	/	1.583	2.484	/	/	/	/	0.150	2.634
	Left Side	/	/	/	/	/	/	/	0.150	0.150
	Right Side	/	/	/	/	/	/	/	0.150	0.150
	Top Side	/	/	/	/	/	/	/	0.150	0.150
	Bottom Side	/	2.487	2.804	/	/	/	/	0.150	<b>2.954</b>

Table 52: 1-g SAR Simultaneous Tx Combination of 2G/3G/4G Antenna and WiFi/BT Antenna.

### 7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.

#### **Appendix A. System Check Plots**

**(Please See Appendix No.: SYBH(Z-SAR)001032018-2A, total: 14 pages)**

#### **Appendix B. SAR Measurement Plots**

**(Please See Appendix No.: SYBH(Z-SAR)001032018-2B, total: 24 pages)**

#### **Appendix C. Calibration Certificate**

**(Please See Appendix No.: SYBH(Z-SAR)001032018-2C, total: 68 pages)**

#### **Appendix D. Photo documentation**

**(Please See Appendix No.: SYBH(Z-SAR)001032018-2D, total: 6 pages)**

---

## **End**