

Test Report

Customer:

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45
64293 Darmstadt

Tel.: +49 6151-803-8030

Fax: +49 6151-803-9100

RF test report

150253-AU01+W05



Industry
Canada

Industrie
Canada

Hottinger Baldwin Messtechnik GmbH

Torque meter

T40S6 - 10kNm
stator coated



The test result refers exclusively
to the tested model.
This test report may not be copied or
published in a part without the written
authorization
of the accreditation agency and/or
EMV **TESTHAUS** GmbH
Revision: 1.0



EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



FCC facility registration number: 221458
Test Firm Type "2.948 listed": Valid until 2017-04-22
Test Firm Type "accredited": Valid until 2017-06-09
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site number: 3472A-1
Registration expiry date: 2015-10-02

Test Laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 2 of 37

Table of contents

1	Test regulations	6
1.1	Summary of test results	7
2	Equipment under Test (EUT)	8
2.1	Photo documentation	9
2.2	Short description of the EUT	9
2.3	Operation mode	9
2.4	Configuration	10
2.5	Used cables	10
3	AC power line conducted emissions	11
3.1	Test location	11
3.2	Test instruments	11
3.3	Limits	11
3.4	Test procedure	12
3.5	Test setup	12
3.6	Test results	13
4	Radiated emission measurement (<1 GHz)	15
4.1	Test Location	15
4.2	Test instruments	15
4.3	Limits	16
4.4	Test procedure	17
4.5	Test setup	18
4.6	Test deviation	18
4.7	Test results	19
5	Radiated emission measurement (>1 GHz)	27
6	Bandwidths	28
6.1	Test Location	28
6.2	Test instruments	28
6.3	Limits	28
6.4	Test setup	28
6.5	Test deviation	28
6.6	Test results	29
6.7	Necessary bandwidth - data transfer carrier (1.22 MHz)	33
7	Equipment calibration status	34
8	Measurement uncertainty	35



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
 Torque meter
 T40S6 - 10kNm
 stator coated

150253-AU01+W05

Page 3 of 37

9	Summary.....	36
10	Revision History.....	37



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
 Torque meter
 T40S6 - 10kNm
 stator coated

150253-AU01+W05

Page 4 of 37

List of pictures

Picture 1: Outline of conducted emission test setup	12
Picture 2: Graphic - Conducted emission on mains, phase 1 (without termination).....	13
Picture 3: Table - Conducted emission on mains, phase 1 (without termination)	13
Picture 4: Graphic - Conducted emission on mains, neutral (without termination).....	14
Picture 5: Table - Conducted emission on mains, neutral (without termination)	14
Picture 6: Test setup for radiated emission measurement (< 30 MHz).....	18
Picture 7: Test setup for radiated emission measurement (< 1 GHz)	18
Picture 8: Radiated emission 9 kHz – 30 MHz @ 3m distance	20
Picture 9: Restricted Band - PK @ 3m distance	21
Picture 10: Restricted Band - QP @ 3m distance	21
Picture 11: carrier (1.22 MHz) and restricted band	23
Picture 12: zoomed to carrier (1.22 MHz)	24
Picture 13: zoomed to restricted band	25
Picture 14: Radiated emission 30 MHz - 1000MHz @ 3m distance	26
Picture 15: Occupied bandwidth (99 %) - 522 kHz.....	30
Picture 16: -6 dB emission bandwidth - 522 kHz.....	31
Picture 17: -20 dB emission bandwidth - 522 kHz.....	32

List of tables

Table 1: Equipment calibration status.....	34
Table 2: Measurement uncertainty	35



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 5 of 37

1 Test regulations

47 CFR Part 2: 10-2014	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
47 CFR Part 15: 10-2014	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.4: June 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ICES-003 Issue 5, August 2012	Spectrum Management and Telecommunications Interference-Causing Equipment Standard Information Technology Equipment (ITE) – Limits and methods of measurement
RSS-Gen Issue 4, November 2014	Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus
RSS-102 Issue 4, March 2010, updated December 2010	Spectrum Management and Telecommunications Radio Standards Specification Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
RSS-210 Issue 8, December 2010	Spectrum Management and Telecommunications Radio Standards Specification Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 6 of 37

1.1 Summary of test results

Standard	Test result
47 CFR Part 15, sections 15.207 and 15.209	Passed
RSS-210 Issue 8 clause 2 (with appropriate references to RSS-Gen Issue 4)	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 7 of 37

2 Equipment under Test (EUT)

Product type: Torque meter
Model Name: T40S6 - 10kNm, stator coated
Manufacturer: Hottinger Baldwin Messtechnik GmbH
Serial number: 173230078 10/h
FCC ID: 2ADAT-T40S2TOS6
IC certification number: 12438A-T40S2TOS6
Application frequency band: Not applicable (general requirements apply)
Frequency range: 522.85 kHz -> wireless power supply
1.22 MHz -> wireless data transfer
Operating frequency: 522.85 kHz -> wireless power supply
1.22 MHz -> wireless data transfer
Number of RF-channels: 2
Modulation: ASK -> wireless power supply
PSK -> wireless data transfer
Antenna types: loop antenna
☐ detachable ☒ not detachable
Power supply: External power source
nominal: 24.0 VDC
Temperature range: -20°C to +85°C

Remark:

The tests were performed with 120V AC / 60Hz at mains input of DC power supply.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 8 of 37

2.1 Photo documentation

For photos of the EUT, see annex B.
For photos taken during testing, see annex A.

2.2 Short description of the EUT

The EUT is a torque meter with wireless measurement data transfer and wireless power supply. The measurement data transfer goes from rotor to stator. The wireless power supply goes the other way round. In the field EUT is part of an engine test bench.

2.3 Operation mode

The EUT is configured to start wireless power supply, measurement and data transfer as soon as supplied by external power.

The position in which the EUT was tested is documented in annex A.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 9 of 37

2.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	Serial or inventory number
Torque meter	T40S6 - 10kNm, stator coated	173230078 10/h
DC power supply	TRIO-PS/1AC/24DC/5 120 VAC / 60 Hz -> 24 VDC	2866310
Data cable termination box	hbm test device (for radiated measurements)	n/a
AC power source	CHROMA 61602	616020002099

2.5 Used cables

Numbers:	Description: (type / lengths / remarks)	Serial No
1	7-pin shielded cable with 2 screw connectors, 3 m (for radiated measurements)	n/a
1	7-pin shielded cable with 1 screw connector and DC plug, 3 m (for AC power line conducted emissions)	n/a



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 10 of 37

3 AC power line conducted emissions

according to 47 CFR Part 15, section 15.207, and
RSS-210, section 2.1 with RSS-Gen, section 8.8

3.1 Test location

Description	Manufacturer	Inventory No.
Shielded room	Siemens - Matsushita	E00107

3.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI	Rohde & Schwarz	E00001
<input type="checkbox"/>	ESH3-Z2	Rohde & Schwarz	E00028
<input type="checkbox"/>	ESH2-Z5	Rohde & Schwarz	E00004
<input checked="" type="checkbox"/>	ESH2-Z5	Rohde & Schwarz	E00005

3.3 Limits

Frequency [MHz]	Quasi-peak [dB μ V]	Avarage [dB μ V]
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05


Page 11 of 37

3.4 Test procedure

1. The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50 Ohms and an EMI test receiver.
2. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz.
3. The EUT was placed on a wooden table and connected to the LISN.
4. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range from 0.15 MHz to 30 MHz was scanned.
5. After that all peaks values with less margin than 10 dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector.
6. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit then these values were re-measured with average detector.
7. These measurements were done on all power lines.

According to ANSI C63.4, section 13.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.

3.5 Test setup

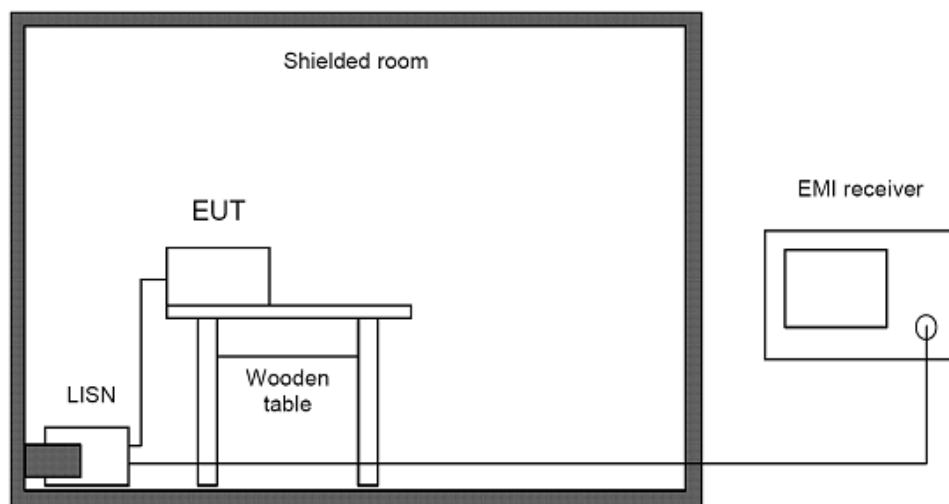


Picture 1: Outline of conducted emission test setup

Comments: All peripheral devices were additionally decoupled by means of a line stabilization network.

3.6 Test results

Temperature:	21°C	Humidity:	44%
Tested by:	Martin Müller	Test date:	2015-04-30

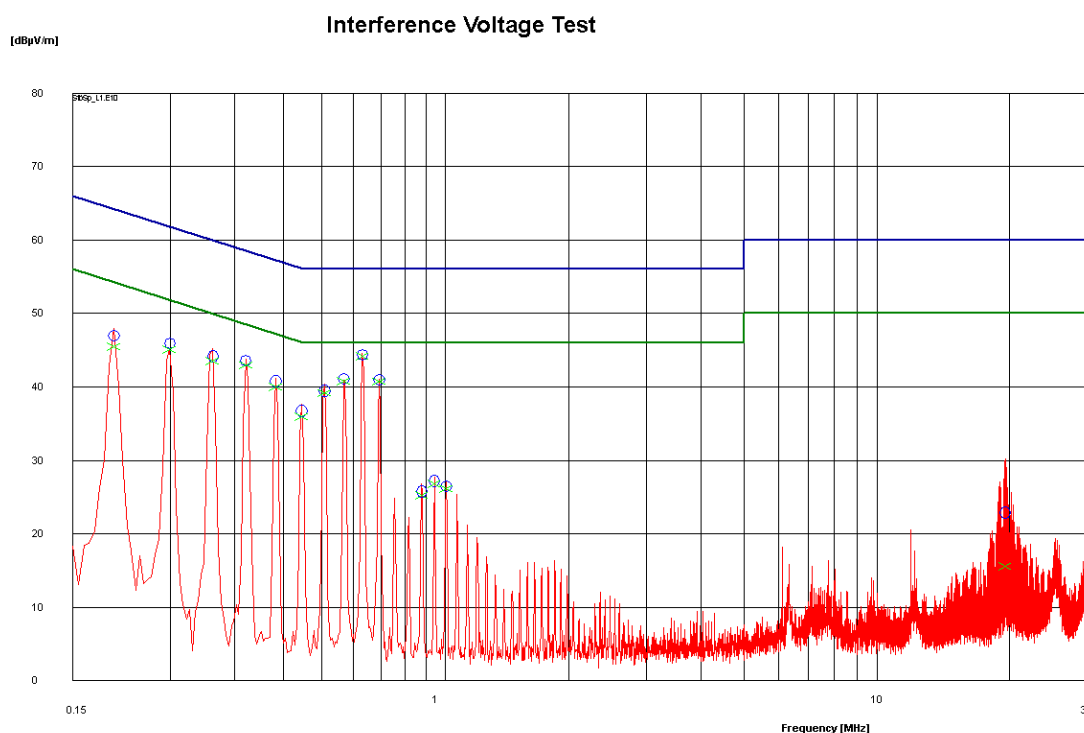

Picture 2: Graphic - Conducted emission on mains, phase 1 (without termination)

E..	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P..	Remarks	U_Scan ...	Cor.
✓	0.186	47.0	64.2	17.2	45.5	54.2	8.7	2015-04-30 16:04...	L		47.9	0.0
✓	0.249	46.0	61.8	15.8	45.1	51.8	6.7	2015-04-30 16:04...	L		45.1	0.0
✓	0.312	44.2	59.9	15.7	43.5	49.9	6.4	2015-04-30 16:04...	L		45.2	0.0
✓	0.3705	43.6	58.5	14.9	42.9	48.5	5.5	2015-04-30 16:04...	L		43.9	0.0
✓	0.4335	40.8	57.2	16.4	40.0	47.2	7.2	2015-04-30 16:04...	L		41.2	0.0
✓	0.4965	36.7	56.1	19.3	36.0	46.1	10.1	2015-04-30 16:05...	L		37.6	0.0
✓	0.5595	39.5	56.0	16.5	39.2	46.0	6.9	2015-04-30 16:05...	L		40.3	0.0
✓	0.618	41.1	56.0	14.9	40.8	46.0	5.2	2015-04-30 16:05...	L		40.9	0.0
✓	0.681	44.4	56.0	11.6	44.1	46.0	1.9	2015-04-30 16:05...	L		44.6	0.0
✓	0.744	41.0	56.0	15.0	40.7	46.0	5.3	2015-04-30 16:05...	L		41.1	0.0
✓	0.9285	25.8	56.0	30.2	25.3	46.0	20.7	2015-04-30 16:06...	L		26.8	0.0
✓	0.9915	27.2	56.0	28.8	26.8	46.0	19.2	2015-04-30 16:06...	L		27.8	0.0
✓	1.0545	26.5	56.0	29.5	26.1	46.0	19.9	2015-04-30 16:06...	L		27.2	0.0
✓	19.5305	22.9	60.0	37.1	15.6	50.0	34.4	2015-04-30 16:06...	L		30.2	0.0

Picture 3: Table - Conducted emission on mains, phase 1 (without termination)




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 13 of 37

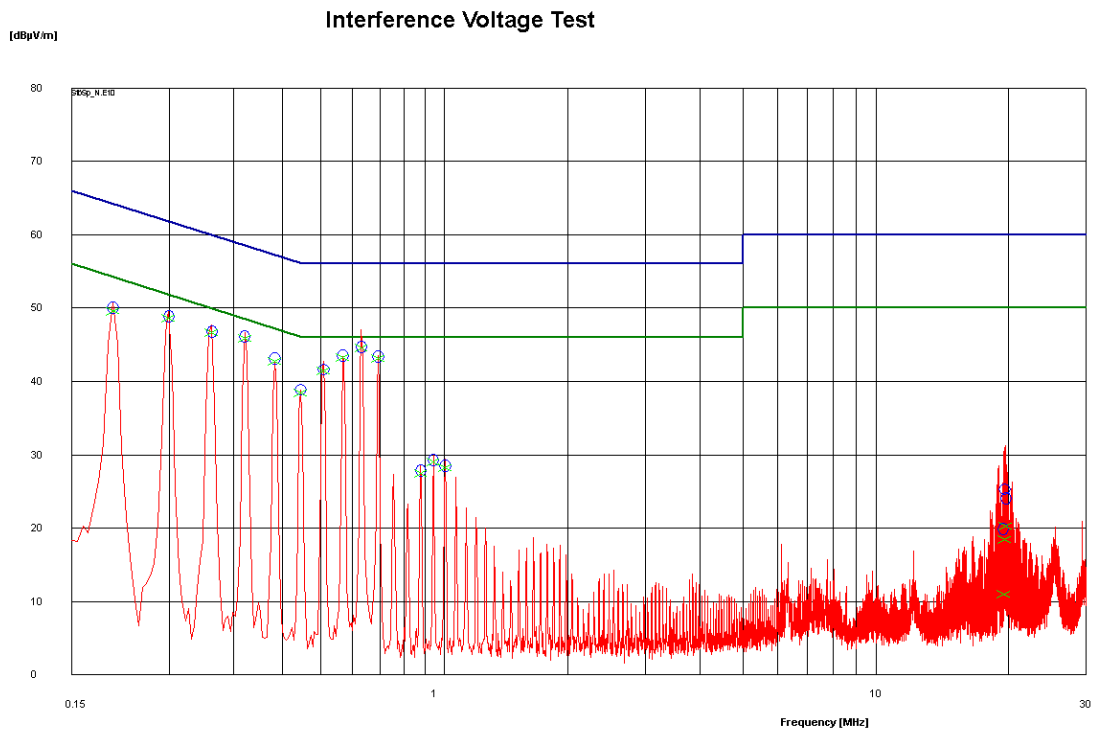

Picture 4: Graphic - Conducted emission on mains, neutral (without termination)

E..	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P..	Remarks	U_Scan...	Cor.
✓	0.186	50.1	64.2	14.1	49.6	54.2	4.6	2015-04-30 16:09...	N		50.9	0.0
✓	0.249	48.9	61.8	12.9	48.7	51.8	3.1	2015-04-30 16:10...	N		49.7	0.0
✓	0.312	46.8	59.9	13.1	46.6	49.9	3.3	2015-04-30 16:10...	N		47.7	0.0
✓	0.3705	46.2	58.5	12.3	45.9	48.5	2.6	2015-04-30 16:10...	N		46.6	0.0
✓	0.4335	43.2	57.2	14.0	42.7	47.2	4.5	2015-04-30 16:10...	N		42.7	0.0
✓	0.4965	38.9	56.1	17.2	38.4	46.1	7.7	2015-04-30 16:10...	N		38.8	0.0
✓	0.5595	41.6	56.0	14.4	41.4	46.0	4.6	2015-04-30 16:11...	N		42.7	0.0
✓	0.618	43.5	56.0	12.5	43.3	46.0	2.7	2015-04-30 16:11...	N		43.4	0.0
✓	0.681	44.7	56.0	11.3	44.5	46.0	1.5	2015-04-30 16:11...	N		47.1	0.0
✓	0.744	43.4	56.0	12.6	43.1	46.0	2.9	2015-04-30 16:11...	N		43.5	0.0
✓	0.9285	27.8	56.0	28.2	27.5	46.0	18.6	2015-04-30 16:11...	N		28.6	0.0
✓	0.9915	29.3	56.0	26.7	29.0	46.0	17.0	2015-04-30 16:12...	N		30.0	0.0
✓	1.0545	28.5	56.0	27.5	28.3	46.0	17.8	2015-04-30 16:12...	N		29.4	0.0
✓	19.463	19.9	60.0	40.1	11.0	50.0	39.0	2015-04-30 16:12...	N		29.8	0.0
✓	19.5895	25.3	60.0	34.7	18.4	50.0	31.6	2015-04-30 16:12...	N		30.9	0.0
✓	19.7105	24.1	60.0	35.9	20.3	50.0	29.7	2015-04-30 16:13...	N		31.3	0.0

Picture 5: Table - Conducted emission on mains, neutral (without termination)

4 Radiated emission measurement (<1 GHz)

according to 47 CFR Part 15, section 15.205(a), 15.209(a),
RSS-210, section 2.5 with RSS-Gen, sections 8.10 and 8.9

4.1 Test Location

- ☒ Scan with peak detector in 3 m CDC.
- ☒ Final CISPR measurement with quasi peak detector on 3 m open area test site.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site (OATS)	EMV TESTHAUS GmbH	E00354

4.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00551
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input checked="" type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/>	RF-R 400-1	Langer EMV-Technik	E00270
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 15 of 37

4.3 Limits

The field strength of any emissions including spurious emissions falling into restricted bands as specified in 15.205(a) shall not exceed the general radiated emission limits as specified in 15.209.

Frequency [MHz]	Field strength Fs [μ V/m]	Field strength [dB μ V/m]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 16 of 37

4.4 Test procedure

1. EUT was configured according to ANSI C63.4. It was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a compact diagnostic chamber.
2. EUT and all peripherals were powered on.
3. The broadband antenna was set to vertical polarization.
4. The EMI receiver performed a scan from 30 MHz to 1000 MHz with peak detector peak and measurement bandwidth set to 120 kHz.
5. The turn table was rotated to 6 different positions ($360^\circ / 6$) and the antenna polarization was changed to horizontal.
6. Test procedure at step 4 and 5 was repeated.
7. The test setup was then placed in an OATS at 3 m distance and all peak values over or with less margin to the limit than 6dB were marked and re-measured with a quasi-peak detector.
8. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. The highest value was recorded.
10. For emissions below 30 MHz measurements were done using a loop antenna. Prescans were performed with peak detector and final measurements with quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where average detector applies. Antenna height was not changed during this test. Appropriate CISPR bandwidths of 200 Hz for frequencies up to 150 kHz and 9 or 10 kHz for frequencies above were used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated


150253-AU01+W05

Page 17 of 37

4.5 Test setup

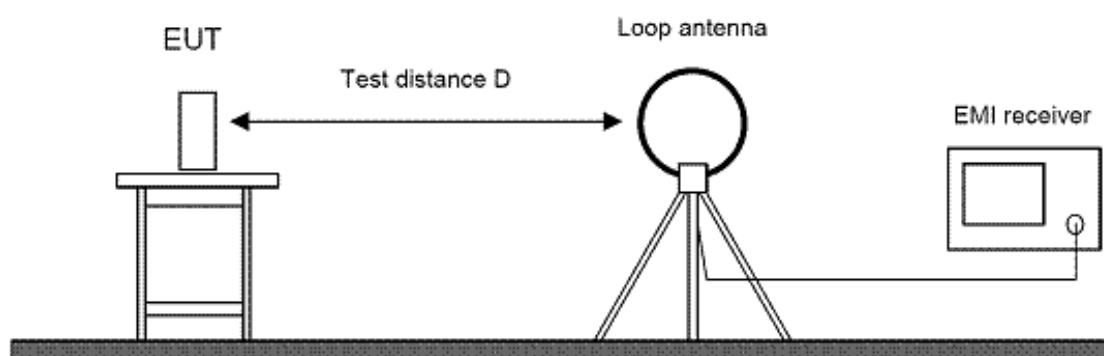

Picture 6: Test setup for radiated emission measurement (< 30 MHz)

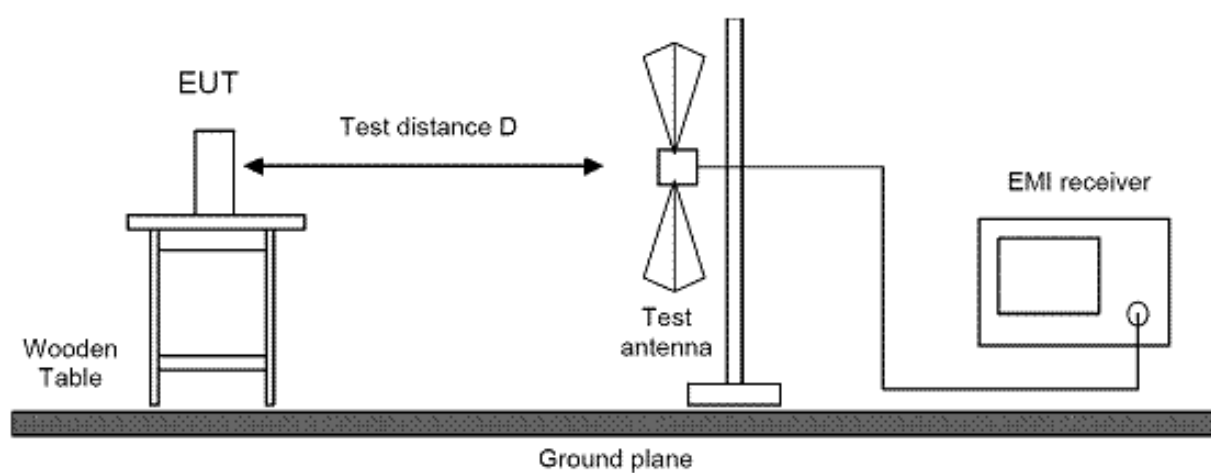

Picture 7: Test setup for radiated emission measurement (< 1 GHz)

4.6 Test deviation

There is no deviation from the standards referred to.

4.7 Test results

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-29

Radiated Emission Measurement 9 kHz - 30 MHz

Test procedure

The EUT was placed in a full anechoic chamber and the spurious emission testing was performed in accordance with ANSI C63.4, and 47 CFR Part 15, Subpart C. The measurement distance was 3 m.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 19 of 37

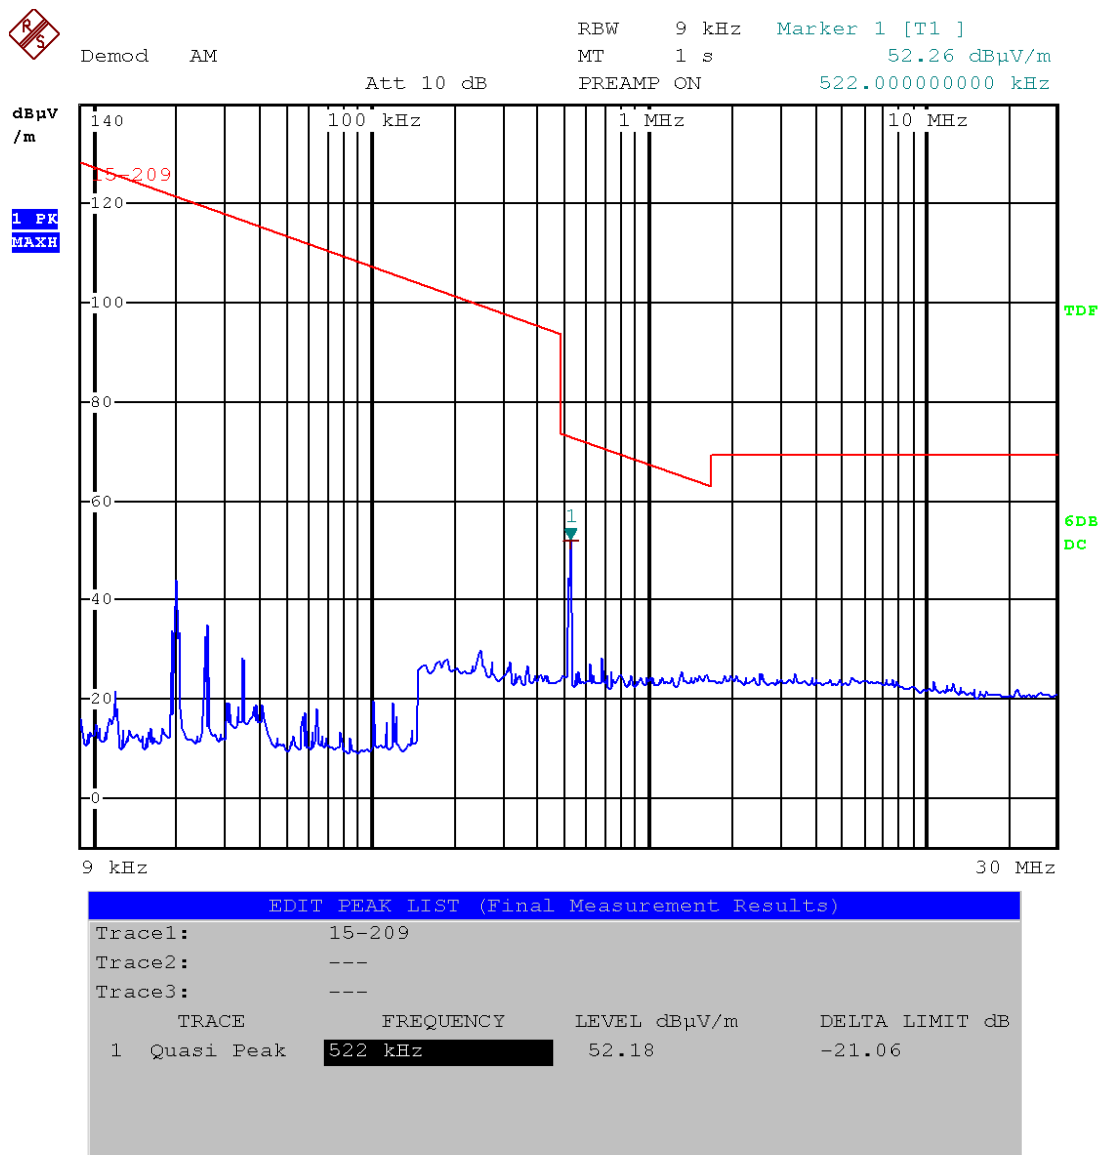

Picture 8: Radiated emission 9 kHz – 30 MHz @ 3m distance

Frequency (kHz)	Measured value (dBμV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin	Result
¹⁾ 522	52.18	QP	40	12.18	33.25	21.07	PASS

¹⁾ Note:

Measured value = 52.18 dBμV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 52.18 dBμV/m @ 3 m - 40 dB = 12.18 dBμV/m @ 30 m




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated


150253-AU01+W05

Page 20 of 37

Restricted Band (495 kHz - 505 kHz)

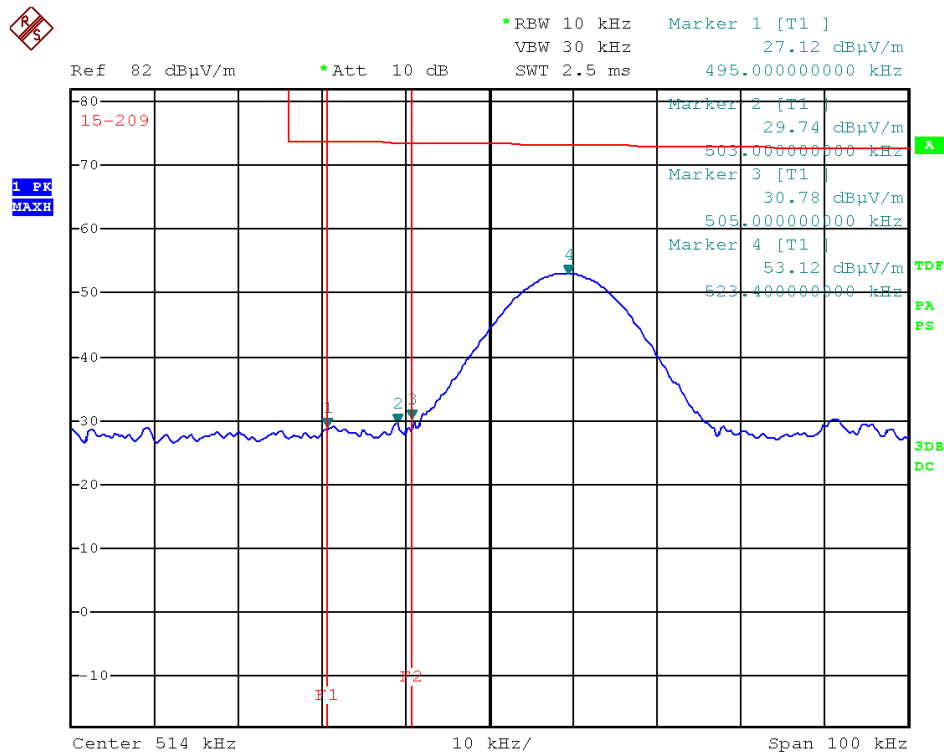

Picture 9: Restricted Band - PK @ 3m distance

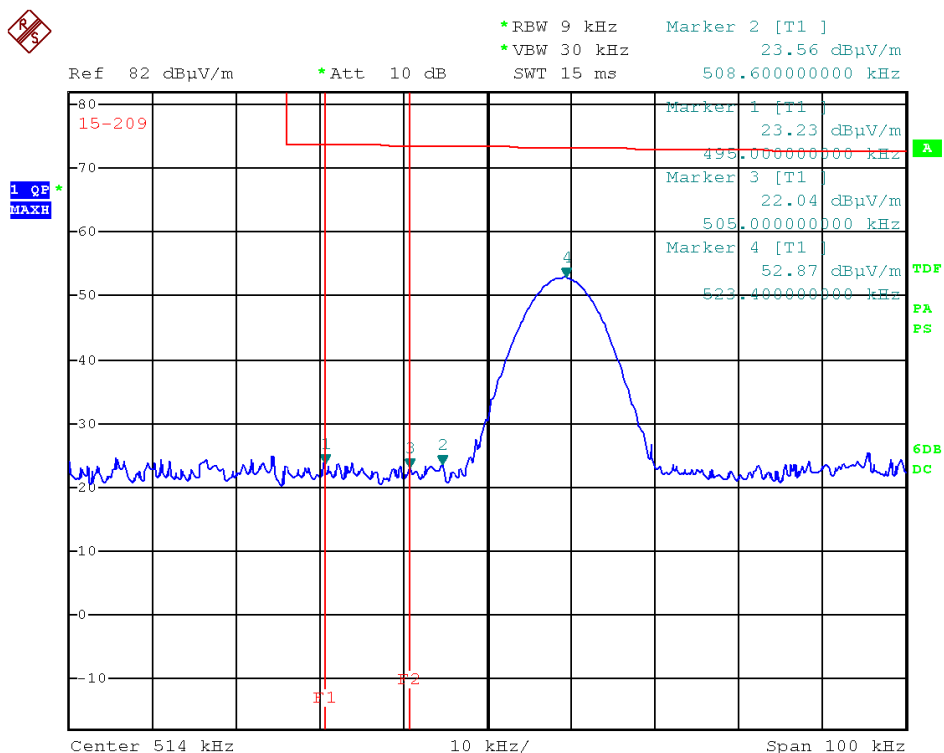

Picture 10: Restricted Band - QP @ 3m distance

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
495.00	27.12	PK	40	-12.88	----	----	PASS
495.00	23.23	QP	40	-16.77	33.71	50.48	PASS
503.00	29.74	PK	40	-10.26	----	----	PASS
505.00	30.78	PK	40	-9.22	----	----	PASS
505.00	22.04	QP	40	-17.96	33.54	51.50	PASS
508.60	23.56	QP	40	-16.44	33.48	49.92	PASS
523.40	53.12	PK	40	13.12	----	----	PASS
¹⁾ 523.40	52.87	QP	40	12.87	33.23	20.36	PASS

¹⁾ Note:

Measured value = 52.87 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 52.87 dBµV/m @ 3 m - 40 dB = **12.87 dBµV/m @ 30 m**

Additional note:

Emissions in restricted band are spurious emissions not caused by carrier or modulation.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 22 of 37

Restricted Band (2.1735 MHz - 2.1905 MHz)

Remark: This measurement was performed using magnetic field probe RF-R 400-1 to show that there are no emissions caused by carrier or modulation. During the “radiated emission 9kHz - 30MHz”-measurement no carrier at 1.22 MHz was detected because of its low amplitude. The setup is documented in Annex A.

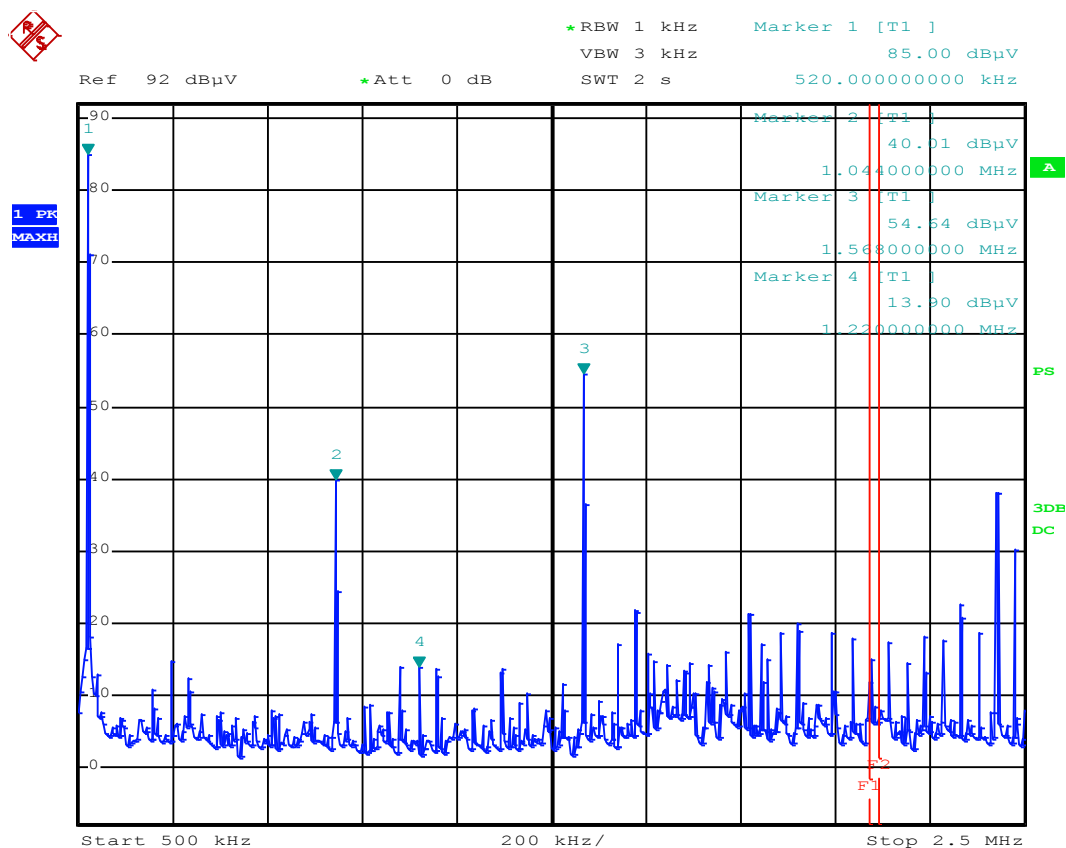


f [MHz]	E _{meas} [dBμV]	Detector	Remark
0.5200	85.00	PK	carrier power supply
1.0440	40.01	PK	2 nd harmonic power supply
1.2200	13.90	PK	carrier data transfer
1.5680	54.64	PK	3 rd harmonic power supply

Picture 11: carrier (1.22 MHz) and restricted band



★RBW 1 kHz Marker 1 [T1]
VBW 3 kHz 24.54 dBμV
★Att 0 dB SWT 600 ms 1.220000000 MHz

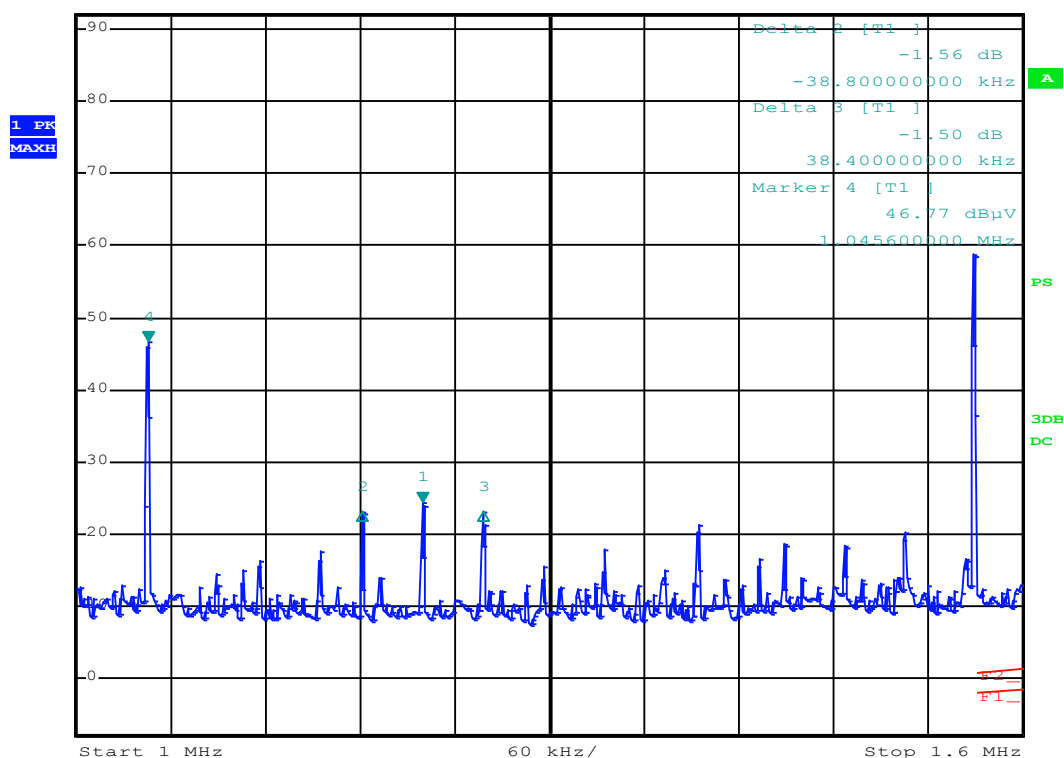

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.0456	46.77	PK	2 nd harmonic power supply
1.1812	22.98	PK	lower sideband data transfer
1.2200	24.54	PK	carrier data transfer
1.2584	23.04	PK	upper sideband data transfer

Picture 12: zoomed to carrier (1.22 MHz)




*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz 59.67 dBμV
SWT 1 s 1.568000000 MHz

Ref 92 dBμV

*Att 0 dB

1 PK
MAXH

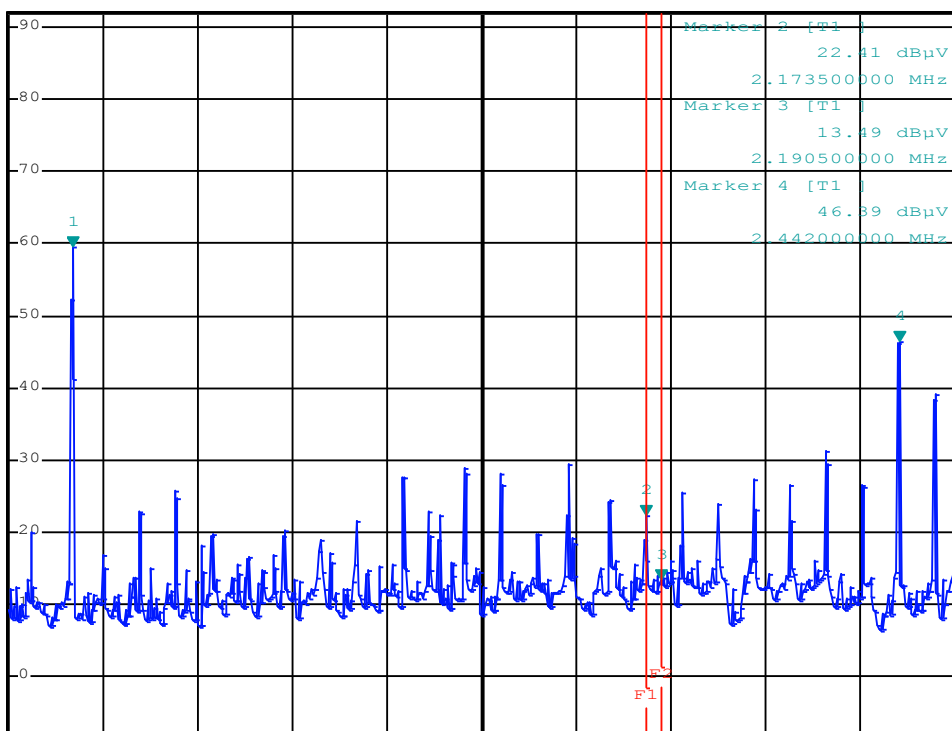

Start 1.5 MHz 100 kHz/ Stop 2.5 MHz

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.5680	59.67	PK	3 rd harmonic power supply
2.1735	22.41	PK	lower edge restricted band
2.1905	13.49	PK	upper edge restricted band
2.4420	46.39	PK	- - - -

Picture 13: zoomed to restricted band




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 25 of 37

Radiated Emission Measurement 30 MHz - 1000 MHz

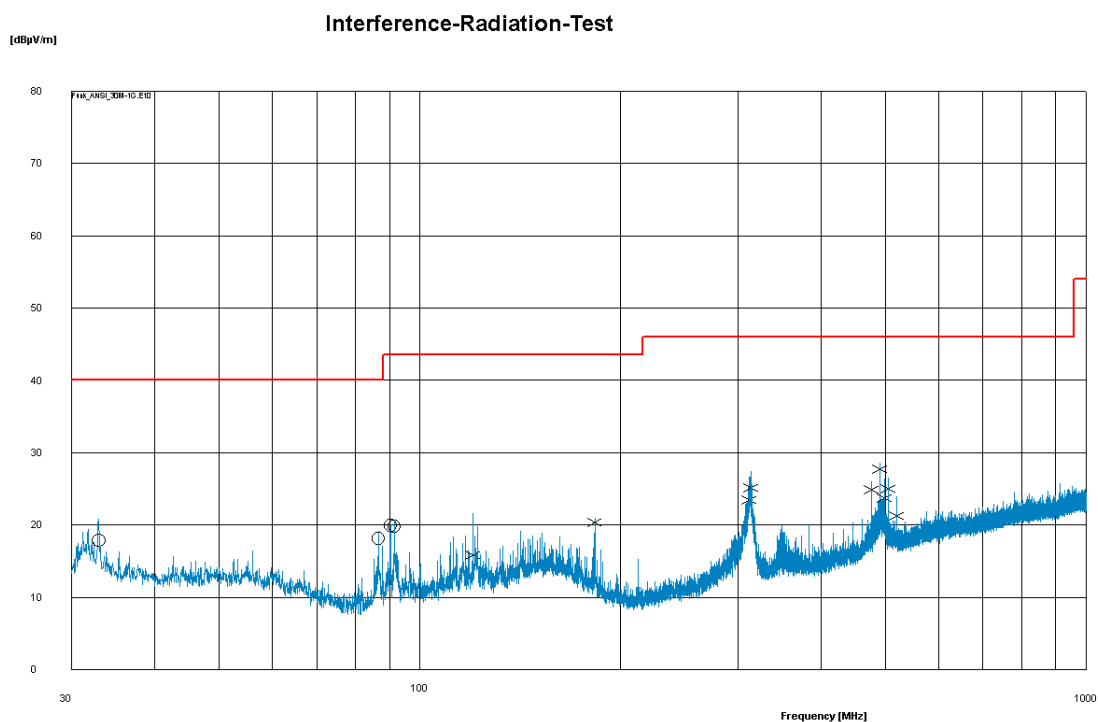

M	Freq [M...]	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr ...
<input checked="" type="checkbox"/>	32.94	17.9	12.1	40.0	- 22.1	H	100	84	2015-04-30 13:18...		20.9	0.0
<input checked="" type="checkbox"/>	86.64	18.2	9.5	40.0	- 21.8	H	100	207	2015-04-30 13:19...		19.2	0.0
<input checked="" type="checkbox"/>	90.3	20.0	9.8	43.5	- 23.6	H	100	315	2015-04-30 13:19...		20.1	0.0
<input checked="" type="checkbox"/>	91.5	19.9	9.9	43.5	- 23.7	H	100	328	2015-04-30 13:20...		20.5	0.0
<input checked="" type="checkbox"/>	120	15.9	12.5	43.5	- 27.7	V	100	223	2015-04-30 13:09...		21.5	0.0
<input checked="" type="checkbox"/>	183	20.4	11.4	43.5	- 23.1	V	100	194	2015-04-30 13:10...		21.0	0.0
<input checked="" type="checkbox"/>	311.82	23.4	13.0	46.0	- 22.6	V	100	341	2015-04-30 13:11...		26.6	0.0
<input checked="" type="checkbox"/>	314.28	25.1	13.1	46.0	- 20.9	V	100	343	2015-04-30 13:12...		27.4	0.0
<input checked="" type="checkbox"/>	475.8	24.9	16.2	46.0	- 21.1	V	100	6	2015-04-30 13:13...		26.0	0.0
<input checked="" type="checkbox"/>	490.44	27.8	16.4	46.0	- 18.3	V	100	331	2015-04-30 13:14...		28.6	0.0
<input checked="" type="checkbox"/>	497.76	23.8	16.5	46.0	- 22.3	V	100	6	2015-04-30 13:15...		26.3	0.0
<input checked="" type="checkbox"/>	505.08	25.0	16.6	46.0	- 21.0	V	100	331	2015-04-30 13:16...		26.5	0.0
<input checked="" type="checkbox"/>	519.72	21.3	16.8	46.0	- 24.7	V	100	341	2015-04-30 13:16...		23.9	0.0

Picture 14: Radiated emission 30 MHz - 1000MHz @ 3m distance



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 26 of 37

5 Radiated emission measurement (>1 GHz)

according to 47 CFR Part 15, section 15.209(a),
RSS-210, section 2.5 with RSS-Gen, section 8.9

Remark:

This measurement needs not to be applied because

- the intentional radiator operates below 10 GHz and tenth harmonic of the highest fundamental frequency is lower than 1 GHz (see 47 CFR Part 15, section 15.33(a)(1), and RSS-Gen, section 6.13), and
- the digital part of the device does not generate or use internal frequencies higher than 108 MHz (see 47 CFR Part 15 section 15.33(b)(1), and RSS-Gen, section 2.3.3 with ICES-003, section 6.2).



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 27 of 37

6 Bandwidths

according to CFR 47 Part 2, section 2.202(a), and RSS-Gen, section 6.6

6.1 Test Location

See clause 4.1 on page 15.

6.2 Test instruments

See clause 4.2 on page 15.

6.3 Limits

The bandwidths are recorded only. There are no limits specified in CFR 47 Part 15, section 15.209, and RSS-210, Annex 2.6

6.4 Test setup

See clause 4.5 on page 18.

6.5 Test deviation

There is no deviation from the standards referred to.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 28 of 37

6.6 Test results

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-30

Occupied bandwidth (99 %)

Test procedure

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. For this purpose the appropriate measurement function of the spectrum analyzer is used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 29 of 37

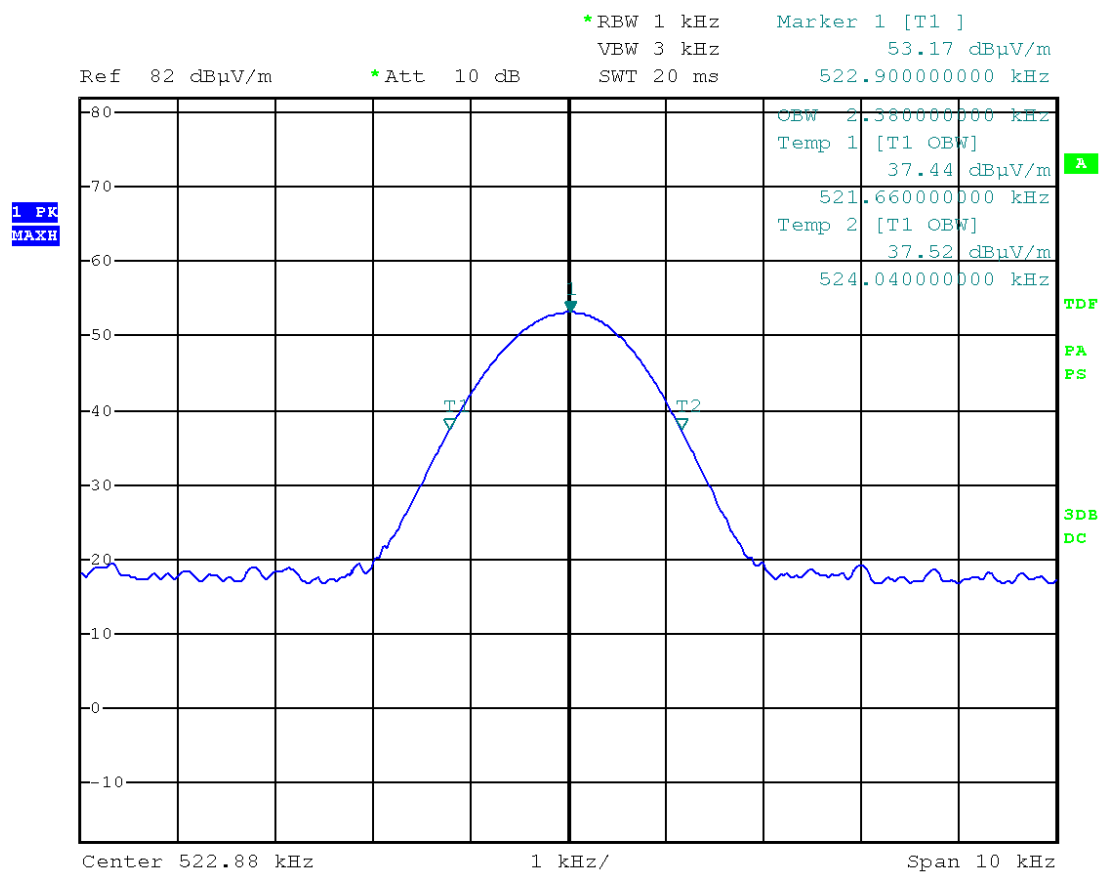


Picture 15: Occupied bandwidth (99 %) - 522 kHz

Measured occupied bandwidth (99 %) - 522 kHz: 2.3800 kHz

-6 dB emission bandwidth

Test procedure

Where indicated, the -6 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 6 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth

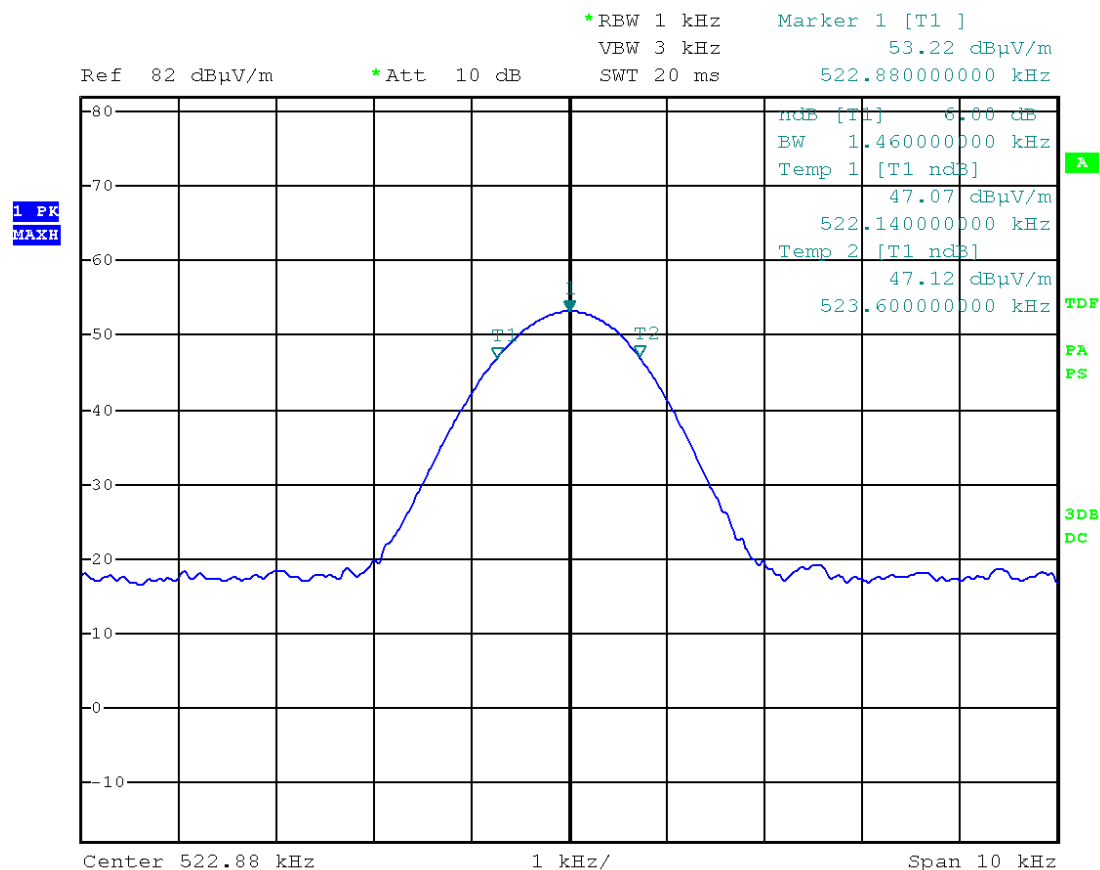

Picture 16: -6 dB emission bandwidth - 522 kHz

Measured -6 dB emission bandwidth - 522 kHz: 1.4600 kHz



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated


150253-AU01+W05

Page 31 of 37

-20 dB emission bandwidth

Test procedure

Where indicated, the -20 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 20 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

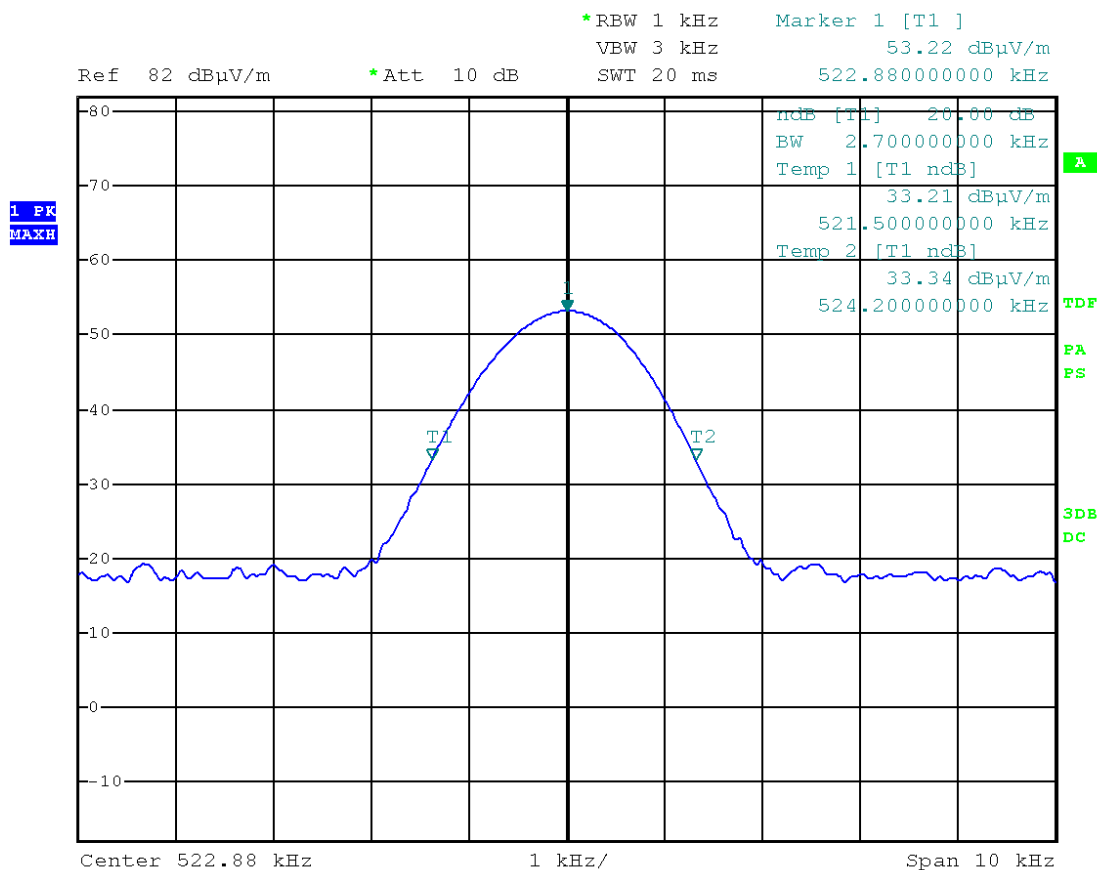

Picture 17: -20 dB emission bandwidth - 522 kHz

Measured -20 dB emission bandwidth - 522 kHz: 2.7000 kHz



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 32 of 37

6.7 Necessary bandwidth - data transfer carrier (1.22 MHz)

Test procedure

Calculated according to TRC-43, Issue 3, November 2012

Formula for PSK: $B_n = \frac{2 \times R \times K}{\log_2 S}$

$$R = 1.2 \text{ Mbps } ^{1)}$$

$$K = 1$$

$$S = 3 \quad ^{1)}$$

$$\underline{\underline{B_n = 1.5142 \text{ MHz}}}$$

Note¹⁾ : customer information



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 33 of 37

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number	Last calibration	Next calibration
Test receiver	ESU 26	100026	W00002	2014-02	2016-02
Test receiver	ESCI 3	100013	E00001	2013-12	2015-12
Test receiver	ESCI 3	100328	E00552	2014-07	2016-07
Test receiver	ESCS 30	825442/0002	E00003	2014-02	2016-02
Test receiver	ESCS 30	845552/0008	E00551	2014-01	2016-01
LISN	ESH2-Z5	893406/009	E00005	2014-01	2016-01
Broadband antenna	VULB 9163	9163-114	E00013	2013-09	2015-09
Loop antenna	HFH2-Z2	871398/0050	E00004	2014-07	2016-07
Magnetic field probe	RF-R 400-1	02-1165	E00270	N/A (see note 1)	
Shielded room	P92007	B83117C1109T211	E00107	N/A	
Compact Diagnostic Chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Open area test site (OATS)	---	---	E00354	2014-10	2015-10
Climatic chamber 340 I	VC ³ 4034	58566123250010	C00015	2014-09	2016-09

Table 1: Equipment calibration status

Note 1: Used for relative measurements only.

Note 2: Expiration date of measurement facility registration (OATS) by
 - FCC (registration number 221458): 2017-04
 - Industry Canada (test site number 3472A-1): 2015-10



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
 Torque meter
 T40S6 - 10kNm
 stator coated

150253-AU01+W05

Page 34 of 37

8 Measurement uncertainty

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	± 3.8 dB	2
Radiated emission open field (3 m) (30 MHz to 300 MHz) (300MHz to 1 GHz)	± 5.4 dB ± 5.9 dB	2
Radiated emission absorber chamber (> 1000 MHz)	± 4.5 dB	2

Table 2: Measurement uncertainty

The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 35 of 37

9 Summary

The EMC Regulations according to the marked specifications are


☒ **KEPT**

The EUT does fulfill the general approval requirements mentioned.

☐ **NOT KEPT**

The EUT does not fulfill the general approval requirements mentioned.


Place, Date: Straubing, June 11th, 2015



Martin Müller

Test engineer

EMV **TESTHAUS** GmbH

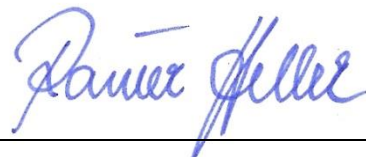

Rainer Heller

Head of EMC / radio department

EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 36 of 37

10 Revision History

Date	Description	Person	Revision
2015-06-11	First edition	M. Müller	- - -

Template used: A_1.0_FCC 15.225_ EN_PB.dotx



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40S6 - 10kNm
stator coated

150253-AU01+W05

Page 37 of 37