

Designated by Ministry of International Trade and Industry

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE
6-8-7, NISHITEMMA
KITA-KU, OSAKA, 530 JAPAN

KEC

IKOMA
TESTING LABORATORY
10630, TAKAYAMA-CHO
IKOMA-CITY, NARA, 630-01 JAPAN

*Corporate Juridical Person***ENGINEERING TEST REPORT****REPORT NO. A-031-98-C****Issued Date : October 16, 1998**

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 95 ; Radio Control(R/C) Radio Service.

The tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : SANWA ELECTRONIC INSTRUMENT CO., LTD.
Mailing Address : 1-2-50 HONMACHI YOSHIDA HIGASHIOSAKA CITY 578-0982 JAPAN

2. Identification of Tested Device

FCC ID : AXYATX029
Device Name : Radio Control Transmitter
Trade Name : AIRTRONICS
Model Number : RD6000
Serial Number : Prototype No.1 : ☐ Prototype ☒ Pre-production ☐ Production
Date of Manufacture : September, 1998

3. Test Items and Procedure

- ☒ Measurement of RF Power Output (Substitution Method)
- ☒ Modulation Characteristics
- ☒ Emission Bandwidth
- ☒ Measurement of Field Strength of Spurious Radiation
- ☒ Frequency Stability Measurement

Above all tests were performed under : FCC Part 2 Section 2.985, Section 2.987, Section 2.989, Section 2.993 and Section 2.995

4. Date

Receipt of Test Sample : September 2, 1998
Test Completed on : October 9, 1998

CERTIFIED BY :


Seiichi Izumi
Manager of Ikoma Testing Laboratory

ENGINEERING TEST REPORTTable of Contents

1. GENERAL INFORMATION	
1.1 Product Description	3
1.2 Description for Equipment Authorization.....	3
1.3 Test Facility	3
2. TESTED SYSTEM	
2.1 Test Mode	4
2.2 Block Diagram of EUT System	4
2.3 List of EUT System	5
2.4 List of Antenna	5
3. RF POWER OUTPUT	
3.1 Reference Rule and Specification	6
3.2 Test Configuration	6
3.3 Test Procedure	6
3.4 Test Results	7
4. MODULATION CHARACTERISTICS	
4.1 Reference Rule and Specification	8
4.2 Test Results	8
5. EMISSION BANDWIDTH	
5.1 Reference Rule and Specification	12
5.2 Test Configuration	12
5.3 Test Result	13
6. FIELD STRENGTH OF SPURIOUS RADIATION	
6.1 Reference Rule and Specification	20
6.2 Test Procedure	20
6.3 Test Configuration	21
6.4 Photographs of EUT System Configuration	22
6.5 Test Results	23
7. FREQUENCY STABILITY MEASUREMENT	
7.1 Reference Rule and Specification	24
7.2 Frequency vs Temperature Test	24
7.3 Frequency vs Voltage Test	24
8. LIST OF TEST INSTRUMENTS	25

ENGINEERING TEST REPORT**1. GENERAL INFORMATION****1.1 Product Description**

The Model No.RD6000(referred as EUT in this report) is the radio control(R/C) transmitter.

1)Technical Specifications

Transmitting Frequency : 72.79 MHz in EUT
Emission Designator : F1D

2) Contained Oscillator

6th OVER-TONE : 12.1316 MHz

3) Modulation Mode

- (1) PC1 : MIN Cycle 400 μ SEC PCM MODULATION.
- (2) PC2 : MIN Cycle 800 μ SEC PCM MODULATION.
- (3) PP : MIN Cycle 1300 μ SEC PPM MODULATION.
- (4) PPR : Reversed signal phase of ITEM 3, PPM MODULATION.

4) Rated Power Supply : DC 9.6 V (Ni-Cd battery)

1.2 Description for Equipment Authorization**1) Rules Part(s) under which Equipment operated**

FCC Rule Part 95 ; Radio Control(R/C) Radio Service

2) Kind of Equipment Authorization

(x) Type Acceptance () Certification () Verification

3) Procedure of Application

(x) Original Equipment () Modification

1.3 Test Facility

Name : KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)
IKOMA TESTING LABORATORY
Open Test Site No.1

Address : 10630, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

This test facility has been filed in FCC under the criteria in ANSI C63.4-1992.
The laboratory has been accredited by the NVLAP (Lab.Code:200207-0) based on
ISO/IEC Guide 25.

ENGINEERING TEST REPORT**2. TESTED SYSTEM****2.1 Test Mode**

The compliance tests were performed under the following operation mode.

Measurement of Field Strength of Spurious Radiation :

The EUT was continuously transmitted in modulation mode of PP.

Frequency Stability Measurement :


The EUT was continuously transmitted in the following two non-modulation mode.

1) F-Low

2) F-High

Except above two test items :

See the page of each test items.

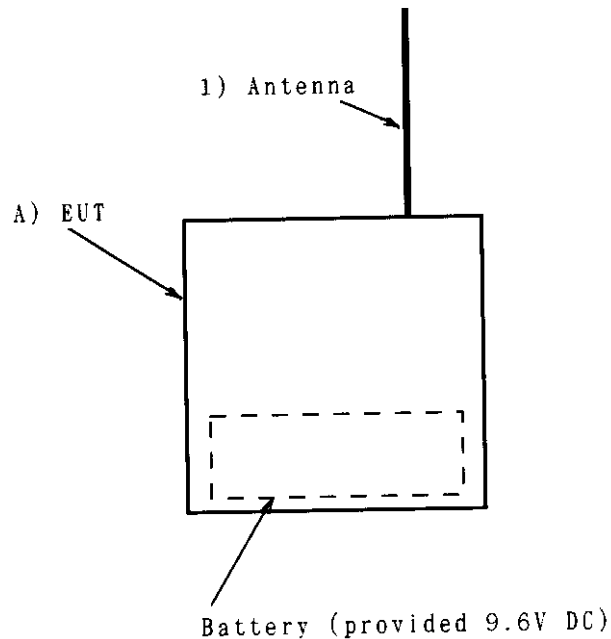2.2 Block Diagram of EUT System

[Note]

See 2.3 List of EUT System and 2.4 List of Antenna.

ENGINEERING TEST REPORT

2.3 List of EUT System

No	Device Name	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	Radio Control Transmitter	RD6000	AXYATX029 (AIRTRONICS)	Battery : Ni-Cd 9.6V	1)

[Remark]

1) : EUT

2.4 List of Antenna

No	Type	Length (m)	Note	Remark
1	Antenna	0.80		1)

[Remark]

1) : Accessory of EUT

ENGINEERING TEST REPORT


3. RF POWER OUTPUT

3.1 Reference Rule and Specification

FCC Rule Part 95 [§95.639] and Part 2 Subpart J [§2.985]

3.2 Test Configuration

[Open Site]

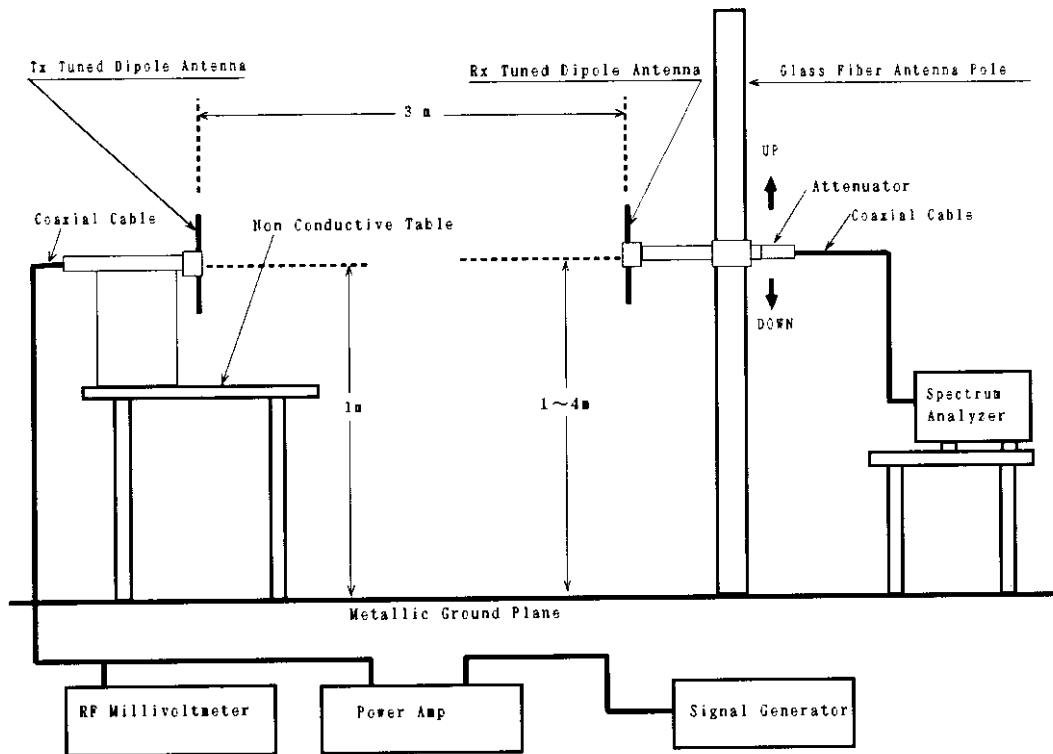

3.3 Test Procedure

- 1) Tune-up the transmitter.
- 2) The receiving antenna is adjusted to the correct length for the carrier frequency.
- 3) Raise and lower the receiving antenna to obtain a maximum reading on the Spectrum Analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until the highest possible signal has been obtain.
Record this maximum reading.
- 4) Repeat step3 with the antenna polarized vertically.
- 5) Remove the transmitter and replace it with the half-wave antenna. The center of these antennas are approximately at the same location as the center of the transmitter.
- 6) Feed the half-wave antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable.
With the antennas at both ends horizontally polarized and with the signal generator tuned to the carrier frequency, raise and lower the receiver antenna to obtain a maximum reading at the Spectrum Analyzer. Adjust the level of the signal generator output until the previous recording maximum reading for this set of conditions its obtained.
- 7) Repeat step6 with both antennas vertically polarized.

ENGINEERING TEST REPORT

3.4 Test Result

CARRIER FREQUENCY [MHz]	SPECTRUM ANALYZER READING [dB μ V]		RF METER READING [dBm]		CABLE LOSS [dB]	RF OUTPUT POWER [mW]	LIMIT [mW]
	Horiz.	Vert.	Horiz.	Vert.			
72.79	113.8	109.4	23.0	24.1	0.3	239.9	750

The RF Power Output can be calculated from following formula:

$$\text{RF Power (mW)} = 10^{(\text{Mr} - \text{Lo}) \div 10}$$

where,

Mr: RF Meter Reading (dBm)

Lo: Loss of Cable (dB)

[Environment]

Temperature : 26 °C Humidity : 48 %

[Summary of Test Results]

Above data shows that the test device complies with the requirements.
Minimum margin was 5.0 dB, vertical polarization.

Tested Date : September 30, 1998

Tester Signature

Y. Kawai
Yasunari Kawai

ENGINEERING TEST REPORT**4. MODULATION CHARACTERISTICS****4.1 Reference Rule and Specification**


Part 2 Subpart J [§2.987]

4.2 Test Results

Encoded Waveform

1) Operation Mode of EUT


Modulation : PC1

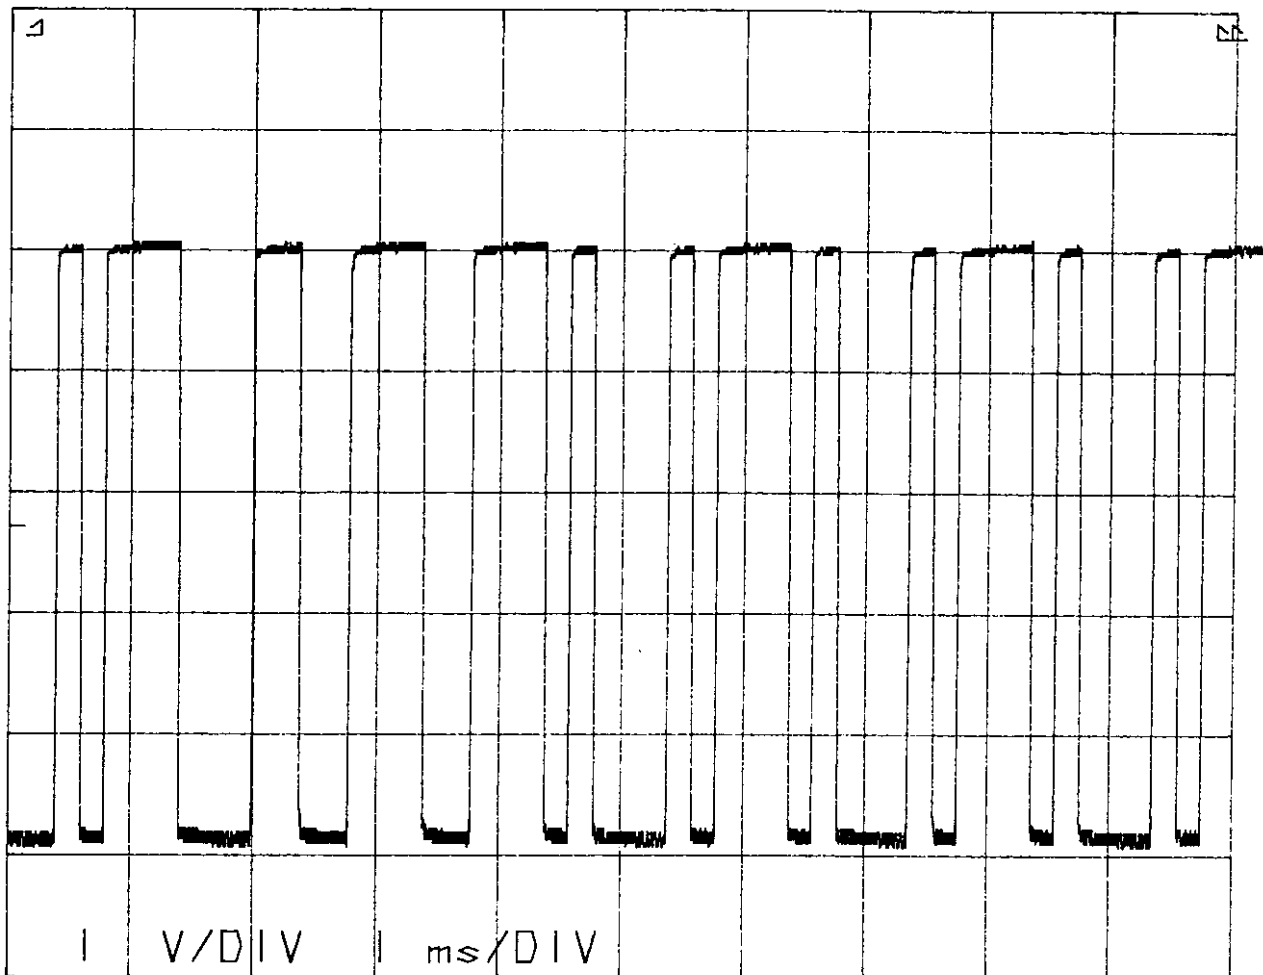

ENGINEERING TEST REPORT

2) Operation Mode of EUT


Modulation : PC2

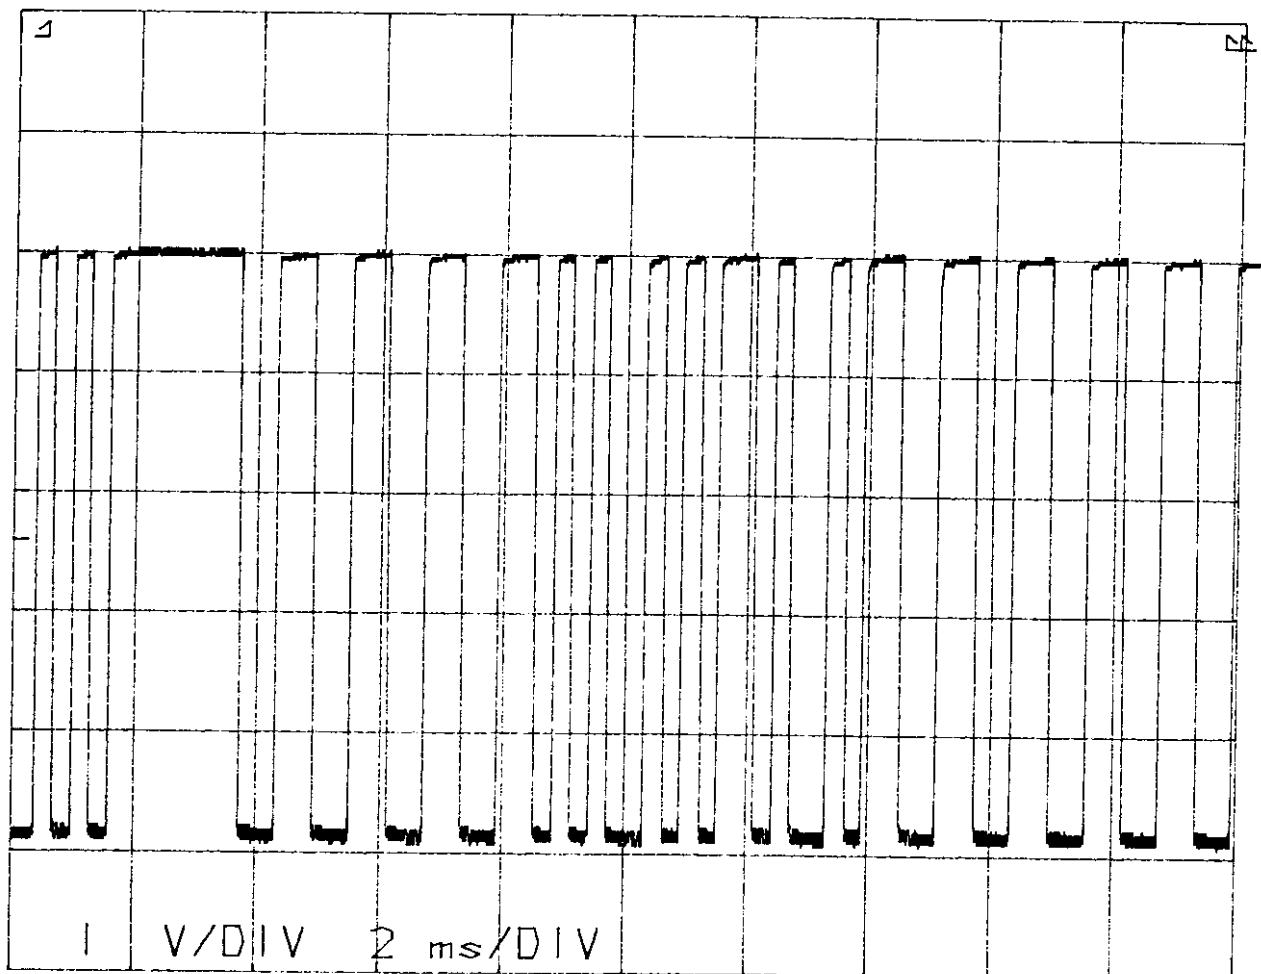

ENGINEERING TEST REPORT

3) Operation Mode of EUT


Modulation : PP

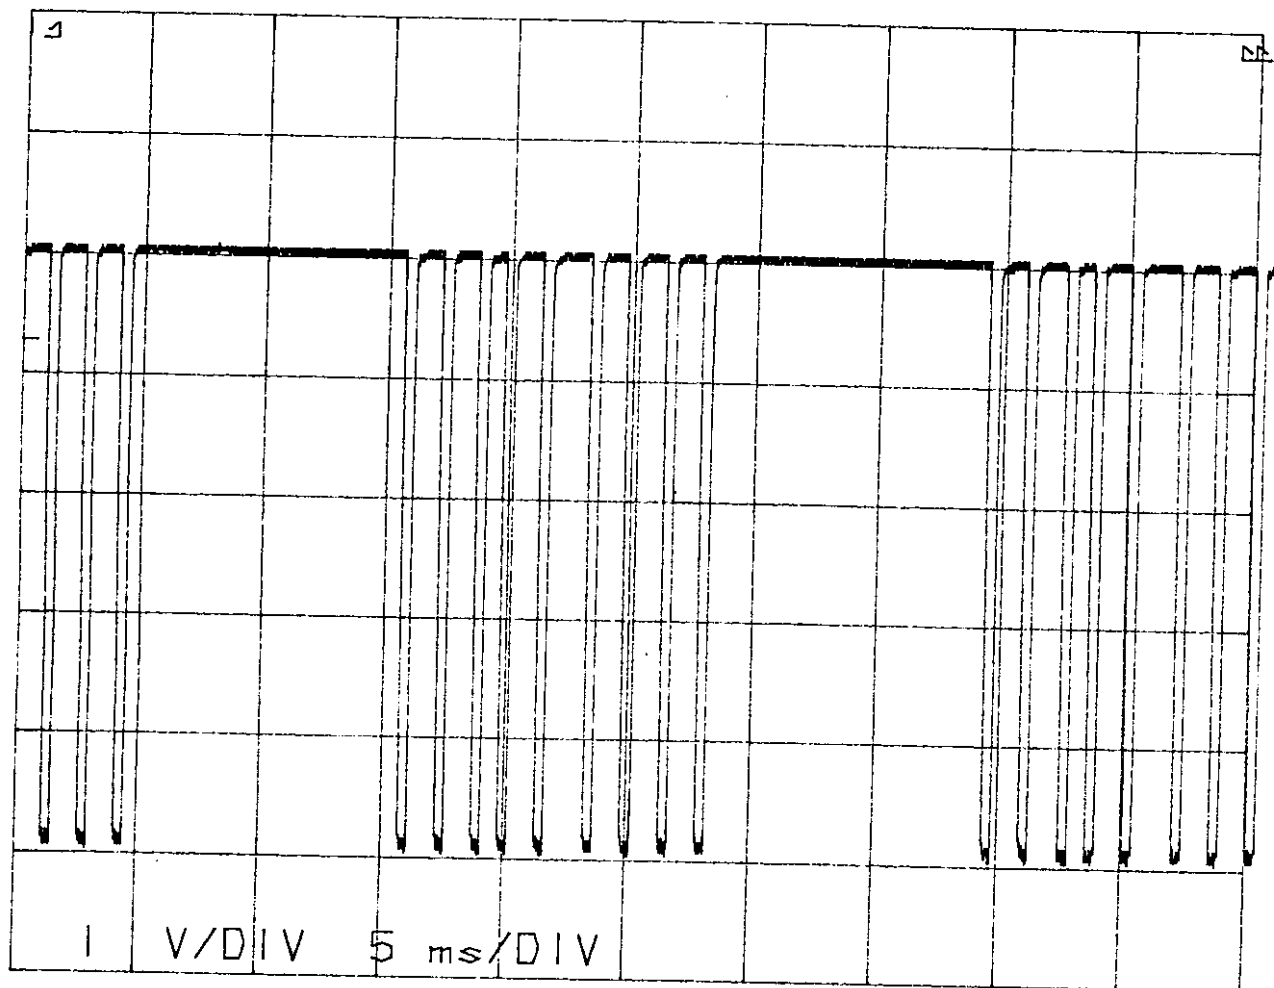

ENGINEERING TEST REPORT


4) Operation Mode of EUT

Modulation : PPR

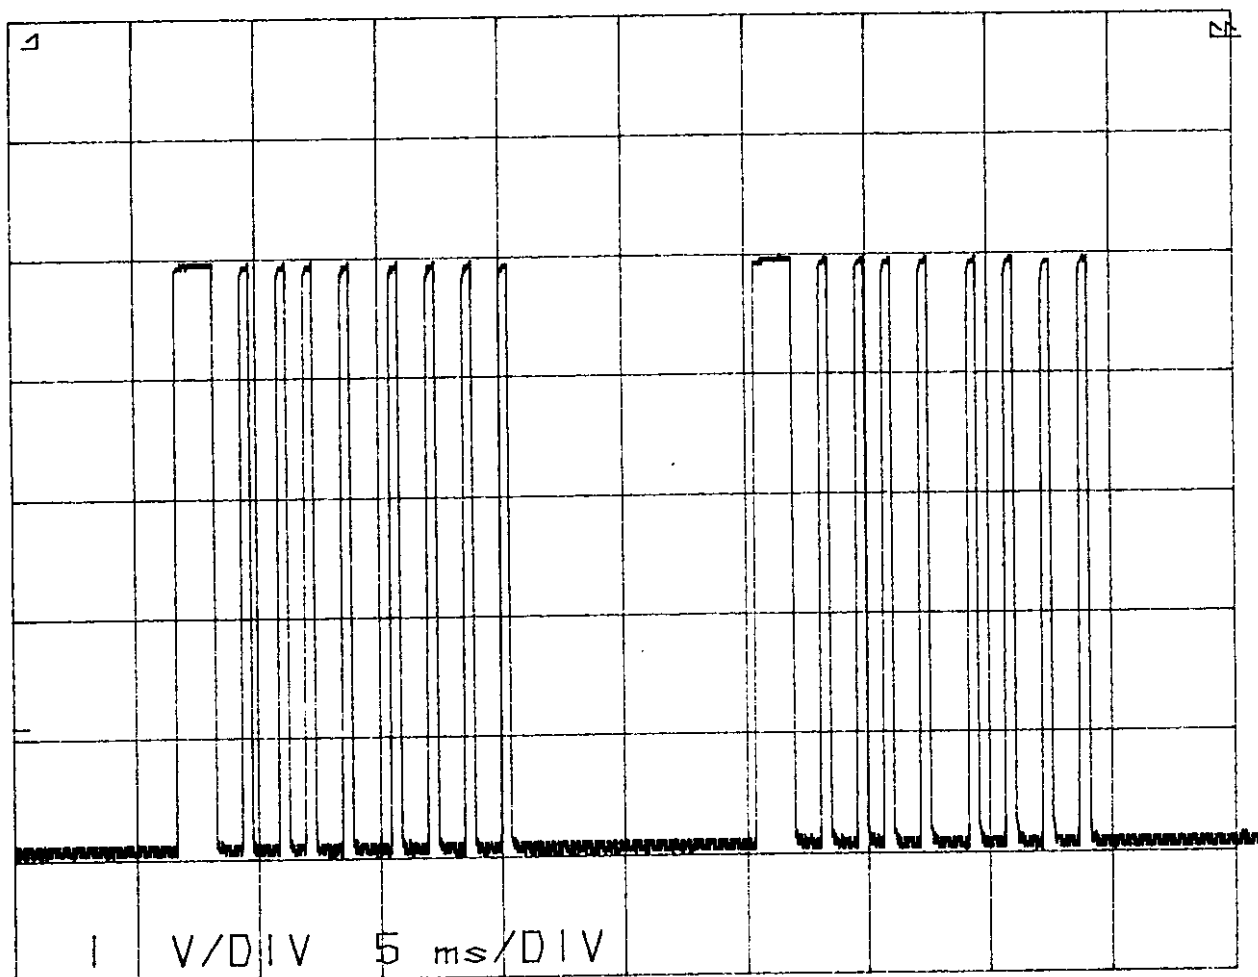

ENGINEERING TEST REPORT**5. EMISSION BANDWIDTH****5.1 Reference Rule and Specification**

FCC Rule Part 95 [§ 95.633],[§ 95.635] and Part 2 Subpart J [§ 2.989]

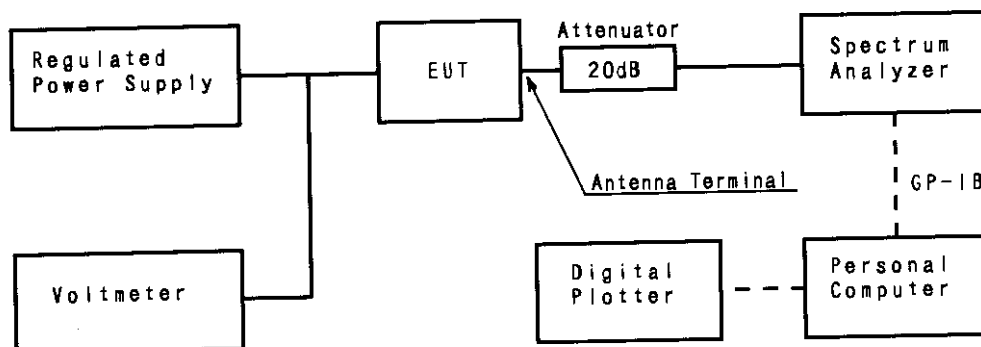5.2 Test Configuration

ENGINEERING TEST REPORT**5.3 Test Result**

See next figure (the picture of spectrum analyzer)

Occupied Bandwidth

I measured by the spectrum analyzer TR4172 which could measure 99% occupied bandwidth(OBW).

There are 1001 data on horizontal axe of display.

One of them is V_n . Then all power P becomes following fomula.

$$P = \sum_{n=1}^{1001} \frac{V_n^2}{R} \quad \text{-----} \quad (1)$$

where, R is input impedance of TR4172.

If, at number X points from the left edge of display, sum of power becomes 0.5% of P and at number Y points, sum of power become 99.5% of P ,

$$0.005 P = \sum_{n=1}^X \frac{V_n^2}{R} \quad \text{-----} \quad (2)$$

$$0.995 P = \sum_{n=1}^Y \frac{V_n^2}{R} \quad \text{-----} \quad (3)$$

From(1)~(3), OBW becomes next.

$$O B W = \frac{f_{SPAN}(Y - X)}{1000}$$

where, F_{SPAN} is frequency span of the spectrum analyzer.

ENGINEERING TEST REPORT**6. FIELD STRENGTH OF SPURIOUS RADIATION****6.1 Reference Rule and Specification**

FCC Rule Part 95 [§ 95.635] and Part 2 Subpart J [§ 2.993]


6.2 Test Procedure

- 1) Tune-up the transmitter(EUT).
- 2) Device Vertical : Place the device so that it's longest axis is vertical.
- 3) For each spurious measurement the receiving antenna is adjusted to the correct length for the frequency involved. These measurements are made from the lowest radio frequency generated in the EUT or 25MHz to the tenth harmonic of the carrier.
- 4) For each spurious frequency, raise and lower the receiving antenna to obtain a maximum reading on the spectrum analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until highest possible signal has been obtain. Record this maximum reading.
- 5) Repeat Step4 for each spurious frequency with the antennae polarized vertically.
- 6) Device Horizontal : Place the device so that it's longest axis is horizontal.
- 7) Repeat Step3, Step4, and Step5
- 8) The attenuation of the spurious in dB can be calculated from the following formula:

$$\text{Spurious Attenuation [dB]} = \text{Field Strength of Carrier Emission [dB}\mu\text{V/m]} - \text{Field Strength of Spurious Emission [dB}\mu\text{V/m]}$$

ENGINEERING TEST REPORT**6.3 Test Configuration**

[Open Site]

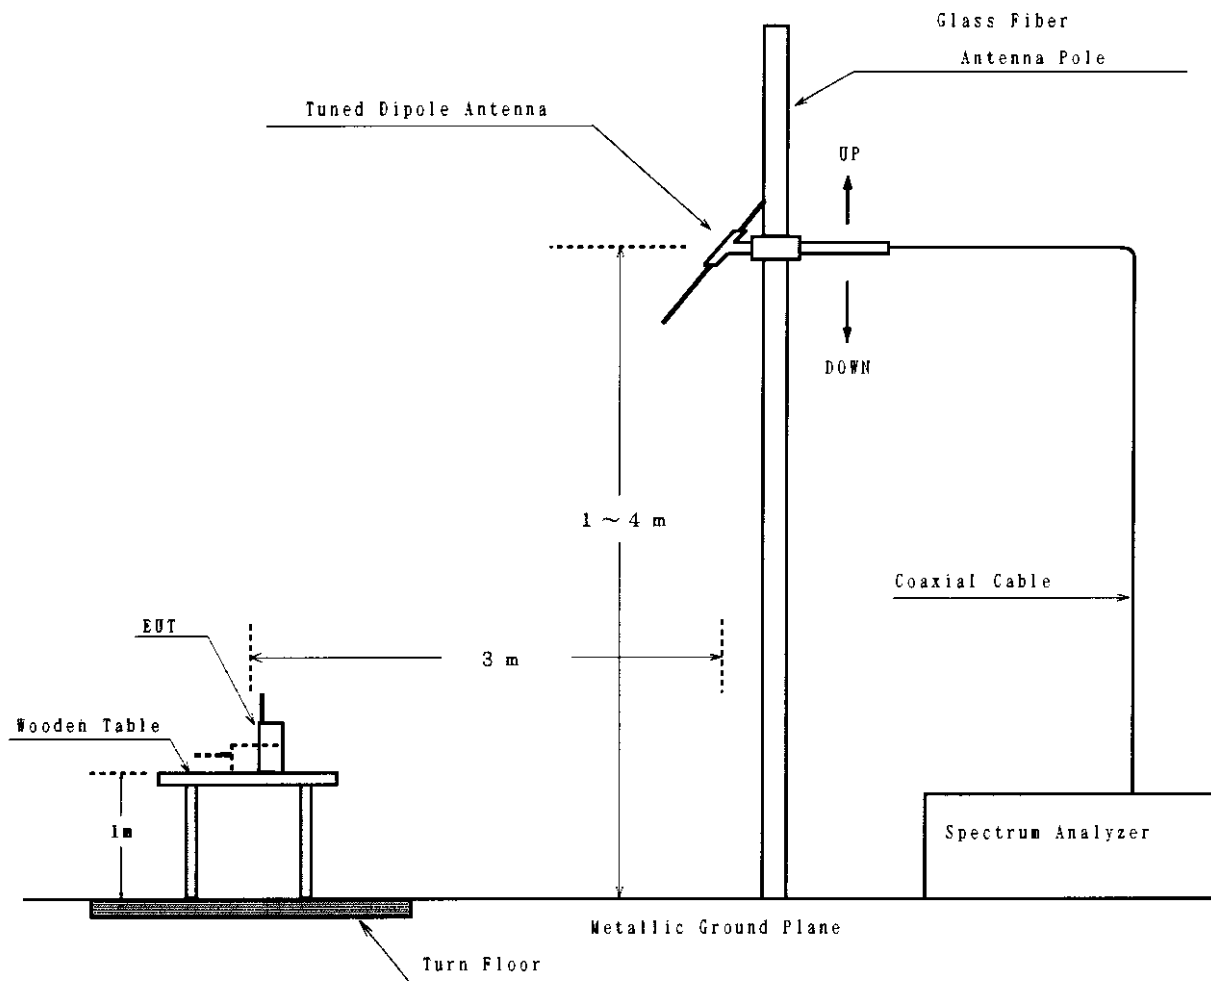

ENGINEERING TEST REPORT

6.5 Test Results

EMISSION FREQUENCY [MHz]	METER READING at 3m [dB μ V]		ANTENNA FACTOR [dB]	MAXIMUM FIELD STRENGTH [dB μ V/m]	ATTENUATION FROM CARRIER [dB]	LIMIT [dB]
	Horiz.	Vert.				
<u>Carrier Emission</u>						
72.79	113.8	109.4	7.5	121.3	—	—
<u>Spurious Emission</u>						
48.527	35.9	39.7	11.5	51.2	70.1	49.8
60.658	39.1	43.4	8.9	52.3	69.0	49.8
84.921	42.1	38.4	8.1	50.2	71.1	49.8
145.580	53.3	46.5	15.6	68.9	52.4	49.8
218.370	40.7	34.9	18.1	58.8	62.5	49.8
291.148	36.9	34.6	21.3	58.2	63.1	49.8
303.291	<20.0	<20.0	18.1	<38.1	>83.2	49.8
315.423	23.0	<20.0	18.2	41.2	80.1	49.8
363.950	30.8	27.6	18.8	49.6	71.7	49.8
436.750	34.8	34.2	20.1	54.9	66.4	49.8
461.003	28.6	27.6	20.7	49.3	72.0	49.8
485.266	30.5	28.1	21.3	51.8	69.5	49.8
509.530	36.0	31.0	21.9	57.9	63.4	49.8
533.793	29.6	27.0	22.5	52.1	69.2	49.8
582.320	36.6	34.8	23.7	60.3	61.0	49.8
655.110	33.5	31.8	24.9	58.4	62.9	49.8
727.900	34.4	32.8	25.7	60.1	61.2	49.8

[Note]

Limit of the attenuation of the spurious in dB:

$$56 + 10\log(\text{Power}) = 56 + 10\log(0.2399) = 49.8 \text{ dB}$$

[Environment]

Temperature : 26°C Humidity : 48%

[Summary of Test Results]

Minimum Margin was 2.6 dB at 145.580 MHz, horizontal polarization.

Tested Date : September 30, 1998


Tester Signature



Yoshiko Kotani

ENGINEERING TEST REPORT**7. FREQUENCY STABILITY MEASUREMENT****7.1 Reference Rule and Specification**

FCC Rule Part 95 [§ 95.623] and Part 2 Subpart J [§ 2.995]

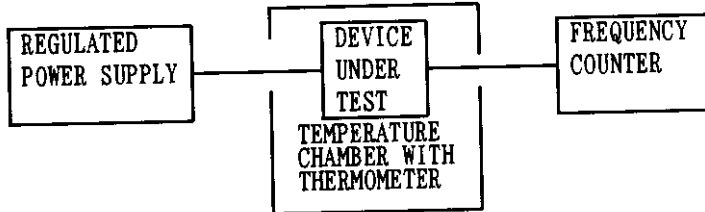7.2 Frequency vs Temperature TestTest Setup DiagramTest Result

Test Voltage: 9.6V

REFERENCE FREQUENCY [MHz]	TEMPERATURE [°C]	FREQUENCY DRIFT [%]	LIMIT [%]
72.790	-30	-0.001099	±0.002
	-20	-0.000495	
	-10	-0.000144	
	0	0.000014	
	+10	0.000021	
	+20	-0.000041	
	+30	-0.000131	
	+40	-0.000192	
	+50	-0.000151	

7.3 Frequency vs Voltage TestTest Setup Diagram : Same as (1)Test Result

Temperature : +20°C

REFERENCE FREQUENCY [MHz]	SUPPLIED VOLTAGE [Volt]	FREQUENCY DRIFT [%]	LIMIT [%]
72.790	7.2	-0.002748	±0.002

Note Reduced primary supply voltage to the operating and point which shall be specified by the manufacturer.

[Environment] Temperature : 24°C Humidity : 55%

[Summary of Test Results]

Above data shows that the test device complies with the requirements.

Tested Date : October 8 & 9, 1998

Tester Signature

Yasunari Kawai

ENGINEERING TEST REPORT**8. LIST OF TEST INSTRUMENTS**

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESVS10	Frequency Range 20 MHz - 1 GHz	FS-81	☐	1997/10	1998/10
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	SA-20	☒	1999/7	1999/7
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30 MHz - 300 MHz	AN-99	☒	1998/2	1999/2
Log-Periodic	Schwarzbeck	UHALP 9107	Frequency Range 300 MHz - 1 GHz	AN-199	☒	1998/2	1999/2
Tuned Dipole	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-111	☒	1998/3	1999/3
	Kyoritsu	KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-115	☐	1998/3	1999/3

ENGINEERING TEST REPORT

- Continued -

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Tuned Dipole Antenna	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-7-5	☒	1998/3	1999/3
	Kyoritsu	KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-7-16	☐	1998/3	1999/3
Signal Generator	Wiltron	6759A-10	Frequency Range 10 MHz - 26.5 GHz	SG-38	☐	1997/9	1998/9
		6769B	Frequency Range 10 MHz - 40.0 GHz	SG-42	☐	1997/9	1998/9
	Anritsu	MG3601A	Frequency Range 0.1 MHz - 1040 MHz	SG-40	☐	1997/9	1998/9
				SG-41	☒	1997/9	1998/9
Power Amp.	ENI	601L	Frequency Range 0.8 MHz - 1 GHz	AM-24	☒	1998/6	1999/6
		411LA	Frequency Range 0.15 MHz - 300 MHz	AM-25	☐	1998/6	1999/6
	Amplifier Research	100W1000 M1	Frequency Range 80 MHz - 1 GHz	AM-55	☐	1997/6	1998/6
RF Millivolt-meter	Rohde & Schwarz	URV5	Frequency Range 10 kHz - 2 GHz	VV-24	☐	1998/3	1999/3
				VV-28	☐	1998/3	1999/3
				VV-29	☒	1998/3	1999/3
				VV-32	☐	1998/3	1999/3
Coaxial Cable	KEC	5D2W	Length : 27m N - N	CL-33	☐	1998/3	1999/3
			Length : 35m N - N	CL-34	☐	1998/3	1999/3
	Suhner	SUCOFLEX 104	Length : 1m [SMA(p)-SMA(p)]	CL-42	☐	1998/2	1999/2
				CL-45	☐	1998/2	1999/2
			Length : 10m [SMA(p)-SMA(p)]	CL-46	☒	1998/2	1999/2
Attenuator	Weinschel Engineering	2	Frequency Range 1 MHz - 20 GHz -10 dB	AT-26-3	☐	1998/2	1999/2

ENGINEERING TEST REPORT

- Continued -

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Regulated DC Power Supply	Kikusui	PAB18-3A	Output 0~18V, 3A	PD-32	☒	—	—
Temperature Chamber with Thermometer	Tabai Mfg.	MC-710	Temperature Range -75 - +100 °C	CH-31	☒	—	—
Frequency Counter	Advantest	TR5823H	Freq. Range 1 mHz-1300 MHz	CU-17	☒	1998/5	1999/5
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	SA-27	☒	1998/8	1999/8
Digital Plotter	Hewlett Packard	7090A	Plot Area A3 size	RE-17	☒	—	—
Multimeter	John Fluke	37	Volt Range 0.1mV - 1000 V Ampere Range 0.01 mA - 20 A	MM-91	☒	1998/3	1999/3
Personal Computer	Hewlett Packard	9121	Memory 512kB Language BASIC	PC-38-2	☒	—	—
Digital Oscilloscope	Matsushita Communication Ind.	VP-5740A	Frequency Range DC -10 MHz	OS-22	☒	1998/5	1999/5

ENGINEERING TEST REPORT**Operation Mode of EUT**

Modulation : PC1

EUT was operated the various positions of JOY STICKS & OTHER SWITCHES. (Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold


Occupied Bandwidth = 5.8kHz (99% Power)

M1=72.787MHz(0.5% Power Point)

M2=72.7928MHz(99.5% Power Point)

Model No. RD6000, Applicant : SANWA ELECTRONIC INSTRUMENT CO., LTD.
REF 23.8dBm ATT 10dB October 7, 1998

10 dB/

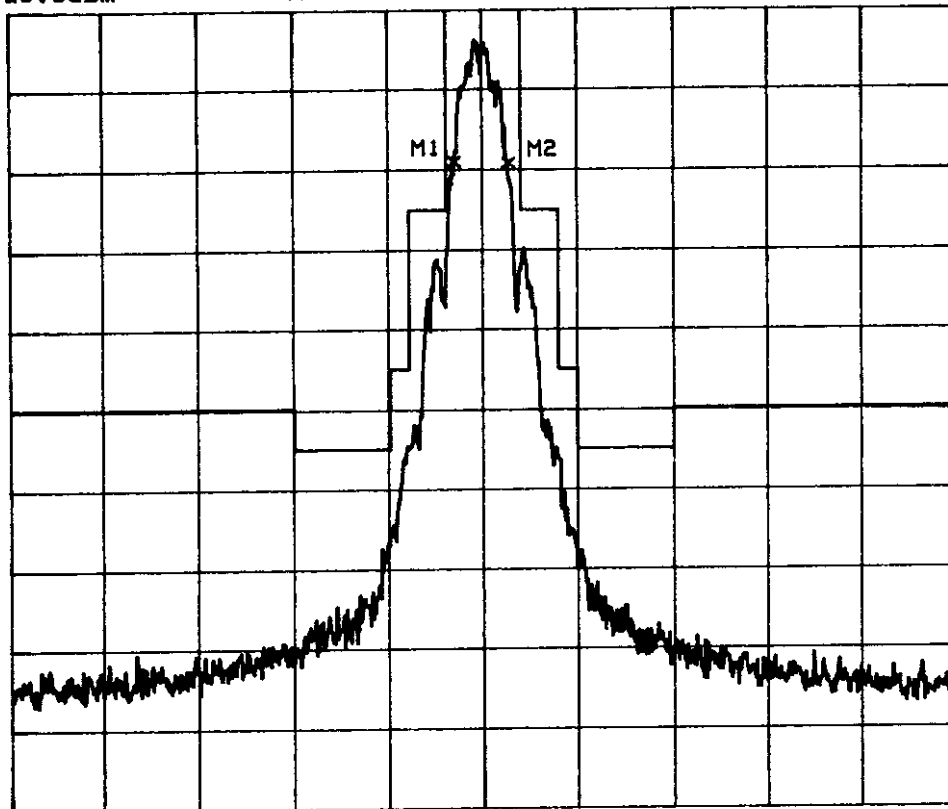

CENTER 72.79MHz

RBW 300Hz

VBW 1MHz

SPAN 100kHz

SWP 5s

ENGINEERING TEST REPORT**Operation Mode of EUT**

Modulation : PC2


EUT was operated the various positions of JOY STICKS & OTHER SWITCHES. (Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold

Occupied Bandwidth = 6kHz (99% Power)

M1=72.7868MHz(0.5% Power Point)

M2=72.7928MHz(99.5% Power Point)

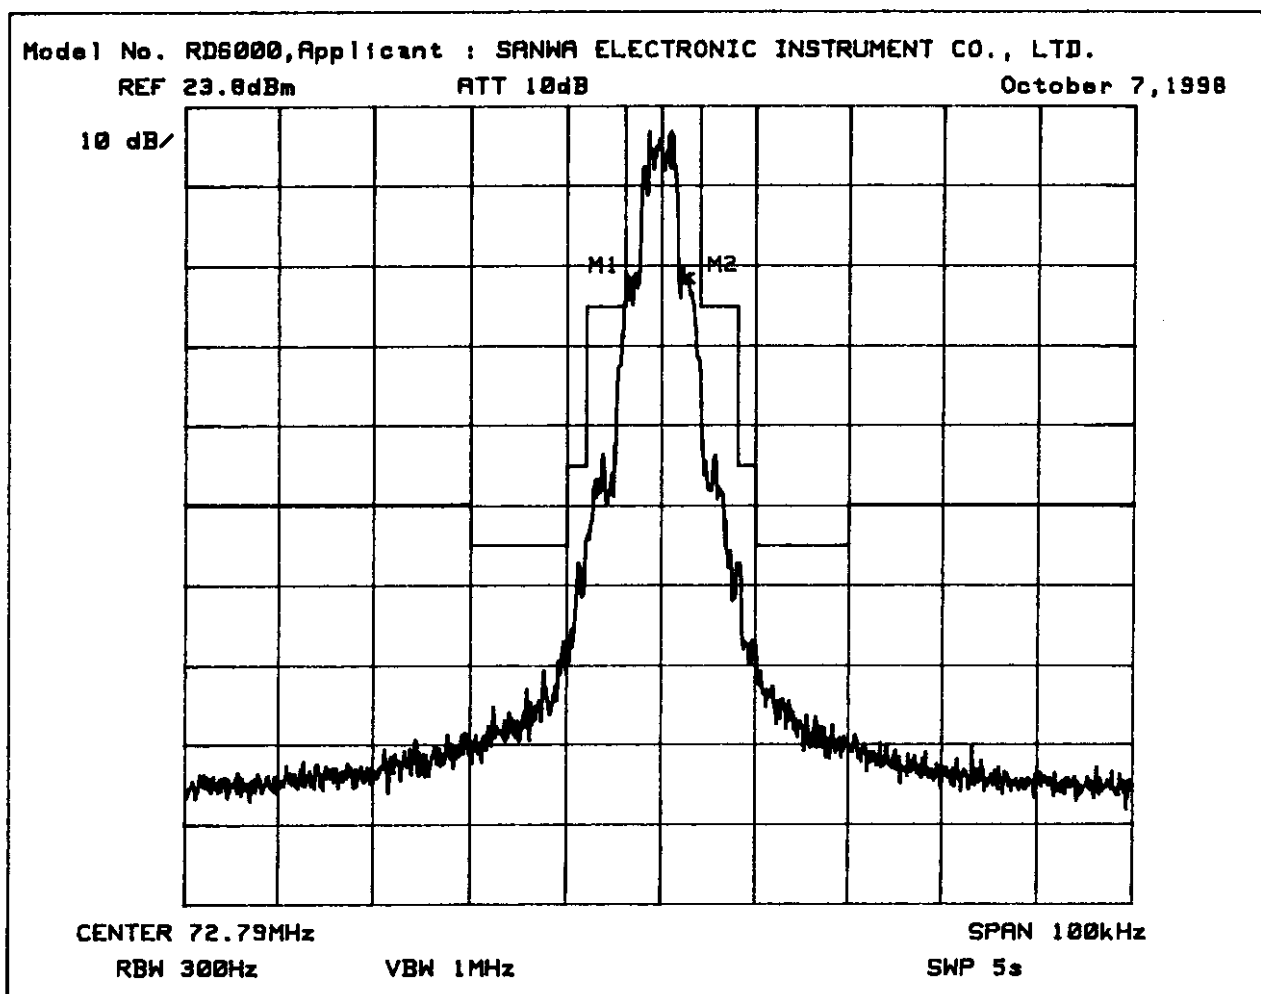

ENGINEERING TEST REPORT**Operation Mode of EUT**

Modulation : PP

EUT was operated the various positions of JOY STICKS & OTHER SWITCHES. (Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold

Occupied Bandwidth = 5.2kHz (99% Power)

M1=72.7875MHz(0.5% Power Point)

M2=72.7927MHz(99.5% Power Point)


Model No. RDS000, Applicant : SANWA ELECTRONIC INSTRUMENT CO., LTD.

REF 23.8dBm

ATT 10dB

October 7, 1998

10 dB/

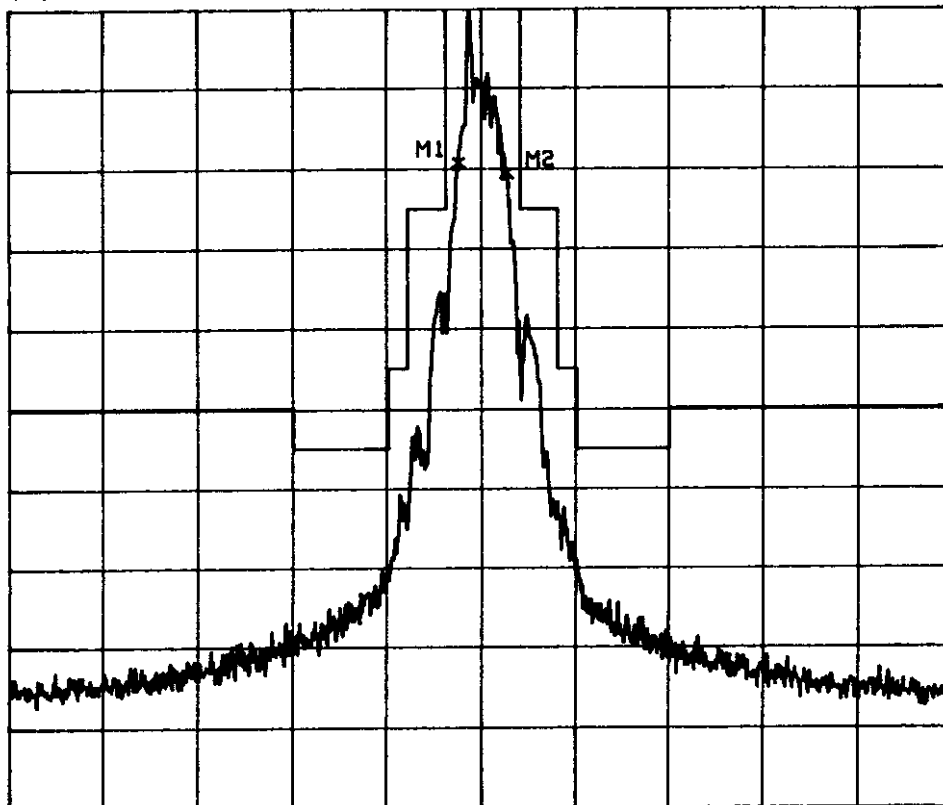

CENTER 72.79MHz

RBW 300Hz

VBW 1MHz

SPAN 100kHz

SWP 5s

ENGINEERING TEST REPORT**Operation Mode of EUT**

Modulation : PPR


EUT was operated the various positions of JOY STICKS & OTHER SWITCHES. (Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold

Occupied Bandwidth = 5.1kHz (99% Power)

M1=72.7874MHz(0.5% Power Point)

M2=72.7925MHz(99.5% Power Point)

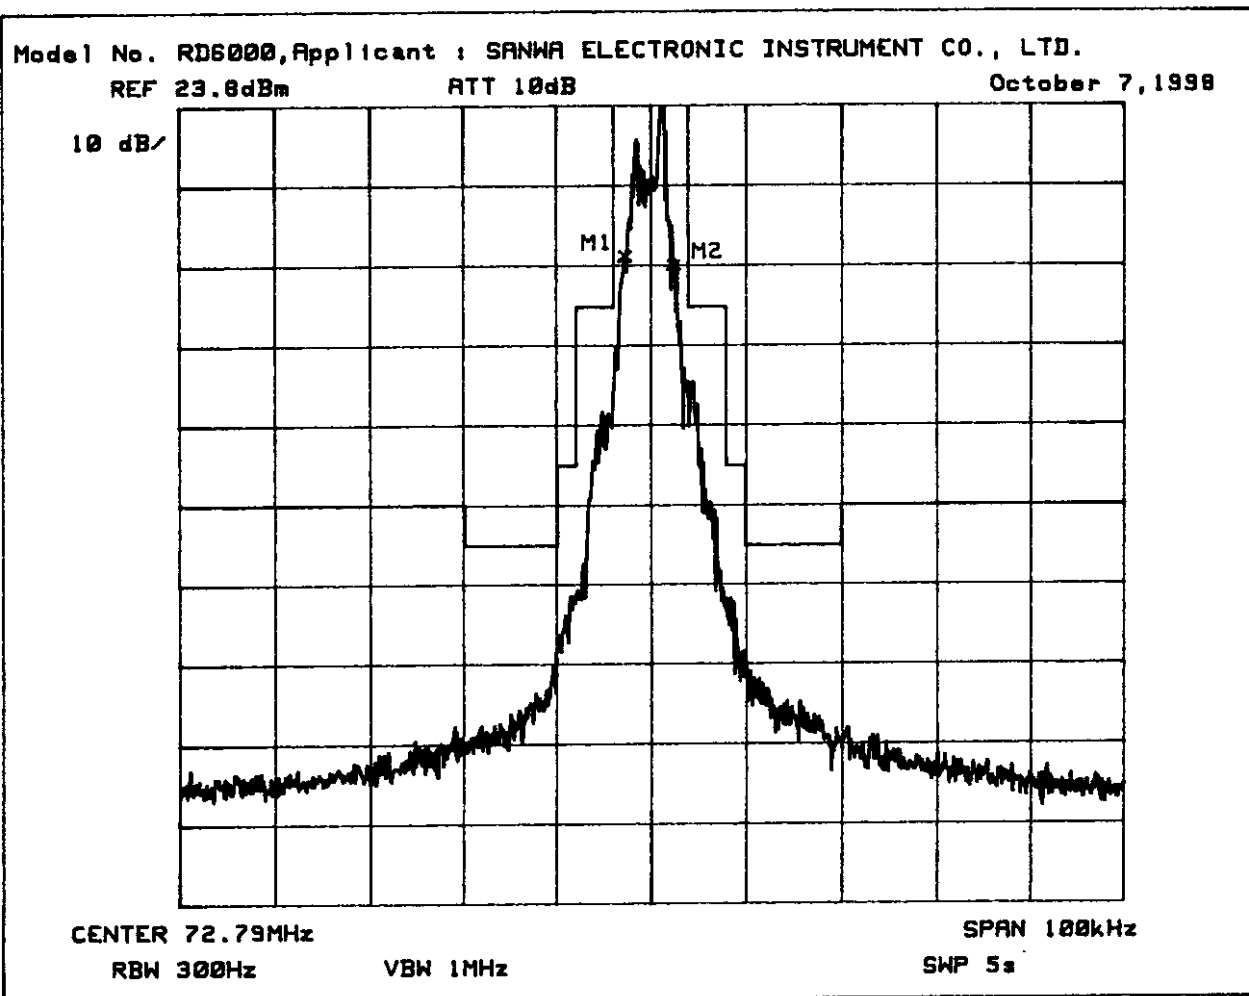

ENGINEERING TEST REPORT


Operation Mode of EUT

Non modulation
[F Low]

Occupied Bandwidth = .9kHz (99% Power)

M1=72.7882MHz(0.5% Power Point)

M2=72.7891MHz(99.5% Power Point)

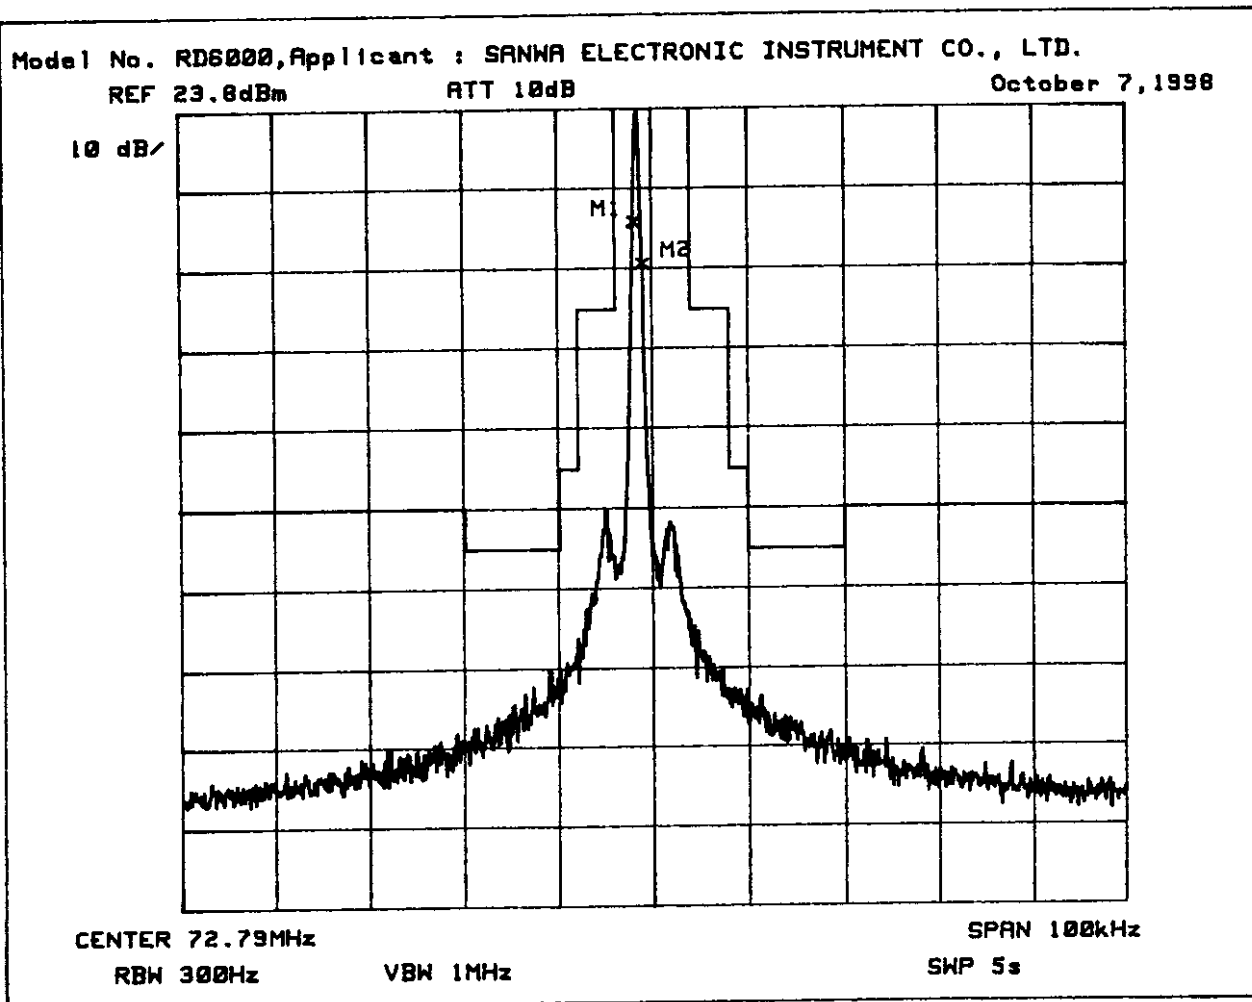

ENGINEERING TEST REPORT**Operation Mode of EUT**

Non modulation
[F High]

Occupied Bandwidth = 1kHz (99% Power)

M1=72.7907MHz(0.5% Power Point)

M2=72.7917MHz(99.5% Power Point)

