



## FCC TEST REPORT

## FOR

Shenyang Sanfeng Intelligent Technology Co., Ltd

Cell Phone Signal Booster

Test Model: SF008A

Additional Model No.: SF008B, SF008C

Prepared for : Shenyang Sanfeng Intelligent Technology Co., Ltd  
Address : No.10-1(1-28-12), Hunnan West Road, Hunnan District,  
Shenyang City, Liaoning Province, 110000 China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,  
Baoan District, Shenzhen, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 17, 2024  
Number of tested samples : 2  
Sample No. : A241017048-1, A241017048-2  
Serial number : Prototype  
Date of Test : October 17, 2024 ~ November 13, 2024  
Date of Report : November 14, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity

**FCC TEST REPORT****FCC CFR 47 PART 20.21****Report Reference No.** ..... : **LCSA10174024EA****Date of Issue**..... : November 14, 2024**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address**..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,  
Baoan District, Shenzhen, China**Testing Location/ Procedure**..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name**..... : **Shenyang Sanfeng Intelligent Technology Co., Ltd****Address**..... : No.10-1(1-28-12), Hunnan West Road, Hunnan District, Shenyang  
City, Liaoning Province, 110000 China**Test Specification****Standard**..... : FCC CFR Title 47 Part 20.21**Test Report Form No.**..... : TRF-4-E-187 A/0**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF**..... : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **Cell Phone Signal Booster****Trade Mark**..... : Metarepeater**Test Model**..... : SF008A**Ratings**..... : For AC Adapter(model: WTA24-1201500-U):

Input: 100-240V~ 50/60Hz 1.0A

Output: 12V= 1.5A

**Result** ..... : **Positive****Compiled by:**

Diamond Lu/ Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang / Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT**

|                          |                       |   |
|--------------------------|-----------------------|---|
| <b>Test Report No. :</b> | <b>LCSA10174024EA</b> | <u>November 14, 2024</u><br>Date of issue |
|--------------------------|-----------------------|---|

|                          |   |
|--------------------------|---|
| Test Model.....          | : SF008A  |
| EUT.....                 | : Cell Phone Signal Booster   |
| <b>Applicant.....</b>    | <b>: Shenyang Sanfeng Intelligent Technology Co., Ltd</b>   |
| Address.....             | : No.10-1(1-28-12), Hunnan West Road, Hunnan District, Shenyang City, Liaoning Province, 110000 China |
| Telephone.....           | : /   |
| Fax.....                 | : /   |
| <b>Manufacturer.....</b> | <b>: Shenyang Sanfeng Intelligent Technology Co., Ltd</b>   |
| Address.....             | : No.10-1(1-28-12), Hunnan West Road, Hunnan District, Shenyang City, Liaoning Province, 110000 China |
| Telephone.....           | : /   |
| Fax.....                 | : /   |
| <b>Factory.....</b>      | <b>: Shenyang Sanfeng Intelligent Technology Co., Ltd</b>   |
| Address.....             | : No.10-1(1-28-12), Hunnan West Road, Hunnan District, Shenyang City, Liaoning Province, 110000 China |
| Telephone.....           | : /   |
| Fax.....                 | : /   |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Revision History

| Revision | Issue Date        | Revisions     | Revised By |
|----------|-------------------|---------------|------------|
| 000      | November 14, 2024 | Initial Issue | ---        |
|          |                   |               |            |
|          |                   |               |            |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## TABLE OF CONTENTS

| Description  | Page       |
|--|------------|
| <b>1. GENERAL INFORMATION</b>  | <b>6</b>   |
| 1.1 Description of Device (EUT)  | 6          |
| 1.2 Support equipment List   | 9          |
| 1.3 External I/O Cable   | 9          |
| 1.4 Description of Test Facility   | 9          |
| 1.5 Statement of the Measurement Uncertainty   | 10         |
| 1.6 Measurement Uncertainty  | 10         |
| 1.7 Operation Band   | 10         |
| <b>2. TEST METHODOLOGY</b>   | <b>11</b>  |
| 2.1 EUT Configuration  | 11         |
| 2.2 General Test Procedures  | 11         |
| <b>3. SYSTEM TEST CONFIGURATION</b>  | <b>12</b>  |
| 3.1 Justification  | 12         |
| 3.2 EUT Exercise Software  | 12         |
| 3.3 Special Accessories  | 12         |
| 3.4 Block Diagram/Schematics   | 12         |
| 3.5 Equipment Modifications  | 12         |
| 3.6 Test Setup   | 12         |
| <b>4. SUMMARY OF TEST RESULTS</b>  | <b>13</b>  |
| <b>5. SUMMARY OF TEST EQUIPMENT</b>  | <b>14</b>  |
| <b>6. MEASUREMENT RESULTS</b>  | <b>15</b>  |
| 6.1 Noise Limits   | 15         |
| 6.2 Authorized Frequency Band Verification   | 25         |
| 6.3 Maximum power measurement  | 28         |
| 6.4 Gain Limits and Bidirectional Capability&Variable Gain&Variable Uplink Gain Timing | 35         |
| 6.5 Anti-Oscillation   | 42         |
| 6.6 Intermodulation Limits   | 54         |
| 6.8. Conducted Spurious Emission   | 81         |
| 6.9 Uplink Inactivity  | 92         |
| 6.10 Occupied Bandwidth  | 95         |
| <b>7. RADIATION SPURIOUS EMISSION</b>  | <b>109</b> |
| <b>8. TEST SETUP PHOTOGRAPHS OF EUT</b>  | <b>113</b> |
| <b>9. EXTERIOR PHOTOGRAPHS OF THE EUT</b>  | <b>113</b> |
| <b>10. INTERIOR PHOTOGRAPHS OF THE EUT</b>   | <b>113</b> |





## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

|                               |  |
|-------------------------------|--|
| EUT                           | : Cell Phone Signal Booster  |
| Equipment Type                | : Fixed Wideband Consumer Zone Enhancers   |
| Test Model                    | : SF008A   |
| Additional Model No.          | : SF008B, SF008C   |
| Model Declaration             | : PCB board, structure and internal of these model(s) are the same   |
| Ratings                       | : For AC Adapter(model: WTA24-1201500-U):<br>Input: 100-240V~ 50/60Hz 1.0A<br>Output: 12V= 1.5A  |
| Hardware Version              | : SFZN-259-Booster-V1.1  |
| Software Version              | : 259V1  |
| Frequency Range               | : Lower 700MHz Band (B12)<br>Uplink: 698~716MHz, Downlink: 728~746MHz<br>Upper 700MHz Band (B13)<br>Uplink: 776~787MHz, Downlink: 746~757MHz<br>Cellular Band (B5)<br>Uplink: 824~849MHz, Downlink: 869~894MHz<br>PCS Band (B2, B25)<br>Uplink: 1850~1915MHz, Downlink: 1930~1995MHz<br>AWS Band(B4, B66)<br>Uplink: 1710~1755MHz, Downlink: 2110~2155MHz                                |
| Max Gain                      | : Uplink: ≤65dB<br>Downlink: ≤70dB   |
| Mobile Antenna Gain           | : 0dBi   |
| Max Antenna Port Output Power | : Uplink: ≤20dBm<br>Downlink: ≤15dBm   |
| Emission Designator           | : GXW: Cellular Band (B5), PCS Band (B2)<br>G7W: Cellular Band (B5), PCS Band (B2)<br>F9W: Cellular Band (B5), PCS Band (B2), AWS Band(B4)<br>G7D: Lower 700MHz Band (B12, B17), Upper 700MHz Band (B13),<br>Cellular Band (B5), PCS Band (B2, B25), AWS Band(B4)<br>W7D: Lower 700MHz Band (B12, B17), Upper 700MHz Band (B13),<br>Cellular Band (B5), PCS Band (B2, B25), AWS Band(B4) |
| FCC Classification            | : B2W/Wideband Consumer Booster(CMRS)  |
| Operating Temperature         | : -20°C~+65°C  |





## Antenna Information:

| Mode     | Frequency (MHz) | Max. Outdoor Antenna Gain (dBi)<br>(Log-periodic antenna, Model: A0103SF) | Min. Cable loss (dB) |
|----------|-----------------|---|----------------------|
| Uplink   | 698-716         | 7.47  | 1.9                  |
|          | 777-787         | 7.47  | 1.9                  |
|          | 824-849         | 7.47  | 1.9                  |
|          | 1850-1910       | 7.96  | 3.0                  |
|          | 1710-1755       | 7.96  | 3.0                  |
| Mode     | Frequency (MHz) | Max. Indoor Antenna Gain (dBi)<br>(Wall mounted antenna, Model: A0501SF)  | Min. Cable loss (dB) |
| Downlink | 728-746         | 6.44  | 1.9                  |
|          | 746-756         | 6.44  | 1.9                  |
|          | 869-894         | 6.44  | 1.9                  |
|          | 1930-1995       | 8.84  | 3.0                  |
|          | 2110-2155       | 8.84  | 3.0                  |







## MSCL Calculations SF008A:

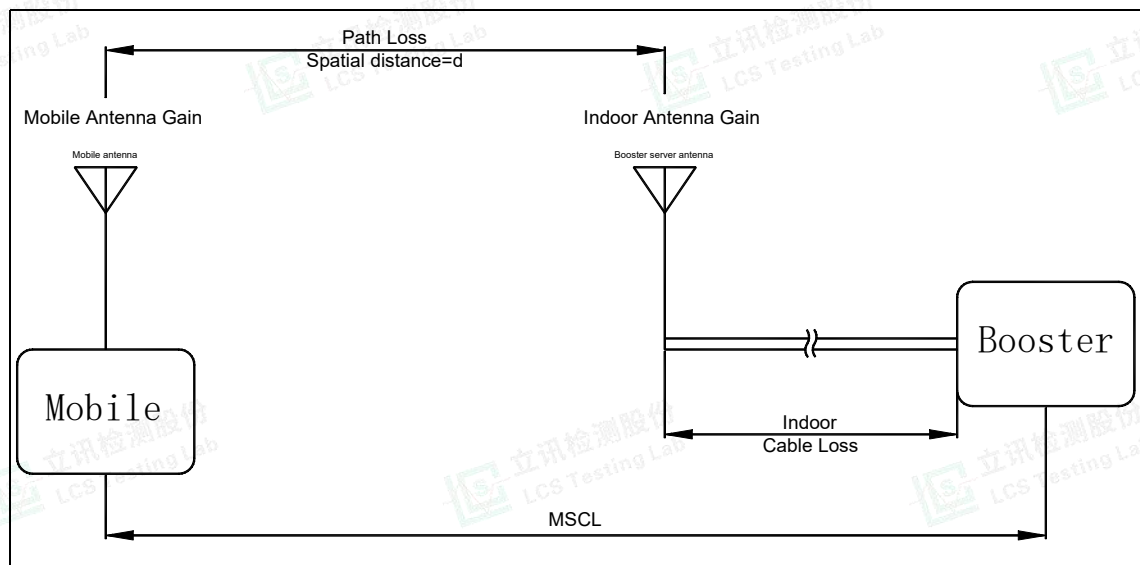


Figure 1

Remark:  $MSCL = \text{Path loss} + \text{Indoor Cable Loss} - \text{Mobile Antenna Gain} - \text{Indoor Antenna Gain} + \text{Polarity Loss}$

| Path loss= $20\log f + 20\log D - 27.56$ |                 |       |               |                |
|--|-----------------|-------|---------------|----------------|
| Operation Band                           | Frequency (MHz) | D (m) | Constant (dB) | Path loss (dB) |
| Lower 700 Band (698-716)                 | 698             | 2     | 27.56         | 35.34          |
| Upper 700 Band (776-787)                 | 776             | 2     | 27.56         | 36.30          |
| Cellular Band (824-849)                  | 824             | 2     | 27.56         | 36.78          |
| PCS Band (1850-1915)                     | 1850            | 2     | 27.56         | 43.80          |
| AWS Band (1710-1755)                     | 1710            | 2     | 27.56         | 43.12          |

| Path loss= $20\log f + 20\log D - 27.56$  |                |                        |                           |                           |                    |           |
|---|----------------|------------------------|---------------------------|---------------------------|--------------------|-----------|
| MSCL Calculations of fixed booster SF008A |                |                        |                           |                           |                    |           |
| MSCL                                      |                |                        |                           |                           |                    |           |
| Operation Band                            | Path loss (dB) | Indoor Cable Loss (dB) | Mobile Antenna Gain (dBi) | Indoor Antenna Gain (dBi) | Polarity Loss (dB) | MSCL (dB) |
| Lower 700 Band (698-716)                  | 35.3           | 8.84                   | 0.0                       | 1.9                       | 3                  | 33.76     |
| Upper 700 Band (776-787)                  | 36.3           | 6.44                   | 0.0                       | 1.9                       | 3                  | 34.76     |
| Cellular Band (824-849)                   | 36.8           | 6.44                   | 0.0                       | 1.9                       | 3                  | 35.26     |
| PCS Band (1850-1915)                      | 43.8           | 6.44                   | 0.0                       | 3.0                       | 3                  | 40.90     |
| AWS(1710-1755)                            | 43.1           | 8.84                   | 0.0                       | 3.0                       | 3                  | 40.26     |







## 1.2 Support equipment List

| Manufacturer                          | Description | Model           | Serial Number | Certificate |
|---------------------------------------|-------------|-----------------|---------------|-------------|
| Shenzhen Wentong Electronic Co., Ltd. | ADAPTOR     | WTA24-1201500-U | ---           | FCC         |

## 1.3 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| POWER Port           | 1        | N/A   |
| Antenna Port         | 2        | N/A   |

## 1.4 Description of Test Facility

FCC Registration Number is 254912.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Industry Canada Registration Number is 9642A.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 VSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## 1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

| Test Item              | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty  | 9KHz~30MHz      | 3.10dB      | (1)  |
|                        | 30MHz~200MHz    | 2.96dB      | (1)  |
|                        | 200MHz~1000MHz  | 3.10dB      | (1)  |
|                        | 1GHz~26.5GHz    | 3.80dB      | (1)  |
|                        | 26.5GHz~40GHz   | 3.90dB      | (1)  |
| Conduction Uncertainty | 150kHz~30MHz    | 1.63dB      | (1)  |
| Power disturbance      | 30MHz~300MHz    | 1.60dB      | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Operation Band

| Uplink Band Frequency (MHz) | Downlink Band Frequency (MHz) |
|-----------------------------|-------------------------------|
| Lower 700 Band (698-716MHz) | Lower 700 Band (728-746MHz)   |
| Upper 700 Band (776-787MHz) | Upper 700 Band (746-757MHz)   |
| Cellular Band (824-849MHz)  | Cellular Band (869-894MHz)    |
| PCS Band (1850-1915MHz)     | PCS Band (1930-1995MHz)       |
| AWS Band (1710-1755MHz)     | AWS Band (2110-2155MHz)       |

Note: all model was tested, Only worst model was recorded in this report.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## 2. TEST METHODOLOGY

All tests and measurements indicated in this document were performed in accordance with:

- 1) FCC Part 22: Cellular Radiotelephone Service
- 2) FCC Part 24: Broadband PCS.
- 3) FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
- 4) FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
- 5) FCC Part 20.21: Signal boosters..
- 6) ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services;
- 7) KDB 935210 D03 Signal Booster Measurements v04r04.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 General Test Procedures

#### 2.2.1 Radiated spurious emissions

The EUT is placed on the turntable, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated spurious emissions measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013





### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2 EUT Exercise Software

N/A

#### 3.3 Special Accessories

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| --           | --          | --    | --            | --          |

#### 3.4 Block Diagram/Schematics

Please refer to the related document.

#### 3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6 Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



#### 4. SUMMARY OF TEST RESULTS

| Requirement   | CFR 47 Section  | Result |
|---|---|--------|
| Noise Limits  | §20.21(e)(8)(i)(A)<br>§20.21(e)(8)(i)(H)  | PASS   |
| Authorized Frequency Band<br>Verification Test  | §20.21(e)(3)  | PASS   |
| Maximum Power Measurement   | §20.21(e)(8)(i)(D)<br>§20.21(e)(8)(i)(B)&§20.21(e)(4)                                       | PASS   |
| Gain Limits and Bidirectional<br>Capability<br>&Variable Gain<br>&Variable Uplink Gain Timing | §20.21(e)(8)(i)(C)(2)<br>§20.21(e)(8)(i)(B)<br>§20.21(e)(8)(i)(C) (1)<br>§20.21(e)(8)(i)(H) | PASS   |
| Anti-Oscillation  | §20.21(e)(8)(ii)(A)&§20.21(e)(4)  | PASS   |
| Intermodulation Limits  | §20.21(e)(8)(i)(F)  | PASS   |
| Out of Band Emission  | §20.21(e)(8)(i)(E)  | PASS   |
| Conducted Spurious Emission   | §2.1051   | PASS   |
| Uplink inactivity   | §20.21(e)(8)(i)(I)  | PASS   |
| Occupied Bandwidth  | §2.1049   | PASS   |
| Radiated Spurious Emission  | §2.1053   | PASS   |
| RF Exposure   | RSS-102: 2.5.2  | PASS   |
| Spectrum Block Filter   | N/A   | N/A    |

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.





## 5. SUMMARY OF TEST EQUIPMENT

| Item | Equipment                           | Manufacturer   | Model No.  | Serial No.  | Cal Date   | Due Date   |
|------|-------------------------------------|----------------|------------|-------------|------------|------------|
| 1    | Power Meter                         | R&S            | NRVS       | 100444      | 2024-06-06 | 2025-06-05 |
| 2    | Power Sensor                        | R&S            | NRV-Z81    | 100458      | 2024-06-06 | 2025-06-05 |
| 3    | Power Sensor                        | R&S            | NRV-Z32    | 10057       | 2024-06-06 | 2025-06-05 |
| 4    | LTE Test Software                   | Tonscend       | JS1120-1   | N/A         | N/A        | N/A        |
| 5    | RF Control Unit                     | Tonscend       | JS0806-1   | 158060009   | 2023-11-27 | 2024-11-26 |
| 6    | MXA Signal Analyzer                 | Agilent        | N9020A     | MY51250905  | 2024-10-08 | 2025-10-07 |
| 7    | WIDEBAND RADIO COMMUNICATION TESTER | R&S            | CMW 500    | 103818      | 2024-06-06 | 2025-06-05 |
| 8    | DC Power Supply                     | Agilent        | E3642A     | N/A         | 2024-10-08 | 2025-10-07 |
| 9    | EMI Test Software                   | AUDIX          | E3         | /           | N/A        | N/A        |
| 10   | 3m Semi Anechoic Chamber            | SIDT FRANKONIA | SAC-3M     | 03CH03-HY   | 2024-06-06 | 2025-06-05 |
| 11   | Positioning Controller              | Max-Full       | MF7802BS   | MF780208586 | N/A        | N/A        |
| 12   | Active Loop Antenna                 | SCHWARZBECK    | FMZB 1519B | 00005       | 2024-07-13 | 2027-07-12 |
| 13   | By-log Antenna                      | SCHWARZBECK    | VULB9163   | 9163-470    | 2024-08-03 | 2027-08-02 |
| 14   | By-log Antenna                      | SCHWARZBECK    | VULB9163   | 9163-471    | 2024-08-03 | 2027-08-02 |
| 15   | Horn Antenna                        | SCHWARZBECK    | BBHA 9120D | 9120D-1925  | 2024-07-13 | 2027-07-12 |
| 16   | Horn Antenna                        | SCHWARZBECK    | BBHA 9120D | 9120D-1926  | 2024-07-13 | 2027-07-12 |
| 17   | Broadband Horn Antenna              | SCHWARZBECK    | BBHA 9170  | 791         | 2024-07-13 | 2027-07-12 |
| 18   | Broadband Horn Antenna              | SCHWARZBECK    | BBHA 9170  | 792         | 2024-07-13 | 2027-07-12 |
| 19   | Broadband Preamplifier              | SCHWARZBECK    | BBV9719    | 9719-025    | 2024-07-30 | 2025-07-29 |
| 20   | EMI Test Receiver                   | R&S            | ESR 7      | 101181      | 2024-06-06 | 2025-06-05 |
| 21   | RS SPECTRUM ANALYZER                | R&S            | FSP40      | 100503      | 2024-06-06 | 2025-06-05 |
| 22   | Low-frequency amplifier             | SchwarzZBECK   | BBV9745    | 00253       | 2024-10-08 | 2025-10-07 |
| 23   | High-frequency amplifier            | JS Denki Pte   | PA0118-43  | JSPA21009   | 2024-10-08 | 2025-10-07 |
| 24   | 6dB Attenuator                      | /              | 100W/6dB   | 1172040     | 2024-06-06 | 2025-06-05 |
| 26   | 3dB Attenuator                      | /              | 2N-3dB     | /           | 2024-10-08 | 2025-10-07 |
| 27   | Temperature & Humidity Chamber      | Baro           | /          | /           | 2024-06-12 | 2025-06-11 |
| 28   | EMI Test Software                   | Farad          | EZ         | /           | N/A        | N/A        |
| 29   | RADIO COMMUNICATION TESTER          | R&S            | CMU 200    | 105988      | 2024-06-06 | 2025-06-05 |
| 30   | Antenna Mast                        | Max-Full       | MFA-515BSN | 1308572     | N/A        | N/A        |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity





## 6. MEASUREMENT RESULTS

### 6.1 Noise Limits

#### 6.1.1 Applicable Standard

According to §20.21(e)(8)(i)(A) Noise Limits (uplink); §20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink and downlink noise power):

1. The transmitted maximum noise power in dBm/MHz of consumer boosters at their uplink and downlink ports shall not exceed the following limits:

Fixed booster maximum noise power shall not exceed  $-102.5 \text{ dBm/MHz} + 20 \text{ Log}_{10}(\text{Frequency})$ , where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

2. The transmitted noise power in dBm/MHz of consumer boosters at their uplink port shall not exceed  $-103 \text{ dBm/MHz} - \text{RSSI}$ .

#### 6.1.2 Test Procedure

Maximum transmitter noise power level

According to section 7.7.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Connect the EUT to the test equipment as shown in Figure 2. Begin with the uplink output (donor) port connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output (server) port to the spectrum analyzer.
- b) Set the spectrum analyzer RBW to 1 MHz with the VBW  $\geq 3$  RBW.
- c) Select the power averaging (rms) detector and trace average over at least 100 traces.
- d) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span  $\geq 2$  the CMRS band.
- e) Measure the maximum transmitter noise power level.
- f) Save the spectrum analyzer plot as necessary for inclusion in the final test report.
- g) Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands.
- h) Connect the EUT to the test equipment as shown in Figure 3 for uplink noise power measurement in the presence a downlink signal. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer.
  - i) Configure the signal generator for AWGN operation with a 99% OBW of 4.1 MHz.
  - j) Set the spectrum analyzer RBW for 1 MHz, VBW  $\geq 3$  RBW, with a power averaging (rms) detector with at least 100 trace averages.
  - k) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test, with the span  $\geq 2$  the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Appendix A).
  - l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test, and tune the signal generator to the center of the paired downlink band.
  - m) Measure the maximum transmitter noise power level while varying the downlink signal generator output level from  $-90 \text{ dBm}$  to  $-20 \text{ dBm}$ , as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 3), in 1 dB steps inside the



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





RSSI-dependent region, and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, with at least two points within the RSSI-dependent region of the limit. See Appendix D for noise limits graphs.

n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink bands.

*NOTE—Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, for the setups shown in Figure 2 and Figure 3 connect a second signal generator at the server port, then cycle the RF output of the second signal generator to simulate this function.*


*NOTE—Some signal boosters have a maximum transmitter noise power level that is less than the Transmit Power Off Mode of -70 dBm. For these boosters it is still necessary to confirm that the uplink noise power limits are met in the presence of a downlink signal. Test reports should show measurement data demonstrating compliance. Alternatively the applicant may provide attestation with detailed design information and explanation justifying the omission of the variable uplink testing.*

#### Variable uplink noise timing

According to section 7.7.2 of KDB 935210 D03 Signal Booster Measurement v04r04:

Variable uplink noise timing is to be measured as follows, using the test setup shown in Figure 3.

- Set the spectrum analyzer to the uplink frequency to be measured.
- Set the span to 0 Hz, with a sweep time of 10 seconds.
- Set the power level of signal generator to the lowest level of the RSSI-dependent noise [see 7.7.1m)].
- Select MAX HOLD and increase the power level of signal generator by 10 dB for mobile boosters, and 20 dB for fixed boosters.
- Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices, and within 3 seconds for fixed devices.<sup>18</sup>
- Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.
- Include plots and summary table in test report.

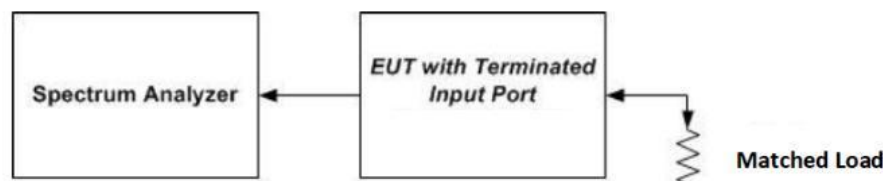

**Figure 2 – Noise limit test setup**



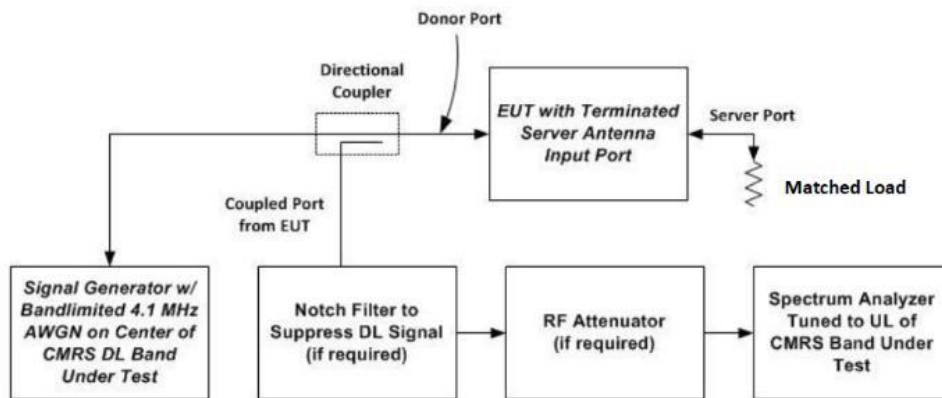


Figure 3 – Test setup for uplink noise power measurement in the presence of a downlink signal

### 6.1.3 Test Data

|               |            |           |              |
|---------------|------------|-----------|--------------|
| Temperature   | 23.6℃      | Humidity  | 52.3%        |
| Test Engineer | Paddi Chen | Test Mode | Transmitting |

| Max Noise Power |                |                    |                 |             |
|-----------------|----------------|--------------------|-----------------|-------------|
| Operation Band  |                | Measured (dBm/MHz) | Limit (dBm/MHz) | Result (dB) |
| Uplink          | Lower 700 Band | -46.37             | -45.51          | PASS        |
|                 | Upper 700 Band | -45.74             | -44.64          | PASS        |
|                 | Cellular Band  | -44.16             | -44.05          | PASS        |
|                 | PCS Band       | -39.99             | -37.01          | PASS        |
|                 | AWS Band       | -39.70             | -37.73          | PASS        |
| Downlink        | Lower 700 Band | -45.82             | -45.15          | PASS        |
|                 | Upper 700 Band | -46.37             | -44.99          | PASS        |
|                 | Cellular Band  | -45.72             | -43.60          | PASS        |
|                 | PCS Band       | -39.75             | -36.64          | PASS        |
|                 | AWS Band       | -39.96             | -35.92          | PASS        |





| Variable Uplink Noise |          |                  |               |         |
|-----------------------|----------|------------------|---------------|---------|
| Operation Band        | RSSI dBm | Measured dBm/MHz | Limit dBm/MHz | Results |
| Lower 700 Band        | -86      | -46.32           | -45.51        | PASS    |
|                       | -87      | -46.99           | -45.51        | PASS    |
|                       | -83      | -47.60           | -45.51        | PASS    |
|                       | -84      | -49.72           | -46.00        | PASS    |
|                       | -85      | -50.39           | -47.00        | PASS    |
|                       | -86      | -50.83           | -48.00        | PASS    |
| Upper 700 Band        | -81      | -46.05           | -44.64        | PASS    |
|                       | -82      | -47.56           | -44.64        | PASS    |
|                       | -83      | -48.95           | -44.64        | PASS    |
|                       | -84      | -50.13           | -48.00        | PASS    |
|                       | -85      | -52.21           | -49.00        | PASS    |
|                       | -86      | -53.32           | -50.00        | PASS    |
| Cellular Band         | -86      | -50.11           | -44.05        | PASS    |
|                       | -87      | -53.46           | -44.05        | PASS    |
|                       | -88      | -56.74           | -44.05        | PASS    |
|                       | -81      | -58.44           | -45.00        | PASS    |
|                       | -85      | -59.45           | -46.00        | PASS    |
|                       | -83      | -61.65           | -47.00        | PASS    |
| PCS Band              | -84      | -51.16           | -37.01        | PASS    |
|                       | -85      | -54.74           | -37.01        | PASS    |
|                       | -82      | -57.57           | -37.01        | PASS    |
|                       | -81      | -58.43           | -40.00        | PASS    |
|                       | -82      | -61.58           | -41.00        | PASS    |
|                       | -86      | -63.70           | -42.00        | PASS    |
| AWS Band              | -81      | -52.67           | -37.73        | PASS    |
|                       | -82      | -54.80           | -37.73        | PASS    |
|                       | -83      | -57.05           | -37.73        | PASS    |
|                       | -84      | -60.54           | -41.00        | PASS    |
|                       | -82      | -62.76           | -42.00        | PASS    |
|                       | -83      | -65.94           | -43.00        | PASS    |






| Variable Uplink Noise Timing |              |           |         |
|------------------------------|--------------|-----------|---------|
| Operation Band               | Measured (s) | Limit (s) | Results |
| Lower 700 Band               | 0.090        | 3         | PASS    |
| Upper 700 Band               | 0.090        | 3         | PASS    |
| Cellular Band                | 0.080        | 3         | PASS    |
| PCS Band                     | 0.080        | 3         | PASS    |
| AWS Band                     | 0.080        | 3         | PASS    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

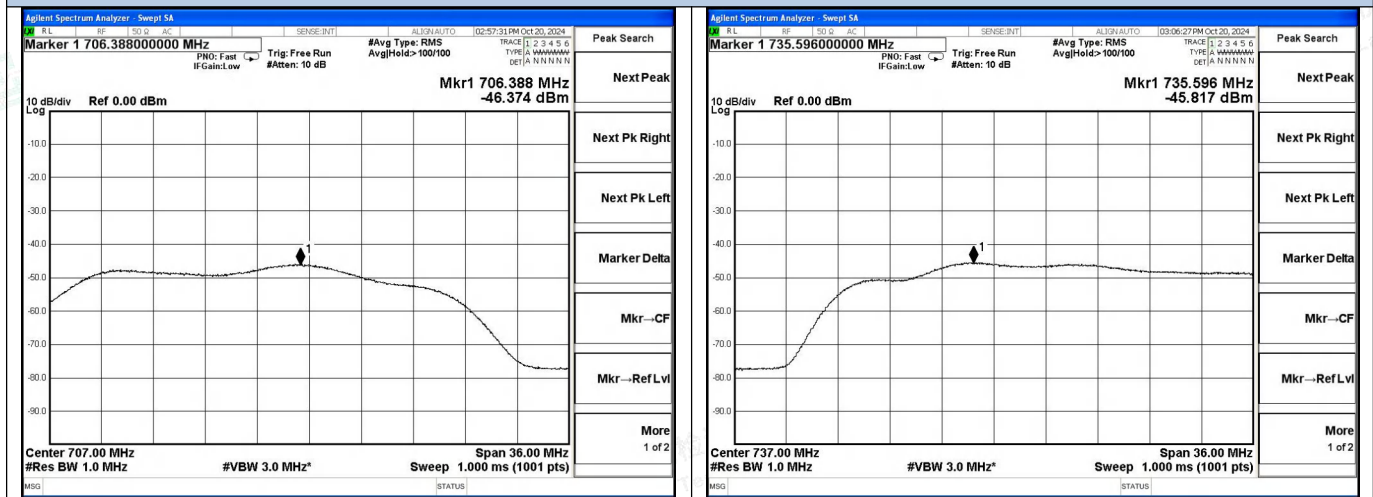

Lower 700 Band UL

Lower 700 Band DL

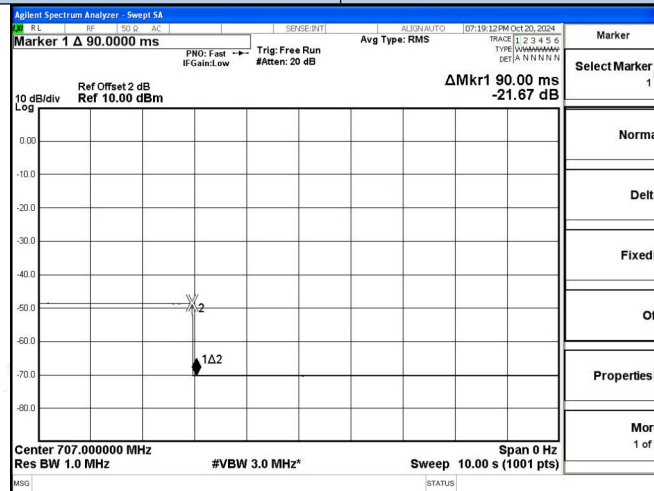

Lower 700 Band Variable Uplink Noise Timing




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

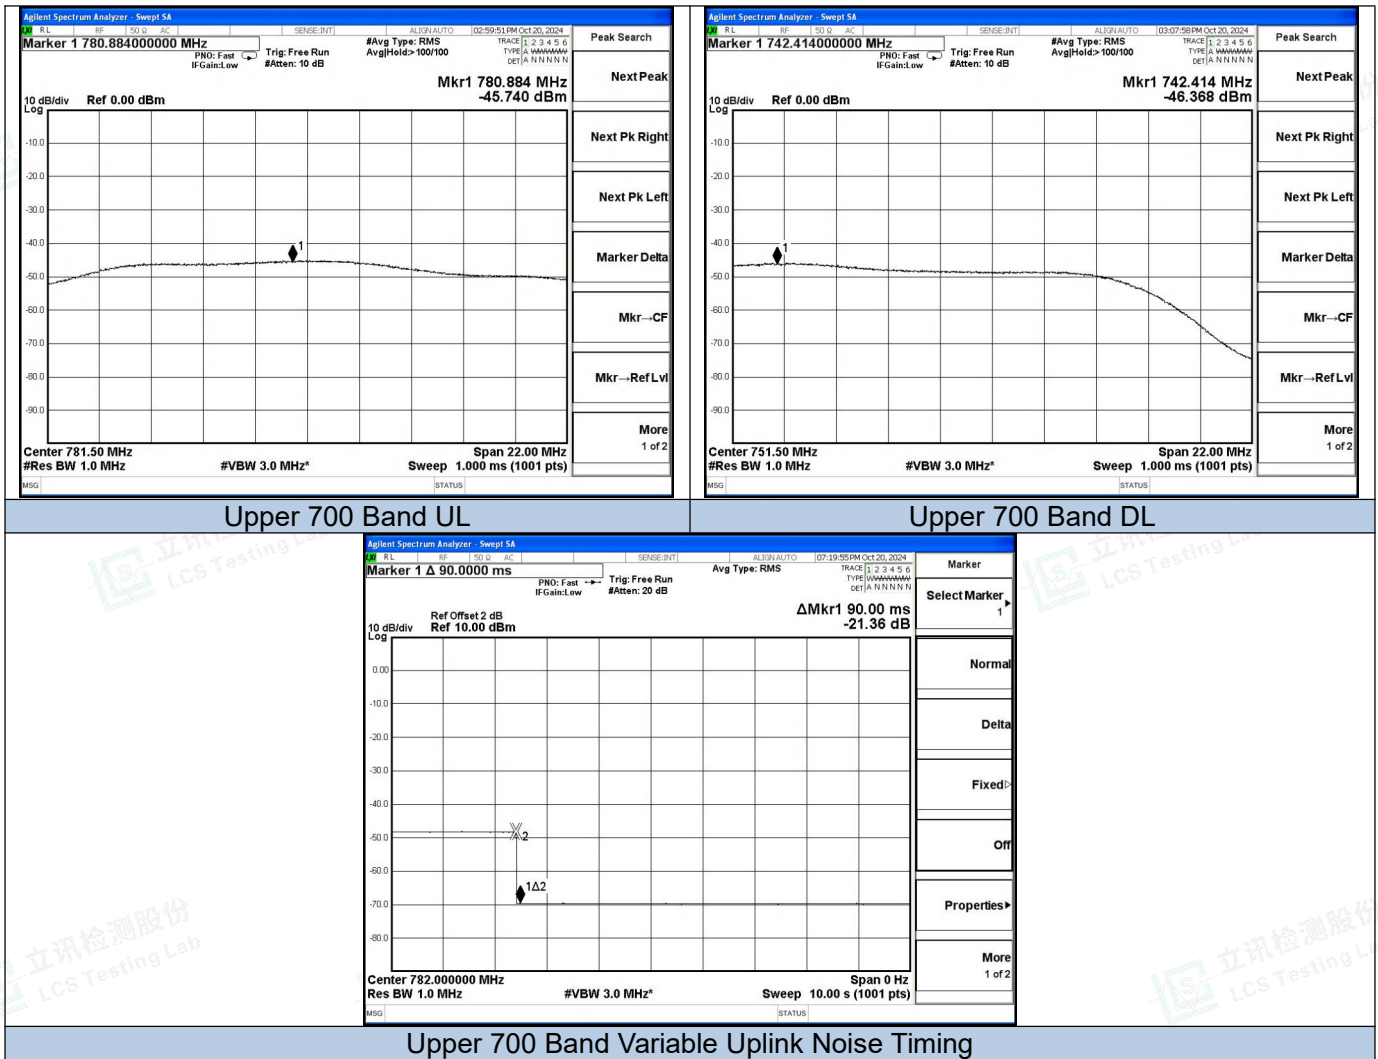



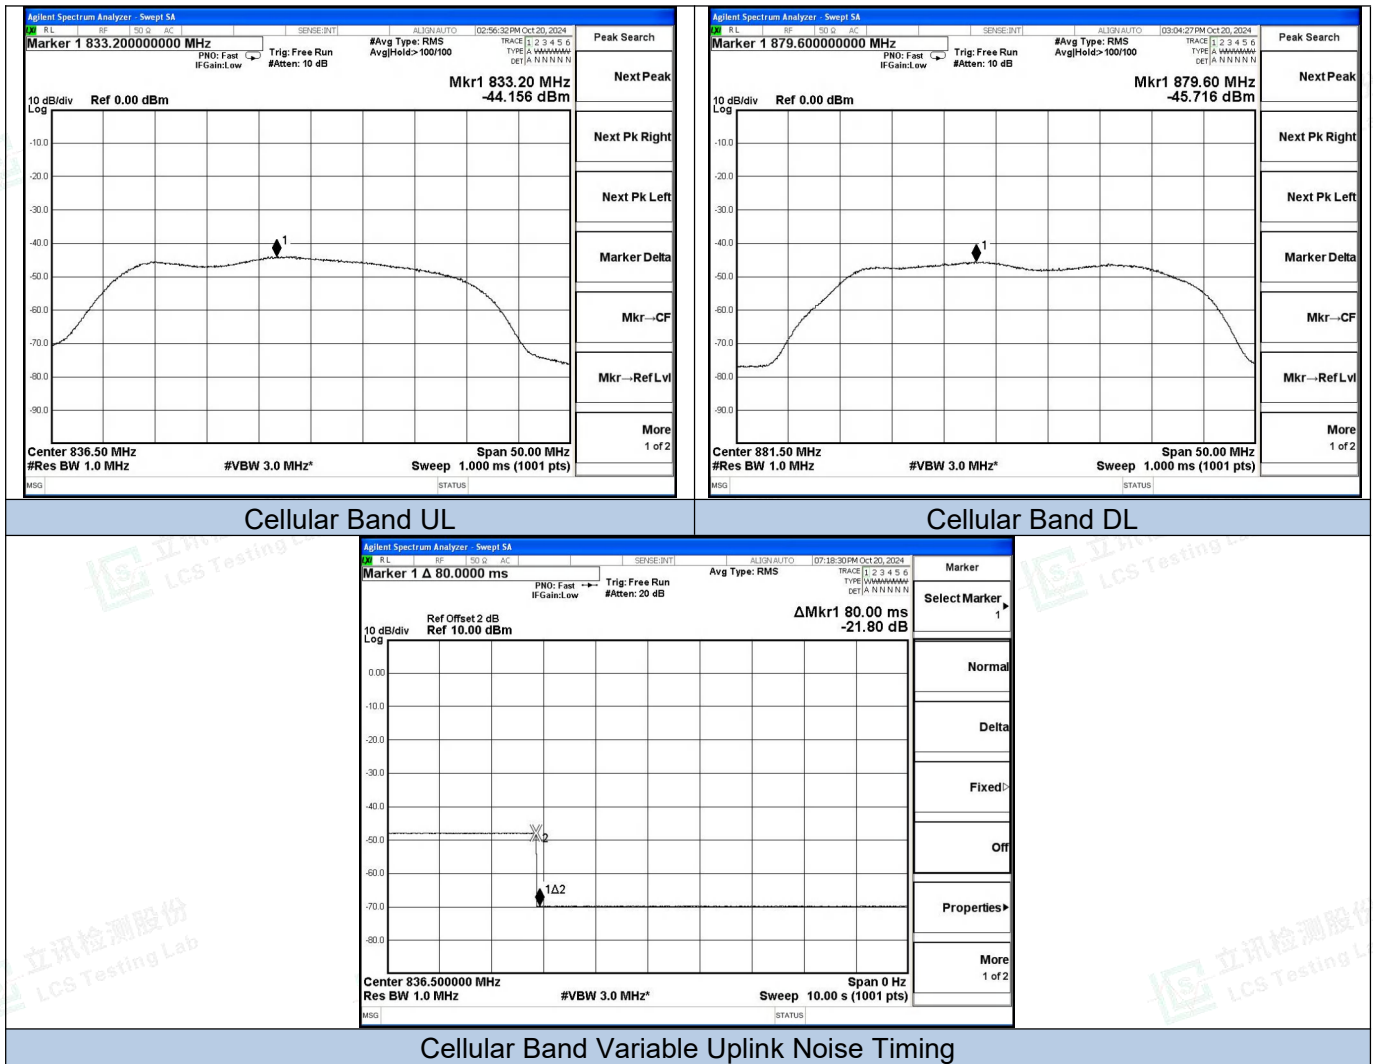


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



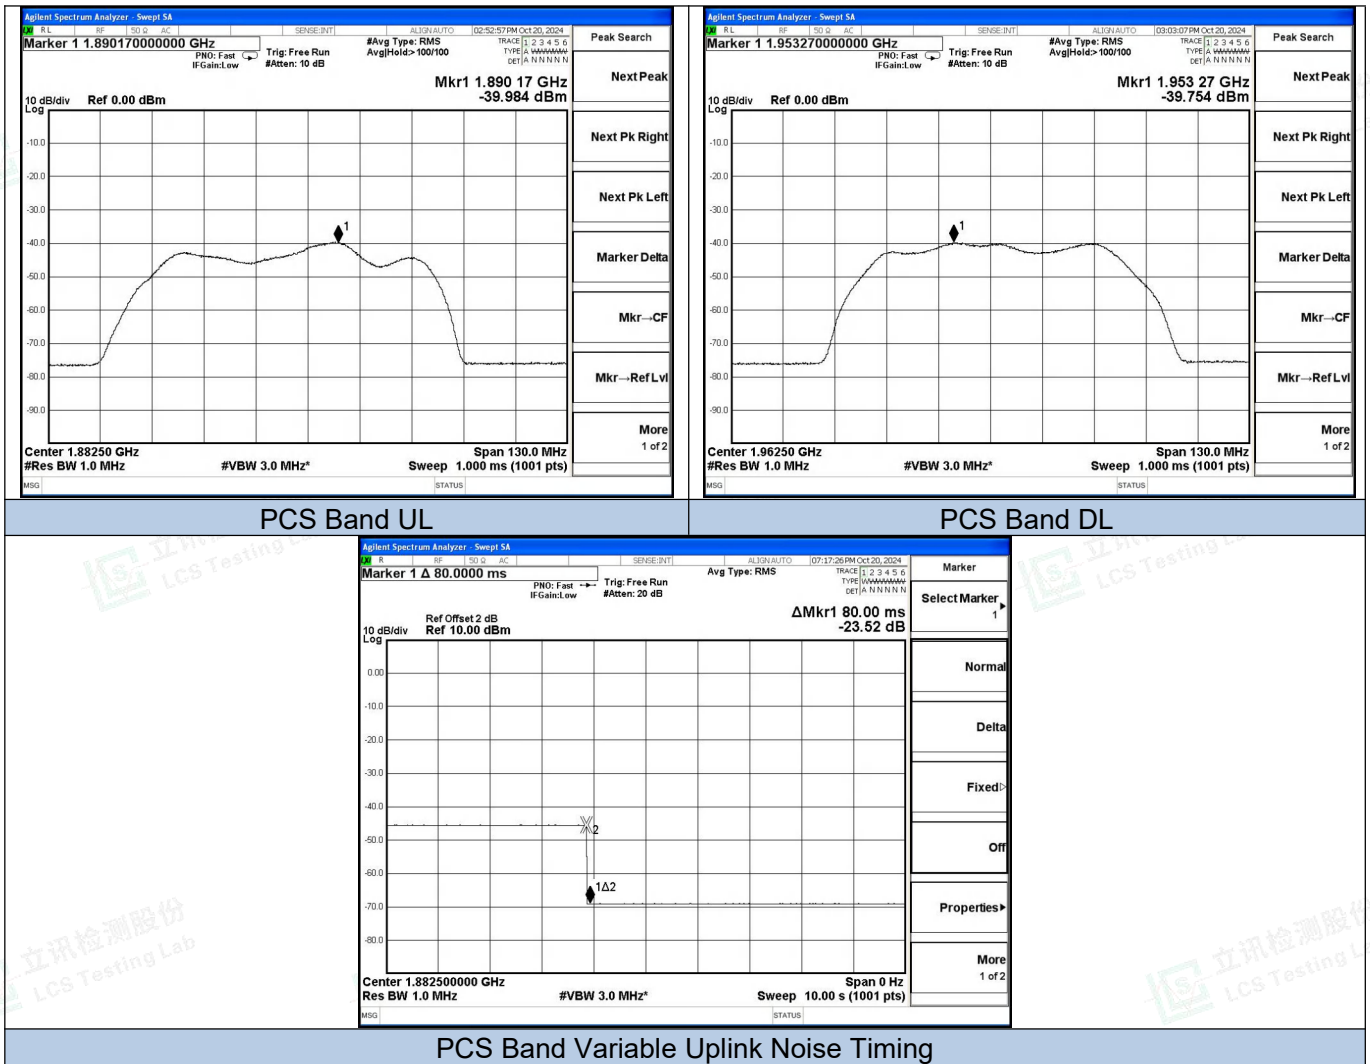


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

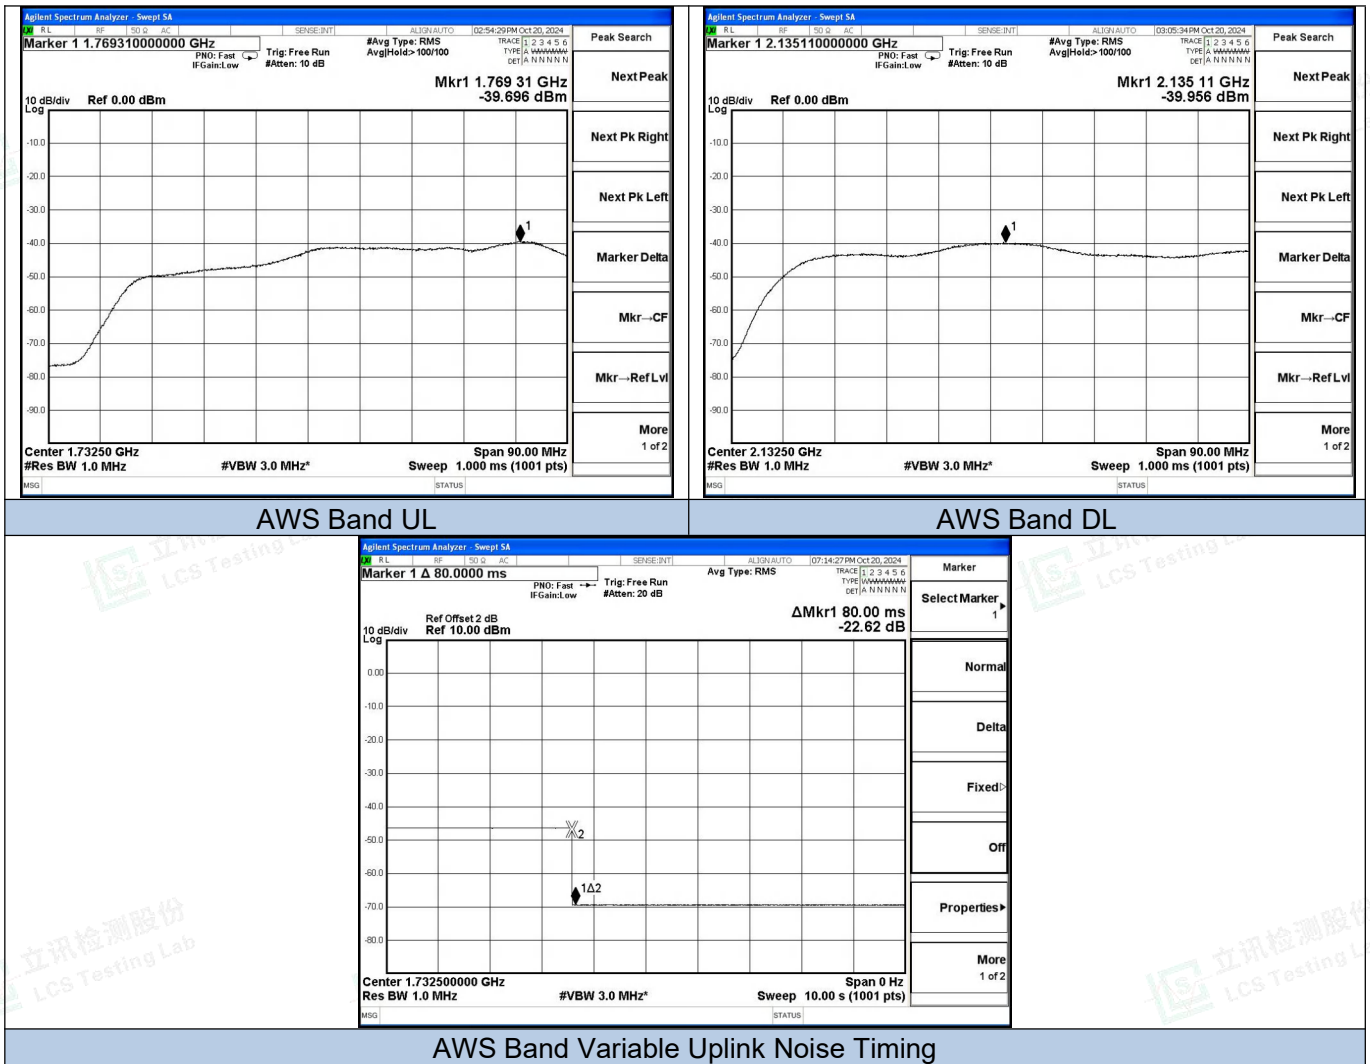

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6.2 Authorized Frequency Band Verification

### 6.2.1 Applicable Standard

According to § 20.21(e)(3) Frequency Bands.

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In other words, the signal booster shall reject amplification of other signals outside of its passband. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

### 6.2.2 Test Procedure

According to section 7.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

- Connect the EUT to the test equipment as shown in Figure 4. Begin with the uplink output (donor) port connected to the spectrum analyzer.
- Set the spectrum analyzer resolution bandwidth (RBW) for 100 kHz with the video bandwidth (VBW)  $\geq 3$  the RBW, using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above, then manually reset the EUT (e.g., cycle ac/dc power).
- Reset the spectrum analyzer span to 2 the width of the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep 2 the width of the CMRS band using the sweep function. The AGC must be deactivated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

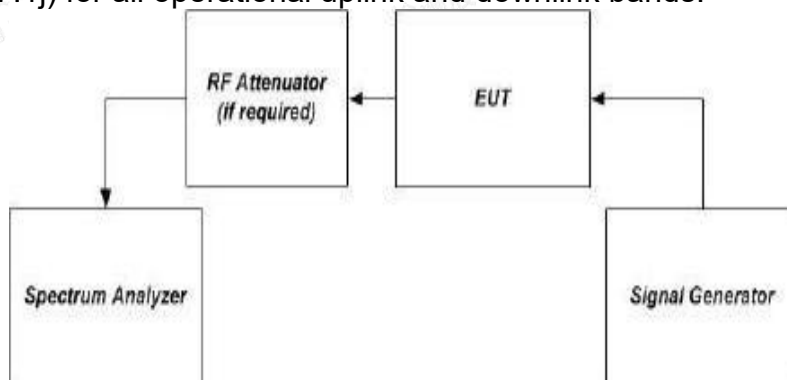


Figure 4 – Band verification test instrumentation setup






## 6.2.3 Test Data


|               |            |           |              |
|---------------|------------|-----------|--------------|
| Temperature   | 23.6°C     | Humidity  | 52.3%        |
| Test Engineer | Paddi Chen | Test Mode | Transmitting |

## Test Graphs-Uplink

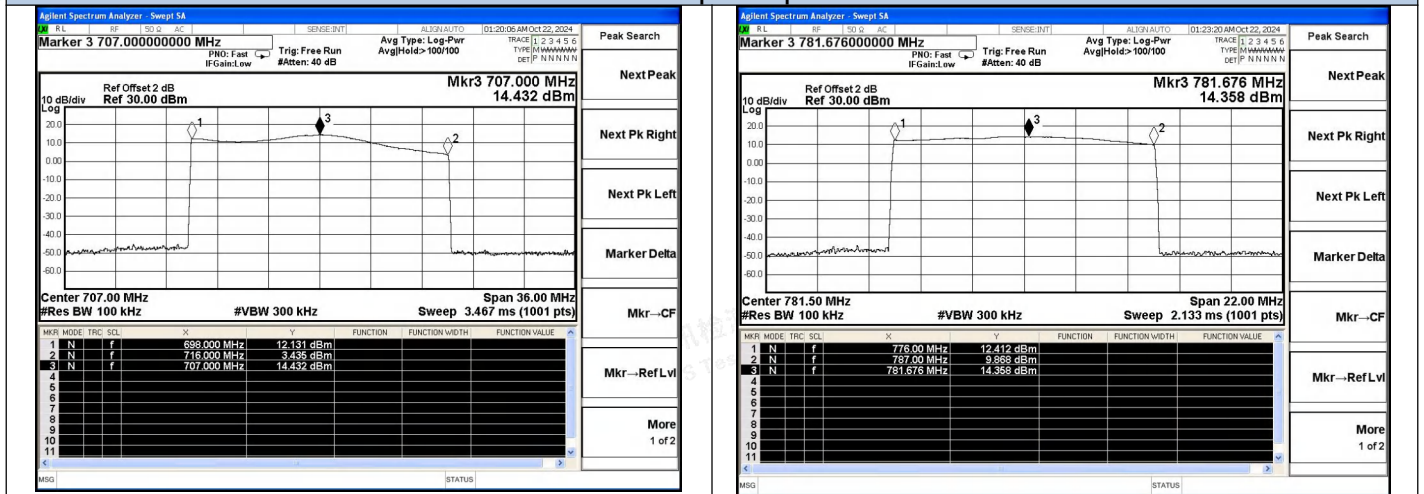


Lower 700 Band

Upper 700 Band

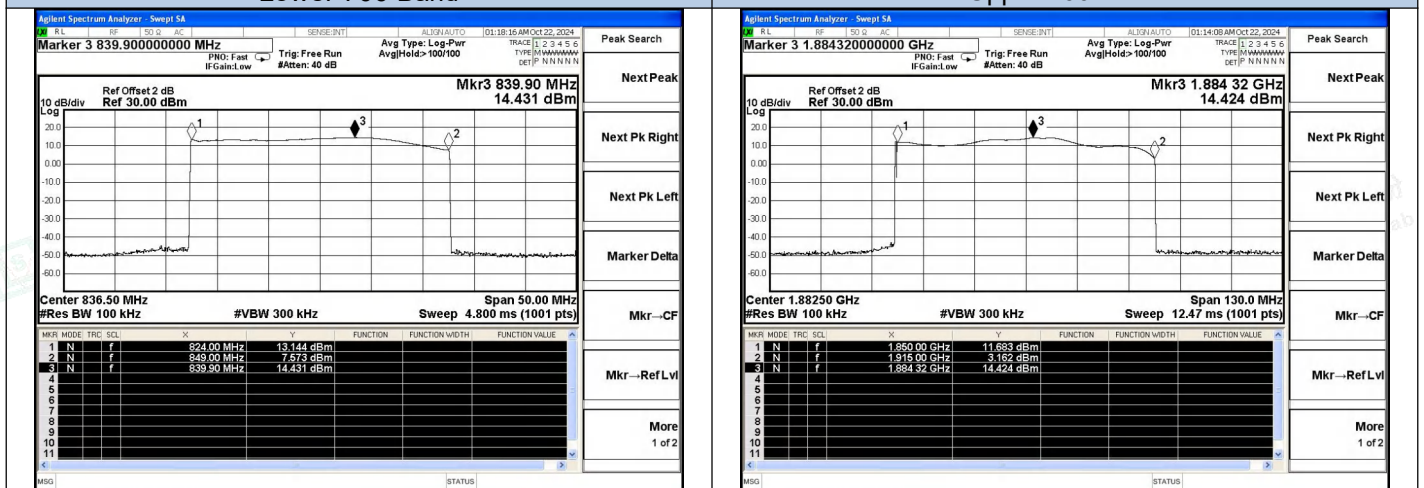

Cellular Band

PCS Band

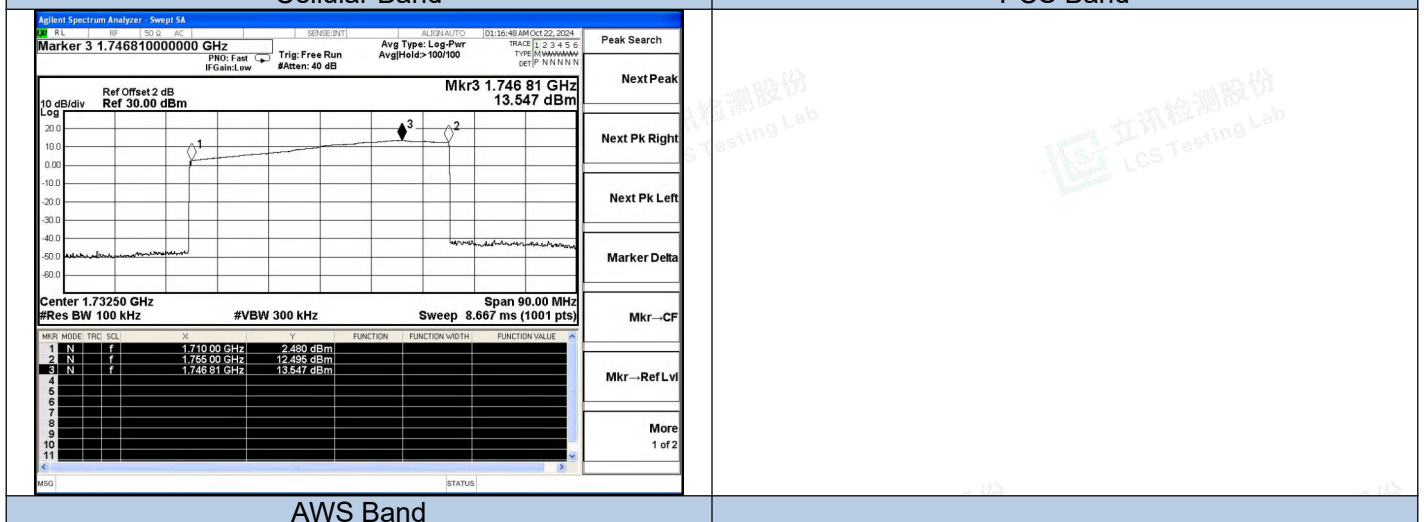

AWS Band



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## Test Graphs-Downlink

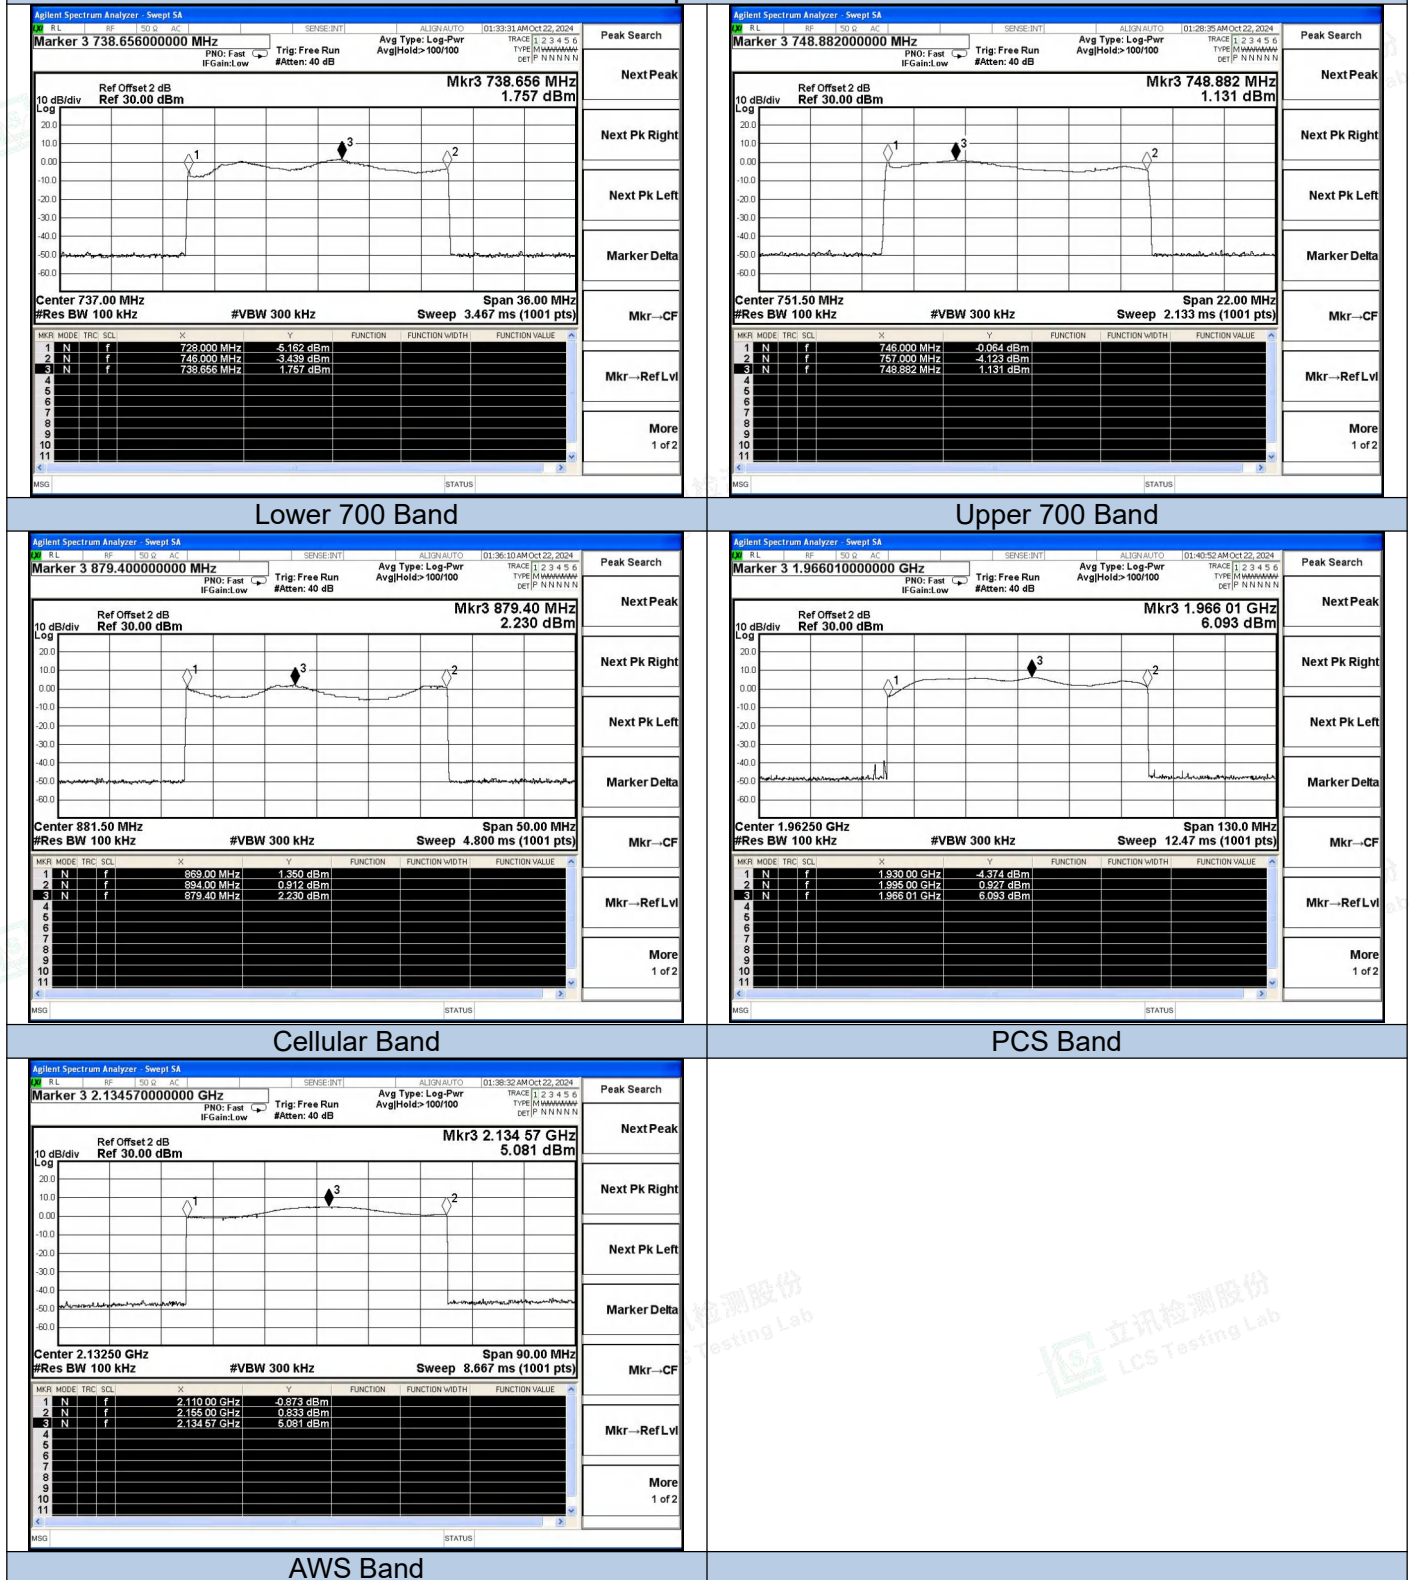

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6.3 Maximum power measurement

### 6.3.1 Applicable Standard

According to §20.21(e)(8)(i)(D) Power Limits; §20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); §20.21(e)(4) Self-monitoring:

1. A booster's uplink power must not exceed 1 watt composite conducted power and equivalent isotropic radiated power (EIRP) for each band of operation. Composite downlink power shall not exceed 0.05 watt (17 dBm) conducted and EIRP for each band of operation.
2. Consumer Boosters must be able to provide equivalent uplink and downlink gain and conducted uplink power output that is at least 0.05 watts

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in Sections 20.21(e)(8)(i)(D) and 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

### 6.3.2 Test Procedure

According to section 7.2.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

Compliance to applicable EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.

- a) In addition, the maximum power levels measured in this procedure will be used in calculating the maximum gain as described in the next subclause.
- b) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure using the stated emission and power detector types independently.
- c) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570  $\mu$ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure using the burst power function of the measuring instrument.
- d) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth (OBW) of 4.1 MHz, then measure using the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within applicable limits at the maximum uplink and downlink test levels per device type as defined in 5.5, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

According to section 7.2.2 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Connect the EUT to the test equipment as shown in Figure 5. Begin with the uplink output (donor) port connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC activation.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



- f) Slowly increase the signal generator power to a level just below (and within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as  $P_{in}$ .
- g) Measure the output power,  $P_{out}$ , with the spectrum analyzer as follows.
- 1) Set RBW = 100 kHz for AWGN signal type, or 300 kHz for CW or GSM signal type.
  - 2) Set VBW  $\geq 3$  RBW.
  - 3) Select either the BURST POWER or CHANNEL POWER measurement mode, as required for each signal type. For AWGN, the channel power integration bandwidth shall be the 99% OBW of the 4.1 MHz signal.
  - 4) Select the power averaging (rms) detector.
  - 5) Affirm that the number of measurement points per sweep  $\geq (2 \text{ span})/\text{RBW}$ .  
NOTE—This requirement does not apply for BURST power measurement mode.
  - 6) Set sweep time = auto couple, or as necessary (but no less than auto couple value).
  - 7) Trace average at least 100 traces in power averaging (i.e., rms) mode.
  - 8) Record the measured power level  $P_{out}$ , with one set of results for the GSM or CW input stimulus, and another set of results for the AWGN input stimulus.

### 6.3.3 Test Data

|               |            |           |              |
|---------------|------------|-----------|--------------|
| Temperature   | 23.6°C     | Humidity  | 52.3%        |
| Test Engineer | Paddi Chen | Test Mode | Transmitting |

| Max Output Power |                |             |                              |                                   |                    |                 |            |                  |         |
|------------------|----------------|-------------|------------------------------|-----------------------------------|--------------------|-----------------|------------|------------------|---------|
| Mode             | Operation Band | Signal Type | Conducted Output Power (dBm) | Conducted Output Power limit(dBm) | Antenna Gain (dBi) | Cable Loss (dB) | EIRP (dBm) | EIRP Limit (dBm) | Verdict |
| Uplink           | Lower 700      | CW          | 18.187                       | 17-30                             | 7.47               | 1.90            | 23.76      | $\leq 30$        | PASS    |
|                  |                | AWGN        | 18.91                        |                                   | 7.47               | 1.90            | 24.48      |                  | PASS    |
|                  | Upper 700      | CW          | 18.393                       |                                   | 7.47               | 1.90            | 23.60      |                  | PASS    |
|                  |                | AWGN        | 18.49                        |                                   | 7.47               | 1.90            | 23.93      |                  | PASS    |
|                  | Cellular       | CW          | 17.540                       |                                   | 7.47               | 1.90            | 23.11      |                  | PASS    |
|                  |                | AWGN        | 17.60                        |                                   | 7.47               | 1.90            | 23.17      |                  | PASS    |
|                  | PCS            | CW          | 18.524                       |                                   | 7.96               | 3.00            | 23.48      |                  | PASS    |
|                  |                | AWGN        | 18.26                        |                                   | 7.96               | 3.00            | 23.22      |                  | PASS    |
|                  | AWS            | CW          | 18.762                       |                                   | 7.96               | 3.00            | 23.72      |                  | PASS    |
|                  |                | AWGN        | 18.55                        |                                   | 7.96               | 3.00            | 23.51      |                  | PASS    |
| Downlink         | Lower 700      | CW          | 7.406                        | /                                 | 6.44               | 1.90            | 11.95      | $\leq 17$        | PASS    |
|                  |                | AWGN        | 7.41                         |                                   | 6.44               | 1.90            | 11.95      |                  | PASS    |
|                  | Upper 700      | CW          | 8.444                        |                                   | 6.44               | 1.90            | 12.84      |                  | PASS    |
|                  |                | AWGN        | 8.91                         |                                   | 6.44               | 1.90            | 13.02      |                  | PASS    |
|                  | Cellular       | CW          | 6.136                        |                                   | 6.44               | 1.90            | 10.68      |                  | PASS    |
|                  |                | AWGN        | 6.25                         |                                   | 6.44               | 1.90            | 10.79      |                  | PASS    |
|                  | PCS            | CW          | 10.571                       |                                   | 8.84               | 3.00            | 16.41      |                  | PASS    |
|                  |                | AWGN        | 10.54                        |                                   | 8.84               | 3.00            | 16.38      |                  | PASS    |
|                  | AWS            | CW          | 9.811                        |                                   | 8.84               | 3.00            | 15.65      |                  | PASS    |
|                  |                | AWGN        | 9.87                         |                                   | 8.84               | 3.00            | 15.71      |                  | PASS    |

Note: EIRP = Conducted Output Power + Antenna Gain - Cable Loss



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity






| Max Input test level |                |             |                 |                       |                             |         |
|----------------------|----------------|-------------|-----------------|-----------------------|-----------------------------|---------|
| Mode                 | Operation Band | Signal Type | AGC Level (dBm) | Max Input Level (dBm) | Max Input Level limit (dBm) | Verdict |
| Uplink               | Lower 700 Band | CW          | -42.00          | -17                   | ≤27                         | PASS    |
|                      |                | AWGN        | -43.00          | -18                   |                             | PASS    |
|                      | Upper 700 Band | CW          | -43.00          | -21                   |                             | PASS    |
|                      |                | AWGN        | -42.00          | -17                   |                             | PASS    |
|                      | Cellular Band  | CW          | -43.00          | -18                   |                             | PASS    |
|                      |                | AWGN        | -44.00          | -24                   |                             | PASS    |
|                      | PCS Band       | CW          | -45.00          | -26                   |                             | PASS    |
|                      |                | AWGN        | -45.00          | -38                   |                             | PASS    |
|                      | AWS Band       | CW          | -44.00          | -39                   |                             | PASS    |
|                      |                | AWGN        | -45.00          | -41                   |                             | PASS    |
| Downlink             | Lower 700 Band | CW          | -54.00          | -37                   | ≤-20                        | PASS    |
|                      |                | AWGN        | -54.00          | -24                   |                             | PASS    |
|                      | Upper 700 Band | CW          | -52.00          | -30                   |                             | PASS    |
|                      |                | AWGN        | -52.00          | -33                   |                             | PASS    |
|                      | Cellular Band  | CW          | -56.00          | -37                   |                             | PASS    |
|                      |                | AWGN        | -56.00          | -50                   |                             | PASS    |
|                      | PCS Band       | CW          | -59.00          | -52                   |                             | PASS    |
|                      |                | AWGN        | -58.00          | -39                   |                             | PASS    |
|                      | AWS Band       | CW          | -59.00          | -48                   |                             | PASS    |
|                      |                | AWGN        | -59.00          | -50                   |                             | PASS    |







## Test Graphs

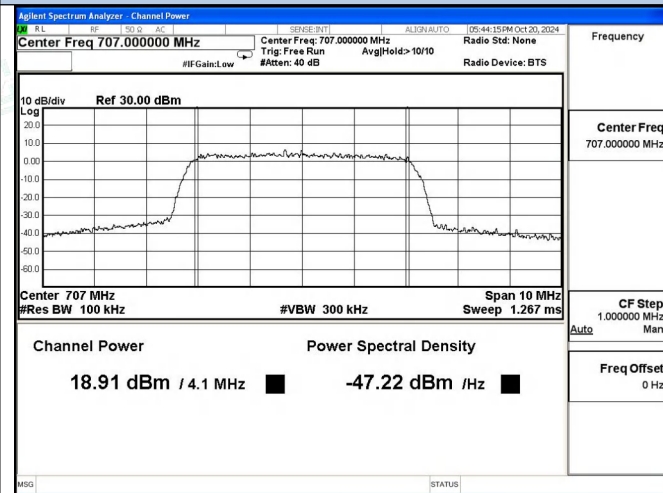


Lower 700 Band AWGN, UL

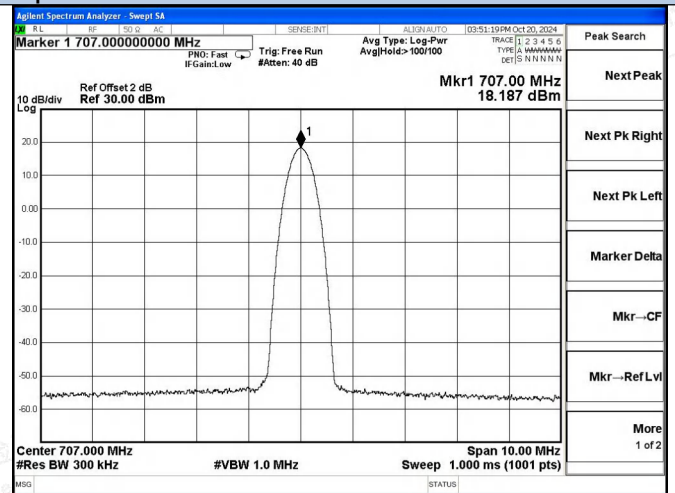


Lower 700 Band CW, UL

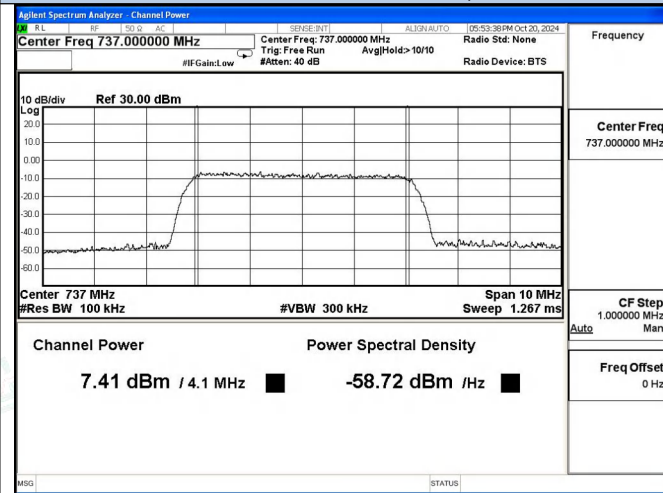


Lower 700 Band AWGN, DL

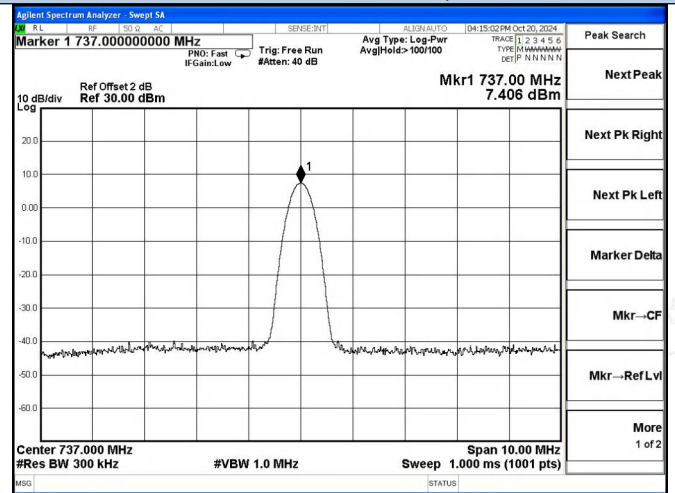

Lower 700 Band CW, DL

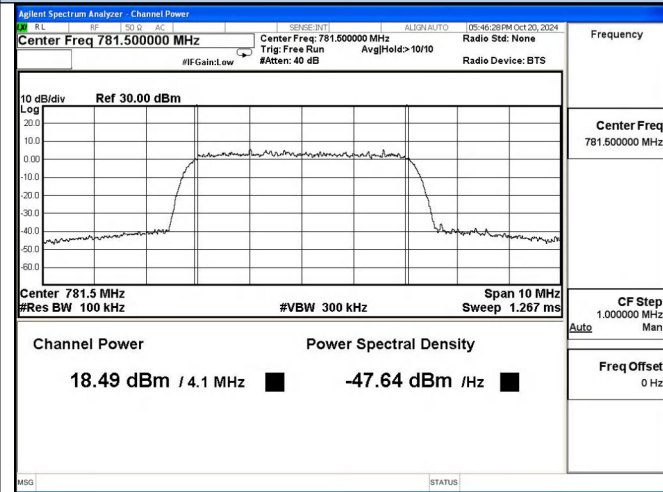

Upper 700 Band AWGN, UL

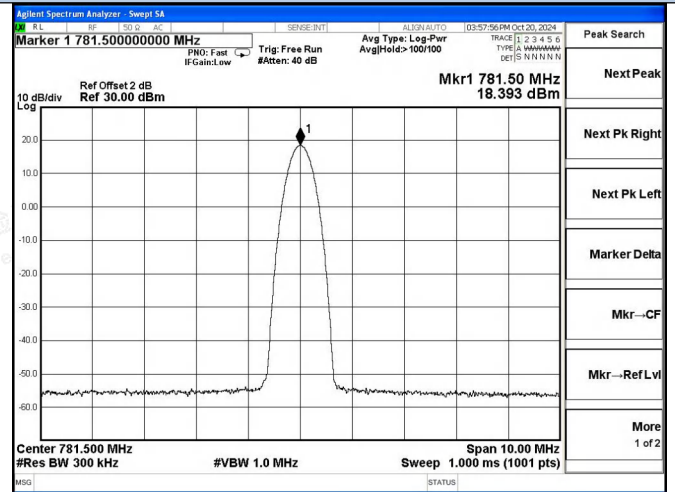

Upper 700 Band CW, UL




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

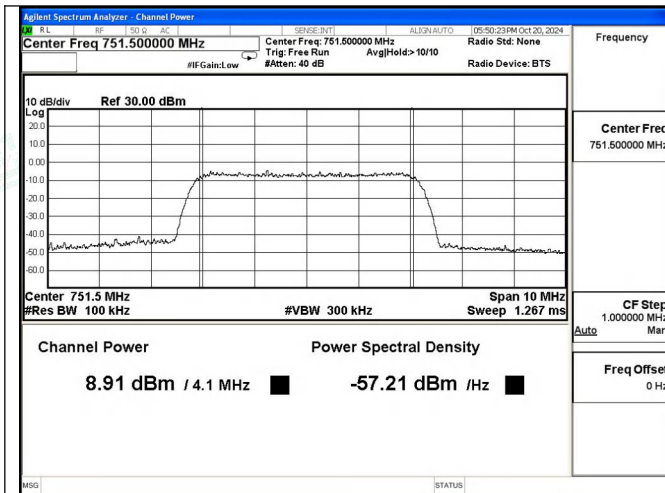


Upper 700 Band AWGN, DL

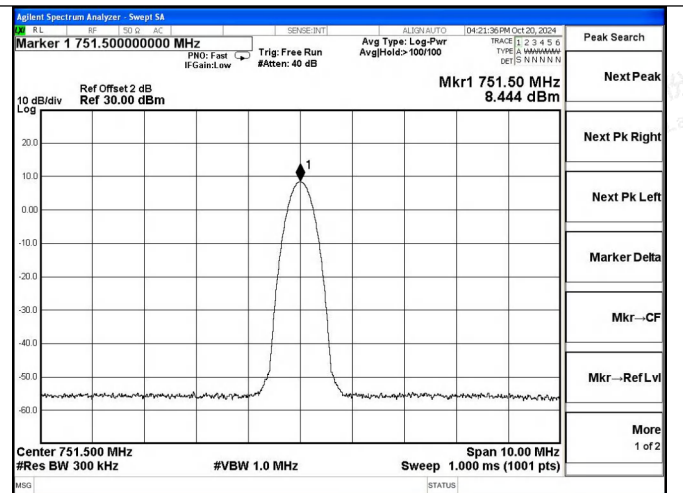


Upper 700 Band CW, DL

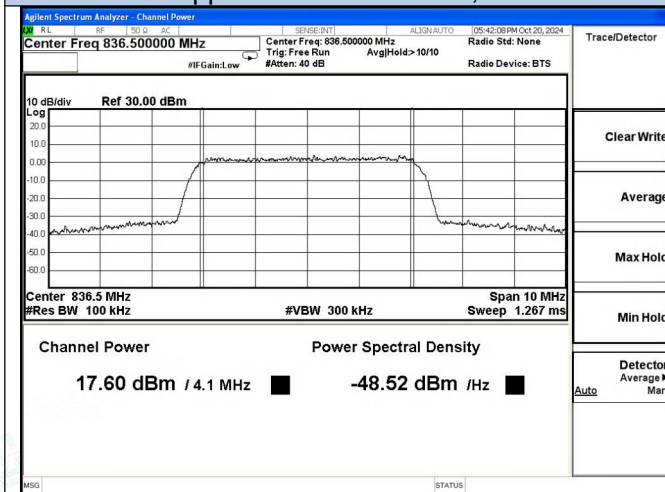


Cellular Band AWGN, UL

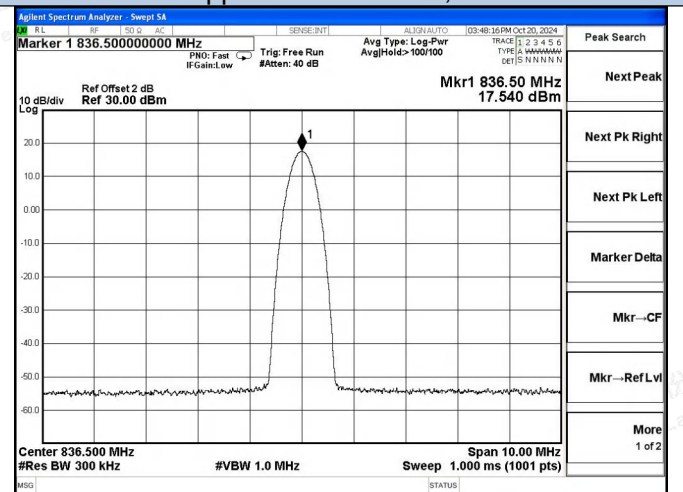

Cellular Band CW, UL

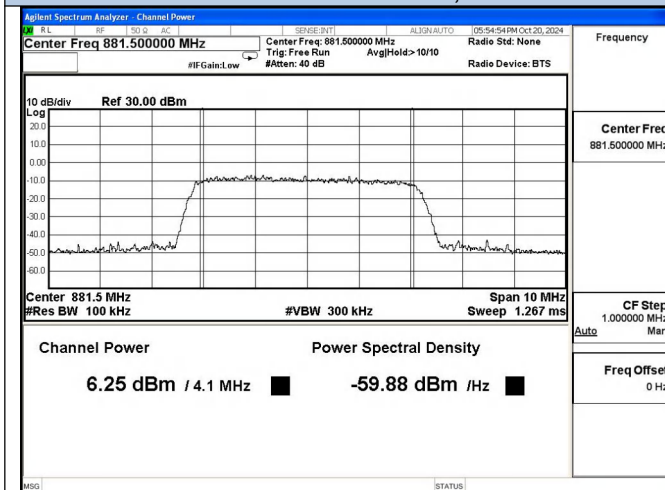

Cellular Band AWGN, DL

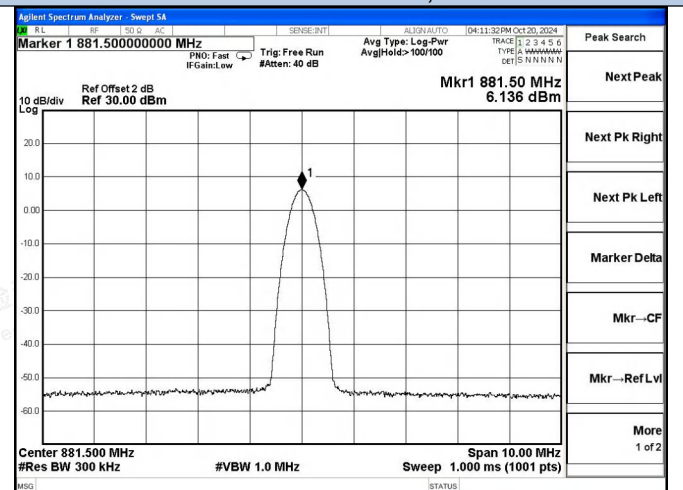

Cellular Band CW, DL




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

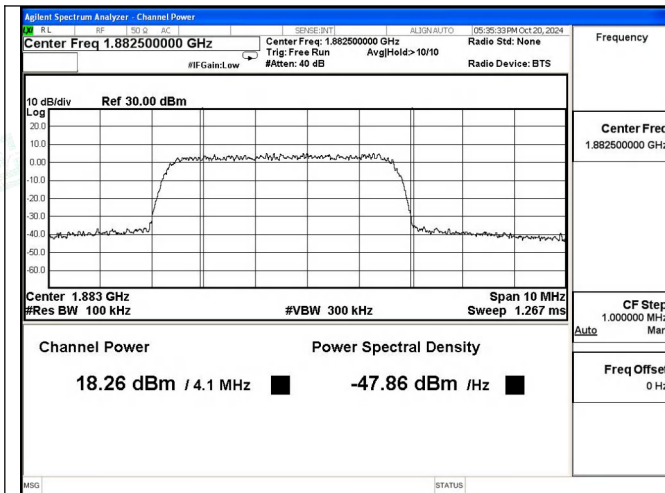


PCS Band AWGN, UL

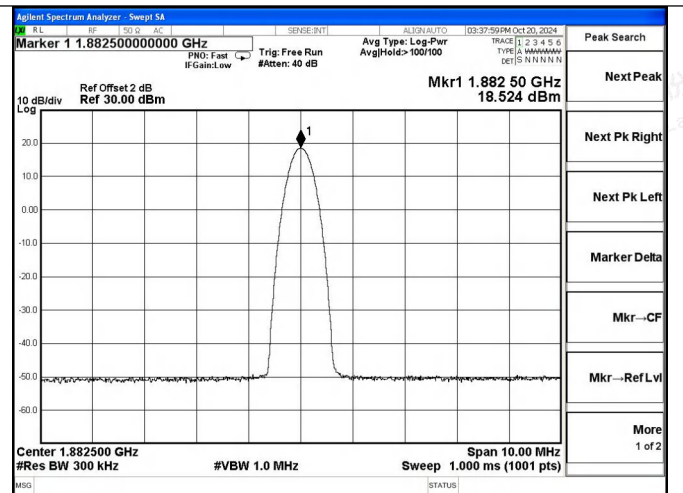


PCS Band CW, UL

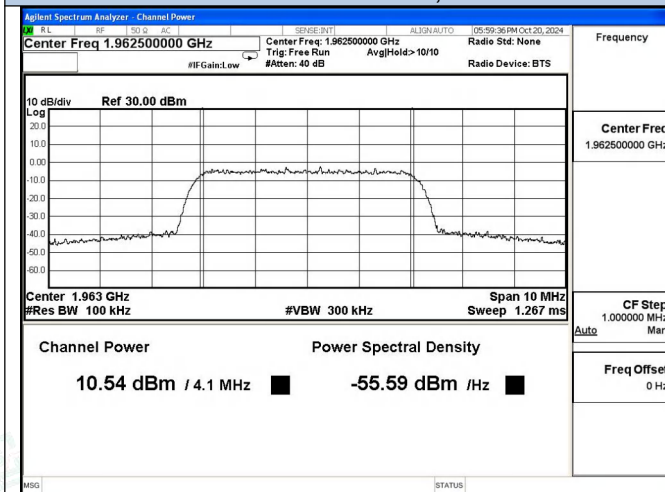


PCS Band AWGN, DL

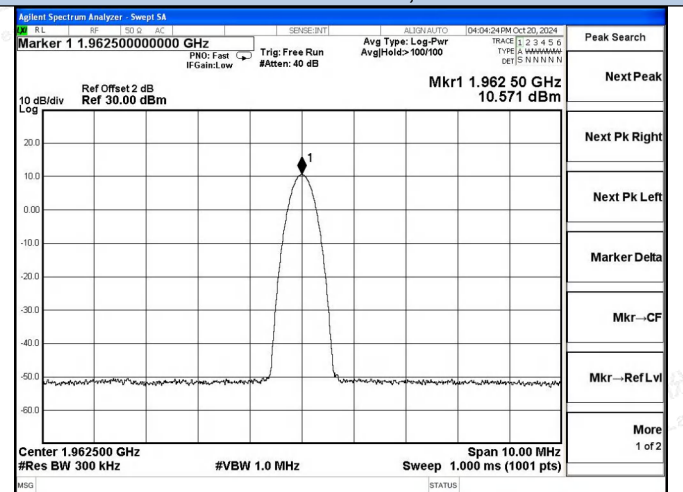

PCS Band CW, DL

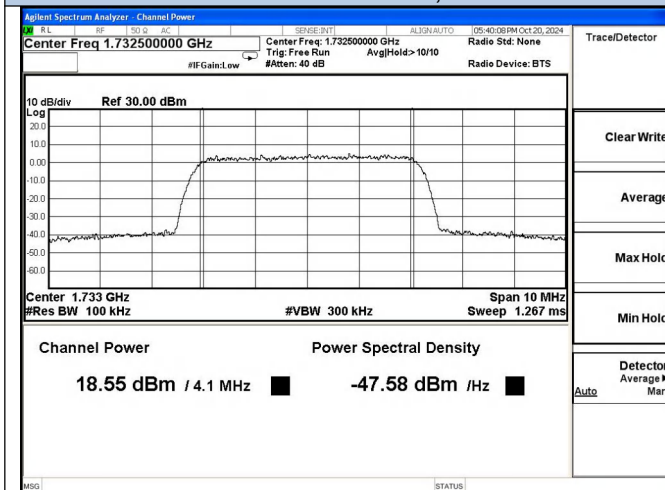

AWS Band AWGN, UL

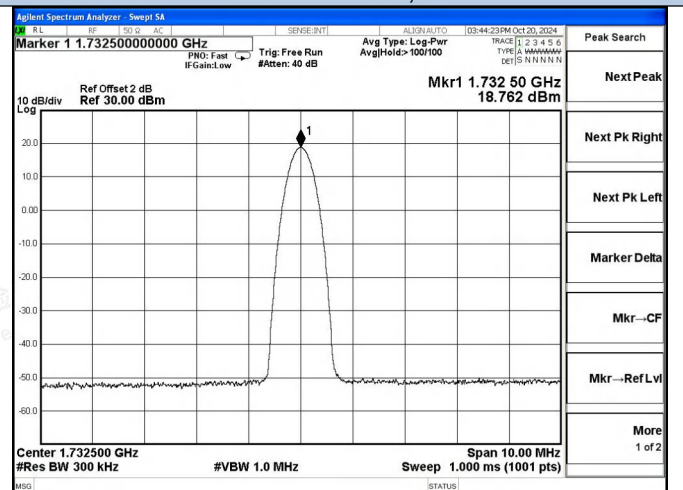

AWS Band CW, UL




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



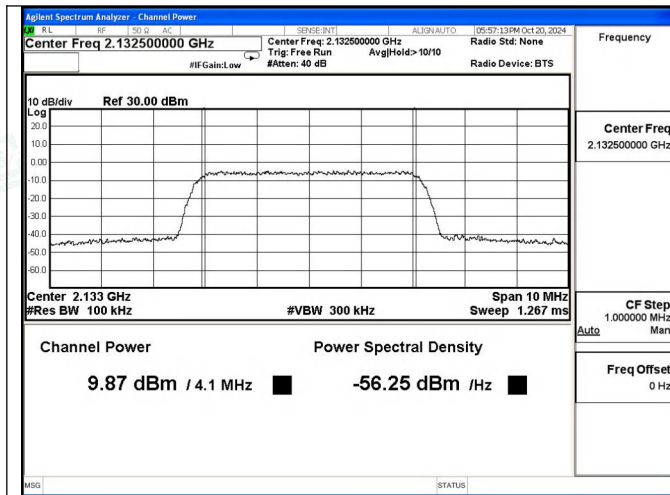

AWS Band AWGN, DL

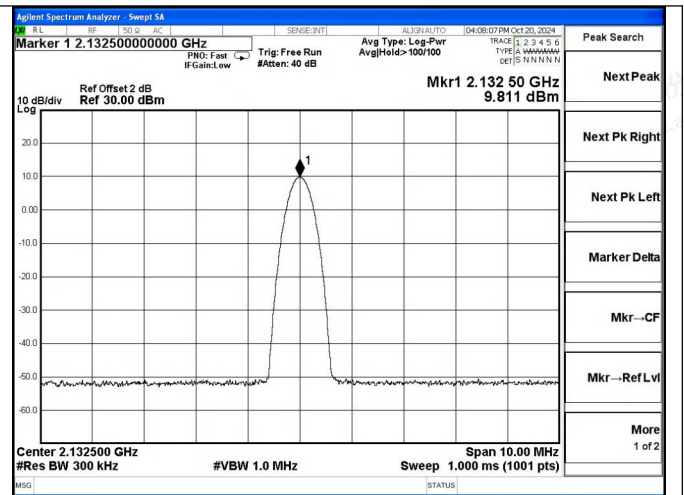

AWS Band CW, DL





## 6.4 Gain Limits and Bidirectional Capability&Variable Gain&Variable Uplink Gain Timing

### 6.4.1 Applicable Standard

According to §20.21(e)(8)(i)(C)(2) Booster Gain Limits (maximum gain); §20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain):

The uplink and downlink maximum gain of a Consumer Booster referenced to its input and output ports shall not exceed the following limits:

- (i) Fixed Booster maximum gain shall not exceed  $6.5 \text{ dB} + 20 \log_{10}(\text{Frequency})$ ;
- (ii) Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

### 6.4.2 Test Procedure

According to section 7.3 of KDB 935210 D03 Signal Booster Measurement v04r04:

This subclause provides guidance for the calculation of the maximum gain, based on the results obtained from the 7.1 and 7.2 measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in §20.21(e)(8)(i)(C)(2). Additionally, §20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain, i.e., within 9 dB.

- a) Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- b) For both the uplink and downlink in each supported frequency band, use each of the POUT and PIN result pairs for all signal types used in 7.2 in the following equation to obtain the maximum gain, G:

$$G \text{ (dB)} = \text{POUT(dBm)} - \text{PIN(dBm)}.$$

- c) Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- d) Provide tabulated results in the test report

### 6.4.3 Test Data

|               |            |           |              |
|---------------|------------|-----------|--------------|
| Temperature   | 23.6°C     | Humidity  | 52.3%        |
| Test Engineer | Paddi Chen | Test Mode | Transmitting |





| Max Gain |                |             |                           |                              |               |                 |         |
|----------|----------------|-------------|---------------------------|------------------------------|---------------|-----------------|---------|
| Mode     | Operation Band | Signal Type | Pre AGC Input Level (dBm) | Conducted Output Level (dBm) | Max Gain (dB) | Gain Limit (dB) | Verdict |
| Uplink   | Lower 700 Band | CW          | -42.00                    | 18.187                       | 60.19         | ≤63.49          | PASS    |
|          |                | AWGN        | -43.00                    | 18.91                        | 61.91         |                 | PASS    |
|          | Upper 700 Band | CW          | -43.00                    | 18.026                       | 61.03         | ≤64.35          | PASS    |
|          |                | AWGN        | -42.00                    | 18.36                        | 60.36         |                 | PASS    |
|          | Cellular Band  | CW          | -43.00                    | 17.540                       | 60.54         | ≤64.95          | PASS    |
|          |                | AWGN        | -44.00                    | 17.60                        | 61.60         |                 | PASS    |
|          | PCS Band       | CW          | -45.00                    | 18.524                       | 63.52         | ≤71.99          | PASS    |
|          |                | AWGN        | -45.00                    | 18.26                        | 63.26         |                 | PASS    |
| Downlink | Lower 700 Band | CW          | -54.00                    | 7.406                        | 61.41         | ≤63.85          | PASS    |
|          |                | AWGN        | -54.00                    | 7.41                         | 61.41         |                 | PASS    |
|          | Upper 700 Band | CW          | -52.00                    | 8.298                        | 60.30         | ≤64.01          | PASS    |
|          |                | AWGN        | -52.00                    | 8.48                         | 60.48         |                 | PASS    |
|          | Cellular Band  | CW          | -56.00                    | 6.136                        | 62.14         | ≤65.40          | PASS    |
|          |                | AWGN        | -56.00                    | 6.25                         | 62.25         |                 | PASS    |
|          | PCS Band       | CW          | -59.00                    | 10.571                       | 69.57         | ≤72.36          | PASS    |
|          |                | AWGN        | -58.00                    | 10.54                        | 68.54         |                 | PASS    |
|          | AWS Band       | CW          | -59.00                    | 9.811                        | 68.81         | ≤73.08          | PASS    |
|          |                | AWGN        | -59.00                    | 9.87                         | 68.87         |                 | PASS    |

**Note:** Fixed Booster maximum gain shall not exceed  $6.5 \text{ dB} + 20 \log_{10}(\text{Frequency})$ , where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

| Uplink Gain VS Downlink Gain |             |                  |                    |                 |            |         |
|------------------------------|-------------|------------------|--------------------|-----------------|------------|---------|
| Band                         | Signal Type | Uplink Gain (dB) | Downlink Gain (dB) | Calculated (dB) | Limit (dB) | Verdict |
| Lower 700 Band               | CW          | 60.19            | 61.41              | -1.22           | ≤9         | PASS    |
|                              | AWGN        | 61.91            | 61.41              | 0.50            |            | PASS    |
| Upper 700 Band               | CW          | 61.03            | 60.30              | 0.73            |            | PASS    |
|                              | AWGN        | 60.36            | 60.48              | -0.12           |            | PASS    |
| Cellular Band                | CW          | 60.54            | 62.14              | -1.60           |            | PASS    |
|                              | AWGN        | 61.60            | 62.25              | -0.65           |            | PASS    |
| PCS Band                     | CW          | 63.52            | 69.57              | -6.05           |            | PASS    |
|                              | AWGN        | 63.26            | 68.54              | -5.28           |            | PASS    |
| AWS Band                     | CW          | 62.76            | 68.81              | -6.05           |            | PASS    |
|                              | AWGN        | 63.55            | 68.87              | -5.32           |            | PASS    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





#### 6.4.4 Variable Gain Test Procedure

According to §20.21(e)(8)(i)(C)(1) Booster Gain Limits (variable gain); §20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink gain):

The uplink gain in dB of a consumer booster referenced to its input and output ports shall not exceed  $-34 \text{ dB} - \text{RSSI} + \text{MSCL}$ .

(i) Where RSSI is the downlink composite received signal power in dBm at the booster donor port for all base stations in the band of operation. RSSI is expressed in negative dB units relative to 1 mW.

(ii) Where MSCL (Mobile Station Coupling Loss) is the minimum coupling loss in dB between the wireless device and input port of the consumer booster. MSCL must be calculated or measured for each band of operation and provided in compliance test reports.

According to section 7.9.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Connect the EUT to the test equipment as shown in Figure 5 with the uplink output (donor) port connected to signal generator #1. Affirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- b) Configure downlink signal generator #1 for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the center of the operational band.
- c) Set the power level and frequency of signal generator #2 to a value that is 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- d) Set RBW = 100 kHz.
- e) Set VBW  $\geq$  300 kHz.
- f) Select the CHANNEL POWER measurement mode.
- g) Select the power averaging (rms) detector.
- h) Affirm that the number of measurement points per sweep  $\geq (2 \text{ span})/\text{RBW}$ .
- i) Sweep time = auto couple or as necessary (but no less than auto couple value).
- j) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- k) Measure the maximum channel power and compute maximum gain when varying the signal generator #1 output to a level from  $-90 \text{ dBm}$  to  $-20 \text{ dBm}$ , as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 5), in 1 dB steps inside the RSSI-dependent region, and 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Appendix D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode that the uplink and downlink gain is within the transmit power off mode gain limits.
- l) Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#### 6.4.5 Variable uplink gain timing Test Procedure

According to section 7.9.2 (Variable uplink gain timing) of KDB 935210 D03 Signal Booster Measurement v04r04:

- m) Connect the EUT to the test equipment as shown in Figure 5 with the uplink output (donor) port connected to signal generator #1. Affirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- n) Configure downlink signal generator #1 for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the center of the operational band.
- o) Set the power level and frequency of signal generator #2 to a value that is 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- p) Set RBW = 100 kHz.
- q) Set VBW  $\geq$  300 kHz.
- r) Select the CHANNEL POWER measurement mode.
- s) Select the power averaging (rms) detector.
- t) Affirm that the number of measurement points per sweep  $\geq$  (2 span)/RBW.
- u) Sweep time = auto couple or as necessary (but no less than auto couple value).
- v) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- w) Measure the maximum channel power and compute maximum gain when varying the signal generator #1 output to a level from -90 dBm to -20 dBm, as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 5), in 1 dB steps inside the RSSI-dependent region, and 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Appendix D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode that the uplink and downlink gain is within the transmit power off mode gain limits.
- x) Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.

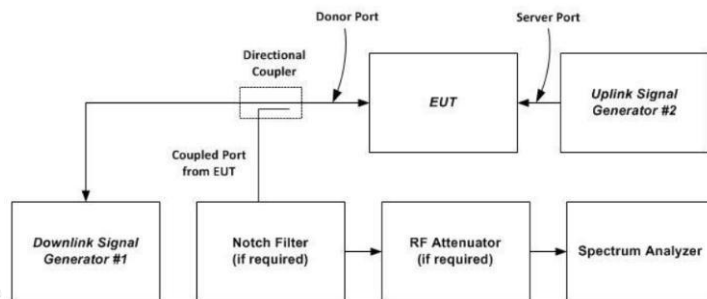


Figure 5 – Variable gain instrumentation test setup





## 6.4.6 Test data

|               |            |           |              |
|---------------|------------|-----------|--------------|
| Temperature   | 23.6℃      | Humidity  | 52.3%        |
| Test Engineer | Paddi Chen | Test Mode | Transmitting |

| Variable booster Uplink gain |               |                |                 |                            |            |       |            |         |
|------------------------------|---------------|----------------|-----------------|----------------------------|------------|-------|------------|---------|
| Operation Band               | Max Gain (dB) | Isolation (dB) | Difference (dB) | Variable booster gain (dB) | RSSI (dBm) | MSCL  | Limit (dB) | Results |
| Lower 700 Band               | 61.91         | 0              | -1.24           | 57.91                      | -60        | 33.76 | 63.49      | PASS    |
|                              |               | +1             | -2.22           | 56.56                      | -59        | 33.76 | 58.76      | PASS    |
|                              |               | +2             | -3.67           | 53.73                      | -58        | 33.76 | 57.76      | PASS    |
|                              |               | +3             | -4.68           | 50.83                      | -57        | 33.76 | 56.76      | PASS    |
|                              |               | +4             | -5.36           | 48.63                      | -56        | 33.76 | 55.76      | PASS    |
|                              |               | +5             | -6.35           | 47.65                      | -55        | 33.76 | 54.76      | PASS    |
| Upper 700 Band               | 61.03         | 0              | -1.90           | 61.11                      | -60        | 34.76 | 64.35      | PASS    |
|                              |               | +1             | -2.70           | 58.81                      | -58        | 34.76 | 58.76      | PASS    |
|                              |               | +2             | -3.84           | 55.46                      | -57        | 34.76 | 57.76      | PASS    |
|                              |               | +3             | -4.79           | 52.40                      | -56        | 34.76 | 56.76      | PASS    |
|                              |               | +4             | -5.70           | 50.95                      | -55        | 34.76 | 55.76      | PASS    |
|                              |               | +5             | -6.76           | 49.81                      | -54        | 34.76 | 54.76      | PASS    |
| Cellular Band                | 61.60         | 0              | -2.19           | 61.95                      | -60        | 35.26 | 64.95      | PASS    |
|                              |               | +1             | -3.52           | 58.42                      | -58        | 35.26 | 59.26      | PASS    |
|                              |               | +2             | -4.21           | 57.35                      | -57        | 35.26 | 58.26      | PASS    |
|                              |               | +3             | -5.58           | 55.53                      | -56        | 35.26 | 57.26      | PASS    |
|                              |               | +4             | -6.30           | 52.50                      | -55        | 35.26 | 56.26      | PASS    |
|                              |               | +5             | -7.29           | 48.15                      | -54        | 35.26 | 55.26      | PASS    |
| PCS Band                     | 63.52         | 0              | -1.89           | 70.40                      | -70        | 40.90 | 71.99      | PASS    |
|                              |               | +1             | -2.78           | 63.47                      | -61        | 40.90 | 67.9       | PASS    |
|                              |               | +2             | -4.36           | 61.89                      | -60        | 40.90 | 66.9       | PASS    |
|                              |               | +3             | -4.77           | 58.82                      | -59        | 40.90 | 65.9       | PASS    |
|                              |               | +4             | -5.44           | 58.70                      | -58        | 40.90 | 64.9       | PASS    |
|                              |               | +5             | -6.78           | 58.43                      | -57        | 40.90 | 63.9       | PASS    |
| AWS Band                     | 63.55         | 0              | -1.92           | 68.87                      | -70        | 40.26 | 71.27      | PASS    |
|                              |               | +1             | -2.84           | 62.11                      | -62        | 40.26 | 68.26      | PASS    |
|                              |               | +2             | -3.85           | 60.31                      | -61        | 40.26 | 67.26      | PASS    |
|                              |               | +3             | -5.22           | 55.60                      | -60        | 40.26 | 66.26      | PASS    |
|                              |               | +4             | -5.77           | 54.17                      | -59        | 40.26 | 65.26      | PASS    |
|                              |               | +5             | -6.97           | 50.47                      | -58        | 40.26 | 64.26      | PASS    |






## Variable Uplink Gain Timing

| Operation Band | Measured (s) | Limit (s) | Result |
|----------------|--------------|-----------|--------|
| Lower 700 Band | 0.080        | 3.0       | PASS   |
| Upper 700 Band | 0.080        | 3.0       | PASS   |
| Cellular Band  | 0.080        | 3.0       | PASS   |
| PCS Band       | 0.080        | 3.0       | PASS   |
| AWS Band       | 0.080        | 3.0       | PASS   |

## Variable Uplink Gain Timing-Test Graphs

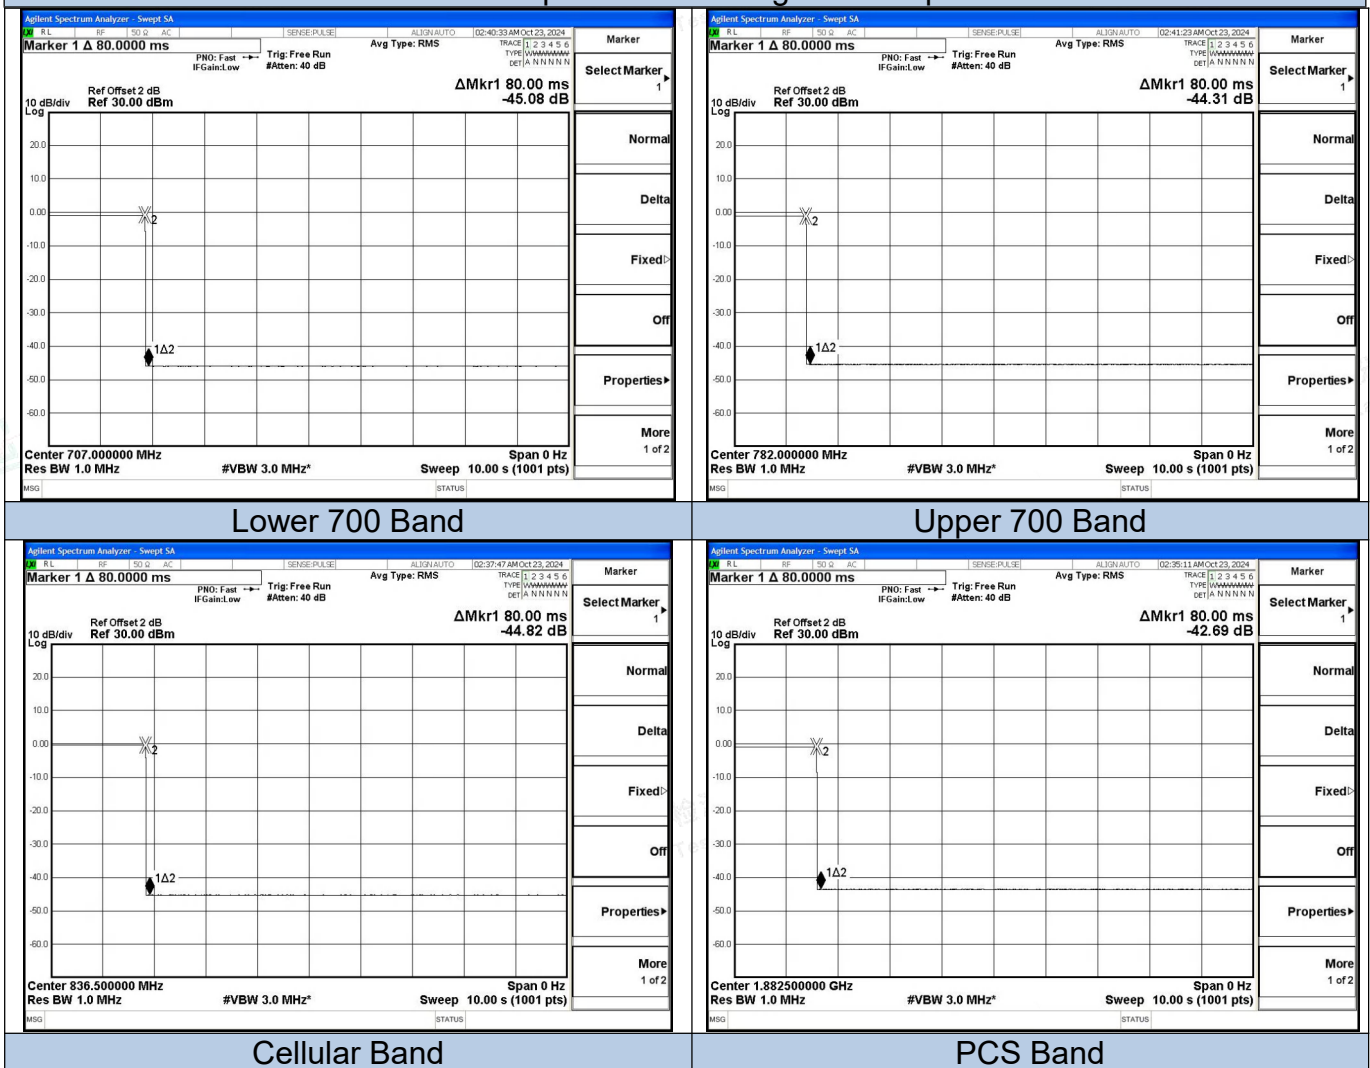


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

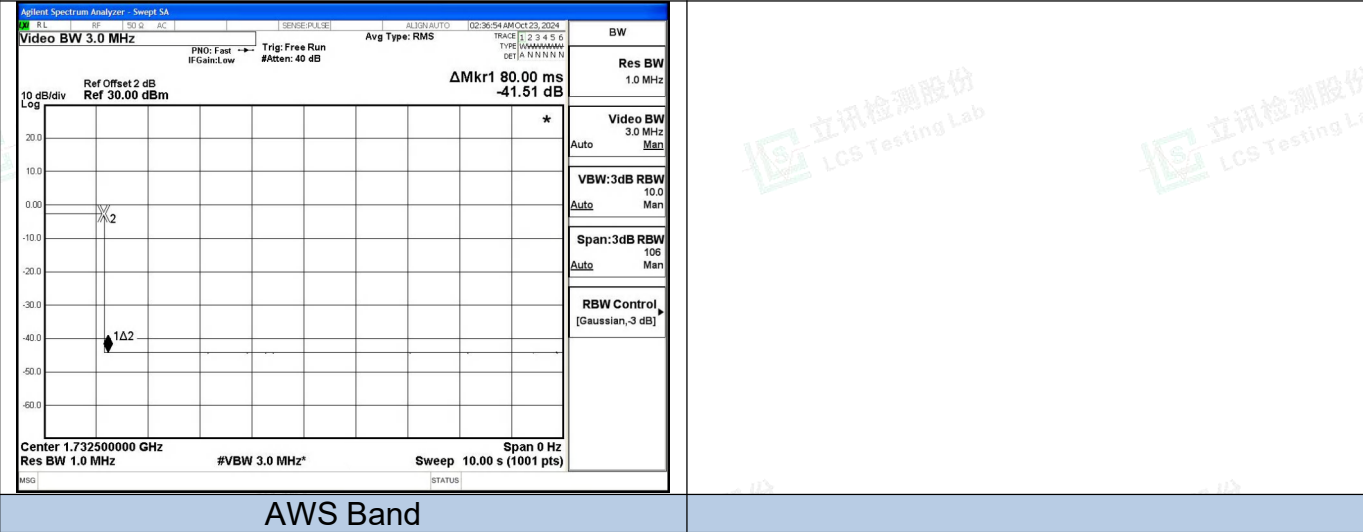

Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity





## 6.5 Anti-Oscillation

### 6.5.1 Applicable Standard

According to §20.21(e)(8)(ii)(A) Anti-Oscillation:

1. Consumer boosters must be able to detect and mitigate (i.e., by automatic gain reduction or shut down), any oscillations in uplink and downlink bands. Oscillation detection and mitigation must occur automatically within 0.3 seconds in the uplink band and within 1 second in the downlink band. In cases where oscillation is detected, the booster must continue mitigation for at least one minute before restarting. After five such restarts, the booster must not resume operation until manually reset.
  2. Use of two EUTs is permitted for this measurement, which can greatly reduce the test time required. One EUT shall operate in a normal mode, and the second EUT shall operate in a test mode that is capable of disabling the uplink inactivity function and/or allows a reduction to 5 seconds of the time between restarts.
- The procedures in 7.11.3 and 7.11.4 do not apply for devices that operate only as direct-connection mobile boosters having gain of less than or equal to 15 dB.

### 6.5.2 Test Procedure

#### Oscillation restart tests

According to section 7.11.2 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Connect the normal-operating mode EUT to the test equipment as shown in Figure 6 beginning with the spectrum analyzer on the uplink output (donor) port. Confirm that the RF coupled path is connected to the spectrum analyzer.  
NOTE—The band-pass filter shall provide sufficient out-of-band rejection to prevent oscillations from occurring in bands not under test.
- b) Spectrum analyzer settings:
  - 1) Center frequency at the center of the band under test
  - 2) Span equal or slightly exceeding the width of the band under test
  - 3) Continuous sweep, max-hold
  - 4)  $RBW \geq 1 \text{ MHz}$ ,  $VBW > 3 \text{ RBW}$
- c) Decrease the variable attenuator until the spectrum analyzer displays a signal within the band under test. Using a marker, identify the approximate center frequency of this signal on the max-hold display, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power).
- d) Repeat 7.11.2c) twice to ensure that the center of the signal created by the booster remains within 250 kHz of the spectrum analyzer display center frequency. If the frequency of the signal is unstable, confirm that the spectrum analyzer display is centered between the frequency extremes observed. If the signal is wider than 1 MHz, ensure that the spectrum analyzer display is centered on the signal by increasing the RBW. Reset the EUT (e.g., cycle ac/dc power) after each oscillation event, if necessary. Set the spectrum analyzer sweep trigger level to just below the peak amplitude of the displayed EUT oscillation signal.
- e) Set the spectrum analyzer to zero-span, with a sweep time of 5 seconds, and single-sweep with max-hold. The spectrum analyzer sweep trigger level in this and the subsequent steps shall be the level identified in 7.11.2d).
- f) Decrease the variable attenuator until the spectrum analyzer sweep is triggered, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity