


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000	---	37.89	54.00	16.11	500.0	100.0	H	298.0	2.4
1125.000000	46.50	---	74.00	27.50	500.0	100.0	H	298.0	2.4
1446.000000	55.02	---	74.00	18.98	500.0	100.0	V	301.0	4.2
1448.000000	---	50.66	54.00	3.34	500.0	100.0	V	301.0	4.2
1625.000000	---	41.83	54.00	12.17	500.0	200.0	V	90.0	5.0
1625.000000	48.13	---	74.00	25.87	500.0	200.0	V	90.0	5.0
1874.500000	48.50	---	74.00	25.50	500.0	100.0	V	284.0	6.1
1875.000000	---	40.68	54.00	13.32	500.0	100.0	V	295.0	6.1
2124.500000	48.08	---	74.00	25.92	500.0	100.0	H	16.0	7.0
2125.000000	---	40.27	54.00	13.73	500.0	200.0	V	79.0	7.0
2894.500000	---	40.14	54.00	13.86	500.0	200.0	V	10.0	9.2
2895.500000	50.23	---	74.00	23.77	500.0	200.0	V	232.0	9.2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11b CH6

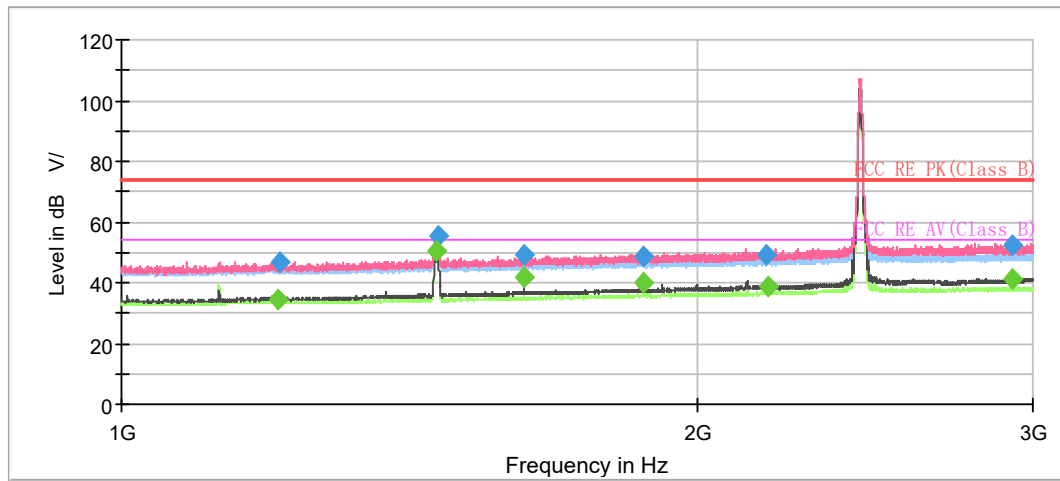

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

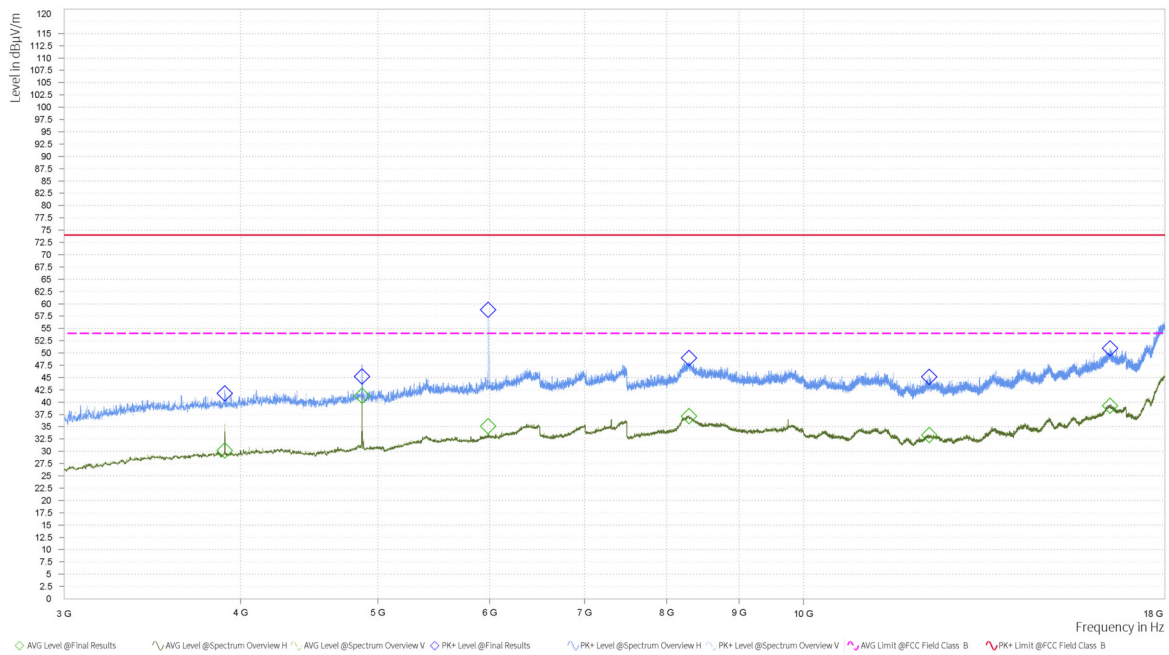


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1207.500000	---	34.63	54.00	19.37	500.0	200.0	V	186.0	2.8
1211.500000	46.50	---	74.00	27.50	500.0	200.0	V	1.0	2.9
1462.750000	---	50.25	54.00	3.75	500.0	100.0	V	300.0	4.3
1464.000000	55.22	---	74.00	18.78	500.0	100.0	V	300.0	4.3
1625.000000	48.99	---	74.00	25.01	500.0	200.0	V	83.0	5.0
1625.000000	---	42.02	54.00	11.98	500.0	200.0	V	83.0	5.0
1874.750000	---	39.95	54.00	14.05	500.0	100.0	V	57.0	6.1
1875.000000	48.73	---	74.00	25.27	500.0	200.0	V	250.0	6.1
2173.750000	49.41	---	74.00	24.59	500.0	200.0	V	57.0	7.1
2180.500000	---	38.63	54.00	15.37	500.0	200.0	V	157.0	7.2
2924.000000	52.04	---	74.00	21.96	500.0	200.0	V	6.0	9.3
2925.500000	---	41.43	54.00	12.57	500.0	200.0	V	77.0	9.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11b CH11

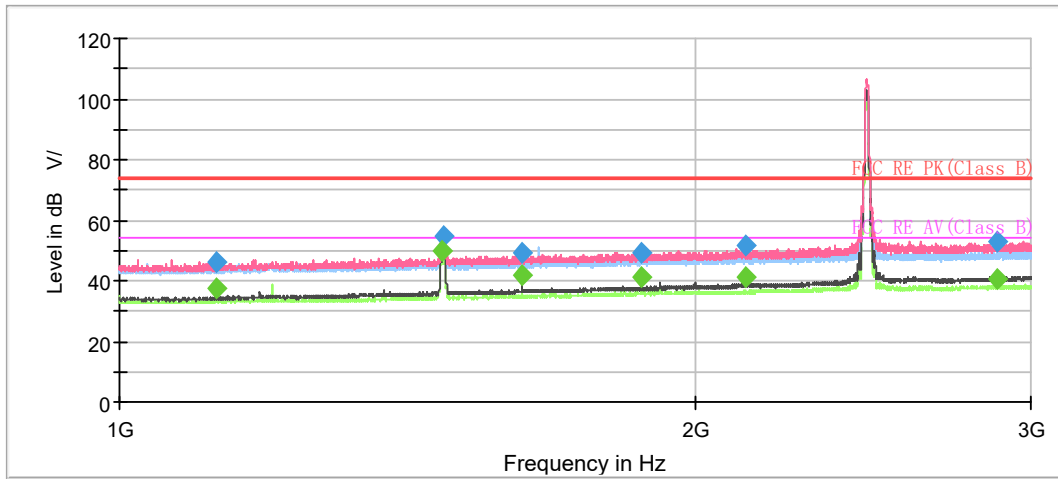

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

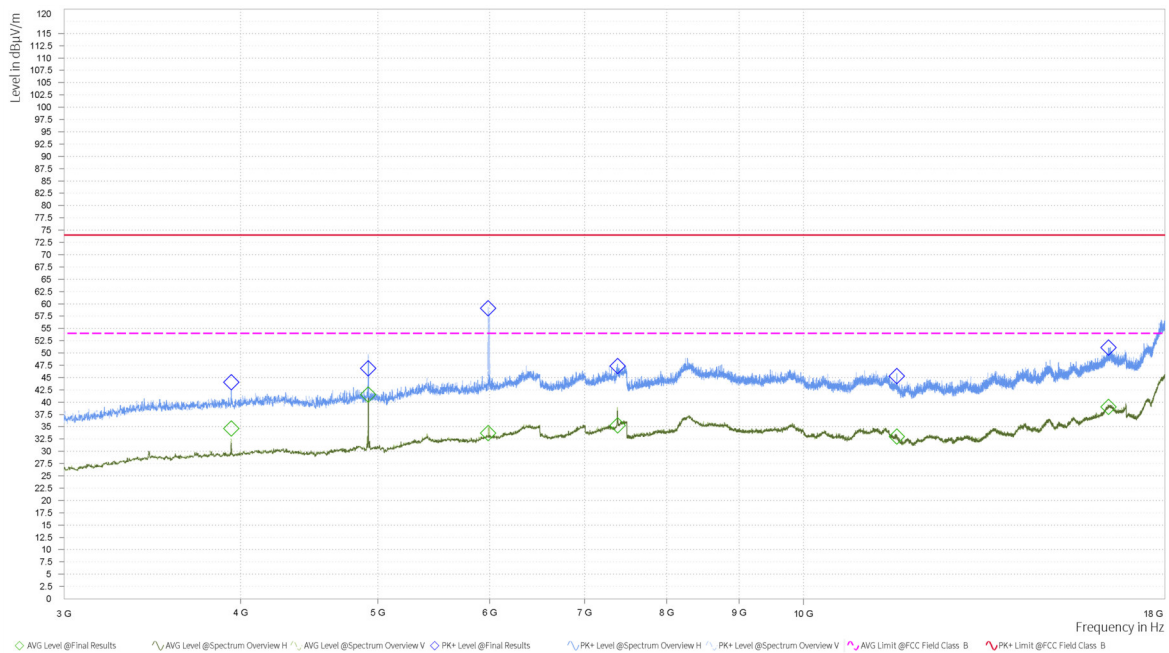


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000	---	37.49	54.00	16.51	500.0	100.0	H	289.0	2.4
1125.000000	46.45	---	74.00	27.55	500.0	100.0	H	296.0	2.4
1476.250000	---	49.86	54.00	4.14	500.0	100.0	V	301.0	4.4
1477.000000	54.76	---	74.00	19.24	500.0	100.0	V	301.0	4.4
1625.000000	49.48	---	74.00	24.52	500.0	200.0	V	91.0	5.0
1625.000000	---	41.81	54.00	12.19	500.0	200.0	V	91.0	5.0
1875.000000	---	41.08	54.00	12.92	500.0	100.0	V	301.0	6.1
1875.000000	49.24	---	74.00	24.76	500.0	100.0	V	301.0	6.1
2125.000000	---	41.25	54.00	12.75	500.0	200.0	V	80.0	7.0
2125.000000	51.91	---	74.00	22.09	500.0	200.0	V	80.0	7.0
2880.250000	---	40.78	54.00	13.22	500.0	200.0	V	279.0	9.2
2883.250000	53.06	---	74.00	20.94	500.0	200.0	V	74.0	9.2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH1

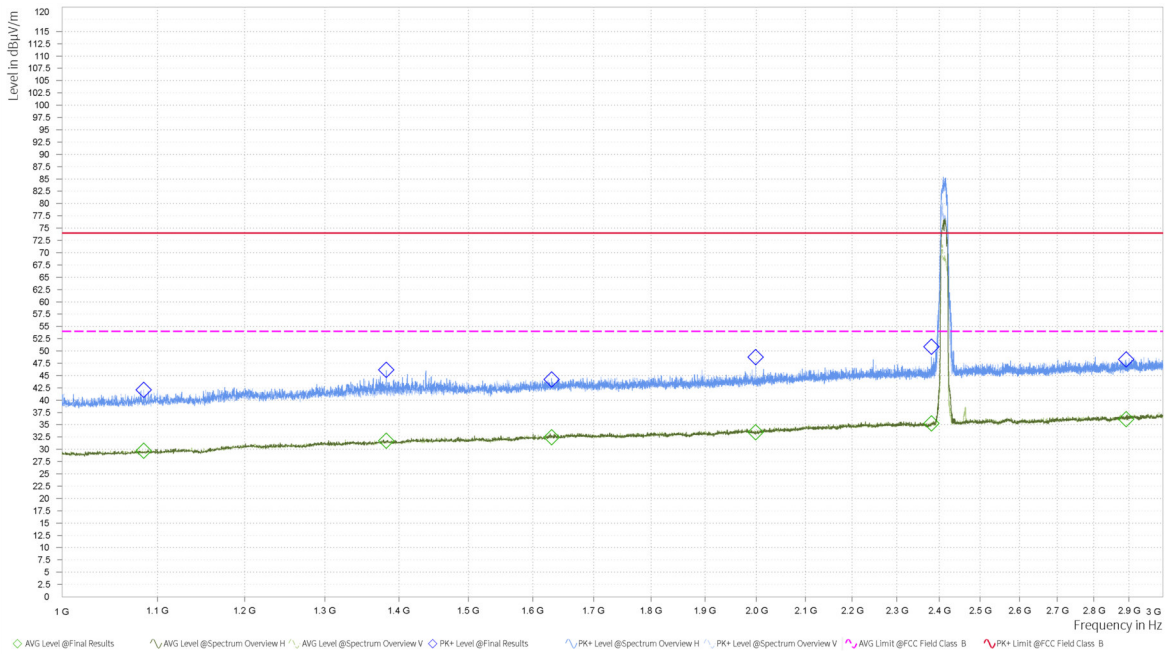

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

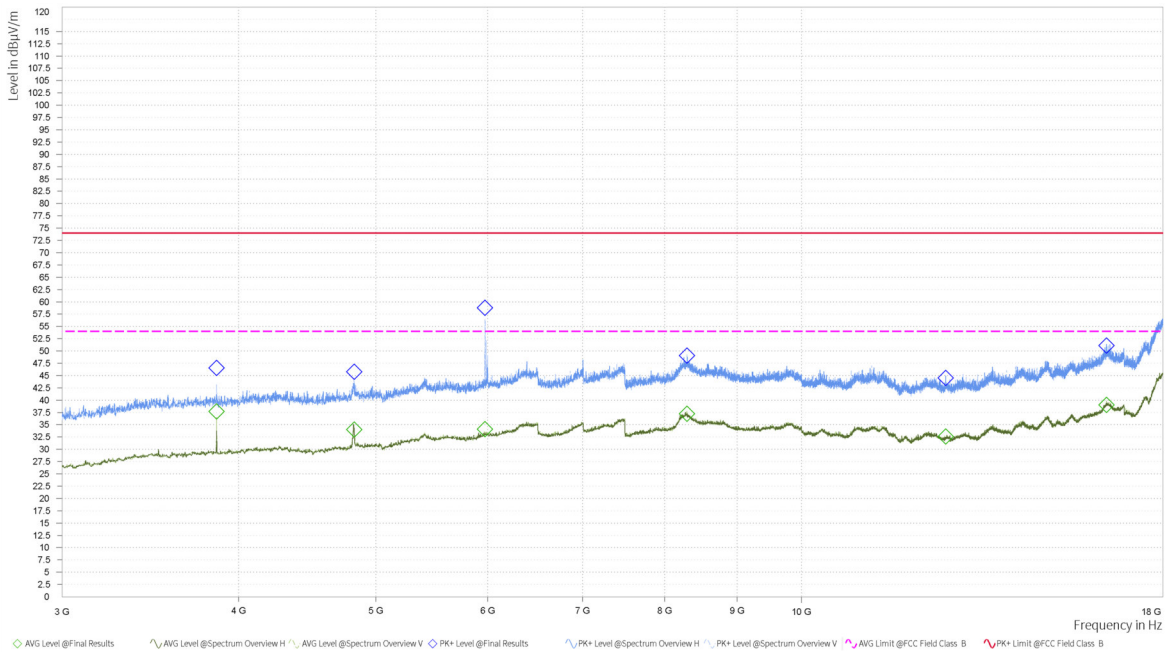


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,085.000	42.10	74.00	31.90	29.68	54.00	24.32	-6.14	V	360	1.00	1.000
1,382.000	46.20	74.00	27.80	31.77	54.00	22.23	-3.28	H	0.9	2.00	1.000
1,630.250	44.24	74.00	29.76	32.44	54.00	21.56	-1.51	H	64	2.00	1.000
1,998.250	48.72	74.00	25.28	33.46	54.00	20.54	0.48	V	325.8	1.00	1.000
2,381.750	50.83	74.00	23.17	35.28	54.00	18.72	2.29	H	64	2.00	1.000
2,892.750	48.25	74.00	25.75	36.14	54.00	17.86	4.03	V	359.2	2.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH6

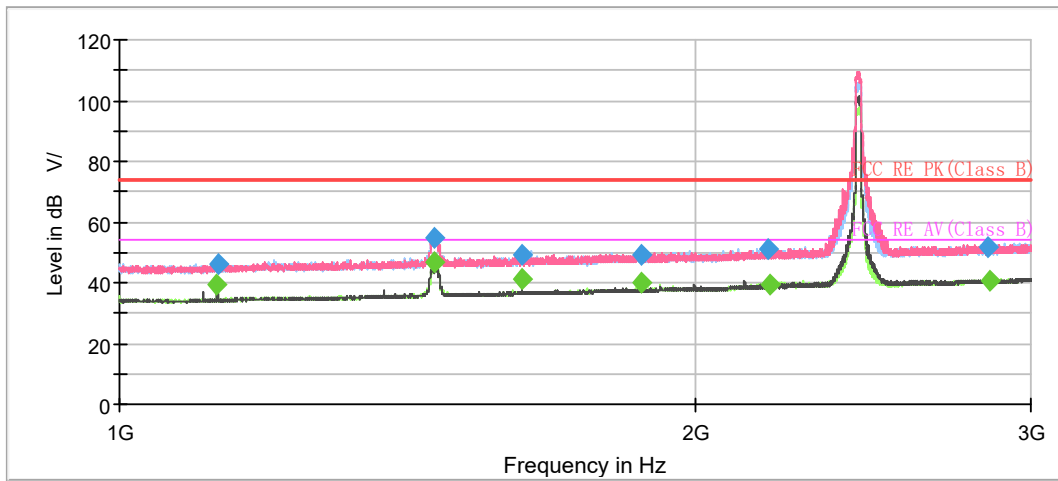

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

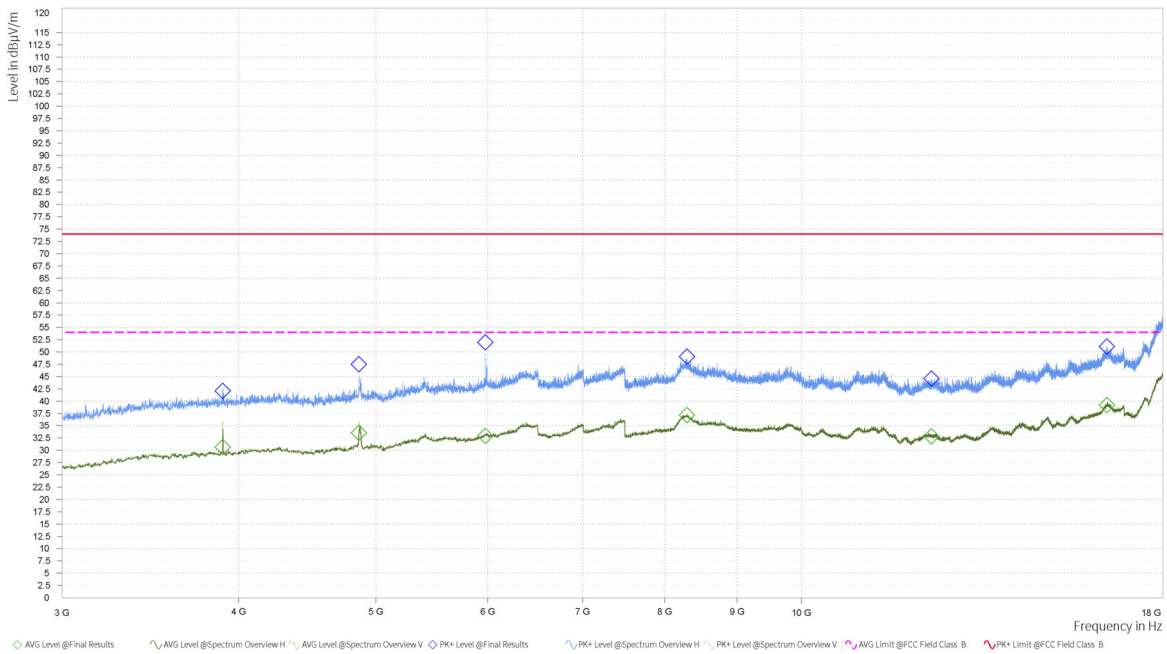


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.750000	---	39.47	54.00	14.53	500.0	100.0	H	296.0	2.4
1125.250000	46.40	---	74.00	27.60	500.0	100.0	H	303.0	2.4
1460.500000	54.92	---	74.00	19.08	500.0	100.0	V	243.0	4.3
1463.000000	---	46.56	54.00	7.44	500.0	100.0	V	300.0	4.3
1624.750000	---	41.46	54.00	12.54	500.0	200.0	V	139.0	5.0
1625.000000	49.26	---	74.00	24.74	500.0	200.0	V	85.0	5.0
1874.750000	---	40.18	54.00	13.82	500.0	100.0	V	49.0	6.1
1875.000000	49.36	---	74.00	24.64	500.0	100.0	V	89.0	6.1
2187.500000	50.82	---	74.00	23.18	500.0	200.0	H	34.0	7.2
2190.750000	---	39.45	54.00	14.55	500.0	200.0	H	0.0	7.2
2848.750000	51.87	---	74.00	22.13	500.0	100.0	V	69.0	9.1
2854.500000	---	40.57	54.00	13.43	500.0	200.0	H	79.0	9.1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH11

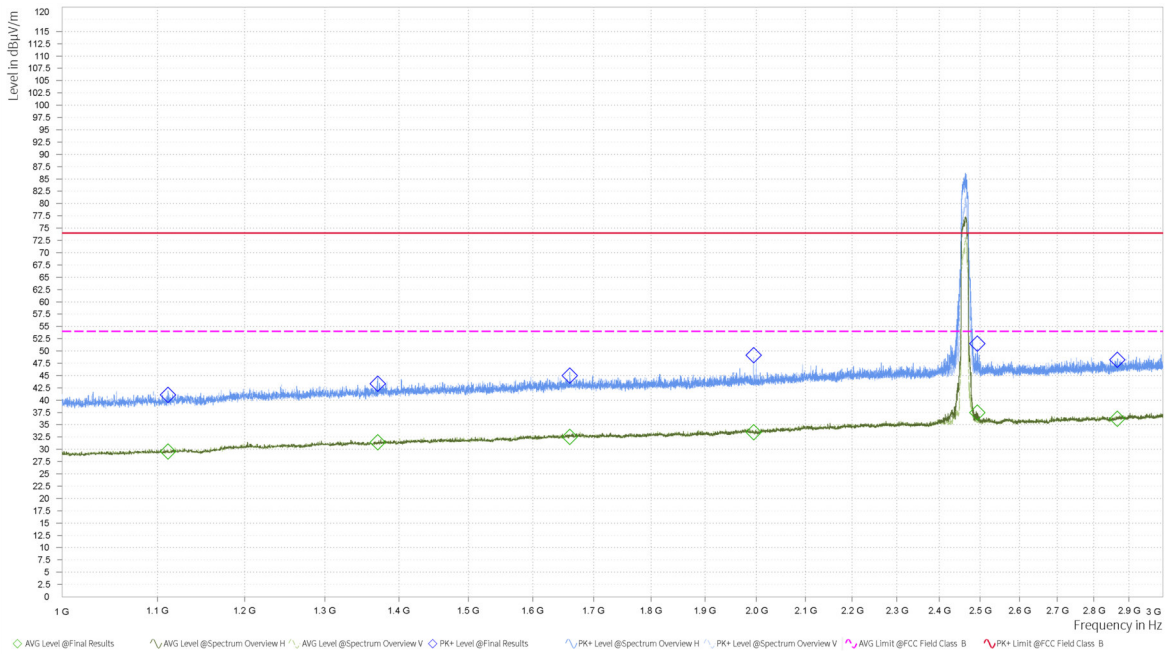

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

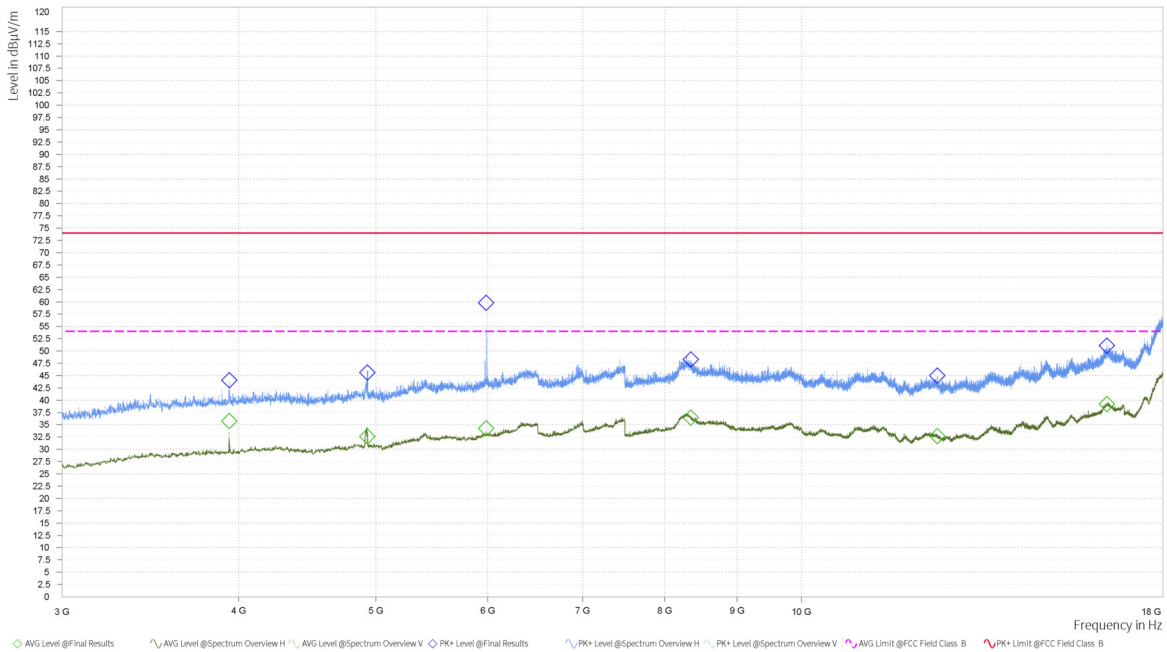


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,111.750	41.09	74.00	32.91	29.52	54.00	24.48	-5.97	H	98.2	2.00	1.000
1,370.250	43.35	74.00	30.65	31.41	54.00	22.59	-3.40	H	118.8	2.00	1.000
1,660.000	44.97	74.00	29.03	32.53	54.00	21.47	-1.14	H	0	2.00	1.000
1,994.250	49.14	74.00	24.86	33.48	54.00	20.52	0.52	V	326	1.00	1.000
2,493.500	51.50	74.00	22.50	37.45	54.00	16.55	2.76	H	69.2	1.00	1.000
2,866.500	48.17	74.00	25.83	36.23	54.00	17.77	3.73	V	2.9	1.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH1

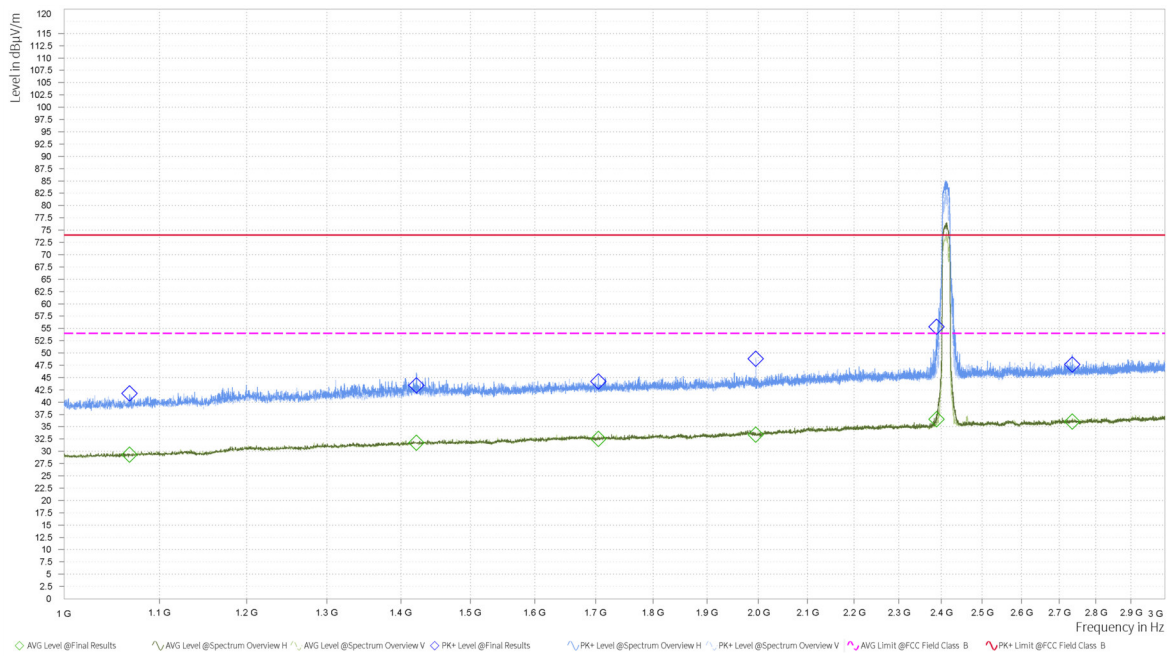

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

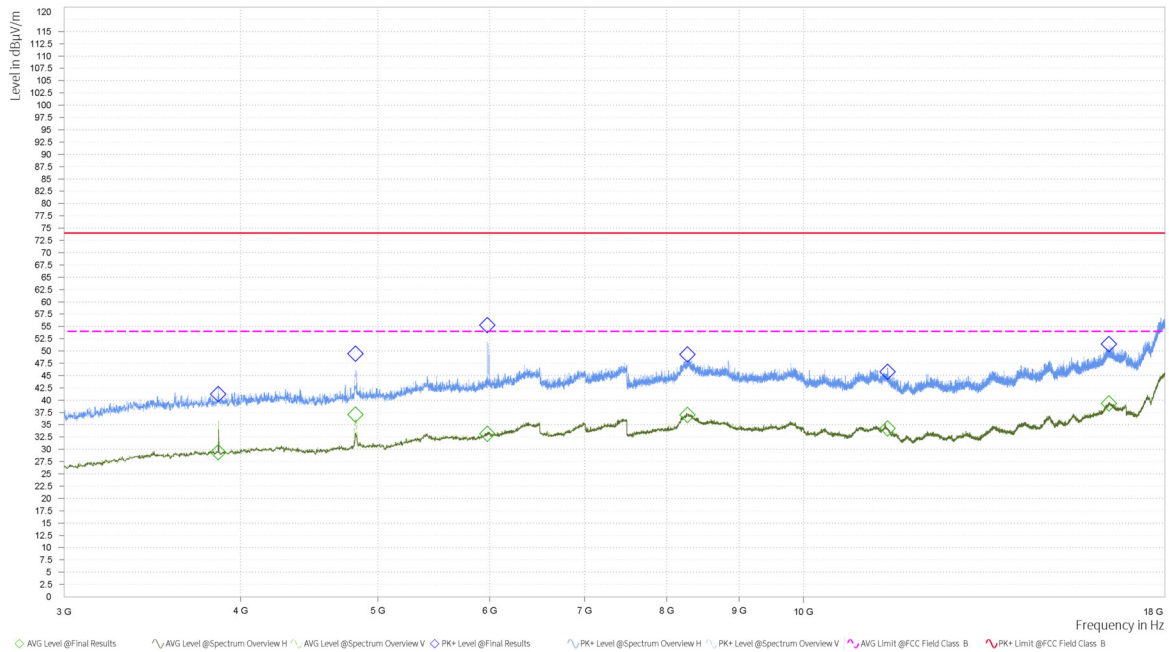


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,067.750	41.80	74.00	32.20	29.30	54.00	24.70	-6.33	H	9	2.00	1.000
1,421.750	43.40	74.00	30.60	31.76	54.00	22.24	-2.92	H	50.4	2.00	1.000
1,704.750	44.19	74.00	29.81	32.50	54.00	21.50	-1.13	H	255.1	1.00	1.000
1,994.750	48.87	74.00	25.13	33.42	54.00	20.58	0.51	V	311	2.00	1.000
2,388.500	55.34	74.00	18.66	36.53	54.00	17.47	2.41	H	257.6	2.00	1.000
2,735.500	47.68	74.00	26.32	36.04	54.00	17.96	3.44	H	29.8	2.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH6

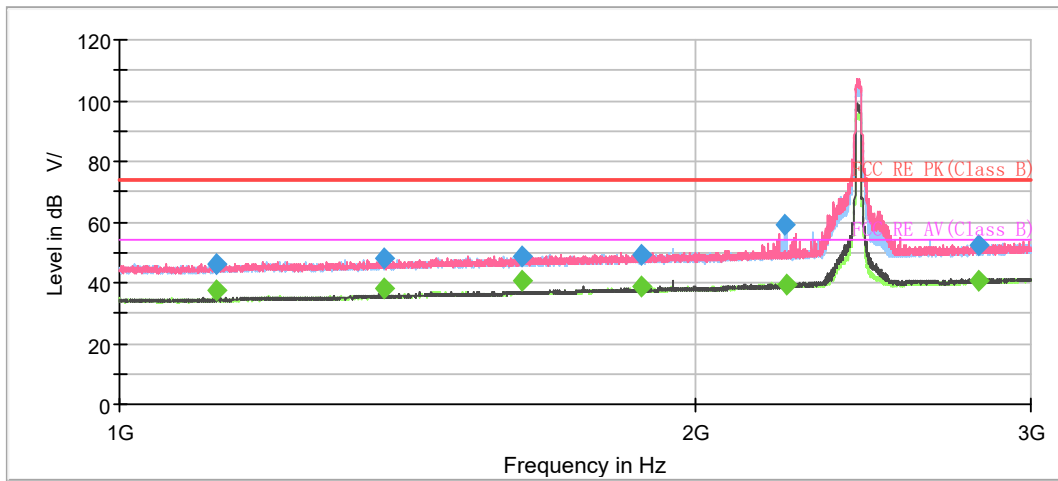

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

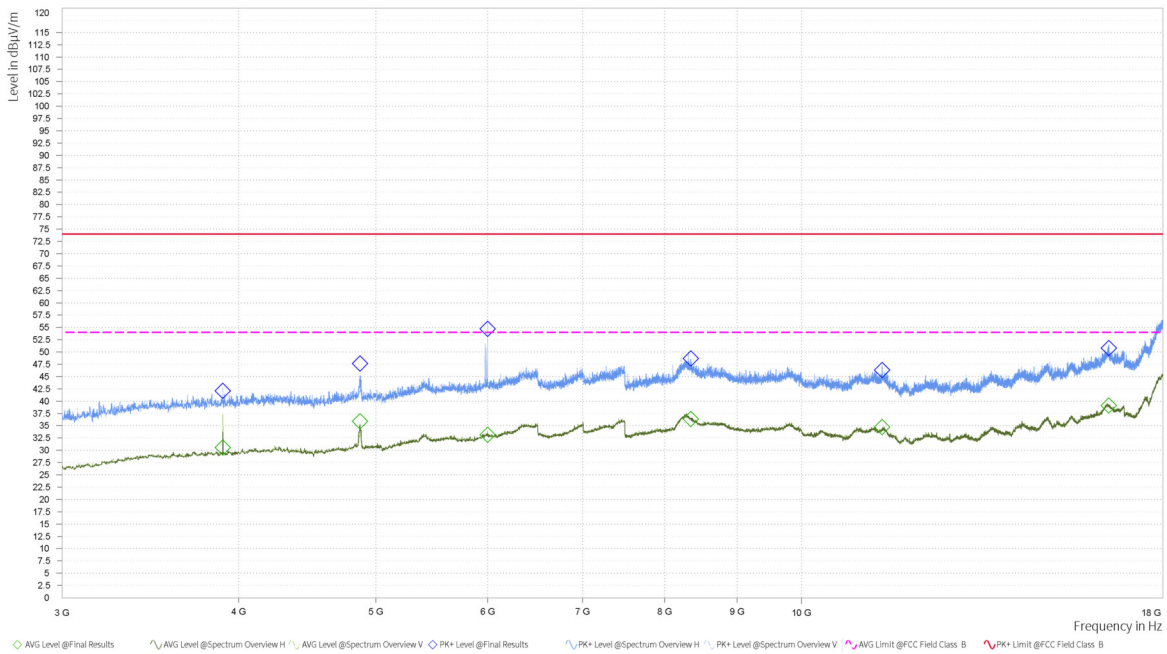


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.750000	---	37.70	54.00	16.30	500.0	200.0	V	97.0	2.4
1124.750000	46.27	---	74.00	27.73	500.0	200.0	H	179.0	2.4
1374.750000	---	38.04	54.00	15.96	500.0	200.0	V	198.0	3.8
1374.750000	47.75	---	74.00	26.25	500.0	200.0	V	198.0	3.8
1625.000000	---	40.80	54.00	13.20	500.0	200.0	V	198.0	5.0
1625.250000	48.34	---	74.00	25.66	500.0	200.0	V	198.0	5.0
1875.000000	49.49	---	74.00	24.51	500.0	200.0	V	8.0	6.1
1875.000000	---	39.07	54.00	14.93	500.0	200.0	H	142.0	6.1
2229.750000	59.19	---	74.00	14.81	500.0	100.0	H	109.0	7.4
2235.000000	---	39.56	54.00	14.44	500.0	200.0	H	266.0	7.4
2817.750000	52.23	---	74.00	21.77	500.0	200.0	V	123.0	9.0
2818.750000	---	40.72	54.00	13.28	500.0	200.0	V	136.0	9.0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH11

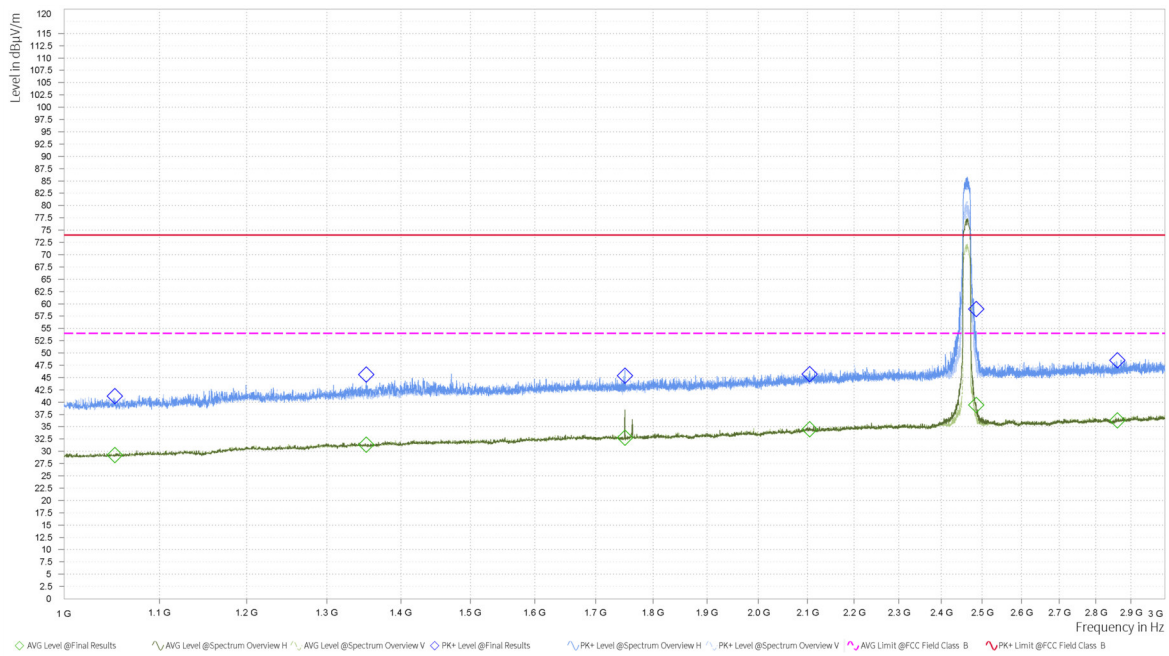

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

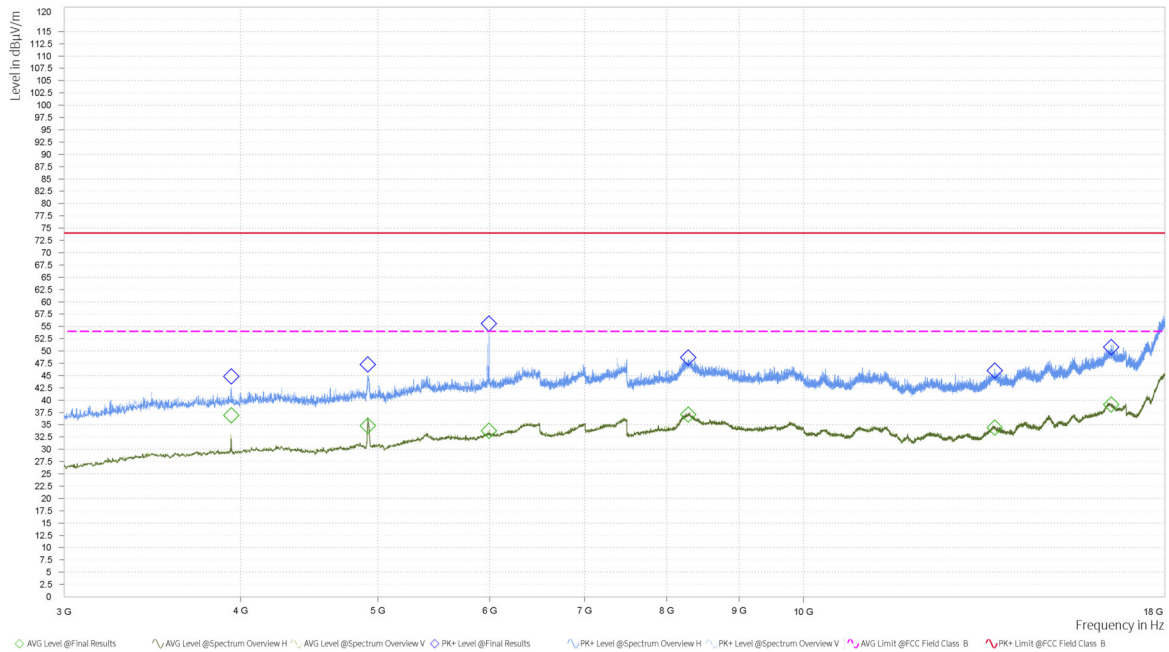


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Corr. (dB/m)	Pol	Azimuth (deg)	Height (m)	Meas. Time (s)
1,052.000	41.20	74.00	32.80	29.23	54.00	24.77	-6.48	V	153.6	1.00	1.000
1,352.000	45.59	74.00	28.41	31.33	54.00	22.67	-3.55	H	48.7	2.00	1.000
1,750.500	45.38	74.00	28.62	32.75	54.00	21.25	-0.94	H	358.7	2.00	1.000
2,104.750	45.69	74.00	28.31	34.48	54.00	19.52	1.26	H	152.7	2.00	1.000
2,485.500	58.95	74.00	15.05	39.40	54.00	14.60	2.81	H	76.4	2.00	1.000
2,861.250	48.54	74.00	25.46	36.30	54.00	17.70	3.71	V	243.1	1.00	1.000


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH3

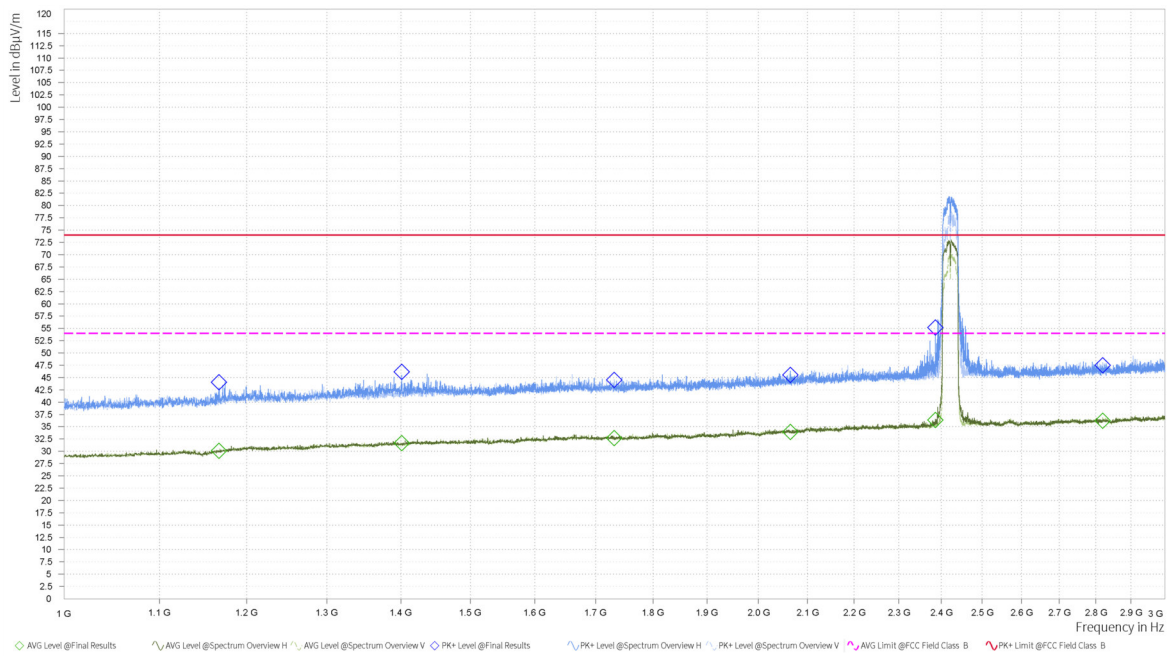

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

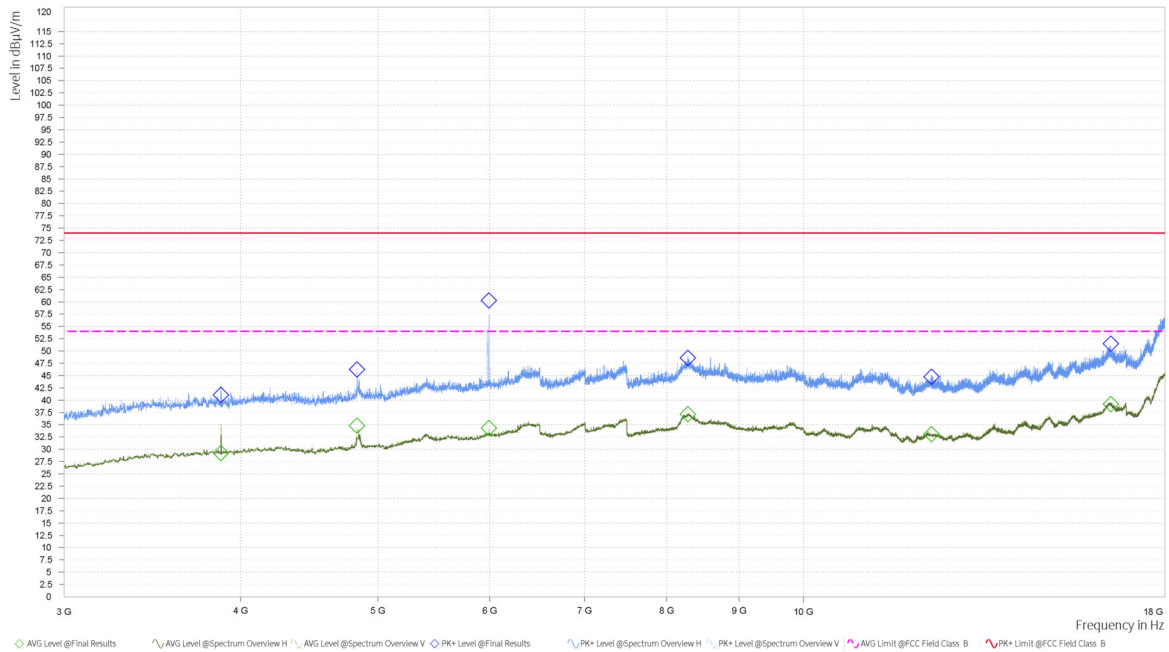

Radiates Emission from 3GHz to 18GHz