



## Appendix F

### RF Test Data for 5.5G WIFI (Conducted Measurement)

Product Name: 24 inch FHD All-in-One Desktop Computer

Test Model: SC-4424AIO

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23.8 ° C  |
| Relative Humidity: | 52.1%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Nick Peng |
| Supervised by:     | Mening Su |





## F.1 -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5500            | Ant1    | 20.154                 | 0.5                          | Pass    |
| NVNT      | a    | 5580            | Ant1    | 20.171                 | 0.5                          | Pass    |
| NVNT      | a    | 5700            | Ant1    | 20.759                 | 0.5                          | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 20.398                 | 0.5                          | Pass    |
| NVNT      | n20  | 5580            | Ant1    | 20.379                 | 0.5                          | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 20.279                 | 0.5                          | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 40.74                  | 0.5                          | Pass    |
| NVNT      | n40  | 5550            | Ant1    | 40.732                 | 0.5                          | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 40.104                 | 0.5                          | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 20.273                 | 0.5                          | Pass    |
| NVNT      | ac20 | 5580            | Ant1    | 20.447                 | 0.5                          | Pass    |
| NVNT      | ac20 | 5700            | Ant1    | 20.36                  | 0.5                          | Pass    |
| NVNT      | ac40 | 5510            | Ant1    | 39.72                  | 0.5                          | Pass    |
| NVNT      | ac40 | 5550            | Ant1    | 39.682                 | 0.5                          | Pass    |
| NVNT      | ac40 | 5670            | Ant1    | 39.672                 | 0.5                          | Pass    |
| NVNT      | ac80 | 5530            | Ant1    | 79.252                 | 0.5                          | Pass    |
| NVNT      | ac80 | 5610            | Ant1    | 79.398                 | 0.5                          | Pass    |





## Test Graphs

-26dB Bandwidth NVNT a 5500MHz Ant1

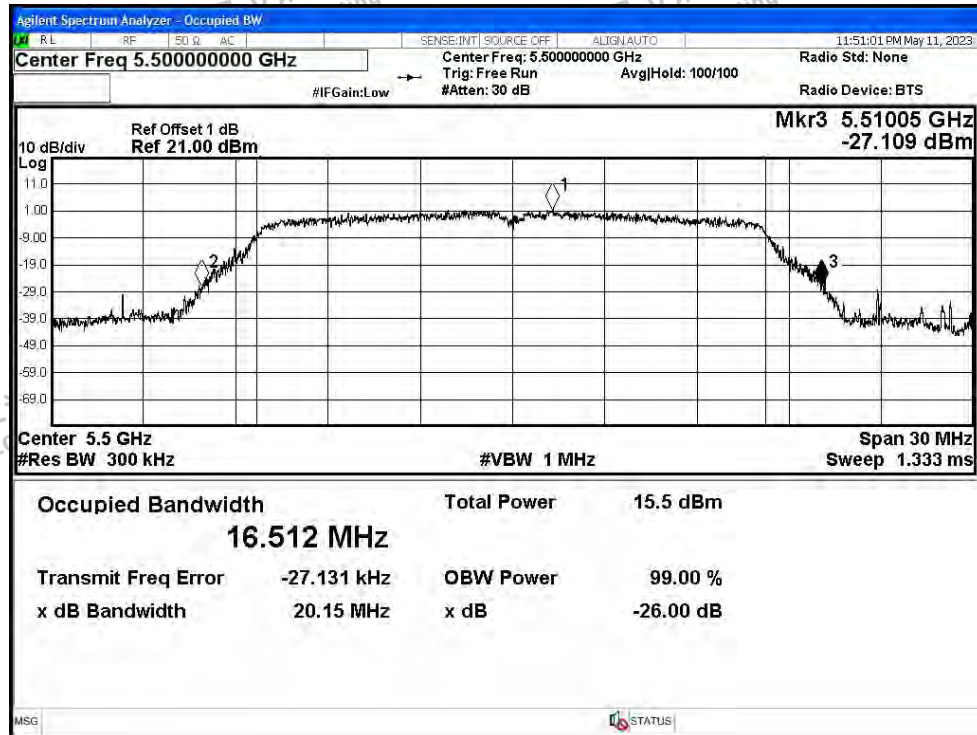

-26dB Bandwidth NVNT a 5580MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-26dB Bandwidth NVNT a 5700MHz Ant1



-26dB Bandwidth NVNT n20 5500MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-26dB Bandwidth NVNT n20 5580MHz Ant1

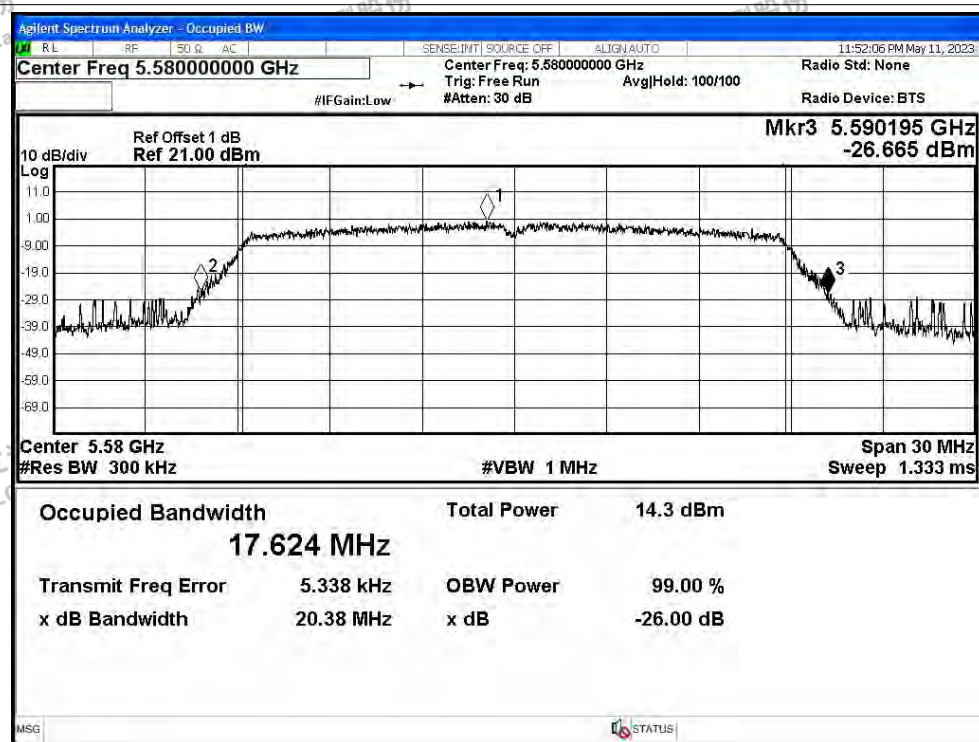


-26dB Bandwidth NVNT n20 5700MHz Ant1






-26dB Bandwidth NVNT n40 5510MHz Ant1

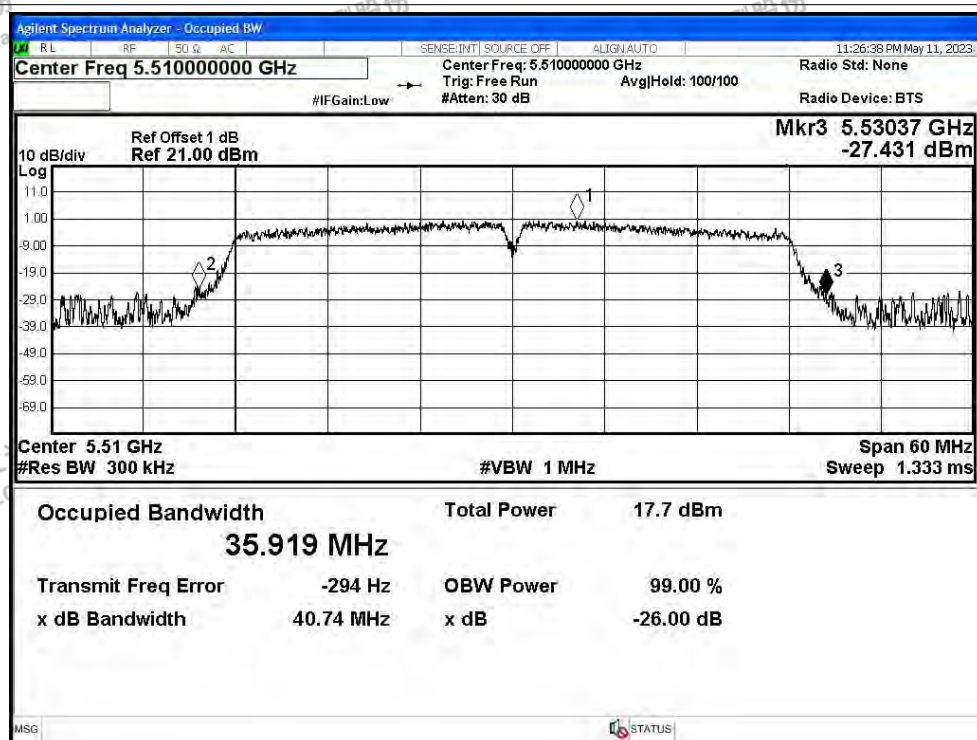

-26dB Bandwidth NVNT n40 5550MHz Ant1

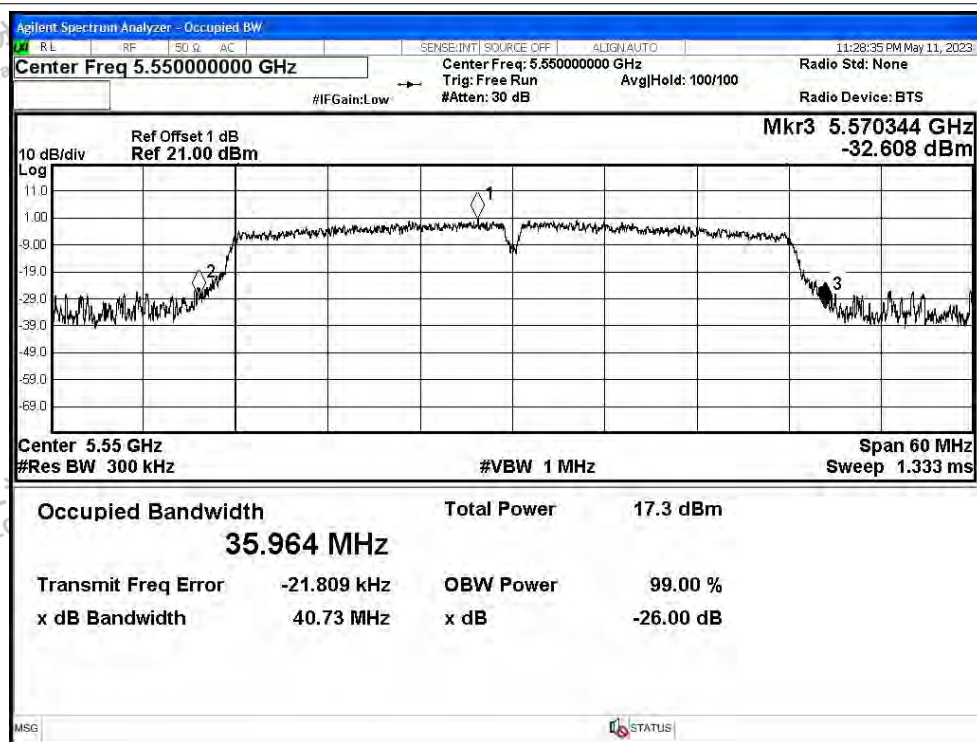

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## -26dB Bandwidth NVNT n40 5670MHz Ant1

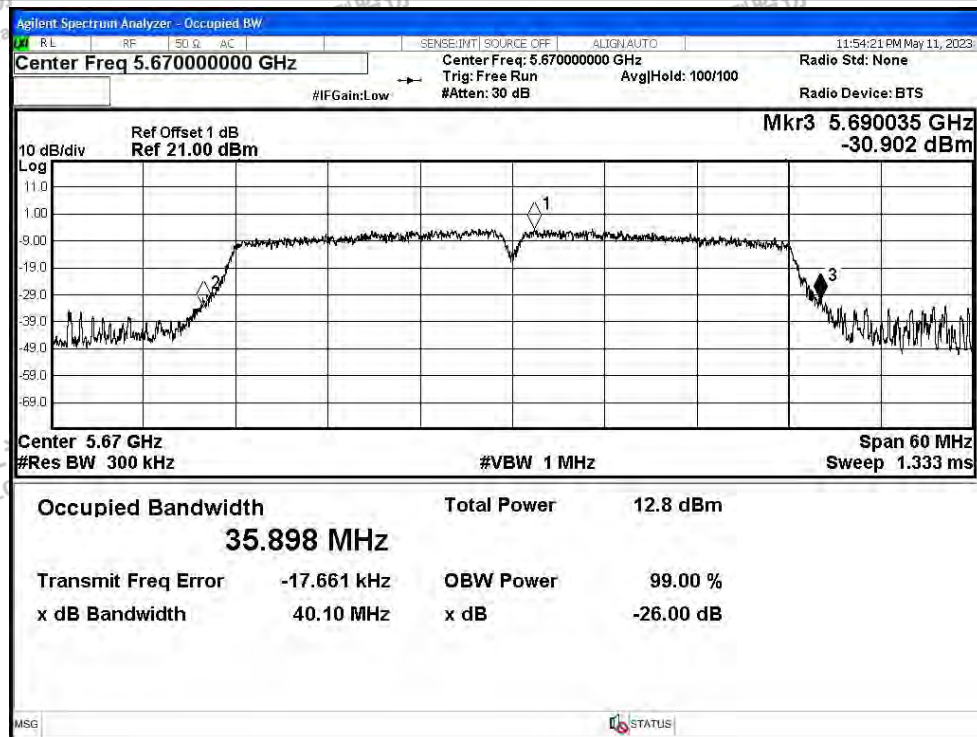

## -26dB Bandwidth NVNT ac20 5500MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## -26dB Bandwidth NVNT ac20 5580MHz Ant1



## -26dB Bandwidth NVNT ac20 5700MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac40 5510MHz Ant1

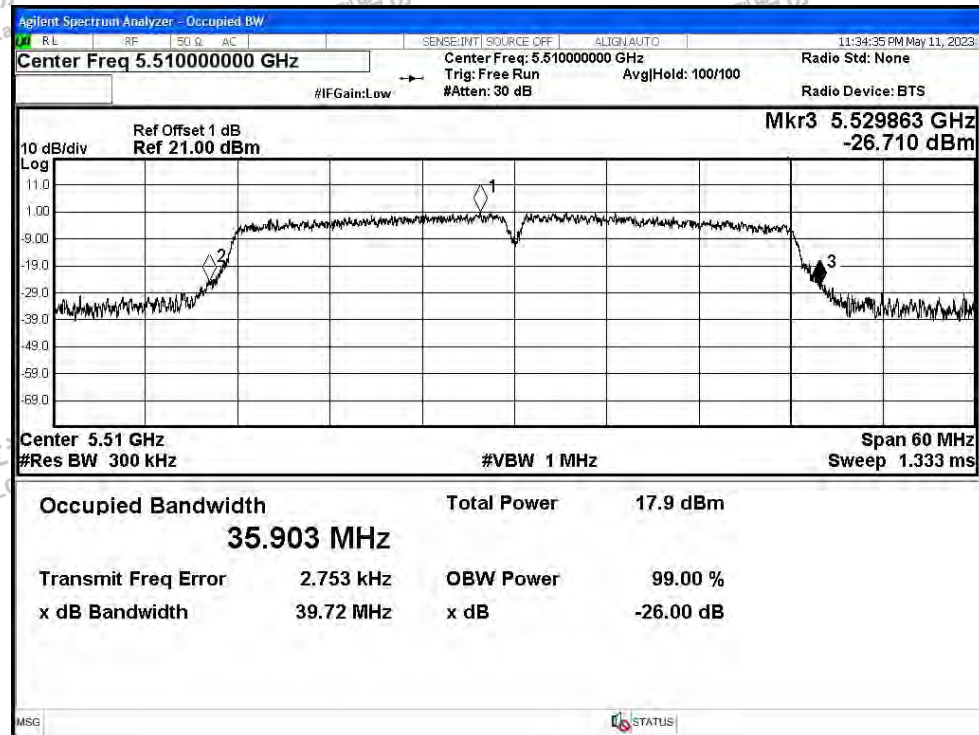


## -26dB Bandwidth NVNT ac40 5550MHz Ant1

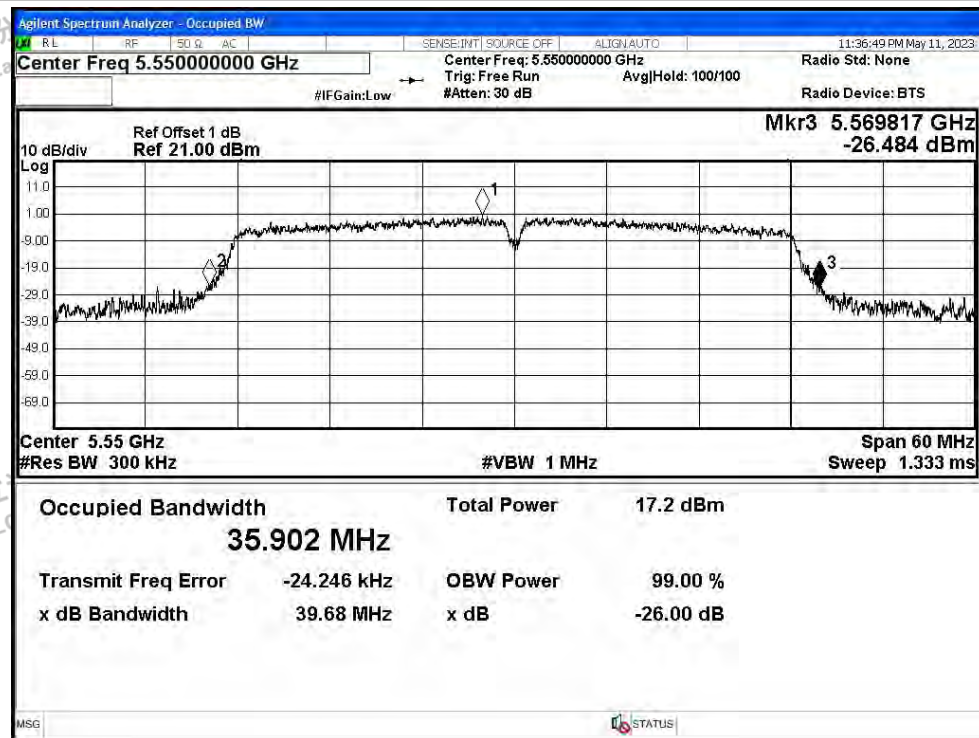




## -26dB Bandwidth NVNT ac40 5670MHz Ant1

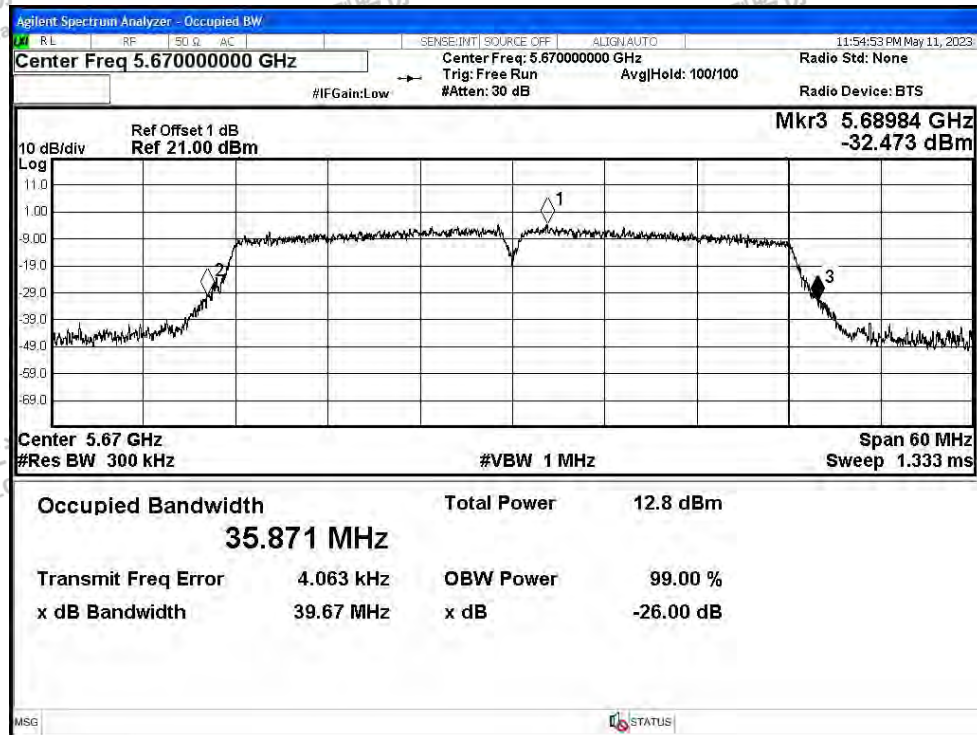

## -26dB Bandwidth NVNT ac80 5530MHz Ant1

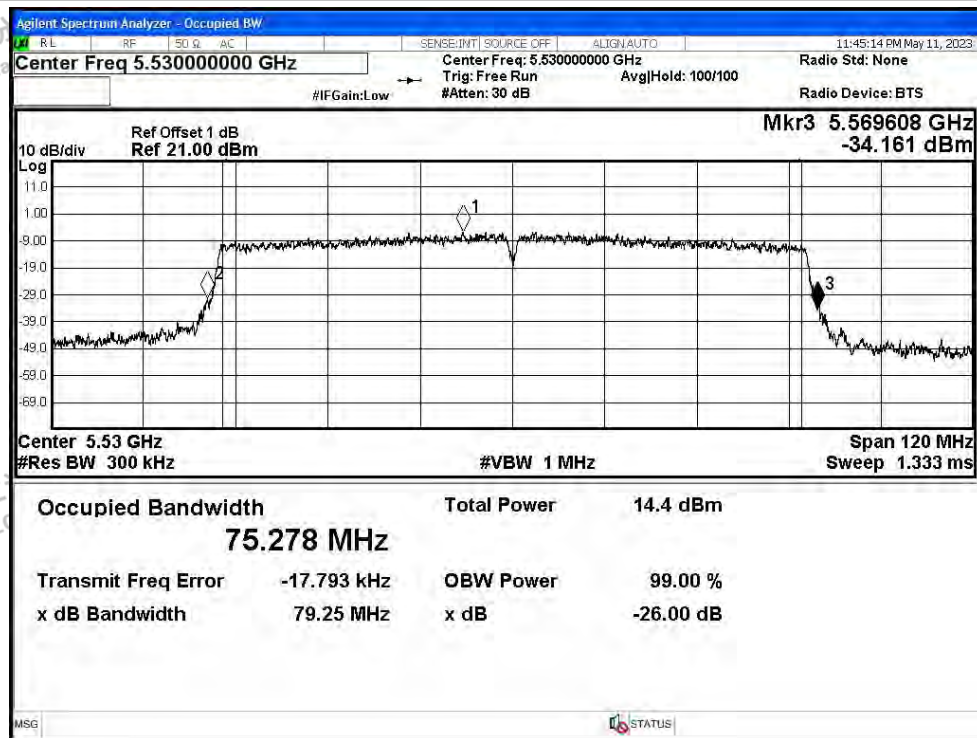


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

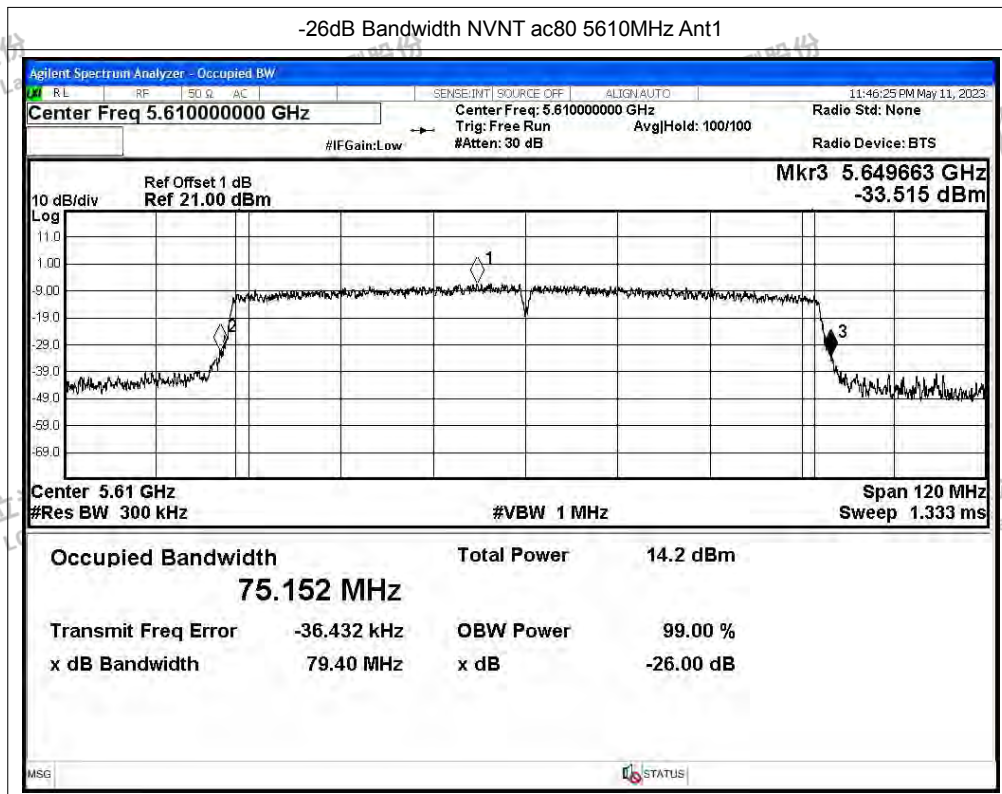



## F.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5500            | Ant1    | 11.32                 | 0.13             | 11.45             | 24          | Pass    |
| NVNT      | a    | 5580            | Ant1    | 11.28                 | 0.13             | 11.41             | 24          | Pass    |
| NVNT      | a    | 5700            | Ant1    | 11.44                 | 0.13             | 11.57             | 24          | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 11.65                 | 0.14             | 11.79             | 24          | Pass    |
| NVNT      | n20  | 5580            | Ant1    | 11.21                 | 0.15             | 11.36             | 24          | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 11.24                 | 0.14             | 11.38             | 24          | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 11.73                 | 0.27             | 12                | 24          | Pass    |
| NVNT      | n40  | 5550            | Ant1    | 11.24                 | 0.28             | 11.52             | 24          | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 11.67                 | 0                | 11.67             | 24          | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 11.7                  | 0.15             | 11.85             | 24          | Pass    |
| NVNT      | ac20 | 5580            | Ant1    | 11.19                 | 0.15             | 11.34             | 24          | Pass    |
| NVNT      | ac20 | 5700            | Ant1    | 11.28                 | 0.14             | 11.42             | 24          | Pass    |
| NVNT      | ac40 | 5510            | Ant1    | 11.68                 | 0.28             | 11.96             | 24          | Pass    |
| NVNT      | ac40 | 5550            | Ant1    | 11.22                 | 0.27             | 11.49             | 24          | Pass    |
| NVNT      | ac40 | 5670            | Ant1    | 11.7                  | 0.15             | 11.85             | 24          | Pass    |
| NVNT      | ac80 | 5530            | Ant1    | 11.44                 | 0.55             | 11.99             | 24          | Pass    |
| NVNT      | ac80 | 5610            | Ant1    | 11.39                 | 0.55             | 11.94             | 24          | Pass    |





### F.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| NVNT      | a    | 5500            | Ant1    | -0.9                | 0.13             | -0.77           | 11          | Pass    |
| NVNT      | a    | 5580            | Ant1    | -0.8                | 0.13             | -0.67           | 11          | Pass    |
| NVNT      | a    | 5700            | Ant1    | -0.87               | 0.13             | -0.74           | 11          | Pass    |
| NVNT      | n20  | 5500            | Ant1    | -1.08               | 0.14             | -0.94           | 11          | Pass    |
| NVNT      | n20  | 5580            | Ant1    | -1.83               | 0.15             | -1.68           | 11          | Pass    |
| NVNT      | n20  | 5700            | Ant1    | -1.15               | 0.14             | -1.01           | 11          | Pass    |
| NVNT      | n40  | 5510            | Ant1    | -4.59               | 0.27             | -4.32           | 11          | Pass    |
| NVNT      | n40  | 5550            | Ant1    | -6.29               | 0.28             | -6.01           | 11          | Pass    |
| NVNT      | n40  | 5670            | Ant1    | -4.81               | 0                | -4.81           | 11          | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | -0.65               | 0.15             | -0.5            | 11          | Pass    |
| NVNT      | ac20 | 5580            | Ant1    | -1.16               | 0.15             | -1.01           | 11          | Pass    |
| NVNT      | ac20 | 5700            | Ant1    | -1.71               | 0.14             | -1.57           | 11          | Pass    |
| NVNT      | ac40 | 5510            | Ant1    | -2.92               | 0.28             | -2.64           | 11          | Pass    |
| NVNT      | ac40 | 5550            | Ant1    | -4.99               | 0.27             | -4.72           | 11          | Pass    |
| NVNT      | ac40 | 5670            | Ant1    | -4.88               | 0.15             | -4.73           | 11          | Pass    |
| NVNT      | ac80 | 5530            | Ant1    | -9.52               | 0.55             | -8.97           | 11          | Pass    |
| NVNT      | ac80 | 5610            | Ant1    | -8.83               | 0.55             | -8.28           | 11          | Pass    |






## Test Graphs

PSD NVNT a 5500MHz Ant1

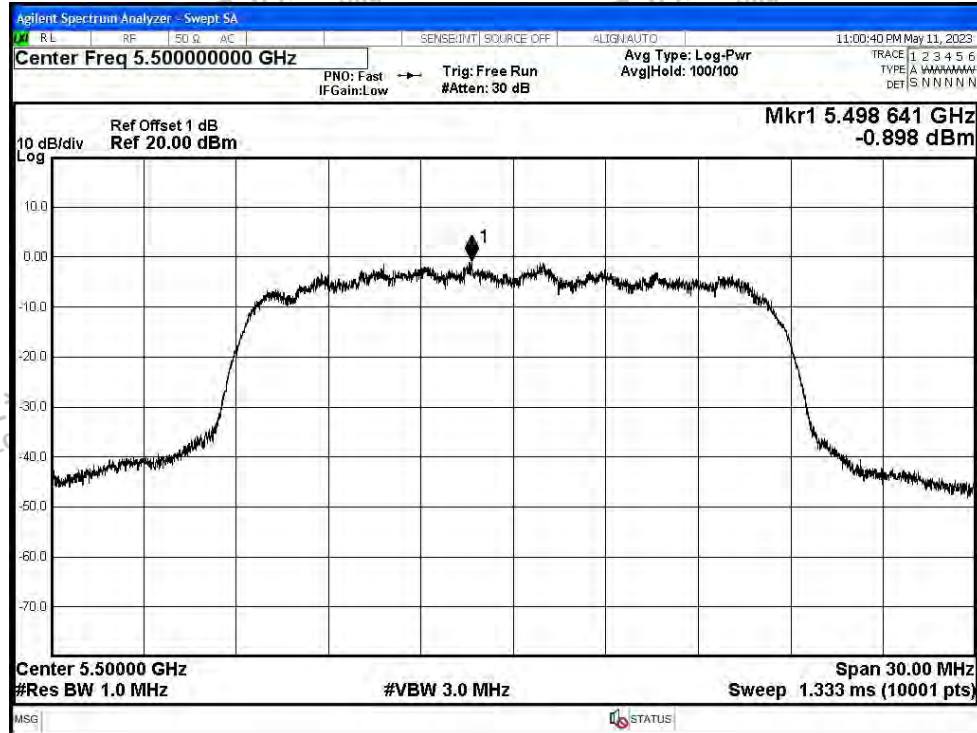


PSD NVNT a 5580MHz Ant1

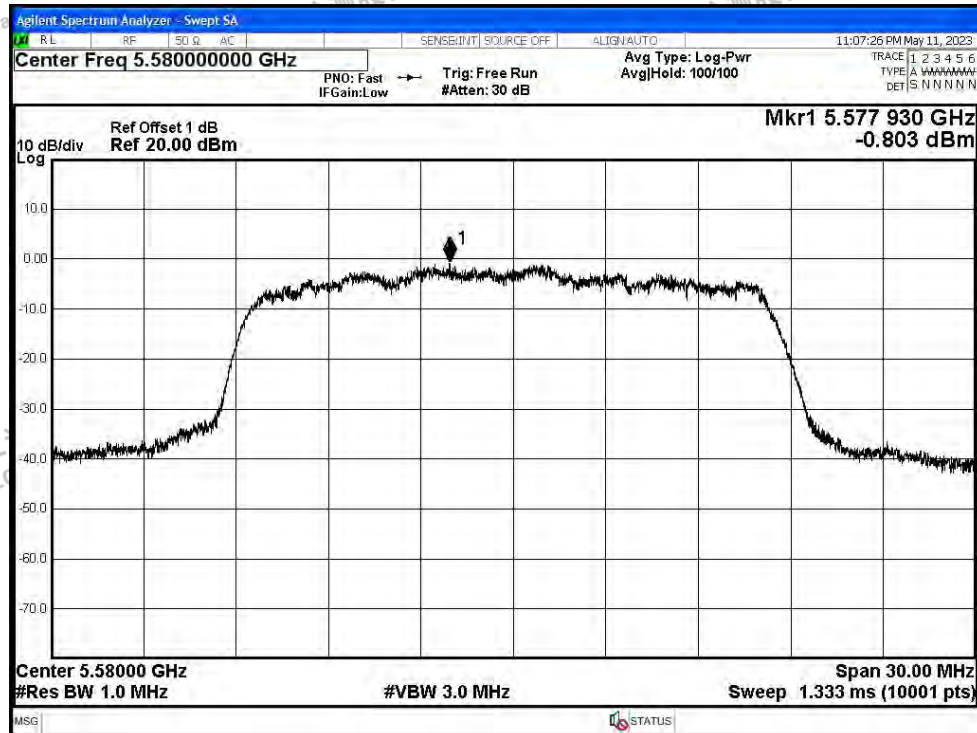








PSD NVNT a 5700MHz Ant1


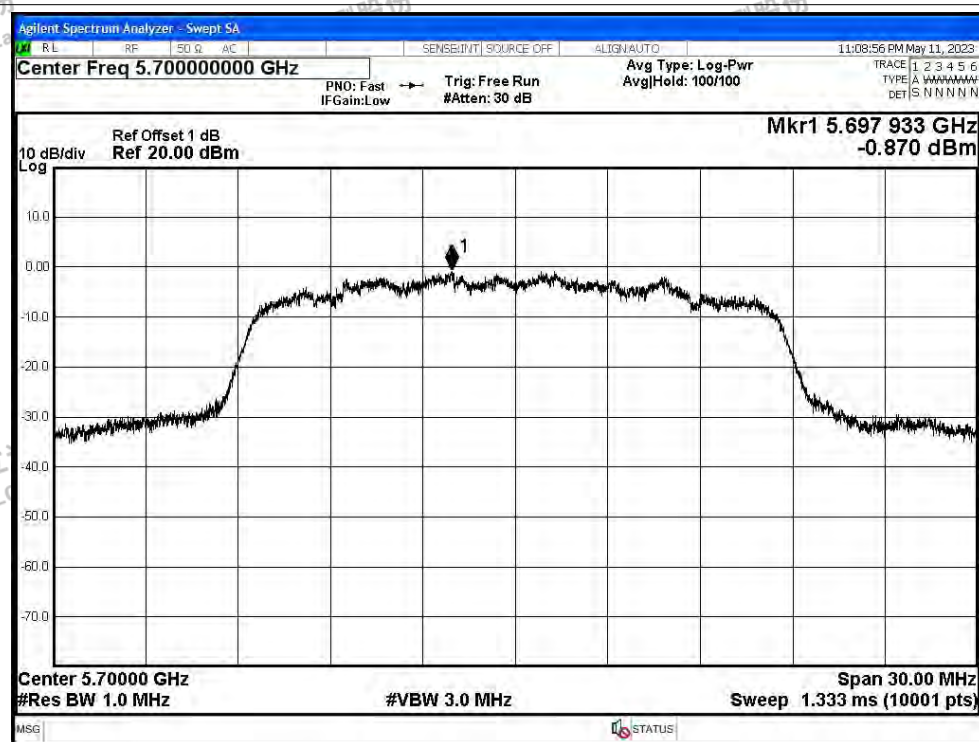


PSD NVNT n20 5500MHz Ant1

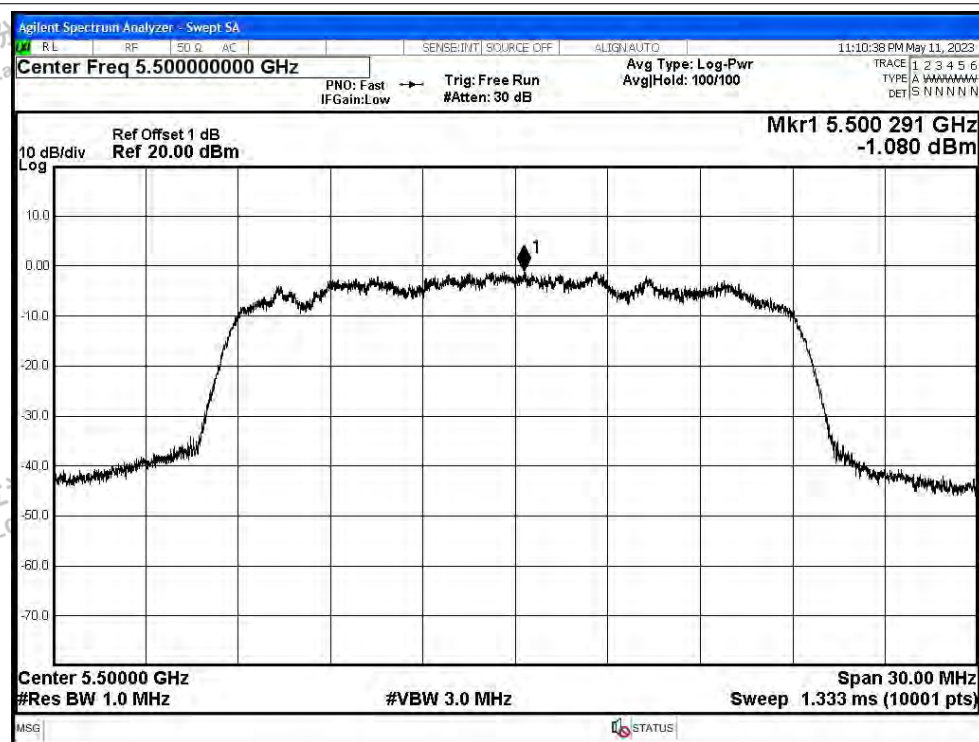

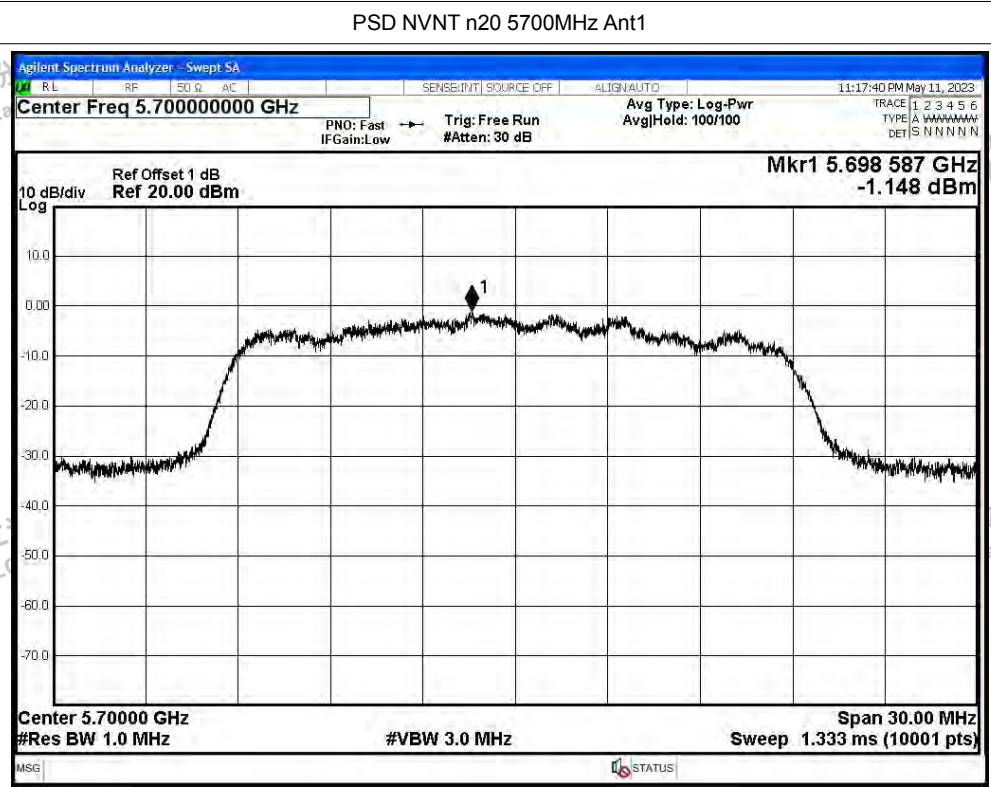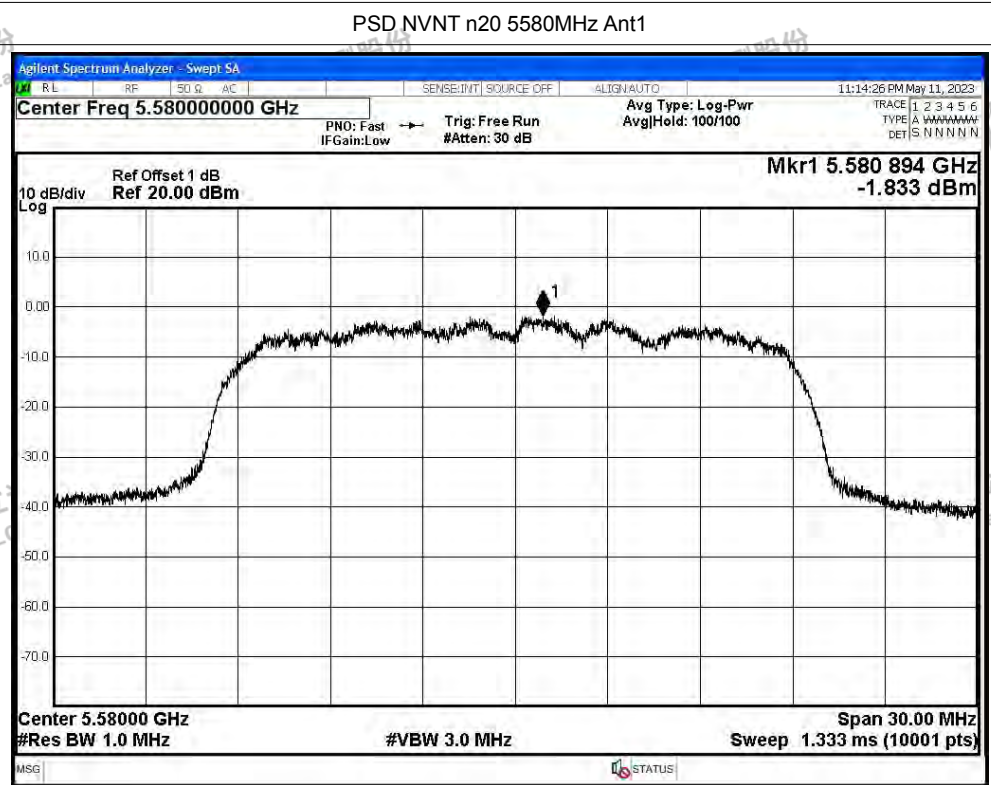


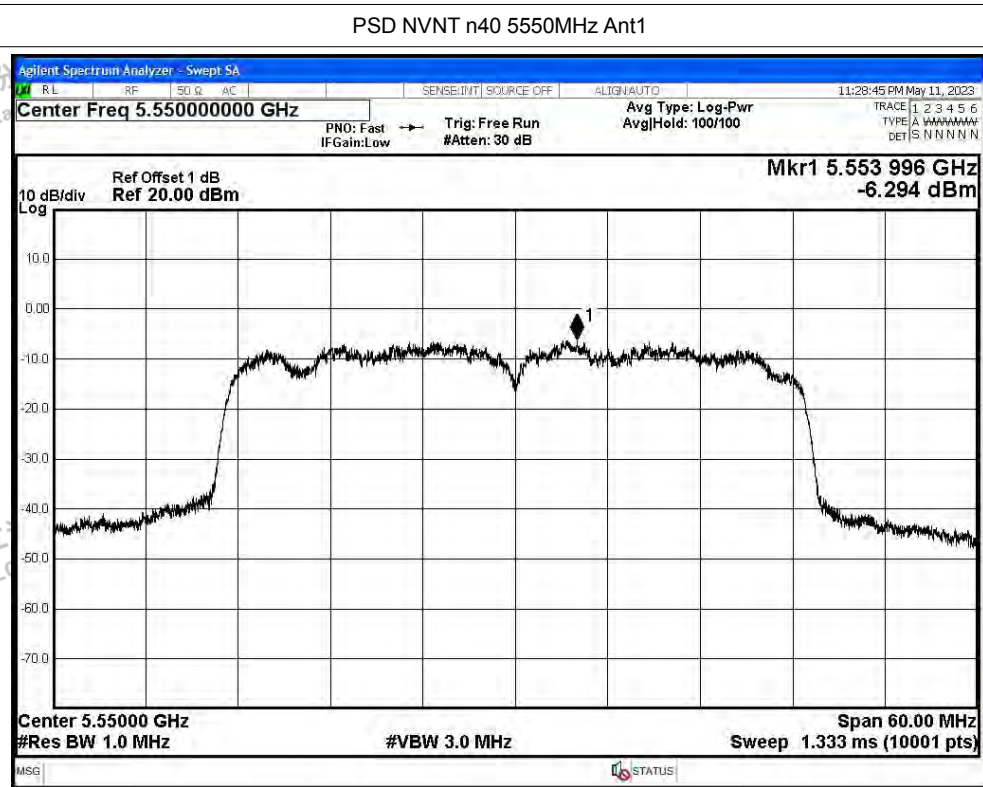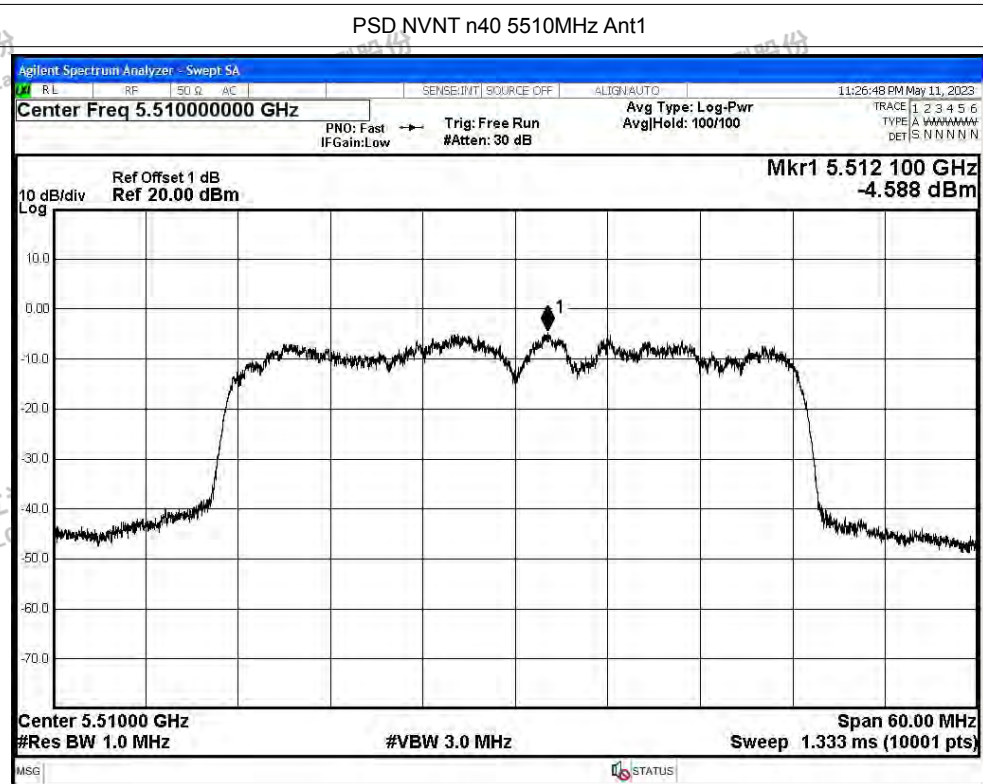

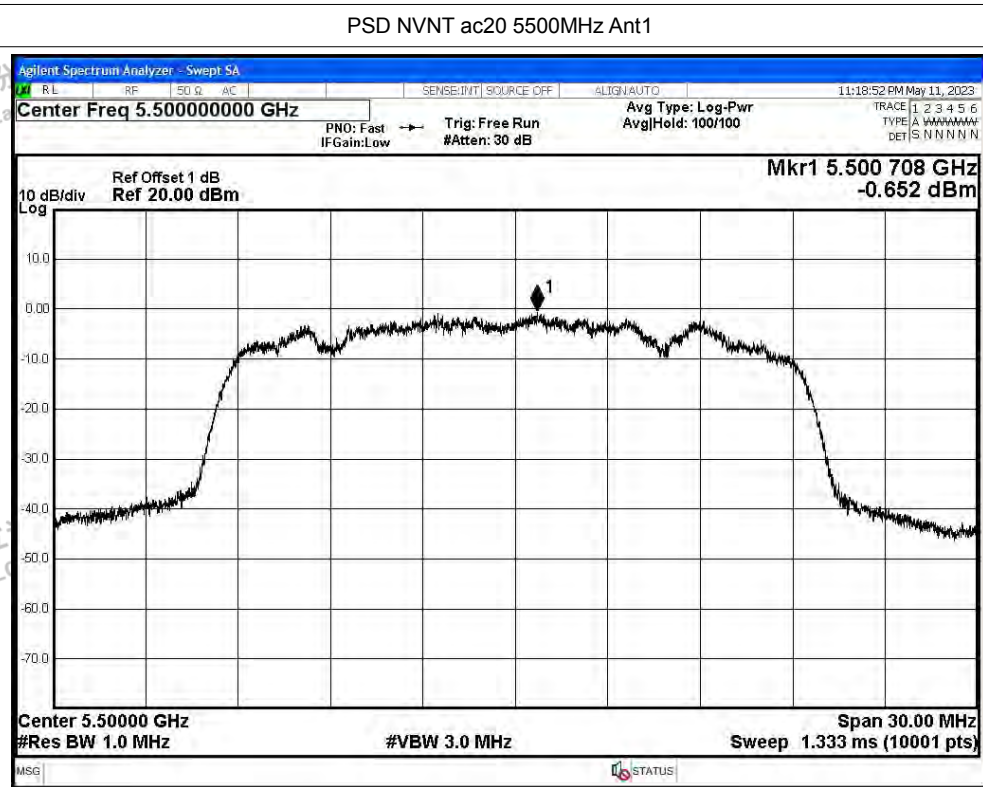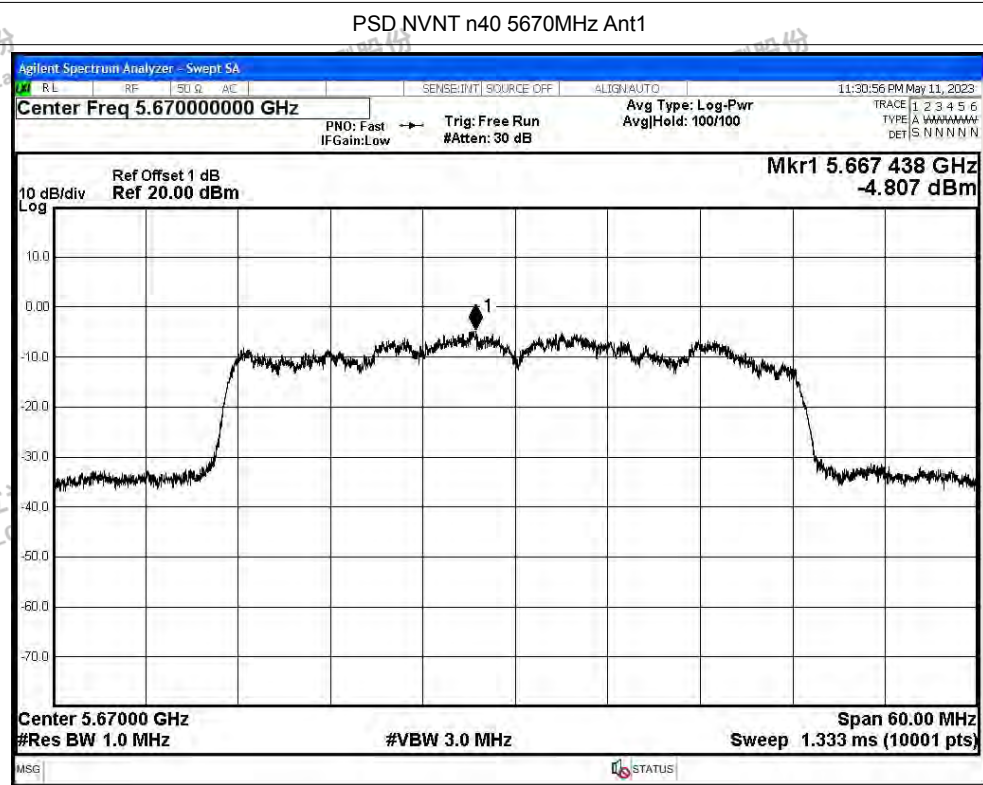




PSD NVNT ac20 5580MHz Ant1

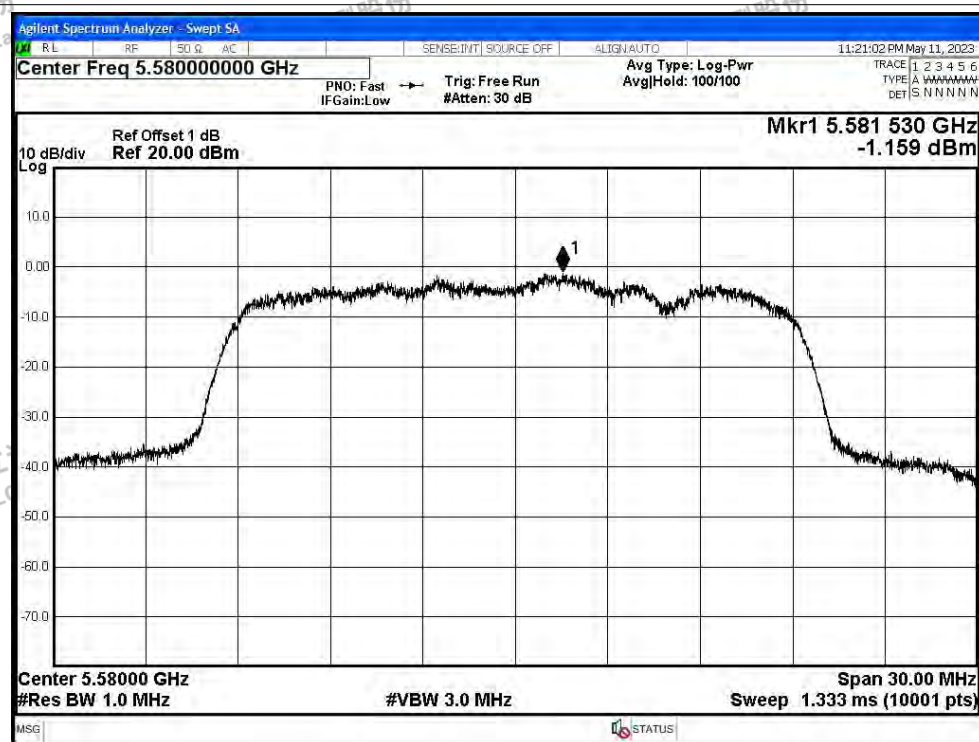


PSD NVNT ac20 5700MHz Ant1

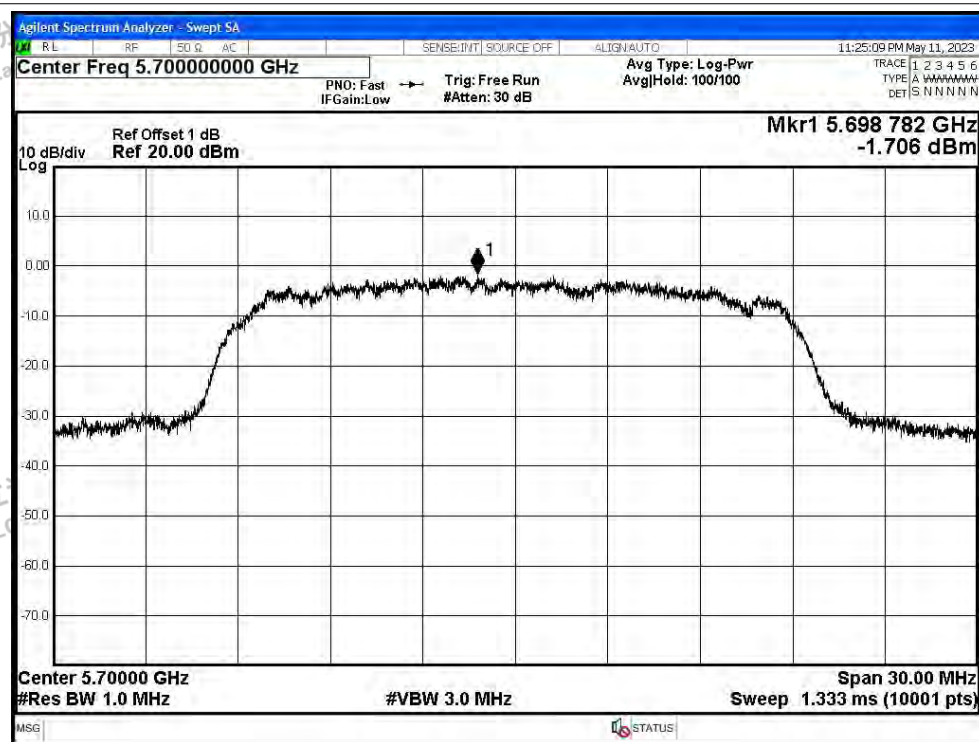




PSD NVNT ac40 5510MHz Ant1

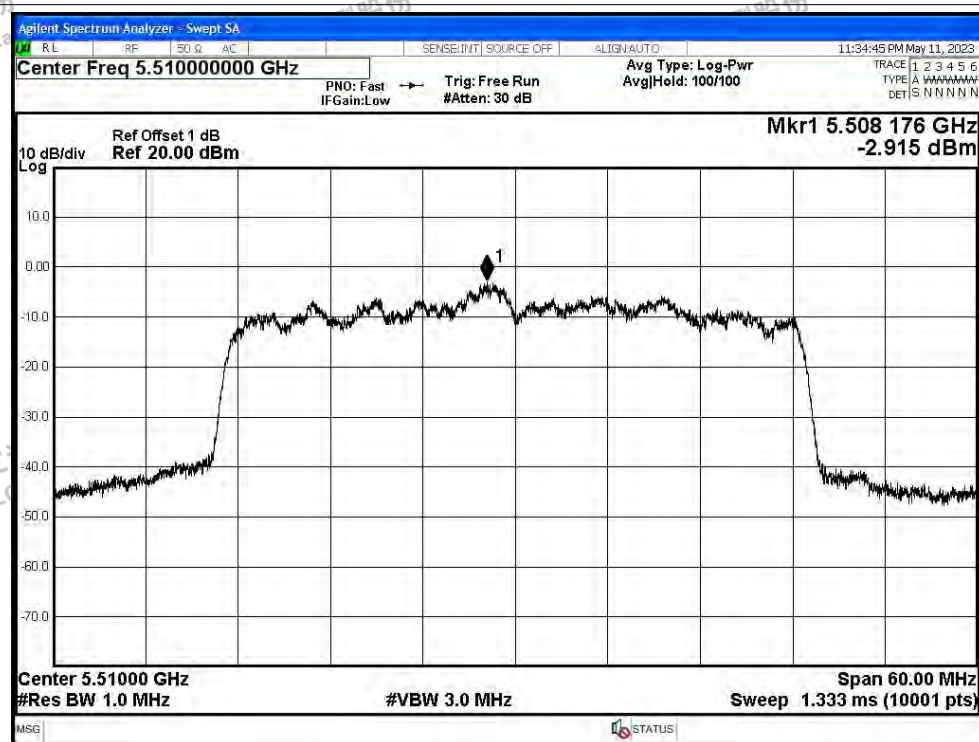


PSD NVNT ac40 5550MHz Ant1

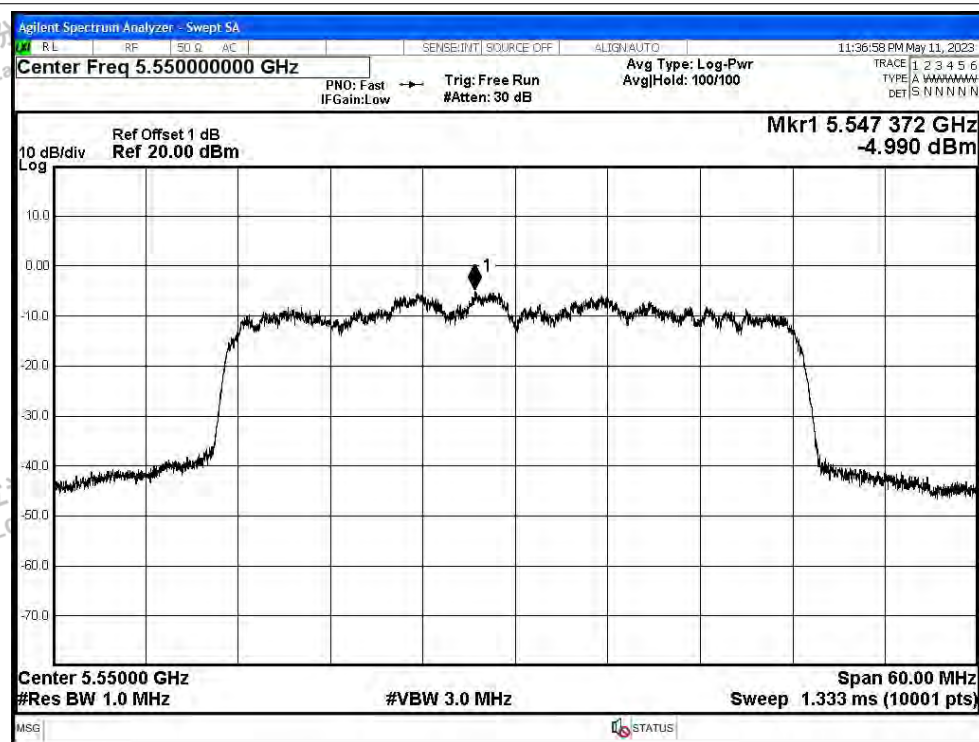





PSD NVNT ac40 5670MHz Ant1

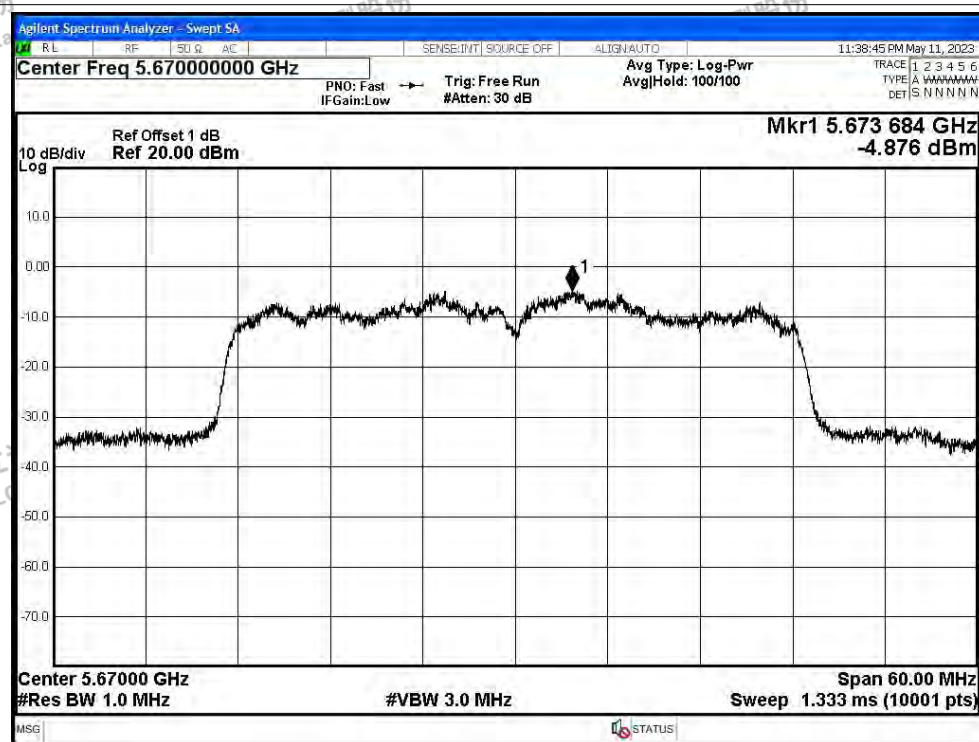

PSD NVNT ac80 5530MHz Ant1

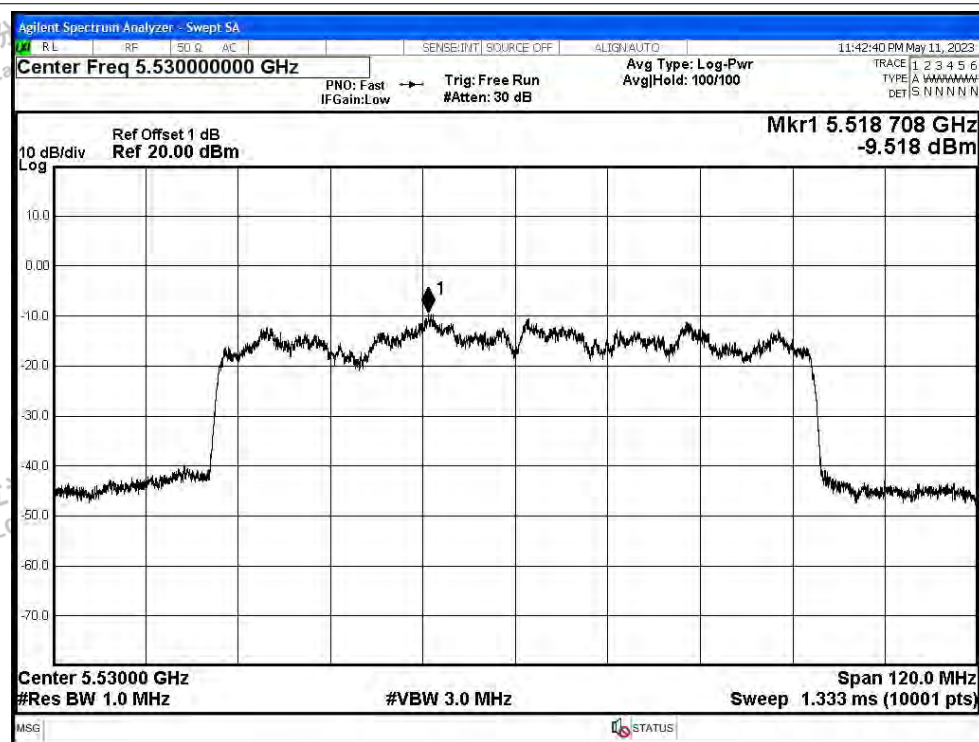

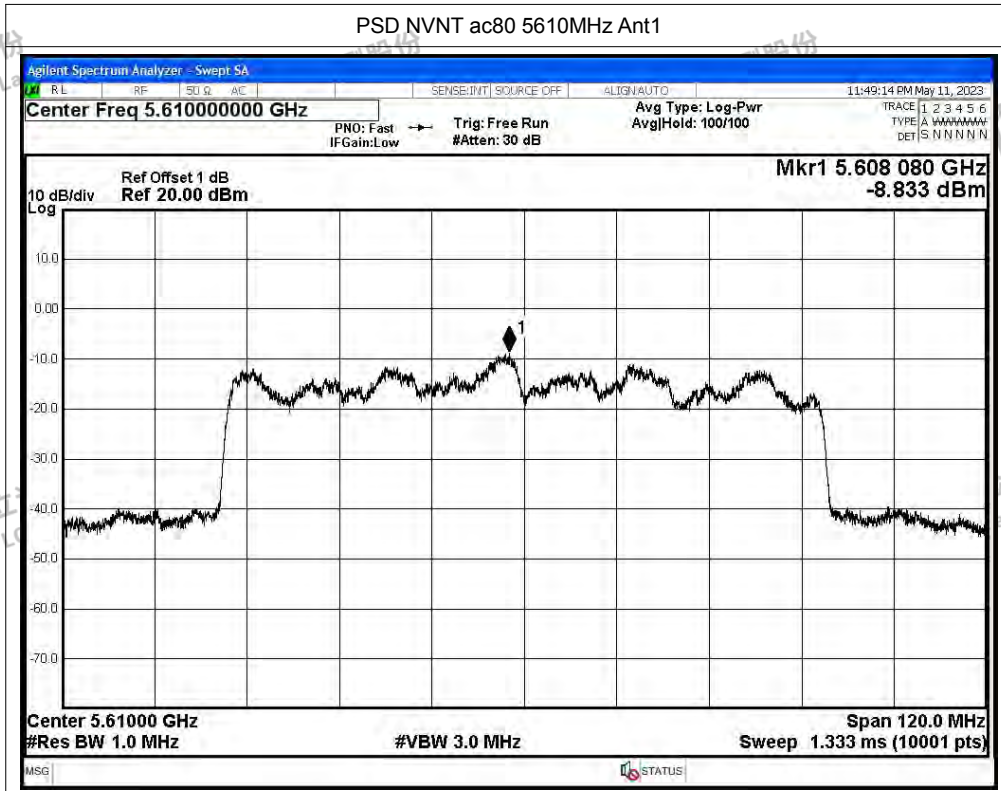



## F.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------|----------|----------------|---------|
| NVNT      | a    | 5500            | Ant1    | 5460            | -44.28      | 2          | 52.95      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5500            | Ant1    | 5460            | -55.52      | 2          | 41.71      | Average  | 54             | Pass    |
| NVNT      | a    | 5500            | Ant1    | 5463.6          | -35.89      | 2          | 61.34      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5500            | Ant1    | 5469.4          | -54.19      | 2          | 43.04      | Average  | 54             | Pass    |
| NVNT      | a    | 5500            | Ant1    | 5470            | -38.28      | 2          | 58.95      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5500            | Ant1    | 5470            | -54.26      | 2          | 42.97      | Average  | 54             | Pass    |
| NVNT      | a    | 5700            | Ant1    | 5725            | -31.62      | 2          | 65.61      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5700            | Ant1    | 5725            | -51.58      | 2          | 45.65      | Average  | 54             | Pass    |
| NVNT      | a    | 5700            | Ant1    | 5725.2          | -51.51      | 2          | 45.72      | Average  | 54             | Pass    |
| NVNT      | a    | 5700            | Ant1    | 5735            | -46.18      | 2          | 51.05      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5700            | Ant1    | 5735            | -54.67      | 2          | 42.56      | Average  | 54             | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5460            | -38.28      | 2          | 58.95      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5460            | -55.82      | 2          | 41.41      | Average  | 54             | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5464.6          | -34.14      | 2          | 63.09      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5469.2          | -55.01      | 2          | 42.22      | Average  | 54             | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5470            | -42.68      | 2          | 54.55      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5500            | Ant1    | 5470            | -55.07      | 2          | 42.16      | Average  | 54             | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 5725            | -34.26      | 2          | 62.97      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 5725            | -49.16      | 2          | 48.07      | Average  | 54             | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 5725.6          | -30.15      | 2          | 67.08      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 5735            | -41.86      | 2          | 55.37      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5700            | Ant1    | 5735            | -53.56      | 2          | 43.67      | Average  | 54             | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5460            | -36.49      | 2          | 60.74      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5460            | -55.47      | 2          | 41.76      | Average  | 54             | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5468.2          | -31.38      | 2          | 65.85      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5469.4          | -53.58      | 2          | 43.65      | Average  | 54             | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5470            | -44.85      | 2          | 52.38      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5510            | Ant1    | 5470            | -53.72      | 2          | 43.51      | Average  | 54             | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5725            | -45.88      | 2          | 51.35      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5725            | -55.84      | 2          | 41.39      | Average  | 54             | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5725.8          | -40.55      | 2          | 56.68      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5727.4          | -55.46      | 2          | 41.77      | Average  | 54             | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5735            | -46.57      | 2          | 50.66      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5670            | Ant1    | 5735            | -56.16      | 2          | 41.07      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 5460            | -43.59      | 2          | 53.64      | Peak     | 68.2           | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 5460            | -54.37      | 2          | 42.86      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 5467.2          | -29.04      | 2          | 68.19      | Peak     | 68.2           | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 5469.8          | -51.86      | 2          | 45.37      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5500            | Ant1    | 5470            | -35.78      | 2          | 61.45      | Peak     | 68.2           | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




|      |      |      |      |          |        |   |       |         |      |      |
|------|------|------|------|----------|--------|---|-------|---------|------|------|
| NVNT | ac20 | 5500 | Ant1 | 5470     | -51.91 | 2 | 45.32 | Average | 54   | Pass |
| NVNT | ac20 | 5700 | Ant1 | 5725     | -34.92 | 2 | 62.31 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5700 | Ant1 | 5725     | -49.06 | 2 | 48.17 | Average | 54   | Pass |
| NVNT | ac20 | 5700 | Ant1 | 5727.4   | -33.4  | 2 | 63.83 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5700 | Ant1 | 5735     | -43.46 | 2 | 53.77 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5700 | Ant1 | 5735     | -53.6  | 2 | 43.63 | Average | 54   | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5460     | -43.61 | 2 | 53.62 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5460     | -55.73 | 2 | 41.5  | Average | 54   | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5468.6   | -41.41 | 2 | 55.82 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5469.6   | -54.46 | 2 | 42.77 | Average | 54   | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5470     | -46.19 | 2 | 51.04 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5510 | Ant1 | 5470     | -54.72 | 2 | 42.51 | Average | 54   | Pass |
| NVNT | ac40 | 5670 | Ant1 | 5725     | -33.94 | 2 | 63.29 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5670 | Ant1 | 5725     | -45.31 | 2 | 51.92 | Average | 54   | Pass |
| NVNT | ac40 | 5670 | Ant1 | 5727.4   | -31.38 | 2 | 65.85 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5670 | Ant1 | 5735     | -37.11 | 2 | 60.12 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5670 | Ant1 | 5735     | -48.66 | 2 | 48.57 | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5725     | -46.89 | 2 | 50.34 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5725     | -56.71 | 2 | 40.52 | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5727.02  | -46.27 | 2 | 50.96 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5729.585 | -56.29 | 2 | 40.94 | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5735     | -48.5  | 2 | 48.73 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5735     | -56.62 | 2 | 40.61 | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5460     | -37.85 | 2 | 59.38 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5460     | -53.32 | 2 | 43.91 | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5469.2   | -36.6  | 2 | 60.63 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5470     | -49.73 | 2 | 47.5  | Average | 54   | Pass |
| NVNT | ac80 | 5530 | Ant1 | 5470     | -40.28 | 2 | 56.95 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5725     | -44.93 | 2 | 52.3  | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5725     | -55.48 | 2 | 41.75 | Average | 54   | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5732.13  | -42.51 | 2 | 54.72 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5728.85  | -54.85 | 2 | 42.38 | Average | 54   | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5735     | -46.31 | 2 | 50.92 | Peak    | 68.2 | Pass |
| NVNT | ac80 | 5610 | Ant1 | 5735     | -55.57 | 2 | 41.66 | Average | 54   | Pass |






## Test Graphs

## Restrict Band NVNT a 5500MHz Ant1 Peak

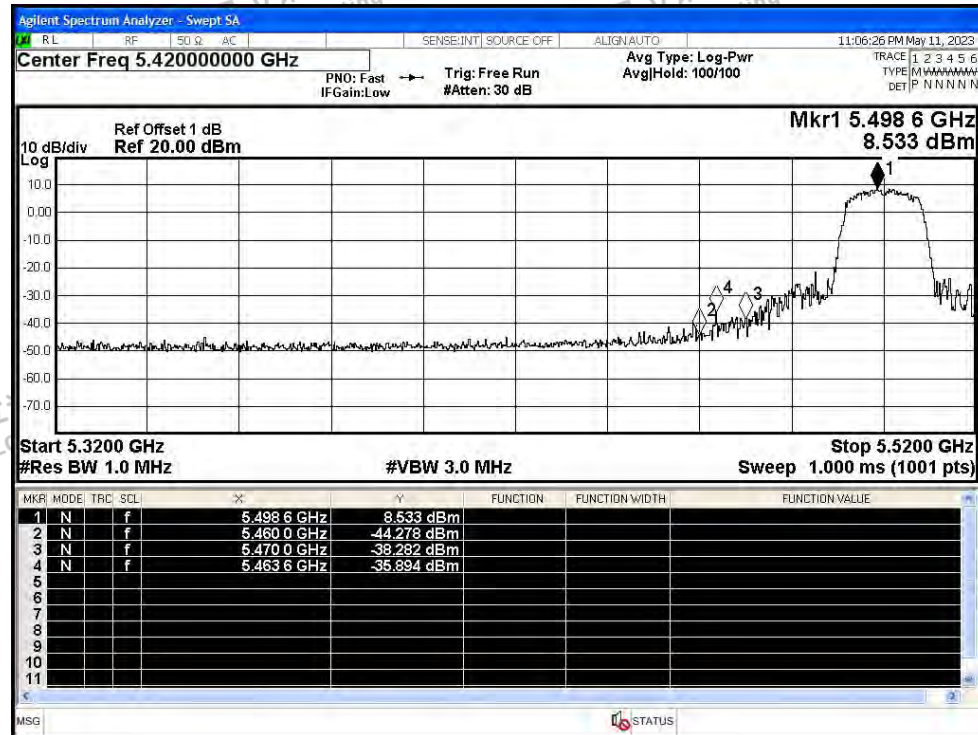

## Restrict Band NVNT a 5500MHz Ant1 Average

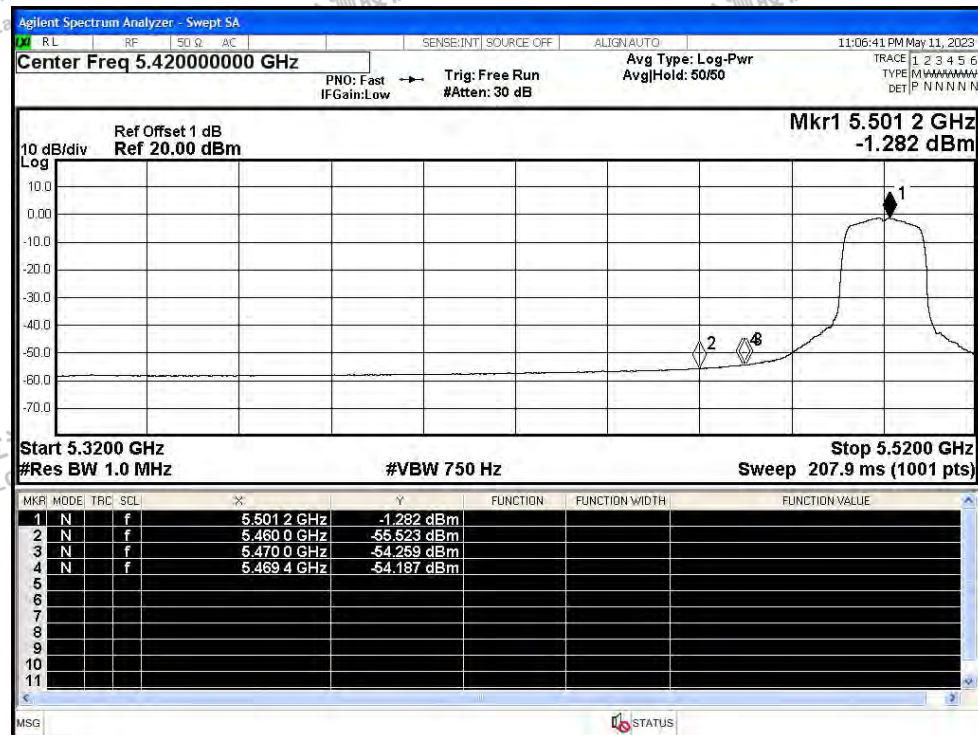

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5700MHz Ant1 Peak

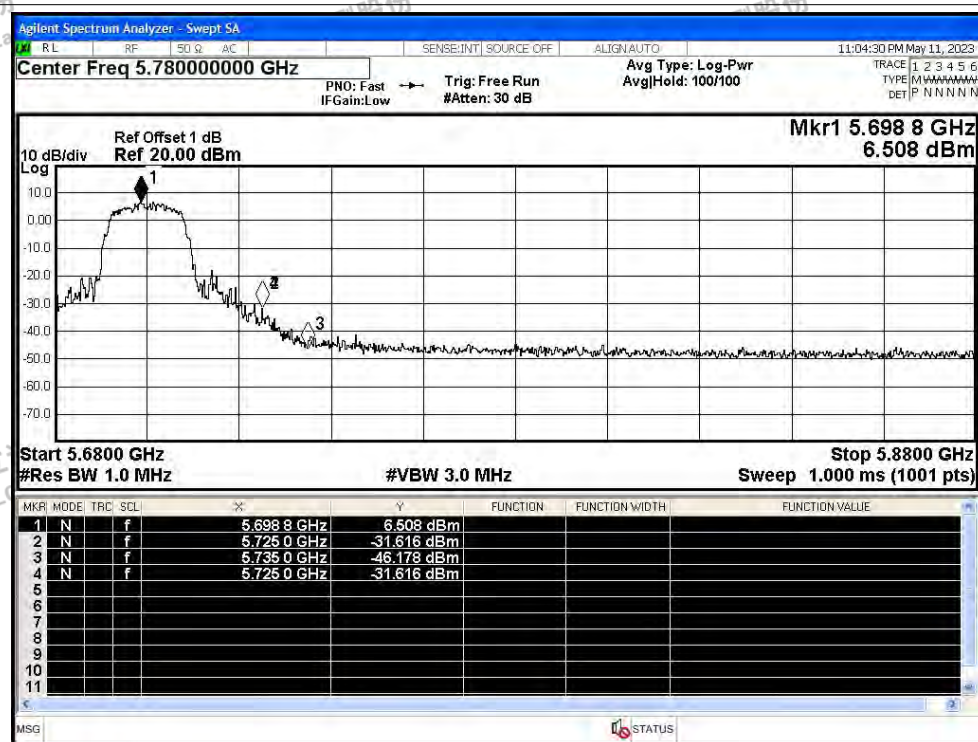

## Restrict Band NVNT a 5700MHz Ant1 Average

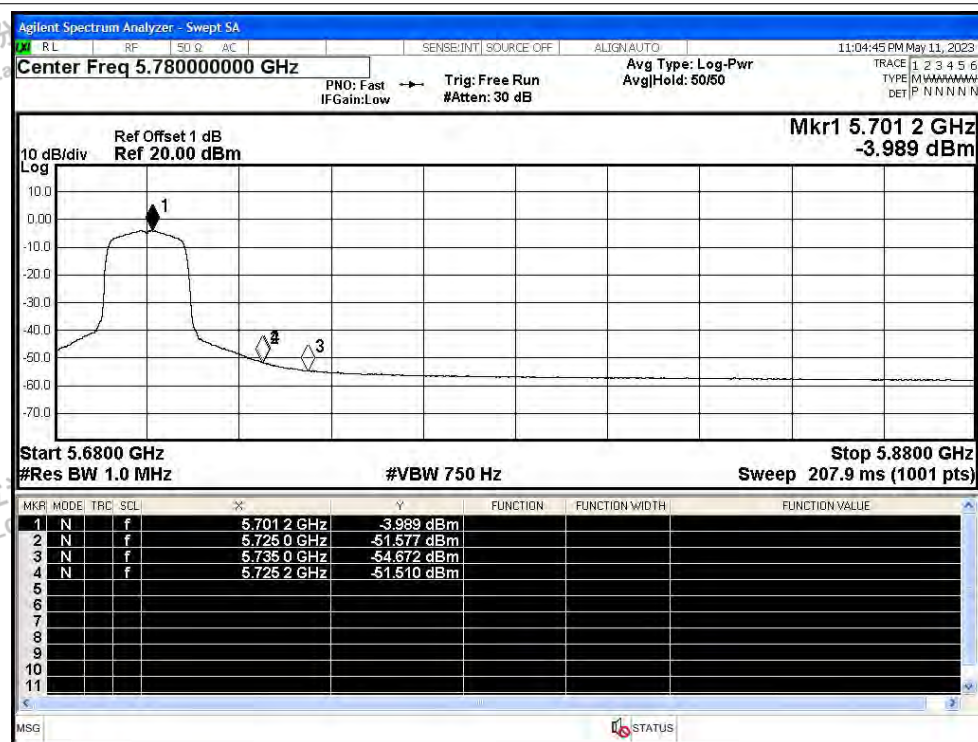

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5500MHz Ant1 Peak

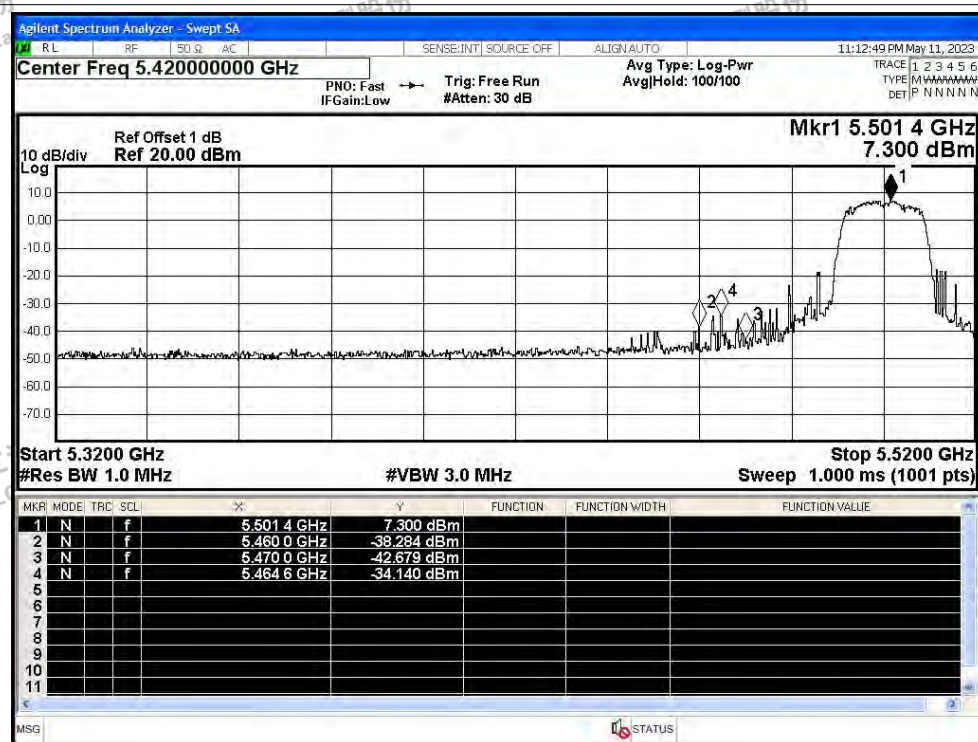

## Restrict Band NVNT n20 5500MHz Ant1 Average

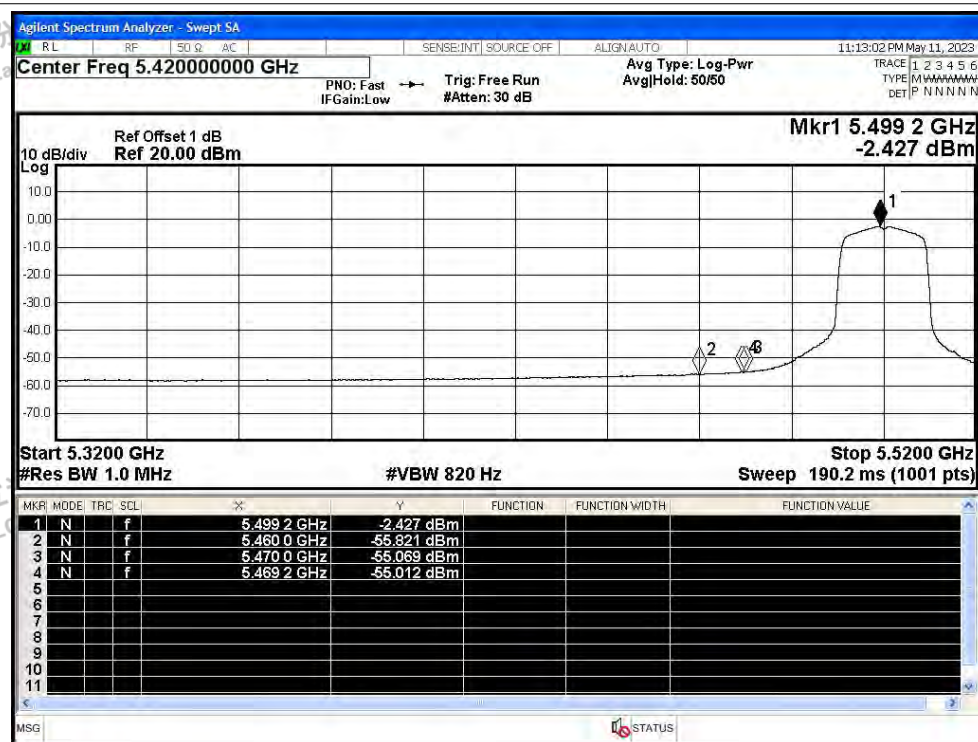

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5700MHz Ant1 Peak

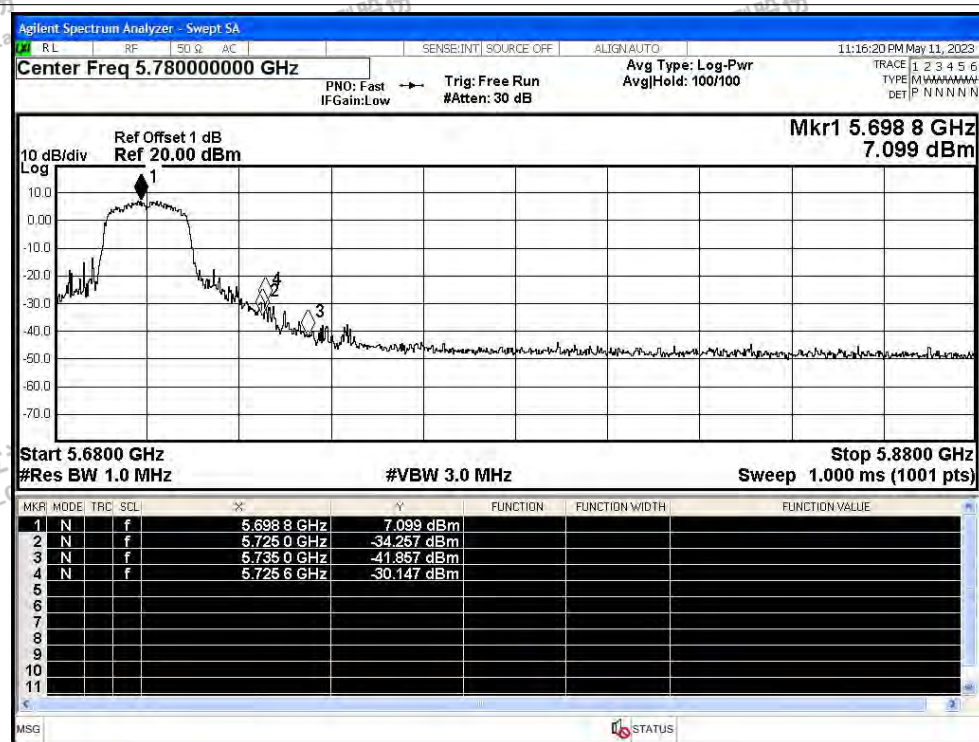


## Restrict Band NVNT n20 5700MHz Ant1 Average

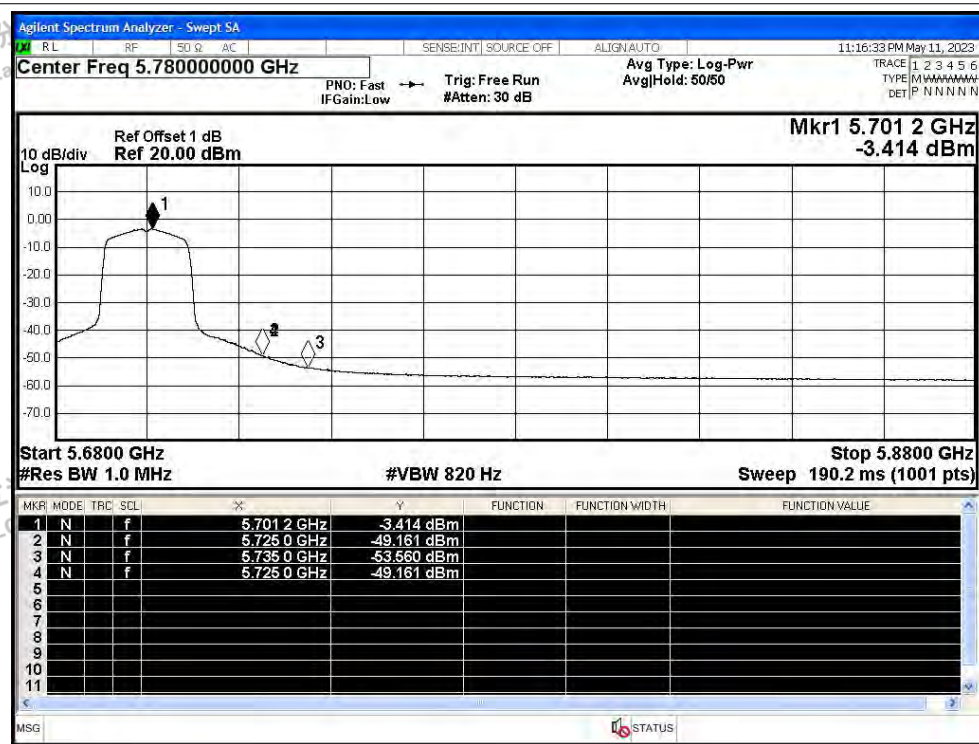




## Restrict Band NVNT n40 5510MHz Ant1 Peak

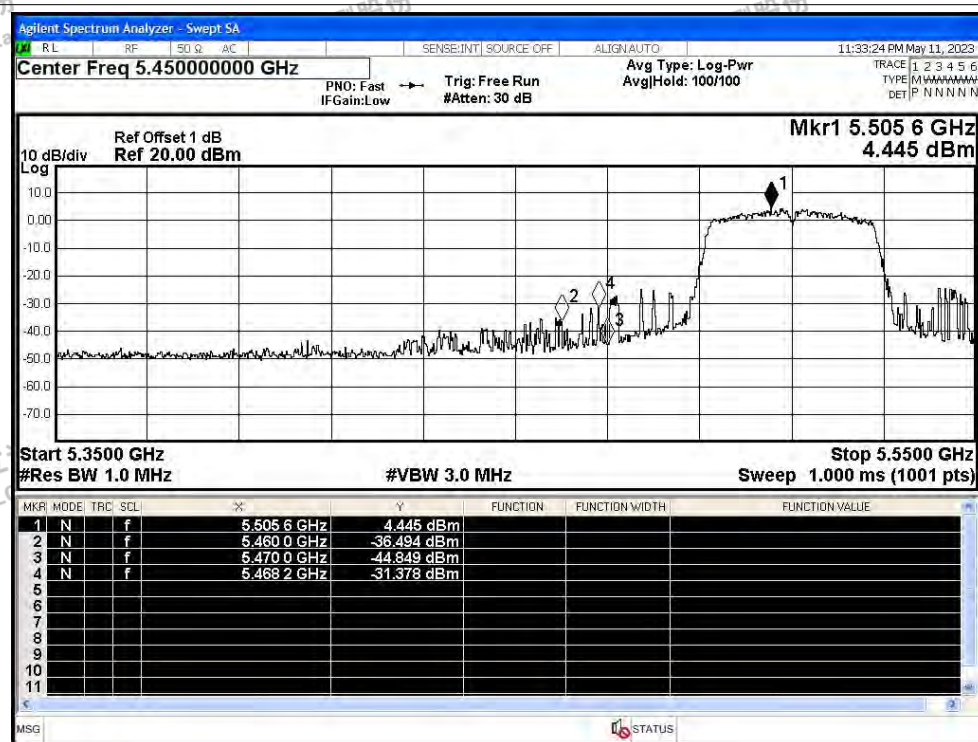


## Restrict Band NVNT n40 5510MHz Ant1 Average

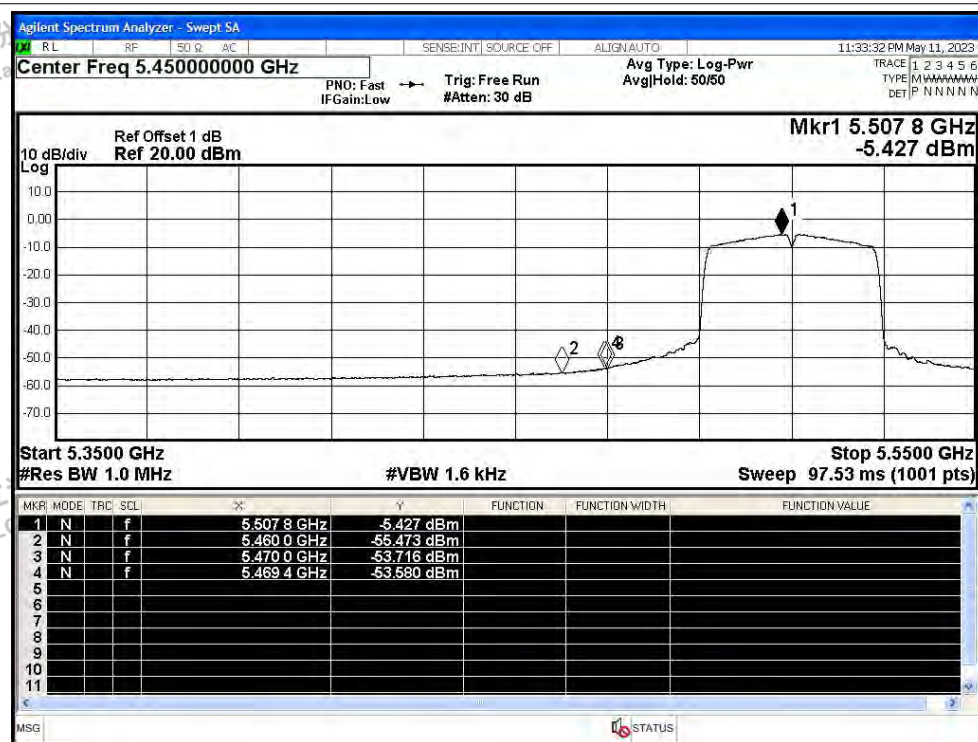




## Restrict Band NVNT n40 5670MHz Ant1 Peak

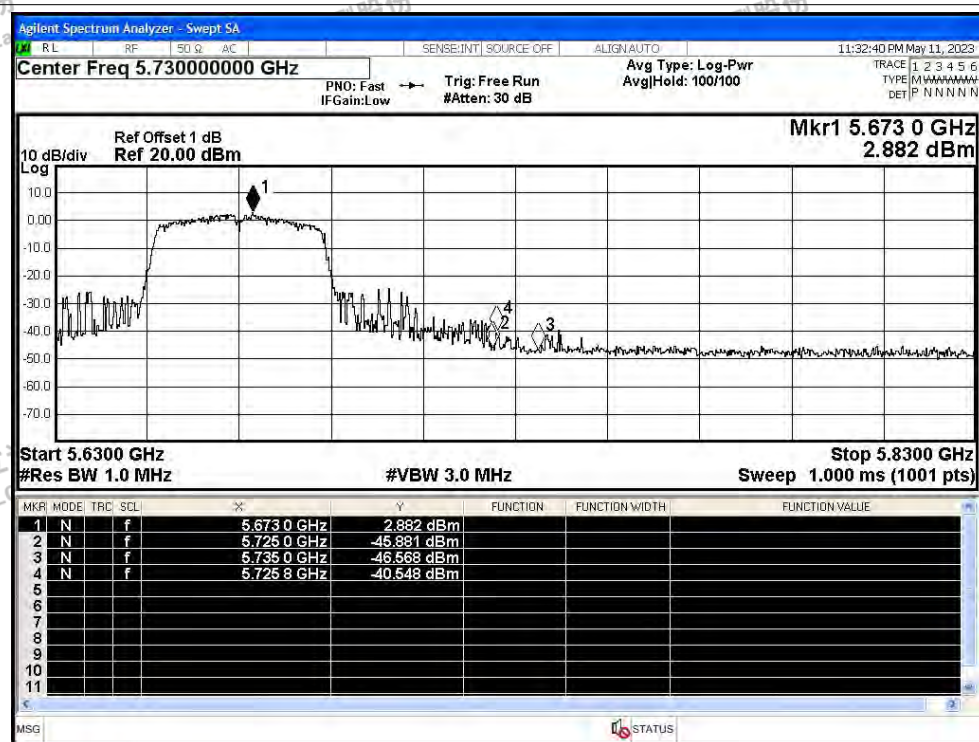

## Restrict Band NVNT n40 5670MHz Ant1 Average

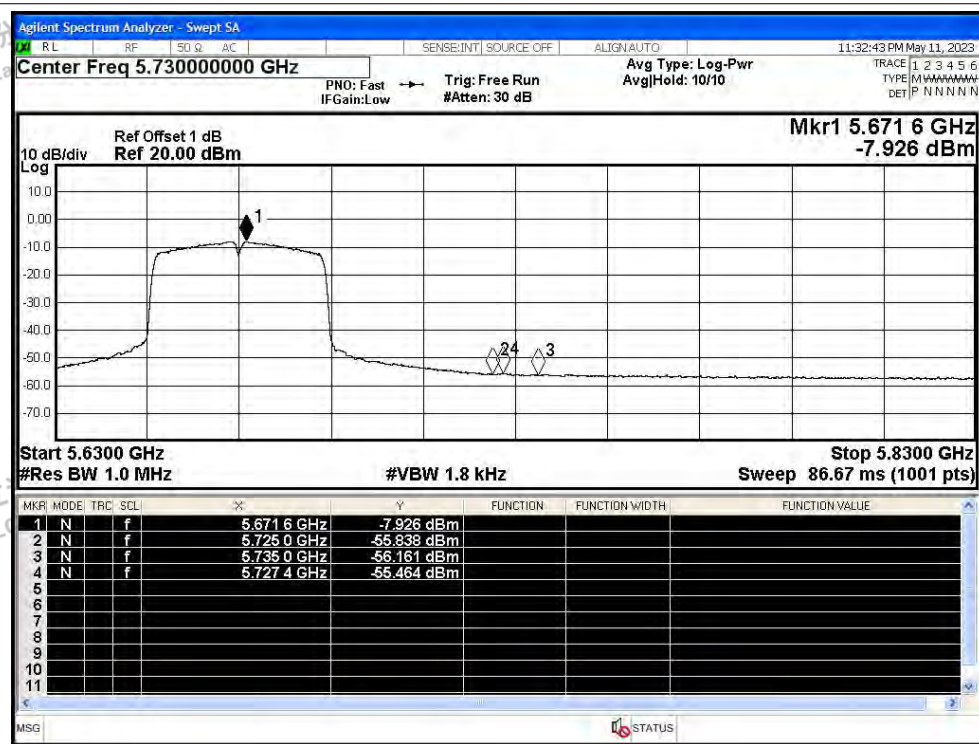

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5500MHz Ant1 Peak

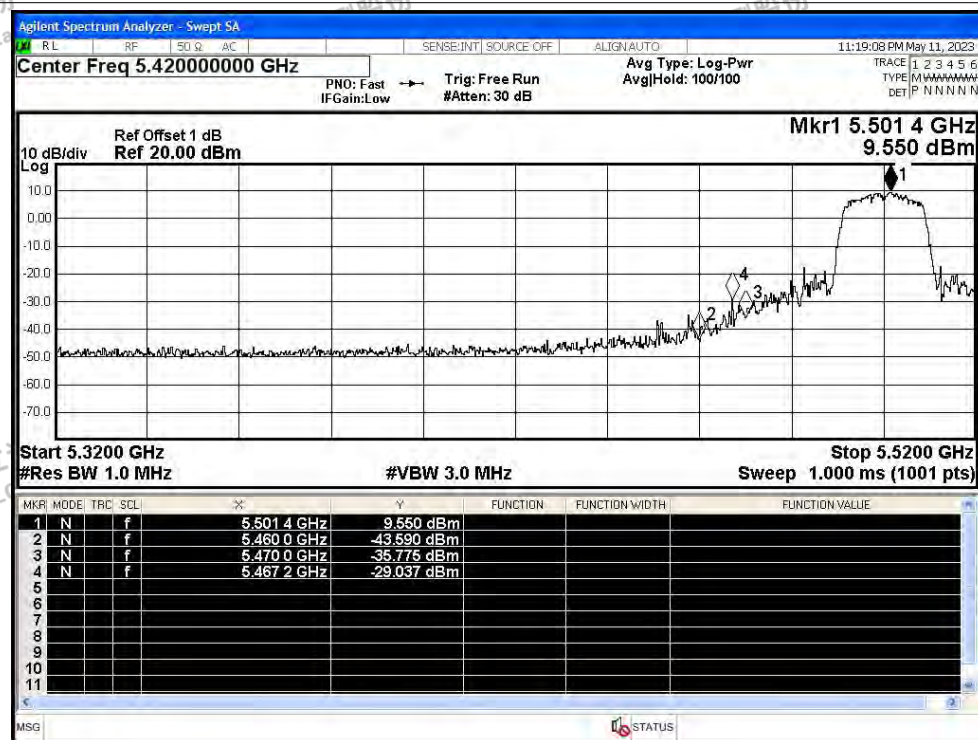

## Restrict Band NVNT ac20 5500MHz Ant1 Average

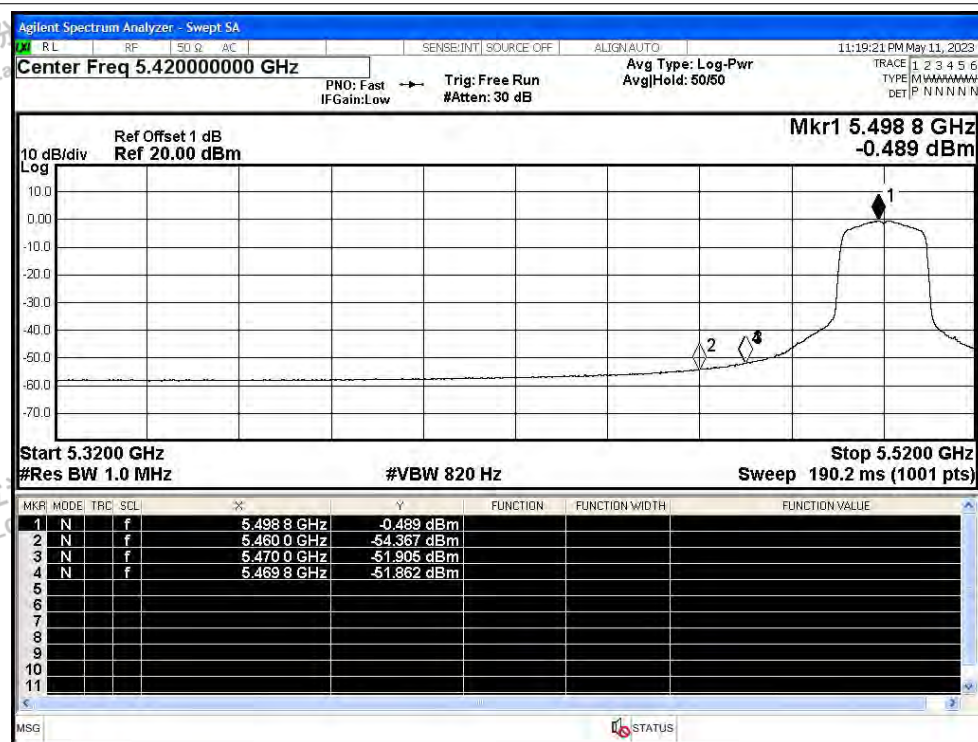

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5700MHz Ant1 Peak

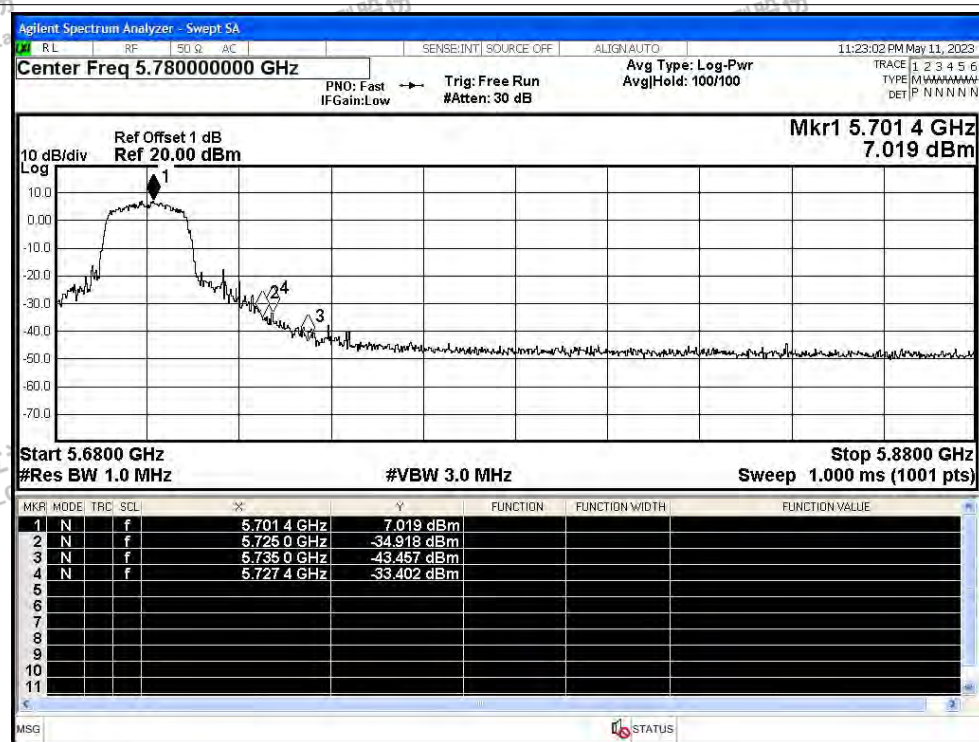

## Restrict Band NVNT ac20 5700MHz Ant1 Average

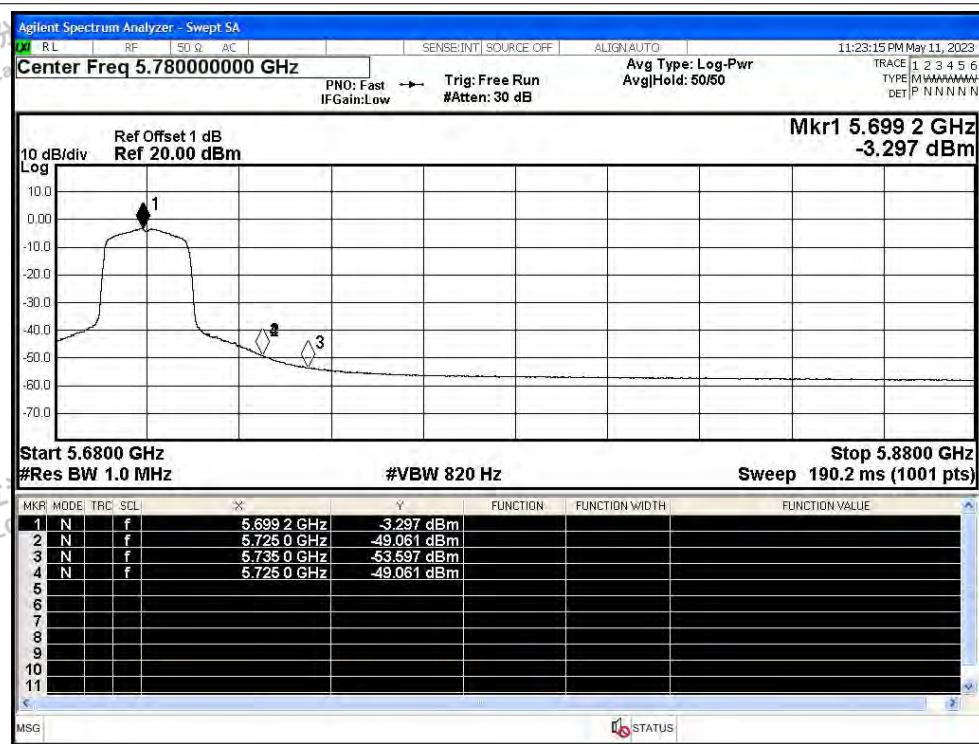

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5510MHz Ant1 Peak

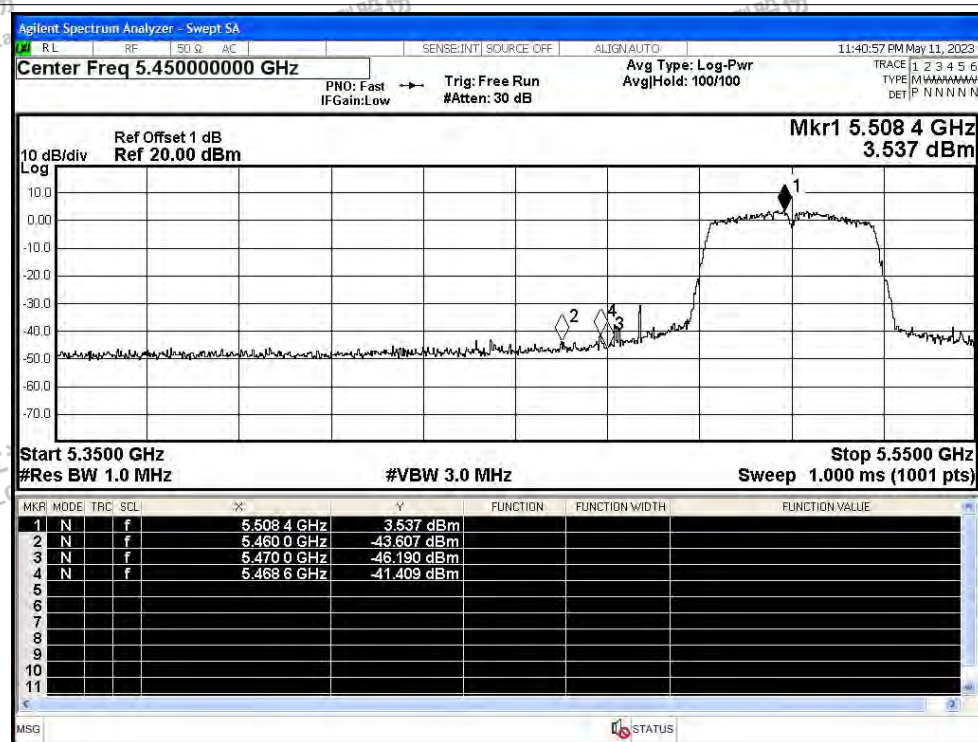

## Restrict Band NVNT ac40 5510MHz Ant1 Average

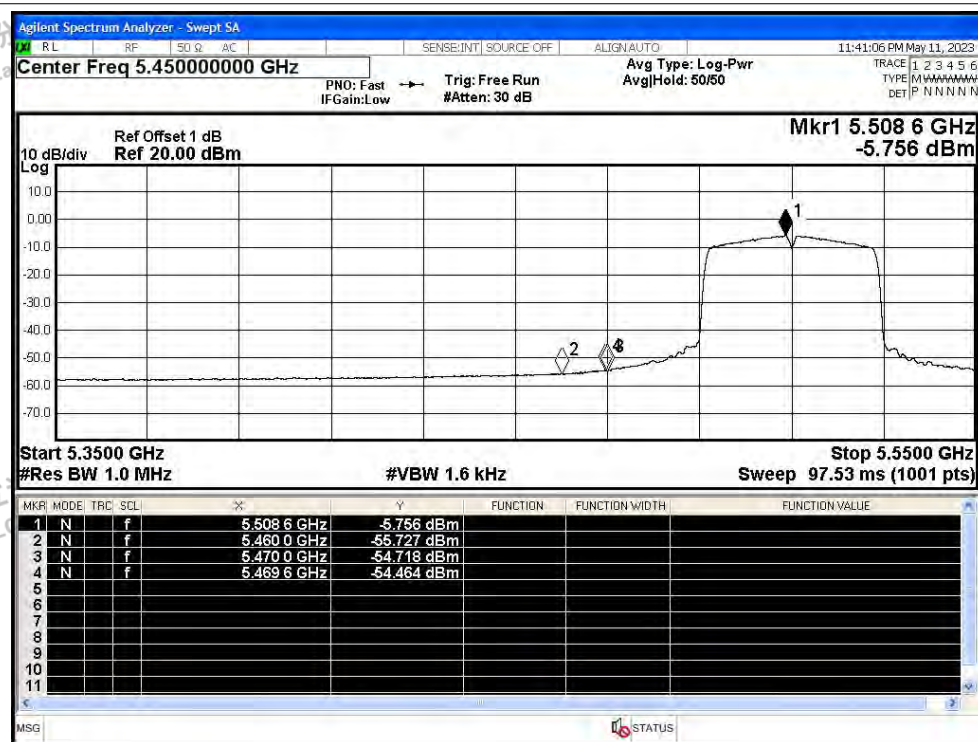

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5670MHz Ant1 Peak

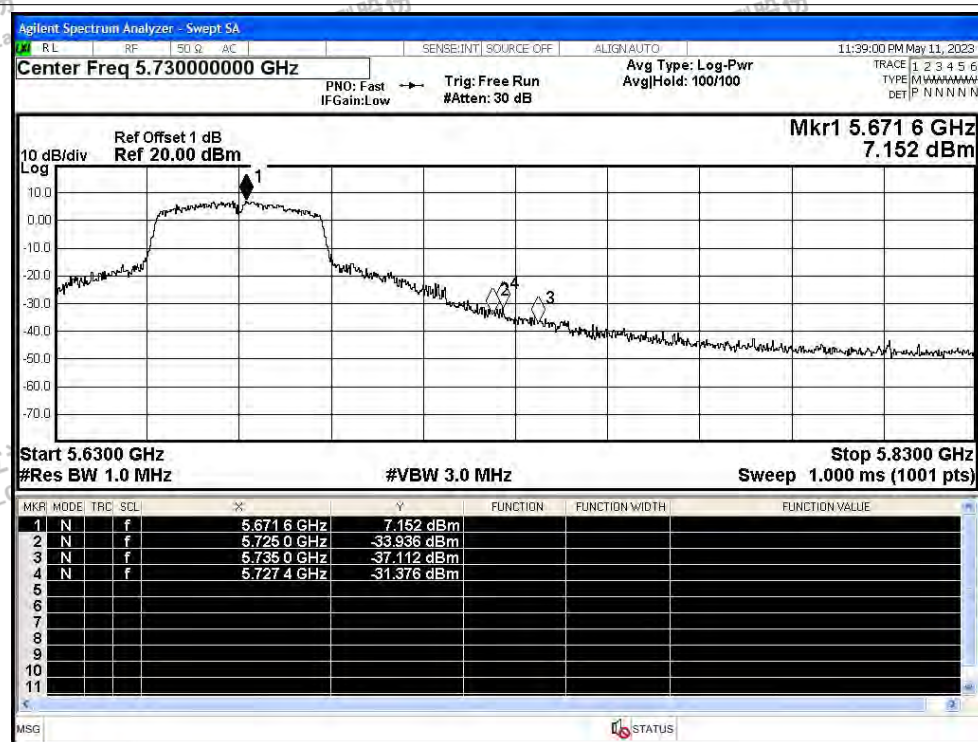


## Restrict Band NVNT ac40 5670MHz Ant1 Average

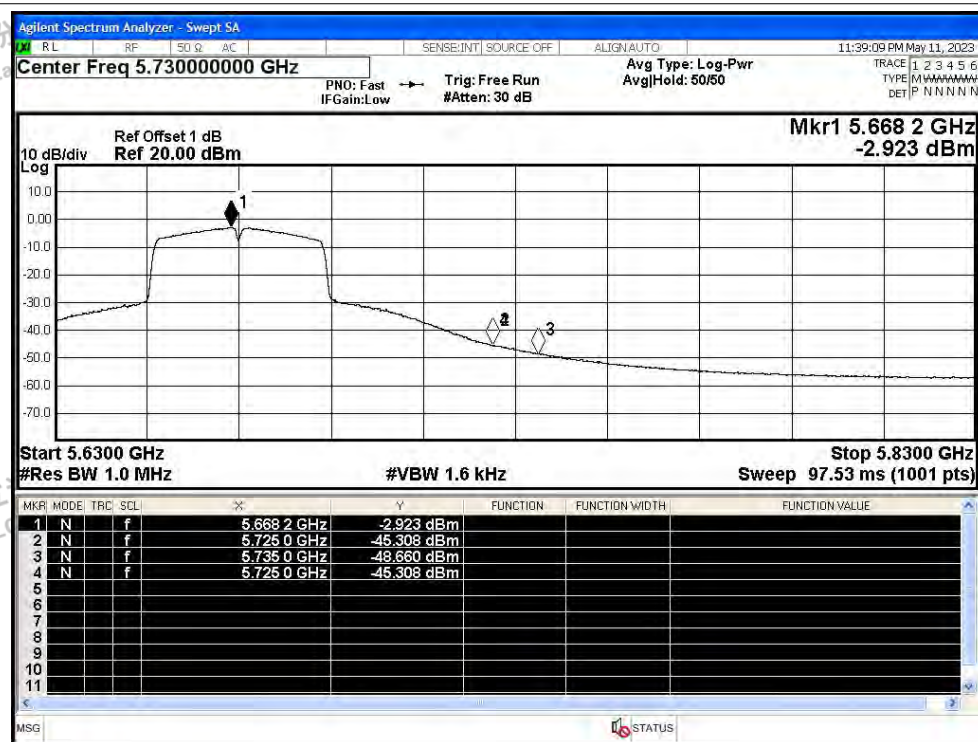




## Restrict Band NVNT ac80 5530MHz Ant1 Peak

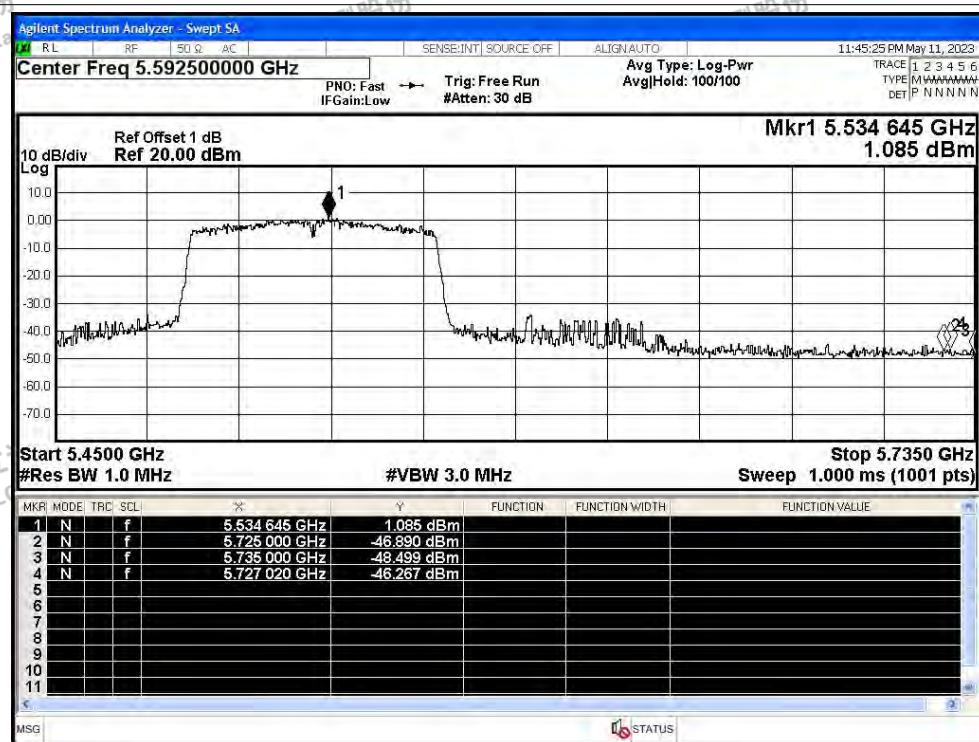


## Restrict Band NVNT ac80 5530MHz Ant1 Average

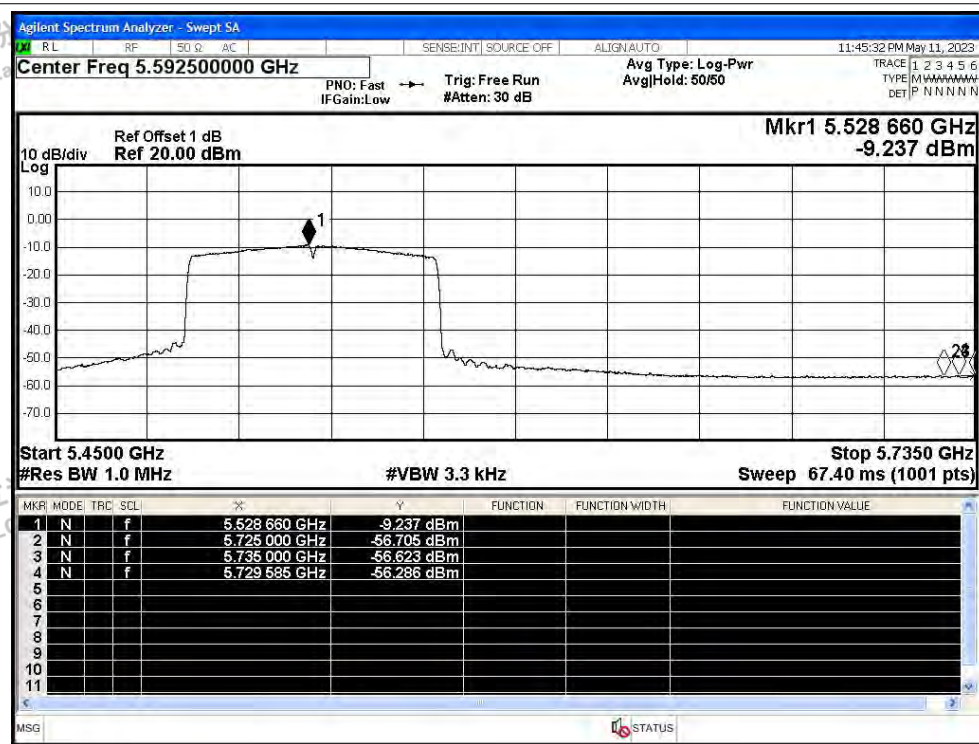




## Restrict Band NVNT ac80 5530MHz Ant1 Peak

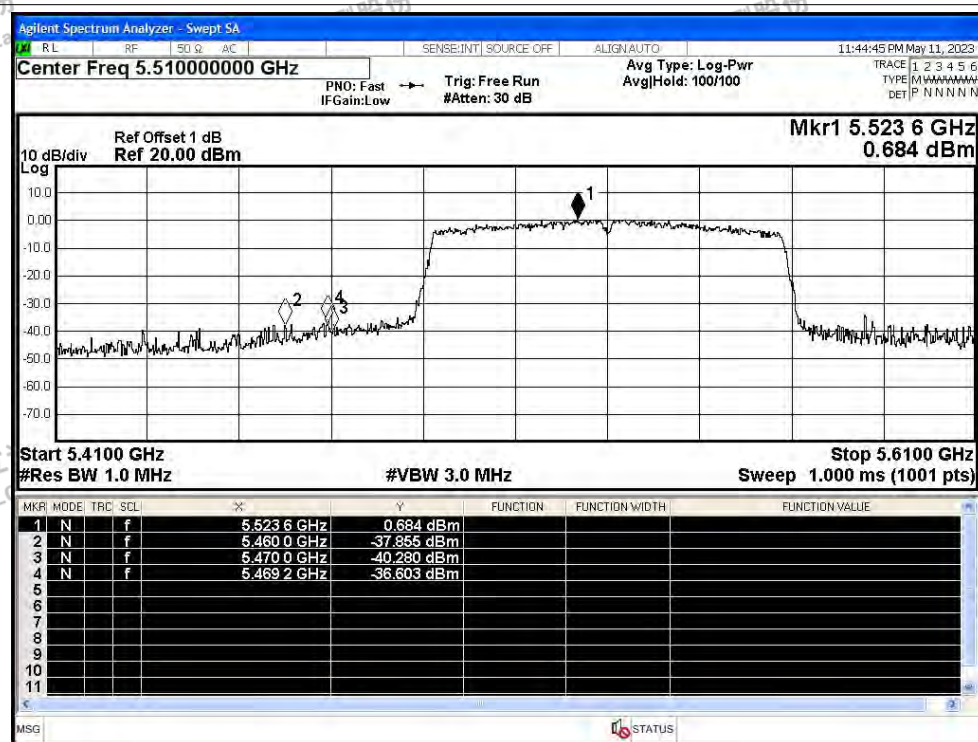

## Restrict Band NVNT ac80 5530MHz Ant1 Average

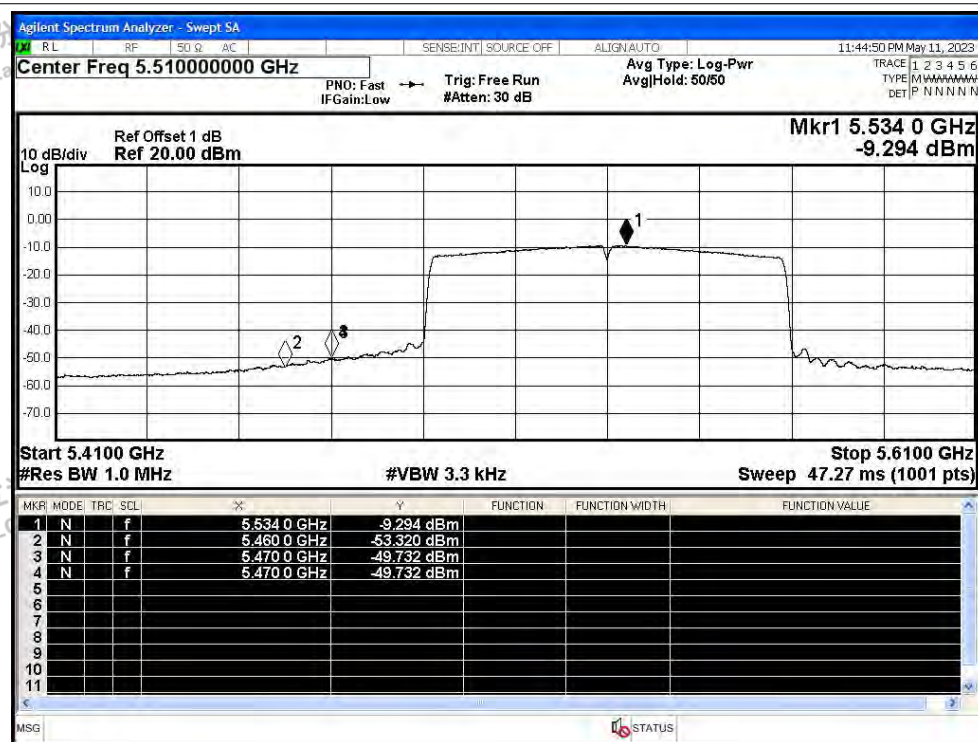

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac80 5610MHz Ant1 Peak

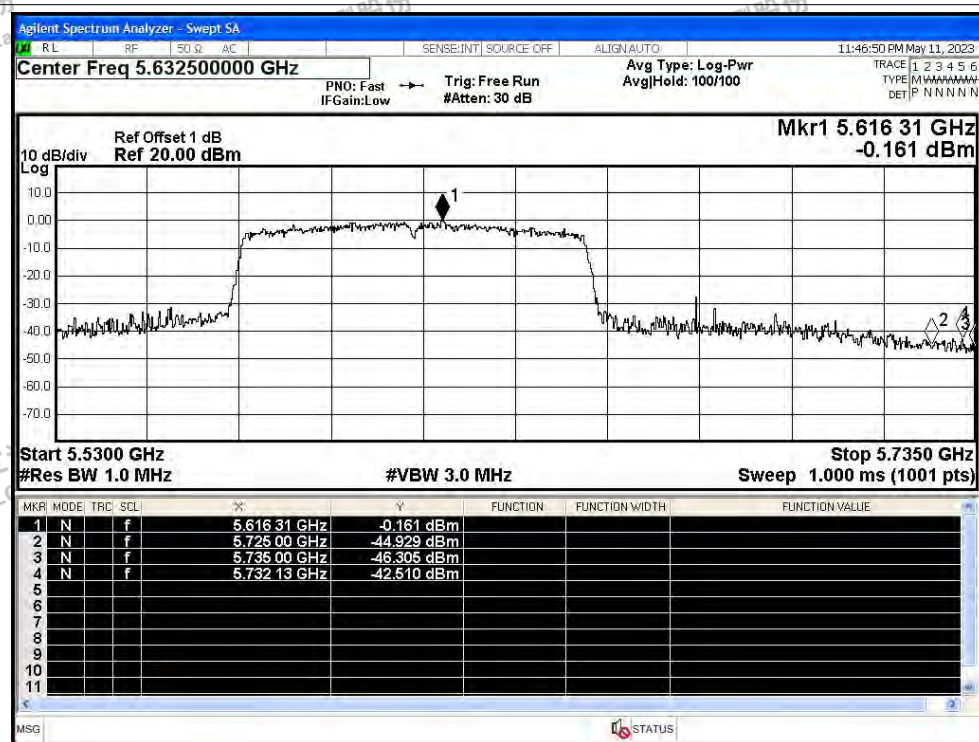

## Restrict Band NVNT ac80 5610MHz Ant1 Average

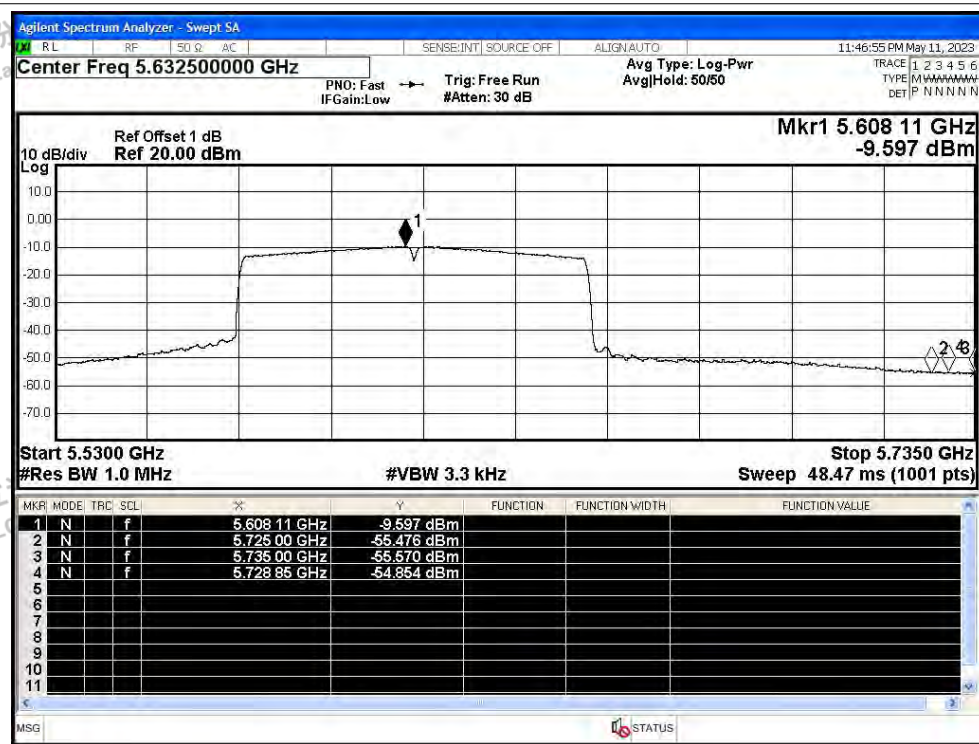



## F.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | ac20 | 5500            | Ant1    | 5500.02                  | 20000                | 3.64            | 25          | Pass    |
| NVNT      | ac20 | 5580            | Ant1    | 5580.02                  | 20000                | 3.58            | 25          | Pass    |
| NVNT      | ac20 | 5700            | Ant1    | 5699.98                  | -20000               | -3.51           | 25          | Pass    |
| NVNT      | ac40 | 5510            | Ant1    | 5509.96                  | -40000               | -7.26           | 25          | Pass    |
| NVNT      | ac40 | 5550            | Ant1    | 5550                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5670            | Ant1    | 5669.96                  | -40000               | -7.05           | 25          | Pass    |
| NVNT      | ac80 | 5530            | Ant1    | 5530                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac80 | 5610            | Ant1    | 5610                     | 0                    | 0               | 25          | Pass    |






## Test Graphs

Freq. Stability NVNT ac20 5500MHz Ant1

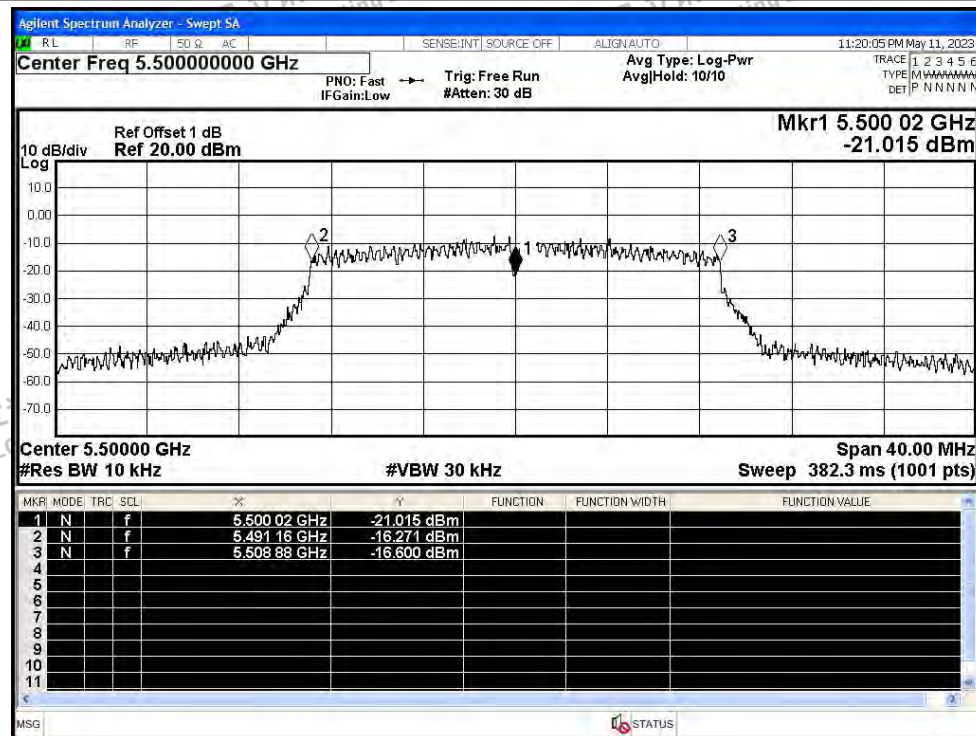

Freq. Stability NVNT ac20 5580MHz Ant1

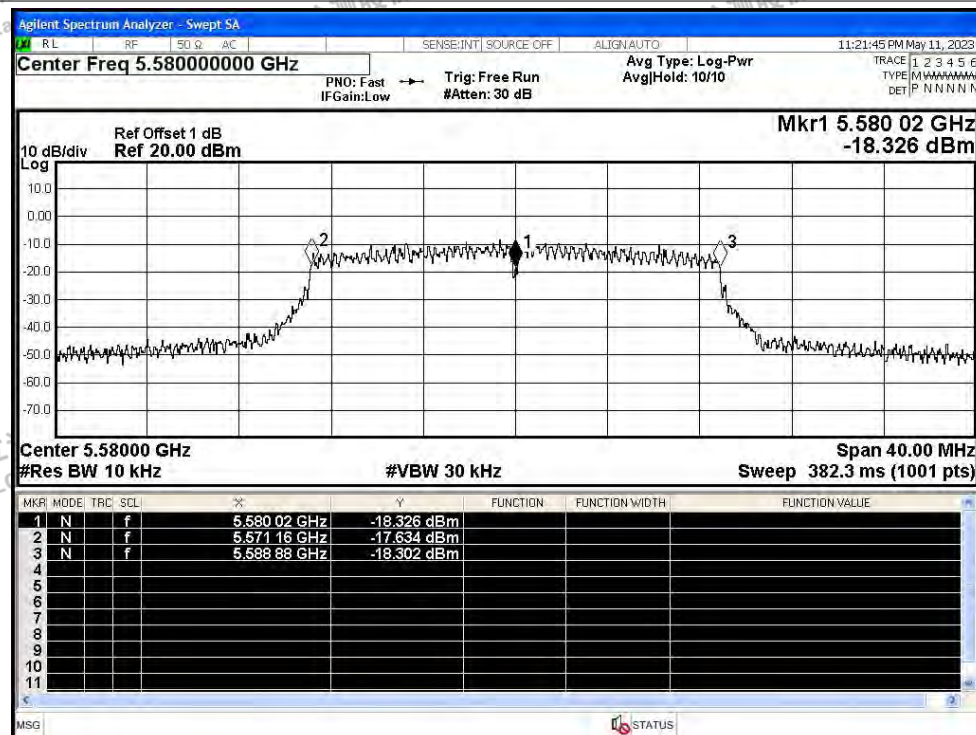

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5700MHz Ant1

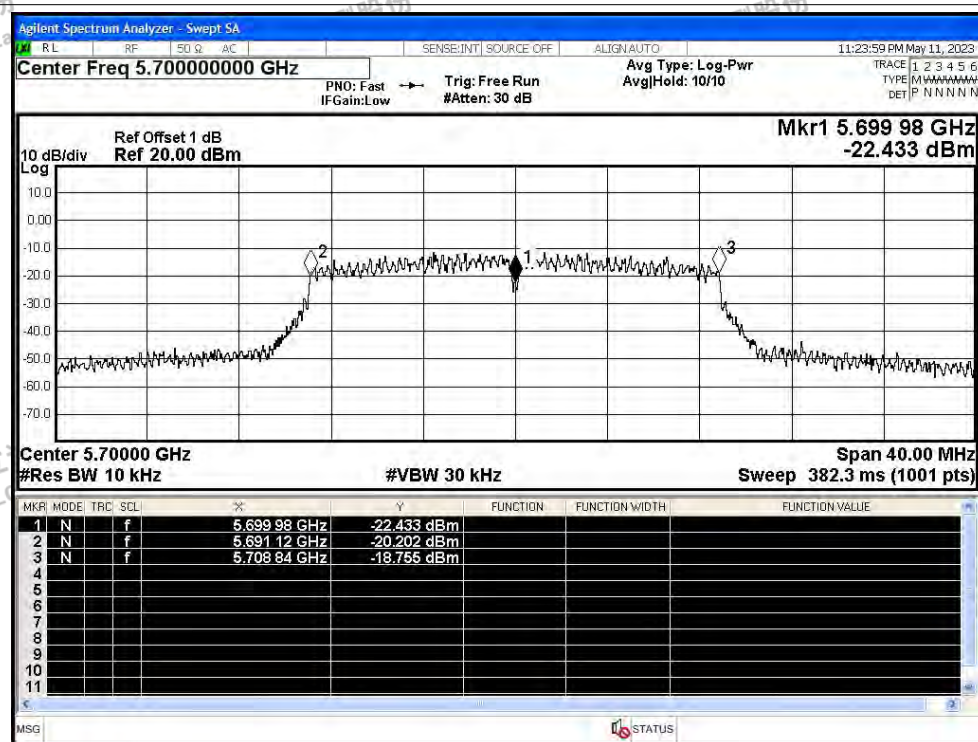


## Freq. Stability NVNT ac40 5510MHz Ant1

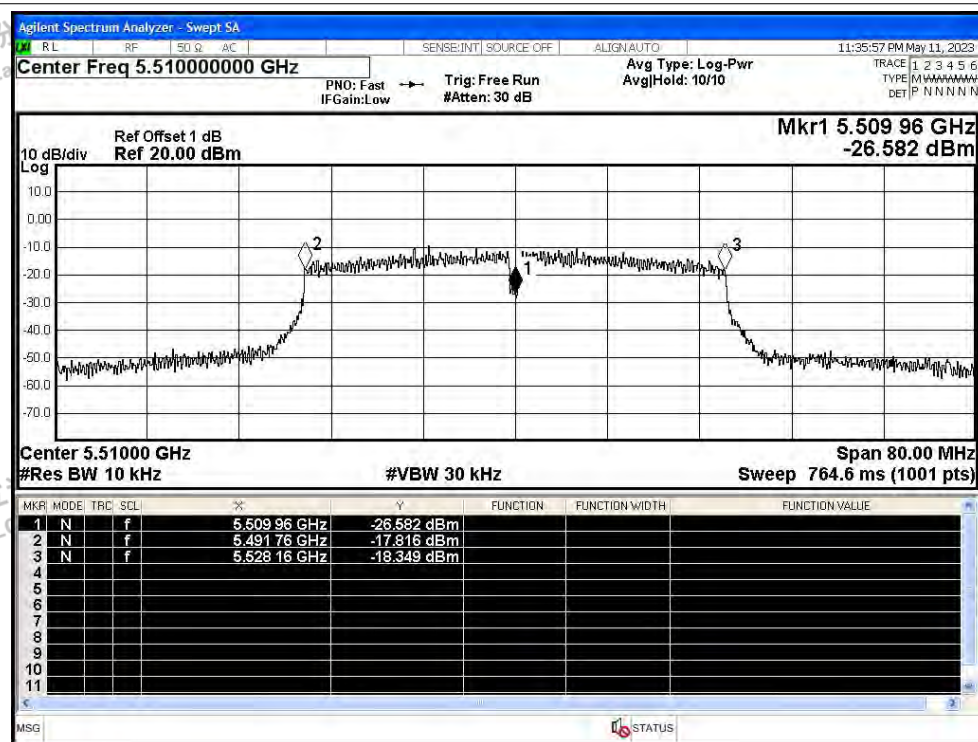




Freq. Stability NVNT ac40 5550MHz Ant1

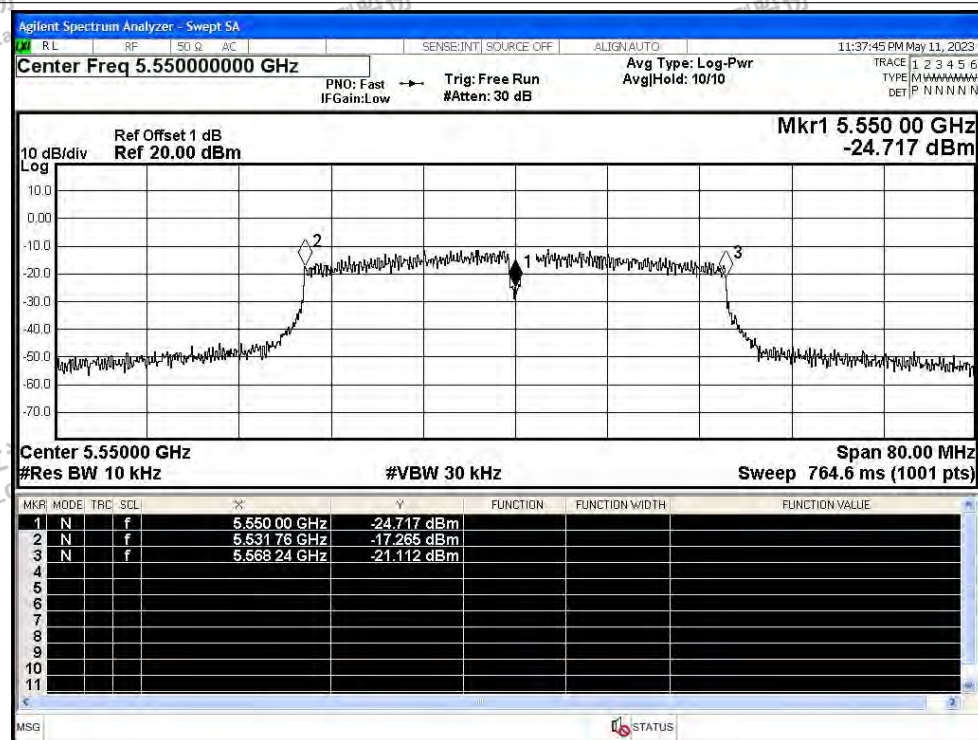

Freq. Stability NVNT ac40 5670MHz Ant1

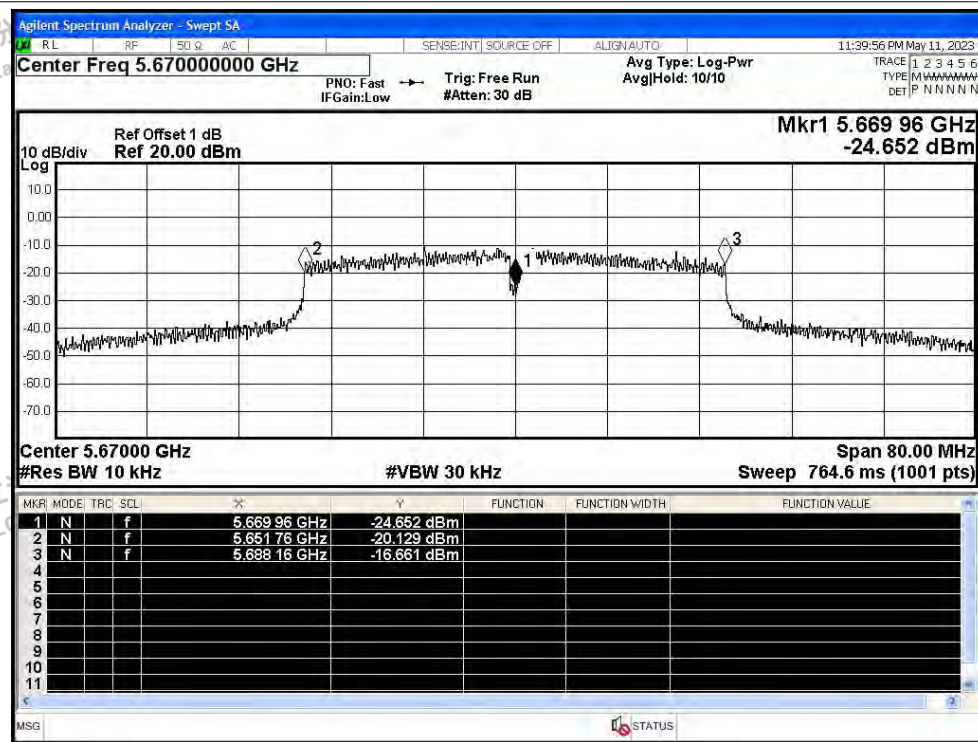

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac80 5530MHz Ant1

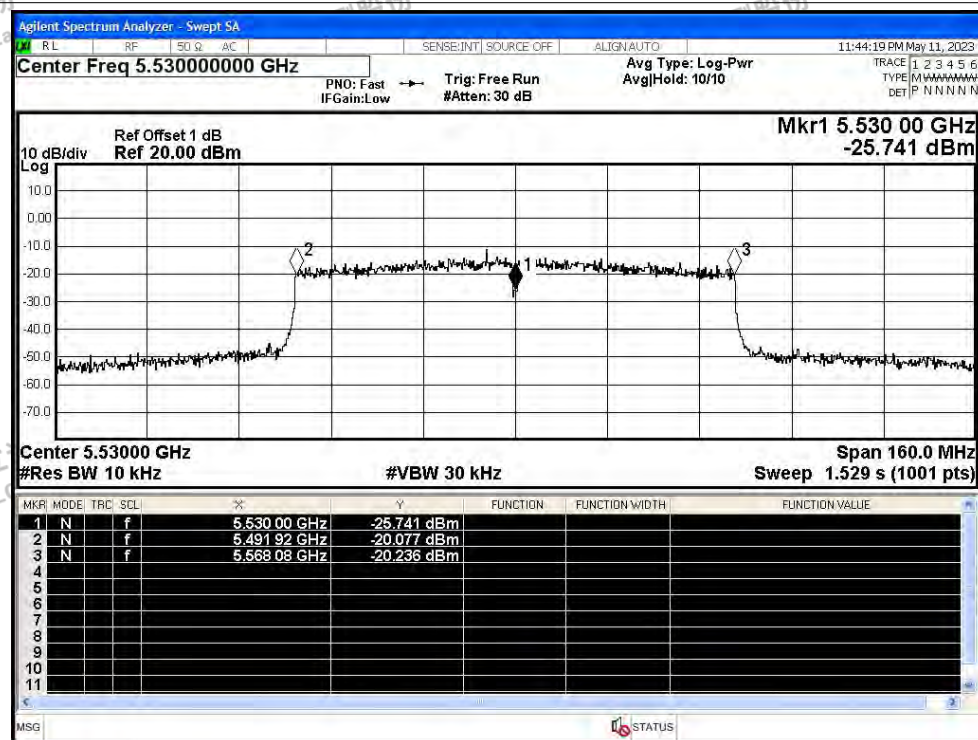

## Freq. Stability NVNT ac80 5610MHz Ant1

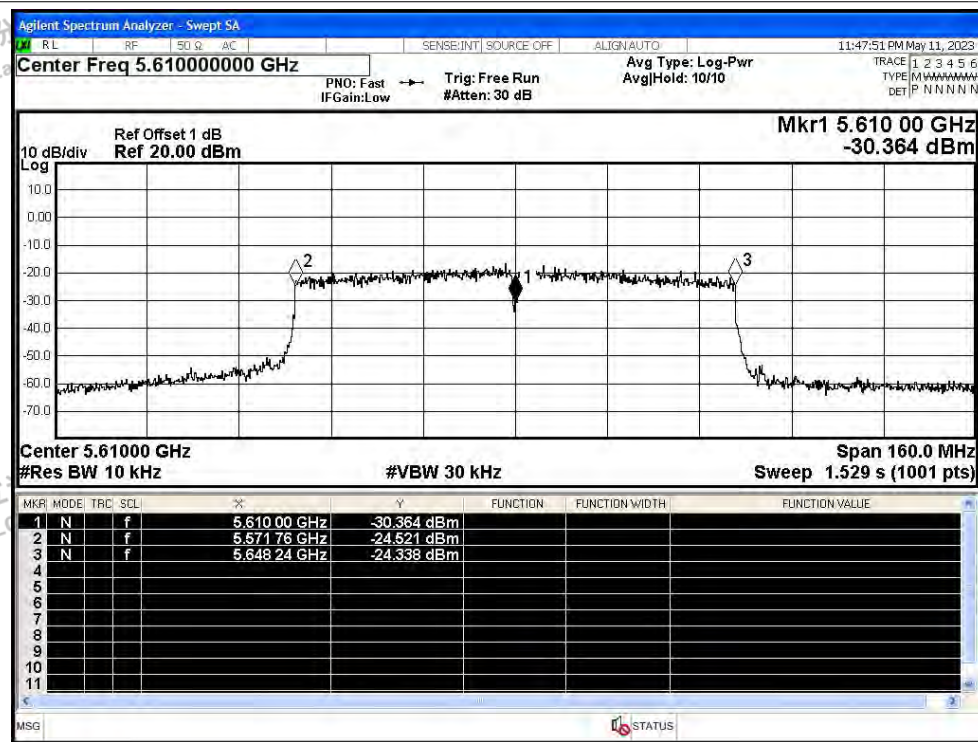

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## F.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5500            | Ant1    | 96.94          | 0.13                   | 0.72      |
| NVNT      | a    | 5580            | Ant1    | 96.94          | 0.13                   | 0.72      |
| NVNT      | a    | 5700            | Ant1    | 96.94          | 0.13                   | 0.72      |
| NVNT      | n20  | 5500            | Ant1    | 96.73          | 0.14                   | 0.77      |
| NVNT      | n20  | 5580            | Ant1    | 96.65          | 0.15                   | 0.77      |
| NVNT      | n20  | 5700            | Ant1    | 96.73          | 0.14                   | 0.77      |
| NVNT      | n40  | 5510            | Ant1    | 93.93          | 0.27                   | 1.54      |
| NVNT      | n40  | 5550            | Ant1    | 93.79          | 0.28                   | 1.54      |
| NVNT      | n40  | 5670            | Ant1    | 99.69          | 0                      | 1.54      |
| NVNT      | ac20 | 5500            | Ant1    | 96.68          | 0.15                   | 0.76      |
| NVNT      | ac20 | 5580            | Ant1    | 96.68          | 0.15                   | 0.76      |
| NVNT      | ac20 | 5700            | Ant1    | 96.76          | 0.14                   | 0.76      |
| NVNT      | ac40 | 5510            | Ant1    | 93.82          | 0.28                   | 1.53      |
| NVNT      | ac40 | 5550            | Ant1    | 93.97          | 0.27                   | 1.53      |
| NVNT      | ac40 | 5670            | Ant1    | 96.6           | 0.15                   | 1.53      |
| NVNT      | ac80 | 5530            | Ant1    | 88.04          | 0.55                   | 3.09      |
| NVNT      | ac80 | 5610            | Ant1    | 88.04          | 0.55                   | 3.09      |






## Test Graphs

## Duty Cycle NVNT a 5500MHz Ant1

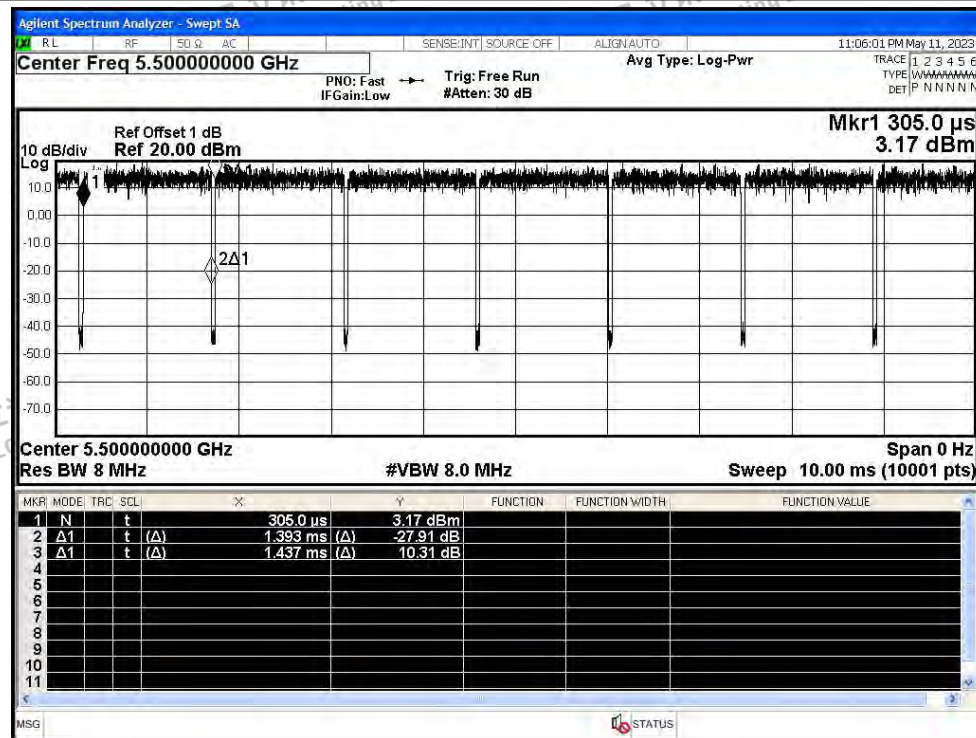


## Duty Cycle NVNT a 5580MHz Ant1

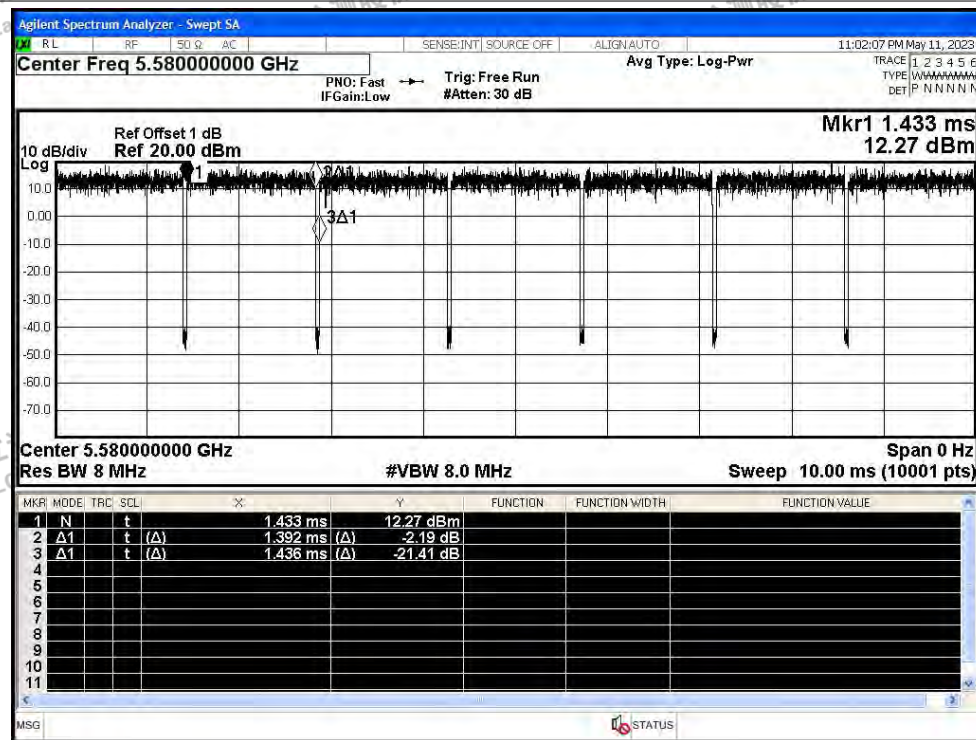




## Duty Cycle NVNT a 5700MHz Ant1

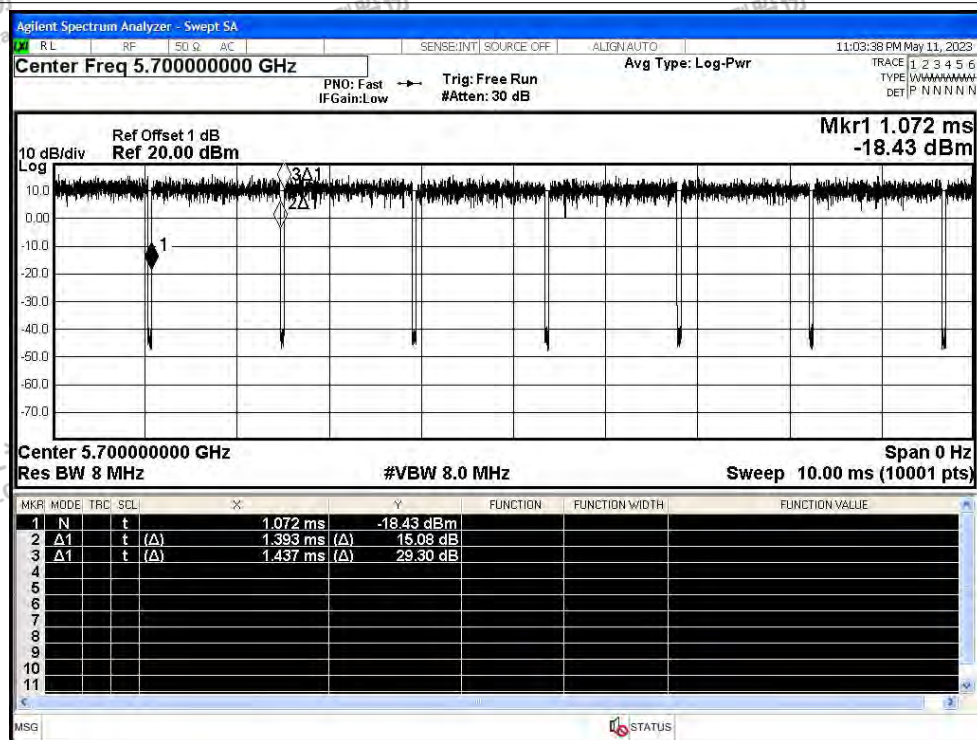


## Duty Cycle NVNT n20 5500MHz Ant1

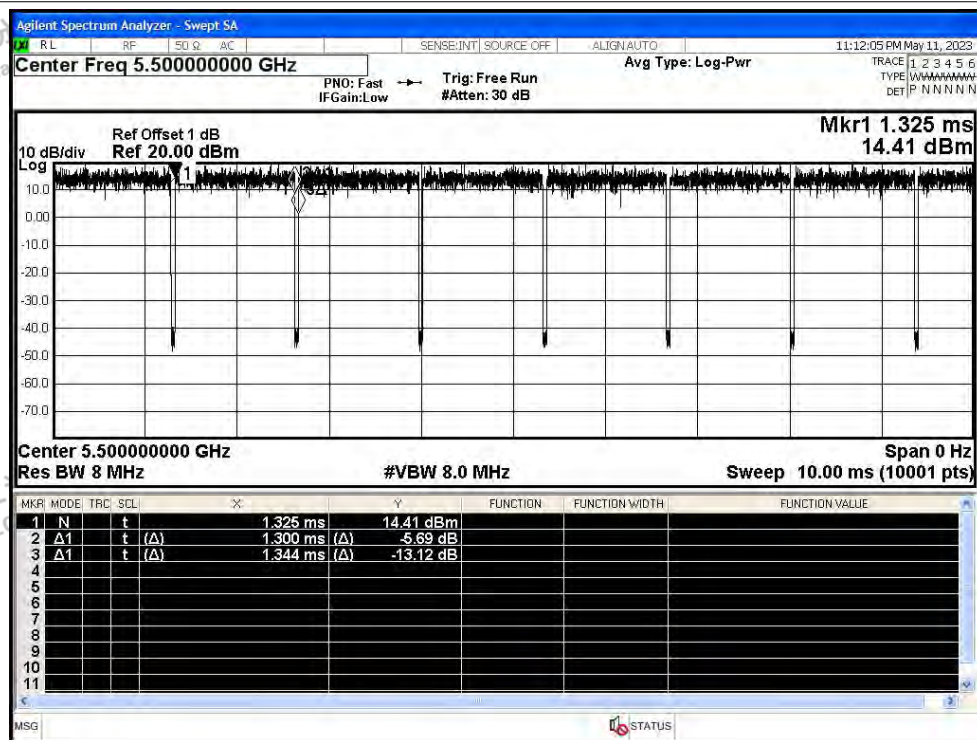




## Duty Cycle NVNT n20 5580MHz Ant1

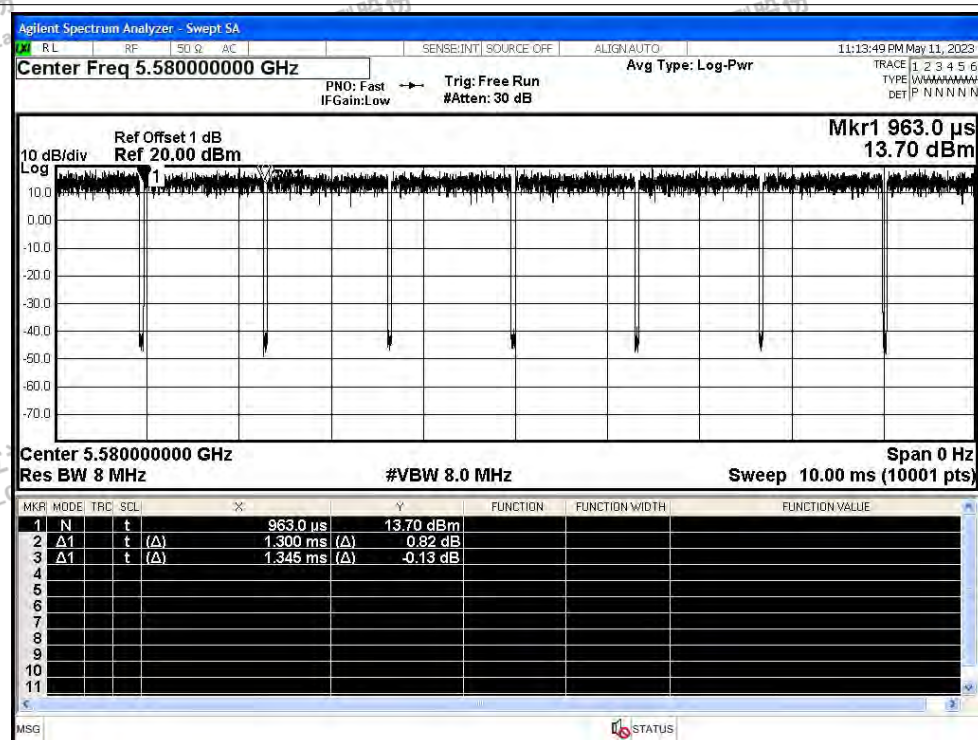


## Duty Cycle NVNT n20 5700MHz Ant1

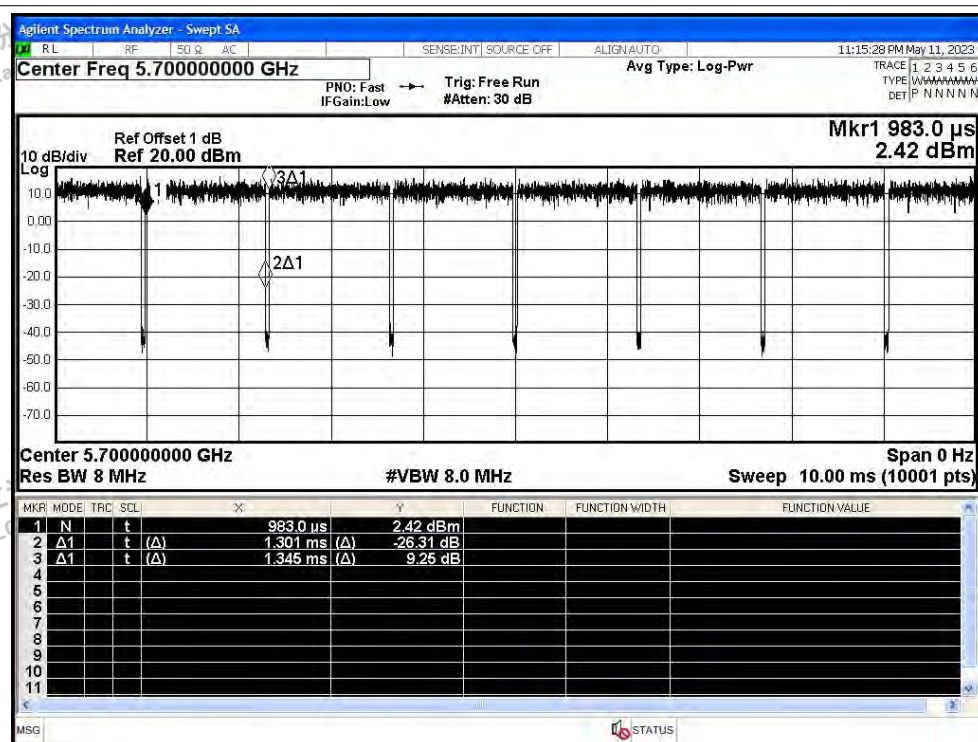




## Duty Cycle NVNT n40 5510MHz Ant1

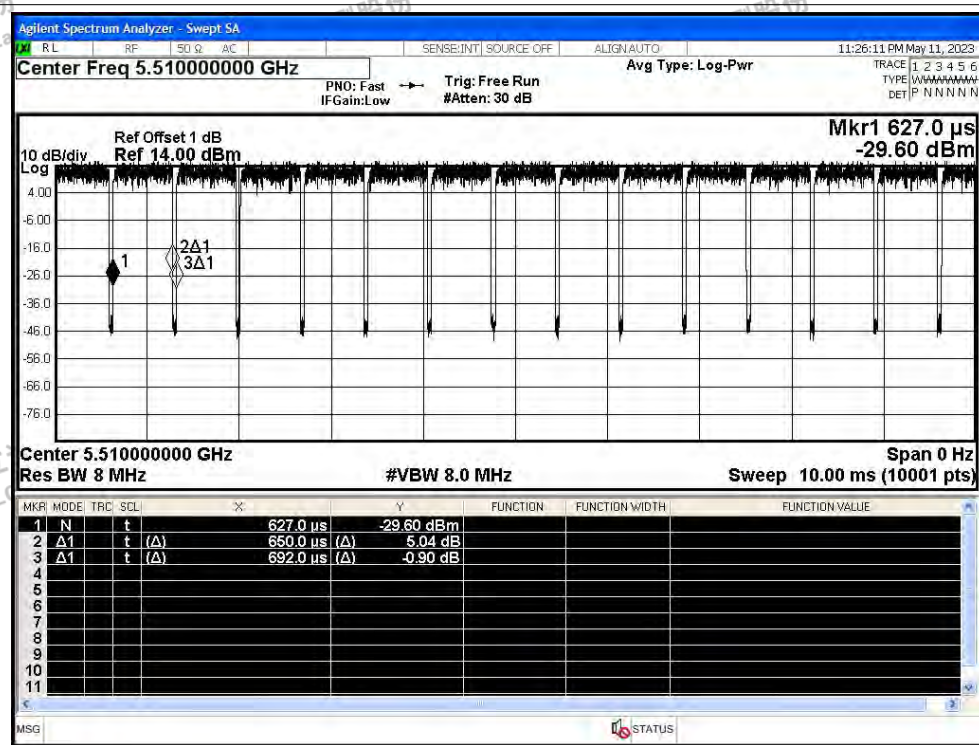


## Duty Cycle NVNT n40 5550MHz Ant1

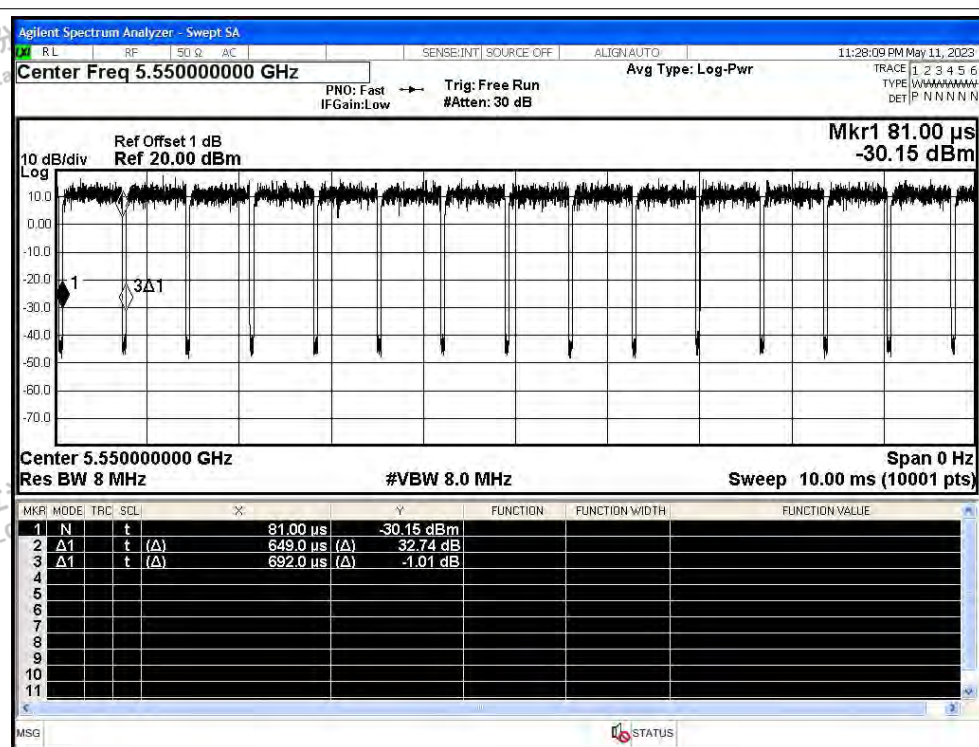




## Duty Cycle NVNT n40 5670MHz Ant1

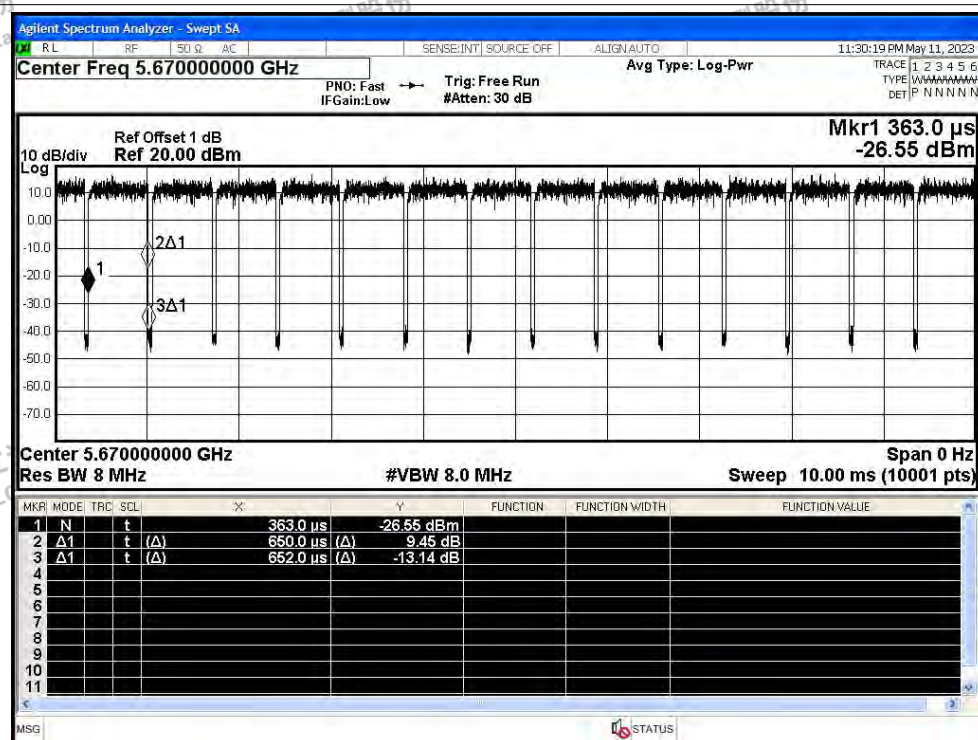


## Duty Cycle NVNT ac20 5500MHz Ant1

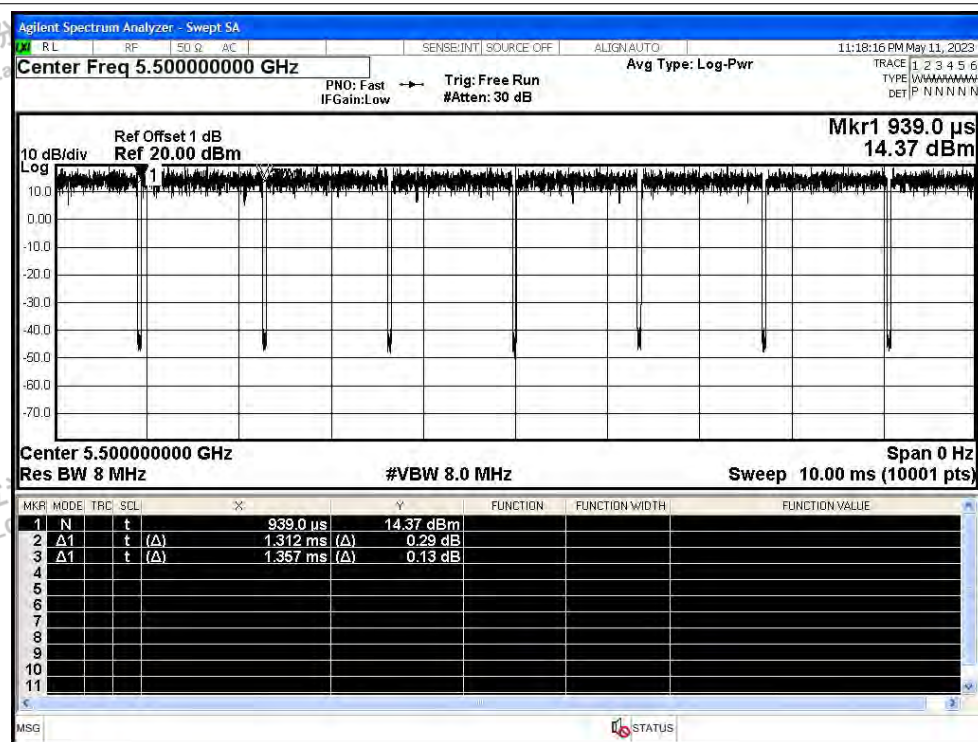




Duty Cycle NVNT ac20 5580MHz Ant1

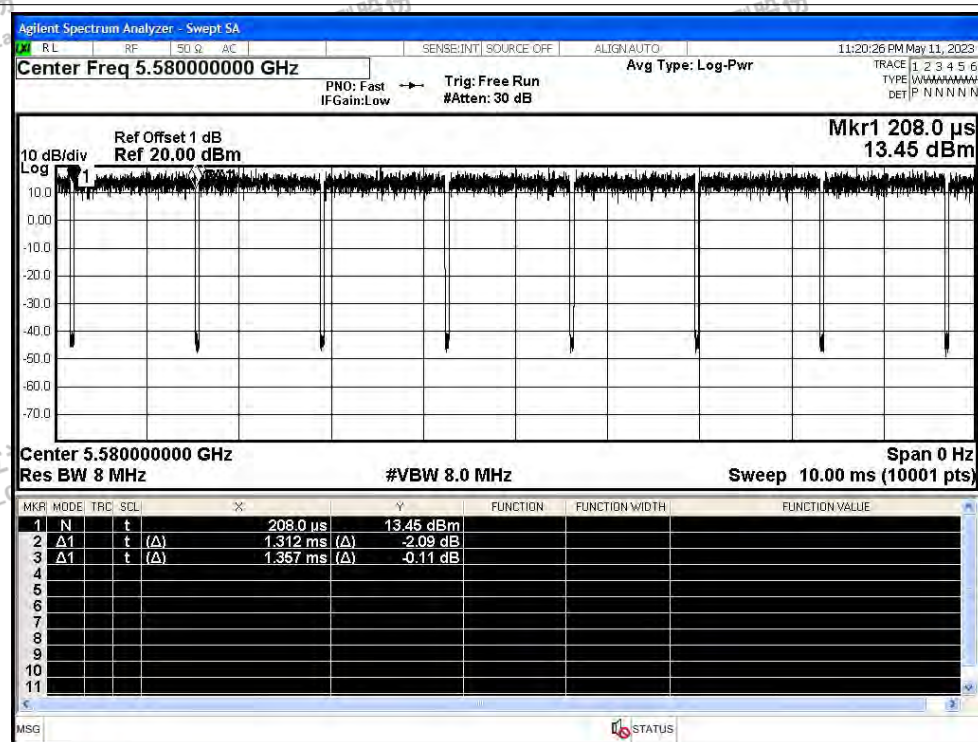

Duty Cycle NVNT ac20 5700MHz Ant1

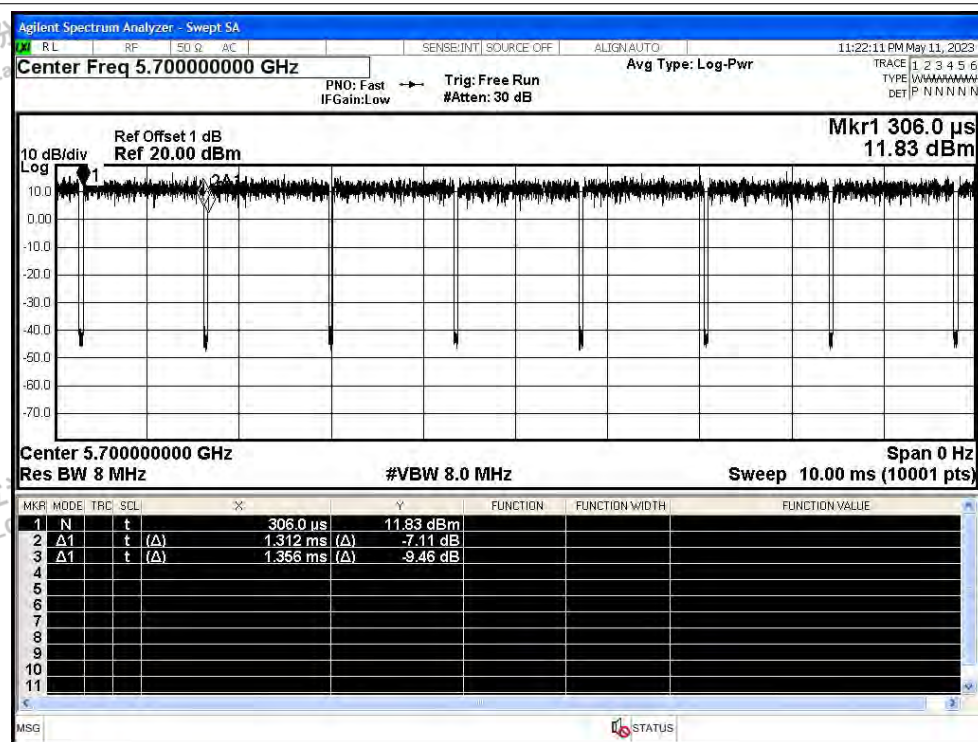

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ac40 5510MHz Ant1

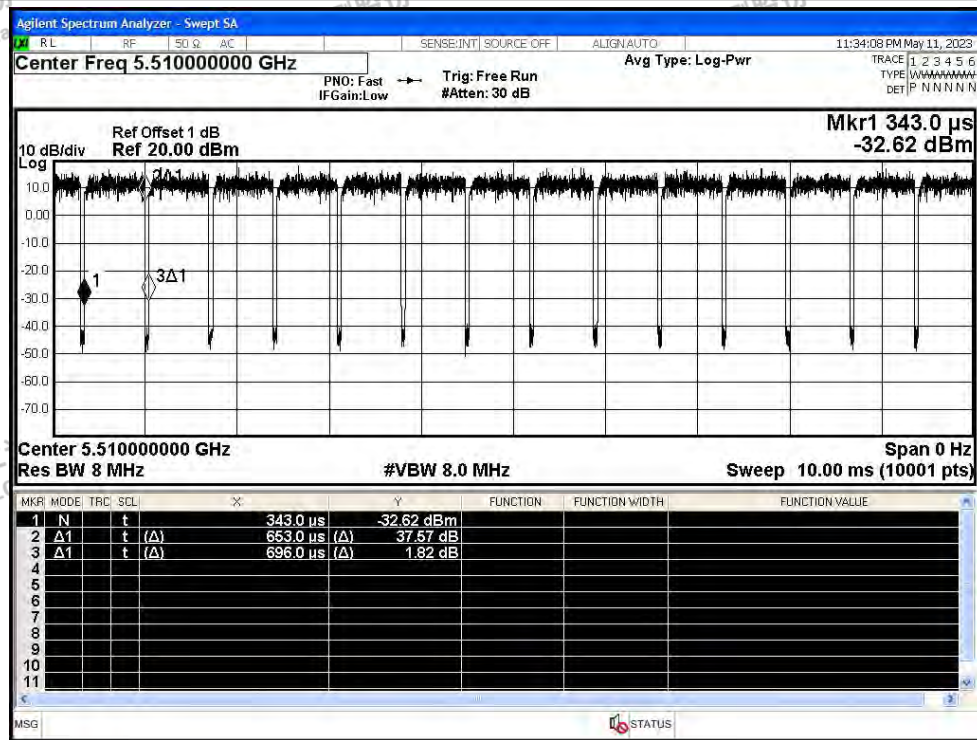


## Duty Cycle NVNT ac40 5550MHz Ant1

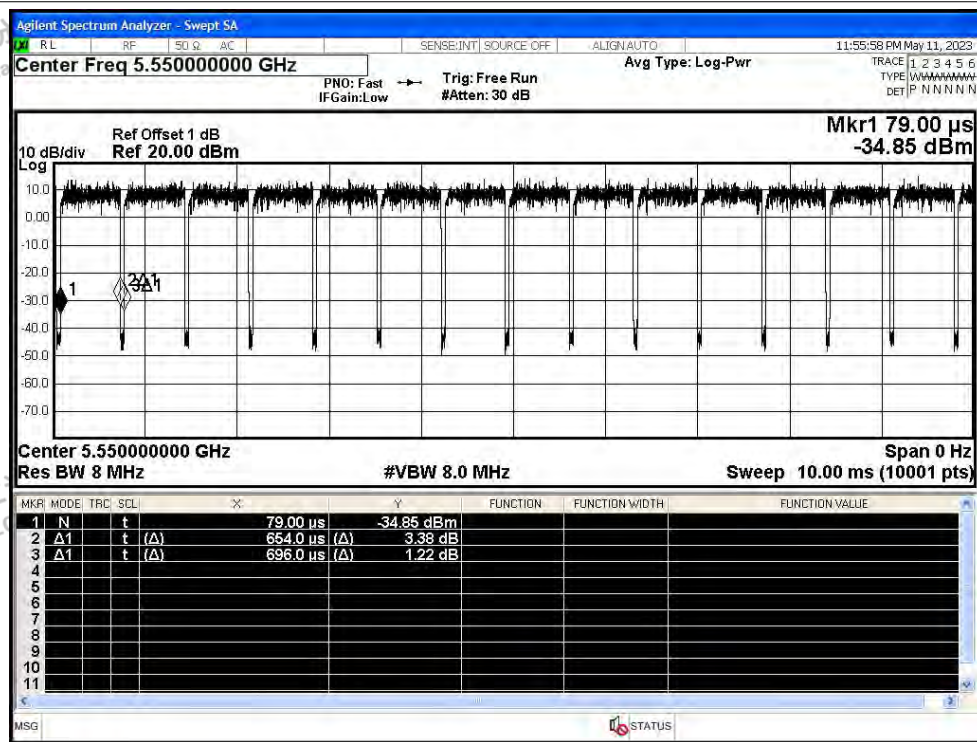




## Duty Cycle NVNT ac40 5670MHz Ant1

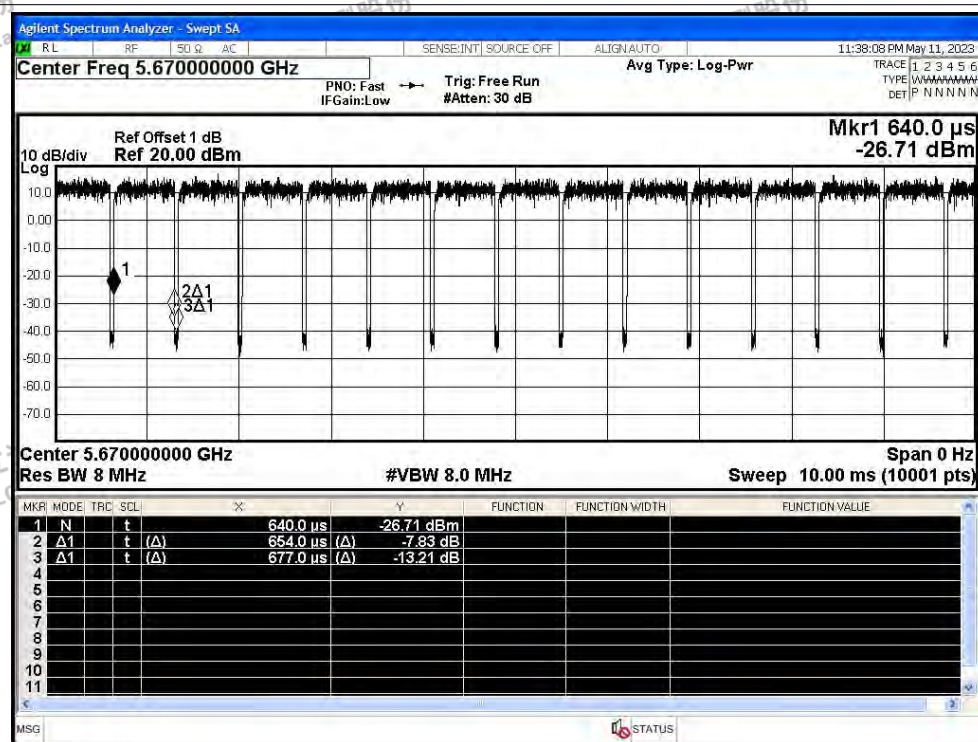

## Duty Cycle NVNT ac80 5530MHz Ant1

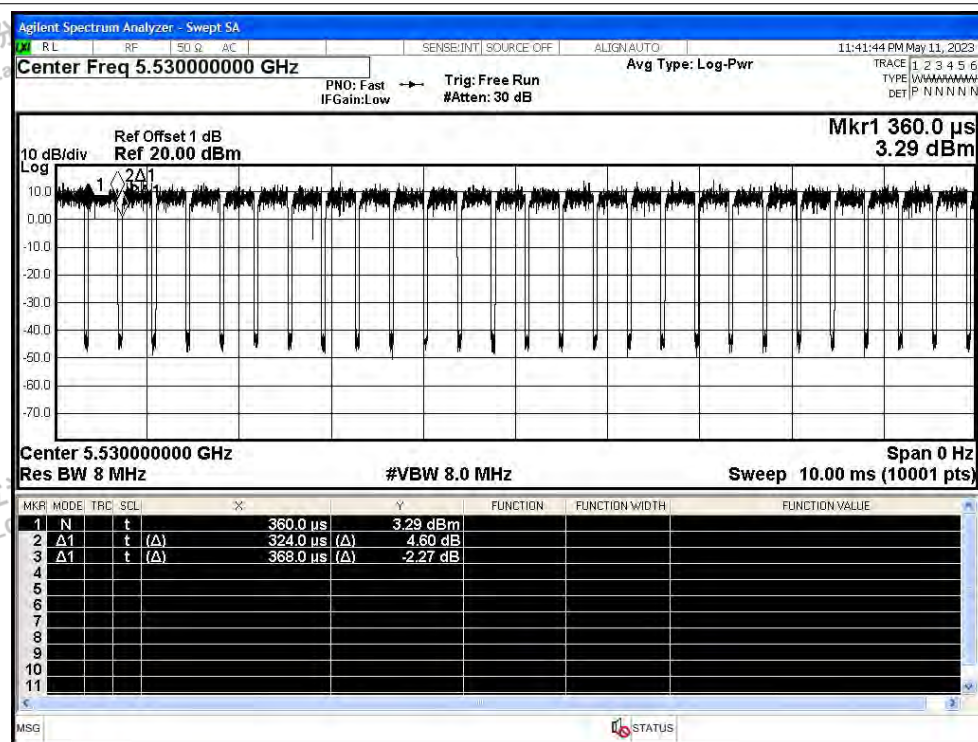

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

