

FCC Test Report

Product Name	InstaShow X Host
Model No	WDC30R,WDC30SER,WDC30+R,WDC31R
FCC ID.	JVPWDC30R

Applicant	BenQ Corporation
Address	16 Jihu Road, 11492 Neihu, Taipei, TAIWAN

Date of Receipt	Sep. 08, 2021
Issue Date	Mar. 16, 2022
Report No.	2190300R-RFUSWL2V01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issue Date: Mar. 16, 2022

Report No.: 2190300R-RFUSWL2V01-A




Product Name	InstaShow X Host
Applicant	BenQ Corporation
Address	16 Jihu Road, 11492 Neihu, Taipei, TAIWAN
Manufacturer	Shuttle Inc.
Model No.	WDC30R, WDC30SER, WDC30+R, WDC31R
FCC ID.	JVPWDC30R
EUT Rated Voltage	AC 100-240V/50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	BenQ
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :




(Senior Project Specialist / Genie Chang)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	6
1.1. EUT Description.....	6
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	9
1.4. EUT Exercise Software	9
1.5. Test Facility	10
1.6. List of Test Item and Equipment	11
1.7. Uncertainty	12
2. Conducted Emission.....	13
2.1. Test Setup	13
2.2. Limits	13
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. Peak Power Output	15
3.1. Test Setup	15
3.2. Limits	15
3.3. Test Procedure	15
3.4. Test Result of Peak Power Output.....	16
4. Radiated Emission.....	22
4.1. Test Setup	22
4.2. Limits	23
4.3. Test Procedure	24
4.4. Test Result of Radiated Emission.....	26
5. RF antenna conducted test.....	32
5.1. Test Setup	32
5.2. Limits	32
5.3. Test Procedure	32
5.4. Test Result of RF antenna conducted test.....	33
6. Band Edge	37
6.1. Test Setup	37
6.2. Limits	38
6.3. Test Procedure	38
6.4. Test Result of Band Edge	40
7. 6dB Bandwidth	48
7.1. Test Setup	48
7.2. Limits	48
7.3. Test Procedure	48
7.4. Test Result of 6dB Bandwidth.....	49
8. Power Density	53
8.1. Test Setup	53

8.2.	Limits	53
8.3.	Test Procedure	53
8.4.	Test Result of Power Density	54
9.	Duty Cycle	58
9.1.	Test Setup	58
9.2.	Test Procedure	58
9.3.	Test Result of Duty Cycle.....	59
10.	EMI Reduction Method During Compliance Testing	62
Appendix 1: EUT Test Photographs		
Appendix 2: Product Photos-Please refer to the file: 2190300R-Product Photos		

Revision History

Report No.	Version	Description	Issued Date
2190300R-RFUSWL2V01-A	V1.0	Initial issue of report.	2022-03-16

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	InstaShow X Host
Trade Name	BenQ
Model No.	WDC30R,WDC30SER,WDC30+R,WDC31R
FCC ID.	JVPWDC30R
Frequency Range	2412-2462MHz for 802.11b/g/n/ax-20BW 2422-2452MHz for 802.11n/ax-40BW
Number of Channels	802.11b/g/n/ax-20MHz: 11, n/ac/ax-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n/ax: up to 300Mbps
Channel separation	802.11b/g/n/ax: 5 MHz
Type of Modulation	802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g/n/ax:OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Antenna Type	Dipole Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto
HDMI Cable	MFR: AVIER, M/N: AVFH2010BKV
Power Adapter	MFR: FSP, M/N: FSP040-DHMN3 Input: AC 100-240V, 50/60Hz, 1.2A Output: DC 12V, 3.34A, 40W Cable Out: Non-shielded, 1.5m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain	Directional Gain
1	WHA YU	N/A	Dipole Antenna	3.5dBi	6.51dBi
2	WHA YU	N/A	Dipole Antenna	3.5dBi	

Note:

1. The antenna of EUT is conforming to FCC 15.203.
2. The EUT transmission signals in MIMO mode are completely uncorrelated.

802.11b/g/n/ax-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n/ax-40MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 03:	2422 MHz	Channel 04:	2427 MHz	Channel 05:	2432 MHz	Channel 06:	2437 MHz
Channel 07:	2442 MHz	Channel 08:	2447 MHz	Channel 09:	2452 MHz		

Note:

1. The EUT is an InstaShow X Host with a built-in 2.4GHz WLAN transceiver.
2. It's declared by manufacture about all models are electrically identical, different model names for marketing purpose. The identification of test sample is WDC30R.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
5. This device is not support partial RU.
6. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report.
7. Evaluate all modes and only the worst case is shown in the report.
8. These tests are conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)
	Mode 4: Transmit (802.11ax-40MBW 30Mbps)


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	FSP	FSP040-DHMN3	N/A	N/A
2	Monitor	Lenovo	A21215FS0	V5DMD987	Non-shielded, 1.8m
3	Monitor	ASUS	VS229HA	F4LMQS135395	Non-shielded, 1.8m
4	Keyboard	Logitech	K120	N/A	N/A
5	Mouse	Logitech	U0026	N/A	N/A
6	Microphone & Earphone	Verbatim	C09024VB	N/A	N/A
7	Notebook PC	DELL	Latitude E5440	74BTK32	N/A

	Signal Cable Type	Signal cable Description
A	Power Cable	Non-shielded, 1.5m
B	HDMI Cable	Shielded, 1.8m
C	LAN Cable	Non-shielded, 3m
D	HDMI Cable	Shielded, 1.8m
E	USB Cable	Shielded, 1.5m
F	USB Cable	Non-shielded, 1.8m
G	Microphone & Earphone Cable	Shielded, 1.2m

1.3. Configuration of Tested System

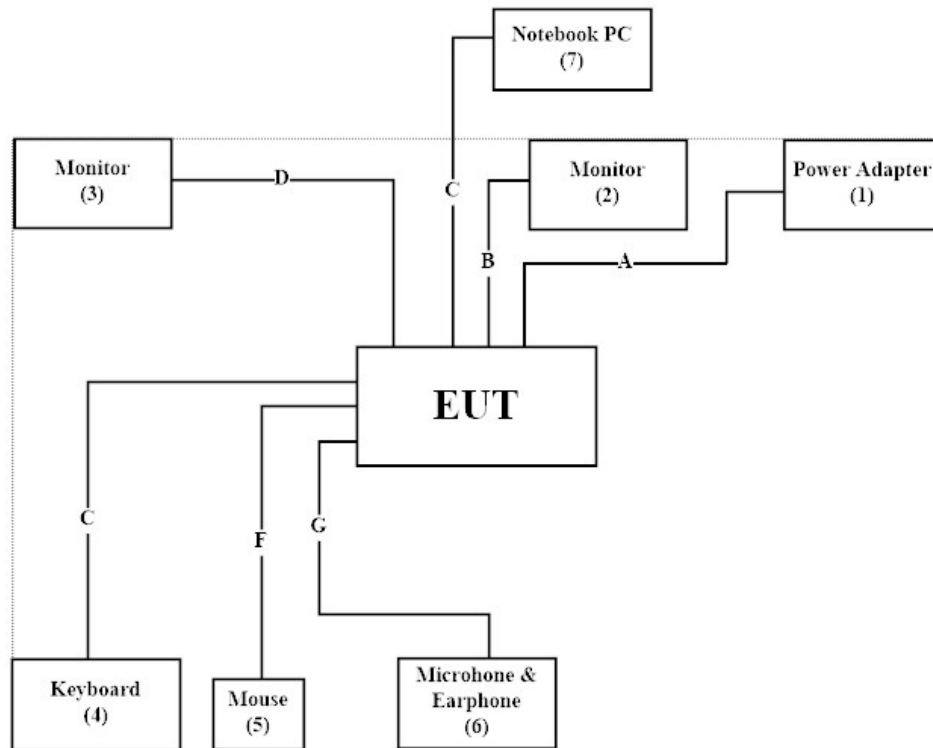

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “QAtool Version 0.0.2.15” on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	25.1°C
	Humidity (%RH)	10~90 %	57.6 %
Radiated Emission	Temperature (°C)	10~40 °C	24.3°C
	Humidity (%RH)	10~90 %	58.4%
Conductive	Temperature (°C)	10~40 °C	24.0°C
	Humidity (%RH)	10~90 %	60.9%

USA : FCC Registration Number: TW0033

Canada : IC Registration Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City,
24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
333411, Taiwan, R.O.C.

Phone number : +886-3-275-7255
Fax number : +866-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Item and Equipment

For Conduction measurements /SH1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2021.06.19	2022.06.18
X	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
X	Two-Line V-Network	R&S	ENV216	101307	2021.05.04	2022.05.03
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : AUDIX e3 V9

For Conducted measurements /SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2021.06.07	2022.06.06
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2021.05.17	2022.05.16
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2021.05.17	2022.05.16

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5

For Radiated measurements /966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021.08.11	2022.08.10
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	EMCI	EMC001330	980254	2021.01.20	2022.01.19
X	Pre-Amplifier	EMCI	EMC051835SE	980313	2020.11.25	2021.11.24
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2021.07.07	2022.07.06
X	Pre-Amplifier	EMCI	EMC184045SE	980369	2021.04.27	2022.04.26
X	Filter	MICRO TRONICS	BRM50702	G251	2021.09.16	2022.09.15
	Filter	MICRO TRONICS	BRM50716	G188	2021.09.16	2022.09.15
X	EMI Test Receiver	R&S	ESR	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101113	2021.02.03	2022.02.02
X	Coaxial Cable	SGH, EMCI	HA800 , SGH18	HY2103-001C	2021.09.02	2022.09.01
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : AUDIX e3 V9

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.91 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.53 dB	
Band Edge	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
6dB Bandwidth	± 682.83 Hz	
Power Density	± 2.53 dB	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

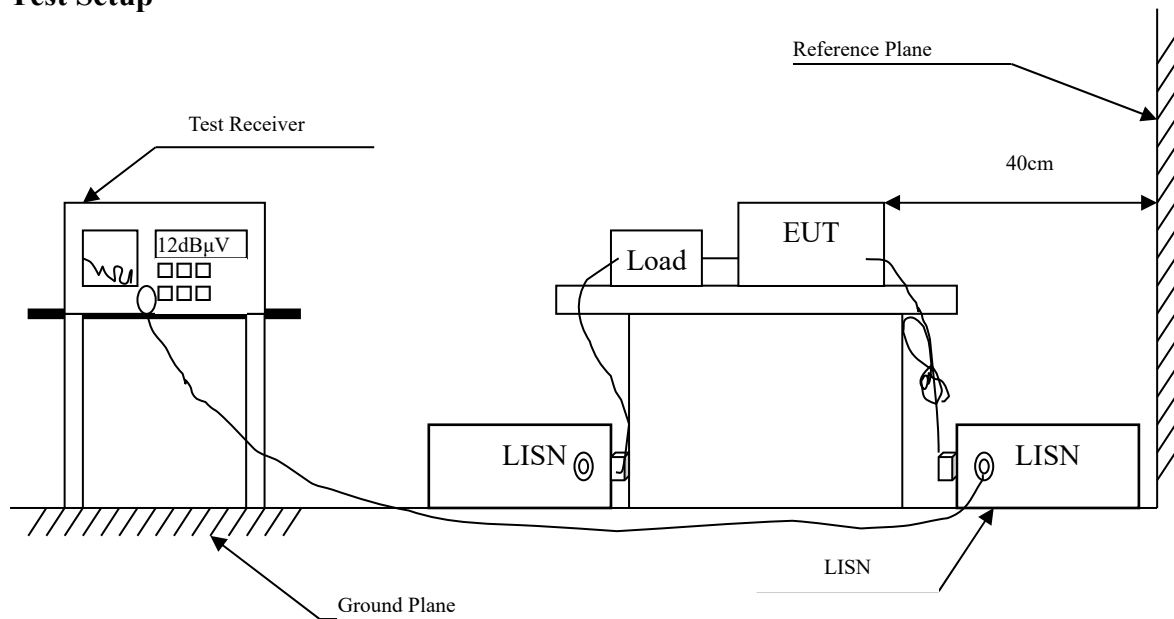

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50


2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Test Result of Conducted Emission

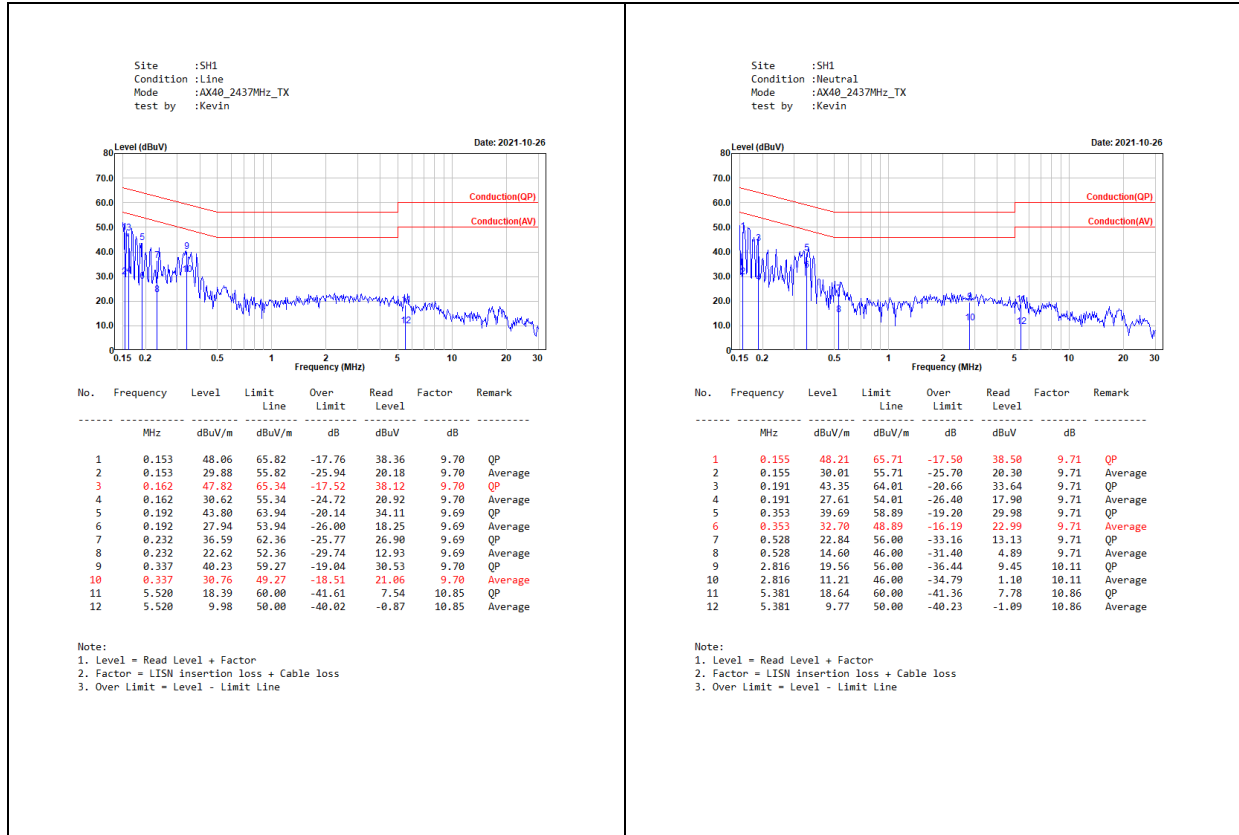

3. Peak Power Output

3.1. Test Setup

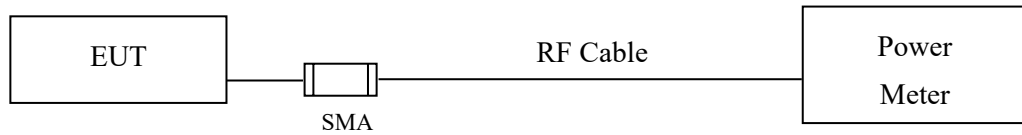

3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method. The maximum average conducted output power using C63.10:2013 Section 11.9.2.3 Measurement using a power meter (PM). (Measurement using a gated RF average-reading power meter).

3.4. Test Result of Peak Power Output

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)
 Test Date : 2021/10/13

Chain A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	20.73	--	--	--	23.16	<30dBm	Pass
06	2437	20.05	19.96	19.89	19.79	22.45	<30dBm	Pass
11	2462	19.58	--	--	--	22.03	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	20.93	--	--	--	23.42	<30dBm	Pass
06	2437	20.89	20.83	20.78	20.73	23.39	<30dBm	Pass
11	2462	20.19	--	--	--	22.72	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B

Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
01	2412	1	23.16	23.42	26.30	<30dBm	Pass
06	2437	1	22.45	23.39	25.96	<30dBm	Pass
11	2462	1	22.03	22.72	25.40	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)
 Test Date : 2021/10/13

Chain A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	17.85	--	--	--	--	--	--	--	25.18	<30dBm	Pass
06	2437	17.35	17.26	17.2	17.11	17.01	16.96	16.9	16.85	24.38	<30dBm	Pass
11	2462	17.44	--	--	--	--	--	--	--	25.82	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	17.55	--	--	--	--	--	--	--	25.76	<30dBm	Pass
06	2437	17.61	17.58	17.48	17.38	17.29	17.19	17.12	17.05	25.73	<30dBm	Pass
11	2462	17.72	--	--	--	--	--	--	--	25.84	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B

Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
01	2412	6	25.18	25.76	28.49	<30dBm	Pass
06	2437	6	24.38	25.73	28.12	<30dBm	Pass
11	2462	6	25.82	25.84	28.84	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)
 Test Date : 2021/10/13

Chain A

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
Measurement Level (dBm)																
01	2412	16.72	--	--	--	--	--	--	--	--	--	--	--	25.11	<30dBm	Pass
06	2437	16.47	16.39	16.32	16.28	16.21	16.18	16.08	16	15.93	15.88	15.83	15.78	24.35	<30dBm	Pass
11	2462	16.35	--	--	--	--	--	--	--	--	--	--	--	24.58	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
Measurement Level (dBm)																
01	2412	16.38	--	--	--	--	--	--	--	--	--	--	--	24.55	<30dBm	Pass
06	2437	16.73	16.65	16.56	16.51	16.42	16.34	16.29	16.19	16.15	16.11	16.03	15.98	24.71	<30dBm	Pass
11	2462	16.54	--	--	--	--	--	--	--	--	--	--	--	24.97	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B

Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
01	2412	MCS0	25.11	24.55	27.85	<30dBm	Pass
06	2437	MCS0	24.35	24.71	27.54	<30dBm	Pass
11	2462	MCS0	24.58	24.97	27.79	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)
 Test Date : 2021/12/06

Beamforming

Chain A

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
Measurement Level (dBm)																
01	2412	13.71	--	--	--	--	--	--	--	--	--	--	--	22.1	<30dBm	Pass
06	2437	13.46	18.89	18.8	18.71	18.67	18.59	18.51	18.47	18.37	18.33	18.29	18.19	21.34	<30dBm	Pass
11	2462	13.34	--	--	--	--	--	--	--	--	--	--	--	21.57	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)													Peak Power	Required Limit	Result
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0			
		Measurement Level (dBm)															
01	2412	13.37	--	--	--	--	--	--	--	--	--	--	--	21.54	<30dBm	Pass	
06	2437	13.72	13.69	13.66	13.56	13.47	13.44	13.36	13.32	13.23	13.14	13.11	13.03	21.7	<30dBm	Pass	
11	2462	13.53	--	--	--	--	--	--	--	--	--	--	--	21.96	<30dBm	Pass	

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B

Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
01	2412	MCS0	22.10	21.54	24.84	<30dBm	Pass
06	2437	MCS0	21.34	21.70	24.53	<30dBm	Pass
11	2462	MCS0	21.57	21.96	24.78	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 4: Transmit (802.11ax-40MBW 30Mbps)
 Test Date : 2021/10/13

Chain A

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
Measurement Level (dBm)																
03	2422	15.48	--	--	--	--	--	--	--	--	--	--	--	24.32	<30dBm	Pass
06	2437	15.36	15.27	15.19	15.12	15.07	15.04	14.97	14.94	14.88	14.83	14.8	14.73	24.53	<30dBm	Pass
09	2452	15.68	--	--	--	--	--	--	--	--	--	--	--	24.13	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)												Peak Power	Required Limit	Result
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
		Measurement Level (dBm)														
03	2422	15.26	--	--	--	--	--	--	--	--	--	--	--	24.58	<30dBm	Pass
06	2437	15.57	15.47	15.44	15.41	15.38	15.32	15.23	15.14	15.1	15.06	15.02	14.96	24.77	<30dBm	Pass
09	2452	15.78	--	--	--	--	--	--	--	--	--	--	--	24.43	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B

Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
03	2422	MCS0	24.32	24.58	27.46	<30dBm	Pass
06	2437	MCS0	24.53	24.77	27.66	<30dBm	Pass
09	2452	MCS0	24.13	24.43	27.29	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Product : InstaShow X Host
 Test Item : Peak Power Output Data
 Test Mode : Mode 4: Transmit (802.11ax-40MBW 30Mbps)
 Test Date : 2021/12/06

Beamforming

Chain A

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
		Measurement Level (dBm)														
03	2422	12.47	--	--	--	--	--	--	--	--	--	--	--	21.31	<30dBm	Pass
06	2437	12.35	12.32	12.29	12.24	12.21	12.18	12.13	12.07	11.98	11.88	11.82	11.72	21.52	<30dBm	Pass
09	2452	12.67	--	--	--	--	--	--	--	--	--	--	--	21.12	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain B

Channel No	Frequency (MHz)	Average Power												Peak Power	Required Limit	Result
		For different Data Rate (Mbps)														
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11	MCS0		
Measurement Level (dBm)																
03	2422	12.25	--	--	--	--	--	--	--	--	--	--	--	21.57	<30dBm	Pass
06	2437	12.56	12.51	12.44	12.4	12.3	12.27	12.18	12.12	12.03	11.97	11.89	11.81	21.76	<30dBm	Pass
09	2452	12.77	--	--	--	--	--	--	--	--	--	--	--	21.42	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Chain A+B


Channel No	Frequency	Data Rate	Chain A Power	Chain B Power	Chain A+B Power	Limit	Result
	(MHz)	(Mbps)	(dBm)	(dBm)	(dBm)	(dBm)	
03	2422	MCS0	21.31	21.57	24.45	<30dBm	Pass
06	2437	MCS0	21.52	21.76	24.65	<30dBm	Pass
09	2452	MCS0	21.12	21.42	24.28	<30dBm	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

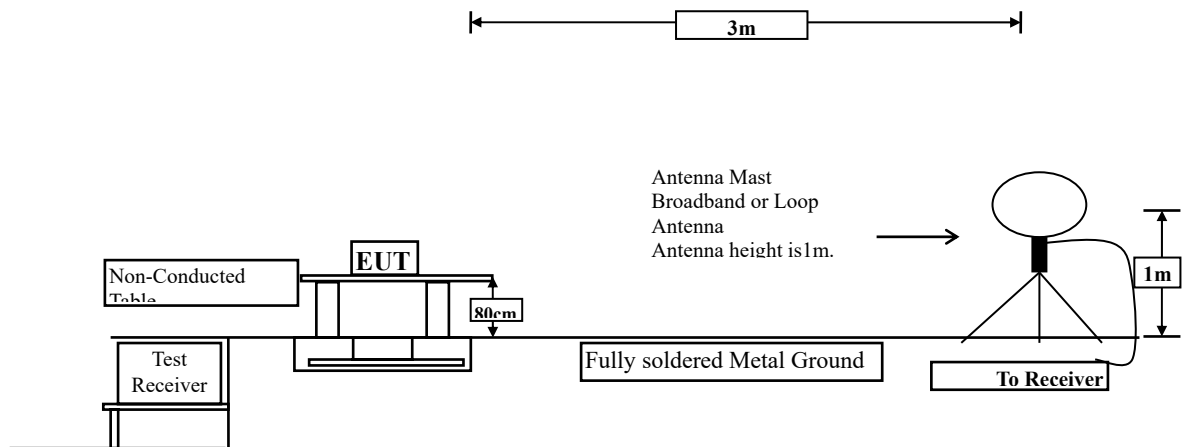

Radiated Emission Below 1GHz

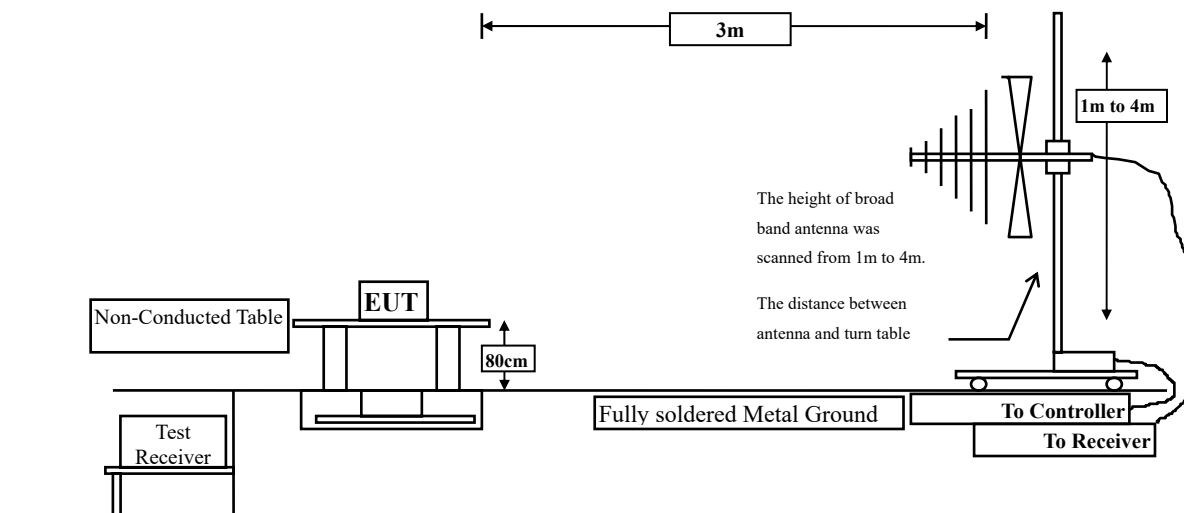

Radiated Emission Above 1GHz

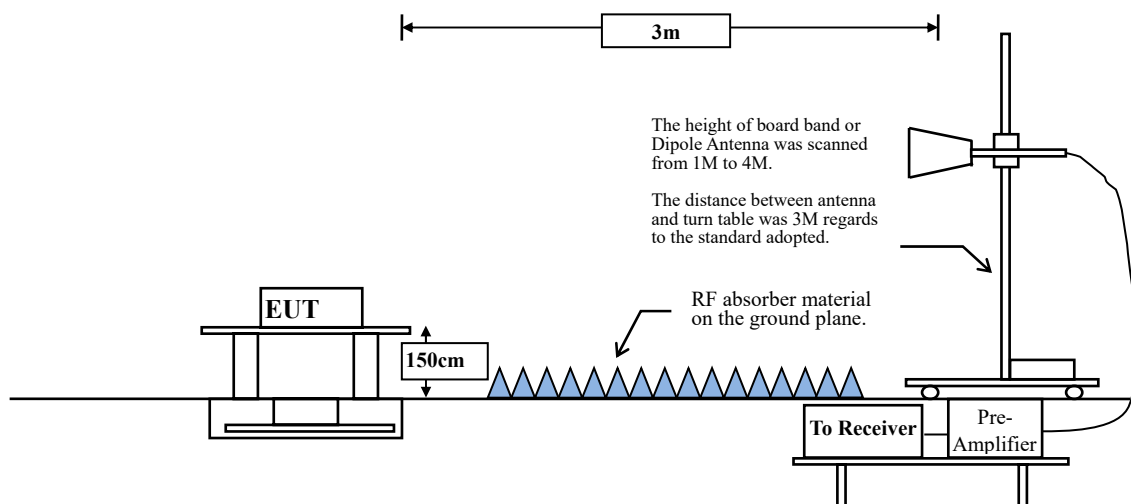

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$


$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	97.59	8.3820	119	200
802.11g	86.48	1.3936	718	1000
802.11ax20	49.50	0.2000	5000	10000
802.11ax40	49.69	0.2019	4953	5000

Note: Duty Cycle Refer to Section 9

4.4. Test Result of Radiated Emission

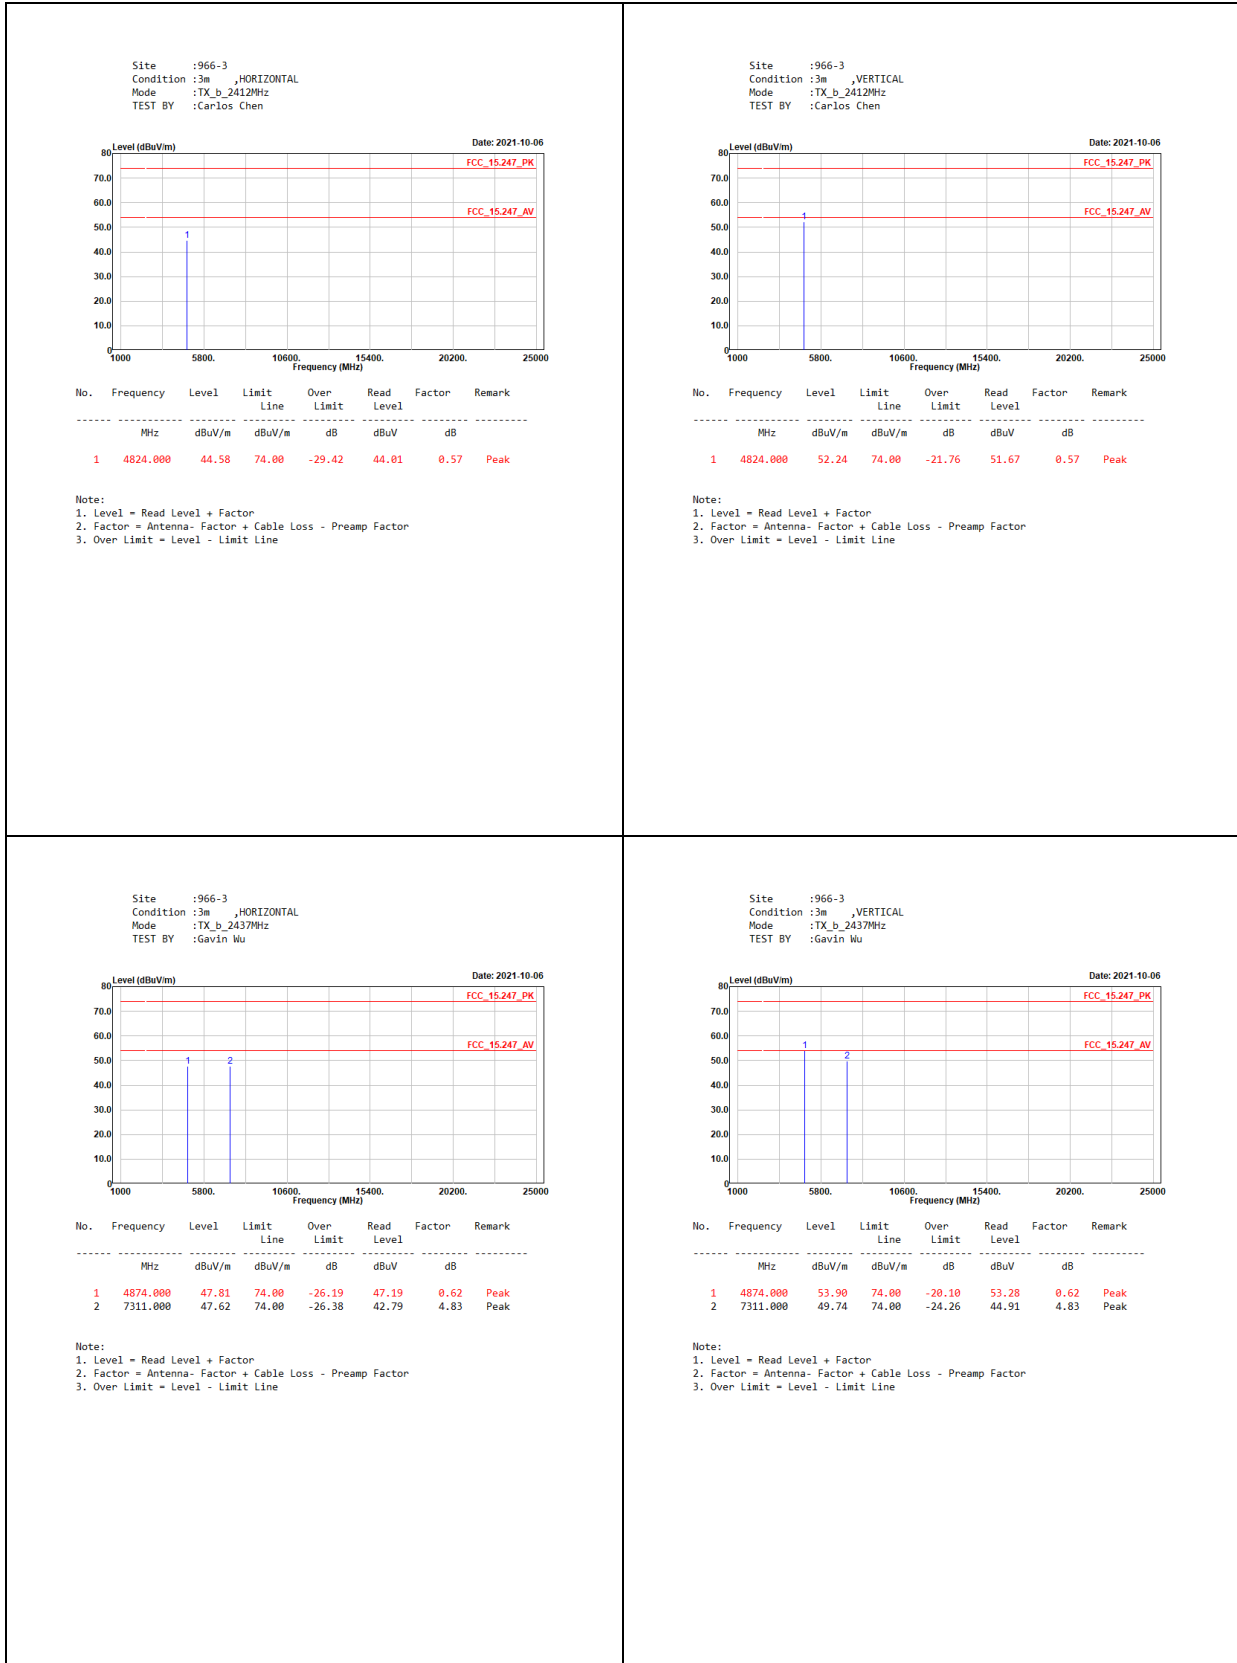

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

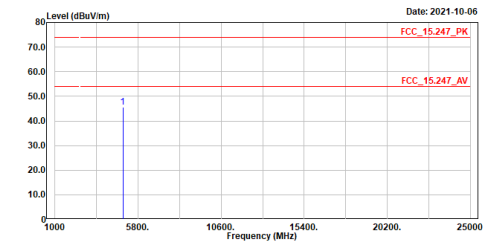


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	45.67	74.00	-28.33	45.06	0.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

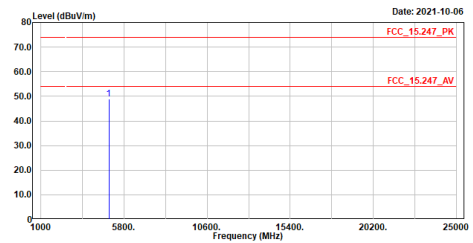


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	48.81	74.00	-25.19	48.20	0.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

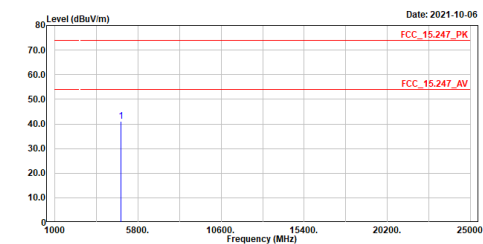


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4824.000	40.95	74.00	-33.05	40.34	0.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

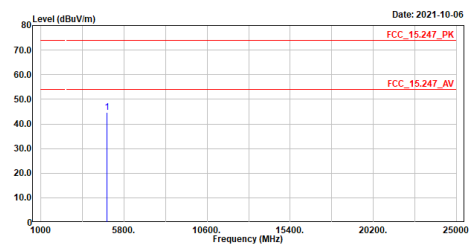


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4824.000	44.63	74.00	-29.37	44.10	0.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Carlos Chen

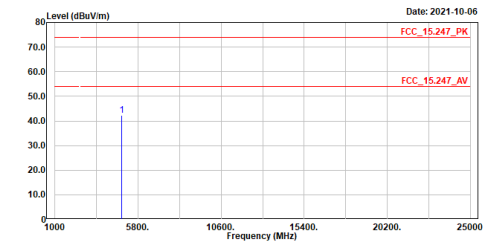


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4874.000	42.18	74.00	-31.82	41.56	0.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Carlos Chen

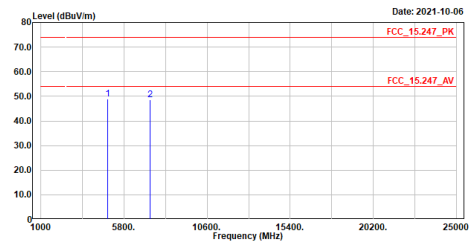


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4874.000	48.82	74.00	-25.18	48.20	0.62	Peak
2	7311.000	48.46	74.00	-25.54	43.63	4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

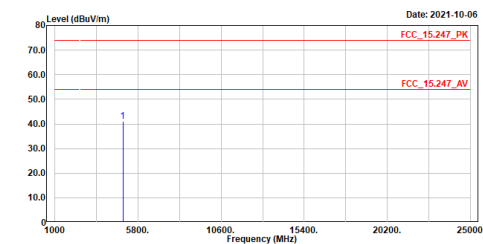


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	41.20	74.00	-32.80	40.59	0.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

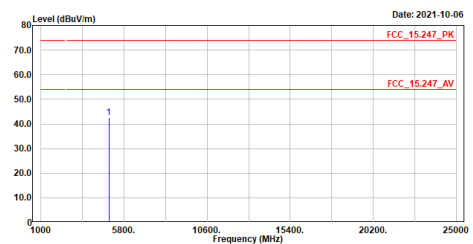


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	42.69	74.00	-31.31	42.08	0.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2412MHz
TEST BY :Carlos Chen

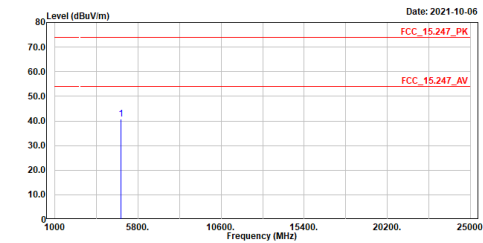


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4824.000	40.63	74.00	-33.37	40.05	0.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax20_2412MHz
TEST BY :Carlos Chen

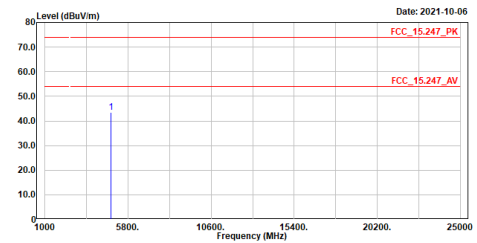


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4824.000	43.35	74.00	-30.65	42.79	0.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2437MHz
TEST BY :Carlos Chen

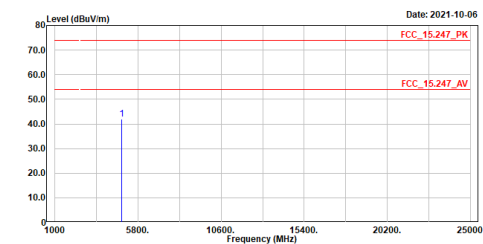


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	42.06	74.00	-31.94	41.44	0.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
TEST BY :Carlos Chen

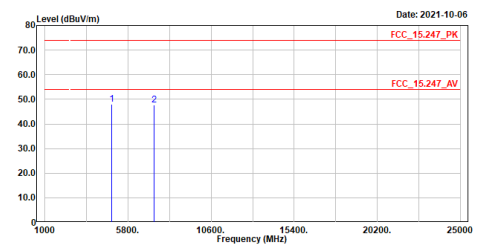


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	47.95	74.00	-26.05	47.33	0.62	Peak
2	7311.000	47.62	74.00	-26.38	42.79	4.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Carlos Chen

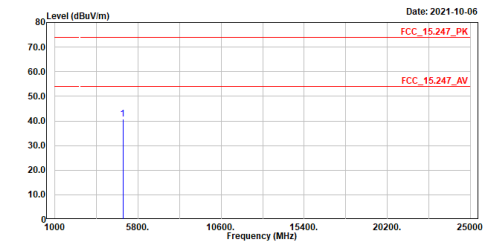

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	40.73	74.00	-33.27	40.12	0.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Carlos Chen

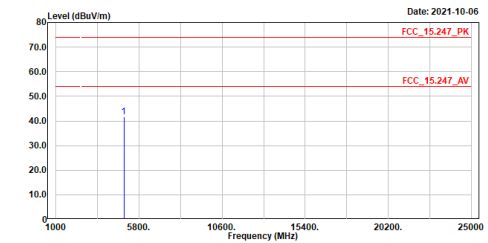

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	41.77	74.00	-32.23	41.13	0.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Carlos Chen

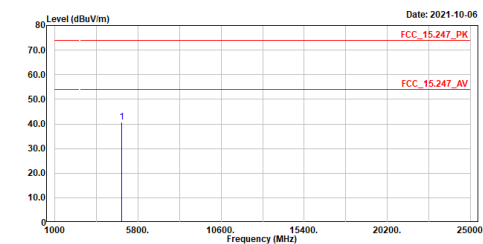

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4844.000	40.90	74.00	-33.10	40.28	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Carlos Chen

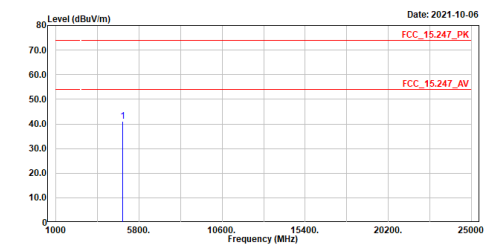

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4844.000	40.99	74.00	-33.01	40.37	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Carlos Chen

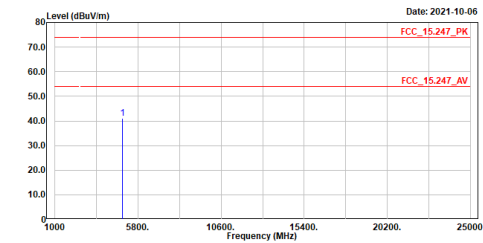


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4904.000	41.07	74.00	-32.93	40.51	0.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Carlos Chen

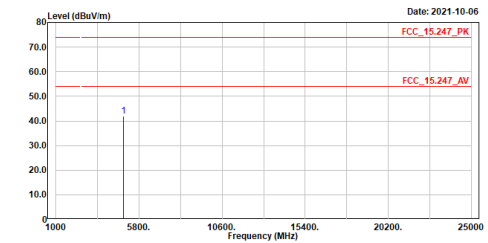


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4904.000	41.89	74.00	-32.11	41.33	0.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Jing Chang

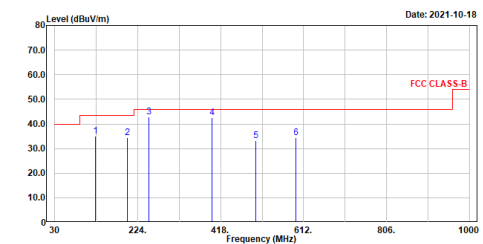


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	125.060	35.15	43.50	-8.35	48.20	-13.05	QP
2	199.750	34.28	43.50	-9.22	48.38	-14.10	QP
3	250.190	42.79	46.00	-3.21	55.11	-12.32	QP
4	398.600	42.49	46.00	-3.51	50.80	-8.31	QP
5	500.450	33.31	46.00	-12.69	38.87	-5.56	QP
6	594.540	34.40	46.00	-11.60	38.08	-3.60	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :966-3
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Jing Chang

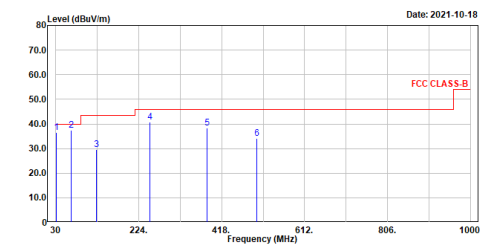

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	31.940	36.44	40.00	-3.56	49.38	-12.94	QP
2	65.890	37.57	40.00	-2.43	50.90	-13.33	QP
3	125.060	29.71	43.50	-13.79	42.76	-13.05	QP
4	250.190	40.76	46.00	-5.24	53.08	-12.32	QP
5	384.050	38.24	46.00	-7.76	46.85	-8.61	QP
6	500.450	34.06	46.00	-11.94	39.62	-5.56	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

5. RF antenna conducted test

5.1. Test Setup

RF antenna Conducted Measurement:

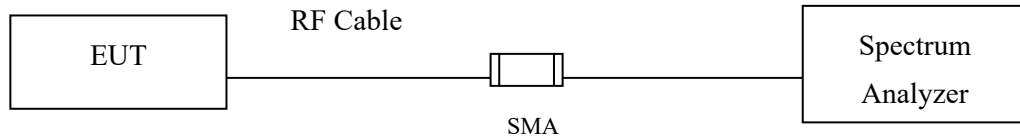

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF antenna conducted test


Product : InstaShow X Host
Test Item : RF antenna conducted test
Test Mode : Mode 1: Transmit (802.11b 1Mbps)
Test Date : 2021/10/12

Channel 01 (2412MHz)

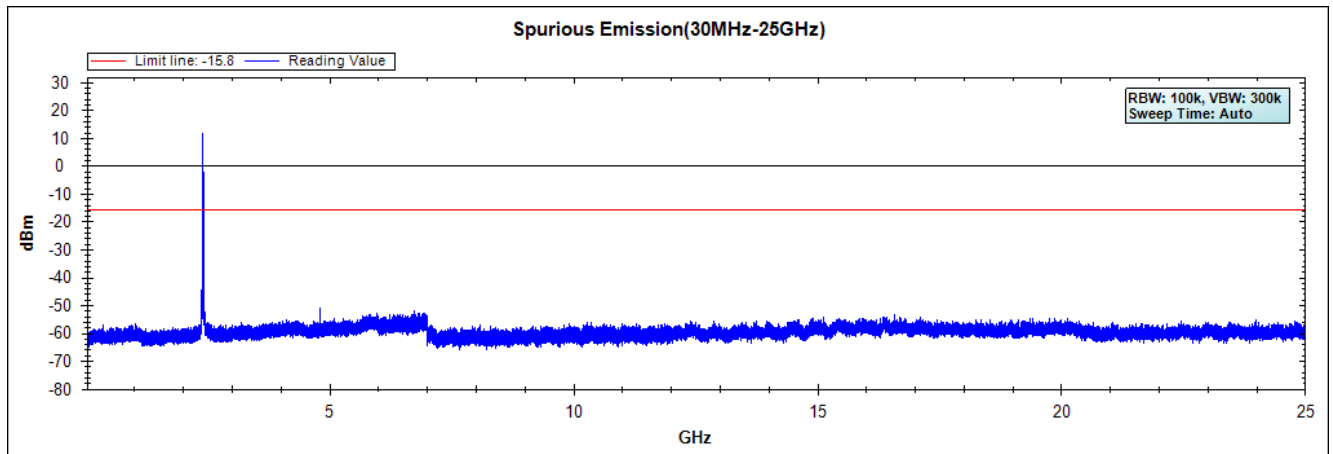

Note: The above test pattern is synthesized by multiple of the frequency range.


Product : InstaShow X Host
Test Item : RF Antenna Conducted Spurious
Test Mode : Mode 2: Transmit (802.11g 6Mbps)
Test Date : 2021/10/12

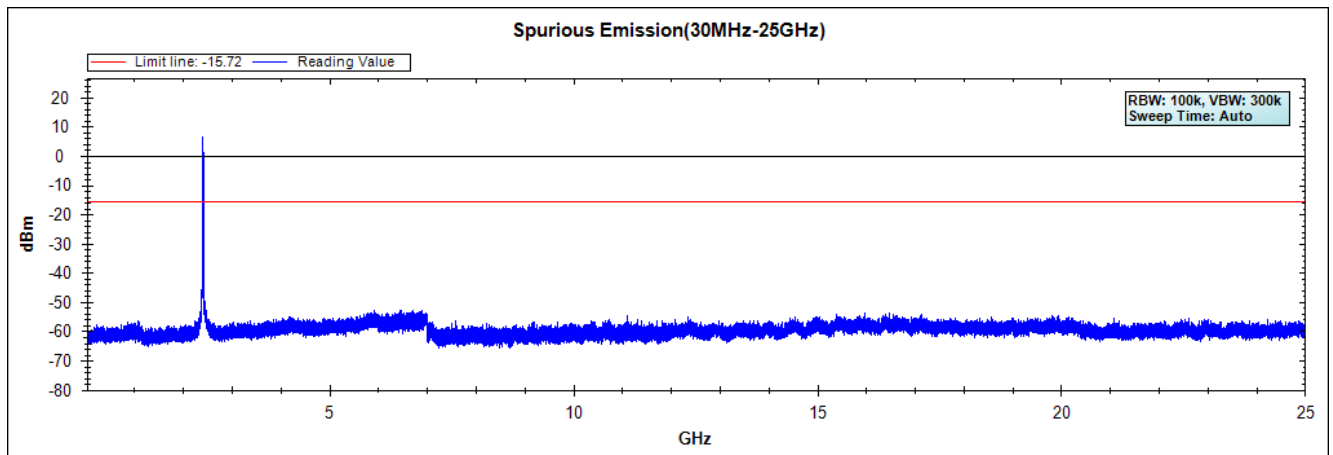Channel 01 (2412MHz)

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : InstaShow X Host
Test Item : RF Antenna Conducted Spurious
Test Mode : Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)
Test Date : 2021/10/13


Channel 11 (2462MHz)

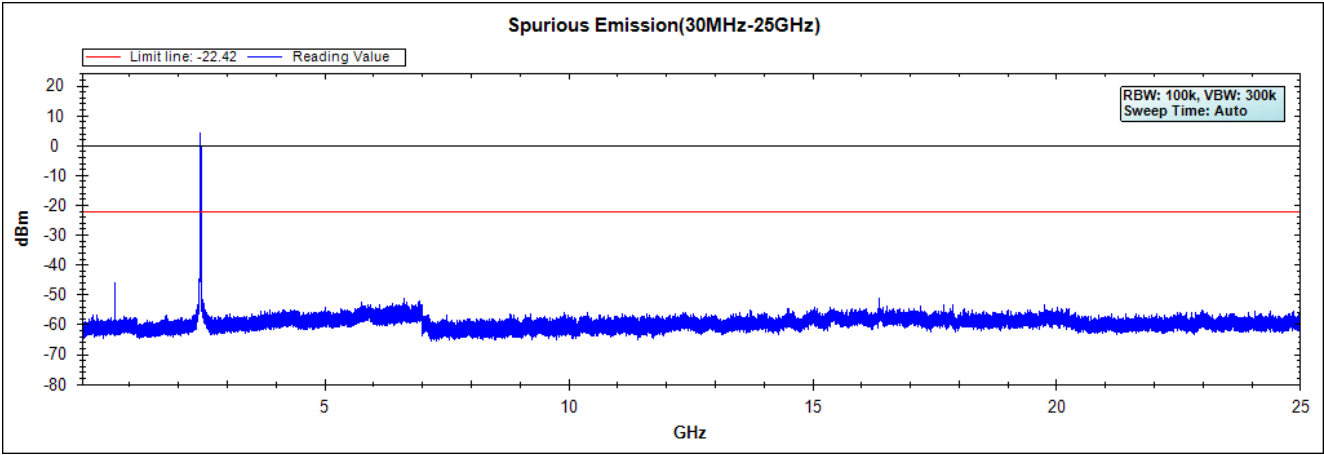

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : InstaShow X Host
Test Item : RF Antenna Conducted Spurious
Test Mode : Mode 4: Transmit (802.11ax-40MBW 30Mbps)
Test Date : 2021/10/13

Channel 03 (2422MHz)

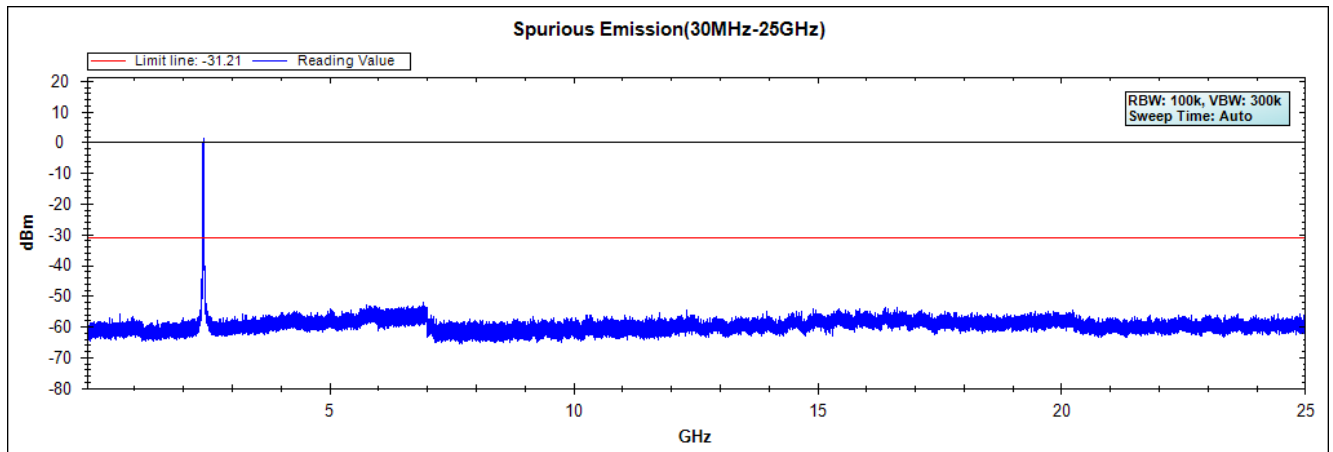


Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

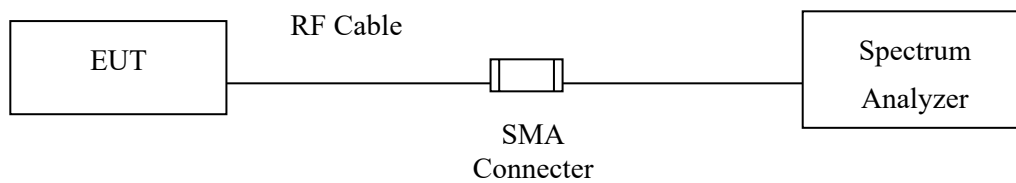

RF Radiated Measurement:

Above 1GHz

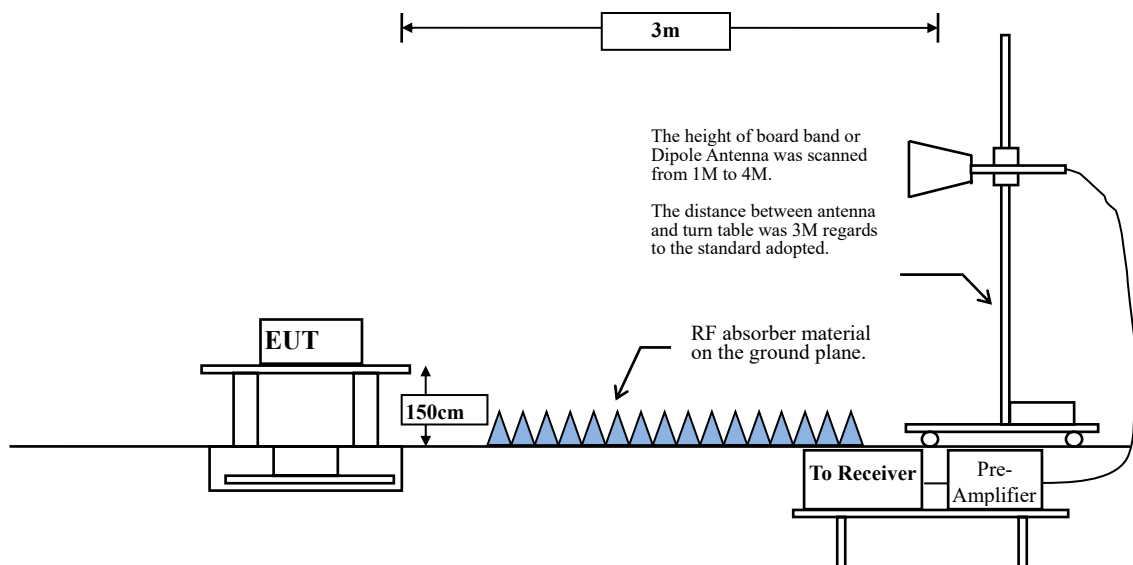

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$


$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	97.59	8.3820	119	200
802.11g	86.48	1.3936	718	1000
802.11ax20	49.50	0.2000	5000	10000
802.11ax40	49.69	0.2019	4953	5000

Note: Duty Cycle Refer to Section 9

6.4. Test Result of Band Edge

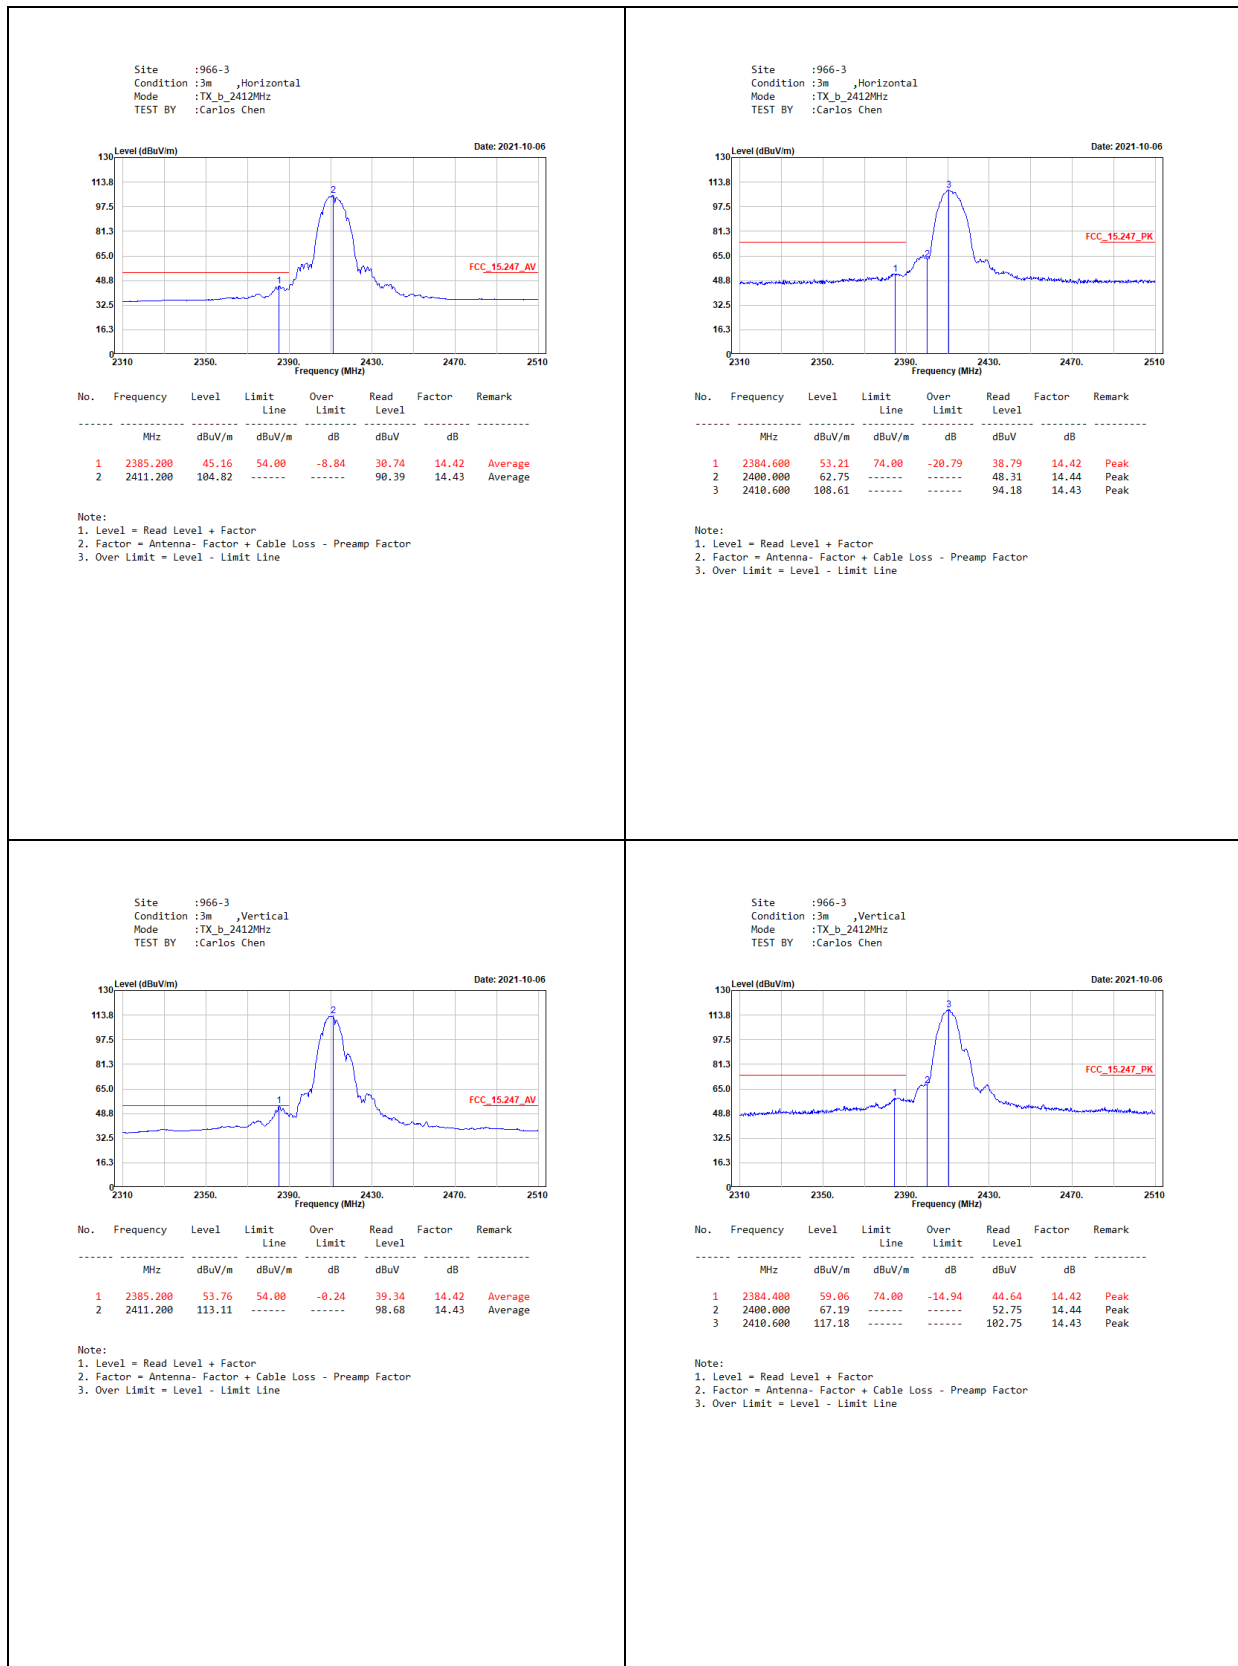


Site :966-3
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

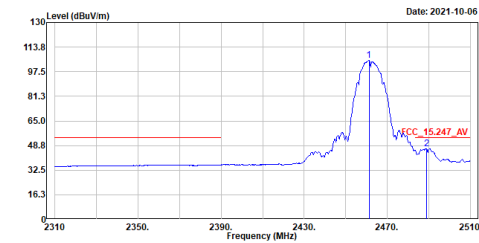

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	104.93	-----	-----	98.50	14.43	Average
2	2488.800	46.84	54.00	-7.16	32.36	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

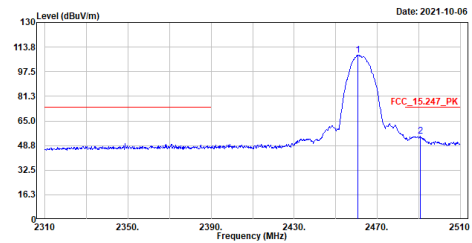

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.800	108.55	-----	-----	94.12	14.43	Peak
2	2490.600	54.77	74.00	-19.23	48.29	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

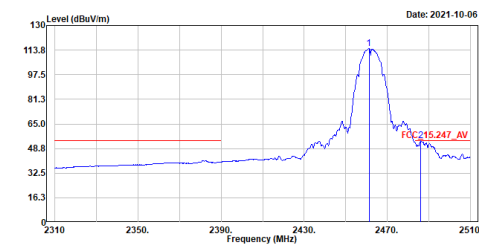

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	114.91	-----	-----	100.48	14.43	Average
2	2486.200	53.72	54.00	-0.28	39.26	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

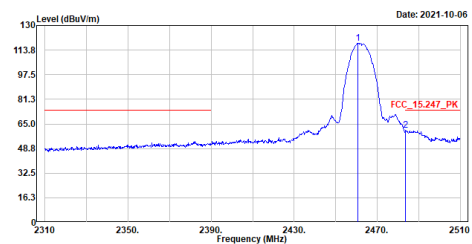

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.800	118.31	-----	-----	103.88	14.43	Peak
2	2483.600	60.87	74.00	-13.13	46.41	14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Gavin Wu

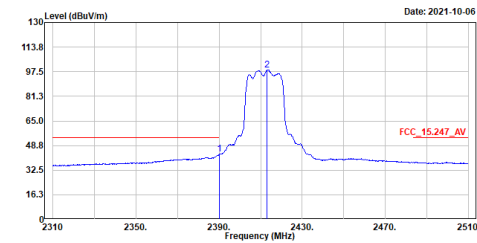

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2398.000	43.17	54.00	-10.83	28.75	14.42	Average
2	2413.200	98.57	-----	-----	84.14	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
TEST BY :Gavin Wu

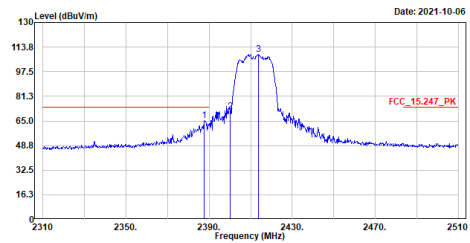

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2387.800	65.35	74.00	-8.65	50.93	14.42	Peak
2	2400.000	71.15	-----	-----	56.71	14.44	Peak
3	2413.800	109.09	-----	-----	94.66	14.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Gavin Wu

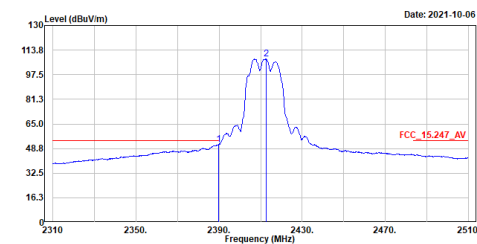

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.800	51.44	54.00	-2.56	37.02	14.42	Average
2	2412.600	107.92	-----	-----	93.49	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Gavin Wu

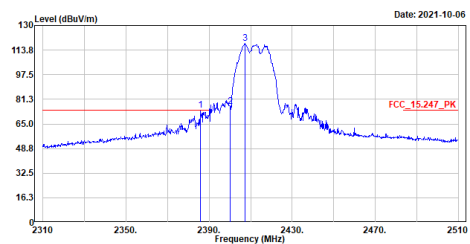

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2386.000	73.89	74.00	-0.11	59.47	14.42	Peak
2	2400.000	76.70	-----	-----	62.26	14.44	Peak
3	2407.200	118.10	-----	-----	103.66	14.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Gavin Wu

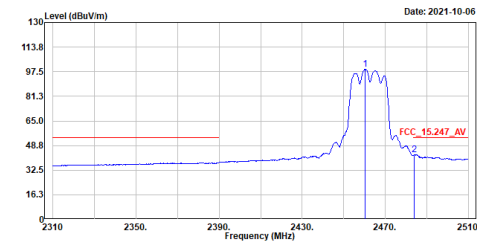

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.200	99.03	-----	-----	84.60	14.43	Average
2	2483.800	42.63	54.00	-11.37	28.17	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
TEST BY :Gavin Wu

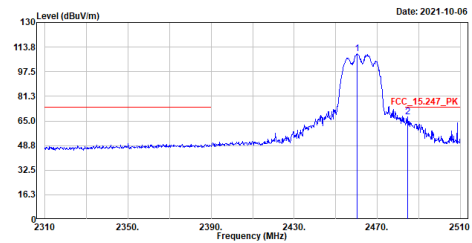

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.200	109.35	-----	-----	94.92	14.43	Peak
2	2484.600	67.75	74.00	-6.25	53.29	14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Gavin Wu

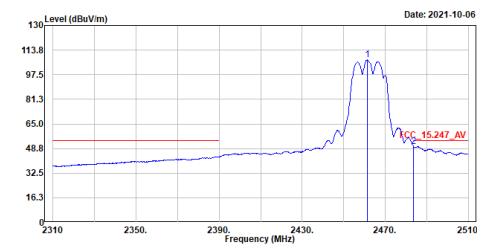

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.400	107.32	-----	-----	92.89	14.43	Average
2	2483.600	50.12	54.00	-3.88	35.66	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_g_2462MHz
TEST BY :Gavin Wu

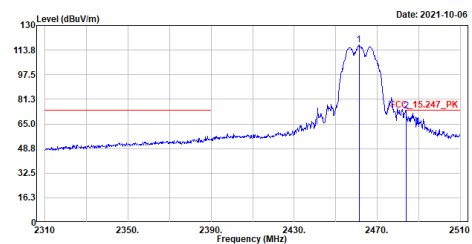

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	117.10	-----	-----	102.67	14.43	Peak
2	2483.800	73.76	74.00	-0.24	59.30	14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
TEST BY :Gavin Wu

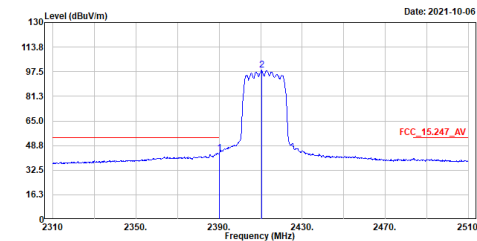

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	43.86	54.00	-10.14	29.44	14.42	Average
2	2410.600	98.50	-----	-----	84.07	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
TEST BY :Gavin Wu

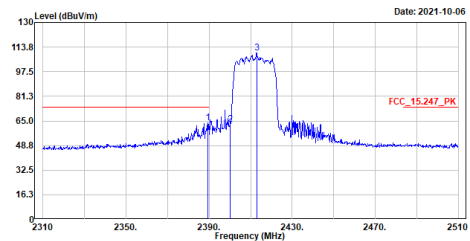

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2389.400	63.99	74.00	-10.01	49.57	14.42	Peak
2	2400.000	63.02	-----	-----	48.58	14.44	Peak
3	2413.000	109.94	-----	-----	95.51	14.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
TEST BY :Gavin Wu

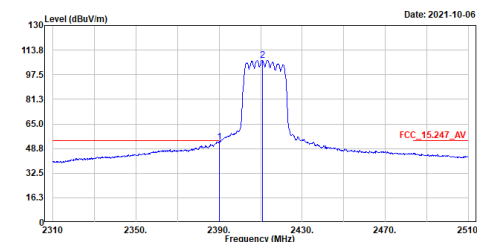

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2390.000	53.17	54.00	-0.83	38.75	14.42	Average
2	2411.000	107.08	-----	-----	92.65	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
TEST BY :Gavin Wu

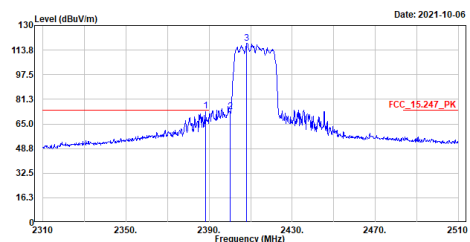

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.400	73.72	74.00	-0.28	59.30	14.42	Peak
2	2400.000	73.09	-----	-----	58.65	14.44	Peak
3	2408.200	118.19	-----	-----	103.76	14.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
TEST BY :Gavin Wu

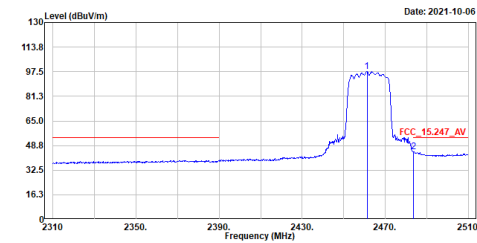

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.200	97.64	-----	-----	83.21	14.43	Average
2	2483.600	44.65	54.00	-9.35	30.19	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
TEST BY :Gavin Wu

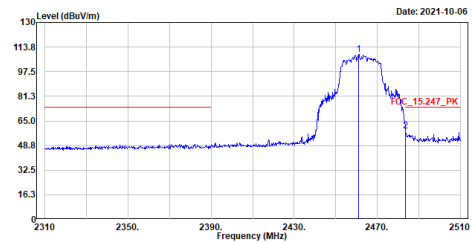

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2461.000	109.04	-----	-----	94.61	14.43	Peak
2	2483.600	58.59	74.00	-15.41	44.13	14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
TEST BY :Gavin Wu

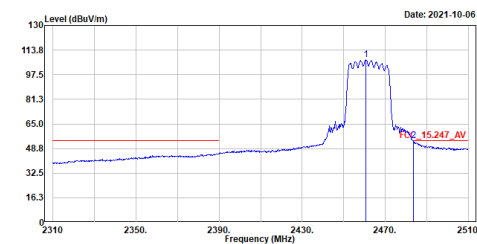

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.800	107.57	-----	-----	93.14	14.43	Average
2	2483.600	53.72	54.00	-0.28	39.26	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
TEST BY :Gavin Wu

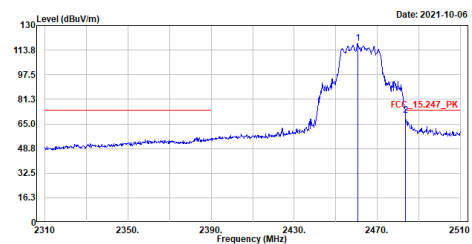

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2460.600	117.99	-----	-----	103.56	14.43	Peak
2	2483.600	70.84	74.00	-3.16	56.38	14.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
TEST BY :Gavin Wu

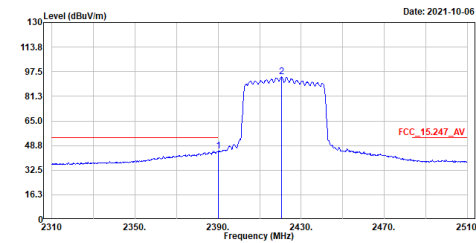

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2398.000	44.94	54.00	-9.06	30.52	14.42	Average
2	2420.400	94.23	-----	-----	79.80	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
TEST BY :Gavin Wu

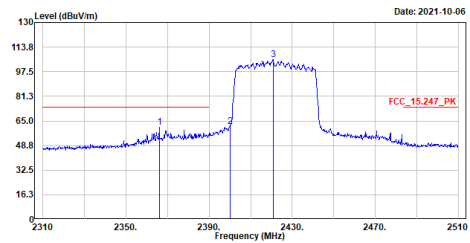

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2366.000	60.60	74.00	-13.40	46.21	14.39	Peak
2	2400.000	61.44	-----	-----	47.00	14.44	Peak
3	2420.800	105.65	-----	-----	91.22	14.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
TEST BY :Gavin Wu

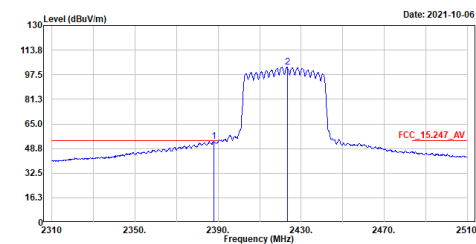

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2388.000	53.70	54.00	-0.30	39.28	14.42	Average
2	2423.400	102.34	-----	-----	87.91	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
TEST BY :Gavin Wu

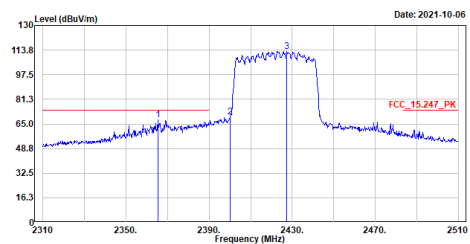

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2365.400	67.60	74.00	-6.40	53.21	14.39	Peak
2	2400.000	69.59	-----	-----	55.15	14.44	Peak
3	2427.400	113.06	-----	-----	98.63	14.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
TEST BY :Gavin Wu

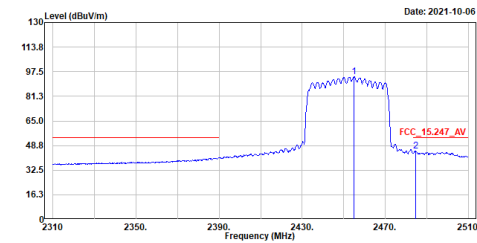

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2455.000	94.27	-----	-----	79.85	14.42	Average
2	2484.600	45.00	54.00	-9.00	30.54	14.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
TEST BY :Gavin Wu

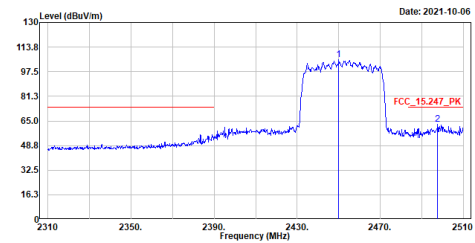

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2450.000	105.70	-----	-----	91.28	14.42	Peak
2	2497.600	62.72	74.00	-11.28	48.23	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
TEST BY :Gavin Wu

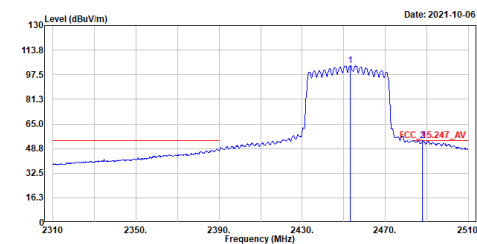

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2453.200	103.43	-----	-----	89.01	14.42	Average
2	2488.000	53.88	54.00	-0.12	39.41	14.47	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
TEST BY :Gavin Wu

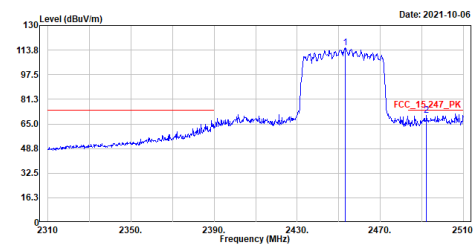


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2453.200	115.41	-----	-----	100.99	14.42	Peak
2	2492.200	70.69	74.00	-3.31	56.21	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

7. 6dB Bandwidth

7.1. Test Setup

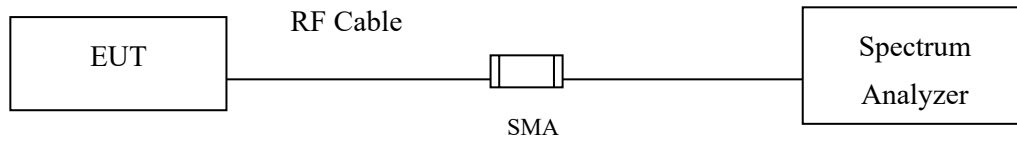

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : InstaShow X Host
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	8150	>500	Pass
06	2437	8100	>500	Pass
11	2462	8150	>500	Pass

Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	8150	>500	Pass
06	2437	8100	>500	Pass
11	2462	8100	>500	Pass

Figure Channel 01 (Chain A):

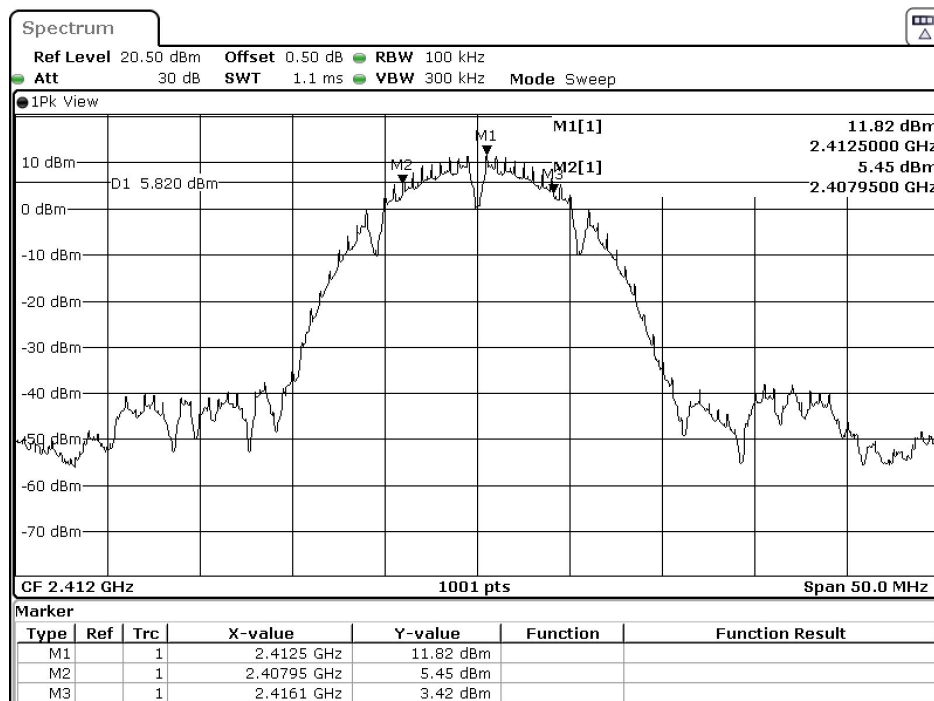

Date: 12.OCT.2021 09:03:42


Product : InstaShow X Host
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15700	>500	Pass
06	2437	15400	>500	Pass
11	2462	15150	>500	Pass

Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15800	>500	Pass
06	2437	15200	>500	Pass
11	2462	15400	>500	Pass

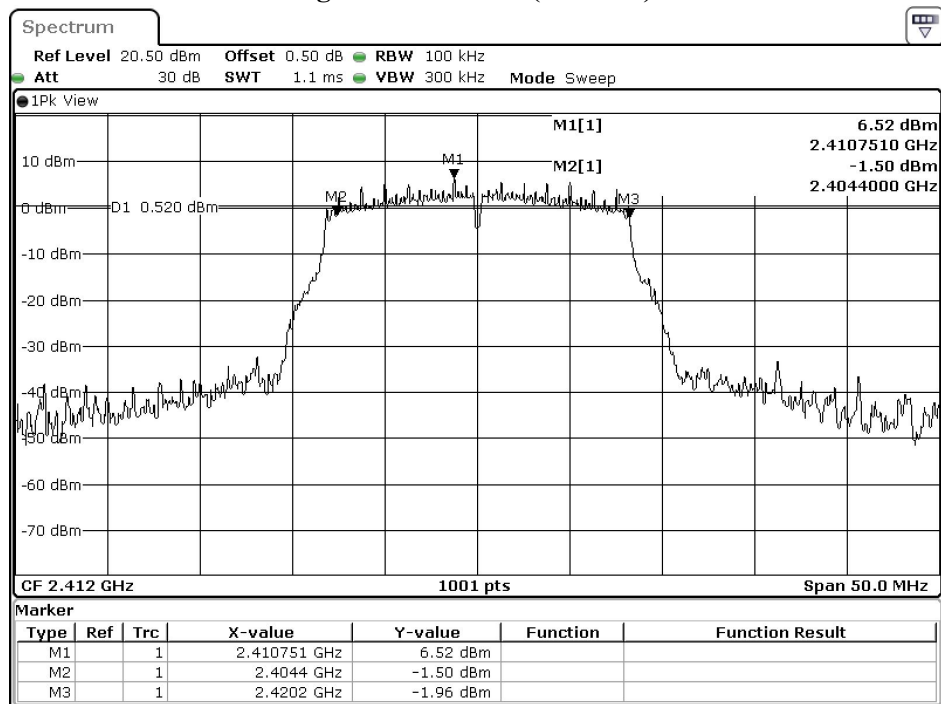Figure Channel 01 (Chain B):

Date: 12.OCT.2021 07:22:22


Product : InstaShow X Host
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15200	>500	Pass
06	2437	17900	>500	Pass
11	2462	15250	>500	Pass

Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15800	>500	Pass
06	2437	18350	>500	Pass
11	2462	16400	>500	Pass

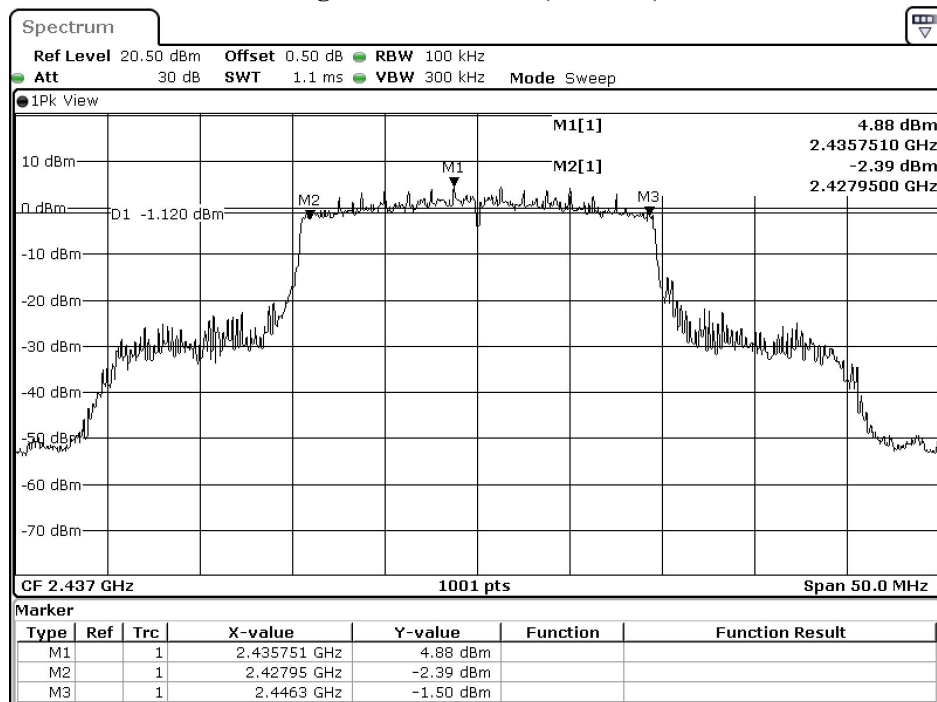Figure Channel 06: (Chain B)

Date: 25.OCT.2021 11:44:54


Product : InstaShow X Host
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 4: Transmit (802.11ax-40MBW 30Mbps)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35200	>500	Pass
06	2437	37200	>500	Pass
09	2452	35200	>500	Pass

Chain B


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35200	>500	Pass
06	2437	36700	>500	Pass
09	2452	35200	>500	Pass

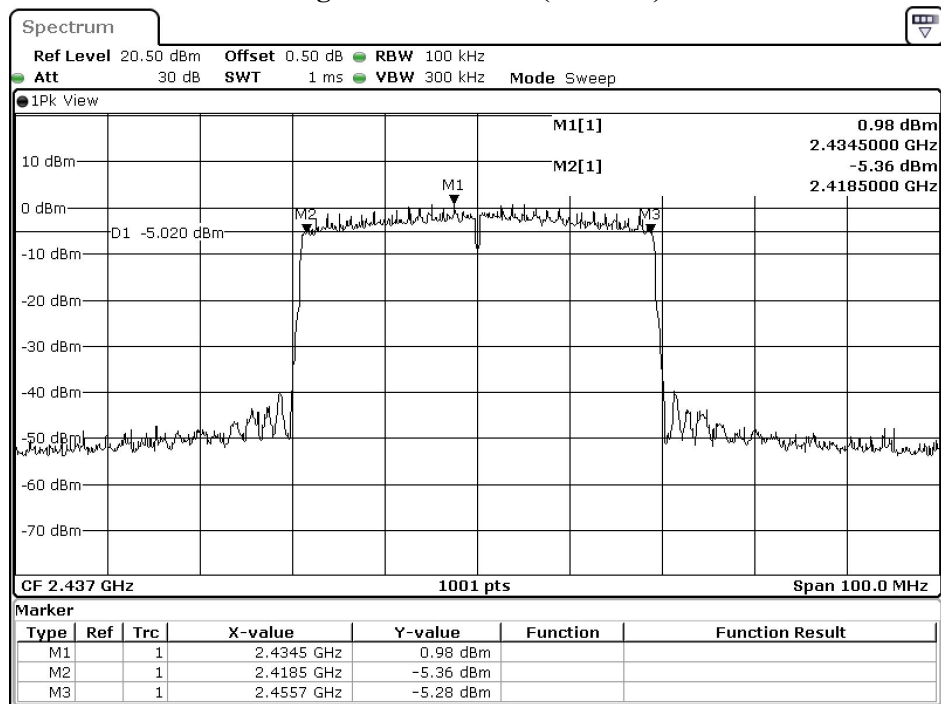Figure Channel 06: (Chain A)

Date: 25.OCT.2021 11:32:58

8. Power Density

8.1. Test Setup

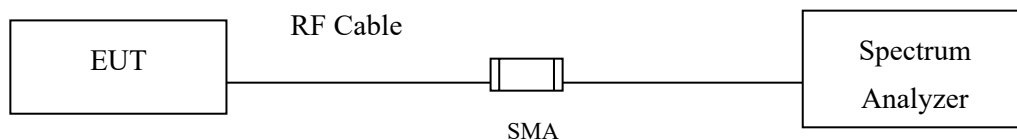

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : InstaShow X Host
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No.	Frequency (MHz)	Chain (dBm)	PPSD/MHz (dBm)	Total PPSD/MHz	Limit (dBm)	Result
01	2412.000	A	3.920	6.930	$\leq 8\text{dBm}$	Pass
		B	4.200	7.210	$\leq 8\text{dBm}$	Pass
06	2437.000	A	2.540	5.550	$\leq 8\text{dBm}$	Pass
		B	3.210	6.220	$\leq 8\text{dBm}$	Pass
11	2462.000	A	3.020	6.030	$\leq 8\text{dBm}$	Pass
		B	3.080	6.090	$\leq 8\text{dBm}$	Pass

Figure Channel 01 (Chain B):

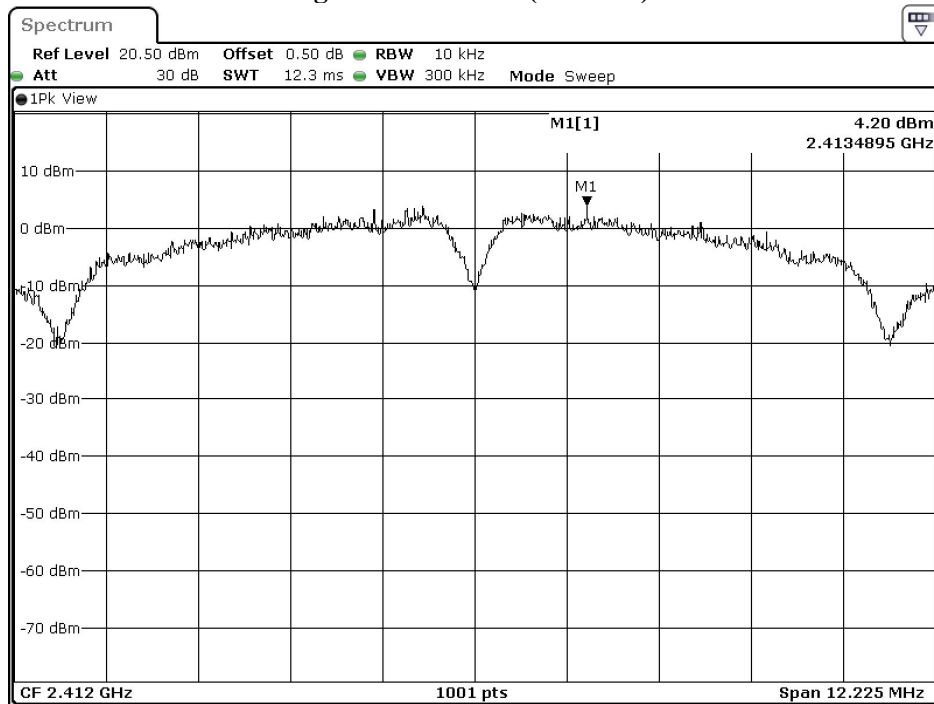


Date: 12.OCT.2021 06:58:23

Product : InstaShow X Host
 Test Item : Power Density Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No.	Frequency (MHz)	Chain	PPSD/MHz (dBm)	Total PPSPD/MHz	Limit (dBm)	Result
03	2412.000	A	4.280	7.290	≤ 8 dBm	Pass
		B	4.070	7.080	≤ 8 dBm	Pass
06	2437.000	A	3.460	6.470	≤ 8 dBm	Pass
		B	3.650	6.660	≤ 8 dBm	Pass
09	2462.000	A	3.820	6.830	≤ 8 dBm	Pass
		B	4.000	7.010	≤ 8 dBm	Pass

Figure Channel 03 (Chain A):

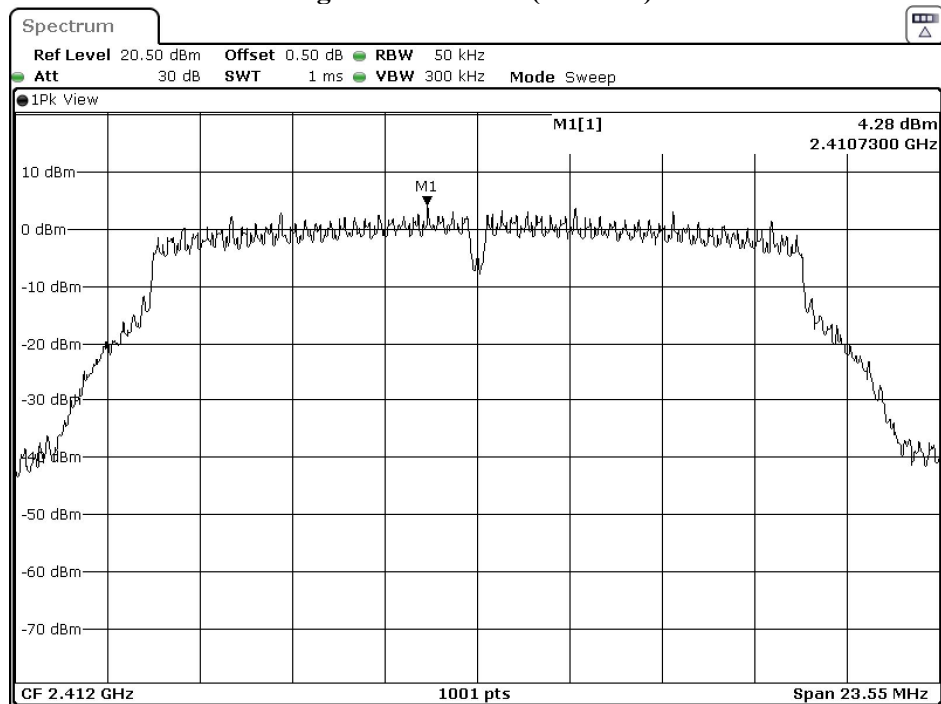

Date: 12.OCT.2021 09:23:44


Product : InstaShow X Host
 Test Item : Power Density Data
 Test Mode : Mode 3: Transmit (802.11ax-20MBW 14.4Mbps)

Channel No.	Frequency (MHz)	Chain	PPSD/MHz (dBm)	Total PPSSD/MHz (dBm)	Limit (dBm)	Result
01	2412.000	A	3.410	6.420	$\leq 8\text{dBm}$	Pass
		B	3.060	6.070	$\leq 8\text{dBm}$	Pass
06	2437.000	A	4.630	7.640	$\leq 8\text{dBm}$	Pass
		B	1.530	4.540	$\leq 8\text{dBm}$	Pass
11	2462.000	A	2.910	5.920	$\leq 8\text{dBm}$	Pass
		B	3.240	6.250	$\leq 8\text{dBm}$	Pass

Note :

The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 06: (Chain B)

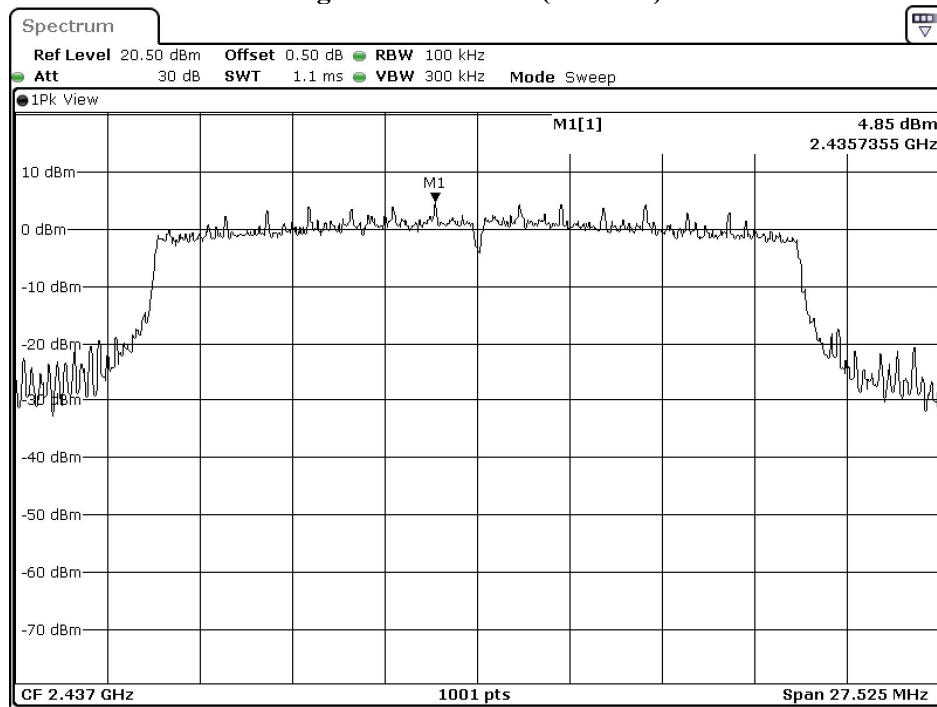

Date: 25.OCT.2021 11:45:16


Product : InstaShow X Host
 Test Item : Power Density Data
 Test Mode : Mode 4: Transmit (802.11ax-40MBW 30Mbps)

Channel No.	Frequency (MHz)	Chain	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
03	2422.000	A	1.910	4.920	$\leq 8\text{dBm}$	Pass
		B	2.110	5.120	$\leq 8\text{dBm}$	Pass
06	2437.000	A	0.920	3.930	$\leq 8\text{dBm}$	Pass
		B	1.300	4.310	$\leq 8\text{dBm}$	Pass
09	2452.000	A	2.250	5.260	$\leq 8\text{dBm}$	Pass
		B	3.920	6.930	$\leq 8\text{dBm}$	Pass

Note :

The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.


Figure Channel 09: (Chain B)

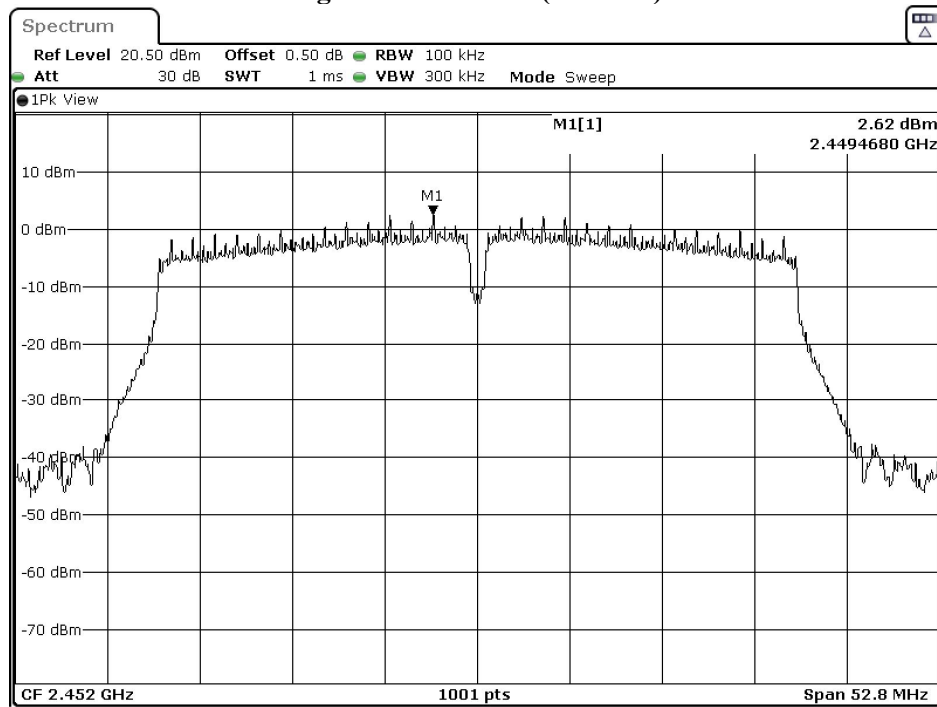

Date: 12.OCT.2021 08:38:43

9. Duty Cycle

9.1. Test Setup

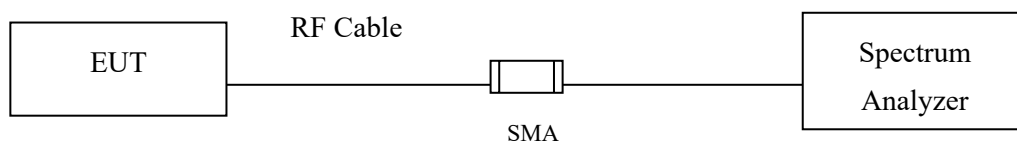

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : InstaShow X Host
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$


Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	8.3820	8.5886	97.59	0.11
802.11g	1.3936	1.6115	86.48	0.63
802.11ax20	0.2000	0.4040	49.50	3.05
802.11ax40	0.2019	0.4063	49.69	3.04


802.11b

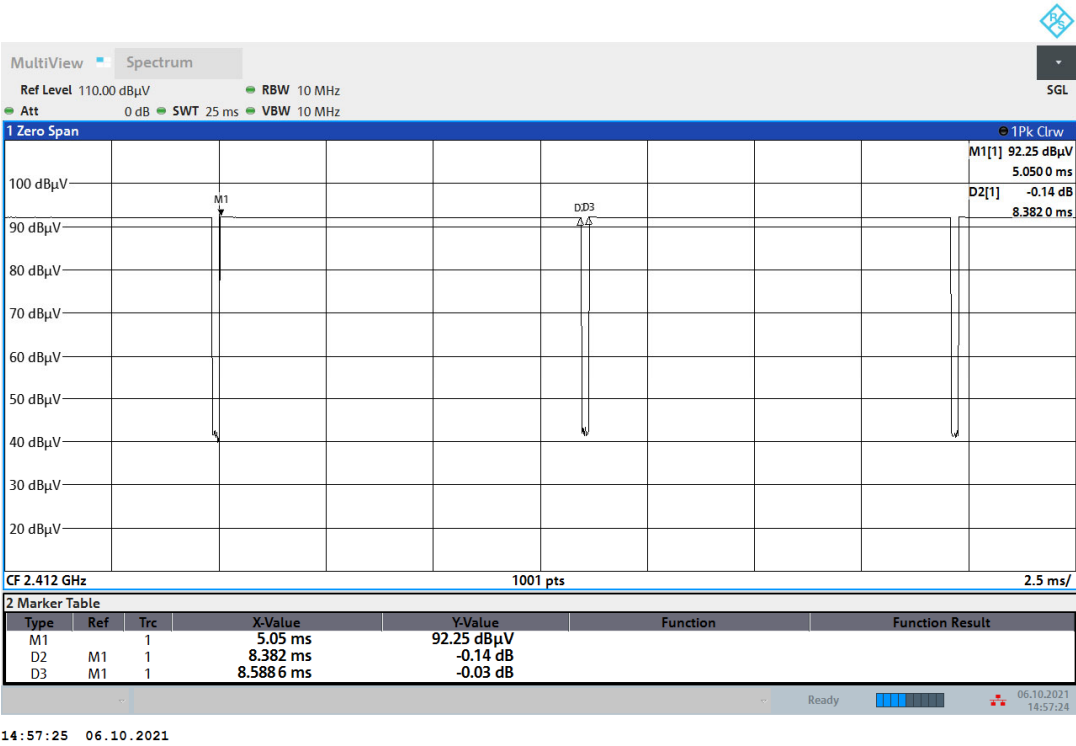


802.11g

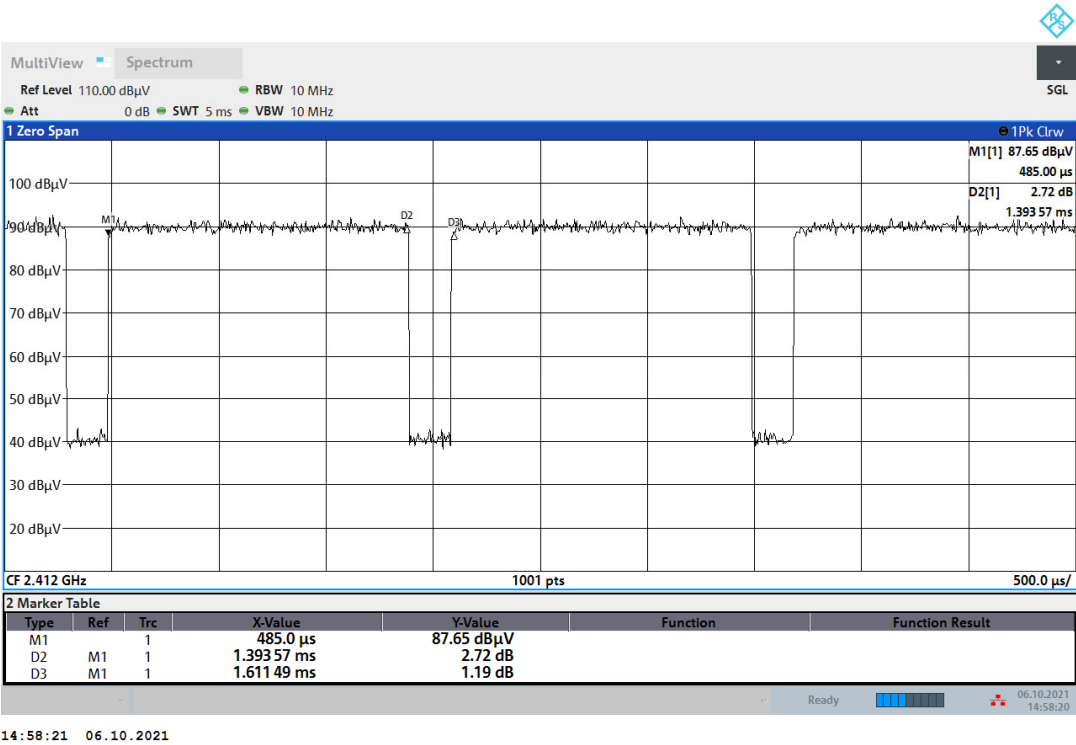

802.11ax20

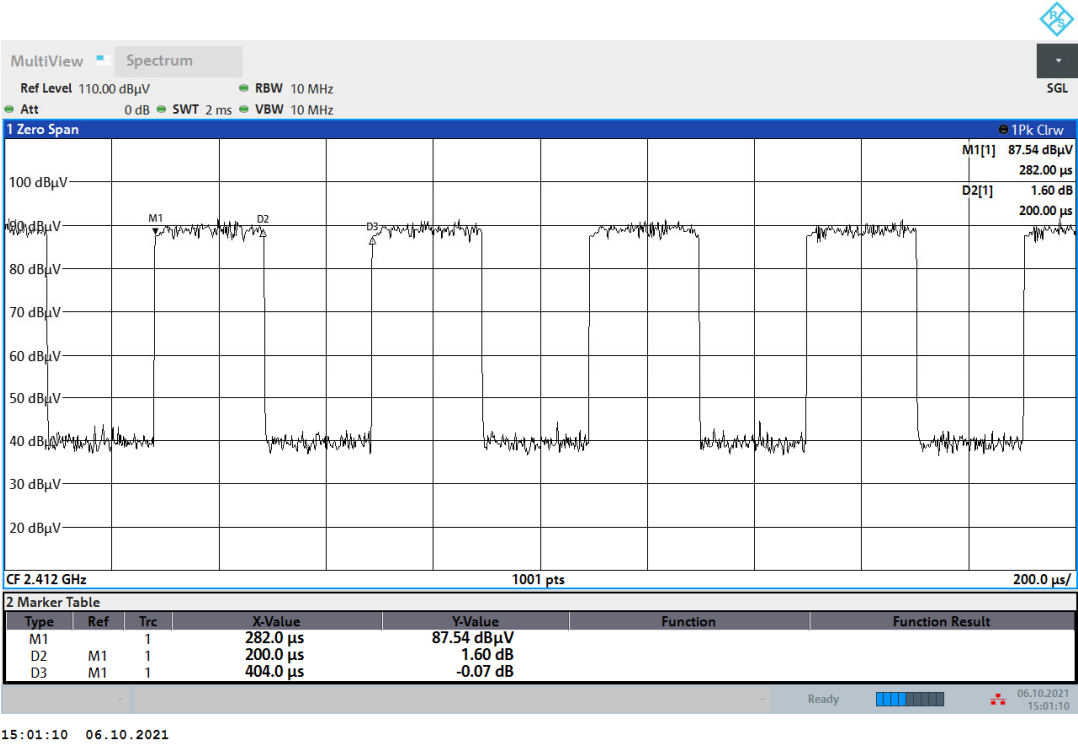

802.11ax40

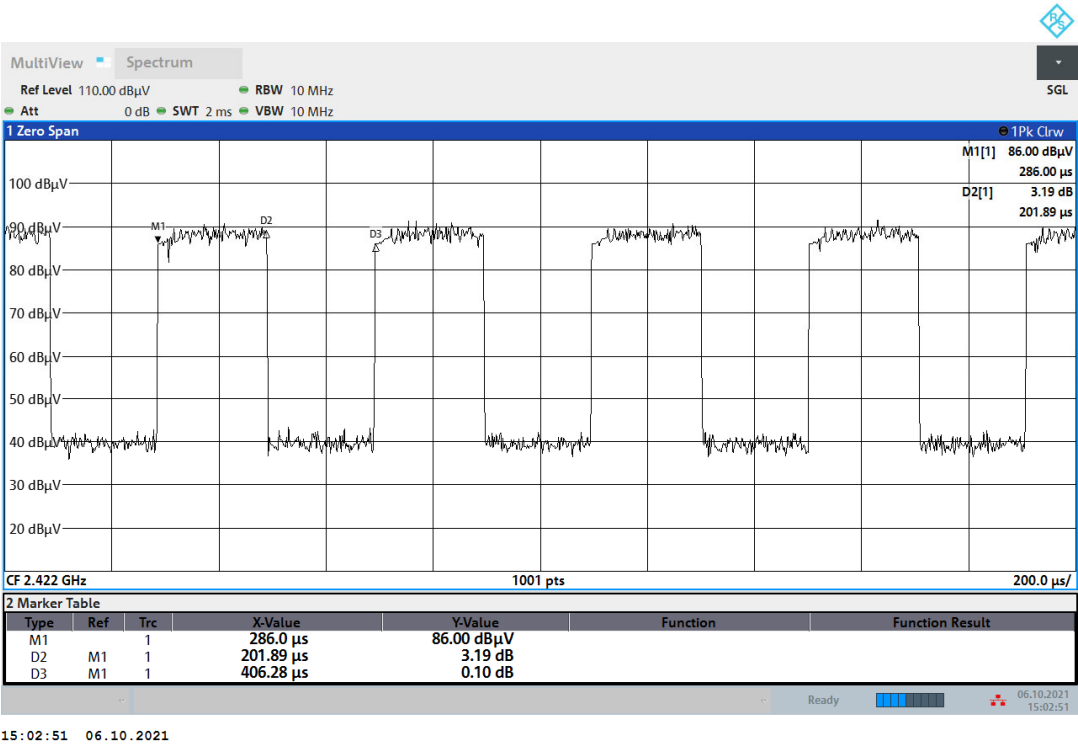

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.