

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name: LG Electronics U.S.A, Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 3/18/2019 - 3/22/2019 Test Site/Location: PCTEST Lab, Columbia, MD, USA Test Report Serial No.: 1M1903070034-12-R1.ZNF Date of Issue: 05/07/2019

FCC ID: ZNFV450VM

APPLICANT: LG ELECTRONICS U.S.A, INC.

Scope of Test: RF Emissions Testing
Application Type: Class II Permissive Change

FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset **Model:** LM-V450VM

Additional Model(s): LMV450VM, V450VM

Test Device Serial No.: Pre-Production Sample [S/N: 05722]

C63.19-2011 HAC Category: M4 (RF EMISSIONS CATEGORY)

Note: This revised Test Report (S/N: 1M1903070034-12-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested. North America bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President





FCC ID: ZNFV450VM	ENGINEERING LASSIADAY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 1 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 1 of 86

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI/IEEE C63.19 PERFORMANCE CATEGORIES	6
4.	SYSTEM SPECIFICATIONS	7
5.	TEST PROCEDURE	. 12
6.	SYSTEM CHECK	. 14
7.	MODULATION INTERFERENCE FACTOR	. 17
8.	RF CONDUCTED POWER MEASUREMENTS	. 24
9.	JUSTIFICATION OF HELD TO EAR MODES TESTED	. 42
10.	LTE TDD UPLINK-DOWNLINK CONFIGURATION	. 43
11.	OVERALL MEASUREMENT SUMMARY	. 44
12.	EQUIPMENT LIST	. 46
13.	MEASUREMENT UNCERTAINTY	. 47
14.	TEST DATA	. 48
15.	CALIBRATION CERTIFICATES	. 55
16.	CONCLUSION	. 81
17.	REFERENCES	. 82
18.	TEST PHOTOGRAPHS	. 84

FCC ID: ZNFV450VM	ENGINEETING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 2 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 2 of 86

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 3 01 00

2. DUT DESCRIPTION



FCC ID: ZNFV450VM

Manufacturer: LG Electronics U.S.A, Inc.

1000 Sylvan Avenue

Englewood Cliffs, NJ 07632

United States

Model: LM-V450VM

Additional Model(s): LMV450VM, V450VM

Serial Number: 05722

Antenna Configurations: Internal Antenna
DUT Type: Portable Handset

Table 2-1ZNFV450VM HAC Air Interfaces

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice	
GSM	1900					
	GPRS/EDGE	VD	No ¹	Yes: WIFI or BT	Google Duo	
	850	VD	No ¹	Yes: WIFI or BT	CMRS Voice	
UMTS	1900	•••	110	res. Will of Di	CIVING VOICE	
	HSPA	VD	No ¹	Yes: WIFI or BT	Google Duo	
	780 (B13)			Yes: WIFI or BT	VoLTE, Google Duo	
	850 (B5)	VD	No ¹			
LTE (FDD)	1700 (B4)					
	1700 (B66)					
	1900 (B2)					
LTE (TDD)	3600 (B48)	VD	Yes	Yes: WIFI or BT	VoLTE, Google Duo	
NR	28000 (Band n261)	VD	Na ²	Yes: WIFI or BT	Google Duo	
NK	39000 (Band n260)	VD	No ²	res: WiFi of B1		
	2450					
	5200 (U-NII 1)					
WIFI	5300 (U-NII 2A)	VD	No ¹	Yes: GSM, UMTS, LTE or NR	VoWIFI, Google Duo	
	5500 (U-NII 2C)					
	5800 (U-NII 3)					
ВТ	2450	DT	No	Yes: GSM, UMTS, LTE or NR	N/A	

Type Transport

Notes:

VO = Voice Only

1. Evaluated for MIF and low-power exemption.

DT = Digital Data - Not intended for Voice Services

2. n260 and n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations therefore

VD = CMRS and/or IP Voice over Data Transport

they were not evaluated.

FCC ID: ZNFV450VM	ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 4 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 4 of 86

I. Power Reduction for WIFI

This device uses an independent fixed level power reduction mechanism for 2.4GHz WIFI operations during voice or VoIP held to ear scenarios as well as simultaneous 2.4GHz and 5GHz WIFI operations. Reduced powers were used to evaluate for low-power exemption in Section 9.II for these modes. Detailed descriptions of the power reduction mechanism are included in the operational description.

II. LTE Band Selection

This device supports the following pair of LTE bands with similar frequencies: LTE B66 & B4. This pair of LTE bands has the same target power and shares the same transmission path. Since the supported frequency span for the smaller LTE band is completely covered by the larger LTE band, only the larger LTE band (LTE B66) was evaluated for hearing-aid compliance.

FCC ID: ZNFV450VM	TENTING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg F of OC
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 5 of 86

ANSI/IEEE C63.19 PERFORMANCE CATEGORIES 3.

I. **RF EMISSIONS**

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

Category	Telephone RF Parameters			
Near field Category	E-field emissions CW dB(V/m)			
	f < 960 MHz			
M1	50 to 55			
M2	45 to 50			
M3	40 to 45			
M4	< 40			
	f > 960 MHz			
M1	40 to 45			
M2	35 to 40			
M3	30 to 35			
M4	< 30			
Table 3-1 WD near-field categories as defined in ANSI C63.19-2011				

FCC ID: ZNFV450VM	ENGINEERING LASORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga C of OC
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 6 of 86

4. SYSTEM SPECIFICATIONS

EF3DV3 E-Field Probe Description

Construction: One dipole parallel, two dipoles normal to probe axis

Built-in shielding against static charges

Calibration: In air from 30 MHz to 6.0 GHz

(absolute accuracy ±5.1%, k=2)

Frequency: 30 MHz to > 6 GHz;

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

Directivity ± 0.2 dB in air (rotation around probe axis)

± 0.4 dB in air (rotation normal to probe axis)

Dynamic Range 2 V/m to > 1000 V/m

(M3 or better device readings fall well below diode

compression point)

Linearity: $\pm 0.2 dB$

Dimensions Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 4.0 mm (Body: 12 mm)

Distance from probe tip to dipole centers: 1.5 mm




Figure 4-1 E-field Free-space Probe

Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

The electric field probes have an irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement").

Connector Plan

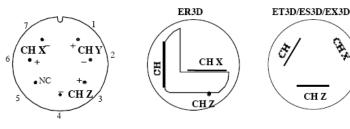

(seen from back) (seen from front)

The antistatic shielding inside the probe is connected to the probe connector case.

FCC ID: ZNFV450VM	PCTEST ENGINEERING LASDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 7 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 7 of 86

Instrumentation Chain

Equation 1

Conversion of Connector Voltage u, to E-Field E,

$$E_i = \sqrt{\frac{u_i + (u_i^2 \cdot CF)/(DCP)}{Norm_i \cdot ConvF}}$$


whereby

Ei: electric field in V/m

voltage of channel i at the connector in µV Иć sensitivity of channel i in µV/(V/m)2 Norm: ConvF: enhancement factor in liquid (ConvF=1 for Air) DCP: diode compression point in µV

CF. signal crest factor (peak power/average power)


Conditions of Calibration



- a lower input impedance of the amplifier will result in different sensitivity factors Norm; and DCP
- larger bias currents will cause higher offset

Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).






Figure 4-2 E-Field Probe Frequency Response

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LADORTORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 8 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		raye o ui ou

SPEAG Robotic System

E-field measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel CORE i7 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).



Figure 4-3 SPEAG Robotic System

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the computer with operating system and RF Measurement Software DASY5 v52.8 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

FCC ID: ZNFV450VM	PCTEST ENGINEERING LASORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 9 01 00

System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.




Figure 4-4 SPEAG Robotic System Diagram

DASY5 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$\begin{aligned} V_i &= U_i + U_i^2 \cdot \frac{cf}{dcp_i} \\ \text{with} \quad V_i &= \text{compensated signal of channel i} & (i = x, y, z) \\ U_i &= \text{input signal of channel i} & (i = x, y, z) \\ cf &= \text{crest factor of exciting field} & (\text{DASY parameter}) \\ dcp_i &= \text{diode compression point} & (\text{DASY parameter}) \end{aligned}$$

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 10 01 00

From the compensated input signals the primary field data for each channel can be evaluated:

$$\mathbf{E} - \text{fieldprobes}: \qquad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)(i = x, v, z)

 $\mu V/(V/m)^2$ for E-field Probes

= sensitivity enhancement in solution

= electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is >500ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500ms and a probe response time of <5 ms. In the current implementation, DASY5 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

Environmental Conditions

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 11 of 00
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 11 of 86

TEST PROCEDURE 5.

I. **RF EMISSIONS**

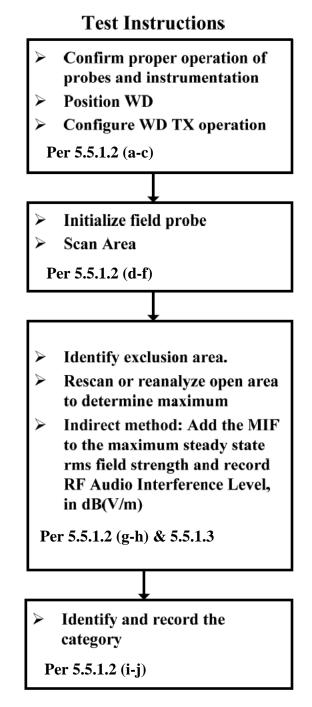


Figure 5-1 RF Emissions Flow Chart

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 12 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 12 01 00

Test Setup




Figure 5-2 E-Field Emissions Test Setup Diagram (See Test Photographs for actual WD scan grid overlay)




Figure 5-3 **HAC Phantom**

RF Emissions Test Procedure:

The following illustrate a typical RF emissions test scan over a wireless communications device:

- 1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
- 2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
- 4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
- 5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
- 6. The measurement system measured the field strength at the reference location.
- 7. Measurements at 2mm or 5mm increments in the 5 x 5 cm region were performed at a distance 15 mm from the center point of the probe measurement element to the WD. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
- 8. The system performed a drift evaluation by measuring the field at the reference location. If the power drift deviated by more than 5%, the HAC test and drift measurements were repeated.


FCC ID: ZNFV450VM	PCTEST' ENGINEERING LADORTORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 13 01 00

6. SYSTEM CHECK

I. System Check Parameters

The input signal was an un-modulated continuous wave. The following points were taken into consideration in performing this check:

- Average Input Power P = 100mW RMS (20dBm RMS) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 15 mm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:



Separation Distance from Dipole to Field Probe

RF power was recorded using both an average reading meter and a peak reading meter. Readings of the probe are provided by the measurement system.

To assure proper operation of the near-field measurement probe the input power to the dipole shall be commensurate with the full rated output power of the wireless device [e.g. - for a cellular phone wireless device the average peak antenna input power will be on the order of 100mW (20dBm) RMS] after adjustment for any mismatch.

II. **Validation Procedure**

A dipole antenna meeting the requirements given in C63.19 was placed in the position normally occupied by the WD.

The length of the dipole was scanned, and the average peak value was recorded.


Measurement of CW

Using the near-field measurement system, scan the antenna over the radiating dipole and record the greatest field reading observed. Due to the nature of E-fields about free-space dipoles, the two E-field peaks measured over the dipole are averaged to compensate for non-parallelity of the setup (see manufacturer method on dipole calibration certificates, page 2). Field strength measurements shall be made only when the probe is stationary.

FCC ID: ZNFV450VM	ENGINEERING LASOFFORT, INC.	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 14 of 00
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 14 of 86


© 2019 PCTEST Engineering Laboratory, Inc.

RF power was recorded using both an average and a peak power reading meter.

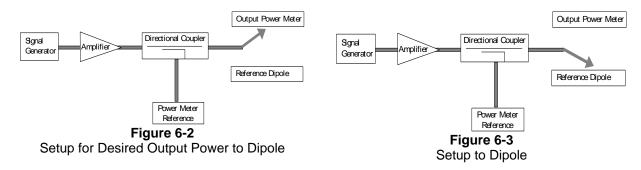

Using this setup configuration, the signal generator was adjusted for the desired output power (100mW) at a specified frequency. The reference power from the coupled port of the directional coupler is recorded. Next, the output cable is connected to the reference dipole, as shown in Figure 6-3.


The input signal level was adjusted until the reference power from the coupled port of the directional coupler was the same as previously recorded, to compensate for the impedance mismatch between the output cable and the reference dipole. To assure proper operation of the near-field measurement probe the input power to the reference dipole was verified to the full rated output power of the wireless device. The dipole was secured in a holder in a manner to meet the 20 dB reflection. The near-field measurement probe was positioned over the dipole. The antenna was scanned over the appropriate sized area to cover the dipole from end to end. SPEAG uses 2D interpolation algorithms between the measured points. Please see below two dimensional plots showing that the interpolated values interpolate smoothly between 5mm steps for a free-space RF dipole:




2-D Raw Data from scan along dipole axis



Figure 6-5
2-D Interpolated points from scan along dipole axis



2-D Raw Data from scan along transverse axis



2-D Interpolated points from scan along transverse axis

FCC ID: ZNFV450VM	PCTEST'	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 15 01 00

System Check Results III.

Validation Results

Date	Frequency (MHz)	Probe S/N	DAE S/N	Dipole S/N	Input Power (dBm)	E-field Result (V/m)	Target Field (V/m)	% Deviation
	835			1003	20.0	109.1	105.2	3.7%
3/18/2019	1880	4035	1272	1137	20.0	92.8	87.8	5.7%
	3500			1005	20.0	88.6	84.1	5.4%

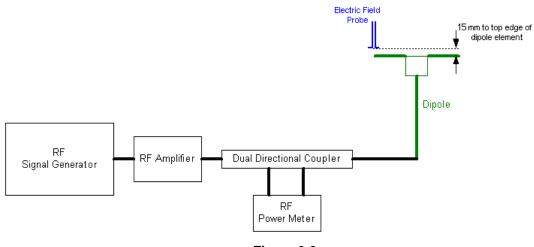


Figure 6-8 System Check Setup

FCC ID: ZNFV450VM	ENGINEERING LASOFFORT, INC.	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 16 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 16 of 86

MODULATION INTERFERENCE FACTOR 7.

I. **Measuring Modulation Interference Factors**

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be determined that relates its interference potential to its steady-state RMS signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. The MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic; any change in modulation characteristic requires determination and application of a new MIF.

The MIF may be determined using a radiated RF field or a conducted RF signal:

- a. Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
- b. Measure the steady-state RMS level at the output of the fast probe or sensor.
- c. Measure the steady-state average level at the weighting output.
- d. Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step c) measurement.
- e. Without changing the carrier level from step d), remove the 1 kHz modulation and again measure the steady-state RMS level indicated at the output of the fast probe or sensor.
- The MIF for the specific modulation characteristic is provided by the ratio of the step e) measurement to the step b) measurement, expressed in dB (20 x log[(step e)/(step b)]).

The following procedure was used to measure the MIF using the SPEAG Audio Interference Analyzer (AIA), Type No: SE UMS 170 CB, Serial No.: 1010:

- 1. The device was placed into a simulated call using a base station simulator or set to transmit using test software for a given mode.
- 2. The device was then set to continuously transmit at maximum power.
- 3. Using a coupler if needed, the device output signal was connected to the RF In port of the AIA, which was connected to a desktop computer. Alternatively, a radiated RF signal may be used with the AIA's built-in antenna.
- 4. The MIF measurement procedure in the DASY software was run, and the resulting MIF value was recorded.
- 5. Steps 1-4 were repeated for all CMRS air interfaces, frequency bands, and modulations.


The modulation interference factors obtained were applied to readings taken of the actual wireless device in order to obtain an accurate audio interference level reading using the formula:

Audio Interference Level [dB(V/m)] = 20 * log[Raw Field Value (V/m)] + MIF (dB)

Because the MIF value is output power independent, MIF values for a given mode should be constant across all devices; however, per C63.19-2011 §D.7, MIF values should be measured for each device being evaluated. The voice modes for this device have been investigated in this section of the report.

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 17 01 00

II. **MIF Measurement Block Diagrams**

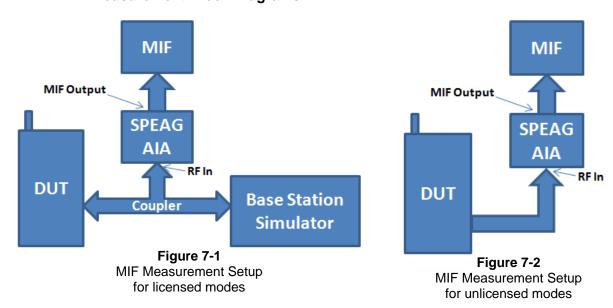

III. **Measured Modulation Interference Factors:**

Table 7-1 GSM Modulation Interference Factors¹

Mode		GSM850			GSM1900		
		128	190	251	512	661	810
CSM	Voice	3.54	3.55	3.55	3.52	3.53	3.52
GSM	EDGE	3.68	3.67	3.68	3.65	3.67	3.66

Table 7-2 UMTS Modulation Interference Factors¹

Mode		UMTS V			UMTS II		
		4132	4183	4233	9262	9400	9538
	12.2 kbps RMC	-23.50	-23.66	-23.80	-23.17	-23.45	-23.47
UMTS	12.2 kbps AMR	-24.06	-24.42	-24.58	-23.86	-23.89	-24.26
	HSUPA Subtest1	-22.49	-22.74	-22.90	-22.45	-23.10	-22.98

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

FCC ID: ZNFV450VM	PCTEST CASCINGLAS DEATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 18 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage to 01 00

Table 7-3 LTE FDD Modulation Interference Factors^{1,2}

			44141011	IIICIICIC	1100 I GO		
LTE Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	MIF [dB]
66	1745.0	132322	20	16QAM	1	0	-10.04
2	1880.0	18900	20	16QAM	1	0	-9.67
13	782.0	23230	10	16QAM	1	0	-10.83
5	836.5	20525	10	16QAM	1	0	-9.87
2	1880.0	18900	20	QPSK	1	0	-15.03
2	1880.0	18900	20	64QAM	1	0	-9.91
2	1880.0	18900	20	16QAM	1	50	-9.89
2	1880.0	18900	20	16QAM	1	99	-9.95
2	1880.0	18900	20	16QAM	50	0	-15.87
2	1880.0	18900	20	16QAM	100	0	-16.78
2	1880.0	18900	15	16QAM	1	0	-9.69
2	1880.0	18900	10	16QAM	1	0	-9.65
2	1880.0	18900	5	16QAM	1	0	-9.45
2	1880.0	18900	3	16QAM	1	0	-9.61
2	1880.0	18900	1.4	16QAM	1	0	-10.44
2	1850.7	18625	5	16QAM	1	0	-10.64
2	1909.3	19175	5	16QAM	1	0	-9.54

Table 7-4 LTE FDD Uplink Carrier Aggregation Modulation Interference Factor^{1,4}

	ETE TOD Opinik Outlier Aggregation Modulation Interference Tactor														
		PCC						SCC							
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	MIF (dB)
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	49	-10.49

Table 7-5 LTE TDD B48 Modulation Interference Factors^{1,3}

	ETE TEE ETO MOGGICULOT INCOTOTOTO T dolors											
LTE Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	MIF [dB]					
48	3603.3	55773	20	16QAM	1	0	3.66					
48	3603.3	55773	20	QPSK	1	0	3.61					
48	3603.3	55773	20	64QAM	1	0	3.47					
48	3603.3	55773	20	16QAM	1	50	3.56					
48	3603.3	55773	20	16QAM	1	99	3.56					
48	3603.3	55773	20	16QAM	50	0	3.41					
48	3603.3	55773	20	16QAM	100	0	3.42					
48	3603.3	55773	15	16QAM	1	0	3.70					
48	3603.3	55773	10	16QAM	1	0	3.69					
48	3603.3	55773	5	16QAM	1	0	3.56					
48	3557.5	55315	15	16QAM	1	0	3.63					
48	3647.5	56215	15	16QAM	1	0	3.49					
48	3692.5	56665	15	16QAM	1	0	3.73					

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

⁴ Note: LTE FDD ULCA was evaluated to ensure LTE FDD standalone was the worst-case scenario. The configurations in Table 7-4 were determined from Table 7-3 and satisfy the configuration requirements as defined in 3GPP 36.101.

FCC ID: ZNFV450VM	PCTEST ENGINEERING LASDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 19 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 19 01 00

² Note: All FDD LTE bands were found to have substantially similar MIF values given similar RB, BW, and modulation configurations.

³ Note: LTE TDD MIFs were taken using UL-DL Configuration 5. More information about the chosen UL-DL Configuration can be found in Section 10.

Table 7-6

802.11b (2.4GHz, SISO) Modulation Interference Factors^{1,2}

	802.11b MIF Measurements [dB]									
Mode	Data Rate [Mbps]									
	1	1 2 5.5 11								
802.11b	-10.39 -14.12 -11.74 -11.01									

Table 7-7

802.11b (2.4GHz, MIMO) Modulation Interference Factors^{1,2}

802.11b MIF Measurements [dB]									
Mode		Data Rate [Mbps]							
	1	1 4 11 22							
802.11b	-10.32	-10.32 -14.12 -13.61 -12.23							

Table 7-8

802.11g (2.4GHz, SISO) Modulation Interference Factors^{1,2}

	COZ. 11g (Z. 1011Z, C100) Modulation interference 1 detere											
			802.11	1g MIF Mea	asurement	s [dB]						
Mode		Data Rate [Mbps]										
	6	6 9 12 18 24 36 48 54										
802.11g	-12.23	12.23 -11.44 -11.09 -10.18 -9.67 -9.38 -9.44 -9.50										

Table 7-9

802.11g (2.4GHz, MIMO) Modulation Interference Factors^{1,2}

	802.11g MIF Measurements [dB]											
Mode		Data Rate [Mbps] 12 18 24 36 48 72 92 108										
	12											
802.11g	-11.97	-11.97 -11.27 -10.84 -10.01 -9.46 -9.14 -9.27 -9.33										

Table 7-10

802.11n (2.4GHz, SISO) Modulation Interference Factors^{1,2}

	COZ.TITI (Z.+GTIZ, GIGG) Woodalation interioride i dotoro											
			802.11n (2	.4GHz) MIF	Measurer	nents [dB]						
Mode		Data Rate [Mbps] 6.5 13 19.5 26 39 52 58.5 65										
	6.5											
802.11n	-12.43	12.43 -11.08 -10.24 -9.87 -9.45 -9.57 -9.66 -9.80										

Table 7-11

802.11n (2.4GHz, MIMO) Modulation Interference Factors^{1,2}

	oczi i i (zi i or iz) i i i i o dalacio i i i torio o i accoro											
	802.11n (2.4GHz) MIF Measurements [dB]											
Mode		Data Rate [Mbps]										
	13	13 26 39 52 78 104 117 130										
802.11n	-12.21	-12.21 -10.80 -9.96 -9.62 -9.26 -9.44 -9.49 -9.63										

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

² Note: WIFI MIF values were found to be independent of the transmit channel.

FCC ID: ZNFV450VM	PCTEST CAGINETINE LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 20 01 00

Table 7-12 802.11ac (2.4GHz, SISO) Modulation Interference Factors^{1,2}

	802.11ac (2.4GHz) MIF Measurements [dB]											
Mode		Data Rate [Mbps]										
	6.5	6.5 13 19.5 26 39 52 58.5 65 78										
802.11ac	-12.38	12.38 -11.09 -10.36 -9.74 -9.50 -9.52 -9.57 -9.78 -10.08										

Table 7-13

802.11ac (2.4GHz, MIMO) Modulation Interference Factors^{1,2}

			802.11	lac (2.4GH	z) MIF Mea	surement	s [dB]					
Mode		Data Rate [Mbps]										
	13	26	39	52	78	104	117	130	156			
802.11ac	c -12.12 -10.90 -10.07 -9.52 -9.34 -9.41 -9.45 -9.71 -9.91											

Table 7-14

802.11a (5GHz, 20MHz BW, SISO) Modulation Interference Factors^{1,2}

		802.11a MIF Measurements [dB]										
Mode		Data Rate [Mbps]										
	6	9	12	18	24	36	48	54				
802.11a	-12.27 -11.47 -11.12 -10.22 -9.71 -9.45 -9.49 -7.09											

Table 7-15

802.11a (5GHz, 20MHz BW, MIMO) Modulation Interference Factors^{1,2}

		<u>, , , , , , , , , , , , , , , , , , , </u>	802.1	1a MIF Me	asurement	s [dB]						
Mode		Data Rate [Mbps]										
	12	18	24	36	48	72	92	108				
802.11a	-12.19 -11.28 -10.87 -10.06 -9.53 -9.19 -9.29 -9.31											

Table 7-16

802 11n (5GHz 20MHz BW SISO) Modulation Interference Factors^{1,2}

	002.111	1 (30112, 20		SiSO) ivida	diation inte	Herence i a	301013				
	20MHz BW 802.11n (5GHz) MIF Measurements [dB]										
Mode	Data Rate [Mbps]										
	6.5	13	19.5	26	39	52	58.5	65			
802.11n	-12.47	-11.12	-10.25	-9.93	-9.55	-9.68	-9.70	-9.88			

Table 7-17

802.11n (5GHz, 20MHz BW, MIMO) Modulation Interference Factors^{1,2}

		20M	Hz BW 802	.11n (5GHz) MIF Mea	surements	[dB]					
Mode		Data Rate [Mbps]										
	13	26	39	52	78	104	117	130				
802.11n	-11.86	-10.77	-9.80	-9.71	-9.43	-9.56	-9.62	-9.71				

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

² Note: WIFI MIF values were found to be independent of the transmit channel.

FCC ID: ZNFV450VM	PCTEST ENGINEERING LAJORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 21 01 00

Table 7-18802.11ac (5GHz, 20MHz BW, SISO) Modulation Interference Factors^{1,2}

	20MHz BW 802.11ac (5GHz) MIF Measurements [dB]											
Mode		Data Rate [Mbps]										
	6.5	13	19.5	26	39	52	58.5	65	78			
802.11ac	1ac -12.45 -11.13 -10.40 -9.79 -9.58 -9.57 -9.66 -9.89 -1											

Table 7-19

802.11ac (5GHz, 20MHz BW, MIMO) Modulation Interference Factors^{1,2}

	20MHz BW 802.11ac (5GHz) MIF Measurements [dB]											
Mode		Data Rate [Mbps]										
	13	26	39	52	78	104	117	130	156			
802.11ac	nc -12.08 -10.59 -10.14 -9.29 -9.13 -9.49 -9.32 -9.76 -9.70											

Table 7-20

802.11n (5GHz, 40MHz BW, SISO) Modulation Interference Factors^{1,2}

		40MH	lz BW 802	.11n (5GHz) MIF Mea	surements	[dB]					
Mode		Data Rate [Mbps]										
	13.5	27	40.5	54	81	108	121.5	135				
802.11n	-10.88 -9.68 -9.23 -8.87 -9.26 -9.73 -7.15 -7.26											

Table 7-21

802.11n (5GHz, 40MHz BW, MIMO) Modulation Interference Factors^{1,2}

		40MI	40MHz BW 802.11n (5GHz) MIF Measurements [dB]								
Mode	Data Rate [Mbps]										
	27 54 81 108 162 216 243										
802.11n	-10.81 -9.41 -9.13 -8.57 -8.99 -9.52 -9.96 -10.12										

Table 7-22

802.11ac (5GHz, 40MHz BW, SISO) Modulation Interference Factors^{1,2}

		`	40MHz BW	802.11ac	(5GHz) MIF	Measure	ments [dB]					
Mode		Data Rate [Mbps]										
	13.5	27	40.5	54	81	108	121.5	135	180			
802.11ac	-10.80	-9.68	-9.17	-8.88	-9.22	-9.72	-10.02	-7.33	-10.71			

Table 7-23

802.11ac (5GHz, 40MHz BW, MIMO) Modulation Interference Factors^{1,2}

	002.	1100 (5011	2, 40111112	DVV, IVIIIVIC) Modulati	on michici	snoc i acic	// 3				
			40MHz BW	802.11ac	(5GHz) MIF	Measure	ments [dB]					
Mode		Data Rate [Mbps]										
	27	54	81	108	162	216	243	270	360			
802.11ac	-10.81	-9.40	-8.94	-8.56	-9.08	-9.52	-9.90	-10.08	-8.65			

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

² Note: WIFI MIF values were found to be independent of the transmit channel.

FCC ID: ZNFV450VM	PCTEST'	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 22 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 22 01 00

Table 7-24 802.11ac (5GHz, 80MHz BW, SISO) Modulation Interference Factors^{1,2}

	COZITTAC (COTIZ) COMMIZ BITT, CICO / Micadiation interiorica i actore										
	80MHz BW 802.11ac (5GHz) MIF Measurements [dB]										
Mode		Data Rate [Mbps]									
	29.3	29.3 58.5 87.8 117 175.5 234 263.3 292.5 351 390									
802.11ac	-10.97	-9.79	-9.27	-9.01	-9.42	-9.98	-10.30	-7.34	-10.80	-11.07	

Table 7-25

802.11ac (5GHz, 80MHz BW, MIMO) Modulation Interference Factors^{1,2}

	80MHz BW 802.11ac (5GHz) MIF Measurements [dB]									
Mode		Data Rate [Mbps]								
	58.5	117	175.5	234	351	468	526.5	585	702	780
802.11ac	-10.84	-9.68	-9.07	-8.90	-9.11	-9.89	-10.15	-10.38	-10.89	-11.17

Table 7-26

Simultaneous 2.4GHz and 5GHz WIFI Modulation Interference Factors^{1,2,3}

# Tx	5 GHz WIFI [dBm]		2.4 GHz WIFI [dBm]		Measured MIF (dB)
IX	Ant1	Ant1 Ant2 Ant1 Ant2		Ant2	
2	-	х	х	-	-11.03

¹ Note: Measured MIF values may be lower than sample MIF values provided in ANSI C63.19-2011 Annex D.7 Table D.5 due to manufacturing variations for each device, however per Annex D.7, the sample MIF values of Table D.5 are not intended to substitute for measurements of actual devices under test and their respective operating modes.

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 22 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 23 of 86

² Note: WLAN MIF values were found to be independent of the transmit channel.

³ Note: The configuration for each scenario (e.g. bandwidth, data rate, etc.) was determined using the worst-case configuration from SISO MIF measurements.

RF CONDUCTED POWER MEASUREMENTS 8.

I. Procedures Used to Establish RF Signal for HAC Testing

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing HAC and are recommended for evaluating HAC. Measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator.

II. **HAC Measurement Conditions**

Output Power Verification

Maximum output power is verified on the High, Middle and Low channels for all applicable air interfaces. See Table 8-1 for air interface specific settings of transmit power parameters.

> Table 8-1 Power Control Parameters and Settings by Air Interface

Air Interface:	Parameter Name:	Parameter Set To:	
GSM	PCL	GSM850: "5"; GSM1900: "0"	
UMTS	TPC	"All 1's"	
LTE	TPC	"Max Power"	
WIFI	Mfr Configured	Mfr Specified	

Setup Used to Measure RF Conducted Powers III.

Power measurements for licensed modes were performed using a base station simulator under digital average power. Power measurements for unlicensed modes were performed using a power meter and power sensor.




Figure 8-1 Power Measurement Setup for licensed modes




Figure 8-2 Power Measurement Setup for unlicensed modes

IV. **GSM Conducted Powers**

Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
	128	33.56	26.80
GSM 850	190	33.47	26.65
	251	33.44	26.70
	512	31.16	25.66
GSM 1900	661	31.16	25.69
	810	31.08	25.71

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 24 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 24 of 86

٧. **UMTS Conducted Powers**

Mode	Wode 3GPP 34.121 Cellular Band [dBm] Subtest			PCS Band [dBm]			
	Subtest	4132	4183	4233	9262	9400	9538
WCDMA	12.2 kbps RMC	25.39	25.44	25.39	25.16	25.10	25.09
VVCDIVIA	12.2 kbps AMR	25.32	25.35	25.22	25.20	25.10	24.83
HSUPA	Subtest 1	25.26	25.24	25.43	24.42	24.59	24.57

VI. **LTE Conducted Powers**

a. LTE Band 13

Table 8-2 LTE Band 13 (780.0MHz) Conducted Powers - 10MHz Bandwidth

			LTE Band 13 10 MHz Bandwidth		
Modulation	RB Size	RB Offset	Mid Channel 23230 (782.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			Conducted Power [dBm]	JOFF [UB]	
	1	0	25.10		0
	1	25	25.02	0	0
	1	49	25.06		0
QPSK	25	0	24.25		1
	25	12	24.04	0-1	1
	25	25	24.09	0-1	1
	50	0	24.20		1
	1	0	24.25		1
	1	25	24.07	0-1	1
	1	49	24.12		1
16QAM	25	0	23.24		2
	25	12	23.20	0-2	2
	25	25	23.18	0-2	2
	50	0	23.38		2
	1	0	23.03		2
	1	25	23.25	0-2	2
	1	49	23.22		2
64QAM	25	0	22.07		3
	25	12	22.08	0-3	3
	25	25	22.08	0-3	3
	50	0	22.40		3

FCC ID: ZNFV450VM	ENGINEERING LASSIADAY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dog 05 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 25 of 86

Table 8-3 LTE Band 13 (780.0MHz) Conducted Powers - 5MHz Bandwidth

			LTE Band 13 5 MHz Bandwidth		
			Mid Channel		
Modulation	RB Size	RB Offset	23230 (782.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			Conducted Power [dBm]	55.7 []	
	1	0	25.26		0
	1	12	25.22	0	0
	1	24	25.12		0
QPSK	12	0	24.24		1
	12	6	24.19	0-1	1
•	12	13	24.35	0-1	1
	25	0	24.04		1
	1	0	24.30		1
	1	12	24.24	0-1	1
	1	24	24.09		1
16QAM	12	0	23.19		2
	12	6	23.30	0-2	2
	12	13	23.15	0-2	2
	25	0	23.28		2
	1	0	23.00		2
	1	12	23.32	0-2	2
	1	24	23.08		2
64QAM	12	0	22.10		3
	12	6	22.25	0-3	3
	12	13	22.31	0-3	3
	25	0	22.30		3

Note: Since LTE Band 13 at 5MHz bandwidth does not support 3 non-overlapping channels, conducted power measurements were made only on the middle channel.

b. LTE Band 5

Table 8-4 LTE Band 5 (836.5MHz) Conducted Powers - 10MHz Bandwidth

LTE Band 5 (636.5MHz) Conducted Powers – ToMHz Bandwidth									
			LTE Band 5 (Cell) 10 MHz Bandwidth						
			Mid Channel						
Modulation	RB Size	RB Offset	20525 (836.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]				
			Conducted Power	55[45]					
			[dBm]						
	1	0	25.50		0				
	1	25	25.09	0	0				
QPSK	1	49	25.25		0				
	25	0	24.24		1				
	25	12	24.05	0-1	1				
	25	25	24.10	0-1	1				
	50	0	24.10		1				
	1	0	24.36		1				
	1	25	24.36	0-1	1				
	1	49	24.18		1				
16QAM	25	0	23.10		2				
	25	12	23.38	0-2	2				
	25	25	23.14	0-2	2				
	50	0	23.17		2				
	1	0	23.08		2				
	1	25	23.32	0-2	2				
	1	49	23.16		2				
64QAM	25	0	22.32		3				
	25	12	22.26	0-3	3				
	25	25	22.14	0-3	3				
	50	0	22.04		3				

Note: Since LTE Band 5 at 10MHz bandwidth does not support 3 non-overlapping channels, conducted power measurements were made only on the middle channel.

FCC ID: ZNFV450VM	PCTEST CAGINETINE LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 20 01 00

© 2019 PCTEST Engineering Laboratory, Inc.

Table 8-5
LTE Band 5 (836.5MHz) Conducted Powers – 5MHz Bandwidth

		LIE Dall	u 3 (630.3IVITIZ)	Conducted Po	JWEIS - SIVINZ	Danuwium	
				LTE Band 5 (Cell)			
			I OhI	5 MHz Bandwidth	High Observat	T	
			Low Channel	Mid Channel	High Channel	I	
Modulation	RB Size	RB Offset	20425	20525	20625	MPR Allowed per 3GPP [dB]	MPR [dB]
			(826.5 MHz)	(836.5 MHz)	(846.5 MHz)	JOPP [GB]	
				Conducted Power [dBm			
	1	0	25.21	25.34	25.22	0	0
	1	12	25.26	25.35	25.16		0
	1	24	25.29	25.01	25.29		0
QPSK	12	0	24.03	24.39	24.11]	1
	12	6	24.03	24.39	24.07	0-1	1
	12	13	24.28	24.37	24.09		1
	25	0	24.14	24.13	24.09		1
	1	0	24.39	24.08	24.38	0-1	1
	1	12	24.03	24.01	24.31		1
	1	24	24.10	24.25	24.39		1
16QAM	12	0	23.33	23.04	23.30		2
	12	6	23.13	23.12	23.40	0-2	2
	12	13	23.11	23.28	23.07] 0-2	2
	25	0	23.10	23.39	23.31	1	2
	1	0	23.02	23.25	23.26		2
	1	12	23.24	23.15	23.39	0-2	2
	1	24	23.06	23.17	23.00	1	2
64QAM	12	0	22.03	22.17	22.13		3
	12	6	22.17	22.32	22.03	0-3	3
	12	13	22.02	22.26	22.00		3
	25	0	22.06	22.37	22.20	1	3

Table 8-6 LTE Band 5 (836.5MHz) Conducted Powers – 3MHz Bandwidth

		LIEBan	a 5 (836.5WHZ)	Conducted Po	owers – JIVIHZ	Banawiath	
				LTE Band 5 (Cell) 3 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm]		
	1	0	25.01	25.12	25.14		0
	1	7	25.39	25.01	25.36	0	0
	1	14	25.11	25.18	25.11]	0
QPSK	8	0	24.14	24.39	24.14		1
	8	4	24.11	24.38	24.21	0-1	1
	8	7	24.20	24.23	24.06	0-1	1
	15	0	24.20	24.39	24.23		1
	1	0	24.08	24.23	24.08	0-1	1
	1	7	24.16	24.19	24.17		1
	1	14	24.08	24.16	24.03		1
16QAM	8	0	23.08	23.03	23.35		2
	8	4	23.09	23.29	23.08	0-2	2
	8	7	23.26	23.18	23.31	0-2	2
	15	0	23.35	23.06	23.01		2
	1	0	23.36	23.01	23.12		2
	1	7	23.25	23.22	23.19	0-2	2
	1	14	23.20	23.34	23.14		2
64QAM	8	0	22.32	22.07	22.38		3
	8	4	22.01	22.07	22.10	0-3	3
	8	7	22.29	22.32	22.17	0-3	3
	15	0	22.06	22.31	22.09		3

FCC ID: ZNFV450VM	PCTEST'	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 21 01 00

Table 8-7 LTE Band 5 (836 5MHz) Conducted Powers - 1 4MHz Bandwidth

	L	LIE Dallu	1 3 (030.3WITIZ)	LTE Band 5 (Cell)	Weis - 1.4Winz	2 Bandwidth			
				1.4 MHz Bandwidth		<u>, </u>			
			Low Channel	Mid Channel	High Channel				
Modulation	RB Size	RB Offset	RB Offset	RB Offset	20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm]				
	1	0	25.02	25.27	25.09		0		
	1	2	25.20	25.13	25.06	1 [0		
	1	5	25.21	25.32	25.18	0	0		
QPSK	3	0	25.36	25.34	25.16		0		
	3	2	25.01	25.19	25.12		0		
	3	3	25.39	25.40	25.36		0		
	6	0	24.03	24.27	24.20	0-1	1		
	1	0	24.23	24.01	24.24	0-1	1		
	1	2	24.04	24.29	24.24		1		
	1	5	24.18	24.20	24.21		1		
16QAM	3	0	24.07	24.02	24.34	0-1	1		
	3	2	24.14	24.34	24.14		1		
	3	3	24.12	24.01	24.26		1		
	6	0	23.02	23.03	23.07	0-2	2		
	1	0	23.16	23.34	23.33		2		
	1	2	23.28	23.33	23.17		2		
	1	5	23.09	23.08	23.18	0-2	2		
64QAM	3	0	23.07	23.29	23.10	0-2	2		
	3	2	23.12	23.13	23.08		2		
	3	3	23.35	23.31	23.25		2		
	6	0	22.16	22.16	22.01	0-3	3		

c. LTE Band 66

Table 8-8 LTE Band 66 (1745.0MHz) Conducted Powers - 20MHz Bandwidth

			,	LTE Band 66 (AWS) 20 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
			(Conducted Power [dBm]		
	1	0	24.71	24.70	24.90		0
	1	50	24.96	24.84	24.88	0	0
	1	99	25.07	24.61	25.05		0
QPSK	50	0	23.93	24.01	23.94		1
	50	25	24.16	23.60	24.09	0-1	1
	50	50	23.97	23.84	23.75		1
	100	0	24.00	23.76	23.68		1
	1	0	23.84	23.86	23.67	0-1	1
	1	50	24.01	23.64	24.03		1
	1	99	23.99	24.04	23.88		1
16QAM	50	0	22.82	23.07	22.91		2
	50	25	22.87	22.84	22.77	0-2	2
	50	50	22.79	23.06	22.66	0-2	2
	100	0	22.89	22.65	22.66		2
	1	0	23.06	22.64	23.01		2
	1	50	22.91	22.67	22.73	0-2	2
	1	99	22.72	22.88	22.84		2
64QAM	50	0	21.74	21.91	21.83		3
	50	25	21.90	21.77	21.89	0-3	3
	50	50	22.04	21.71	21.99	0-3	3
	100	0	21.67	22.07	21.96		3

FCC ID: ZNFV450VM	ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 20 of 00
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 28 of 86

Table 8-9 LTE Band 66 (1745.0MHz) Conducted Powers – 15MHz Bandwidth

		L Dana o	0 (17 7 3.0141112)	Conducted Po	JWCIS - ISIVIII	z Danawiatn	
				LTE Band 66 (AWS) 15 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm]		
	1	0	24.80	24.81	25.07		0
	1	36	24.76	25.01	24.63	0	0
	1	74	24.95	24.74	24.82	1	0
QPSK	36	0	23.82	24.08	23.71		1
	36	18	23.98	23.83	23.62	0-1	1
	36	37	23.88	23.63	23.79		1
	75	0	23.70	23.82	23.76		1
	1	0	23.76	23.84	23.76	0-1	1
	1	36	23.61	23.94	23.68		1
	1	74	23.91	23.94	24.09		1
16QAM	36	0	23.08	22.90	23.07		2
	36	18	22.97	22.74	22.73	0-2	2
	36	37	22.64	22.81	22.97	0-2	2
	75	0	22.84	23.06	23.08		2
	1	0	22.77	22.72	22.95		2
	1	36	22.79	22.75	22.95	0-2	2
	1	74	22.60	22.69	22.65		2
64QAM	36	0	22.09	22.00	21.84		3
	36	18	22.09	21.87	22.04	0-3	3
	36	37	22.02	21.63	21.97	0.3	3
	75	0	21.79	21.66	21.65		3

Table 8-10 LTE Band 66 (1745 0MHz) Conducted Powers - 10MHz Bandwidth

	L	E Band 6	6 (1745.UIVITZ)	Conducted Po	owers - Tulvin	z bandwidth	
				LTE Band 66 (AWS) 10 MHz Bandwidth			
			Low Channel Mid Channel High Channel				
Modulation	RB Size	RB Offset	132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
				Conducted Power [dBm]		
	1	0	25.04	24.84	24.64		0
	1	25	25.01	24.78	24.65	0	0
	1	49	24.71	24.70	24.92		0
QPSK	25	0	23.92	23.71	23.84		1
	25	12	23.64	23.89	23.74	0-1	1
	25	25	24.03	24.04	23.84]	1
	50	0	23.97	23.91	24.05		1
	1	0	23.80	24.00	23.80		1
	1	25	24.03	23.73	24.08	0-1	1
	1	49	23.99	23.88	24.06		1
16QAM	25	0	22.63	23.02	23.02		2
	25	12	22.63	22.83	23.03	0-2	2
	25	25	22.76	22.62	22.62	0-2	2
	50	0	22.96	23.08	22.75		2
	1	0	23.04	22.87	23.03		2
	1	25	22.79	22.67	22.97	0-2	2
	1	49	22.97	22.88	22.96		2
64QAM	25	0	22.08	21.93	21.94		3
	25	12	21.87	21.64	21.95	0-3	3
	25	25	22.08	21.80	21.83	0-3	3
	50	0	21.73	22.06	21.64		3

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 20 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 29 of 86

Table 8-11 LTE Band 66 (1745.0MHz) Conducted Powers - 5MHz Bandwidth

	_	Bana (30 (11 40.0WH12	LTE Band 66 (AWS) 5 MHz Bandwidth	CITO: C CIVILIZ	<u> Danamati</u>	
Modulation	RB Size	RB Offset	Low Channel 131997	Mid Channel 132322	High Channel 132647	MPR Allowed per 3GPP [dB]	MPR [dB]
Wodulation	ND SIZE	KB Oliset	(1712.5 MHz)	(1745.0 MHz) Conducted Power [dBm	(1777.5 MHz)		MFK [GD]
	1	0	24.61	24.75	24.79		0
	1	12	25.08	25.08	24.67	0	0
	1	24	24.96	25.06	24.85		0
QPSK	12	0	24.00	23.66	23.77		1
	12	6	23.61	23.70	24.02	0-1	1
	12	13	23.78	23.79	23.88		1
	25	0	24.08	23.96	23.91		1
	1	0	23.83	24.04	23.94	0-1	1
	1	12	23.96	23.62	24.02		1
	1	24	23.97	23.63	23.91		1
16QAM	12	0	22.92	22.64	22.87		2
	12	6	22.84	23.05	23.08	0-2	2
	12	13	23.09	22.98	22.82	0-2	2
	25	0	22.98	22.95	22.64		2
	1	0	23.02	22.89	23.02		2
	1	12	22.89	22.62	23.00	0-2	2
	1	24	22.83	22.86	22.91		2
64QAM	12	0	21.87	21.88	21.83	0-3	3
	12	6	21.93	21.83	21.94		3
	12	13	21.68	21.64	21.71		3
	25	0	22.00	22.07	21.75		3

Table 8-12 LTE Rand 66 (1745 0MHz) Conducted Powers - 3MHz Randwidth

LTE Band 66 (1745.0MHz) Conducted Powers – 3MHz Bandwidth										
	LTE Band 66 (AWS) 3 MHz Bandwidth									
			Low Channel	Mid Channel	High Channel					
Modulation	RB Size	RB Offset	131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]			
			(Conducted Power [dBm						
	1	0	24.64	25.02	25.02		0			
	1	7	24.82	24.80	24.93	0	0			
	1	14	24.80	24.78	24.84		0			
QPSK	8	0	23.60	23.88	23.74		1			
	8	4	23.93	23.60	24.09	0-1	1			
	8	7	23.86	23.61	24.10	0-1	1			
	15	0	23.71	24.02	23.95		1			
	1	0	23.94	24.06	23.90	0-1	1			
	1	7	23.61	23.82	23.99		1			
	1	14	23.95	23.61	24.01		1			
16QAM	8	0	22.61	22.69	22.90		2			
	8	4	22.85	22.93	22.70	0-2	2			
	8	7	22.61	22.92	22.94	0-2	2			
	15	0	22.94	22.84	22.86		2			
	1	0	22.71	23.04	22.66		2			
	1	7	22.74	22.75	23.01	0-2	2			
	1	14	22.77	22.63	22.89		2			
64QAM	8	0	21.83	21.60	22.05		3			
	8	4	21.74	21.76	21.97	0-3	3			
	8	7	22.04	22.08	21.73	0-3	3			
	15	0	22.02	21.97	21.90		3			

FCC ID: ZNFV450VM	ENGINEERING LASORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 20 of 00
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 30 of 86

Table 8-13 LTE Band 66 (1745.0MHz) Conducted Powers - 1.4MHz Bandwidth

		L Dana 0	0 (17 43.0W112)	LTE Band 66 (AWS)	WC13 - 1. 1 11111	Z Danawiatn	
				1.4 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	RR Offset	132665 (1779.3 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]	
	Conducted Power [dBm]						
	1	0	25.02	25.01	24.75		0
	1	2	24.61	24.70	24.71		0
	1	5	24.74	24.79	24.88	0	0
QPSK	3	0	24.87	24.91	25.00		0
	3	2	24.77	24.83	24.83		0
	3	3	24.61	24.76	24.77		0
	6	0	23.89	23.75	23.83	0-1	1
	1	0	23.88	23.69	23.97	0-1	1
	1	2	24.07	23.65	23.85		1
	1	5	23.97	23.72	23.77		1
16QAM	3	0	24.02	23.82	23.64	- 0-1	1
	3	2	23.94	24.10	23.76		1
	3	3	23.74	23.85	23.79		1
	6	0	22.88	22.99	23.03	0-2	2
	1	0	22.95	22.62	22.91		2
	1	2	22.72	22.91	22.77		2
	1	5	22.84	22.73	22.91	0-2	2
64QAM	3	0	22.83	22.92	22.76	J 0-2	2
	3	2	22.89	22.78	22.99		2
ļ	3	3	22.79	23.00	22.85		2
ļ	6	0	21.68	22.01	21.83	0-3	3

d. LTE Band 2

Table 8-14 LTE Band 2 (1880.0MHz) Conducted Powers - 20MHz Bandwidth

	LTE Build 2 (1000:011112) Officiation of 2011112 Buildwidth									
				LTE Band 2 (PCS) 20 MHz Bandwidth						
			Low Channel	Mid Channel	High Channel					
Modulation	RB Size	RB Offset	18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]			
				Conducted Power [dBm]					
	1	0	24.84	24.66	25.09		0			
	1	50	24.76	24.65	24.87	0	0			
	1	99	25.05	24.91	24.93		0			
QPSK	50	0	23.62	23.96	23.77	0-1	1			
	50	25	23.94	23.65	24.16		1			
	50	50	23.66	23.71	23.64		1			
	100	0	23.79	24.08	23.80		1			
	1	0	23.88	23.66	23.74	0-1	1			
	1	50	23.69	23.93	23.70		1			
	1	99	23.62	23.95	23.97		1			
16QAM	50	0	22.88	22.92	22.76		2			
	50	25	23.01	22.60	23.08	0-2	2			
	50	50	22.87	22.79	22.71	0-2	2			
	100	0	23.04	22.62	22.93		2			
	1	0	22.95	22.61	22.98		2			
	1	50	22.73	22.82	22.98	0-2	2			
	1	99	22.79	22.63	22.92		2			
64QAM	50	0	21.87	21.86	21.84		3			
	50	25	22.09	22.08	21.88	0-3	3			
	50	50	21.71	21.71	21.92		3			
	100	0	22.02	21.86	22.01		3			

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LADORTORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 31 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 31 01 00

Table 8-15 LTE Band 2 (1880.0MHz) Conducted Powers - 15MHz Bandwidth

	LTE Ballu 2 (1000.0WiH2) Collucted Fowers = 13WiH2 Balluwidth									
				LTE Band 2 (PCS) 15 MHz Bandwidth						
			Low Channel	Mid Channel	High Channel					
Madulatian	RB Size	RB Offset	18675	18900	19125	MPR Allowed per	MDD L-IDI			
Modulation	RD Size	RB Offset	(1857.5 MHz)	(1880.0 MHz)	(1902.5 MHz)	3GPP [dB]	MPR [dB]			
			(Conducted Power [dBm]					
	1	0	24.92	24.73	25.01		0			
	1	36	24.67	24.65	24.75	0	0			
	1	74	24.73	25.07	24.93		0			
QPSK	36	0	23.87	23.77	23.64		1			
	36	18	23.84	24.05	23.78	0-1	1			
	36	37	23.64	24.05	23.84		1			
	75	0	24.06	23.90	23.73		1			
	1	0	24.02	23.87	23.65	0-1	1			
	1	36	23.93	23.94	23.80		1			
	1	74	23.73	24.06	23.91		1			
16QAM	36	0	23.02	22.81	22.72		2			
	36	18	22.69	23.09	22.76	0-2	2			
	36	37	22.94	22.69	22.62	0-2	2			
	75	0	23.08	22.90	22.83		2			
	1	0	22.79	22.99	23.07		2			
	1	36	22.67	22.64	23.05	0-2	2			
	1	74	22.75	22.92	22.75		2			
64QAM	36	0	21.90	22.08	21.97		3			
	36	18	21.88	21.60	21.78	0-3	3			
	36	37	21.79	21.68	21.92	0-3	3			
	75	0	21.87	21.83	21.62		3			

Table 8-16 LTE Band 2 (1880.0MHz) Conducted Powers - 10MHz Bandwidth

		I E Danu 4	2 (100U.UIVITIZ)	Conducted Po	wers - IUNINZ	Bandwidth	
				LTE Band 2 (PCS)			
			Low Channel	10 MHz Bandwidth Mid Channel	High Channel		
Modulation	RB Size	RB Offset	18650	18900	1 11	19150 MPR Allowed per	MPR [dB]
			(1855.0 MHz)	(1880.0 MHz)	(1905.0 MHz)	3GPP [dB]	
				Conducted Power [dBm			
	1	0	24.65	24.84	24.92		0
	1	25	24.92	25.00	24.81	0	0
	1	49	24.70	25.05	24.82		0
QPSK	25	0	23.84	23.86	23.70	0-1	1
	25	12	23.70	23.82	24.01		1
	25	25	23.91	24.09	23.95		1
	50	0	23.88	23.73	23.95		1
	1	0	23.63	23.81	24.05		1
	1	25	23.75	24.01	23.66	0-1	1
	1	49	23.69	23.79	23.94		1
16QAM	25	0	22.69	22.80	23.09		2
	25	12	22.97	22.71	22.97	0-2	2
	25	25	23.03	22.75	22.84] 0-2	2
	50	0	22.86	23.09	22.79		2
	1	0	22.66	22.95	22.78		2
	1	25	22.77	22.99	22.66	0-2	2
	1	49	22.95	23.06	22.79		2
64QAM	25	0	22.06	21.70	21.80		3
	25	12	22.10	21.75	21.80		3
	25	25	21.68	21.84	21.70	0-3	3
	50	0	22.02	21.75	21.82	7 [3

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 22 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 32 of 86

Table 8-17 LTE Band 2 (1880.0MHz) Conducted Powers - 5MHz Bandwidth

	<u>_</u>	IIL Dallu	Z (1000.01VII 1Z)	LTE Band 2 (BCS)	JWEIS - JIVII IZ	Danuwium	
				LTE Band 2 (PCS) 5 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
	Conducted Power [dBm]						
	1	0	24.79	24.83	24.85		0
	1	12	24.89	24.83	25.05	0	0
	1	24	24.81	24.98	24.85		0
QPSK	12	0	23.88	23.86	23.65		1
	12	6	23.64	23.81	24.02	0-1	1
	12	13	23.63	23.85	24.08		1
	25	0	23.83	23.72	24.10		1
	1	0	24.05	23.87	23.70	0-1	1
	1	12	23.89	23.99	23.62		1
	1	24	23.74	23.85	23.61		1
16QAM	12	0	23.03	22.71	22.95		2
	12	6	22.97	22.77	23.10	0-2	2
	12	13	22.63	22.92	22.78	0-2	2
	25	0	22.87	22.92	22.98		2
	1	0	22.82	23.05	23.10		2
	1	12	22.66	22.71	22.92	0-2	2
	1	24	22.93	23.08	23.07		2
64QAM	12	0	22.06	21.67	22.04		3
	12	6	22.02	21.77	21.73	0-3	3
	12	13	21.80	21.85	21.72	0-3	3
	25	0	21.90	21.64	21.79		3

Table 8-18 LTE Band 2 (1880,0MHz) Conducted Powers - 3MHz Bandwidth

		- I E Band	Z (TOOU.UNHZ)	Conducted Po	owers – 3MHZ	Bandwidth	
				LTE Band 2 (PCS) 3 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset 18615 18900 19185 MPR Allowed per (1851.5 MHz) (1880.0 MHz) (1908.5 MHz) 3GPP [dB]		MPR [dB]			
			(Conducted Power [dBm]		
	1	0	25.09	24.64	24.98	0	0
	1	7	25.05	24.75	24.97		0
	1	14	24.66	25.02	24.62		0
QPSK	8	0	23.80	23.72	23.78		1
	8	4	23.91	23.61	23.79	0-1	1
	8	7	24.03	23.77	23.95		1
	15	0	24.10	23.91	24.08		1
	1	0	23.74	23.65	23.78	0-1	1
	1	7	23.65	24.06	24.05		1
	1	14	23.84	23.97	23.62		1
16QAM	8	0	22.72	23.07	23.08		2
	8	4	22.79	22.87	22.97	0-2	2
	8	7	23.03	22.85	23.08	0-2	2
	15	0	22.65	22.98	23.01		2
	1	0	22.74	22.84	22.73		2
	1	7	22.83	22.81	23.05	0-2	2
	1	14	23.01	23.09	22.94		2
64QAM	8	0	21.67	21.95	21.94		3
	8	4	21.91	21.85	21.97	0-3	3
	8	7	21.88	22.01	21.89	0-3	3
	15	0	22.07	21.80	21.79		3

FCC ID: ZNFV450VM	ENGINEERING LASORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 22 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 33 of 86

Table 8-19 LTE Band 2 (1880,0MHz) Conducted Powers - 1,4MHz Bandwidth

		i E Bana z	. (1000.0141112)	LTE Band 2 (PCS)	WC13 - 1101112	L Danawiatii	
				1.4 MHz Bandwidth			
			Low Channel	Mid Channel	High Channel		
Modulation	RB Size	RB Offset	18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]
	Conducted Power [dBm]						
	1	0	25.05	24.80	24.62		0
	1	2	24.94	24.98	24.90		0
	1	5	24.69	24.83	24.94	0	0
QPSK	3	0	24.90	24.75	24.98		0
	3	2	24.70	24.93	25.03		0
	3	3	24.96	24.65	24.64		0
	6	0	23.83	23.74	24.04	0-1	1
	1	0	24.01	23.87	23.84	0-1	1
	1	2	23.72	24.08	24.08		1
	1	5	23.79	24.06	23.85		1
16QAM	3	0	23.67	24.06	23.70		1
	3	2	23.79	23.71	24.09		1
	3	3	24.02	23.61	23.72		1
	6	0	23.07	22.63	22.75	0-2	2
	1	0	22.77	22.85	22.60		2
	1	2	22.83	23.10	22.82		2
	1	5	22.83	22.81	22.64	0-2	2
64QAM	3	0	23.04	22.83	23.06	0-2	2
	3	2	22.69	23.06	22.89		2
	3	3	22.97	22.89	22.86		2
	6	0	21.90	21.67	21.68	0-3	3

e. LTE Band 48

Table 8-20 LTE Band 48 (3603.3MHz) Conducted Powers - 20MHz Bandwidth

	LTE Band 48 LTE Band 48 20 MHz Bandwidth											
			Low Channel	Low-Mid Channel	Mid-High Channel	High Channel						
Modulation	RB Size	RB Offset	55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]				
				Conducted	Power [dBm]							
	1	0	23.37	23.25	23.27	23.20		0				
	1	50	23.29	23.29	23.37	23.46	0	0				
	1	99	23.38	23.45	23.20	23.31		0				
QPSK	50	0	22.24	22.26	22.32	22.39		1				
	50	25	22.46	22.39	22.53	22.54	0-1	1				
	50	50	22.37	22.46	22.22	22.46	0-1	1				
	100	0	22.41	22.23	22.47	22.31		1				
	1	0	22.25	22.49	22.44	22.26		1				
	1	50	22.38	22.42	22.40	22.45	0-1	1				
	1	99	22.42	22.26	22.51	22.37		1				
16QAM	50	0	21.43	21.51	21.53	21.22		2				
	50	25	21.27	21.22	21.30	21.30	0-2	2				
	50	50	21.49	21.51	21.20	21.26	0-2	2				
	100	0	21.48	21.46	21.34	21.53		2				
	1	0	21.33	21.45	21.49	21.48		2				
	1	50	21.30	21.23	21.34	21.29	0-2	2				
	1	99	21.48	21.44	21.31	21.40		2				
64QAM	50	0	20.52	20.27	20.37	20.49		3				
	50	25	20.34	20.26	20.46	20.46	0-3	3				
	50	50	20.40	20.50	20.45	20.28	0-3	3				
	100	0	20.42	20.26	20.20	20.49		3				

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dags 24 of 96	
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 34 of 86	

Table 8-21 LTE Band 48 (3602 5MHz) Conducted Powers - 15MHz Bandwidth

		I E Danu	46 (3002.31)		ted Powers -	- ISIVINZ Da	nawiath					
LTE Band 48 15 MHz Bandwidth												
			Low Channel	Low-Mid Channel	Mid-High Channel	High Channel						
Modulation	RB Size	RB Offset	55315 (3557.5 MHz)	55765 56215 (3602.5 MHz) (3647.5 MHz)		56665 (3692.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]				
				Conducted	Power [dBm]							
	1	0	23.46	23.40	23.52	23.20		0				
	1	36	23.47	23.43	23.30	23.50	0	0				
	1	74	23.34	23.28	23.52	23.28		0				
QPSK	36	0	22.34	22.47	22.21	22.23		1				
	36	18	22.22	22.50	22.44	22.28	0-1	1				
	36	37	22.44	22.29	22.37	22.28	0-1	1				
	75	0	22.32	22.20	22.24	22.44		1				
	1	0	22.41	22.40	22.50	22.44		1				
	1	36	22.41	22.37	22.41	22.26	0-1	1				
	1	74	22.48	22.41	22.45	22.28		1				
16QAM	36	0	21.38	21.39	21.31	21.38		2				
	36	18	21.43	21.42	21.30	21.40	0-2	2				
	36	37	21.31	21.23	21.22	21.45	0-2	2				
	75	0	21.29	21.52	21.36	21.51		2				
	1	0	21.51	21.31	21.34	21.25		2				
	1	36	21.32	21.49	21.27	21.21	0-2	2				
	1	74	21.34	21.25	21.37	21.24		2				
64QAM	36	0	20.37	20.38	20.24	20.35		3				
	36	18	20.36	20.42	20.53	20.36	0-3	3				
	36	37	20.30	20.28	20.53	20.41	0-3	3				
	75	0	20.52	20.22	20.39	20.46		3				

Table 8-22 LTE Band 48 (3601.7MHz) Conducted Powers - 10MHz Bandwidth

	LTE Band 40 (3001.7 Miliz) Conducted Fowers - 10 Miliz Bandwidth												
	10 MHz Bandwidth												
			Low Channel	Low-Mid Channel	Mid-High Channel	High Channel							
Modulation	RB Size	RB Offset	55290 (3555.0 MHz)	55757 (3601.7 MHz)	56223 (3648.3 MHz)	56690 (3695.0 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]					
				Conducted	Power [dBm]								
	1	0	23.24	23.27	23.44	23.41		0					
	1	25	23.47	23.25	23.22	23.42	0	0					
	1	49	23.39	23.43	23.35	23.24		0					
QPSK	25	0	22.50	22.52	22.33	22.52		1					
	25	12	22.31	22.26	22.53	22.39	0-1	1					
	25	25	22.32	22.27	22.27	22.42	0-1	1					
	50	0	22.43	22.47	22.32	22.47		1					
	1	0	22.41	22.36	22.41	22.31		1					
	1	25	22.29	22.47	22.46	22.29	0-1	1					
	1	49	22.48	22.47	22.37	22.37		1					
16QAM	25	0	21.22	21.21	21.44	21.50		2					
	25	12	21.32	21.39	21.24	21.21	0-2	2					
	25	25	21.21	21.22	21.31	21.52	0-2	2					
	50	0	21.46	21.42	21.51	21.46		2					
	1	0	21.37	21.39	21.52	21.31		2					
	1	25	21.48	21.42	21.44	21.41	0-2	2					
	1	49	21.41	21.21	21.52	21.48		2					
64QAM	25	0	20.25	20.33	20.48	20.22		3					
	25	12	20.32	20.49	20.29	20.42	0-3	3					
	25	25	20.34	20.40	20.37	20.49	0.3	3					
	50	0	20.43	20.24	20.38	20.22		3					

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogg 25 of 96	
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 35 of 86	

Table 8-23 LTE Rand 48 (3600 8MHz) Conducted Powers - 5MHz Randwidth

		- IE Band	1 48 (3600.81		cted Powers	– SIVIMZ Bar	iawiath				
LTE Band 48 5 MHz Bandwidth											
			Low Channel	Low-Mid Channel	Mid-High Channel	High Channel					
Modulation	RB Size	RB Offset	55265 (3552.5 MHz)	55748 (3600.8 MHz)	56232 (3649.2 MHz)	56715 (3697.5 MHz)	MPR Allowed per 3GPP [dB]	MPR [dB]			
				Conducted	Power [dBm]						
	1	0	23.36	23.51	23.24	23.48		0			
	1	12	23.24	23.39	23.46	23.24	0	0			
	1	24	23.53	23.45	23.35	23.45		0			
QPSK	12	0	22.28	22.52	22.25	22.29		1			
	12	6	22.39	22.43	22.22	22.41	0-1	1			
	12	13	22.21	22.42	22.49	22.44	0-1	1			
	25	0	22.48	22.40	22.34	22.29		1			
	1	0	22.29	22.47	22.44	22.38		1			
	1	12	22.21	22.49	22.31	22.50	0-1	1			
	1	24	22.38	22.37	22.34	22.35		1			
16QAM	12	0	21.32	21.27	21.22	21.33		2			
	12	6	21.40	21.48	21.21	21.43	0-2	2			
	12	13	21.28	21.39	21.30	21.31	0-2	2			
	25	0	21.25	21.48	21.34	21.47		2			
	1	0	21.33	21.42	21.42	21.40		2			
	1	12	21.20	21.45	21.21	21.53	0-2	2			
	1	24	21.41	21.34	21.34	21.25		2			
64QAM	12	0	20.41	20.50	20.39	20.30		3			
	12	6	20.26	20.31	20.43	20.37	0-3	3			
	12	13	20.30	20.34	20.23	20.20	0-3	3			
	25	0	20.49	20.48	20.44	20.43		3			

f. LTE Uplink Carrier Aggregation

Table 8-24 LTE FDD Uplink Two Component Carrier Aggregation Conducted Powers

	PCC								SCC						Power
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	49	25.43

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Daga 26 of 96	
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 36 of 86	

VII. **WIFI Conducted Powers (SISO/MIMO)**

Table 8-24 IEEE 802.11b/g/n/ac (2.4GHz, SISO) Reduced Average RF Power¹

2.4GHz Conducted Power [dBm]						
Freq [MHz]	Channel		IEEE Transmission Mode			
ried [MHZ]	Chamilei	802.11b 802.11g 802.11n 802.11ac				
2412	1	17.45	17.49	15.81	15.83	
2437	6	17.22	17.56	17.86	17.83	
2462	11	17.87	17.46	16.20	16.20	

Table 8-25 IEEE 802.11b/g/n/ac (2.4GHz, MIMO) Reduced Average RF Power¹

2.4GHz Conducted Power [dBm]							
Freq [MHz]	Channel		IEEE Transmission Mode				
ried [MHZ]	Chamilei	802.11b 802.11g 802.11n 802.					
2412	1	20.69	20.34	18.95	18.95		
2437	6	20.61	20.78	20.92	20.90		
2462	11	20.95	20.70	19.55	19.49		

Table 8-26 IEEE 802.11a/n/ac (5GHz, 20MHz BW, SISO) Average RF Power

	5GHz (20MHz) Conducted Power [dBm]						
	,		Transmission	Mode			
Freq [MHz]	Channel	802.11a	802.11n	802.11ac			
5180	36	16.52	16.79	16.80			
5200	40	17.94	17.75	17.82			
5220	44	16.31	16.89	16.82			
5240	48	16.36	16.83	16.91			
5260	52	16.35	16.86	16.92			
5280	56	17.96	17.84	17.89			
5300	60	16.27	16.98	16.98			
5320	64	16.39	16.97	16.95			
5500	100	16.41	16.97	16.88			
5600	120	16.50	16.36	16.25			
5620	124	16.44	16.38	16.31			
5720	144	16.03	16.91	16.90			
5745	149	16.02	16.91	16.90			
5785	157	17.05	17.99	17.99			
5825	165	17.39	17.27	17.27			

¹ Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in 2.4GHz WIFI modes for held-to-ear scenarios.

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LASOMATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 37 01 00

Table 8-27 IEEE 802.11a/n/ac (5GHz. 20MHz BW. MIMO) Average RF Power

	5GHz (20MHz) Conducted Power [dBm]					
Eroa (MU=1	Channel	IEEE Transmission Mode				
Freq [MHz]	Channel	802.11a	802.11n	802.11ac		
5180	36	19.72	19.73	19.75		
5200	40	20.98	20.80	20.84		
5220	44	19.63	19.82	19.84		
5240	48	19.40	19.84	19.92		
5260	52	19.69	19.88	19.88		
5280	56	20.76	20.91	20.91		
5300	60	19.44	19.96	19.96		
5320	64	19.69	19.90	19.90		
5500	100	19.70	19.94	19.87		
5600	120	19.76	19.56	19.52		
5620	124	19.70	19.59	19.55		
5720	144	19.53	19.87	19.89		
5745	149	19.17	19.92	19.94		
5785	157	20.22	20.66	20.66		
5825	165	20.33	20.62	20.66		

Table 8-28 IEEE 802.11n/ac (5GHz, 40MHz BW, SISO) Average RF Power

5GHz (5GHz (40MHz) Conducted Power [dBm]						
Freq [MHz]	Channel	IEEE Transmission Mode					
ried [MHZ]		802.11n	802.11ac				
5190	38	15.36	15.42				
5230	46	15.44	15.47				
5270	54	15.36	15.38				
5310	62	15.52	15.54				
5510	102	15.46	15.46				
5590	118	15.73	15.73				
5630	126	15.60	15.71				
5710	142	15.52	15.50				
5755	151	15.35	15.24				
5795	159	15.82	15.80				

FCC ID: ZNFV450VM	PCTEST CAGINETINE LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 38 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 30 01 00

Table 8-29 IEEE 802.11n/ac (5GHz, 40MHz BW, MIMO) Average RF Power

5GHz (40MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
Freq [MHZ]		802.11n	802.11ac		
5190	38	18.41	18.47		
5230	46	18.45	18.43		
5270	54	18.40	18.41		
5310	62	18.52	18.56		
5510	102	18.44	18.43		
5590	118	18.60	18.60		
5630	126	18.56	18.62		
5710	142	18.47	18.41		
5755	151	18.54	18.44		
5795	159	18.90	18.90		

Table 8-30 IEEE 802.11ac (5GHz, 80MHz BW, SISO) Average RF Power

5GHz (80MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11ac		
5210	42	12.86		
5290	58	13.06		
5530	106	13.16		
5610	122	13.19		
5690	138	13.23		
5775	155	13.11		

Table 8-31 IEEE 802.11ac (5GHz, 80MHz BW, MIMO) Average RF Power

5GHz (80MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11ac		
5210	42	16.01		
5290	58	16.22		
5530	106	16.24		
5610	122	16.14		
5690	138	16.21		
5775	155	15.91		

FCC ID: ZNFV450VM	PCTEST ENGINEERING LAS DEATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 39 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 39 01 66

VIII. WIFI Conducted Powers for Operations with Simultaneous 2.4GHz and 5GHz

Table 8-32 IEEE 802.11b/g/n/ac (2.4GHz, Ant1) Reduced Average RF Power¹

2.4GHz Conducted Power [dBm]						
Freq [MHz]	Channel	IEEE Transmission Mode				
rreq [winz]	Charmer	802.11b 802.11g 802.11n 802.11ac				
2412	1	17.45	17.49	15.81	15.83	
2437	6	17.22	17.56	17.86	17.83	
2462	11	17.87	17.46	16.20	16.20	

Table 8-33 IEEE 802.11a/n/ac (5GHz, 20MHz BW, Ant2) Reduced Average RF Power¹

) Conducted						
Freq [MHz]	Channel	IEEE Transmission Mode						
rreq [MH2]	Charmer	802.11a	802.11n	802.11ac				
5180	36	14.15	14.01	14.14				
5200	40	14.32	14.27	14.28				
5220	44	14.24	14.14	14.15				
5240	48	14.41	14.25	14.30				
5260	52	14.44	14.36	14.32				
5280	56	14.65	14.52	14.55				
5300	60	14.52	14.34	14.44				
5320	64	14.56	14.33	14.29				
5500	100	14.27	14.15	14.12				
5600	120	14.40	14.22	14.32				
5620	124	14.33	14.31	14.30				
5720	144	14.12	14.02	14.03				
5745	149	14.40	14.21	14.33				
5785	157	14.71	14.58	14.69				
5825	165	14.62	14.44	14.47				

¹ Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes during simultaneous 2.4GHz and 5GHz WIFI operations for held-to-ear scenarios.

FCC ID: ZNFV450VM	PCTEST ENGINEERING LAJORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 40 01 00

Table 8-34 IEEE 802.11n/ac (5GHz, 40MHz BW, Ant2) Reduced Average RF Power¹

5GHz	5GHz (40MHz) Conducted Power [dBm]									
Freq [MHz]	Channel	IEEE Transmission Mode								
Freq [WiFi2]	Charmer	802.11n	802.11ac							
5190	38	14.12	14.07							
5230	46	14.14	14.10							
5270	54	14.32	14.35							
5310	5310 62 14.32		14.30							
5510	102	14.13	14.15							
5590	118	14.30	14.31							
5630	126	14.24	14.23							
5710	142	14.06	14.03							
5755	151	14.22	14.20							
5795	159	14.55	14.52							

Table 8-35 IEEE 802.11ac (5GHz, 80MHz BW, Ant2) Reduced Average RF Power¹

5GHz (80MH	z) Conducted I	Power [dBm]
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	12.53
5290	58	12.58
5530	106	12.60
5610	122	12.57
5690	138	12.51
5775	155	12.72

¹ Note: This device utilizes independent power reduction mechanisms for the WIFI transmitter in all WIFI modes during simultaneous 2.4GHz and 5GHz WIFI operations for held-to-ear scenarios.

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 41 01 00

JUSTIFICATION OF HELD TO EAR MODES TESTED 9.

I. Analysis of RF Air Interface Technologies

An analysis was performed, following the guidance of §4.3 and §4.4 of the ANSI standard, of the RF air interface technologies being evaluated. The factors that will affect the RF interference potential were evaluated, and the worst-case operating modes were identified and used in the evaluation. A WD's interference potential is a function both of the WD's average near-field field strength and of the signal's audio-frequency amplitude modulation characteristics. Per §4.4, RF air interface technologies that have low power have been found to produce sufficiently low RF interference potential, so it is possible to exempt them from the product testing specified in Clause 5 of the ANSI standard. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17dBm for all of its operating modes. RF air interface technologies exempted from testing in this manner are automatically assigned an M4 rating to be used in determining the overall rating for the WD.

The worst-case MIF plus the worst-case average antenna input power for all modes are investigated below to determine the testing requirements for this device.

II. **Individual Mode Evaluations**

Table 9-1 Max Power + MIF calculations for Low Power Exemptions

iviax rower + iviir calculations for Low rower Exemptions										
Air Interface	Maximum Average Power (dBm)	Worst Case MIF (dB)	Total (Power + MIF, dB)	C63.19 Testing Required						
GSM850	24.53*	3.55	28.08	Yes						
GSM1900	22.13*	3.53	25.66	Yes						
EDGE850	17.77*	3.68	21.45	Yes**						
EDGE1900	16.68*	3.67	20.35	Yes**						
UMTS - RMC	25.44	-23.17	2.27	No						
UMTS - AMR	25.35	-23.86	1.49	No						
HSPA	25.43	-22.45	2.98	No						
LTE - FDD	25.50	-9.45	16.05	No						
LTE FDD - Uplink Carrier Aggregation	25.43	-10.49	14.94	No						
LTE Band 48	13.82*	3.73	17.55	Yes						
2.4GHz WIFI	20.95	-9.14	11.81	No						
5GHz WIFI	20.98	-7.09	13.89	No						
Simultaneous 2.4GHz and 5GHz WIFI Operations	19.58***	-11.03	8.55	No						

^{*} Note: ANSI C63.19-2011 Sec. 4.4 Footnote 20 indicates the use of a long averaging time for measuring the antenna input power when using this method of exclusion. Therefore, the frame averaged power was calculated for these modes in this investigation.

III. **Low-Power Exemption Conclusions**

Per ANSI C63.19-2011, RF Emissions testing for this device is required only for GSM voice modes as well as LTE TDD (Power Class 3) data modes. All other air interfaces are exempt.

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 42 01 00

© 2019 PCTEST Engineering Laboratory, Inc.

^{**} Note: EDGE data modes were considered but not tested as GSM voice modes were found to be the worst-case modes for the GSM air interface.

^{***} Note: This value is calculated as the linear sum of the worst-case power for each band and antenna combination while in simultaneous 2.4GHz and 5GHz operation. This calculation is conservative and for use in this investigation only.

10. LTE TDD UPLINK-DOWNLINK CONFIGURATION

I. **Uplink-Downlink Configuration Additional Testing**

Additional testing was performed on each supported power class for LTE TDD to determine the worst-case Uplink-Downlink configuration for RFE testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10$ ms, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1$ ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 · Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

> **Table 10-1** Uplink-Downlink Configurations for Type 2 Frame Structures

Uplink-downlink	Downlink-to-Uplink	Subframe number										Calculated Transmission
configuration	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	E mas	7	c	- 11	- 11	- 11	7	c	11	- 11	7	E1 40/

II. **Power Class 3 Uplink-Downlink Configuration Additional Testing**

LTE TDD was evaluated with the following radio configuration: channel 55773, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst-case emission was used for full testing. See Table 10-2 below for results. The configuration determined in the results below was used to measure the MIF values in Table 7-5.

> **Table 10-2** LTE TDD Power Class 3 UL-DL Configuration Results

			_				0. 0.40			94.46	10111100	u			
Mode / Band	Bandwidth	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
E-Field Emission	ons														
	20	55773	0	16QAM	1	0	Acoustic	12.28	21.78	-3.17	18.61	35.00	-16.39	M4	none
	20	55773	1	16QAM	1	0	Acoustic	10.28	20.24	-1.57	18.67	35.00	-16.33	M4	none
	20	55773	2	16QAM	1	0	Acoustic	7.87	17.92	1.49	19.41	35.00	-15.59	M4	none
LTE TDD / Band 48	20	55773	3	16QAM	1	0	Acoustic	9.32	19.39	-1.49	17.90	35.00	-17.10	M4	none
	20	55773	4	16QAM	1	0	Acoustic	7.72	17.75	0.68	18.43	35.00	-16.57	M4	none
	20	55773	5	16QAM	1	0	Acoustic	6.17	15.81	3.66	19.47	35.00	-15.53	M4	none
	20	55773	6	16QAM	1	0	Acoustic	12.11	21.66	-2.52	19.14	35.00	-15.86	M4	none

III. Conclusion

Per the results above, UL-DL Configuration 5 was used for the LTE TDD Power Class 3 testing.

FCC ID: ZNFV450VM	ENGINEERING LASSIADAY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 42 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 43 of 86

OVERALL MEASUREMENT SUMMARY

FCC ID:	ZNFV450VM
S/N:	05722

I. **E-FIELD EMISSIONS:**

Table 11-1 HAC Data Summary for GSM E-field

			- 11	AO Data	Oumma	iy ioi o	OIVI E-IIEI	u			
Mode	Channel	Scan Center	Conducted Power at BS (dBm)	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
E-Field Emission	ons										
	128	Acoustic	33.56	19.65	25.87	3.54	29.41	45.00	-15.59	M4	none
GSM850	190	Acoustic	33.47	18.80	25.48	3.55	29.03	45.00	-15.97	M4	none
	251	Acoustic	33.44	19.44	25.77	3.55	29.32	45.00	-15.68	M4	none
	512	Acoustic	31.16	16.92	24.57	3.52	28.09	35.00	-6.91	M4	none
GSM1900	661	Acoustic	31.16	16.24	24.21	3.53	27.74	35.00	-7.26	M4	none
GG#11900	810	Acoustic	31.08	14.04	22.95	3.52	26.47	35.00	-8.53	M4	none
	512	T-Coil	31.16	16.92	24.57	3.52	28.09	35.00	-6.91	M4	none

Table 11-2 HAC Data Summary for LTE TDD Band 48 E-field

	11/10 Data Cannina, 10/ 212 100 Dana 10 2 110/4															
Mode / Band	Bandwidth	Channel	UL-DL Config.	Mod.	RB Size	RB Offset	Scan Center	Conducted Power at BS (dBm)	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5
E-Field Emission	E-Field Emissions															
	15	55315	5	16QAM	1	0	Acoustic	22.41	6.05	15.63	3.63	19.26	35.00	-15.74	M4	none
LTE TDD /	15	55773	5	16QAM	1	0	Acoustic	22.40	5.59	14.95	3.70	18.65	35.00	-16.35	M4	none
Band 48	15	56215	5	16QAM	1	0	Acoustic	22.50	5.80	15.27	3.49	18.76	35.00	-16.24	M4	none
	15	56665	5	16QAM	1	0	Acoustic	22.44	5.79	15.25	3.73	18.98	35.00	-16.02	M4	none

Worst-case Configuration Evaluation II.

Table 11-3 Peak Reading 360° Probe Rotation at Azimuth axis

	T can reading 500 T Tobe Rotation at Azimath axis										
Mode	Channel	Scan Center	Time Avg. Field (V/m)	Time Avg. Field [dB(V/m)]	MIF (dB)	Audio Interference Level [dB(V/m)]	FCC Limit (dBV/m)	FCC Margin (dB)	Result	Excl Blocks per 5.5	
Probe Rotation	Probe Rotation at Worst-Case										
GSM1900	512	Acoustic	16.87	24.54	3.52	28.06	35.00	-6.94	M4	none	

FCC ID: ZNFV450VM	ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 44 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 44 of 86




Figure 11-1Sample E-field Scan Overlay (See Test Setup Photographs for actual WD overlay)

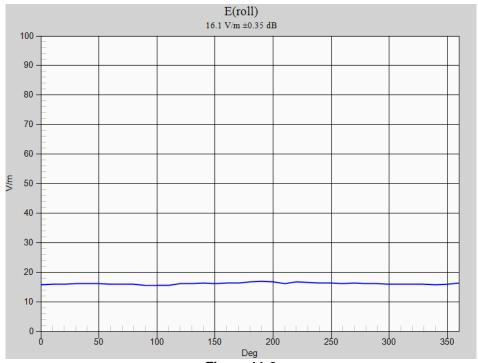


Figure 11-2 **Worst-Case Probe Rotation about Azimuth axis**

* Note: Locations of probe rotation (with and without exclusions) are shown in Figure 11-1 denoted by the green square markers.

•	`	,	, ,	'
FCC ID: ZNFV450VM	ENGINEERING LANDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Faye 45 01 00

EQUIPMENT LIST 12.

Table 12-1 Equipment List

Equipment Elot										
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number				
Agilent	E4438C	ESG Vector Signal Generator	4/19/2018	Annual	4/19/2019	MY47270002				
Agilent	E4432B	ESG-D Series Signal Generator	4/19/2018	Annual	4/19/2019	US40053896				
Agilent	N5182A	MXG Vector Signal Generator	11/28/2018	Annual	11/28/2019	MY47420603				
Amplifier Research	15S1G6	Amplifier	N/A	CBT*	N/A	433978				
Anritsu	ML2496A	Power Meter	10/21/2018	Annual	10/21/2019	1138001				
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007				
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339008				
Anritsu	MA24106A	USB Power Sensor	10/19/2018	Annual	10/19/2019	1349503				
Anritsu	MA24106A	USB Power Sensor	10/19/2018	Annual	10/19/2019	1344554				
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911				
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A	CBT*	N/A	N/A				
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A	CBT*	N/A	N/A				
Mini-Circuits	BW-N20W5	Power Attenuator	N/A	CBT*	N/A	1226				
Pasternack	PE2237-20	Bidirectional Coupler	N/A	CBT*	N/A	N/A				
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/30/2019	Annual	1/30/2020	162125				
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053				
SPEAG	AIA	Audio Interference Analzyer	N/A	CBT*	N/A	1010				
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/14/2019	Annual	2/14/2020	1272				
SPEAG	CD1880V3	Freespace 1880 MHz Dipole	2/19/2019	Biennial	2/19/2021	1137				
SPEAG	CD835V3	Freespace 835 MHz Dipole	2/19/2019	Biennial	2/19/2021	1003				
SPEAG	CD3500V3	Freespace 3500 MHz Dipole	1/15/2019	Biennial	1/15/2021	1005				
SPEAG	EF3DV3	Freespace E-field Probe	1/16/2019	Annual	1/16/2020	4035				

Calibration traceable to the National Institute of Standards and Technology (NIST).

*Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFV450VM	PCTEST' CREINTINE LADRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 40 01 00

13. MEASUREMENT UNCERTAINTY

Table 13-1 Uncertainty Estimation Table

		Communication	ns Device Ne	ear-Field Me			
Uncertainty Component	Data (dB)	Data Type	Prob. Dist.	Divisor	Ci (E)	Unc. (dB)	Notes/Comments
Measurement System							
RF System Reflections	0.50	Tolerance	N	1.00	1	0.50	* Refl. < -20 dB
Field Probe Calibration	0.21	Tolerance	N	1.00	1	0.21	
Field Probe Isotropy	0.01	Tolerance	N	1.00	1	0.01	
Field Probe Frequency Response	0.135	Tolerance	N	1.00	1	0.14	
Field Probe Linearity	0.013	Tolerance	N	1.00	1	0.01	
Modulation Interference Factor	0.20	Tolerance	R	1.73	1	0.12	Applicable for M-rating testing
Boundary Effects	0.105	Accuracy	R	1.73	1	0.06	*
Probe Positioning Accuracy	0.20	Accuracy	R	1.73	1	0.12	*
Probe Positioner	0.050	Accuracy	R	1.73	1	0.03	*
Extrapolation/Interpolation	0.045	Tolerance	R	1.73	1	0.03	*
Resolution to 2mm error	0.21	Tolerance	N	1.00	1	0.21	
System Detection Limit	0.05	Tolerance	R	1.73	1	0.03	*
Readout Electronics	0.015	Tolerance	N	1.00	1	0.02	*
Integration Time	0.11	Tolerance	R	1.73	1	0.06	*
Response Time	0.033	Tolerance	R	1.73	1	0.02	*
Phantom Thickness	0.10	Tolerance	R	1.73	1	0.06	*
System Repeatability (Field x 2=power)	0.17	Tolerance	N	1.00	1	0.17	*
Test Sample Related	-						
Device Positioning Vertical	0.2	Tolerance	R	1.73	1	0.12	*
Device Positioning Lateral	0.045	Tolerance	R	1,73	1	0.03	*
Device Holder and Phantom	0.1	Tolerance	R	1.73	1	0.06	*
Power Drift	0.21	Tolerance	R	1.73	1	0.12	
Combined Standard Uncertainty (k=1)						0.66	16.3%
Expanded Uncertainty [95% confidence]						1.31	32.6%
Expanded Uncertainty [95% confidence]	on Field					0.66	16.3%

Notes:

- Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All
 equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81
 and NIST Tech Note 1297 and UKAS M3003.
- 2. * Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 47 01 00

TEST DATA 14.

See following Attached Pages for Test Data.

FCC ID: ZNFV450VM	ENGINEEING LASDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 40 of 00
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 48 of 86



DUT: CD835V3 - SN1003

Type: CD835V3 Serial: 1003

Communication System: CW; Frequency: 835 MHz;


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0);

835 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 135.6 V/m; Power Drift = -0.16 dB Applied MIF = 0.00 dB Average Value of peak (interpolated) = 109.1 V/m

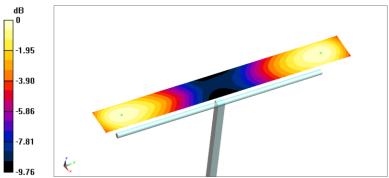

0 dB = 109.3 V/m = 40.77 dBV/m

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LADORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 49 01 00



DUT: CD1880V3 - SN1137

Type: CD1880V3 Serial: 1137

Communication System: CW; Frequency: 1880 MHz;


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- . Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- . Measurement SW: DASY52, Version 52.10 (0);

1880 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 169.5 V/m; Power Drift = -0.08 dB Applied MIF = 0.00 dB Average Value of Peak (interpolated) = 92.8 V/m

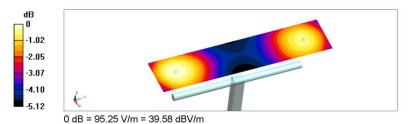

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 50 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 50 of 86



DUT: CD3500V3 - SN1005

Type: CD3500V3 Serial: 1005

Communication System: CW; Frequency: 3500 MHz;


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- . Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- . Measurement SW: DASY52, Version 52.10 (0);

3500 MHz / 100mW HAC Dipole Validation at 15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 40.11 V/m; Power Drift = -0.00 dB Applied MIF = 0.00 dB Average Value of Peak (interpolated) = 88.6 V/m

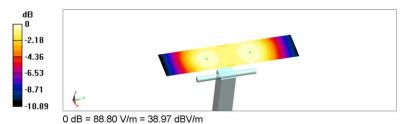

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 54 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 51 of 86

Date: 3/22/2019



DUT: ZNFV450VM

Type: Portable Handset Serial: 05722 Backlight off Duty Cycle: 1:8.3

Communication System: GSM; Frequency: 824.2 MHz;

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:


- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- · Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- · Measurement SW: DASY52, Version 52.10 (0);

GSM850 Low Channel/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 18.97 V/m; Power Drift = -0.10 dB
Applied MIF = 3.54 dB
RF audio interference level = 29.41 dBV/m Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
28.18 dBV/m	29.41 dBV/m	29.13 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
25.28 dBV/m	27.31 dBV/m	27.31 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
21.97 dBV/m	22.67 dBV/m	23.62 dBV/m

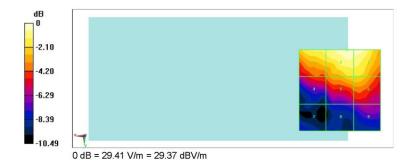

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 32 01 00

Date: 3/22/2019



DUT: ZNFV450VM

Type: Portable Handset Serial: 05722 Backlight off Duty Cycle: 1:8.3

Communication System: GSM; Frequency: 1850.2 MHz;

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
 Measurement SW: DASY52, Version 52.10 (0);

GSM1900 Low Channel/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 8.685 V/m; Power Drift = -0.19 dB Applied MIF = 3.52 dB RF audio interference level = 28.09 dBV/m Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
23.09 dBV/m	23.13 dBV/m	22.99 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
19.1 dBV/m	24.27 dBV/m	24.65 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
25.24 dBV/m	28.09 dBV/m	27.86 dBV/m



FCC ID: ZNFV450VM	ENGINEERING LASOFFORT, INC.	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags F2 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 53 of 86

Date: 3/22/2019



DUT: ZNFV450VM

Type: Portable Handset Serial: 05722 Backlight off Duty Cycle: 1:9.35

Communication System: LTE Band 48; Frequency: 3557.5 MHz;

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EF3DV3 SN4035; Calibrated: 1/16/2019;
- · Sensor-Surface (Fix Surface)
- Electronics: DAE4 Sn1272; Calibrated: 2/14/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
 Measurement SW: DASY52, Version 52.10 (0);


TDD LTE Band 48 Low Channel, ULDL 5, 15MHz BW, 16QAM, 1 RB, 0 RB Offset,

Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 4.570 V/m; Power Drift = 0.13 dB Applied MIF = 3.63 dB RF audio interference level = 19.26 dBV/m Emission category: M4

MIF scaled E-field

I		Grid 3 M4
18.24 dBV/m	16.42 dBV/m	14.84 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
17.88 dBV/m	16.42 dBV/m	15.56 dBV/m
		Grid 9 M4
19.26 dBV/m	17.05 dBV/m	15.09 dBV/m

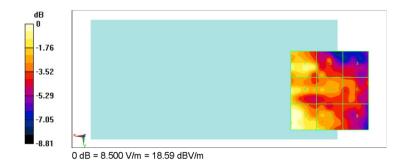

FCC ID: ZNFV450VM	ENGINETING LASGRATORY, INC.	TAC (RF EWISSIONS) IEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 54 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 54 of 86

15. CALIBRATION CERTIFICATES

The following pages include the probe calibration used to evaluate HAC for the DUT.

FCC ID: ZNFV450VM	ENGINEERING LABORATORY, INC.	TAC (RF EMISSIONS) IEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo EE of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 55 of 86

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage

C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

PC Test

Certificate No: EF3-4035_Jan19

CALIBRATION CERTIFICATE

Object

EF3DV3- SN:4035

Calibration procedure(s)

QA CAL-02.v9, QA CAL-25.v7

Calibration procedure for E-field probes optimized for close near field

evaluations in air

Calibration date:

January 16, 2019

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 \pm 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
DAE4	SN: 789	14-Jan-19 (No. DAE4-789 Jan19)	Jan-20
Reference Probe ER3DV6	SN: 2328	09-Oct-18 (No. ER3-2328_Oct18)	Oct-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Manu Seitz	Laboratory Technician	
		are to the second second second	
	1924/1927/1224 (1934/1927)		
Approved by:	Katja Pokovic	Technical Manager	a a
	•		July -
			legued: January 17, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EF3-4035_Jan19

Page 1 of 8

FCC ID: ZNFV450VM	HAC (RF EMISSIONS) TEST REPORT		① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg FC of 9C
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 56 of 86

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Glossary:

NORMx,y,z sensitivity in free space diode compression point

CF crest factor (1/duty_cycle) of the RF signal
A, B, C, D modulation dependent linearization parameters
En incident E-field orientation normal to probe axis
Ep incident E-field orientation parallel to probe axis

Polarization φ φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

 IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005

b) CTIA Test Plan for Hearing Aid Compatibility, Rev 3.1.1, May 2017

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 for XY sensors and 9 = 90 for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart).
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on
 the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor
 media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy): in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no
 uncertainty required).

Certificate No: EF3-4035_Jan19

Page 2 of 8

FCC ID: ZNFV450VM	HAC (RF EMISSIONS) TEST REPORT		① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 37 01 66

DASY/EASY - Parameters of Probe: EF3DV3 - SN:4035

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) ²)	0.90	0.74	1.20	± 10.1 %
DCP (mV) ^B	96.8	98.5	95.3	

Calibration results for Frequency Response (30 MHz - 6 GHz)

Frequency MHz	Target E-Field V/m	Measured E-field (En) V/m	Deviation E-normal in %	Measured E-field (Ep) V/m	Deviation E-normal in %	Unc (k=2) %
30	77.3	76.8	-0.6%	77.3	0.1%	± 5.1 %
100	77.3	78.2	1.2%	77.8	0.7%	± 5.1 %
450	77.1	78.2	1.5%	77.8	0.9%	± 5.1 %
600	77.1	77.8	0.9%	77.5	0.5%	± 5.1 %
750	77.3	77.7	0.5%	77.2	-0.1%	± 5.1 %
1800	140.3	136.9	-2.4%	137.2	-2.2%	± 5.1 %
2000	133.0	129.4	-2.8%	129.4	-2.7%	± 5.1 %
2200	124.8	121.5	-2.7%	122.7	-1.7%	± 5.1 %
2500	123.7	120.7	-2.4%	121.9	-1.5%	± 5.1 %
3000	78.8	74.8	-5.0%	76.1	-3.5%	± 5.1 %
3500	256.3	248.1	-3.2%	246.0	-4.0%	± 5.1 %
3700	249.7	239.2	-4.2%	239.0	-4.3%	± 5.1 %
5200	50.7	50.7	-0.1%	51.2	0.9%	± 5.1 %
5500	49.6	48.9	-1.5%	48.7	-1.9%	± 5.1 %
5800	48.9	49.1	0.4%	49.3	0.8%	± 5.1 %

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Max dev.	Unc [±] (k=2)
0	CW	Х	0.0	0.0	1.0	0.00	141.5	+ 3.3 %	± 4.7 %
		Y	0.0	0.0	1.0		125.6		
	1000	Y	0.0	0.0	1.0		125.1		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EF3-4035_Jan19

Page 3 of 8

FCC ID: ZNFV450VM	ENGINEETING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 36 01 66

B Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the

DASY/EASY - Parameters of Probe: EF3DV3 - SN:4035

Sensor Frequency Model Parameters

	Sensor X	Sensor Y	Sensor Z
Frequency Corr. (LF)	0.28	0.21	5.68
Frequency Corr. (HF)	2.82	2.82	2.82

Other Probe Parameters


Sensor Arrangement	Rectangular
Connector Angle (°)	57.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	335 mm
Probe Body Diameter	12 mm
Tip Length	25 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	1.5 mm
Probe Tip to Sensor Y Calibration Point	1.5 mm
Probe Tip to Sensor Z Calibration Point	1.5 mm

Certificate No: EF3-4035_Jan19


Page 4 of 8

FCC ID: ZNFV450VM	PCTEST'	НА	C (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:		DUT Type:		Dogo EO of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019		Portable Handset		Page 59 of 86

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

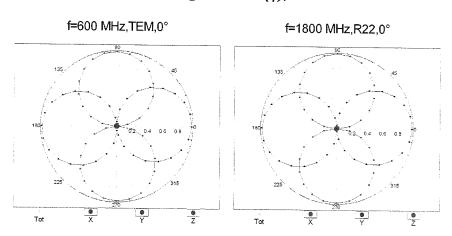

Receiving Pattern (ϕ), $\vartheta = 90^{\circ}$

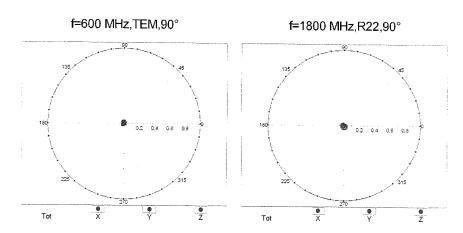


Certificate No: EF3-4035_Jan19

Page 5 of 8


FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 60 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 60 of 86

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

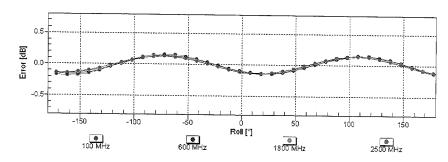

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Receiving Pattern (ϕ), $\vartheta = 90^{\circ}$

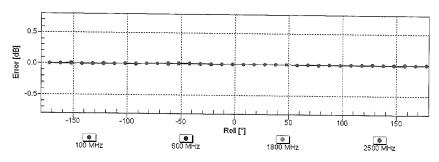


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


Certificate No: EF3-4035_Jan19

Page 6 of 8

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 64 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 61 of 86

Dynamic Range f(E-field) (TEM cell, f = 900 MHz)

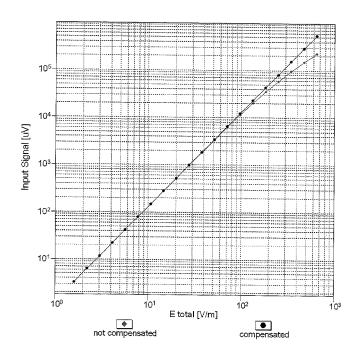



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EF3-4035_Jan19 Page 7 of 8

FCC ID: ZNFV450VM

Filename:

1M1903070034-12-R1.ZNF

Test Dates:

3/18/2019 - 3/22/2019

HAC (RF EMISSIONS) TEST REPORT

DUT Type:


Portable Handset

Page 62 of 86

© 2019 PCTEST Engineering Laboratory, Inc.

REV 3.3.M

Deviation from Isotropy in Air Error (ϕ , ϑ), f = 900 MHz





Uncertainty of Spherical Isotropy Assessment: \pm 2.6% (k=2)

Certificate No: EF3-4035_Jan19

Page 8 of 8

FCC ID: ZNFV450VM	ENGINEETING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 62 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 63 of 86

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client PC Test

Certificate No: CD835V3-1003_Feb19

CALIBRATION	CERTIFICAT	E	
Object	CD835V3 - SN;	1003	
Calibration procedure(s)	QA CAL-20.v7 Calibration Proc	edure for Validation Sources in a	ir VOA 3/1920
Calibration date:	February 19, 20	19	
The measurements and the unce	ertainties with confidence p	ional standards, which realize the physical unorobability are given on the following pages are only facility: environment temperature $(22 \pm 3)^{\circ}$	nd are part of the certificate.
Primary Standards	ID#	Col Data (Contilianta No.)	0.6.1.1.2.2.2.2.2.2.2.2.2.2.2.2.2.2.2.2.2
Power meter NRP	SN: 104778	Cal Date (Certificate No.) 04-Apr-18 (No. 217-02672/02673)	Scheduled Calibration
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02672)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02682)	Apr-19
Probe EF3DV3	SN: 4013	03-Jan-19 (No. EF3-4013_Jan19)	Apr-19
DAE4	SN: 781	09-Jan-19 (No. DAE4-781_Jan19)	Jan-20 Jan-20
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check; Oct-20
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check; Oct-20
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check; Oct-20
Network Analyzer HP 8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name	Function	Signature
Банолатей бу .	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	LOUS-
		full without written approval of the laboratory.	Issued: February 20, 2019

Certificate No: CD835V3-1003_Feb19

Page 1 of 5

FCC ID: ZNFV450VM	PCTEST CAGINETINE LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 64 01 66

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurlch, Switzerland





Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

References

[1] ANSI-C63.19-2011 American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna
 (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes.
 In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a
 distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the
- Feed Point Impedance and Return Loss: These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the
coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD835V3-1003_Feb19	Page 2 of 5	

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 05 01 00

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.10.2
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	105.2 V/m = 40.44 dBV/m
Maximum measured above low end	100 mW input power	105.1 V/m = 40.43 dBV/m
Averaged maximum above arm	100 mW input power	105.2 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	17.6 dB	40.4 Ω - 7.2 jΩ
835 MHz	25.8 dB	$52.2 \Omega + 4.7 j\Omega$
880 MHz	16.9 dB	62.1 Ω - 10.5 jΩ
900 MHz	16.9 dB	52.2 Ω - 14.6 jΩ
945 MHz	21.6 dB	$51.8 \Omega + 8.3 j\Omega$

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD835V3-1003_Feb19 Page 3 of 5

FCC ID: ZNFV450VM	POTEST ENGINEERING LASDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 66 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 66 of 86

Impedance Measurement Plot

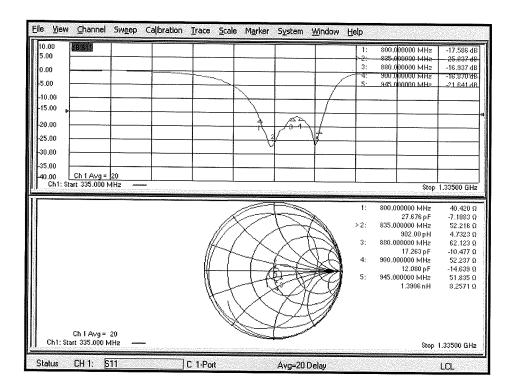

Certificate No: CD835V3-1003_Feb19

Page 4 of 5

FCC ID: ZNFV450VM	PCTEST' ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage of 01 00

DASY5 E-field Result

Date: 19.02.2019

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: $1003\,$

Communication System: UID 0 - CW; Frequency: 835 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)


Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 127.3 V/m; Power Drift = 0.04 dB Applied MIF = 0.00 dBRF audio interference level = 40.44 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M4	Grid 2 M3	Grid 3 M3
39.75 dBV/m	40.43 dBV/m	40.43 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
35.35 dBV/m	35.75 dBV/m	35.73 dBV/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
40.15 dBV/m	40.44 dBV/m	40.36 dBV/m

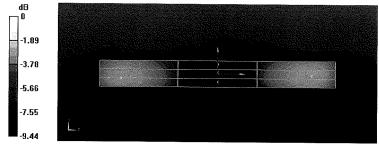

0 dB = 105.2 V/m = 40.44 dBV/m

Certificate No: CD835V3-1003_Feb19

Page 5 of 5

FCC ID: ZNFV450VM	PCTEST CAGINETING LADDATON, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 60 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 68 of 86

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client

PC Test

Certificate No: CD1880V3-1137_Feb19

Object	CD1880V3 - SN	: 1137		
Calibration procedure(s)	QA CAL-20.v7 Calibration Proc	edure for Validation Sources in a	ir	/O 3/19/2
Calibration date:	February 19, 20	19		
The measurements and the unce	ertainties with confidence p	ional standards, which realize the physical ur probability are given on the following pages ar pry facility: environment temperature $(22 \pm 3)^{\circ}$	nd are part of the certificate.	
Primary Standards	1			
Power meter NRP	ID#	Cal Date (Certificate No.)	Scheduled Calibration	
Power sensor NRP-Z91	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19	
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19	
Reference 20 dB Attenuator	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19	
	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19	
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19	
Probe EF3DV3	SN: 4013	03-Jan-19 (No. EF3-4013_Jan19)	Jan-20	
DAE4	SN: 781	09-Jan-19 (No. DAE4-781_Jan19)	Jan-20	
Secondary Standards	ID#	Check Date (in house)	Scheduled Check	
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-17)	In house check: Oct-20	
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-17)	In house check: Oct-20	
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-17)	In house check: Oct-20	
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-17)	In house check: Oct-20	
Network Analyzer HP 8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19	
	Name	Function	Signature	
Calibrated by:	Claudio Leubler	Laboratory Technician	Signature	
pproved by:	Katja Pokovic	Technical Manager	EUG	

Certificate No: CD1880V3-1137_Feb19

Page 1 of 7

FCC ID: ZNFV450VM	ENGINEETING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		D 00 -4 00	
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 69 of 86	

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011

American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna
 (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes.
 In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a
 distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a HP 8753E Vector Network
 Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was
 eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any
 obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the
coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certificate No: CD1880V3-1137 Feb19	Page 2 of 7		

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 70 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 70 01 00

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1730 MHz ± 1 MHz 1880 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1730 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum	
Maximum measured above high end	100 mW input power	95.0 V/m = 39.55 dBV/m	
Maximum measured above low end	100 mW input power	94.9 V/m = 39.55 dBV/m	
Averaged maximum above arm	100 mW input power	95.0 V/m ± 12.8 % (k=2)	

Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	88.9 V/m = 38.98 dBV/m
Maximum measured above low end	100 mW input power	86.6 V/m = 38.75 dBV/m
Averaged maximum above arm	100 mW input power	87.8 V/m ± 12.8 % (k=2)

Certificate No: CD1880V3-1137_Feb19

Page 3 of 7

FCC ID: ZNFV450VM	TENTING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 71 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 71 of 86

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Nominal Frequencies

Frequency	Return Loss	Impedance	
1730 MHz	22.5 dB	54.4 Ω + 6.5 jΩ	
1880 MHz	21.1 dB	55.9 Ω + 7.2 jΩ	
1900 MHz	21.0 dB	59.0 Ω + 3.6 jΩ	
1950 MHz	27.3 dB	53.0 Ω - 3.3 jΩ	
2000 MHz	20.3 dB	$42.4 \Omega + 4.8 jΩ$	

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD1880V3-1137_Feb19 Page 4 of 7

Approved by: FCC ID: ZNFV450VM HAC (RF EMISSIONS) TEST REPORT LG LG Quality Manager Filename: **Test Dates: DUT Type:** Page 72 of 86 1M1903070034-12-R1.ZNF 3/18/2019 - 3/22/2019 Portable Handset

Impedance Measurement Plot

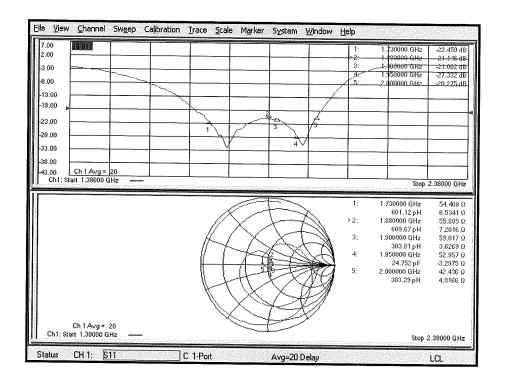

Certificate No: CD1880V3-1137_Feb19

Page 5 of 7

FCC ID: ZNFV450VM	PCTEST CAGINETING LADDATON, INC.	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 72 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 73 of 86

DASY5 E-field Result

Date: 19.02,2019

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1137

Communication System: UID 0 - CW ; Frequency: 1880 MHz, Frequency: 1730 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 1880 MHz, ConvF(1, 1, 1) @ 1730 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 151.5 V/m; Power Drift = 0.02 dB

Applied MIF = 0.00 dB

RF audio interference level = 38.98 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.55 dBV/m	38.98 dBV/m	38.93 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
35.71 dBV/m	35.97 dBV/m	35.96 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.31 dBV/m	38.75 dBV/m	38.73 dBV/m

Certificate No: CD1880V3-1137_Feb19 Page 6 of 7

FCC ID: ZNFV450VM	POTEST ENGINEERING LASDRATORY, INC.	HAC (RF EMISSIONS) TEST REPORT		① LG	Approved by: Quality Manager
Filename:	Test Dates:		DUT Type:		Page 74 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019		Portable Handset		Fage 14 01 00

Dipole~E-Field~measurement~@~1880 MHz~/E-Scan~-~1730 MHz~d=15 mm/Hearing~Aid~Compatibility~Test~(41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 165.0 V/m; Power Drift = 0.03 dB


Applied MIF = 0.00 dB

RF audio interference level = 39.55 dBV/m

Emission category: M2

MIF scaled E-field

		Grid 3 M2 39.51 dBV/m
1	Grid 5 M2 36.95 dBV/m	Grid 6 M2 36.95 dBV/m
		Grid 9 M2 39.53 dBV/m

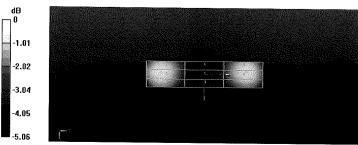

0 dB = 88.87 V/m = 38.98 dBV/m

Certificate No: CD1880V3-1137_Feb19

Page 7 of 7

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 75 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 75 of 86

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

Certificate No: CD3500V3-1005_Jan19 **CALIBRATION CERTIFICATE** Object CD3500V3 - SN: 1005 QA CAL-20.v7 Calibration procedure(s) Calibration Procedure for Validation Sources in air Calibration date: January 15, 2019 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}$ C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards ID# Cal Date (Certificate No.) Scheduled Calibration Power meter NRP SN: 104778 04-Apr-18 (No. 217-02672/02673) Apr-19 Power sensor NRP-Z91 SN: 103244 04-Apr-18 (No. 217-02672) Apr-19 Power sensor NRP-Z91 SN: 103245 04-Apr-18 (No. 217-02673) Apr-19 Reference 20 dB Attenuator SN: 5058 (20k) 04-Apr-18 (No. 217-02682) Apr-19 Type-N mismatch combination SN: 5047.2 / 06327 04-Apr-18 (No. 217-02683) Apr-19 Probe EF3DV3 SN: 4013 03-Jan-19 (No. EF3-4013_Jan19) Jan-20 DAE4 SN: 781 09-Jan-19 (No. DAE4-781_Jan19) Jan-20 Secondary Standards ID# Check Date (in house) Scheduled Check Power meter Agilent 4419B SN: GB42420191 09-Oct-09 (in house check Oct-17) In house check: Oct-20 Power sensor HP E4412A SN: US38485102 05-Jan-10 (in house check Oct-17) In house check: Oct-20 Power sensor HP 8482A SN: US37295597 09-Oct-09 (in house check Oct-17) In house check: Oct-20 RF generator R&S SMT-06 SN: 832283/011 27-Aug-12 (in house check Oct-17) In house check: Oct-20 Network Analyzer HP 8358A SN: US41080477 31-Mar-14 (in house check Oct-18) In house check: Oct-19 Name Function Calibrated by: Leif Klysner Laboratory Technician Approved by: Katia Pokovic Technical Manager Issued: January 17, 2019 This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: CD3500V3-1005_Jan19

Page 1 of 5

FCC ID: ZNFV450VM	ENGINEERING LASSIADAY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 76 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 76 of 86

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

References

[1] ANSI-C63.19-2011 American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna
 (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes.
 In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a
 distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

FCC ID: ZNFV450VM

Filename:
1M1903070034-12-R1.ZNF

Test Dates:
3/18/2019 - 3/22/2019

HAC (RF EMISSIONS) TEST REPORT

DUT Type:
Portable Handset

Approved by:
Quality Manager
Page 77 of 86

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	3500 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 3500 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum	
Maximum measured above high end	100 mW input power	85.1 V/m = 38.60 dBV/m	
Maximum measured above low end	100 mW input power	83.1 V/m = 38.39 dBV/m	
Averaged maximum above arm	100 mW input power	84.1 V/m ± 12.8 % (k=2)	

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance	
3300 MHz	MHz 22.2 dB 58.1 Ω		
3400 MHz	29.7 dB	53.4 Ω - 0.3 jΩ	
3500 MHz	25.4 dB	55.2 Ω - 2.4 jΩ	
3600 MHz	22.1 dB	49.6 Ω - 7.8 jΩ	
3700 MHz	19.7 dB	41.3 Ω - 3.6 jΩ	

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD3500V3-1005_Jan19 Page 3 of 5

Approved by: FCC ID: ZNFV450VM HAC (RF EMISSIONS) TEST REPORT LG LG Quality Manager Test Dates: **DUT Type:** Filename: Page 78 of 86 1M1903070034-12-R1.ZNF 3/18/2019 - 3/22/2019 Portable Handset

Impedance Measurement Plot

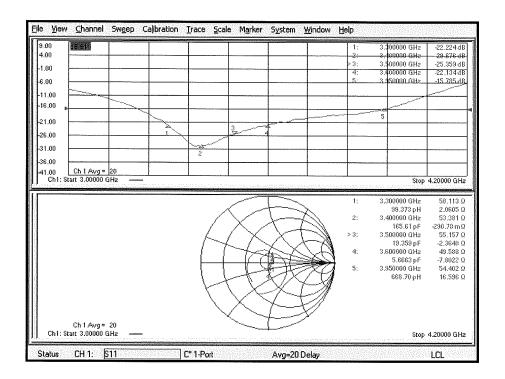

Certificate No: CD3500V3-1005_Jan19

Page 4 of 5

FCC ID: ZNFV450VM	PCTEST TABLETINE LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 79 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Fage 19 01 00

DASY5 E-field Result

Date: 15.01.2019

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 3500 MHz; Type: CD3500V3; Serial: CD3500V3 - SN: 1005

Communication System: UID 0 - CW ; Frequency: 3500 MHz Medium parameters used: $\sigma=0$ S/m, $\epsilon_r=1$; $\rho=0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 3500 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole E-Field measurement @ 3500MHz/E-Scan - 3500MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.54 V/m; Power Drift = 0.02 dB


Applied MIF = 0.00 dB

RF audio interference level = 38.60 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.08 dBV/m	38.39 dBV/m	38.38 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
38.36 dBV/m	38.6 dBV/m	38.55 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.35 dBV/m	38.60 dBV/m	38.54 dBV/m

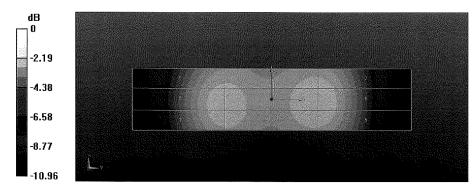

0 dB = 85.13 V/m = 38.60 dBV/m

Certificate No: CD3500V3-1005_Jan19

Page 5 of 5

FCC ID: ZNFV450VM	ENGINEERING LASORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 90 of 96
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 80 of 86

16. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

Please note that the M-rating for this equipment only represents the field interference possible against a hypothetical and typical hearing aid. The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFV450VM	ENGINEERING LASOFATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 04 of 06
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		Page 81 of 86

17. REFERENCES

- ANSI/IEEE C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, "U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. Decker, W. F., Crawford, M. L., and Wilson, W. A., "Construction of a Large Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Feb. 1979.
- 14. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.

FCC ID: ZNFV450VM	PCTEST*	HAC (RF EMISSIONS) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 82 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		raye oz ul ou

- 15. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark. June 1994.
- 16. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 17. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 18. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 19. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 20. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- 21. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFV450VM	ENGINEERING LABORATORY, INC.	HAC (RF EMISSIONS) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 83 of 86
1M1903070034-12-R1.ZNF	3/18/2019 - 3/22/2019	Portable Handset		rage 63 01 66