



Report No.: FCC 1904025-01 File reference No.: 2019-04-19

Applicant: Leader Premiums LTD

Product: Bluetooth Speaker

Model No.: AE0068

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 19, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to

withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1904025-01 Page 2 of 79

Date: 2019-04-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	25
8.0	Maximum Output Power	37
9.0	Carrier Frequency Separation.	40
10.0	Number of Hopping Channel.	44
11.0	Time of Occupancy (Dwell Time)	48
12.0	Out of Band Measurement.	55
13.0	Antenna Requirement.	72
14.0	FCC ID Label.	73
15.0	Photo of Test Setup and EUT View	74

Report No.: FCC1904025-01

Date: 2019-04-19



Page 4 of 79

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Leader Premiums LTD

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Telephone: -Fax: --

1.3 Description of EUT

Product: Bluetooth Speaker

Manufacturer: Leader Premiums LTD

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Brand Name: N/A
Model Number: AE0068
Additional Model Number: N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB antenna used. The gain of the antennas is 0dBi

Input: DC5V, 2A, Built-in 3.7V Li-ion battery

Power Supply: N/A

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1904025-01 Page 5 of 79

Date: 2019-04-19



2019-04-04 to 2019-04-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Page 7 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a) , 15.209 (a)	PASS	Complies
Conducted Emissions	15.207(a)	PASS	Complies

Test Standards 3.2

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

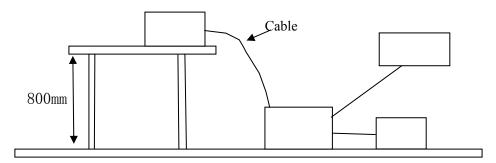

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1904025-01 Page 9 of 79

Date: 2019-04-19



A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth Speaker	Leader Premiums LTD	AE0068	2APYY-AE0068

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	h.TV	S012BES0500200	Input:100-240V~, 50/60Hz,0.5A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1904025-01

Date: 2019-04-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

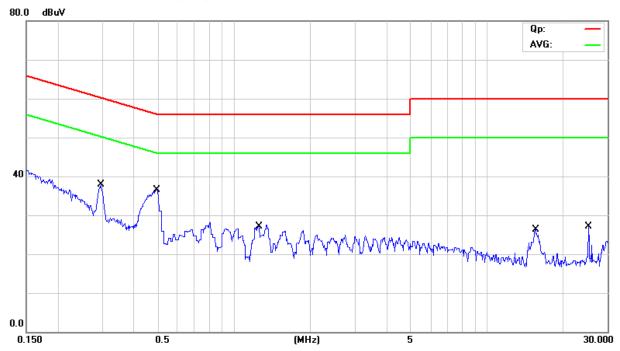

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.2955	24.10	9.76	33.86	60.37	-26.51	QP	
2	0.2955	-7.30	9.76	2.46	50.37	-47.91	AVG	
3 *	0.4907	24.00	9.77	33.77	56.16	-22.39	QP	
4	0.4907	1.40	9.77	11.17	46.16	-34.99	AVG	
5	1.2498	13.00	9.79	22.79	56.00	-33.21	QP	
6	1.2498	-12.50	9.79	-2.71	46.00	-48.71	AVG	
7	15.5256	18.70	10.41	29.11	60.00	-30.89	QP	
8	15.5256	-10.90	10.41	-0.49	50.00	-50.49	AVG	
9	25.1768	14.60	11.00	25.60	60.00	-34.40	QP	
10	25.1768	-23.80	11.00	-12.80	50.00	-62.80	AVG	

Report No.: FCC1904025-01

Date: 2019-04-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

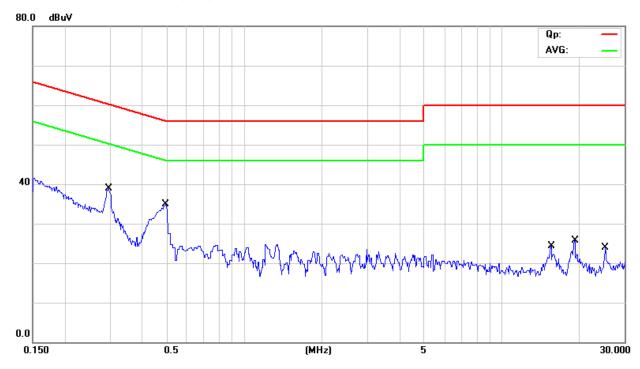

			Reading	Correct	Measure-				
No.	Mk.	Freq.	Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2956	23.80	9.76	33.56	60.37	-26.81	QP	
2		0.2956	-14.30	9.76	-4.54	50.37	-54.91	AVG	
3	*	0.4900	22.40	9.77	32.17	56.17	-24.00	QP	
4		0.4900	-0.10	9.77	9.67	46.17	-36.50	AVG	
5		15.5173	7.20	10.41	17.61	60.00	-42.39	QP	
6		15.5173	-21.90	10.41	-11.49	50.00	-61.49	AVG	
7		19.1278	7.60	10.63	18.23	60.00	-41.77	QP	
8		19.1278	-18.70	10.63	-8.07	50.00	-58.07	AVG	
9		25.1770	9.70	11.00	20.70	60.00	-39.30	QP	
10		25.1770	-24.10	11.00	-13.10	50.00	-63.10	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1904025-01 Page 12 of 79


Date: 2019-04-19



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

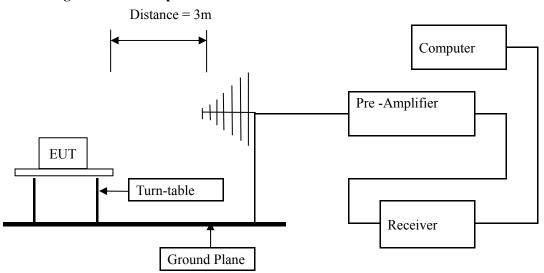

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1904025-01 Page 13 of 79

Date: 2019-04-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. $\Pi/4DQPSK$ was the worse case because it has highest output power

Report No.: FCC1904025-01

Date: 2019-04-19



Page 14 of 79

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Page 15 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Test Figure:

H

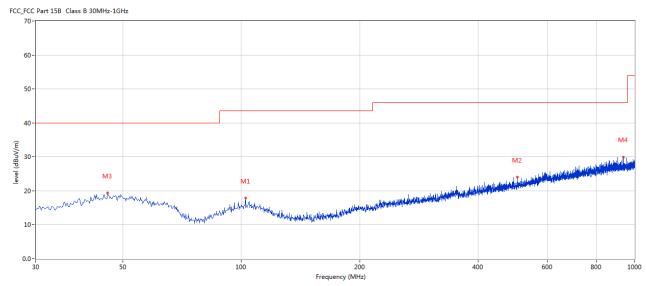


No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	102.489	17.81	-13.41	43.5	-25.69	Peak	360.00	200	Н	Pass
2	502.999	24.04	-6.97	46.0	-21.96	Peak	250.00	100	Н	Pass
3	45.759	19.39	-11.40	40.0	-20.61	Peak	352.00	100	Н	Pass
4	937.451	29.96	-1.78	46.0	-16.04	Peak	112.00	200	Н	Pass

Page 16 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Test Figure:

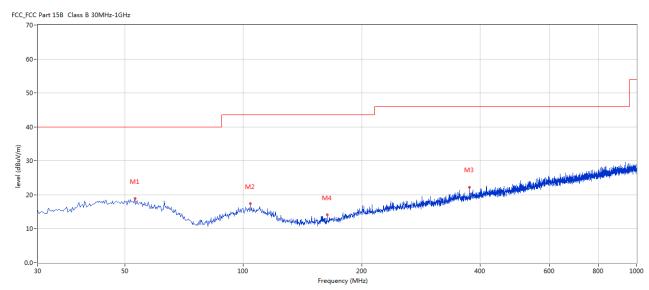

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	53.032	18.87	-11.50	40.0	-21.13	Peak	359.00	200	V	Pass
2	104.186	17.43	-13.30	43.5	-26.07	Peak	360.00	100	V	Pass
3	376.203	22.29	-9.38	46.0	-23.71	Peak	114.00	200	V	Pass
4	163.342	14.15	-16.34	43.5	-29.35	Peak	74.00	100	V	Pass

Report No.: FCC1904025-01 Page 17 of 79

Date: 2019-04-19



Operation Mode: Transmitting under Low Channel (2402MHz)

	8	· · · · · · · · · · · · · · · · · · ·	
Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205	-	H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 18 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 19 of 79 Report No.: FCC1904025-01


Date: 2019-04-19



Please refer to the following test plots for details:

Low Channel: Vertical

FCC Part 15B Class B 1GHz-18GHz - 2

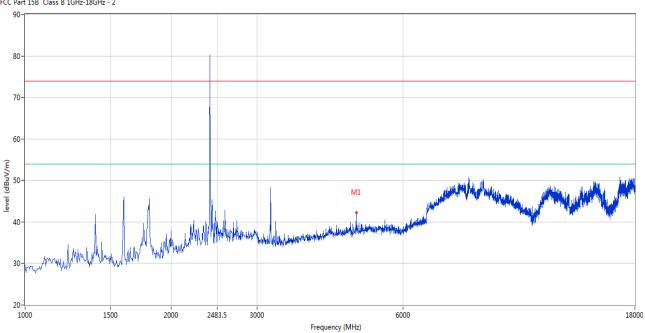


Ī	No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
	1	4802.799	42.20	3.12	74.0	-31.80	Peak	181.00	100	V	Pass

Page 20 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Low Channel: Horizontal

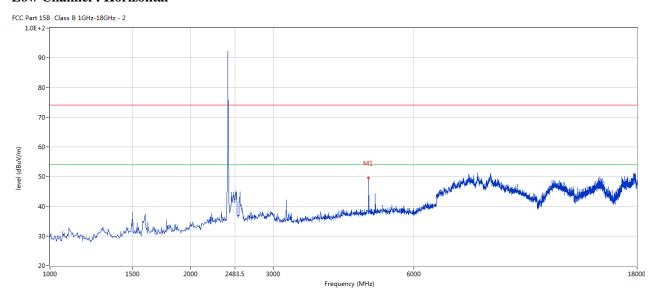


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4802.799	49.49	3.12	74.0	-24.51	Peak	234.00	100	Н	Pass

Page 21 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Middle Channel: Horizontal

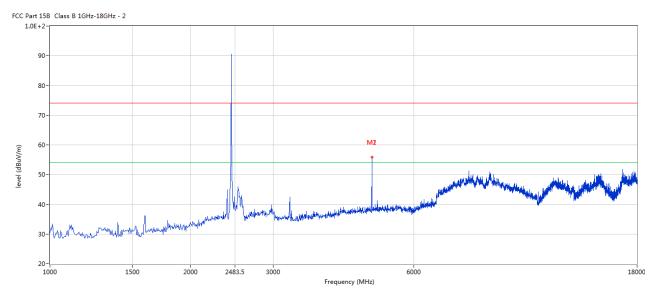


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4883.529	55.91	3.20	74.0	-18.09	Peak	206.00	100	Н	Pass
2	4883.529	40.05	3.20	54.0	-13.95	AV	206.00	100	Н	Pass

Page 22 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



Middle Channel: Vertical

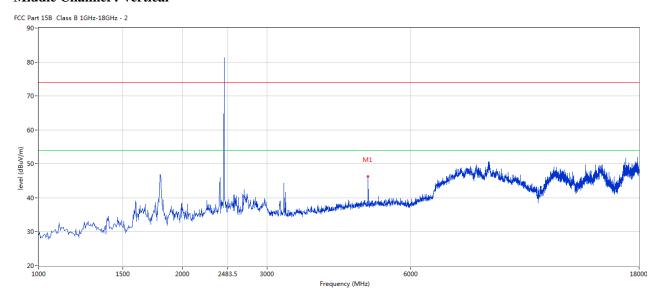


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4883.529	46.27	3.20	74.0	-27.73	Peak	131.00	100	V	Pass

Page 23 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



High Channel: Horizontal

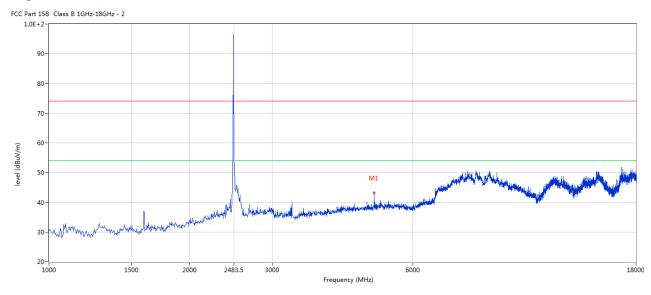


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	43.17	3.36	74.0	-30.83	Peak	272.00	100	Н	Pass

Report No.: FCC1904025-01 Page 24 of 79

Date: 2019-04-19



High Channel: Vertical

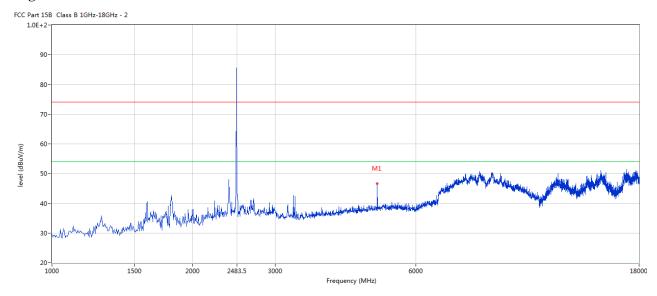

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	46.69	3.36	74.0	-27.31	Peak	274.00	100	V	Pass

Note: for the radiated emissions above 18G, it is the floor noise.

Report No.: FCC1904025-01

Date: 2019-04-19



Page 25 of 79

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

<u> </u>	oudition of bil			
EUT	Blı	uetooth Speaker	Model	AE0068
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	842		Pass
Middle	2441	842		Pass
High	2480	842		Pass

Page 26 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



Test Figure:

1. Condition: Low Channel

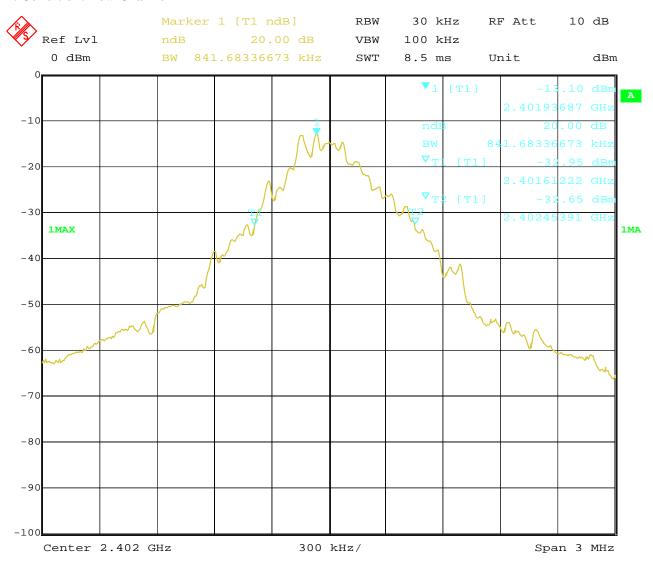


Date: 15.APR.2019 16:28:53 Report No.: FCC1904025-01 Page 27 of 79

Date: 2019-04-19



2. Condition: Middle Channel

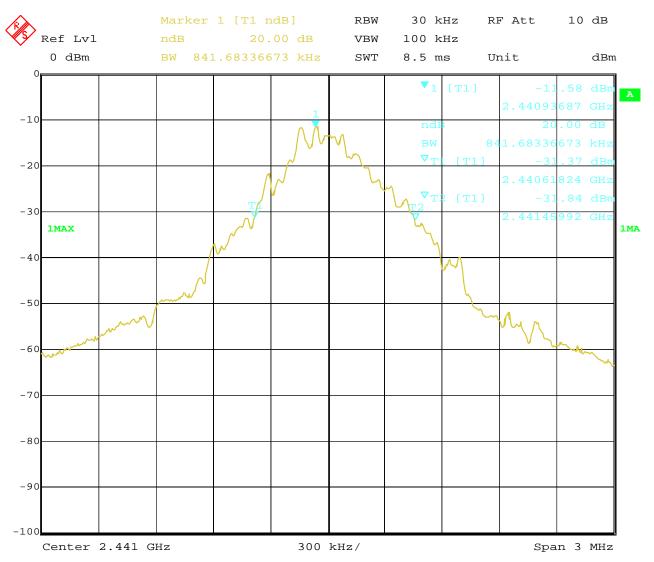


Date: 15.APR.2019 16:24:44 Report No.: FCC1904025-01 Page 28 of 79

Date: 2019-04-19



3. High Channel

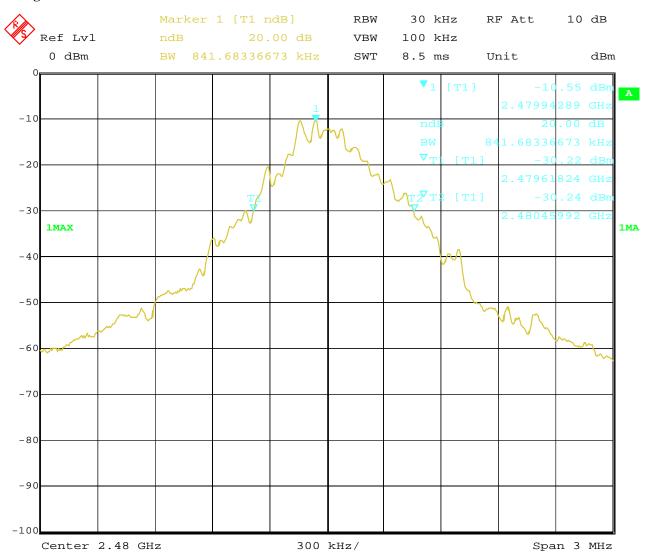

15.APR.2019 16:22:13 Date:

Report No.: FCC1904025-01

Date: 2019-04-19



Page 29 of 79

Test Result

Type of Modulation: JI/4DQPSK

EUT	В	luetooth Speaker	Model	AE0068
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1287		Pass
Middle	2441	1281		Pass
High	2480	1287		Pass


Report No.: FCC1904025-01 Page 30 of 79

Date: 2019-04-19



Test Figure:

1. Condition: Low Channel

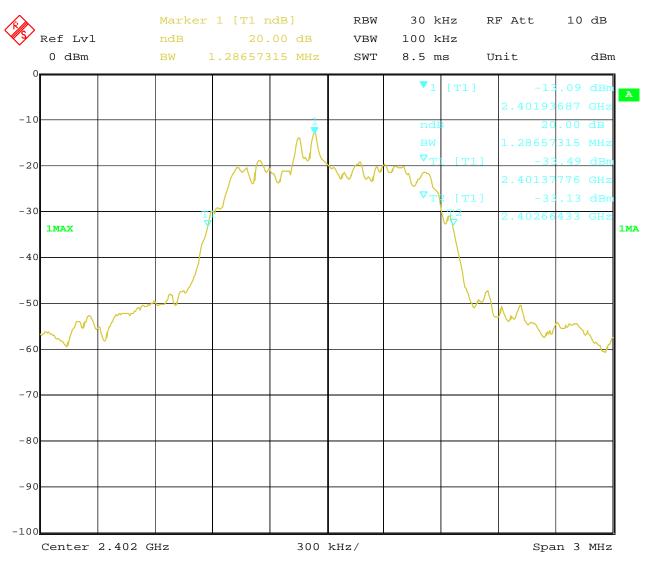


Date: 15.APR.2019 16:30:40

Page 31 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



2. Condition: Middle Channel

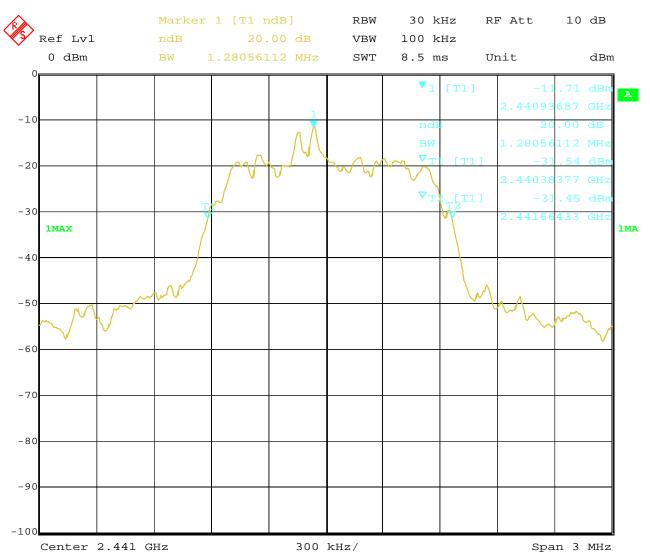


Date: 15.APR.2019 16:32:03 Report No.: FCC1904025-01 Page 32 of 79

Date: 2019-04-19



3. High Channel

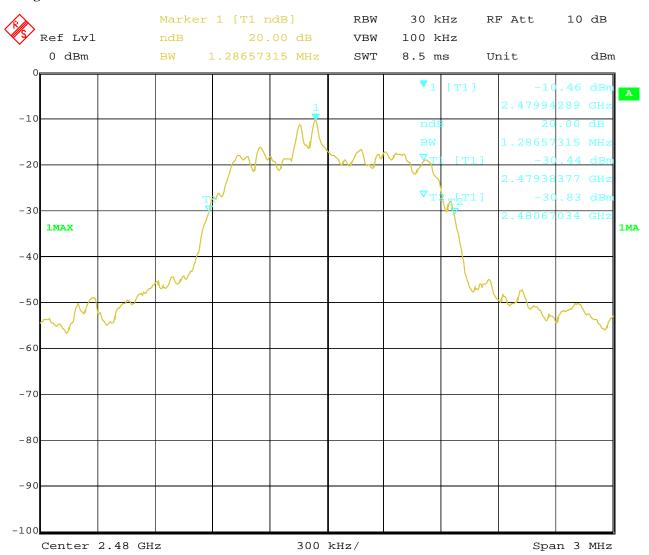

15.APR.2019 16:33:43 Date:

Report No.: FCC1904025-01

Date: 2019-04-19



Page 33 of 79

Test Result

Type of Modulation: 8DPSK

EUT	В	luetooth Speaker	Model	AE0068
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1269		Pass
Middle	2441	1263		Pass
High	2480	1263		Pass


Report No.: FCC1904025-01 Page 34 of 79

Date: 2019-04-19



Test Figure:

1. Condition: Low Channel

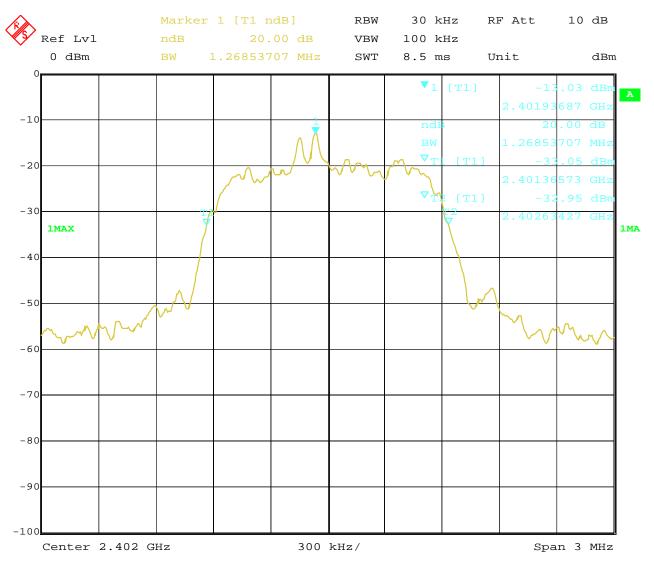


Date: 15.APR.2019 16:44:16 Report No.: FCC1904025-01 Page 35 of 79

Date: 2019-04-19



2. Condition: Middle Channel

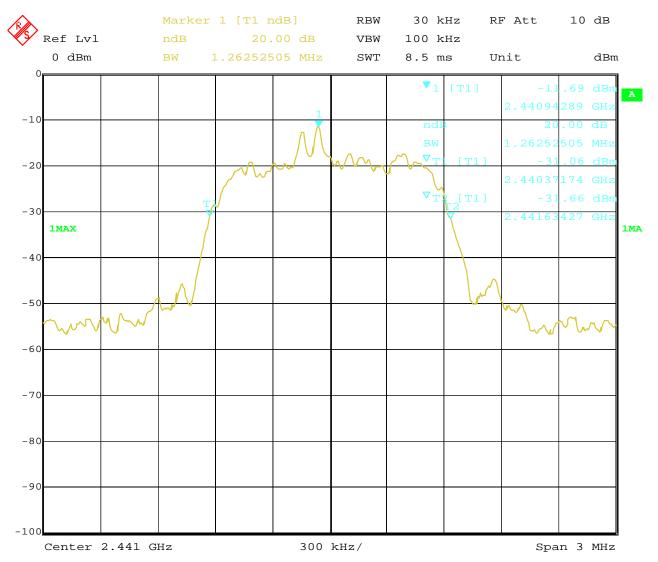


Date: 15.APR.2019 16:38:39

Page 36 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



3. High Channel

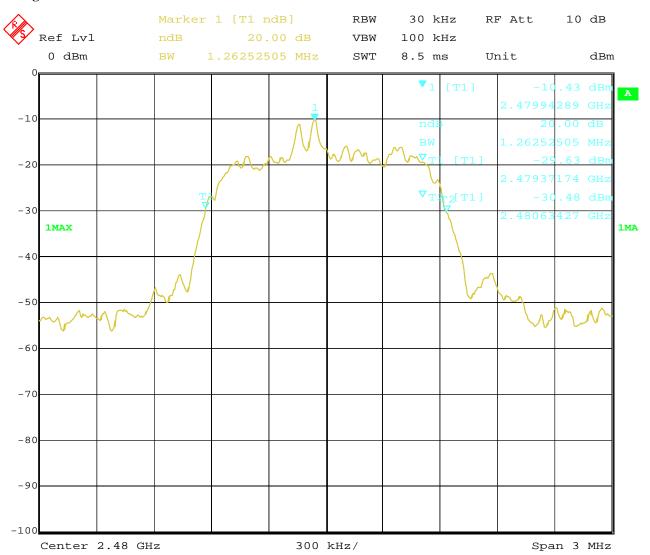

15.APR.2019 Date: 16:41:07

Date: 2019-04-19



Page 37 of 79

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



8.4Test Results

Type of Modulation: GFSK

EUT	В	Bluetooth Speaker Mo			AE0068		
Mode	K	Keep Transmitting Inpu		ep Transmitting Input Voltage		Voltage	DC3.7V
Temperature	mperature 24 deg. C, Humi		Humidity		56% RH		
Channel	Channel Frequency (MHz)	Max. Power Output (dBm	Max. Power Output (dBm)		Pass/ Fail		
Low	2402	-10.80		30	Pass		
Middle	2441	-9.79		30	Pass		
High	2480	-8.69		30	Pass		

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

EUT		Bluetooth Speaker		Mode	el	AE0068
Mode		Ke	ep Transmitting	Input Voltage		DC3.7V
Temperature	nperature 24 deg. C, Humi		Humidity		56% RH	
Channel	Channel Frequency		Max. Power Output (dBm)		Peak Power	Pass/ Fail
		(MHz)	Peak		Limit (dBm)	
Low		2402	-7.33		30	Pass
Middle		2441	-6.19		30	Pass
High		2480	-5.66		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-04-19



Page 39 of 79

Type of Modulation: 8DPSK

EUT	Blu	Bluetooth Speaker		el	AE0068
Mode	Ke	Keep Transmitting		it Voltage	DC3.7V
Temperature		24 deg. C,		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-7.49		30	Pass
Middle	2441	-6.26		30	Pass
High	2480	-5.66		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Date: 2019-04-19



Page 40 of 79

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2019-04-19




9.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Spe	Model		AE0068	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,	Humidity			56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

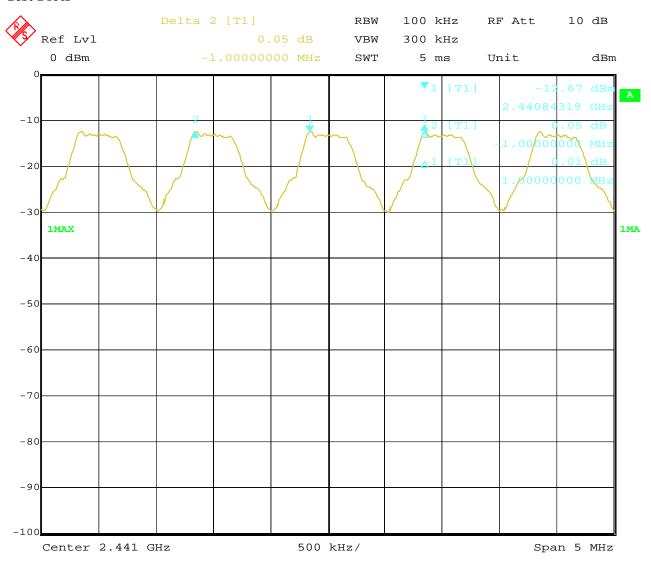

15.APR.2019 Date: 11:49:43

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 42 of 79

Report No.: FCC1904025-01


Date: 2019-04-19



Type of Modulation: Л/4DQPSK

EUT	Bluetooth Spe	Model		AE0068	
Mode	Hopping On In		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

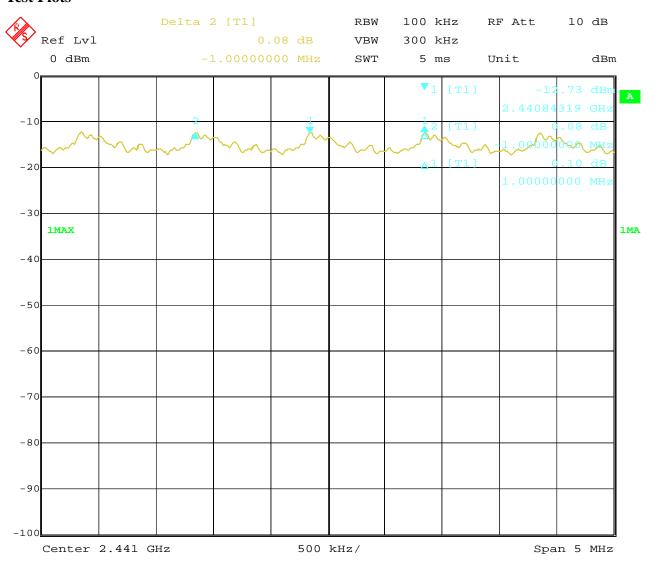

15.APR.2019 12:01:38

Page 43 of 79

Report No.: FCC1904025-01


Date: 2019-04-19



Type of Modulation: 8DPSK

EUT	Bluetooth Spe	Model		AE0068	
Mode	Hopping On In		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2	/3 of 20 dB bandy	vidth	Pass

Test Plots

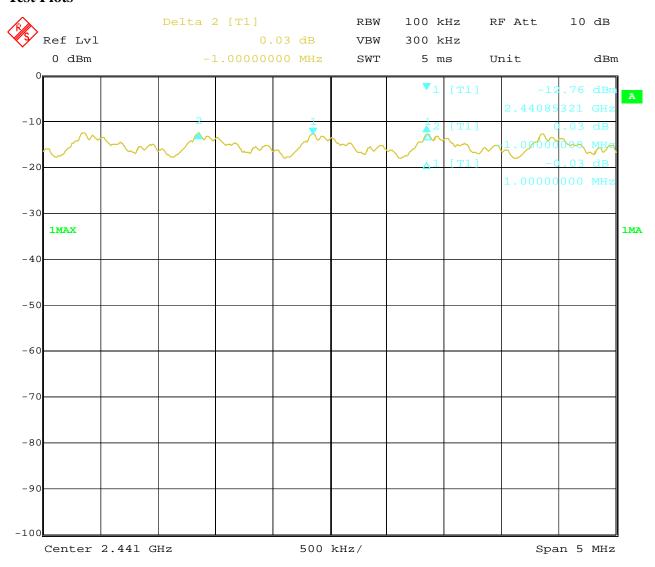

15.APR.2019 14:39:05 Date:

Date: 2019-04-19



Page 44 of 79

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 45 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




10.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Speaker		Model		AE0068	
Mode	Hopping On		Input Voltage	DC3.7V		
Temperature	2	24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hopp	oing channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass	

Test Plot

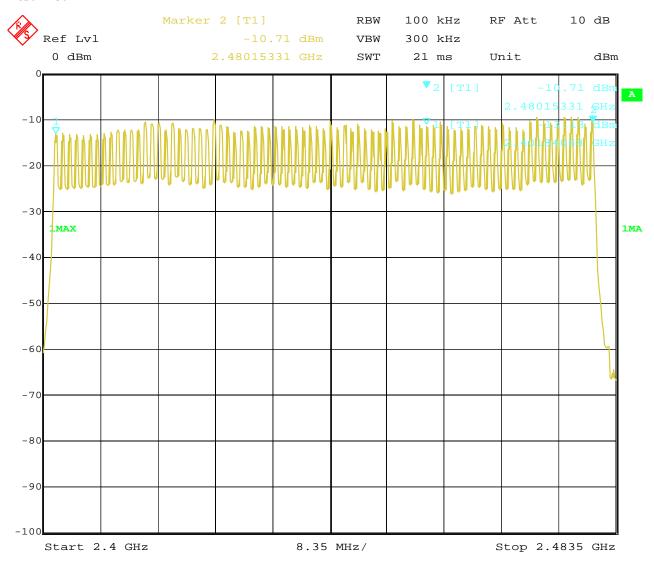

Date: 15.APR.2019 11:43:09

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 79

Report No.: FCC1904025-01


Date: 2019-04-19



Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	Bluetooth Speaker		Model		AE0068		
Mode	Hopping On		Input Voltage			DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Operating Frequency		Number of hopping channels		Lin	nit	Pass/ Fail	
2402-2480MHz		79		<u>></u>	15	Pass	

Test Plot

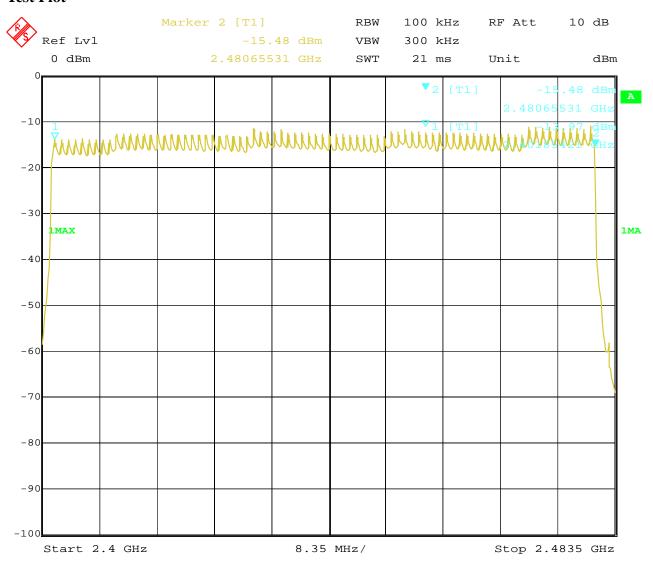

15.APR.2019 12:22:30 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 47 of 79

Date: 2019-04-19




Type of Modulation: 8DPSK

Report No.: FCC1904025-01

EUT	Bluetooth Speaker		Model			AE0068	
Mode	Hopping On		Input V	oltage		DC3.7V	
Temperature	2	24 deg. C,		ity		56% RH	
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail	
2402-2480MHz		79		<u> </u>	15	Pass	

Test Plot

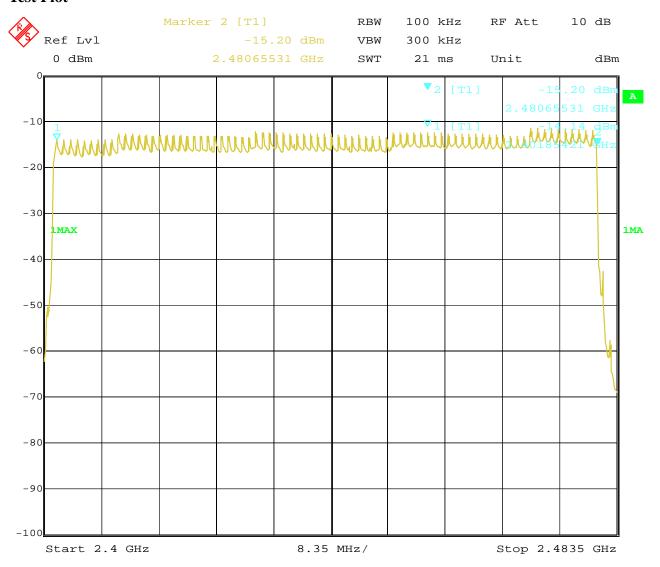

15.APR.2019 14:23:06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2019-04-19



Page 48 of 79

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geqslant RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2019-04-19



Page 49 of 79

11.4 Test Result

Type of Modulation: GFSK

EUT	JT Bluetooth Speaker		Model	1	AE0068
Mode	Keep Tr	Keep Transmitting Input Voltage 120V~		120V~	
Temperatur	re 24 c	leg. C,	Humidity	5	66% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
DH5					
Middle	2.966ms	266.667	7 hop/s	0.316s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 50 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



Test Plots:

DH5

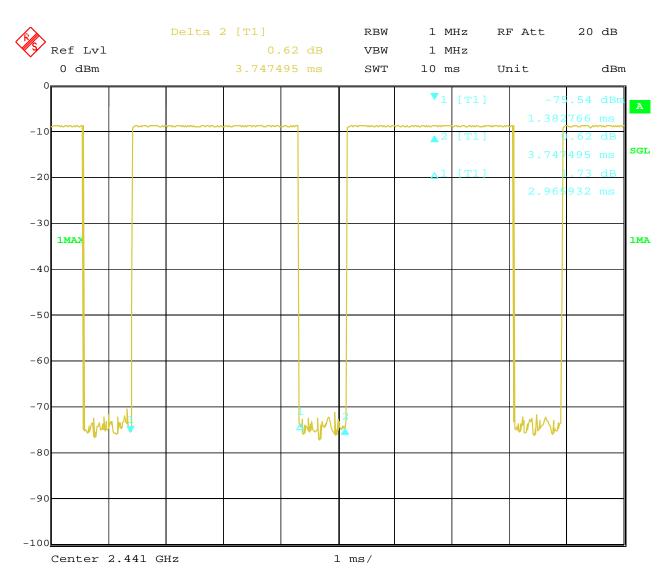

Date: 15.APR.2019 18:24:18

Date: 2019-04-19



Page 51 of 79

Test Result

Type of Modulation: Л/4DQPSK

EUT	Bluetoo	Bluetooth Speaker		1	AE0068
Mode	Keep Tr	Keep Transmitting Input Voltage 120V~		120V~	
Temperatur	re 24 c	leg. C,	Humidity	5	66% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
	DH5				
Middle	2.966ms	266.667	7 hop/s	0.316s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 52 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



Test Plots:

2DH5

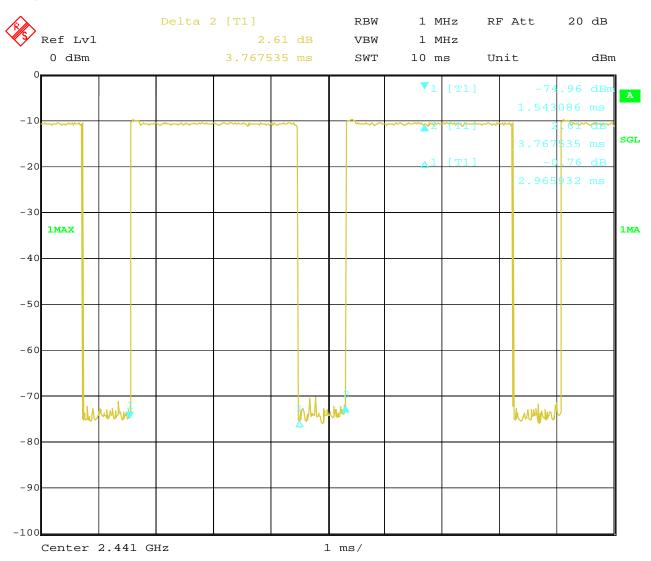

Date: 15.APR.2019 18:26:27 Report No.: FCC1904025-01 Page 53 of 79

Date: 2019-04-19



Type of Modulation: 8DPSK

EUT	Bluetooth Speaker		Model		AE0068
Mode	le Keep Transmitting		Input Voltage	120V~	
Temperatur	e 24 d	eg. C,	Humidity	56% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit
			DH5		
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 54 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



Test Plots:

3DH5

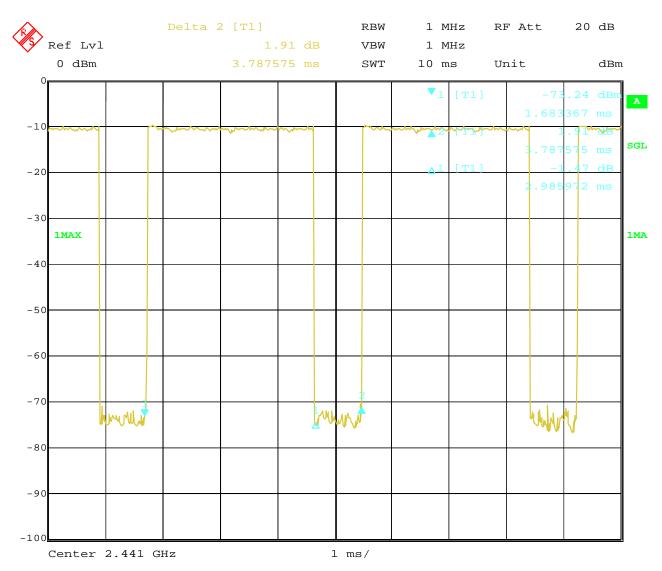

Date: 15.APR.2019 18:28:53


Date: 2019-04-19



Page 55 of 79

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 56 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

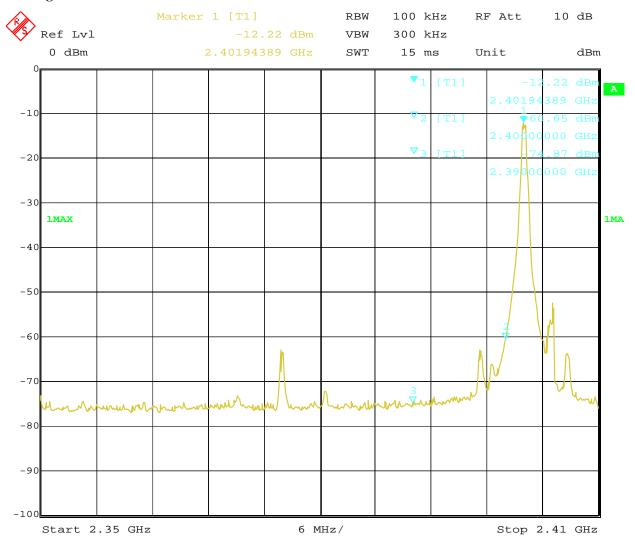

Date: 15.APR.2019 17:03:19

Page 57 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: GFSK

12.4 Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

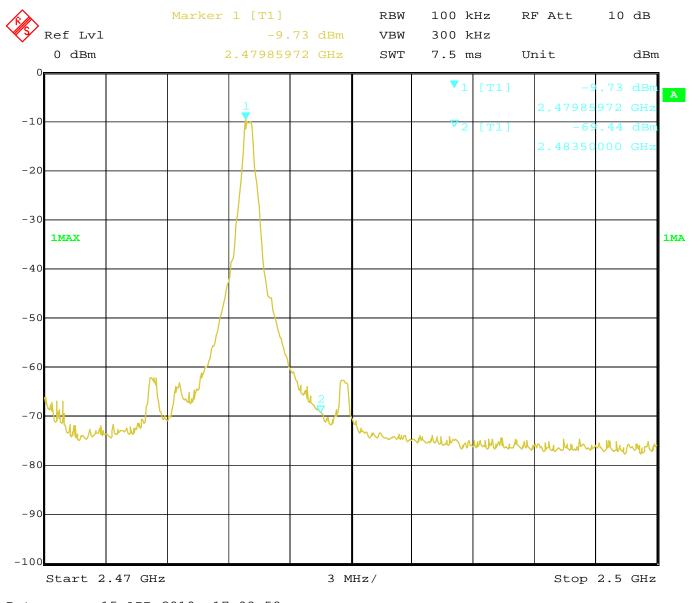

15.APR.2019 17:03:58 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 58 of 79

Date: 2019-04-19




Type of Modulation: GFSK

Report No.: FCC1904025-01

12.4 Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

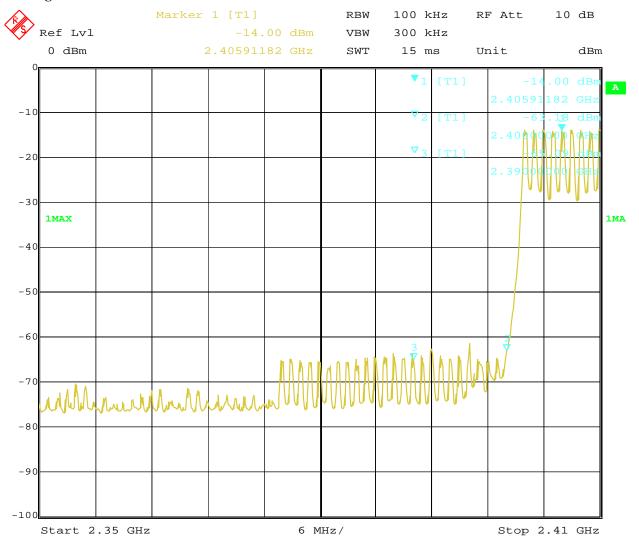

Date: 15.APR.2019 14:55:25

Page 59 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: GFSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

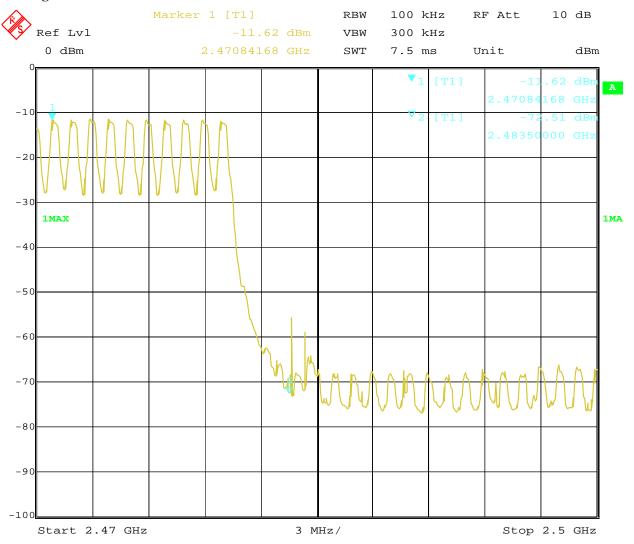

Date: 15.APR.2019 14:52:39

Page 60 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: JI/4DQPSK

12.4 Out of Band Test Result

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

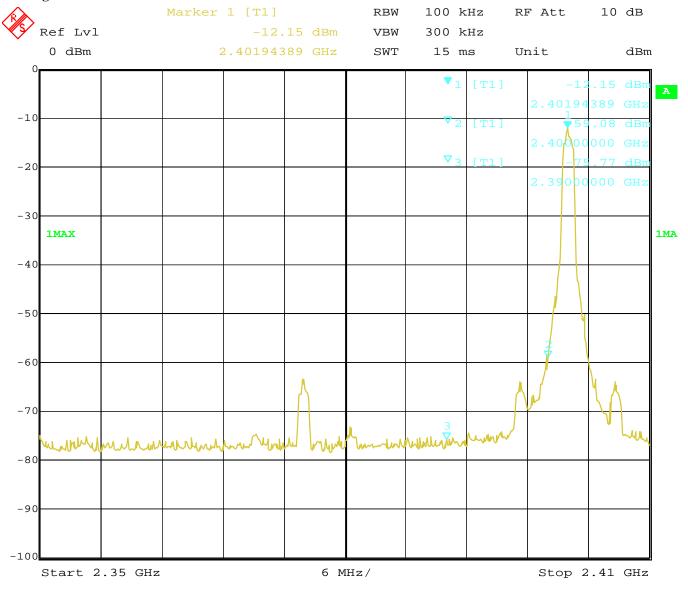

Date: 15.APR.2019 17:01:03

Page 61 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: $\pi/4DQPSK$

12.4 Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

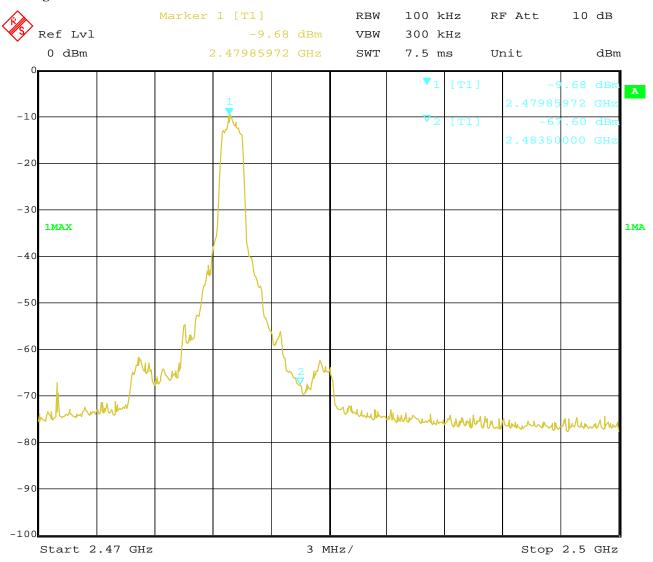

Date: 15.APR.2019 17:04:31

Report No.: FCC1904025-01 Page 62 of 79

Date: 2019-04-19




Type of Modulation: $\sqrt{1/4}$ DQPSK

12.4 Out of Band Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

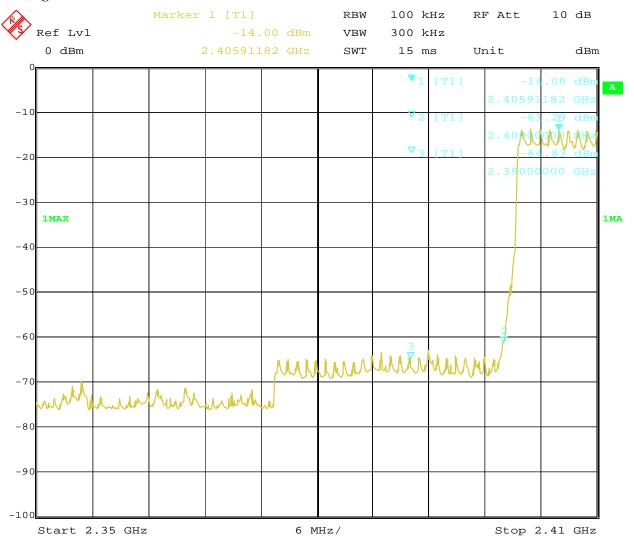

Date: 15.APR.2019 14:59:14

Page 63 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

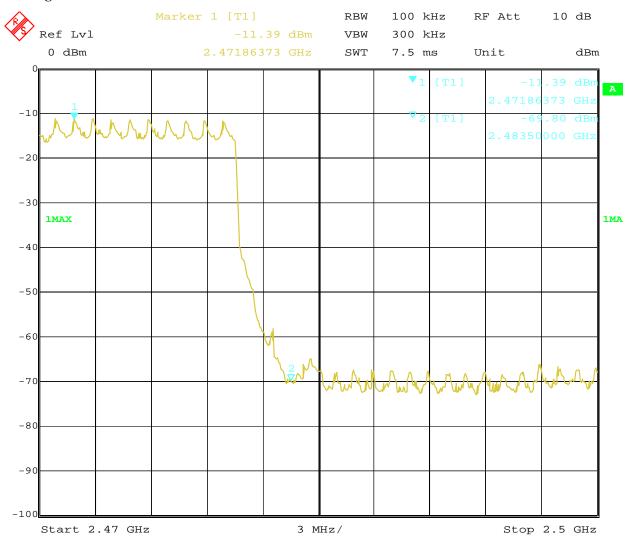

Date: 15.APR.2019 14:48:54

Page 64 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

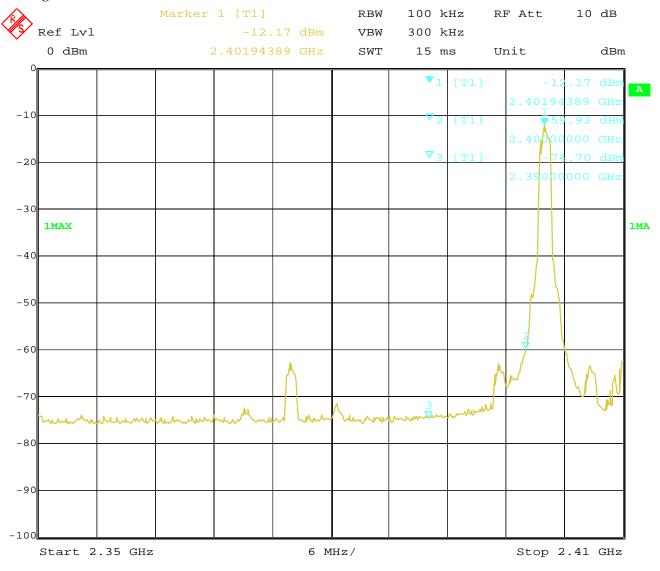

15.APR.2019 17:00:42 Date:

Page 65 of 79

Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	Bl	uetooth Speaker	Test Mode:	High Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	44.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

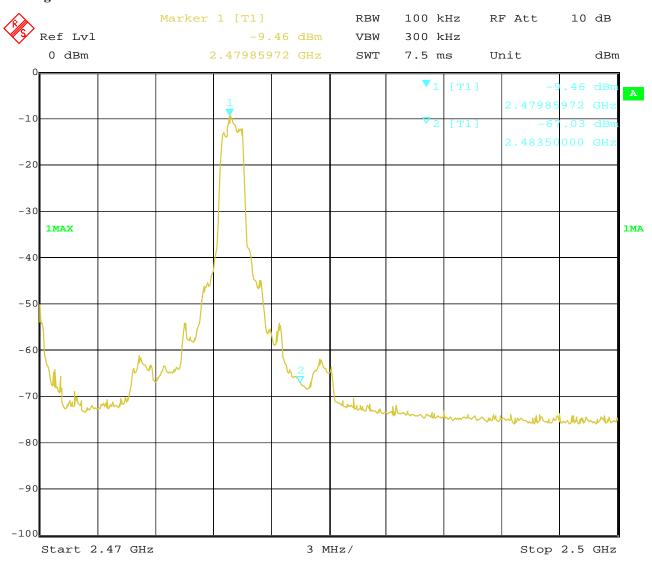

15.APR.2019 17:08:58 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 66 of 79 Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

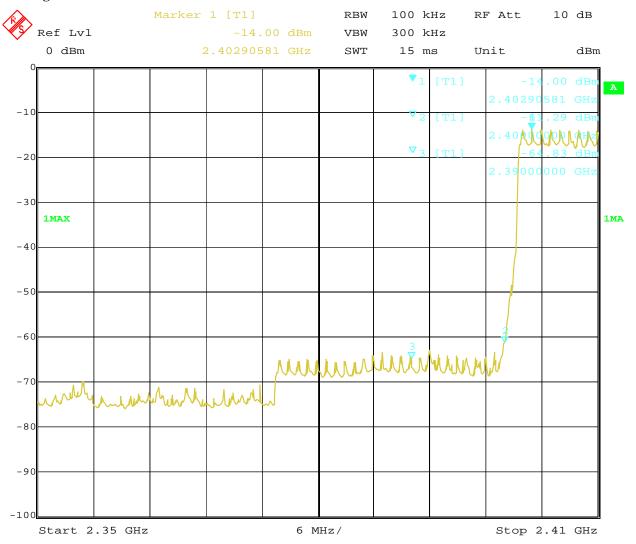

Date: 15.APR.2019 15:11:14

Page 67 of 79 Report No.: FCC1904025-01

Date: 2019-04-19




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

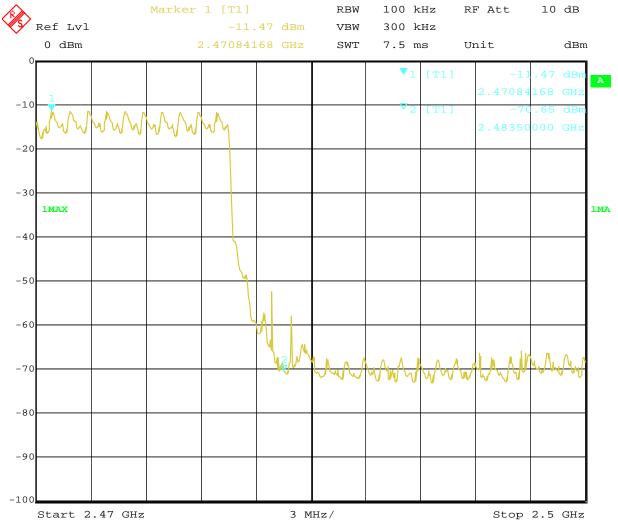


15.APR.2019 14:44:29 Date:

Report No.: FCC1904025-01 Page 68 of 79

Date: 2019-04-19



12.4 Restrict Band Measurement

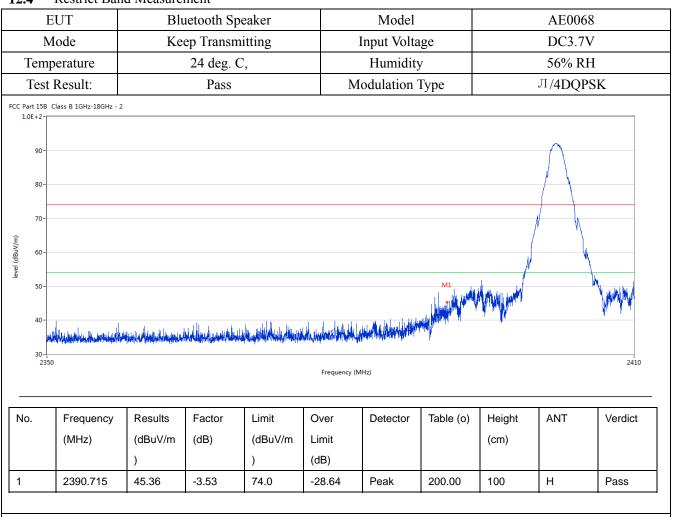

Page 69 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



12.4 Restrict Band Measurement

EU	Т	Blı	ietooth Sp	peaker		Model			AE0068	
Mod	de	Keep Transmitting			Input Voltage			DC3.7V 56% RH		
Temper	ature	24 deg. C,		Humidity						
Test Re	esult:		Pass		Mo	dulation Ty	pe	Л	/4DQPS	K
CC Part 15B Class	B 1GHz-18GHz - 2				•					
1.02+2-										
90-										
80-										
70-									/ \	
(m)/m										
evel (dBuV/m)							M1		/	
50-							An. 1 1. 1	ha lundata V		\
40	. I	1	المناسبة	. Katania saluar	a Laciona	ana i tiri daabu ah				March 10 to
40-							النبي هيطالا الألك	dulini firafika da		AND THE PARTY
30-										2410
2330					Frequency	(MHz)				2410
	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
No. F				(15.17)	Limit			(cm)		
	(MHz)	(dBuV/m	(dB)	(dBuV/m						
		(dBuV/m)	(dB)	(dBuV/m	(dB)					

Page 70 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



12.4 Restrict Band Measurement

I	EUT	Bl	uetooth Spea	aker]	Model			AE006	8	
N	Mode	de Keep Transmitting				Input Voltage			DC3.7V		
Tem	perature	24 deg. C,			Humidity			56% RH			
Test	Result:		Pass		Modu	lation Typ	e		Л/4DQP	SK	
CC Part 15B 1.0E+2-	Class B 1GHz-18GHz	z - 2									
90-											
90											
80-											
70-											
(w//w)											
level (dBuV/m)											
50-											
40						ı				M	
40-		Maria Caralanda Cara			Holyan						
30 - 247	70			24	33.5				. , ,	25	
247	70			244	Frequency (MHz)					23	
No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict	
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)			
1	2483.5	57.77	-3.57	74.0	-16.23	Peak	84.00	100	Н	Pass	
'	2483.5	41.89	-3.57	54.0	-12.11	AV	84.00	100	Н	Pass	

Page 71 of 79 Report No.: FCC1904025-01

Date: 2019-04-19



12.4 Restrict Band Measurement

Г	EUT	Blı	ietooth Sp	eaker		Model			AE006	58	
N.	Mode	Keep Transmitting 24 deg. C,				Input Voltage Humidity			DC3.7V 56% RH		
Temp	perature										
Test	Result:		Pass		N	Modulation Type			Л/4DQPSK		
CC Part 15B (Class B 1GHz-18GHz - 2										
1.0E+2-											
90-											
80-											
70-			/_	-							
(w/A											
-09 (dgn//m)											
6 -			1		V						
50-			/		N.	1.15	Alta of a Link banco				
50- J á	Hillian Compression of the State of the Stat	A STATE OF THE PROPERTY OF THE PARTY OF THE	,		Mary Mary Mary Mary Mary Mary Mary Mary	HALL THE PARTY NAMED IN		Maria Ma	le e		
	Harris Charles Company	مراجع والمناوا المناوات المناو			Mary Hard Mary Mary	A CONTRACTOR OF THE PARTY OF TH					
50- 40-	A CONTRACTOR OF THE PARTY OF TH	A STATE OF THE PROPERTY OF THE PARTY OF THE						The state of the s			
50- J á	0	alan dan dan dan dan dan dan dan dan dan d			2483.5 Frequency	(MHz)			Market and the state of the sta	2500	
50- 40-	o	Alexander de la constitución de la				(MHz)				2500	
50- 40-	Frequency	Results	Factor	Limit		(MH2)	Table (o)	Height	ANT	2500 Verdict	
30 - 2470		Results (dBuV/m	Factor (dB)		Frequency						
30 - 2470	Frequency			Limit	Over			Height			

Note: For Restricted band test, only the worst case was reported.

Date: 2019-04-19



Page 72 of 79

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The gain of the antennas is 0dBi.

Report No.: FCC1904025-01 Page 73 of 79

Date: 2019-04-19




14.0 FCC ID Label

FCC ID: 2APYY-AE0068

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

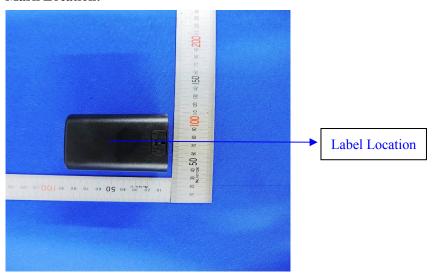

Page 74 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



15.0 Photo of testing

Conducted Emission Test Setup:

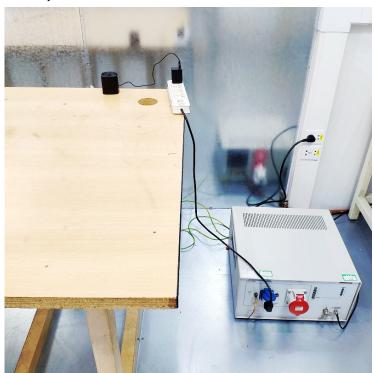


Page 75 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



Radiated Emission Test Setup:

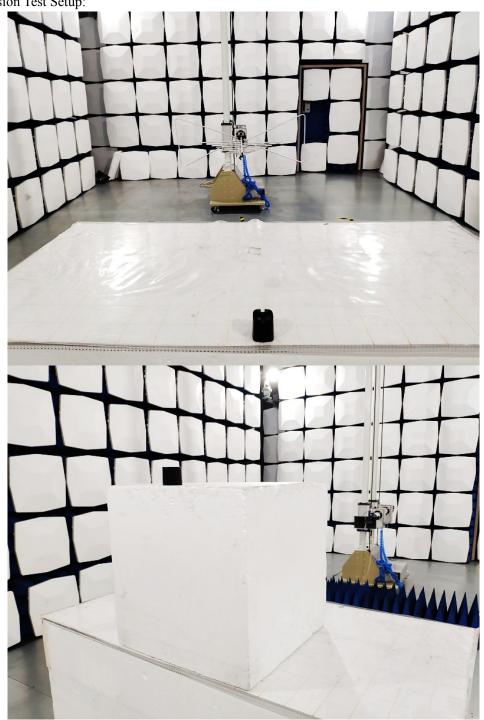


Page 76 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



Photographs - EUT

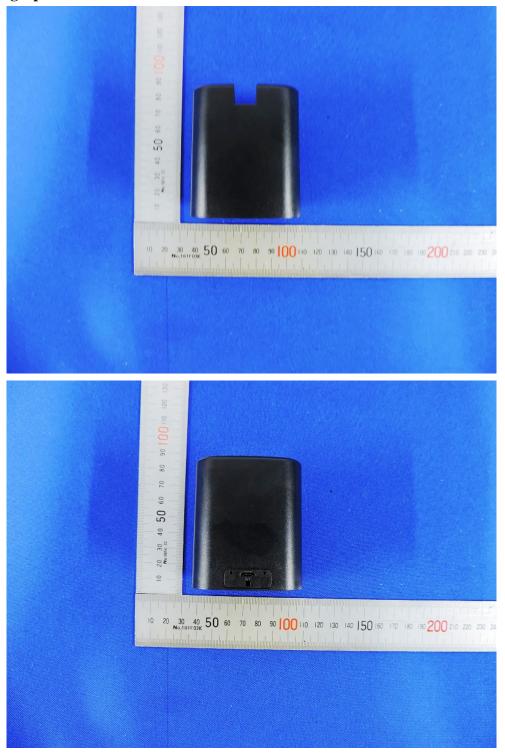


Page 77 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



Photographs - EUT

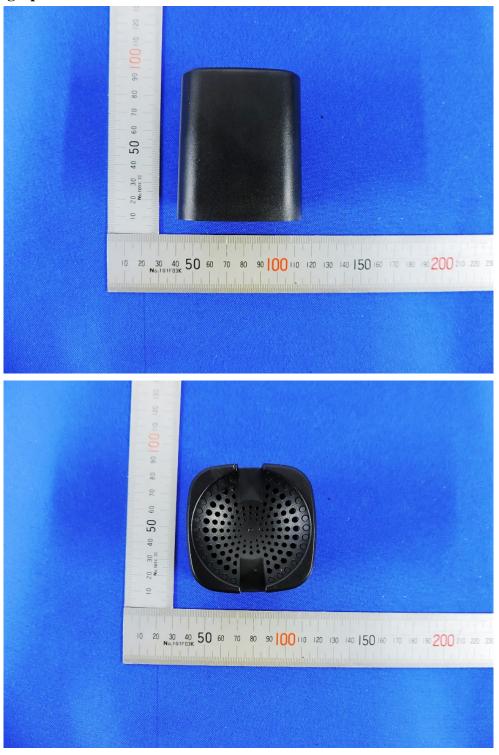

Page 78 of 79

Report No.: FCC1904025-01

Date: 2019-04-19



Photographs - EUT



Page 79 of 79


Report No.: FCC1904025-01

Date: 2019-04-19



Photographs - EUT



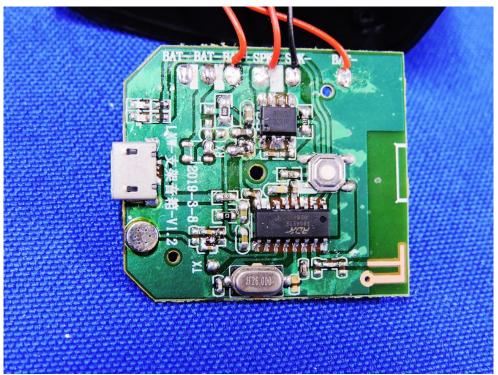

End of Report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.