

FCC Radio Test Report


FCC ID: KA2AP1325A1

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1612C204
Equipment : N300 Wi-Fi Range Extender
Model Name : DAP-1325, DAP-1330
Applicant : D LINK Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California,
United States 92708

Date of Receipt : Dec. 20, 2016
Date of Test : Dec. 20, 2016 ~ Jan. 10, 2016
Issued Date : Jan. 10, 2016
Tested by : BTL Inc.

Testing Engineer :

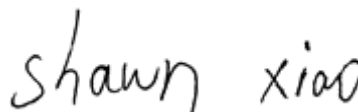

(Shawn Xiao)

Technical Manager :



(David Mao)

Authorized Signatory :



(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	21

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	22
7.1 APPLIED PROCEDURES / LIMIT	22
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY TEST	23
8.1 APPLIED PROCEDURES / LIMIT	23
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	26
ATTACHMENT A - CONDUCTED EMISSION	30
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	33
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	38
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	45
ATTACHMENT E - BANDWIDTH	94
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	103
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	108
ATTACHMENT H - POWER SPECTRAL DENSITY	157

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1612C204	Original Issue.	Jan. 10, 2016

1. CERTIFICATION

Equipment : N300 Wi-Fi Range Extender
Brand Name : D-LINK
Model Name : DAP-1325, DAP-1330
Applicant : D LINK Corporation
Manufacturer: D LINK Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California, United States 92708
Factory : SHENZHEN MTN ELECTRONICS CO.,LTD
Address : MTN Industrial Park, No.5,9, FuTai Road, Pingxi community,Pingdi Street,Longgang District, Shenzhen
Date of Test : Dec. 20, 2016 ~ Jan. 10, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1612C204) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	$\pm 0.5\text{dB}$
6dB Bandwidth	$\pm 0.5\text{dB}$
Peak Output Power	$\pm 0.5\text{dB}$
Power Spectral Density	$\pm 0.5\text{dB}$
Temperature	0.08°C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	N300 Wi-Fi Range Extender	
Brand Name	D-LINK	
Model Name	DAP-1325, DAP-1330	
Model Difference	Only differ in model name.	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 19.82dBm 802.11g: 27.33dBm 802.11n(20MHz): 27.47dBm 802.11n(40MHz): 27.49dBm
Power Source	AC Main	
Power Rating	100-240V~ 50/60Hz 0.3A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Dipole	N/A	2
2	N/A	N/A	Dipole	N/A	2

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).

4.

Operating Mode	2TX
TX Mode	
802.11b	V (ANT 1+ANT 2)
802.11g	V (ANT 1+ANT 2)
802.11n(20MHz)	V (ANT 1+ANT 2)
802.11n(40MHz)	V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	Normal Link

For Conducted Test	
Final Test Mode	Description
Mode 5	Normal Link

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

For Band Edge Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

6dB Spectrum Bandwidth	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Maximum Conducted Output Power	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Power Spectral Density	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : BPSK (13Mbps)
802.11n HT40 mode : BPSK (27Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	QATool_Dbg		
Frequency (MHz)	2412	2437	2462
802.11b	12	12	12
802.11g	14	14	14
802.11n (20MHz)	15	15	15
Frequency (MHz)	2422	2437	2452
802.11n (40MHz)	18	18	18

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

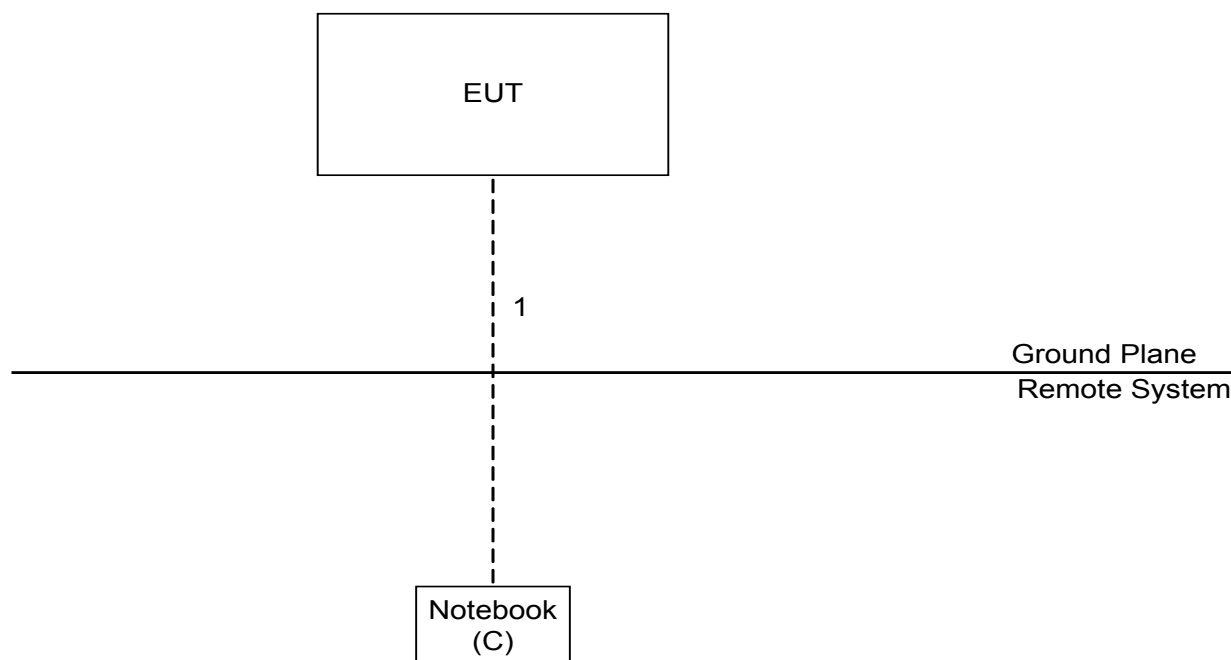

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
	-		-		-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	10m	RJ45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

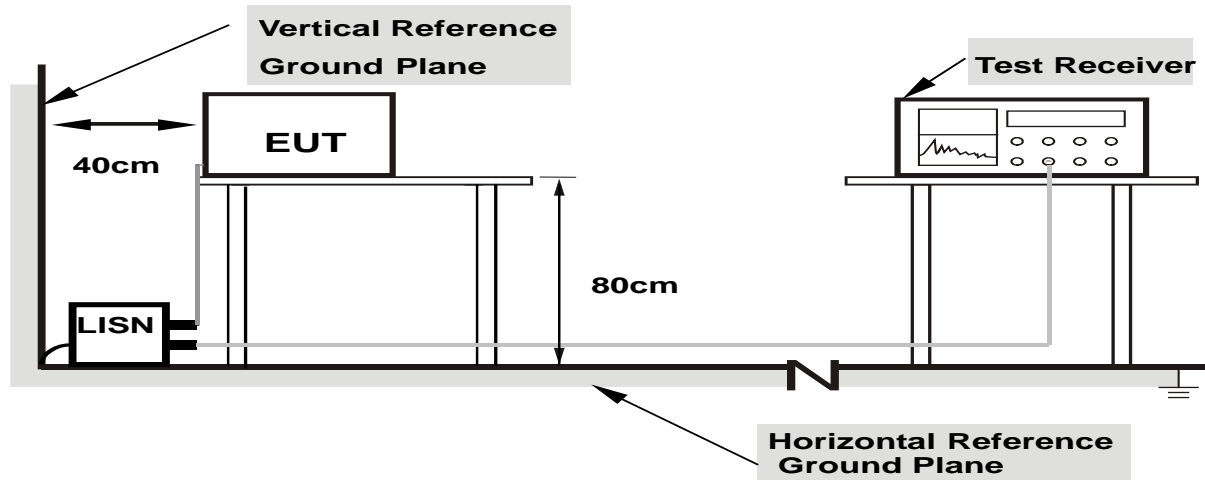

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	Band edge at 3m (dBμV/m)		Harmonic at 1.5m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	80 (Note 5)	60(Note 5)

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log d_{\text{limit}}/d_{\text{measure}}=20\log 3/1.5=6\text{dB.}$$

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

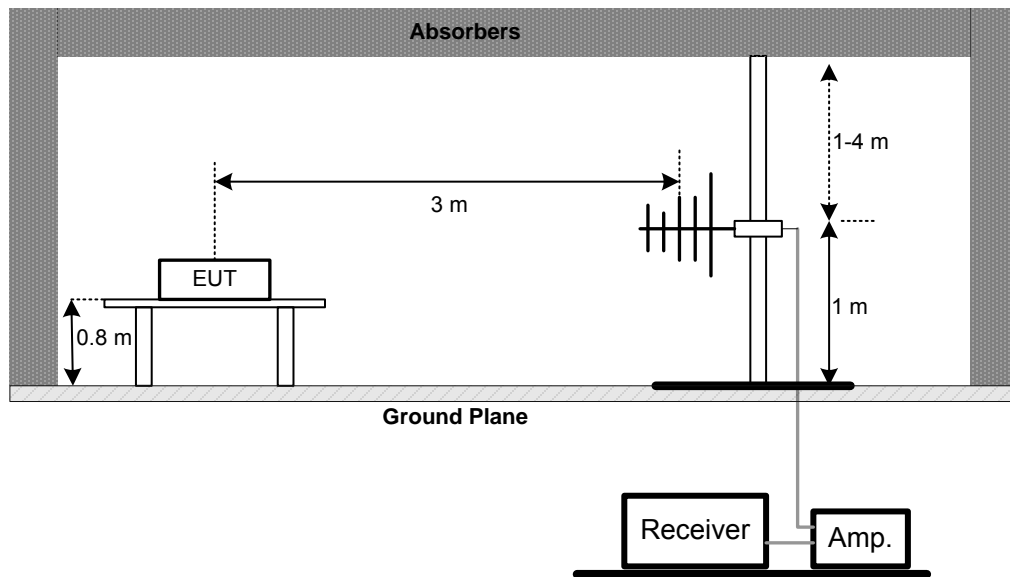

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

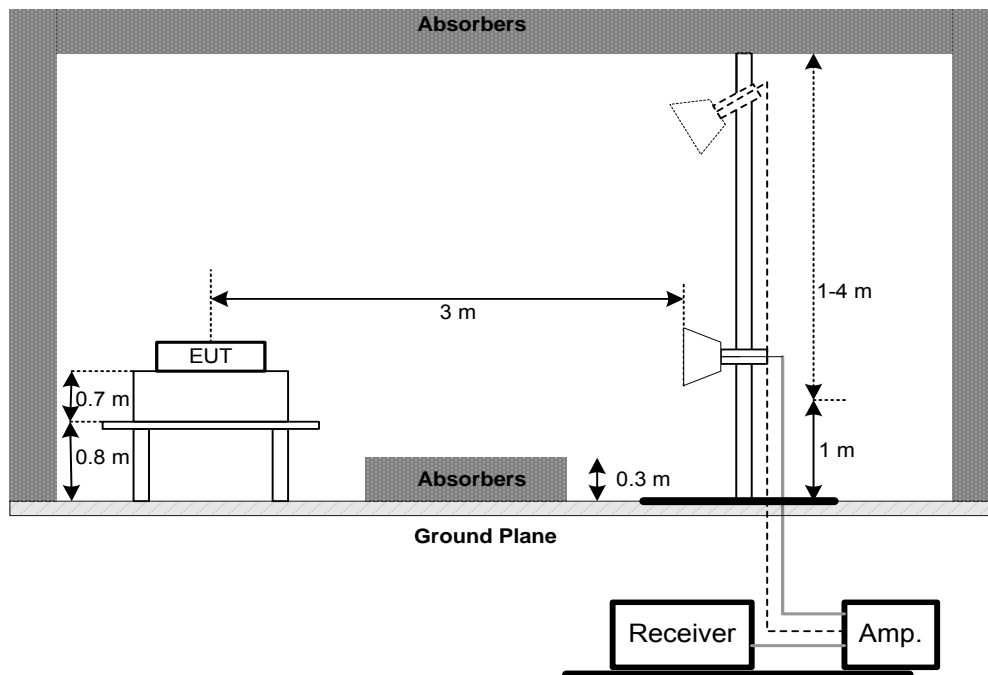

(C) For Radiated Emissions Below 30MHz

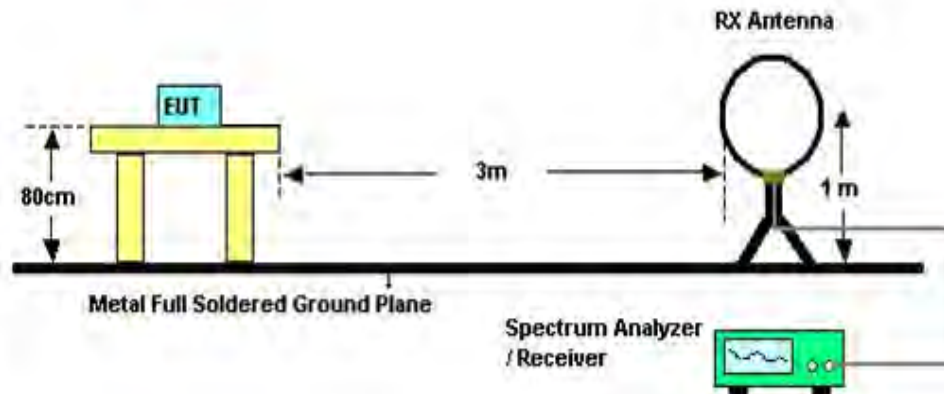

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance and FCC KDB 662911 D01 Multiple Transmitter Output.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

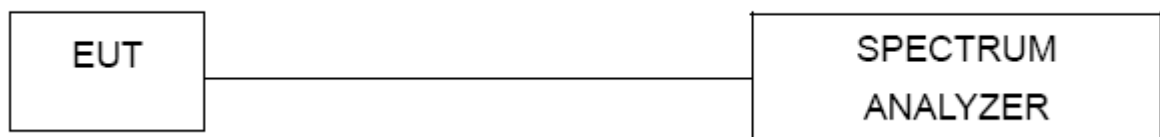

7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

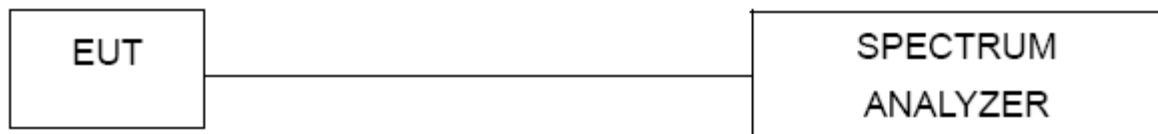

8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Sep. 04, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2017
9	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2017
10	Controller	CT	SC100	N/A	N/A
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Sep. 04, 2017
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Sep. 04, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

9KHz to 30MHz





Radiated Measurement Photos
30MHz to 1000MHz

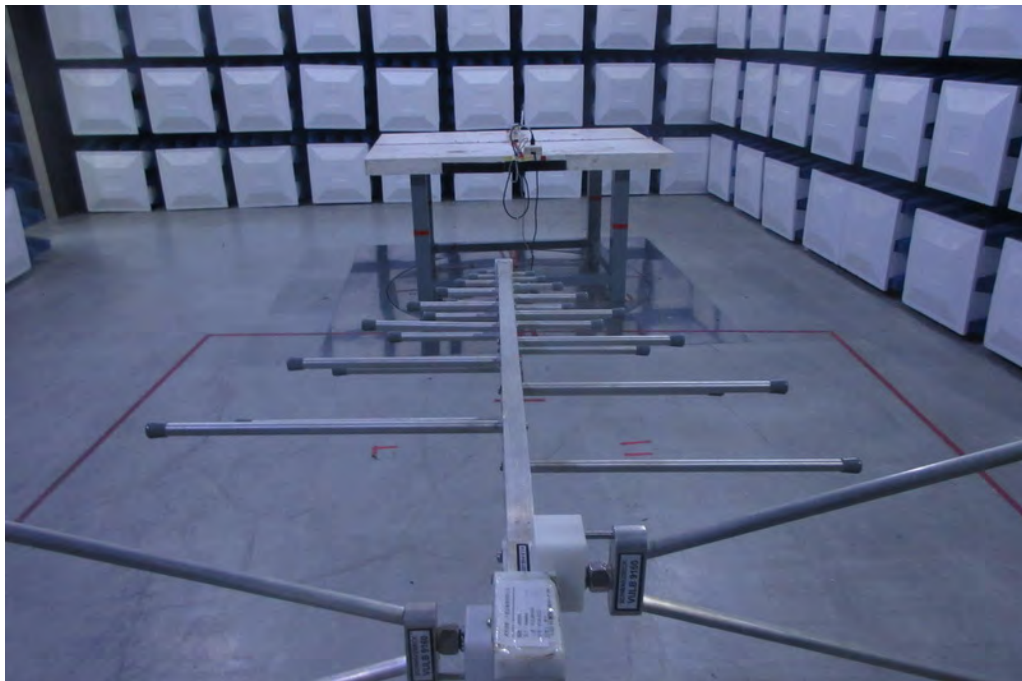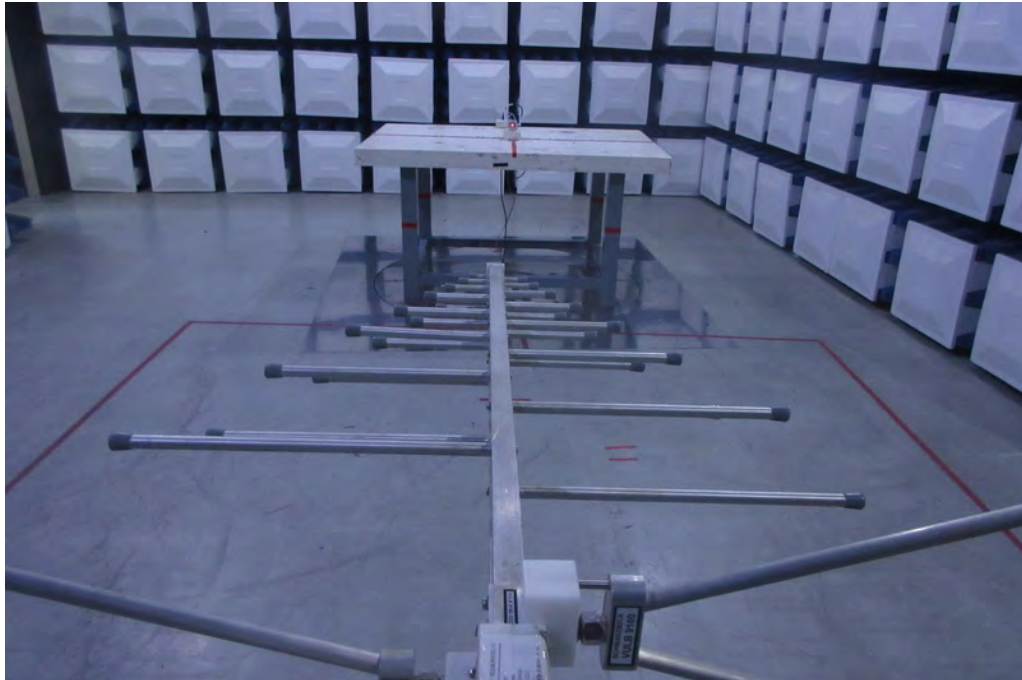

Radiated Measurement Photos


Above 1000MHz

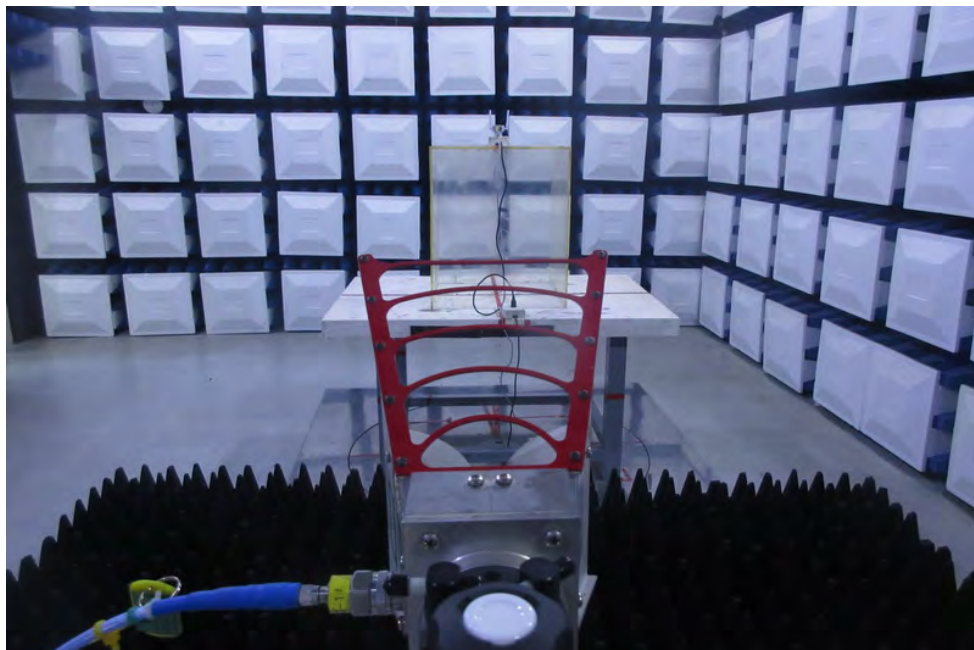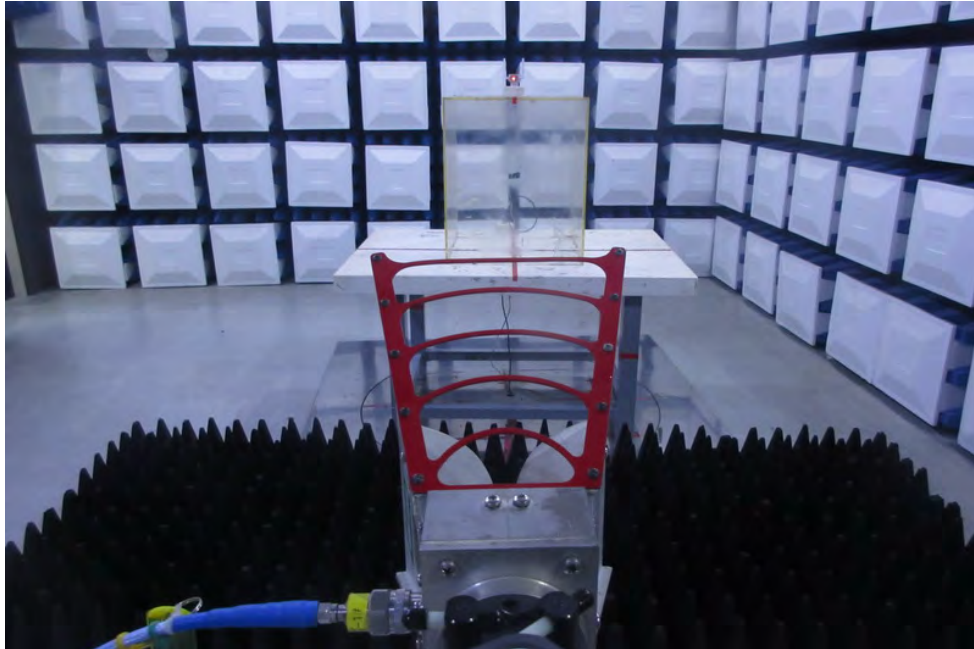

ATTACHMENT A - CONDUCTED EMISSION

Test Mode :	Normal Link
-------------	-------------


Line

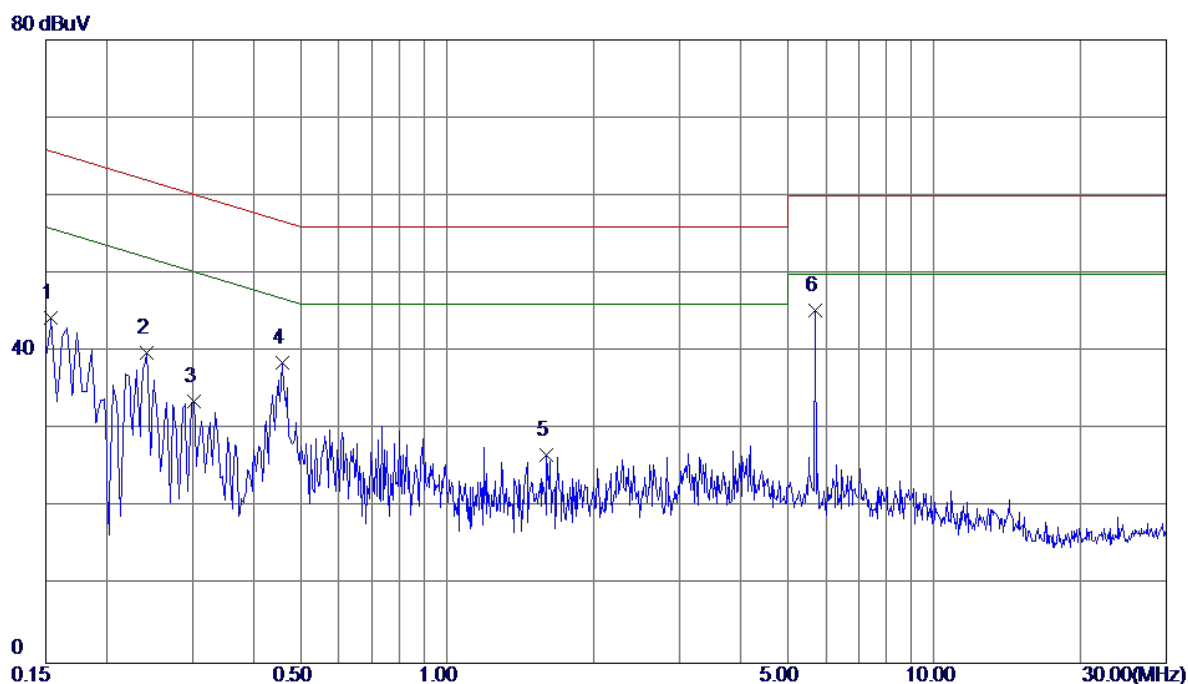

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	34.77	9.57	44.34	65.79	-21.45	Peak	
2	0.2420	30.20	9.57	39.77	62.03	-22.26	Peak	
3	0.3020	23.98	9.58	33.56	60.19	-26.63	Peak	
4	0.4580	28.95	9.65	38.60	56.73	-18.13	Peak	
5	1.6019	16.68	9.98	26.66	56.00	-29.34	Peak	
6 *	5.6940	34.93	10.30	45.23	60.00	-14.77	Peak	

Test Mode :	Normal Link
-------------	-------------

Neutral

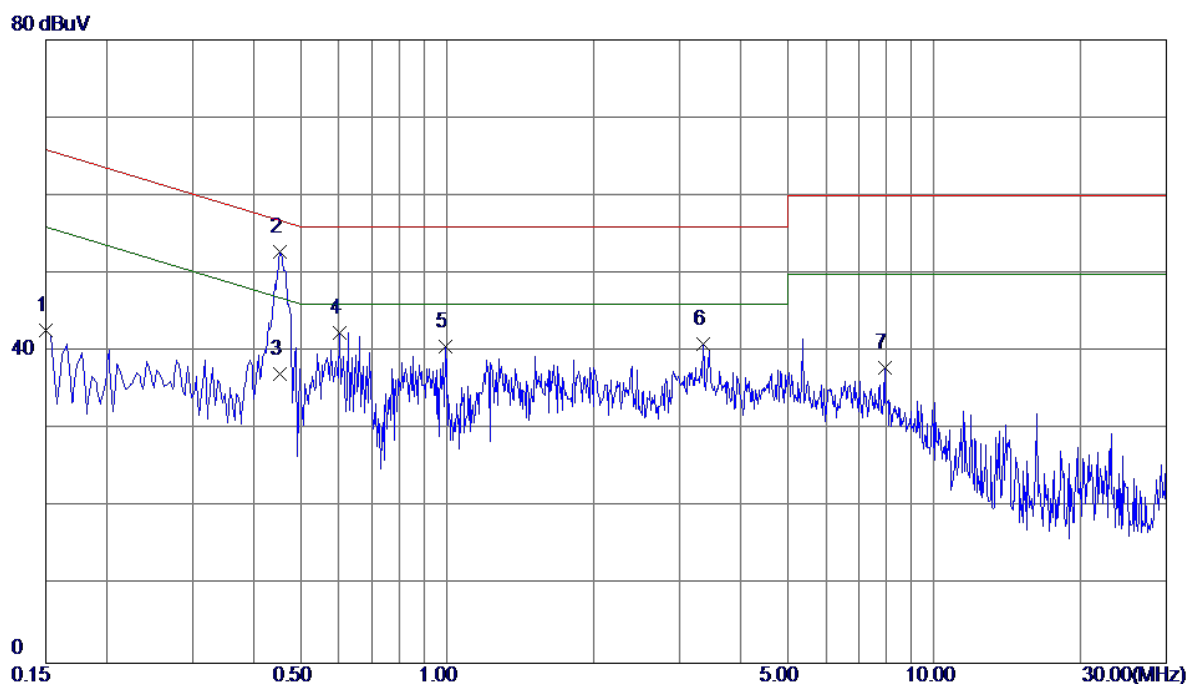


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	33.19	9.57	42.76	66.00	-23.24	Peak	
2 *	0.4540	43.37	9.49	52.86	56.80	-3.94	Peak	
3	0.4540	27.70	9.49	37.19	46.80	-9.61	AVG	
4	0.6020	32.95	9.50	42.45	56.00	-13.55	Peak	
5	0.9940	30.85	9.74	40.59	56.00	-15.41	Peak	
6	3.3580	30.97	10.01	40.98	56.00	-15.02	Peak	
7	7.9300	27.61	10.32	37.93	60.00	-22.07	Peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX B MODE CHANNEL 01
------------	----------------------


Ant 0°

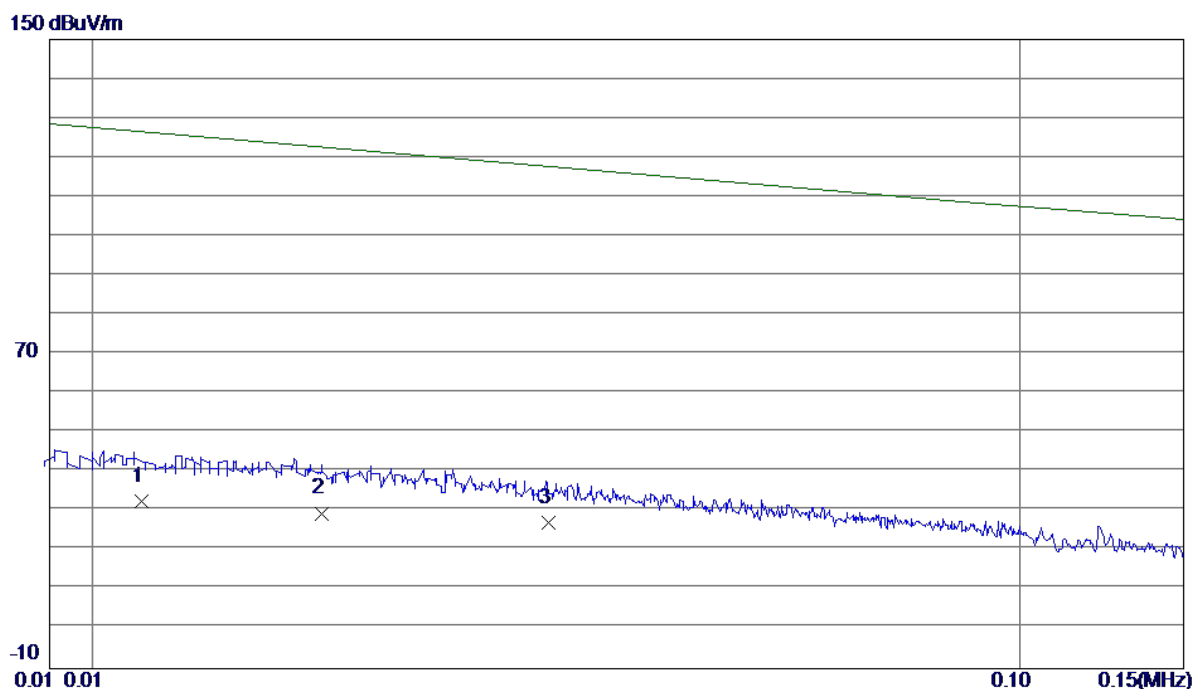

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0113	32.60	0.02	32.62	127.93	-95.31	AVG	
2	0.0177	29.50	0.02	29.52	126.35	-96.83	AVG	
3	0.0310	27.10	0.02	27.12	123.06	-95.94	AVG	

Test Mode:	TX B MODE CHANNEL 01
------------	----------------------


Ant 0°

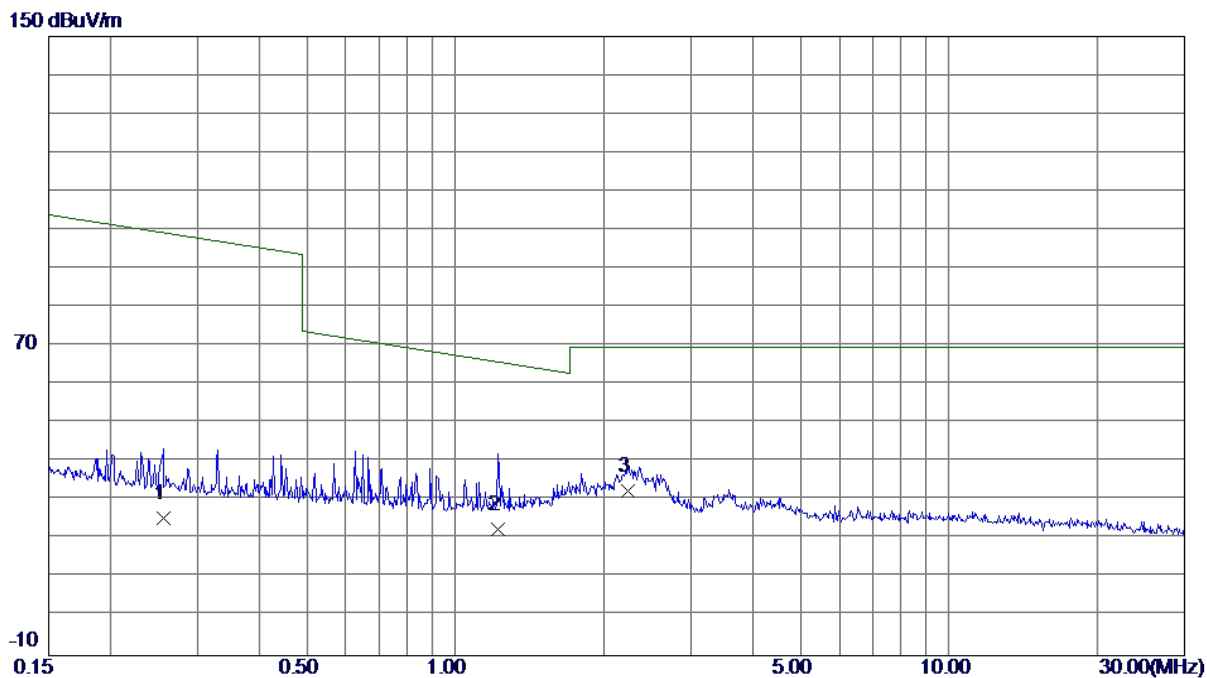

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2562	25.60	0.05	25.65	101.78	-76.13	AVG	
2	1.2226	22.70	0.09	22.79	67.27	-44.48	QP	
3 *	2.2367	32.40	0.11	32.51	69.54	-37.03	QP	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

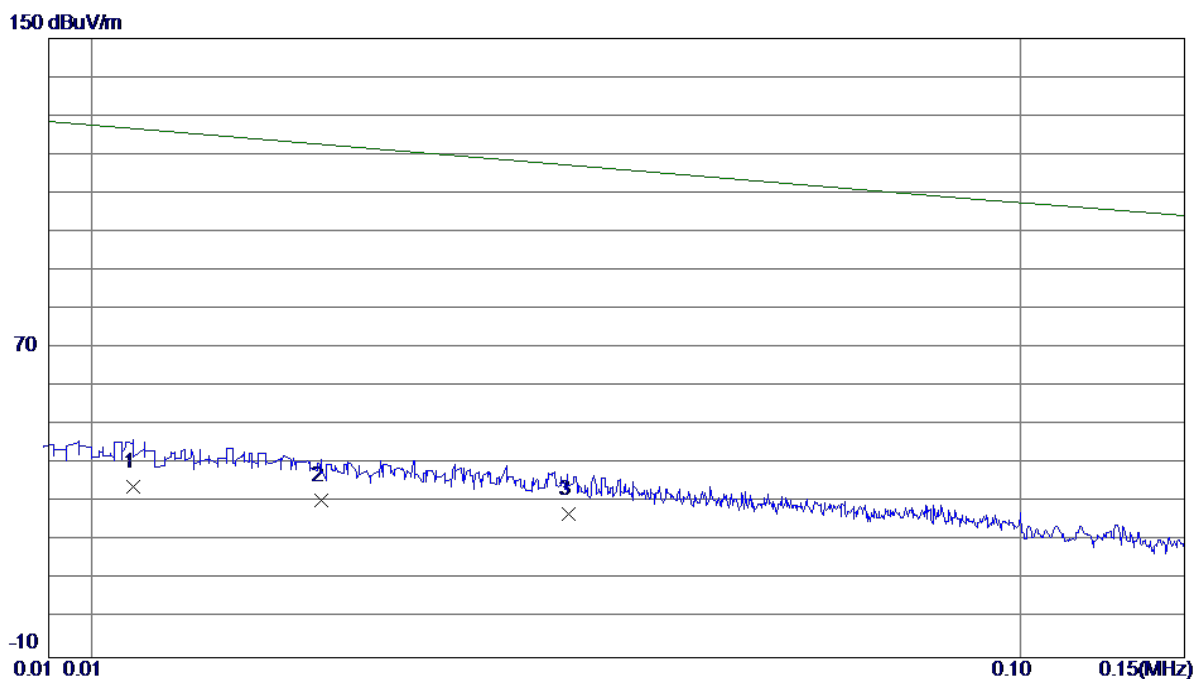

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0111	34.10	0.02	34.12	127.98	-93.86	AVG	
2	0.0177	30.60	0.02	30.62	126.35	-95.73	AVG	
3	0.0326	27.20	0.02	27.22	122.67	-95.45	AVG	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

150 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1685	25.40	0.04	25.44	104.78	-79.34	AVG	
2 *	2.3585	30.20	0.11	30.31	69.54	-39.23	QP	
3	3.5654	26.90	0.14	27.04	69.54	-42.50	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX B MODE CHANNEL 01
------------	----------------------

Vertical

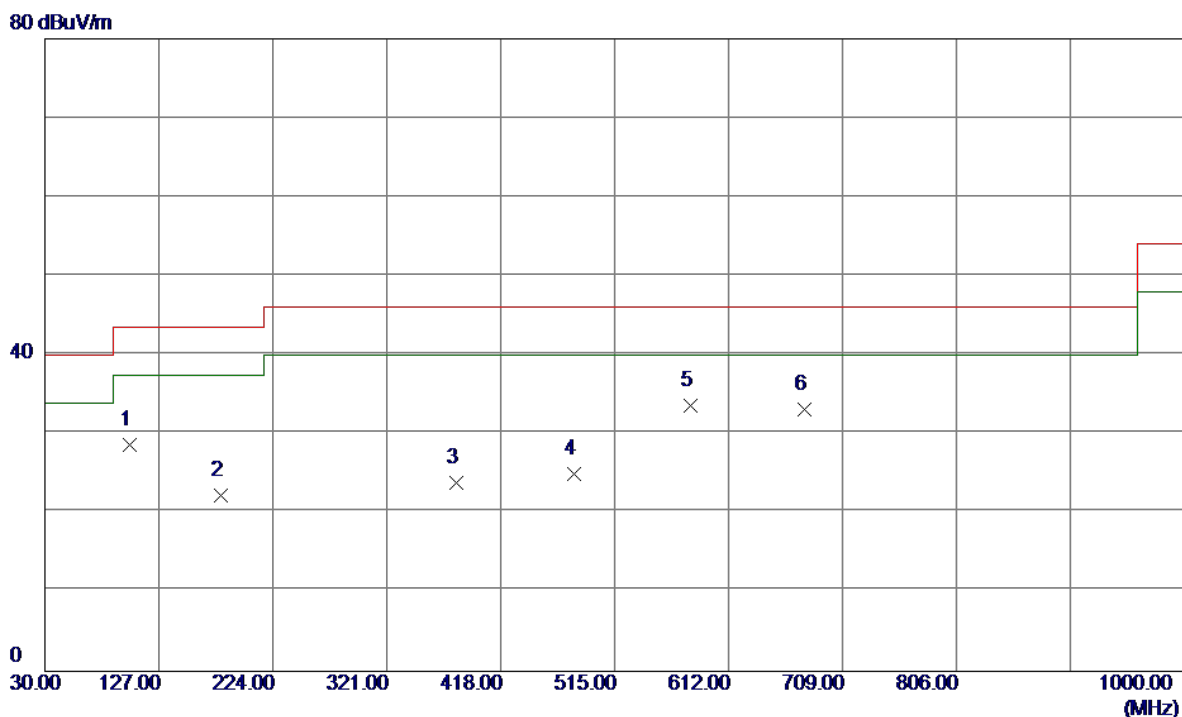


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	101.7800	43.89	-15.32	28.57	43.50	-14.93	Peak	
2	179.3800	35.05	-12.80	22.25	43.50	-21.25	Peak	
3	380.1700	33.02	-9.14	23.88	46.00	-22.12	Peak	
4	480.0800	33.98	-9.03	24.95	46.00	-21.05	Peak	
5 *	579.9900	39.67	-6.05	33.62	46.00	-12.38	Peak	
6	676.9900	36.13	-3.06	33.07	46.00	-12.93	Peak	

Test Mode: TX B MODE CHANNEL 01

Horizontal


80 dBuV/m

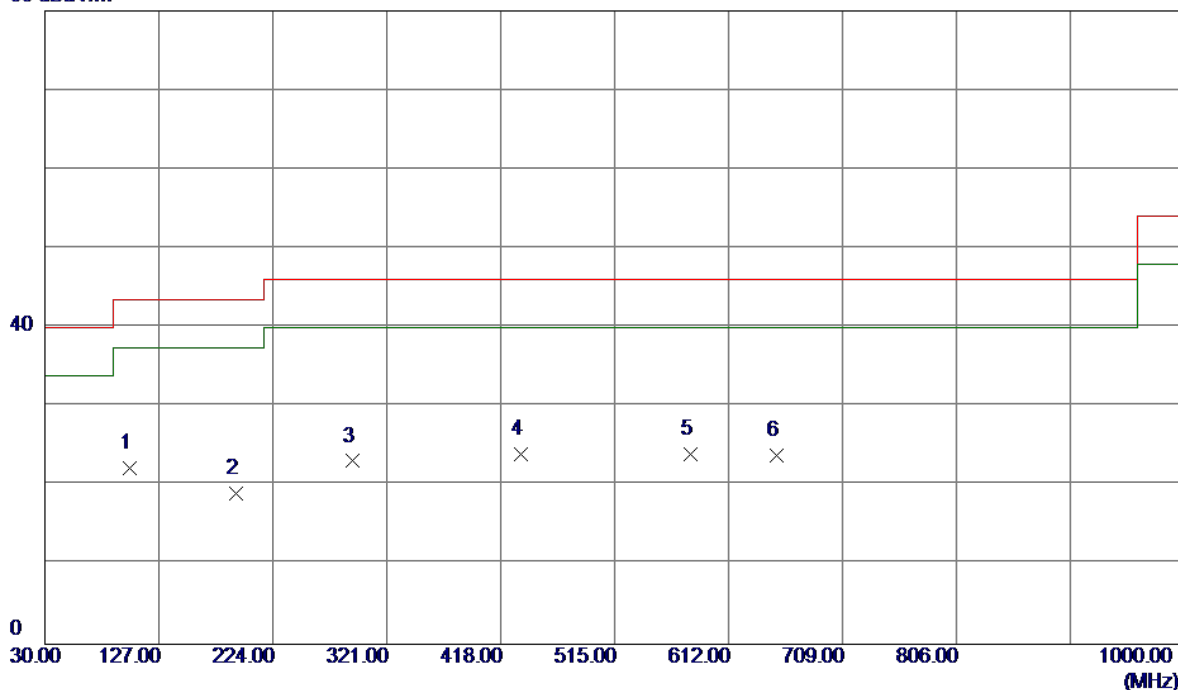

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	101.7800	37.55	-15.32	22.23	43.50	-21.27	Peak	
2	192.9600	33.10	-14.08	19.02	43.50	-24.48	Peak	
3	291.9000	34.16	-11.04	23.12	46.00	-22.88	Peak	
4	435.4600	31.92	-7.94	23.98	46.00	-22.02	Peak	
5	579.9900	30.00	-6.05	23.95	46.00	-22.05	Peak	
6	652.7400	27.95	-4.07	23.88	46.00	-22.12	Peak	

Test Mode: TX B MODE CHANNEL 06


Vertical

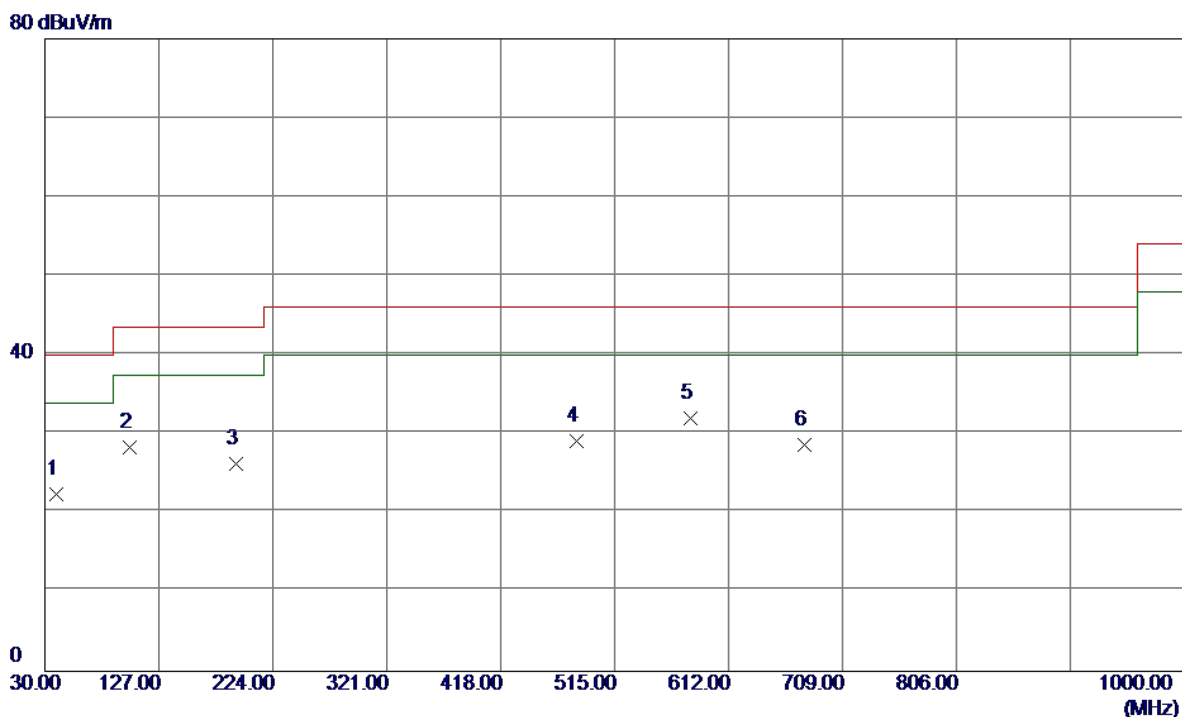

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	36.38	-13.95	22.43	40.00	-17.57	Peak	
2	101.7800	43.58	-15.32	28.26	43.50	-15.24	Peak	
3	192.9600	40.36	-14.08	26.28	43.50	-17.22	Peak	
4	482.9900	38.26	-9.13	29.13	46.00	-16.87	Peak	
5 *	579.9900	38.12	-6.05	32.07	46.00	-13.93	Peak	
6	676.9900	31.66	-3.06	28.60	46.00	-17.40	Peak	

Test Mode: TX B MODE CHANNEL 06


Horizontal

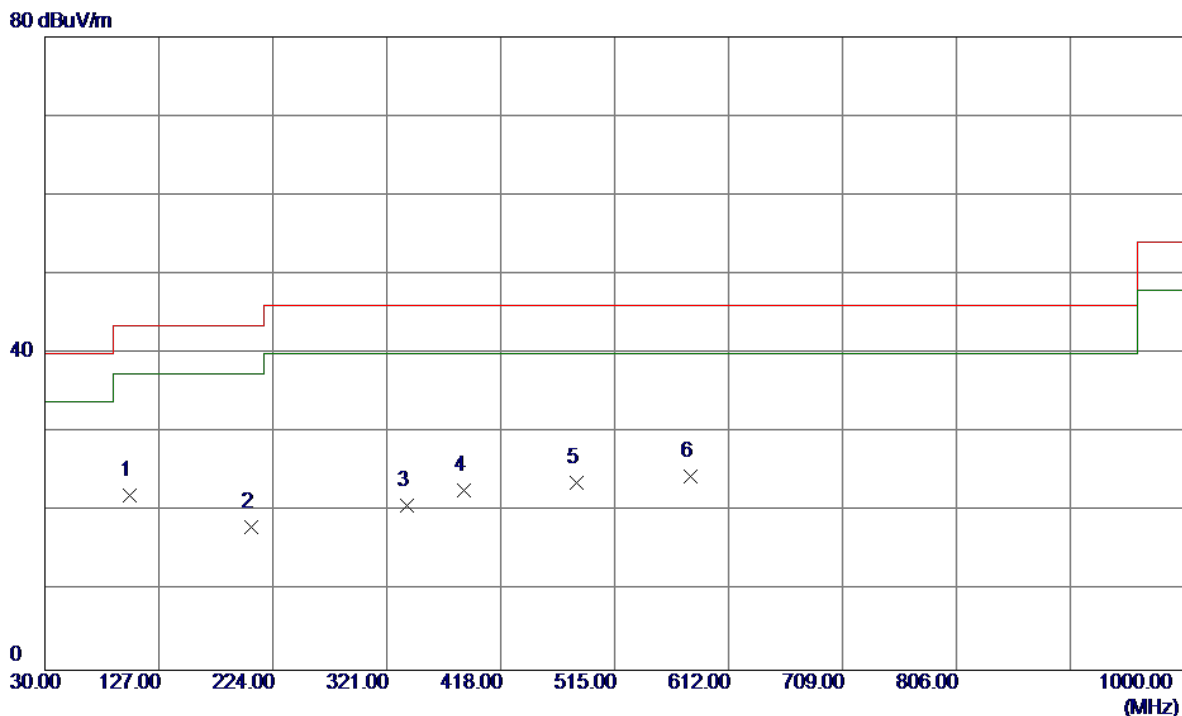

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	101.7800	37.33	-15.32	22.01	43.50	-21.49	Peak	
2	205.5700	32.56	-14.55	18.01	43.50	-25.49	Peak	
3	338.4600	31.77	-10.98	20.79	46.00	-25.21	Peak	
4	386.9600	31.43	-8.68	22.75	46.00	-23.25	Peak	
5	482.9900	32.77	-9.13	23.64	46.00	-22.36	Peak	
6 *	579.9900	30.57	-6.05	24.52	46.00	-21.48	Peak	

Test Mode: TX B MODE CHANNEL 11

Vertical

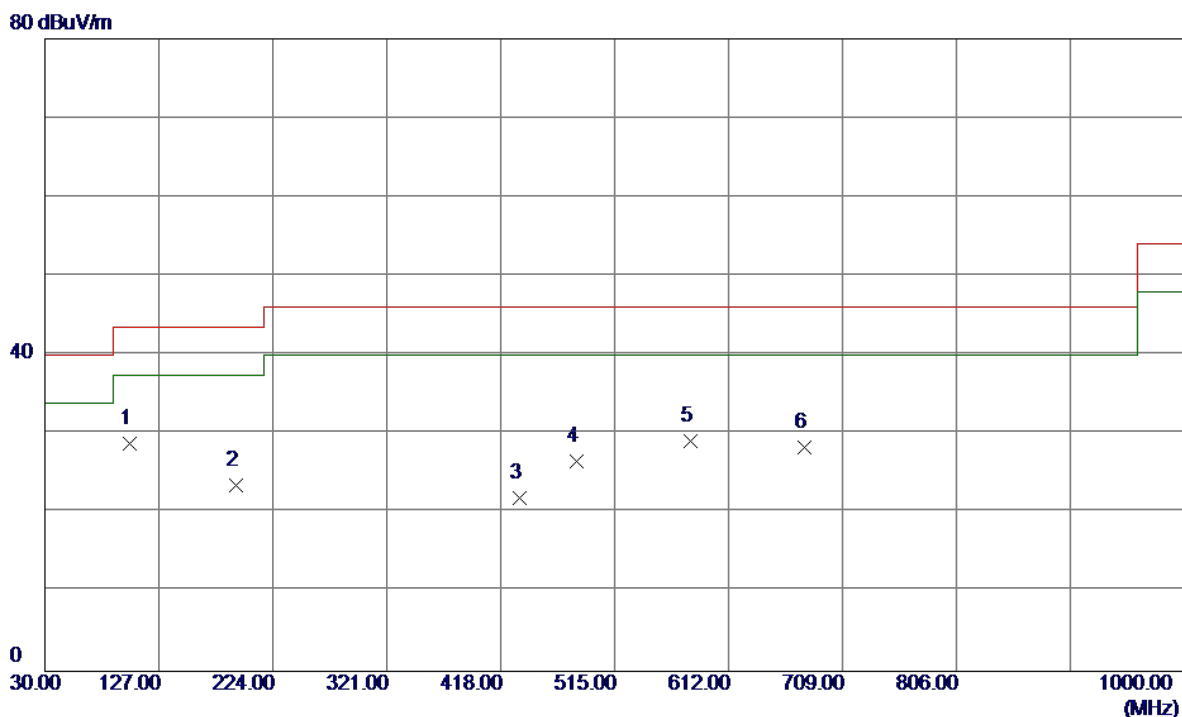


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	101.7800	44.14	-15.32	28.82	43.50	-14.68	Peak	
2	192.9600	37.58	-14.08	23.50	43.50	-20.00	Peak	
3	434.4900	29.90	-7.93	21.97	46.00	-24.03	Peak	
4	482.9900	35.67	-9.13	26.54	46.00	-19.46	Peak	
5	579.9900	35.10	-6.05	29.05	46.00	-16.95	Peak	
6	676.9900	31.41	-3.06	28.35	46.00	-17.65	Peak	

Test Mode: TX B MODE CHANNEL 11

Horizontal

80 dBuV/m

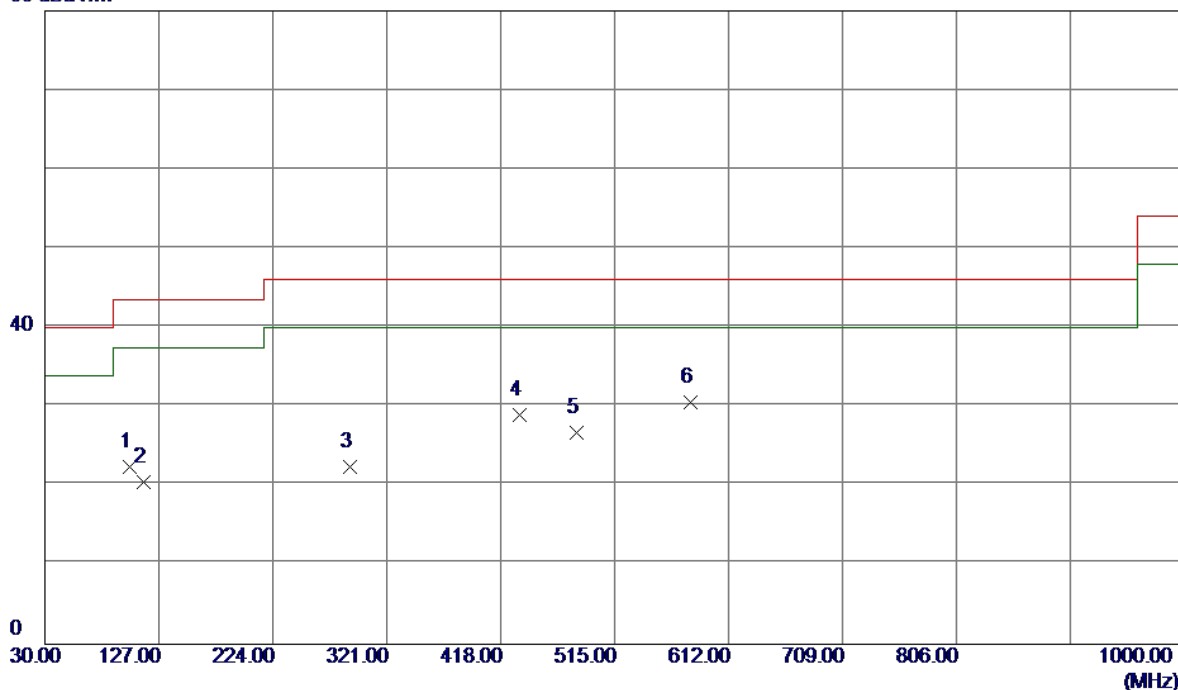


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	101.7800	37.69	-15.32	22.37	43.50	-21.13	Peak	
2	114.3900	34.66	-14.13	20.53	43.50	-22.97	Peak	
3	289.9600	33.63	-11.25	22.38	46.00	-23.62	Peak	
4	434.4900	36.96	-7.93	29.03	46.00	-16.97	Peak	
5	482.9900	35.85	-9.13	26.72	46.00	-19.28	Peak	
6 *	579.9900	36.56	-6.05	30.51	46.00	-15.49	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

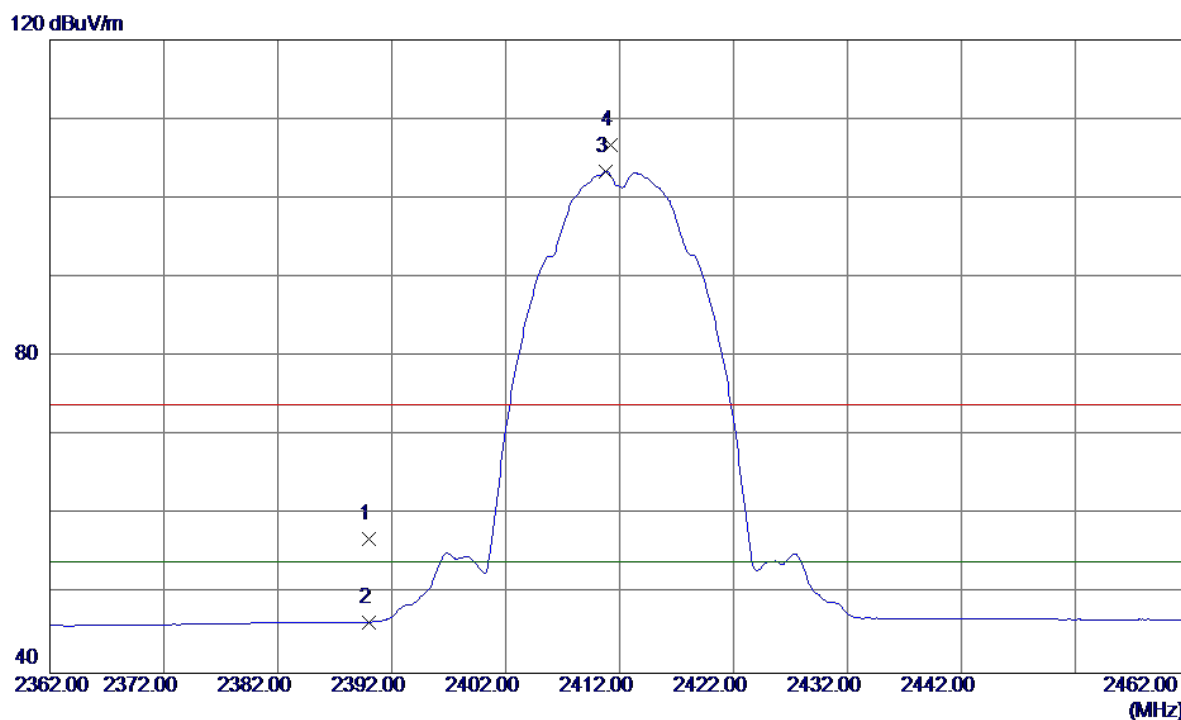

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.98	33.01	56.99	74.00	-17.01	Peak	
2	2390.0000	13.45	33.01	46.46	54.00	-7.54	AVG	
3 *	2410.8000	70.33	33.10	103.43	54.00	49.43	AVG	No Limit
4	2411.2000	73.65	33.10	106.75	74.00	32.75	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

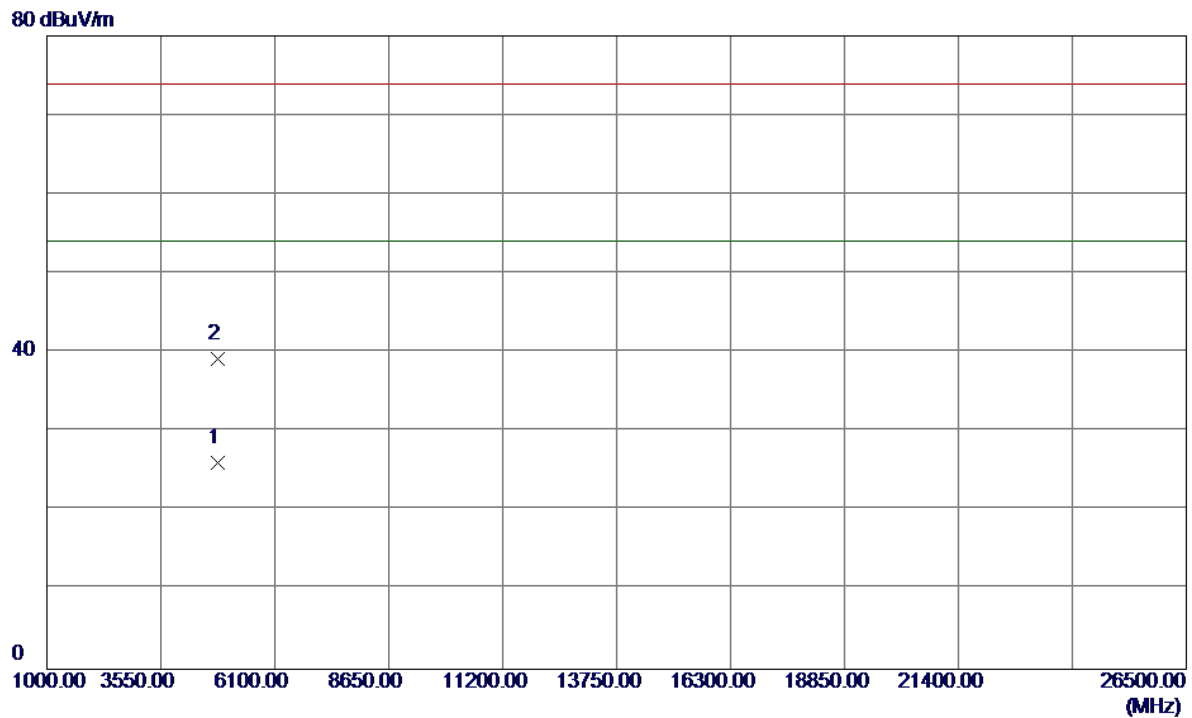

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0150	21.29	4.85	26.14	54.00	-27.86	AVG	
2	4826.1850	34.34	4.86	39.20	74.00	-34.80	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

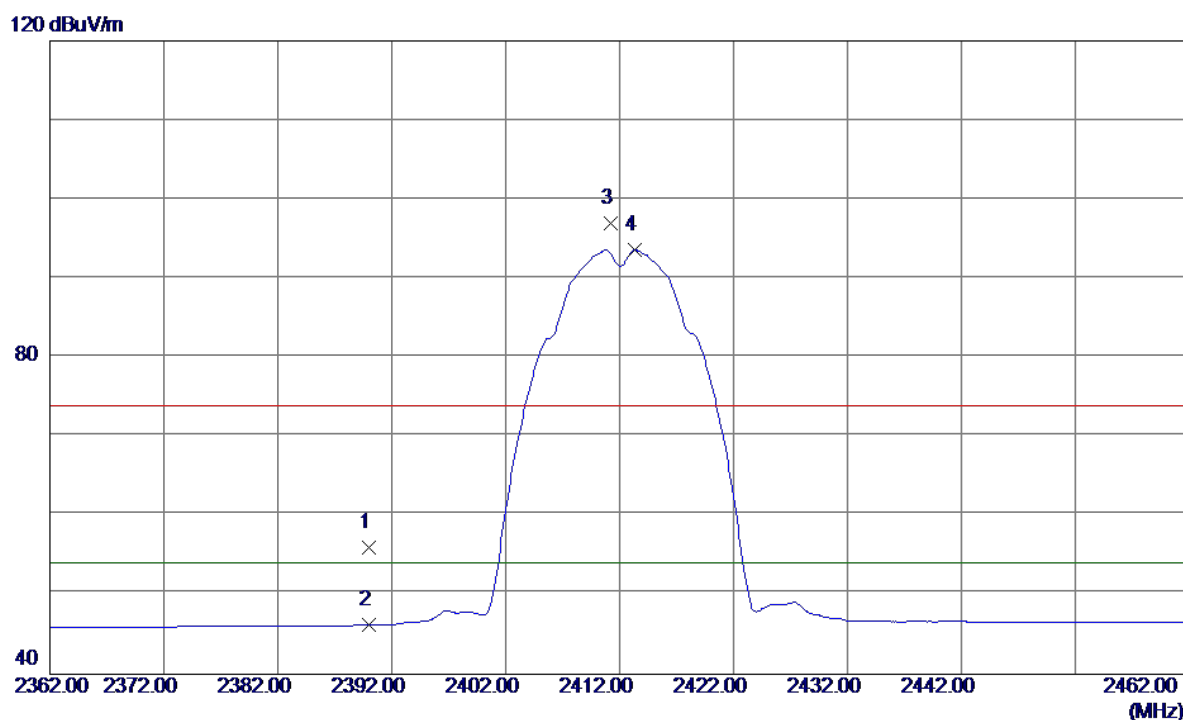


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.03	33.01	56.04	74.00	-17.96	Peak	
2	2390.0000	13.18	33.01	46.19	54.00	-7.81	AVG	
3	2411.2000	63.87	33.10	96.97	74.00	22.97	Peak	No Limit
4 *	2413.3000	60.52	33.11	93.63	54.00	39.63	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

80 dBuV/m

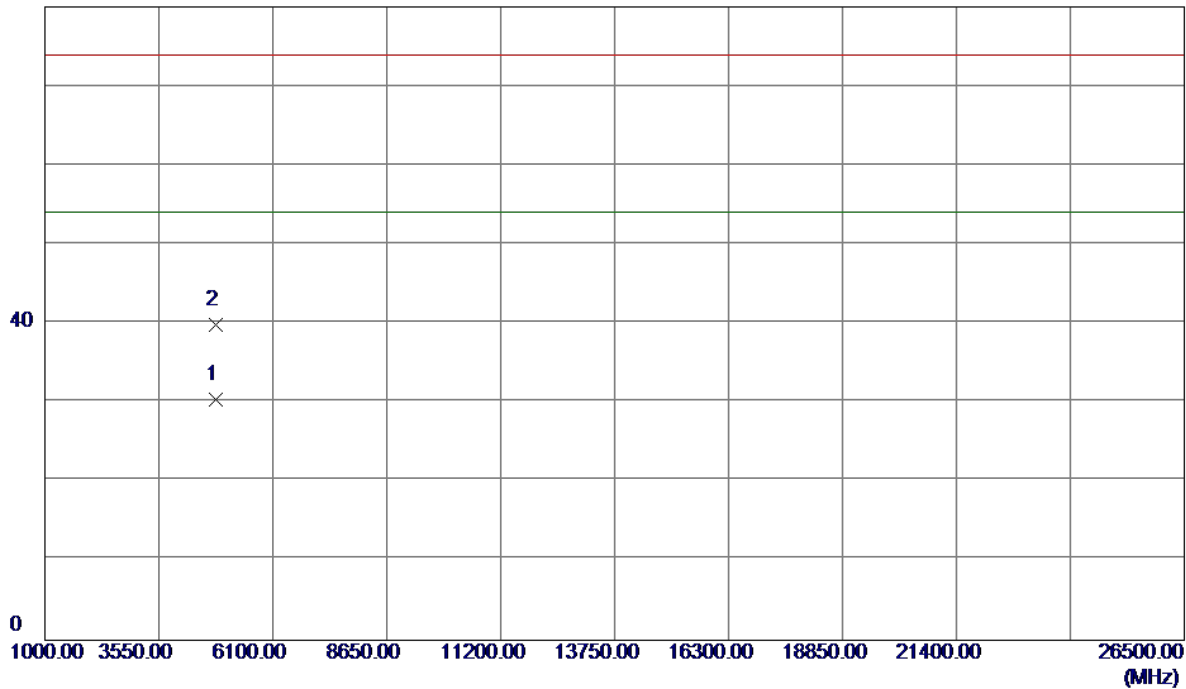


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0250	25.53	4.85	30.38	54.00	-23.62	AVG	
2	4824.1800	35.00	4.85	39.85	74.00	-34.15	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical

120 dBuV/m

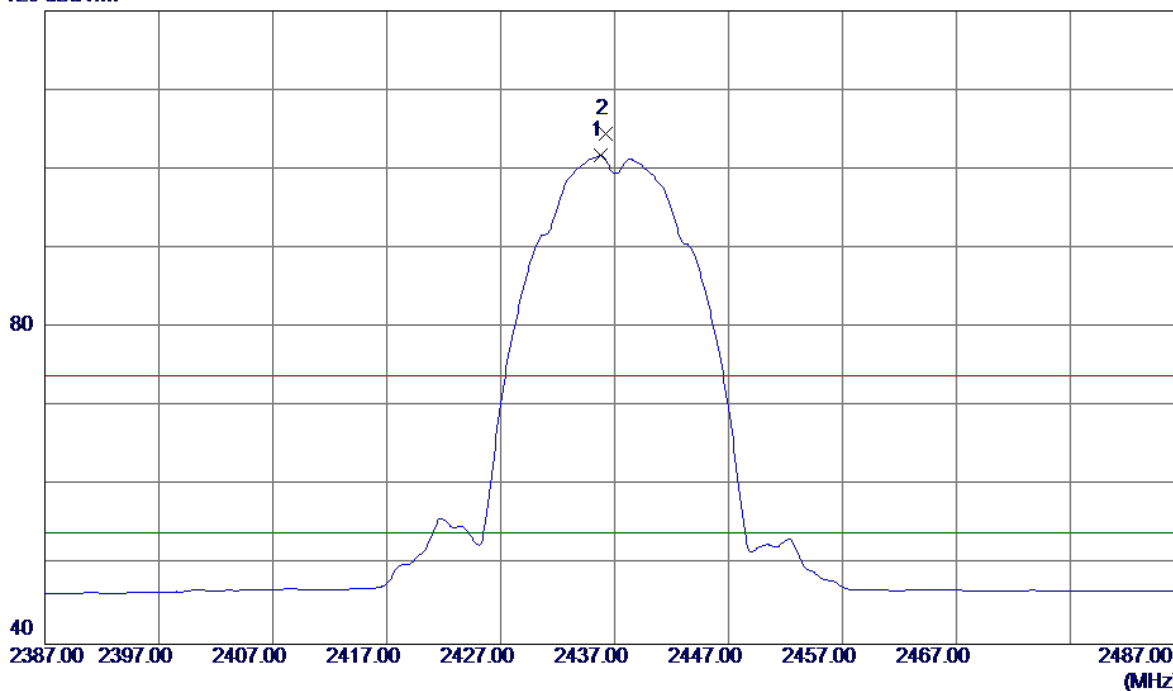


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.8000	68.51	33.20	101.71	54.00	47.71	AVG	No Limit
2	2436.2000	71.34	33.20	104.54	74.00	30.54	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical


80 dBuV/m

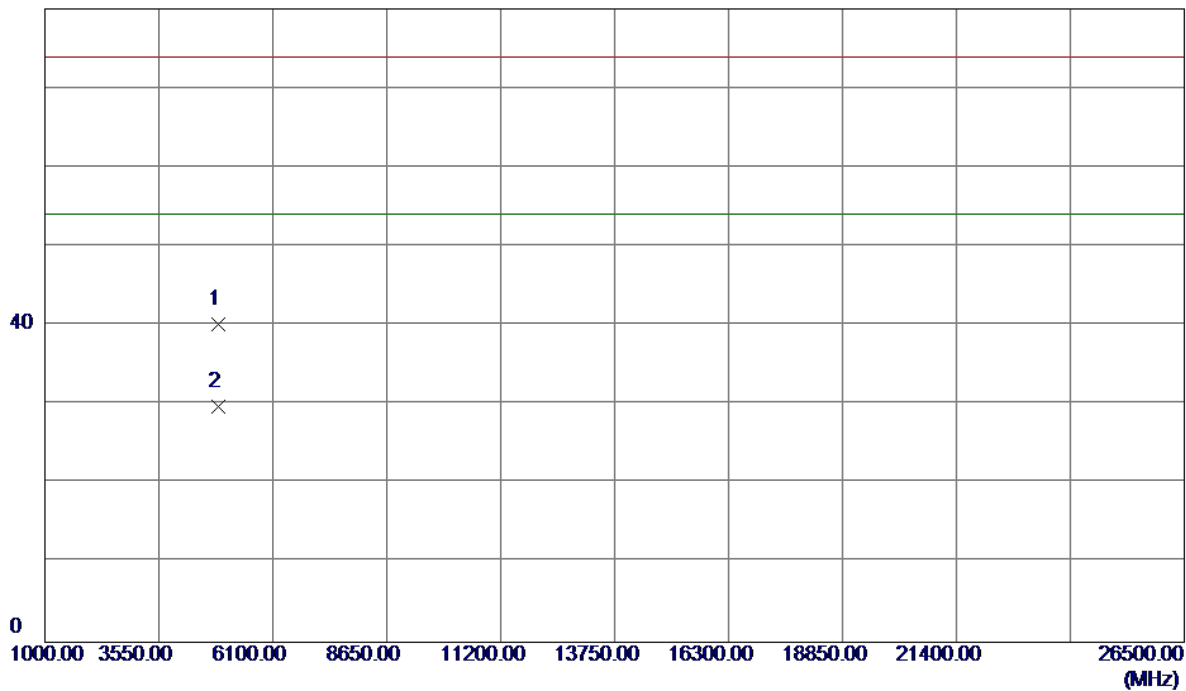

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.5200	35.09	5.06	40.15	74.00	-33.85	Peak	
2 *	4874.0299	24.72	5.07	29.79	54.00	-24.21	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

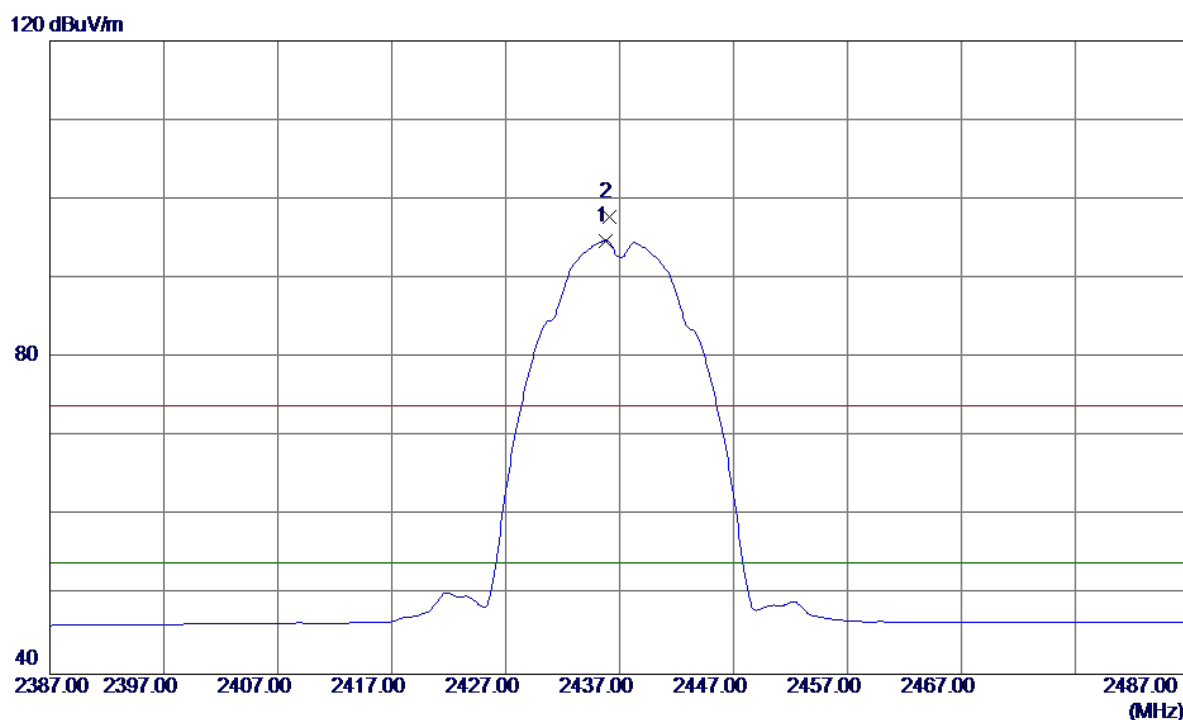


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.8000	61.60	33.20	94.80	54.00	40.80	AVG	No Limit
2	2436.1000	64.57	33.20	97.77	74.00	23.77	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal


80 dBuV/m

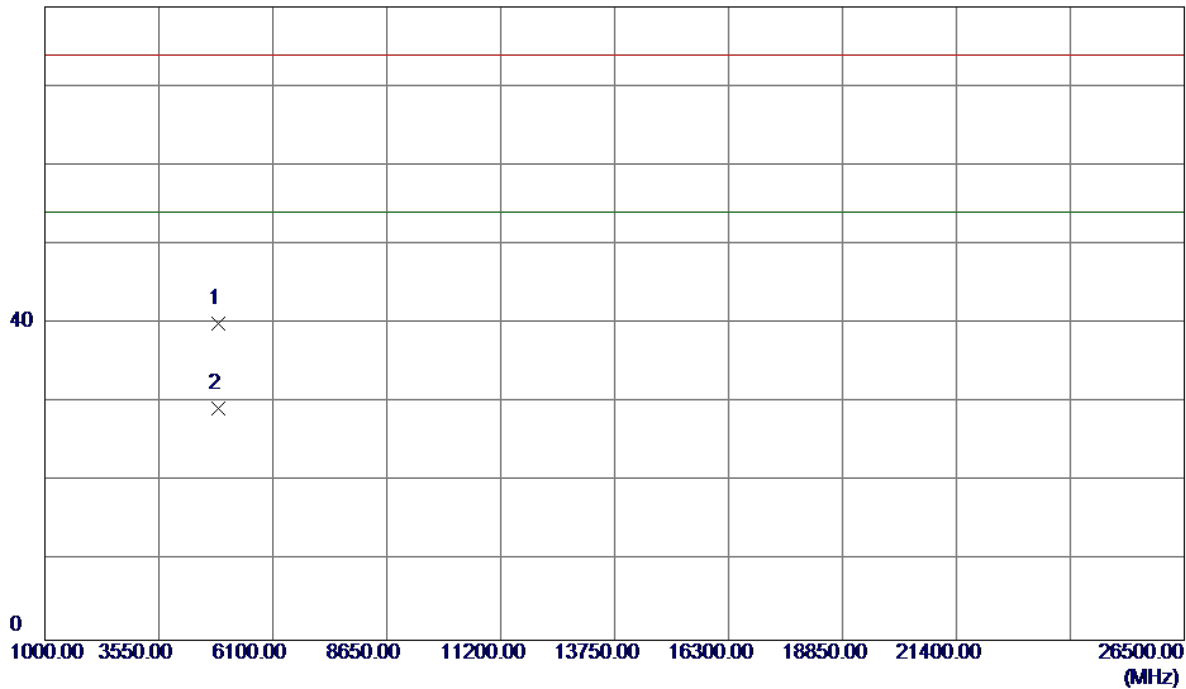

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0000	34.93	5.07	40.00	74.00	-34.00	Peak	
2 *	4874.0450	24.14	5.07	29.21	54.00	-24.79	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical

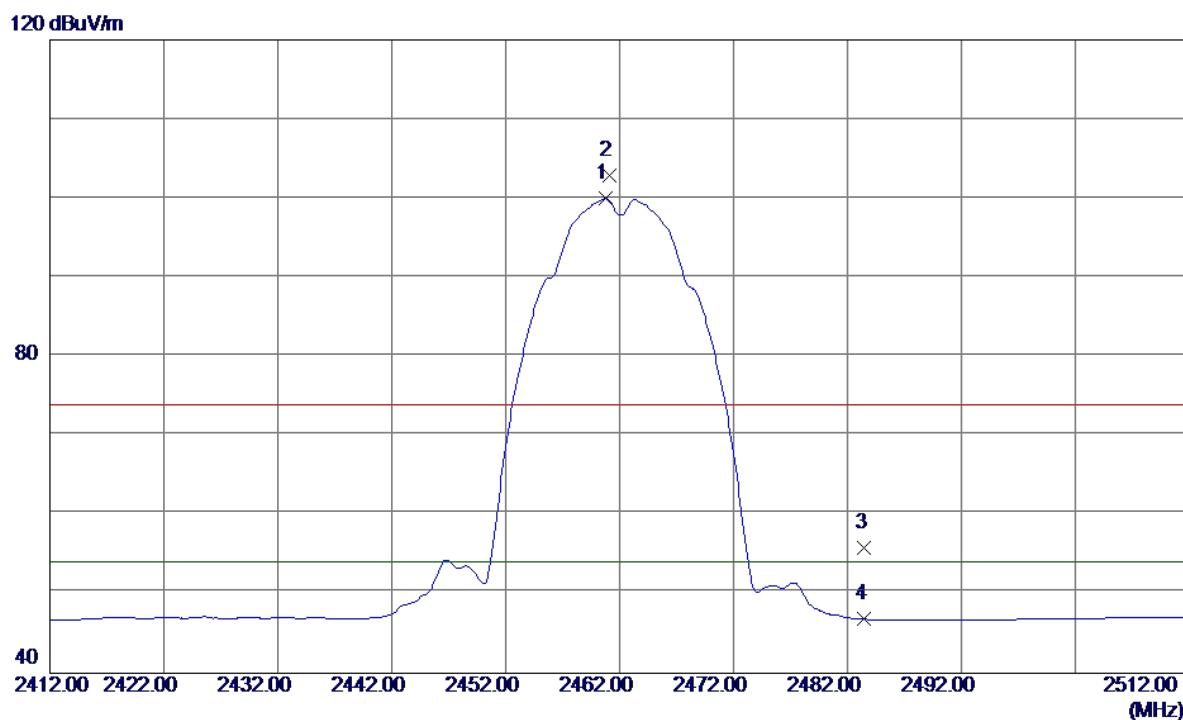


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.8000	66.67	33.31	99.98	54.00	45.98	AVG	No Limit
2	2461.1000	69.62	33.31	102.93	74.00	28.93	Peak	No Limit
3	2483.5000	22.49	33.40	55.89	74.00	-18.11	Peak	
4	2483.5000	13.42	33.40	46.82	54.00	-7.18	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical


80 dBuV/m

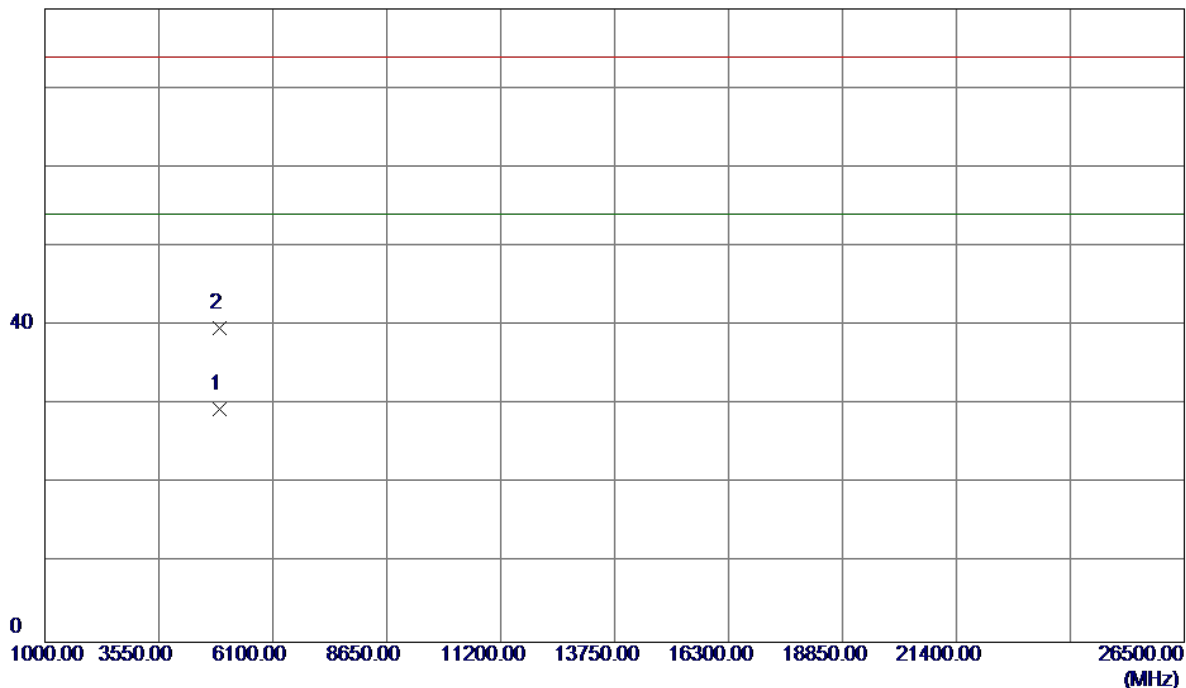

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0200	24.13	5.28	29.41	54.00	-24.59	AVG	
2	4924.0600	34.44	5.28	39.72	74.00	-34.28	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

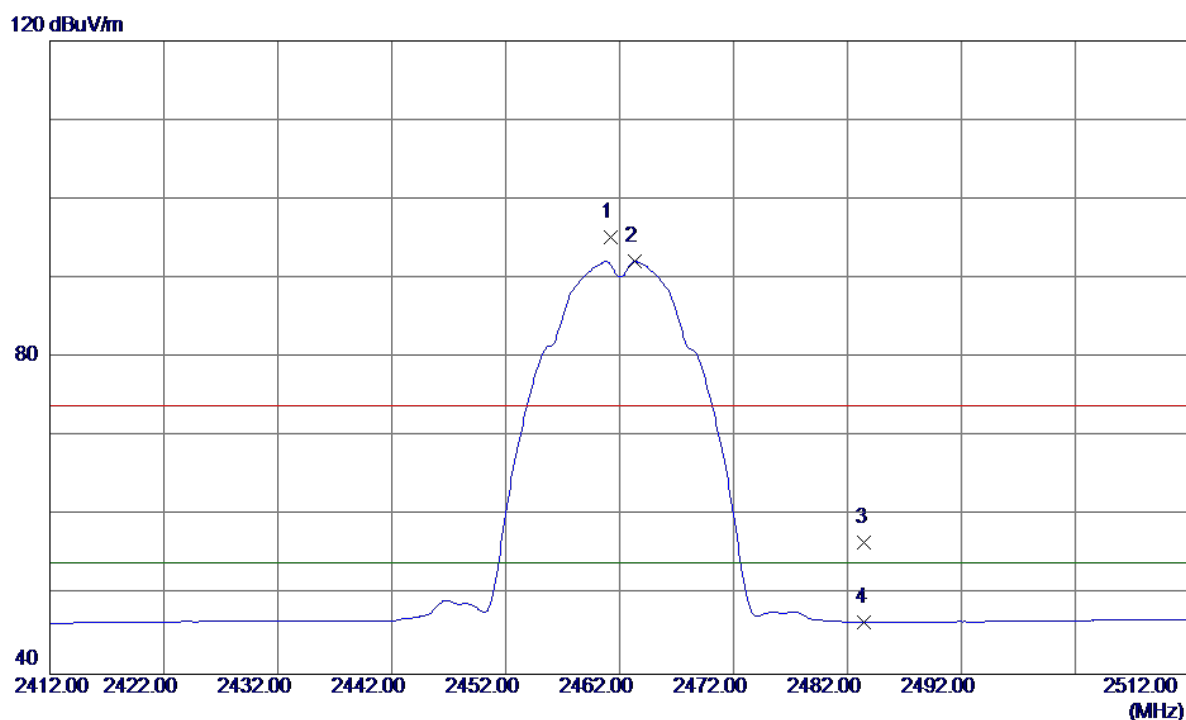


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.2000	61.84	33.31	95.15	74.00	21.15	Peak	No Limit
2 *	2463.3000	58.89	33.32	92.21	54.00	38.21	AVG	No Limit
3	2483.5000	23.21	33.40	56.61	74.00	-17.39	Peak	
4	2483.5000	13.19	33.40	46.59	54.00	-7.41	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal


80 dBuV/m

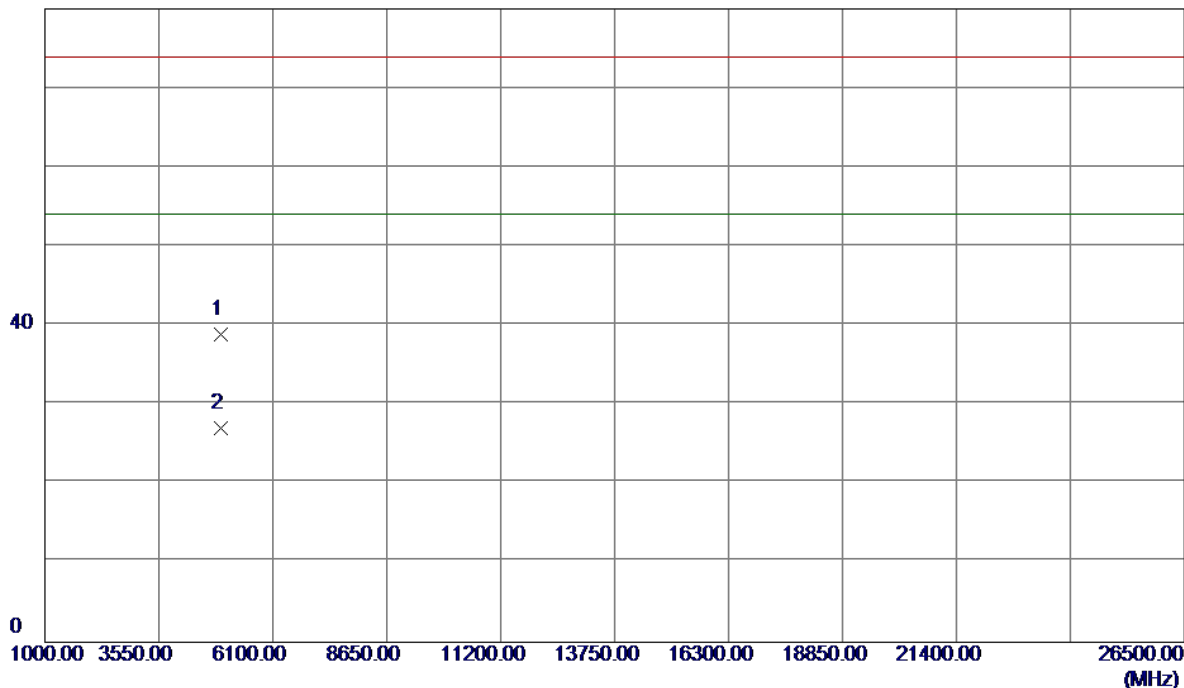

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.8650	33.58	5.28	38.86	74.00	-35.14	Peak	
2 *	4925.8300	21.78	5.29	27.07	54.00	-26.93	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

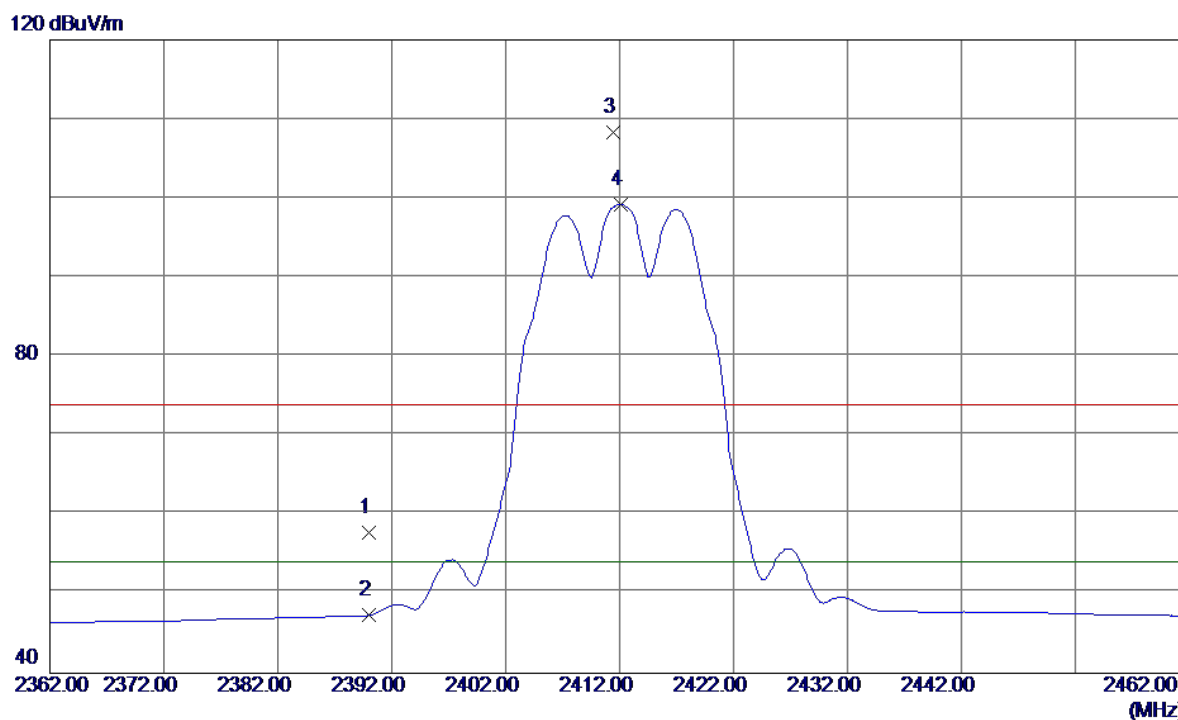


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.75	33.01	57.76	74.00	-16.24	Peak	
2	2390.0000	14.31	33.01	47.32	54.00	-6.68	AVG	
3	2411.4000	75.27	33.10	108.37	74.00	34.37	Peak	No Limit
4 *	2412.1000	66.08	33.10	99.18	54.00	45.18	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical


80 dBuV/m

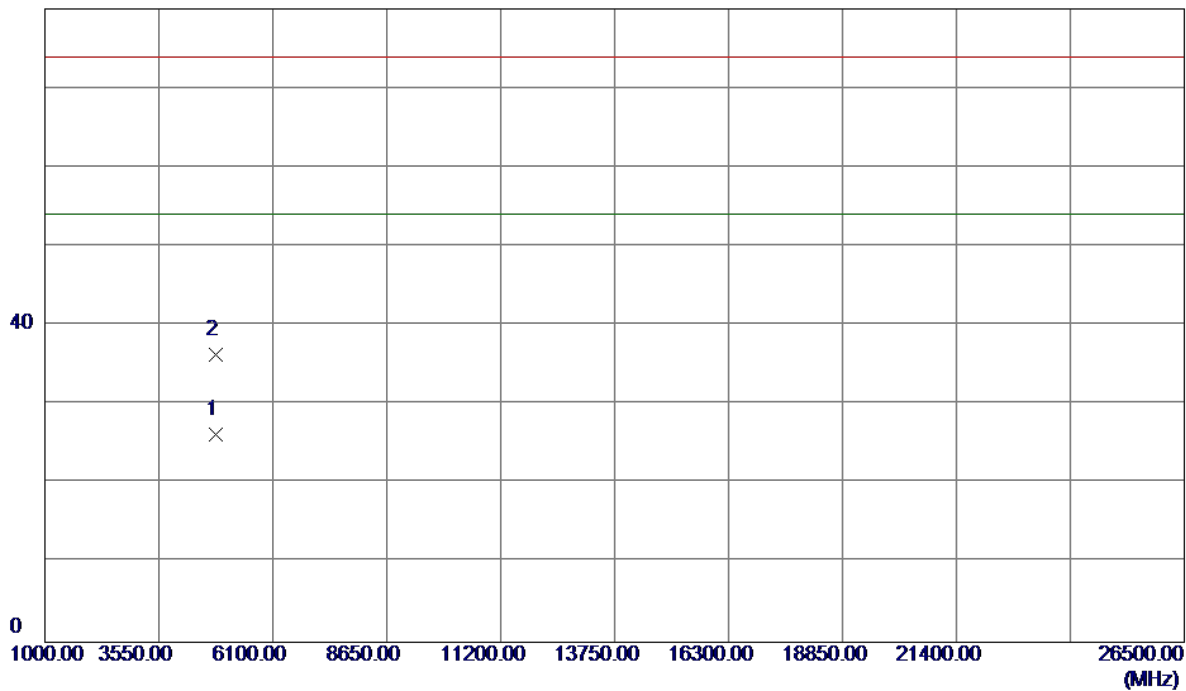

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4825.8950	21.31	4.86	26.17	54.00	-27.83	AVG	
2	4826.6200	31.47	4.86	36.33	74.00	-37.67	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

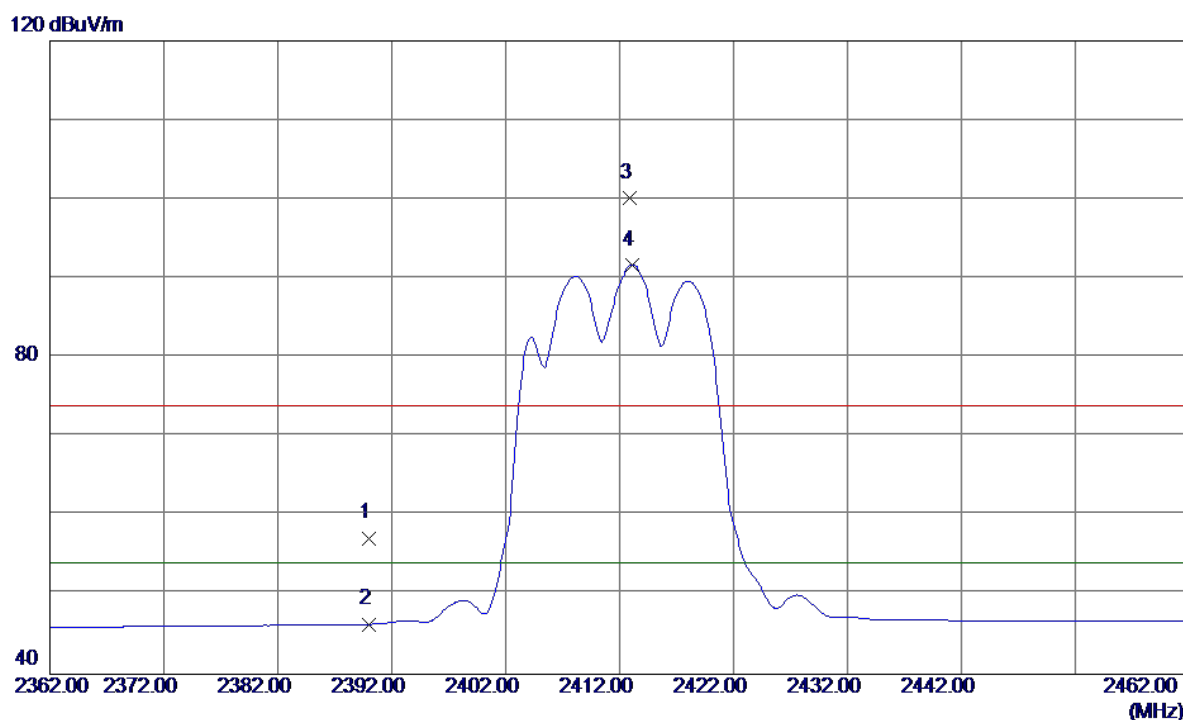


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.19	33.01	57.20	74.00	-16.80	Peak	
2	2390.0000	13.31	33.01	46.32	54.00	-7.68	AVG	
3	2412.9000	67.06	33.11	100.17	74.00	26.17	Peak	No Limit
4 *	2413.1000	58.64	33.11	91.75	54.00	37.75	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal


80 dBuV/m

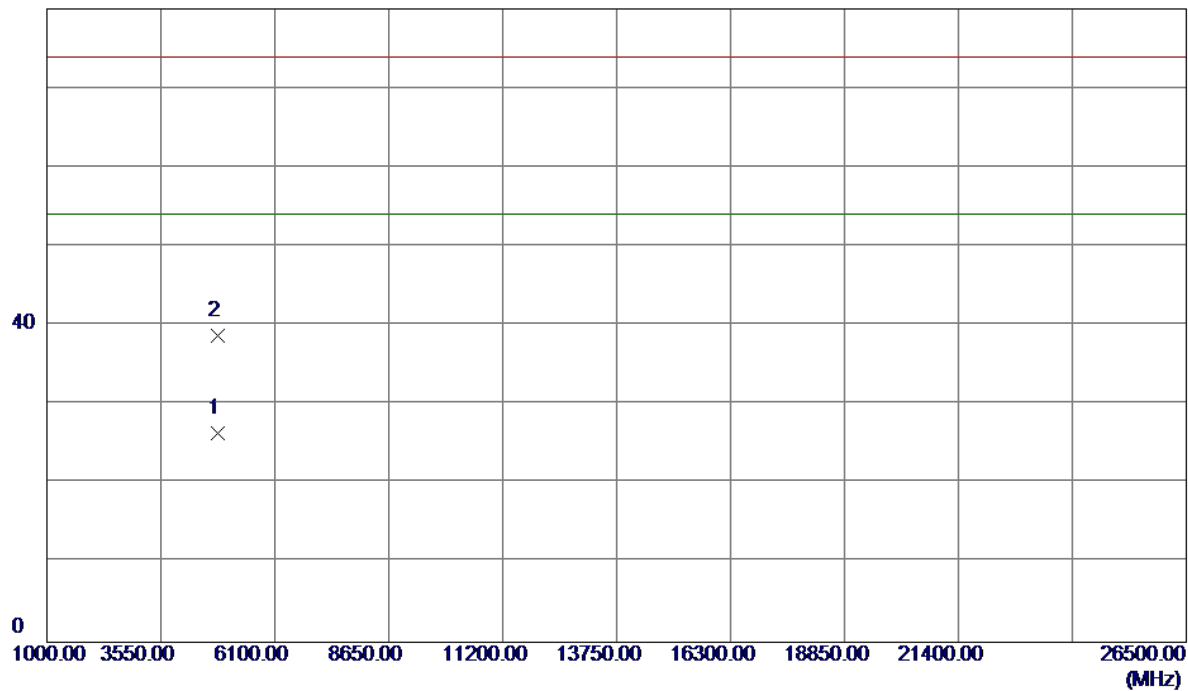

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0850	21.54	4.85	26.39	54.00	-27.61	AVG	
2	4824.7050	33.84	4.86	38.70	74.00	-35.30	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical

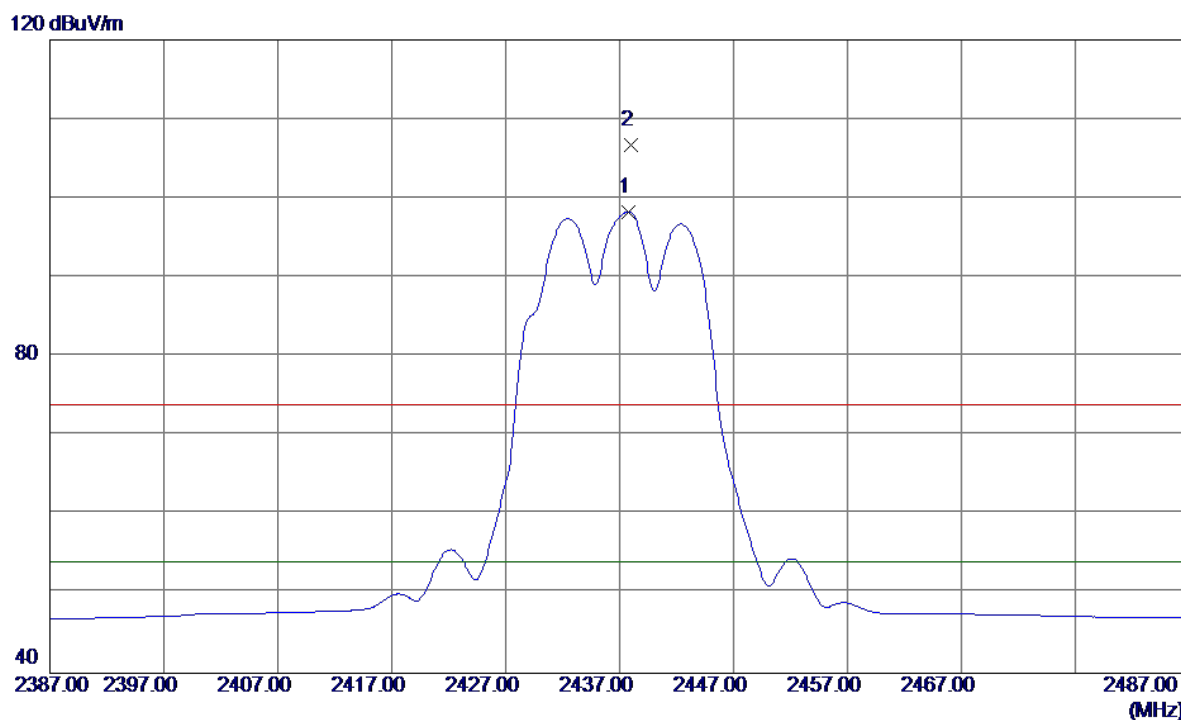


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2437.8000	65.10	33.21	98.31	54.00	44.31	AVG	No Limit
2	2438.0000	73.49	33.21	106.70	74.00	32.70	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical


80 dBuV/m

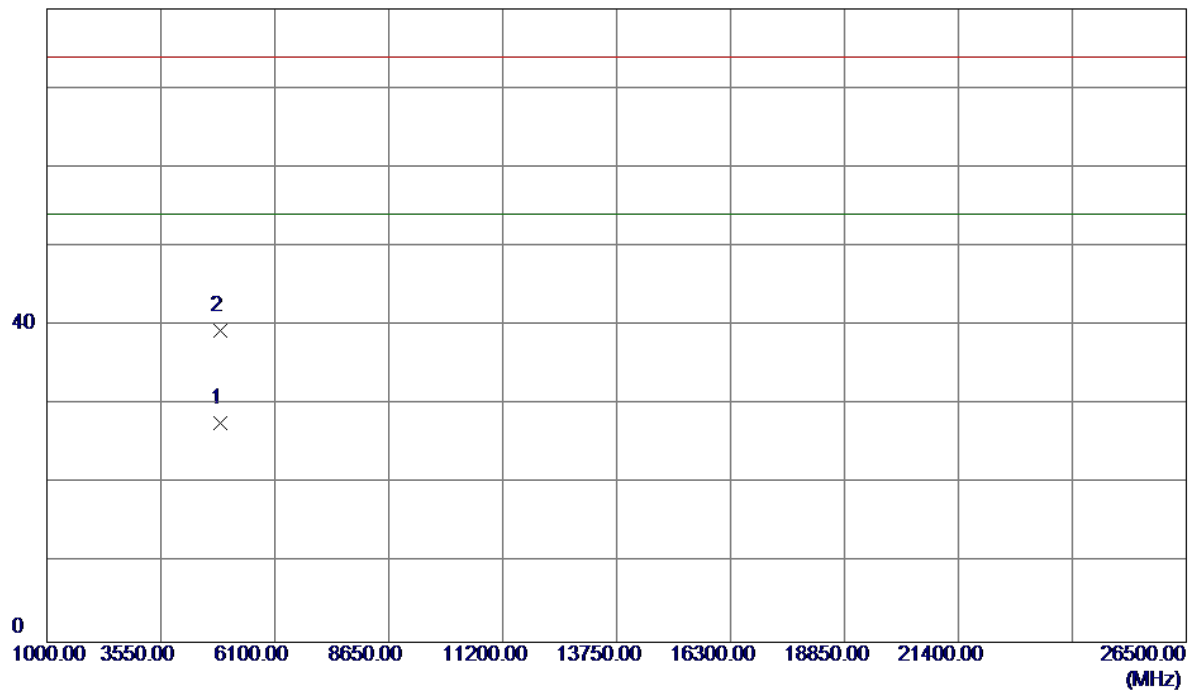

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4875. 3750	22. 59	5. 07	27. 66	54. 00	-26. 34	AVG	
2	4875. 4650	34. 23	5. 07	39. 30	74. 00	-34. 70	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

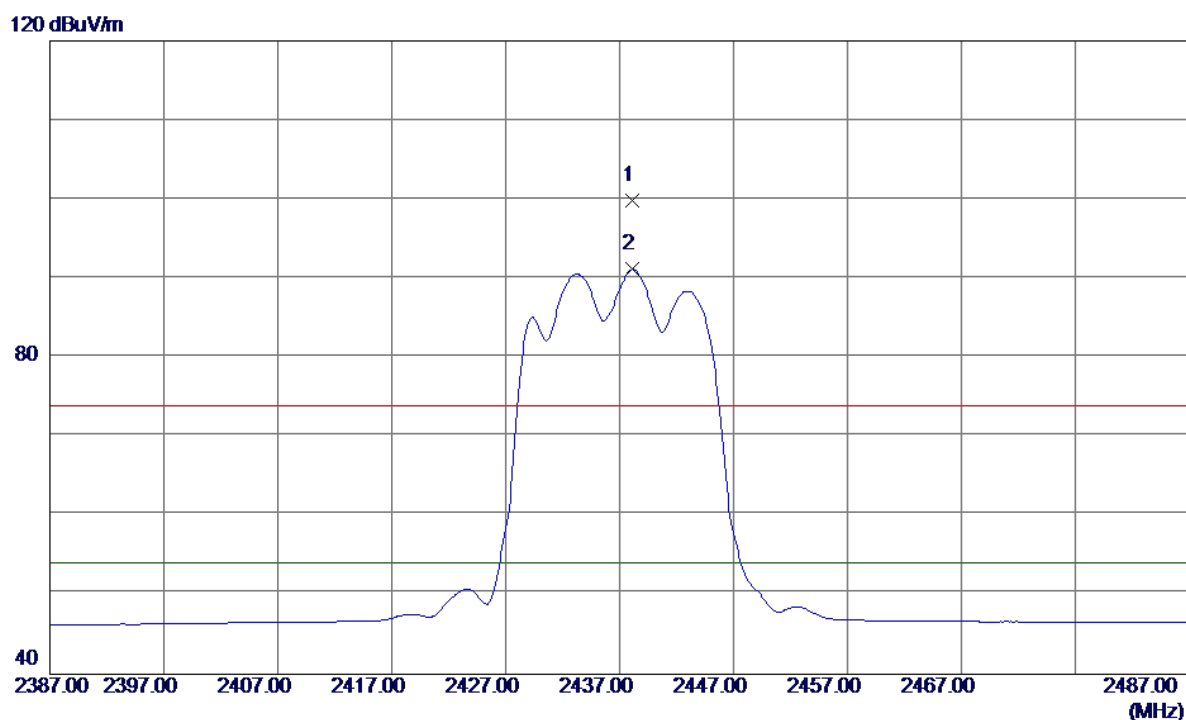


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.1000	66.57	33.21	99.78	74.00	25.78	Peak	No Limit
2 *	2438.1000	57.93	33.21	91.14	54.00	37.14	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal


80 dBuV/m

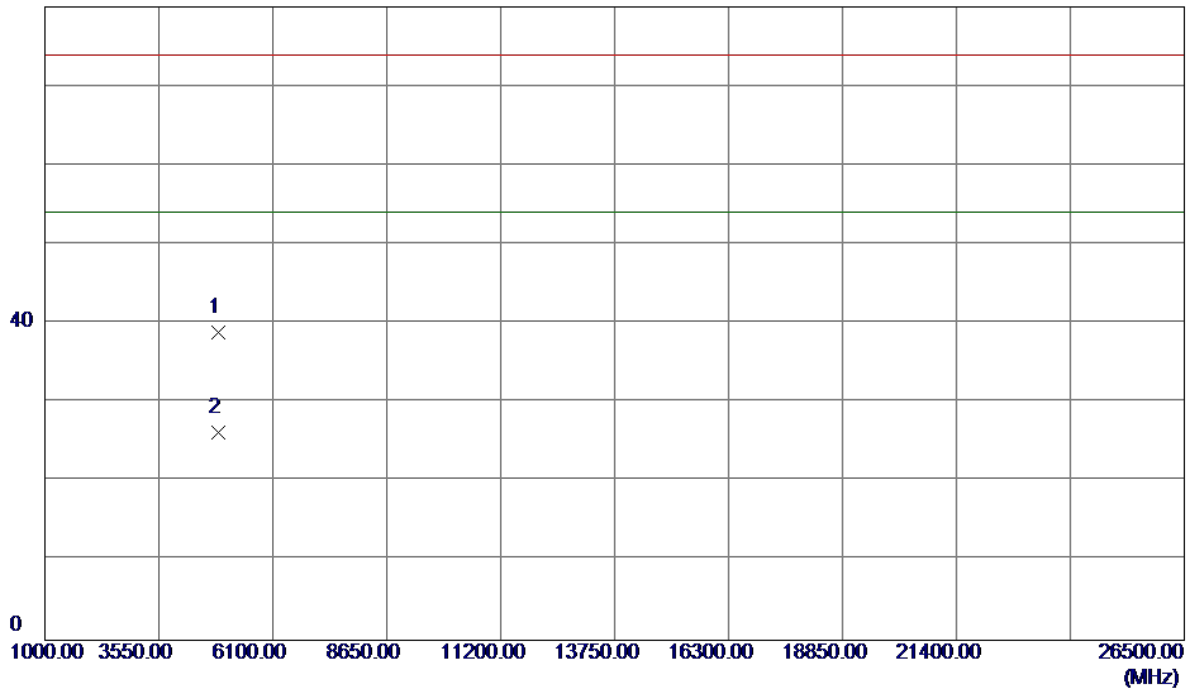

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872. 5700	33. 78	5. 06	38. 84	74. 00	-35. 16	Peak	
2 *	4873. 5900	21. 21	5. 06	26. 27	54. 00	-27. 73	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical

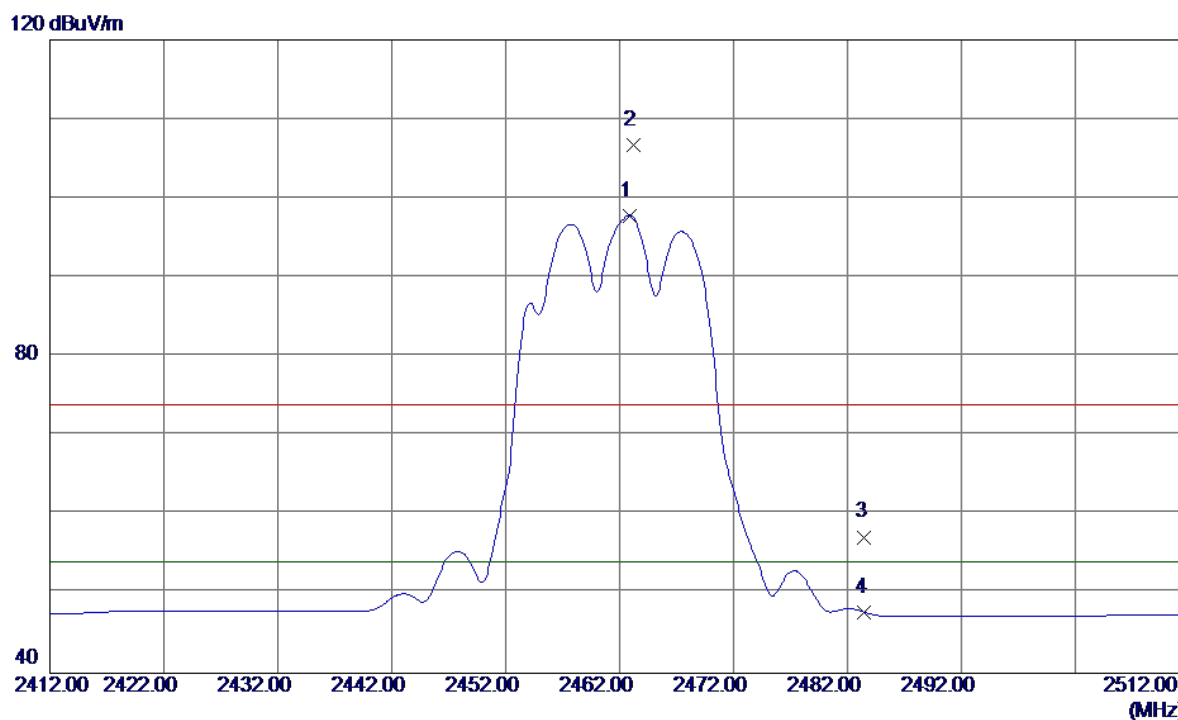


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2462.9000	64.53	33.31	97.84	54.00	43.84	AVG	No Limit
2	2463.2000	73.39	33.32	106.71	74.00	32.71	Peak	No Limit
3	2483.5000	23.80	33.40	57.20	74.00	-16.80	Peak	
4	2483.5000	14.29	33.40	47.69	54.00	-6.31	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical


80 dBuV/m

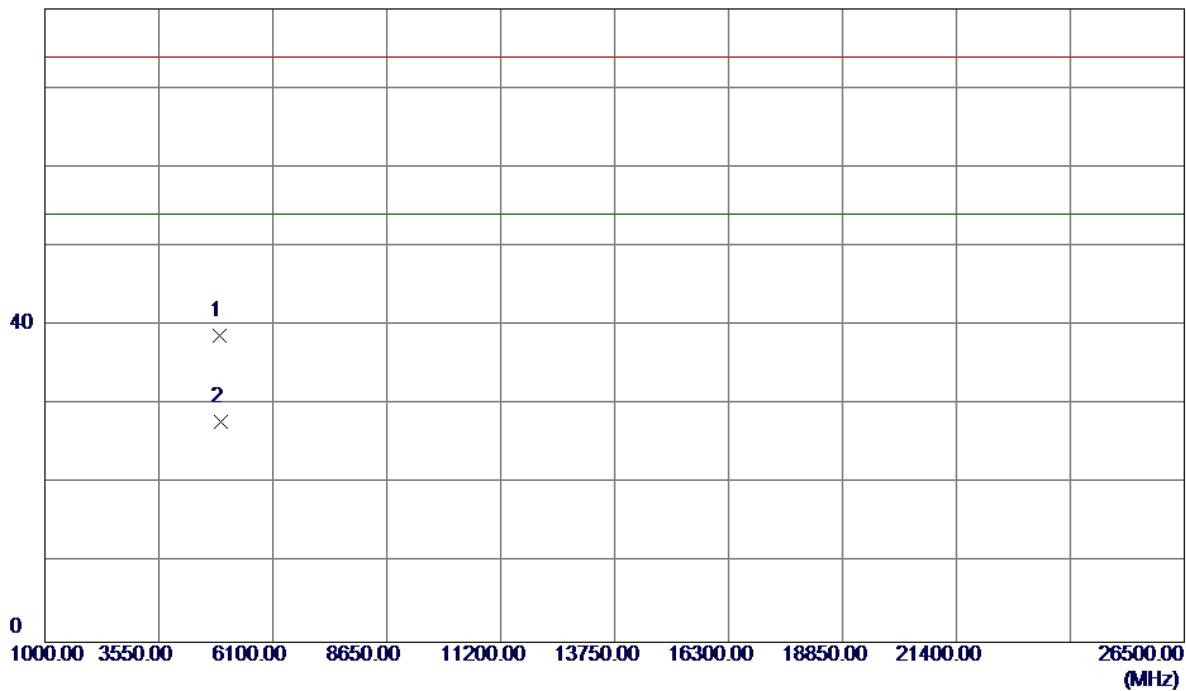

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4923.4700	33.42	5.28	38.70	74.00	-35.30	Peak	
2 *	4925.1800	22.55	5.28	27.83	54.00	-26.17	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal

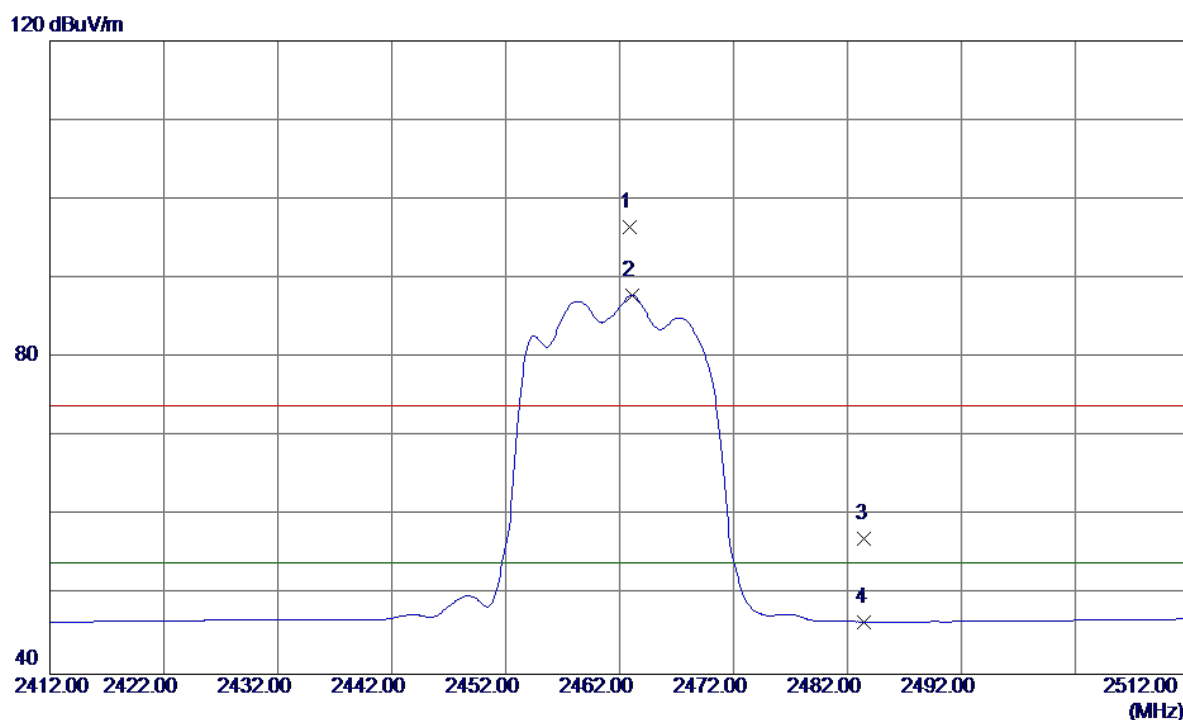


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.9000	63.20	33.31	96.51	74.00	22.51	Peak	No Limit
2 *	2463.1000	54.58	33.32	87.90	54.00	33.90	AVG	No Limit
3	2483.5000	23.78	33.40	57.18	74.00	-16.82	Peak	
4	2483.5000	13.21	33.40	46.61	54.00	-7.39	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal


80 dBuV/m

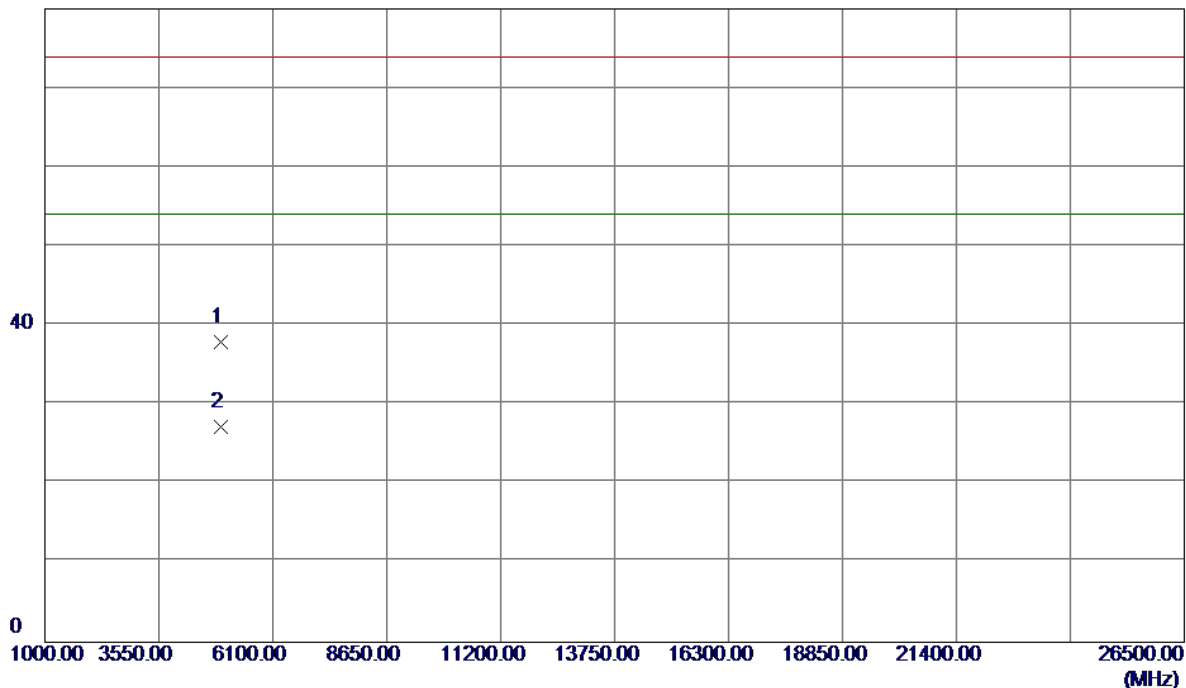

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924. 7150	32. 64	5. 28	37. 92	74. 00	-36. 08	Peak	
2	4924. 7950	21. 86	5. 28	27. 14	74. 00	-46. 86	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

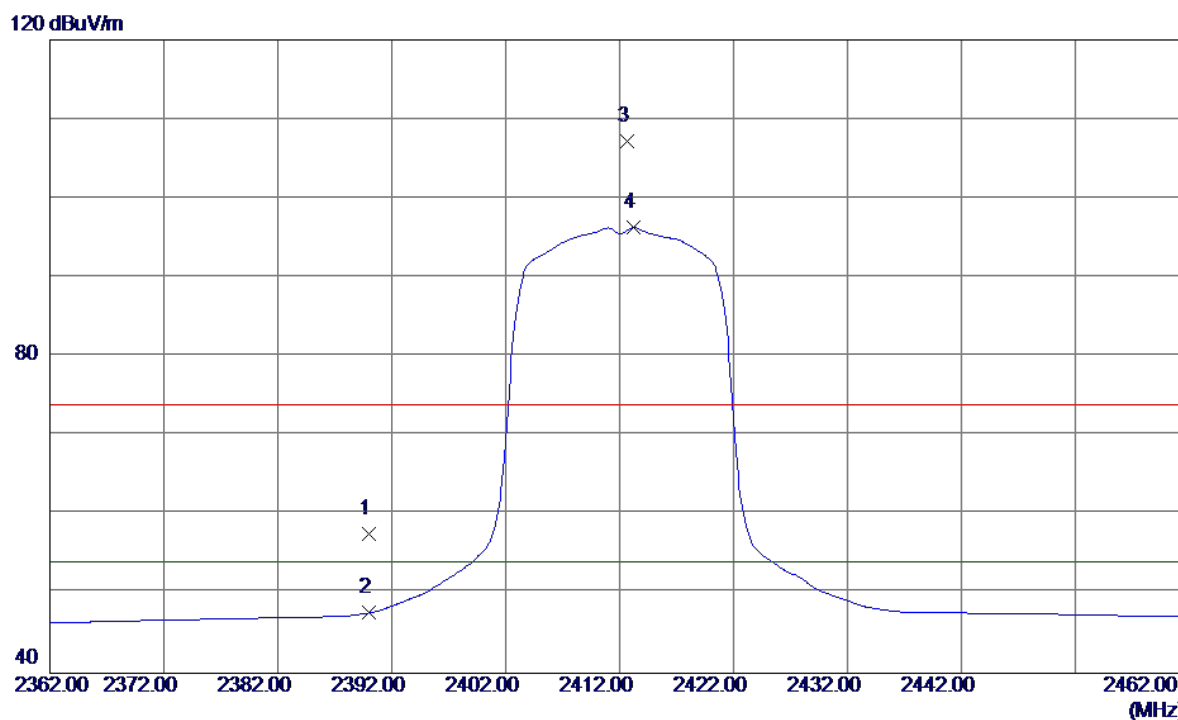


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.56	33.01	57.57	74.00	-16.43	Peak	
2	2390.0000	14.60	33.01	47.61	54.00	-6.39	AVG	
3	2412.7000	74.05	33.11	107.16	74.00	33.16	Peak	No Limit
4 *	2413.2000	63.17	33.11	96.28	54.00	42.28	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical


80 dBuV/m

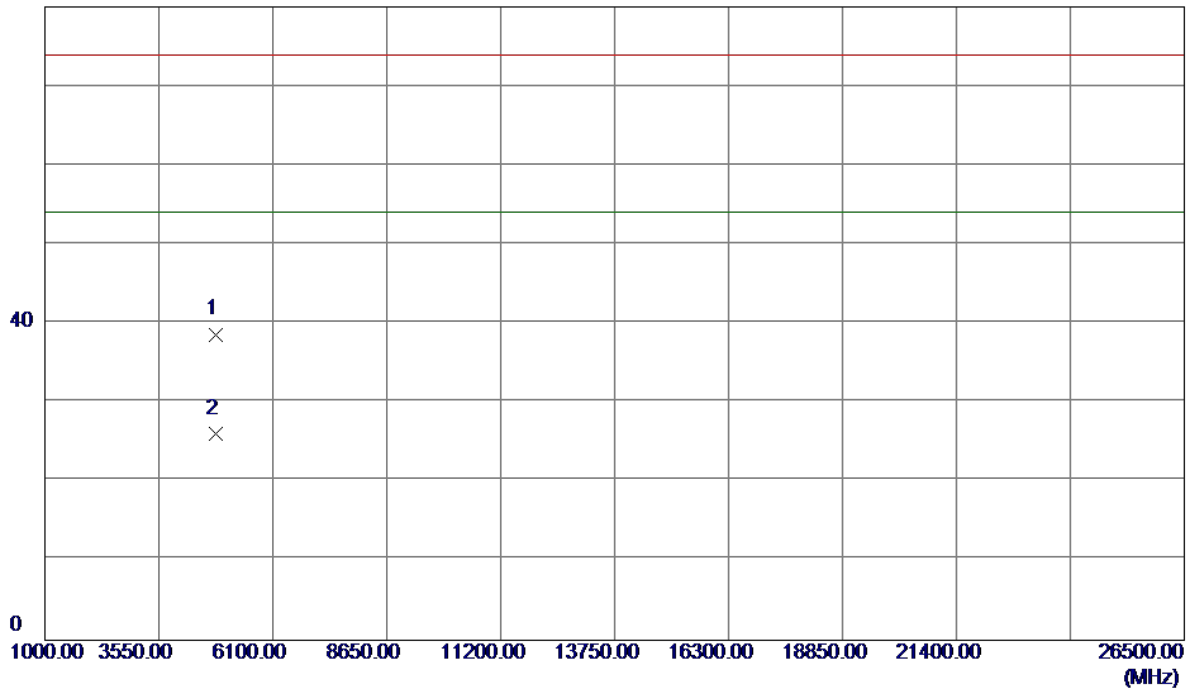

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	4824.3950	33.78	4.86	38.64	74.00	-35.36	Peak	
2 *	4825.0050	21.22	4.86	26.08	54.00	-27.92	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal

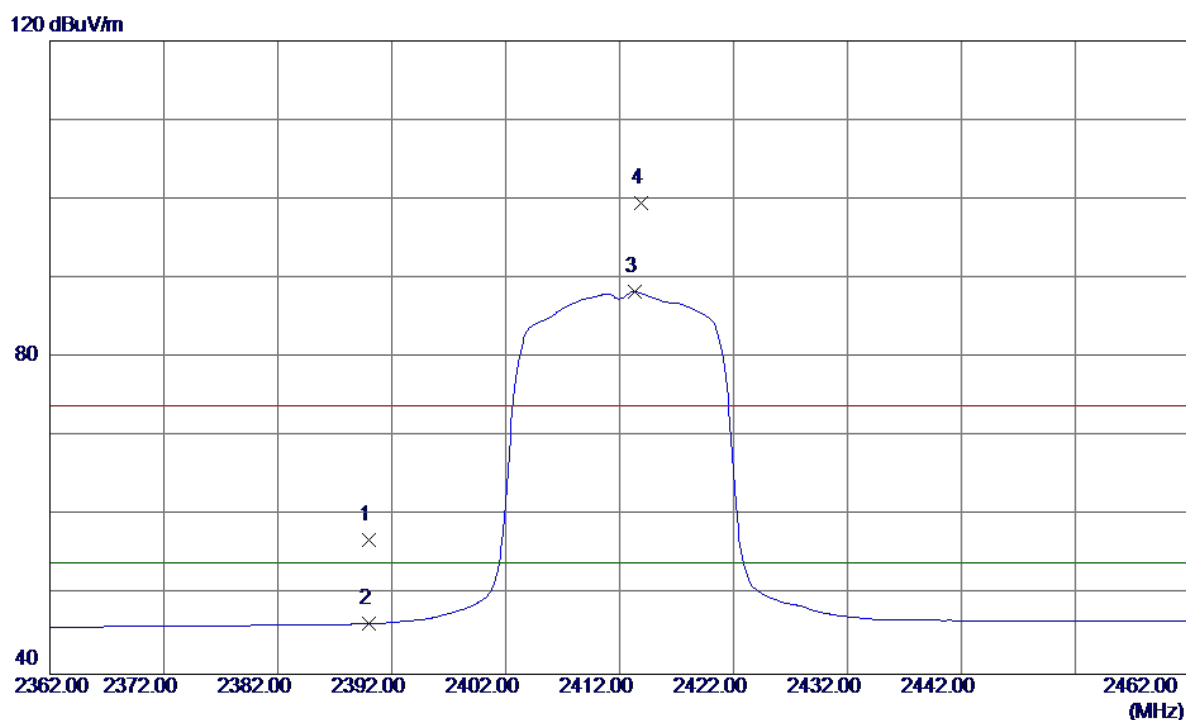


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.92	33.01	56.93	74.00	-17.07	Peak	
2	2390.0000	13.38	33.01	46.39	54.00	-7.61	AVG	
3 *	2413.3000	55.24	33.11	88.35	54.00	34.35	AVG	No Limit
4	2413.9000	66.43	33.11	99.54	74.00	25.54	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal


80 dBuV/m

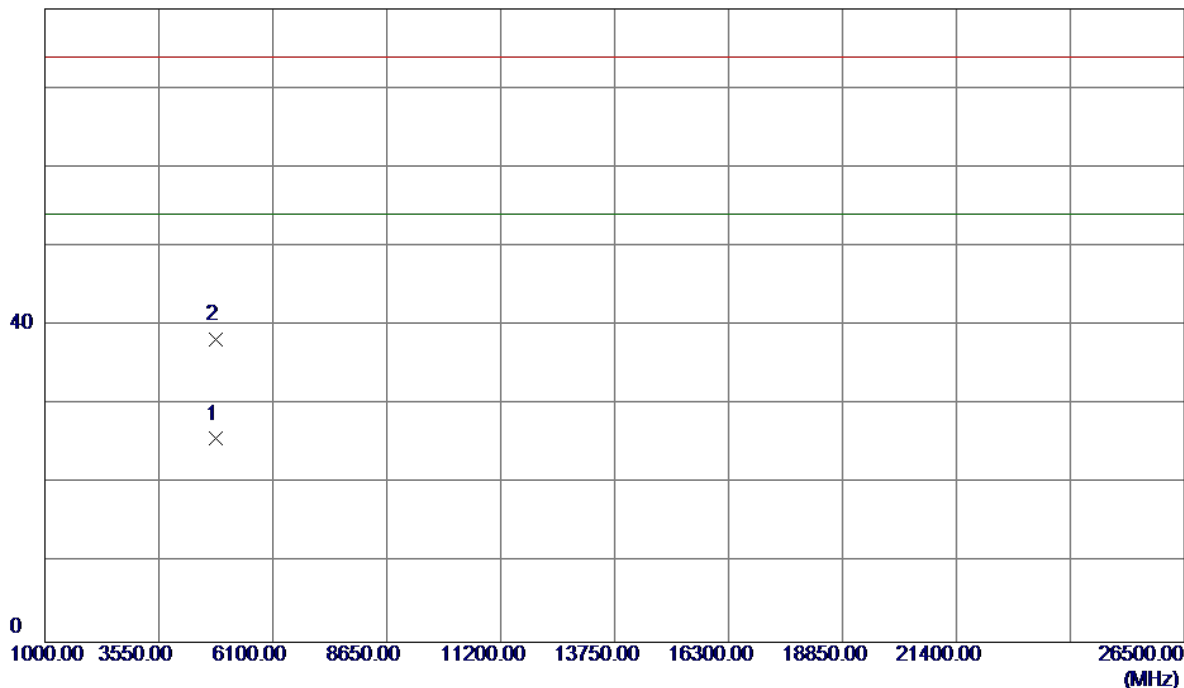

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.5550	20.83	4.85	25.68	54.00	-28.32	AVG	
2	4826.1400	33.32	4.86	38.18	74.00	-35.82	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical

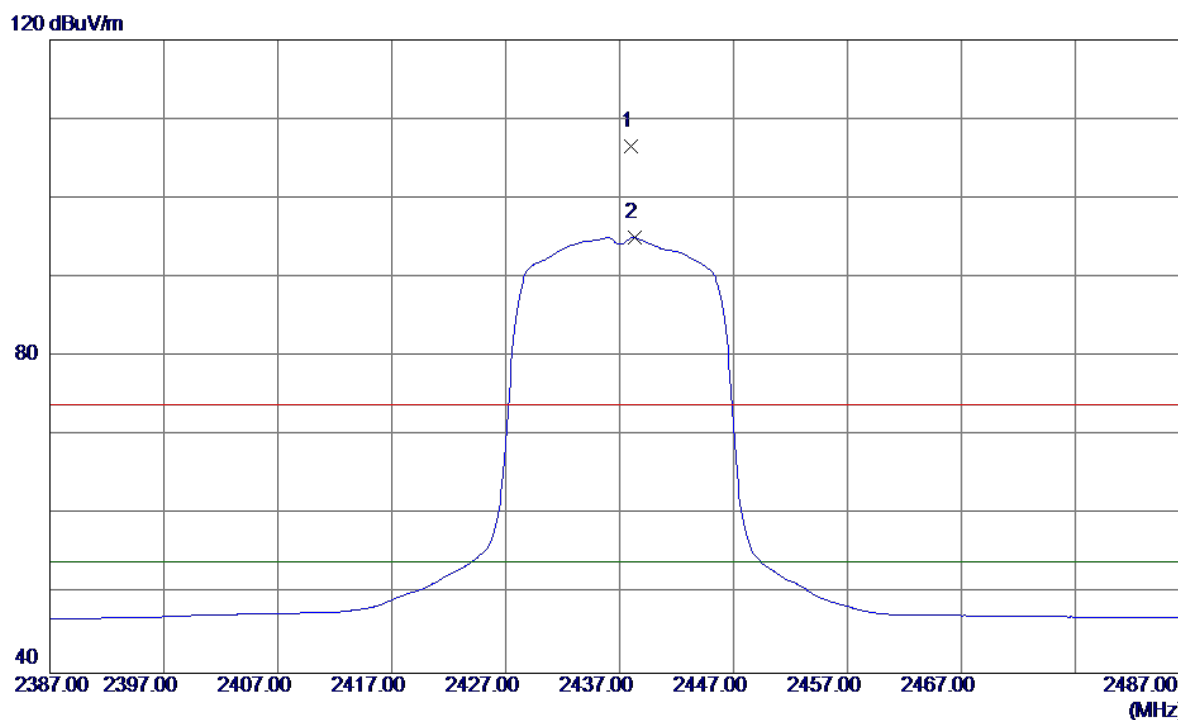


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.0000	73.38	33.21	106.59	74.00	32.59	Peak	No Limit
2 *	2438.3000	61.82	33.21	95.03	54.00	41.03	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical


80 dBuV/m

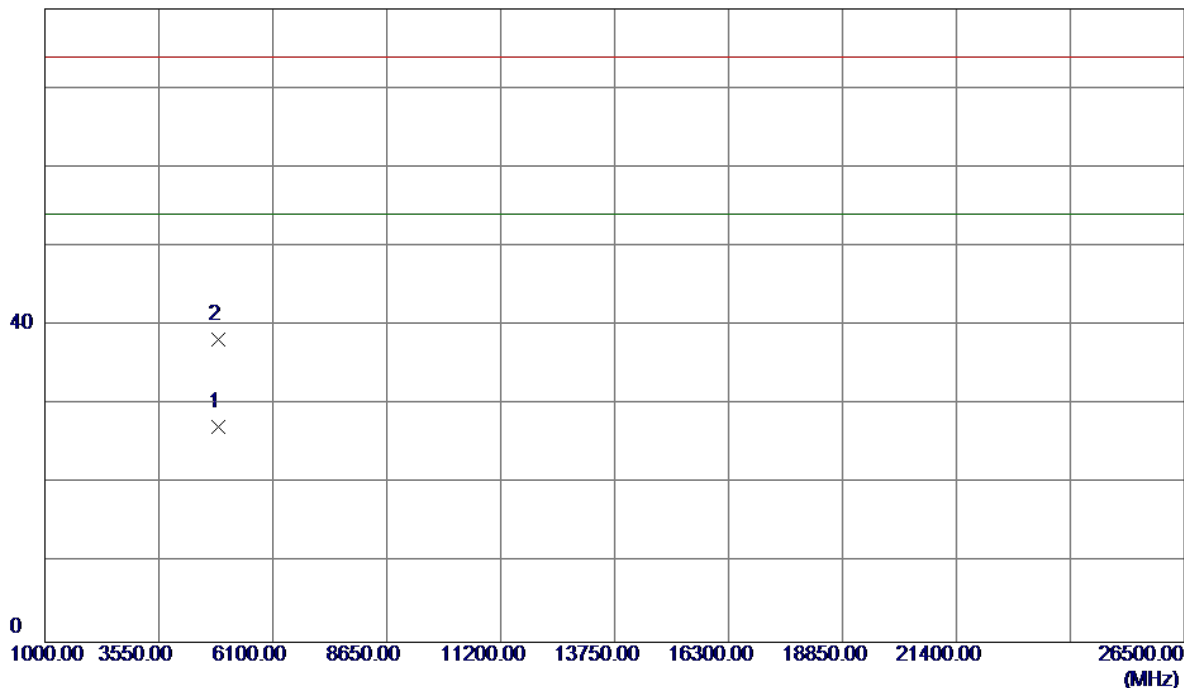

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.4000	22.16	5.07	27.23	54.00	-26.77	AVG	
2	4872.9600	33.11	5.06	38.17	74.00	-35.83	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

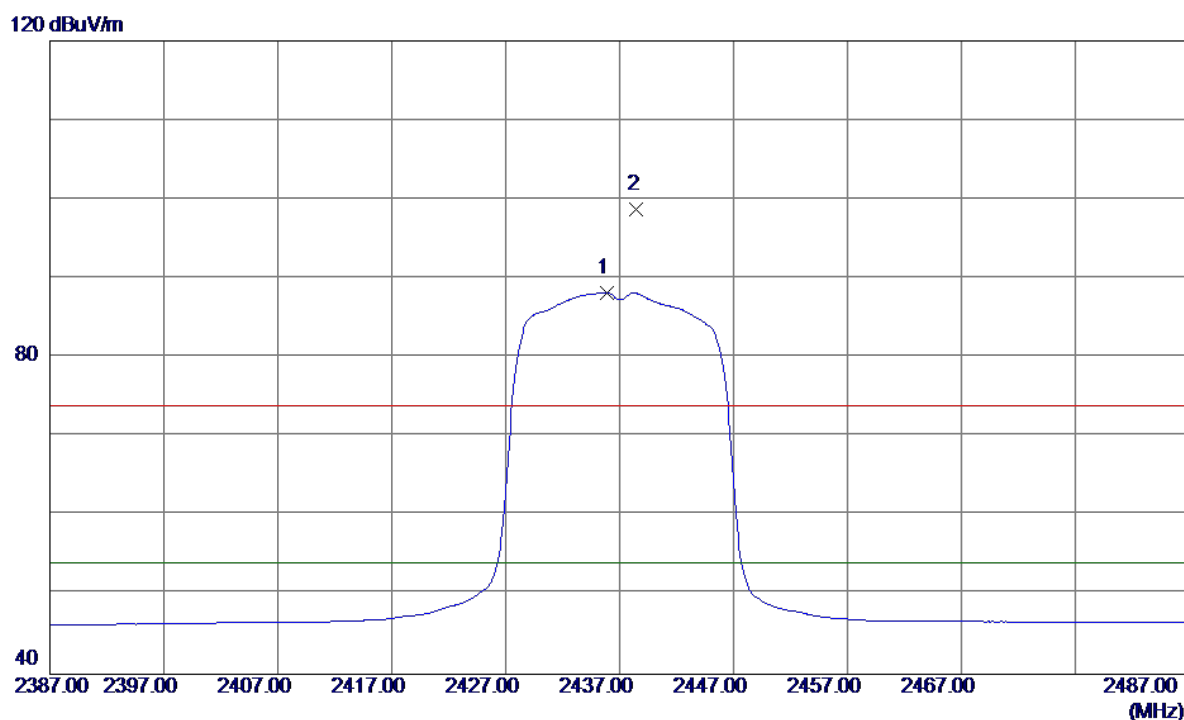


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.9000	55.02	33.20	88.22	54.00	34.22	AVG	No Limit
2	2438.5000	65.58	33.21	98.79	74.00	24.79	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal


80 dBuV/m

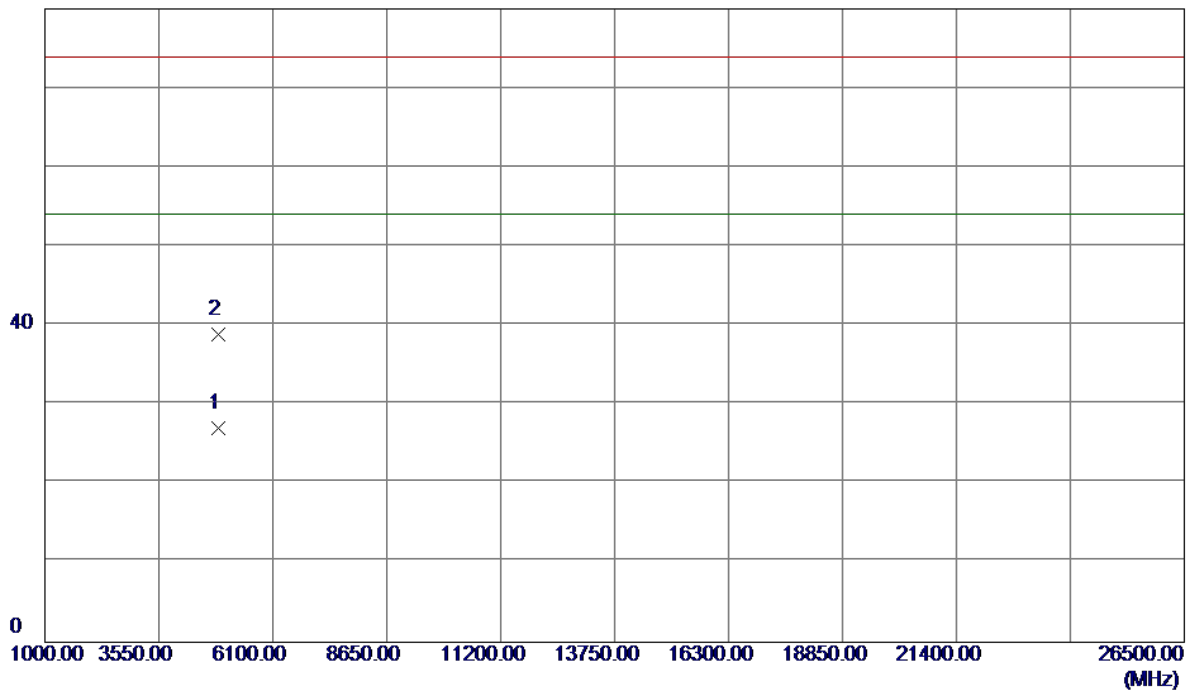

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.4400	22.00	5.07	27.07	54.00	-26.93	AVG	
2	4874.1300	33.83	5.07	38.90	74.00	-35.10	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

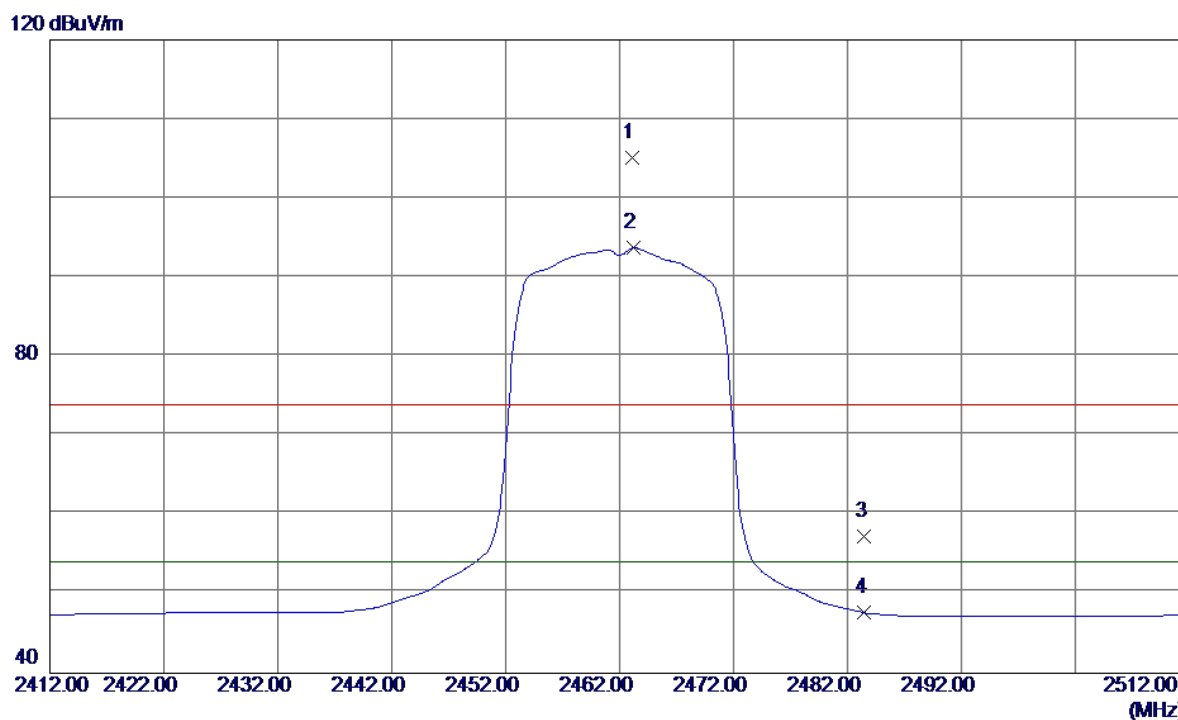


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2463.1000	71.75	33.32	105.07	74.00	31.07	Peak	No Limit
2 *	2463.2000	60.43	33.32	93.75	54.00	39.75	AVG	No Limit
3	2483.5000	23.95	33.40	57.35	74.00	-16.65	Peak	
4	2483.5000	14.24	33.40	47.64	54.00	-6.36	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical


80 dBuV/m

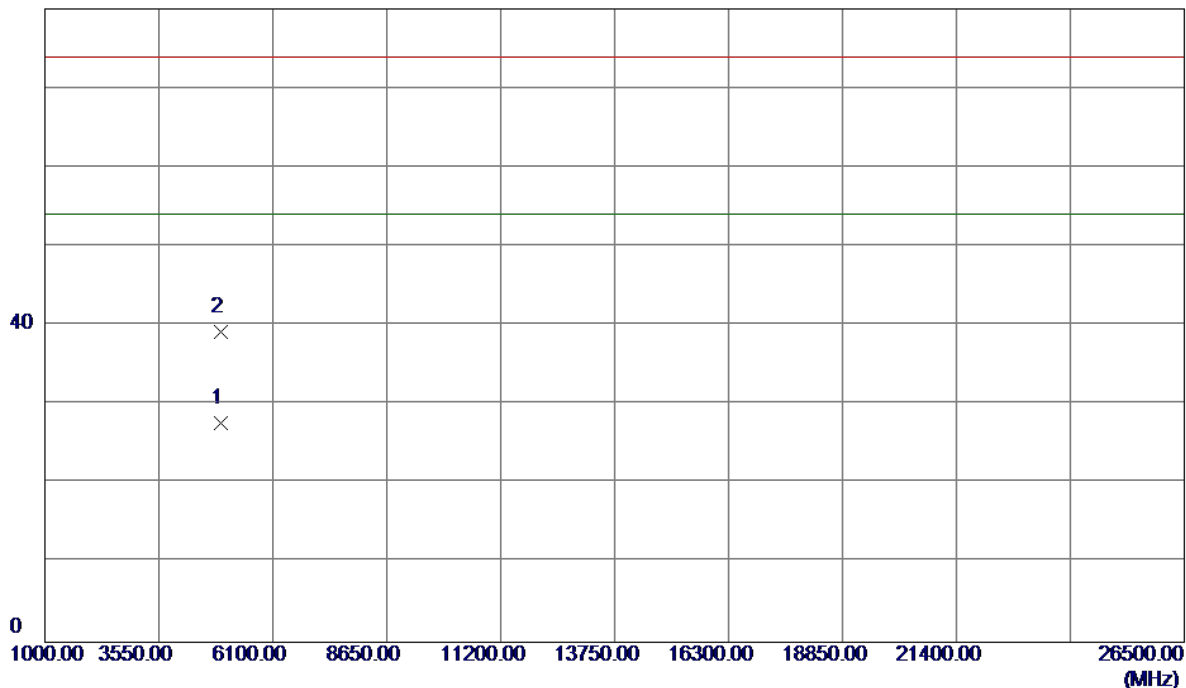

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4926. 0500	22. 45	5. 29	27. 74	54. 00	-26. 26	AVG	
2	4926. 2300	33. 92	5. 29	39. 21	74. 00	-34. 79	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

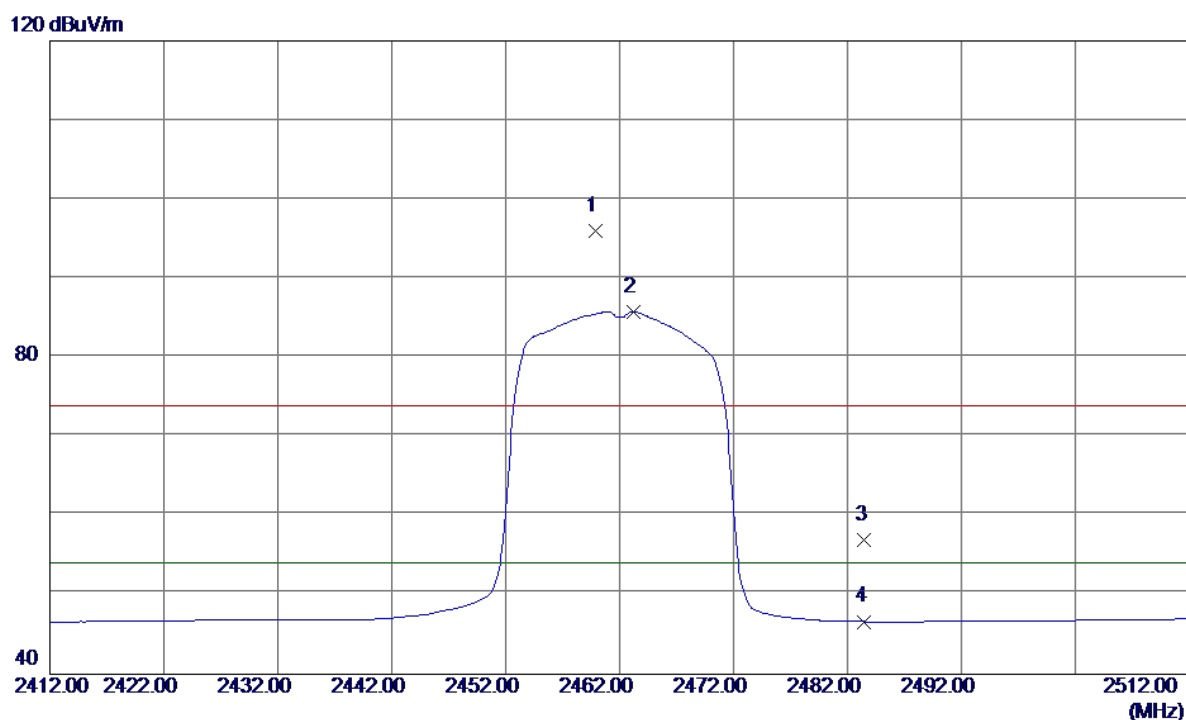


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.9000	62.67	33.30	95.97	74.00	21.97	Peak	No Limit
2 *	2463.2000	52.50	33.32	85.82	54.00	31.82	AVG	No Limit
3	2483.5000	23.63	33.40	57.03	74.00	-16.97	Peak	
4	2483.5000	13.24	33.40	46.64	54.00	-7.36	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal


80 dBuV/m

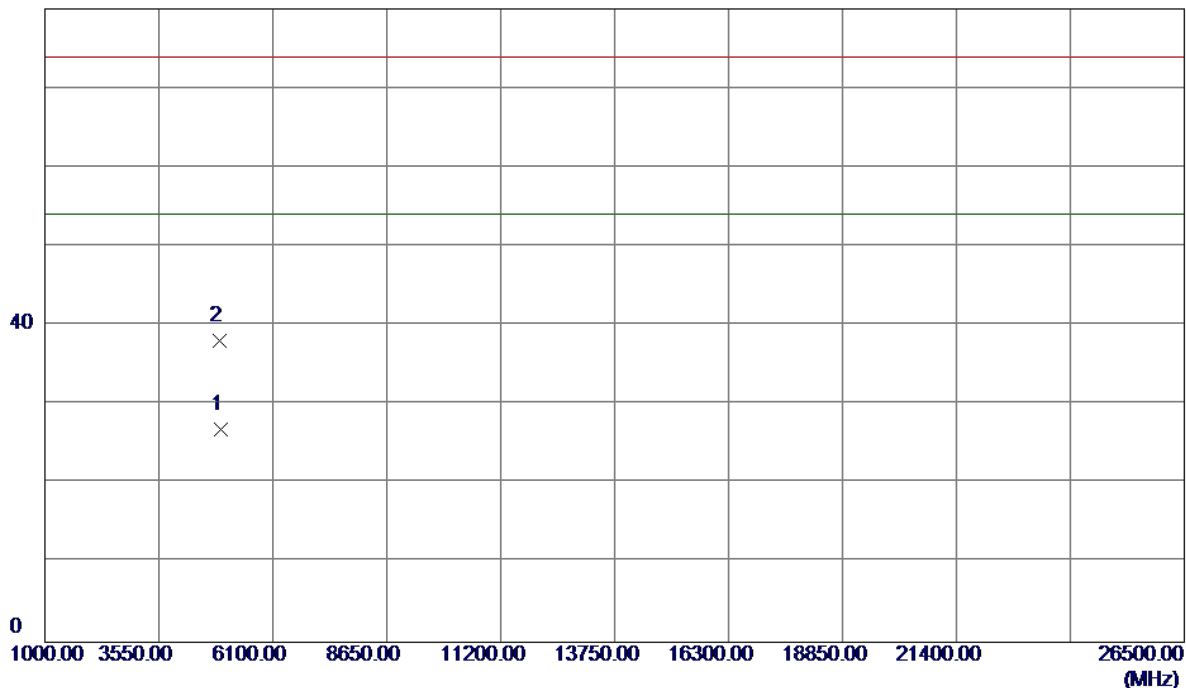

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.8500	21.59	5.28	26.87	54.00	-27.13	AVG	
2	4923.9750	32.79	5.28	38.07	74.00	-35.93	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical

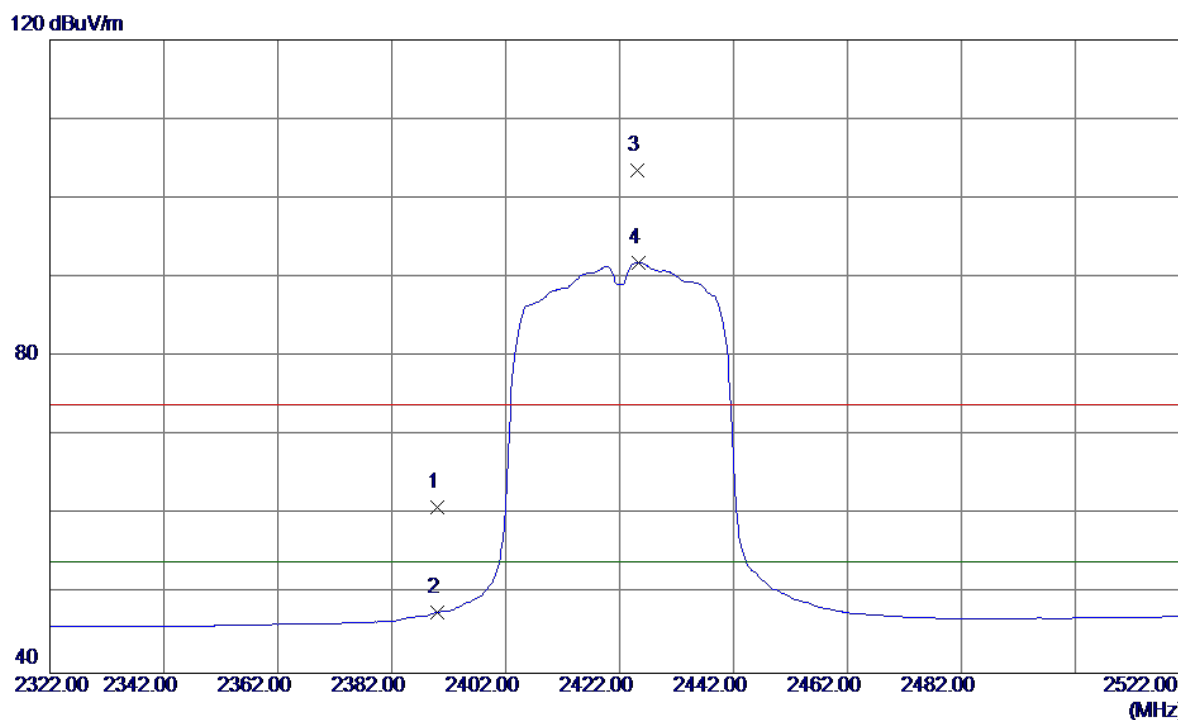


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	27.95	33.01	60.96	74.00	-13.04	Peak	
2	2390.0000	14.66	33.01	47.67	54.00	-6.33	AVG	
3	2425.2000	70.34	33.16	103.50	74.00	29.50	Peak	No Limit
4 *	2425.4000	58.70	33.16	91.86	54.00	37.86	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical

80 dBuV/m

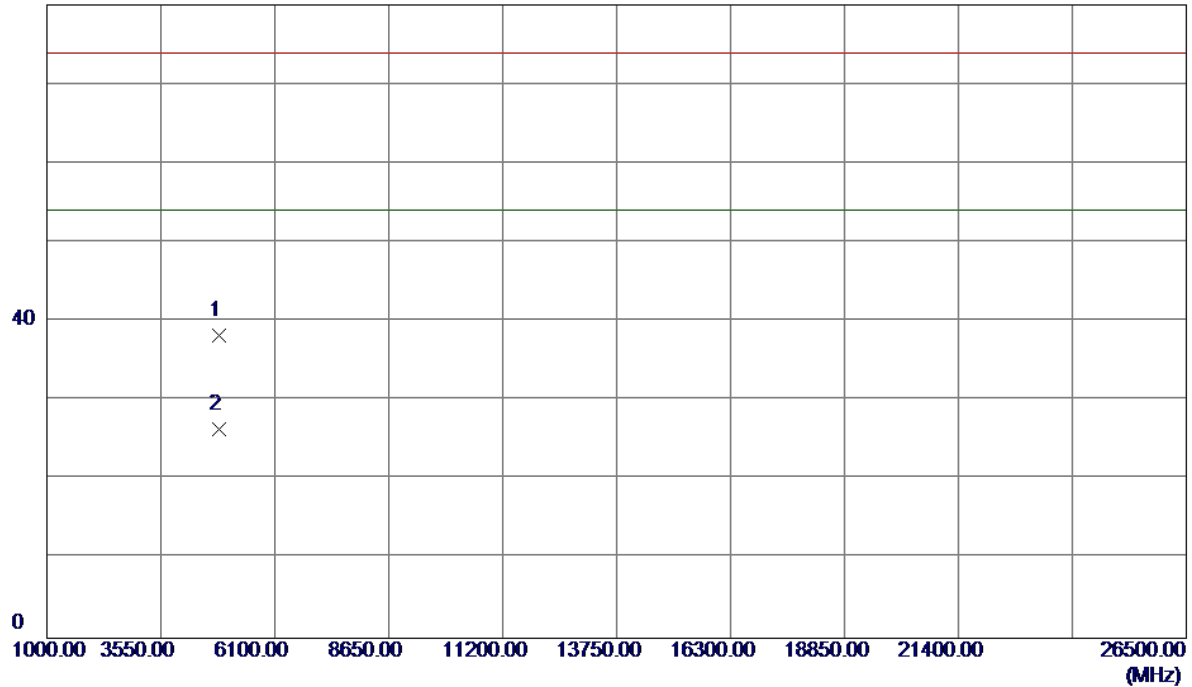


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4843.6400	33.24	4.94	38.18	74.00	-35.82	Peak	
2 *	4845.8000	21.50	4.95	26.45	54.00	-27.55	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal


120 dBuV/m

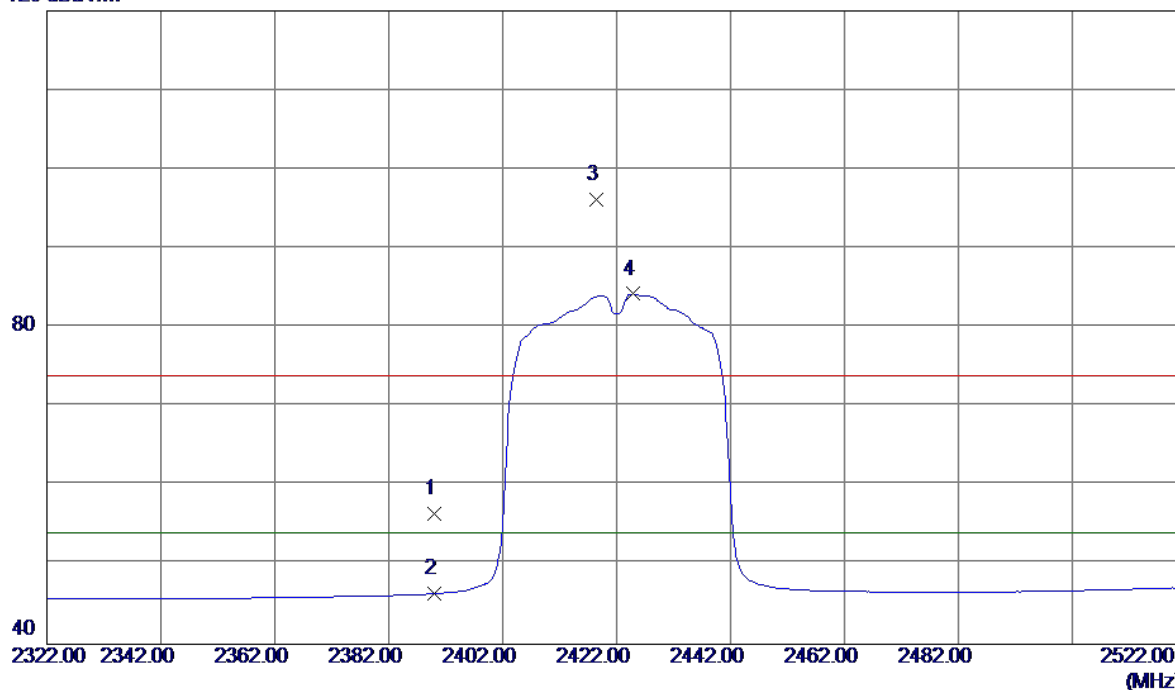

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.45	33.01	56.46	74.00	-17.54	Peak	
2	2390.0000	13.37	33.01	46.38	54.00	-7.62	AVG	
3	2418.4000	63.04	33.13	96.17	74.00	22.17	Peak	No Limit
4 *	2424.8000	51.08	33.16	84.24	54.00	30.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Horizontal

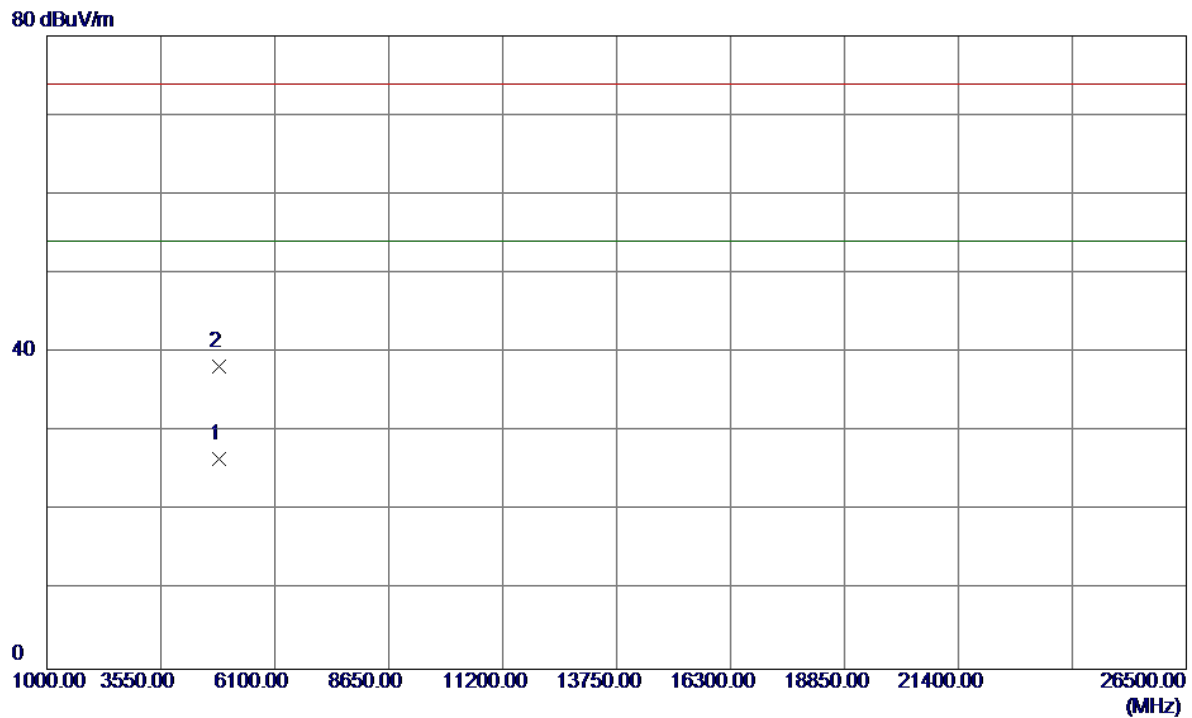

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4844.0500	21.63	4.94	26.57	54.00	-27.43	AVG	
2	4843.4600	33.27	4.94	38.21	74.00	-35.79	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

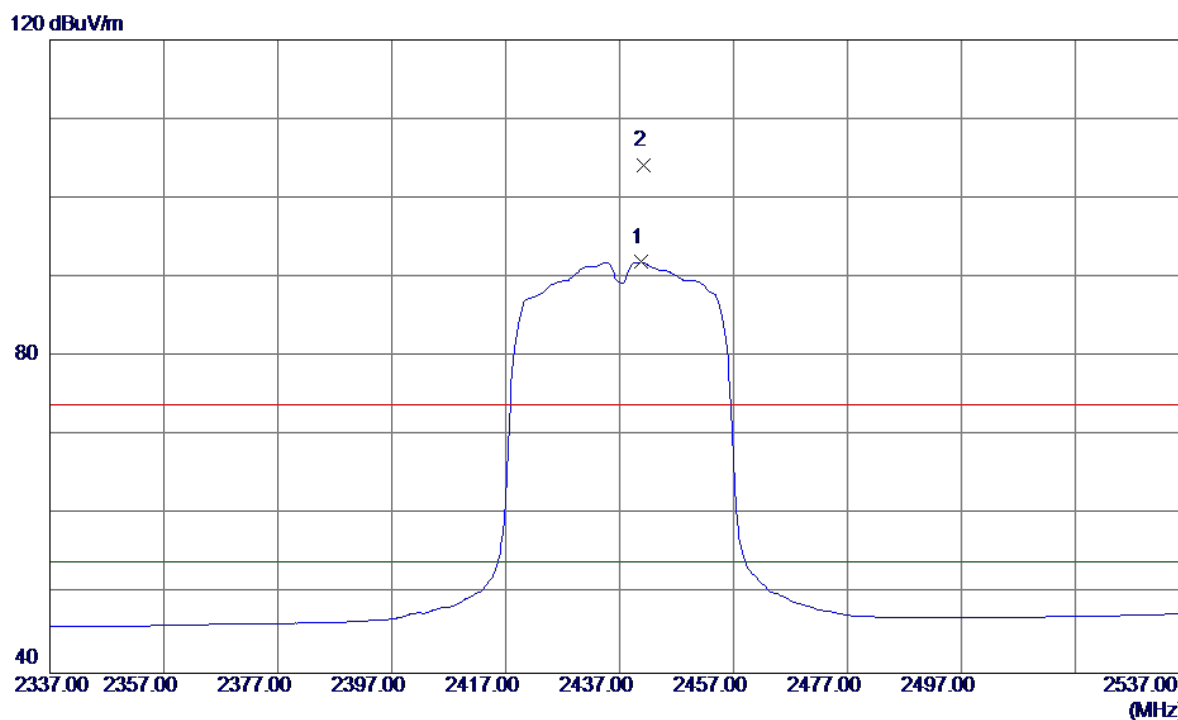


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2440.8000	58.70	33.22	91.92	54.00	37.92	AVG	No Limit
2	2441.2000	70.87	33.22	104.09	74.00	30.09	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


80 dBuV/m

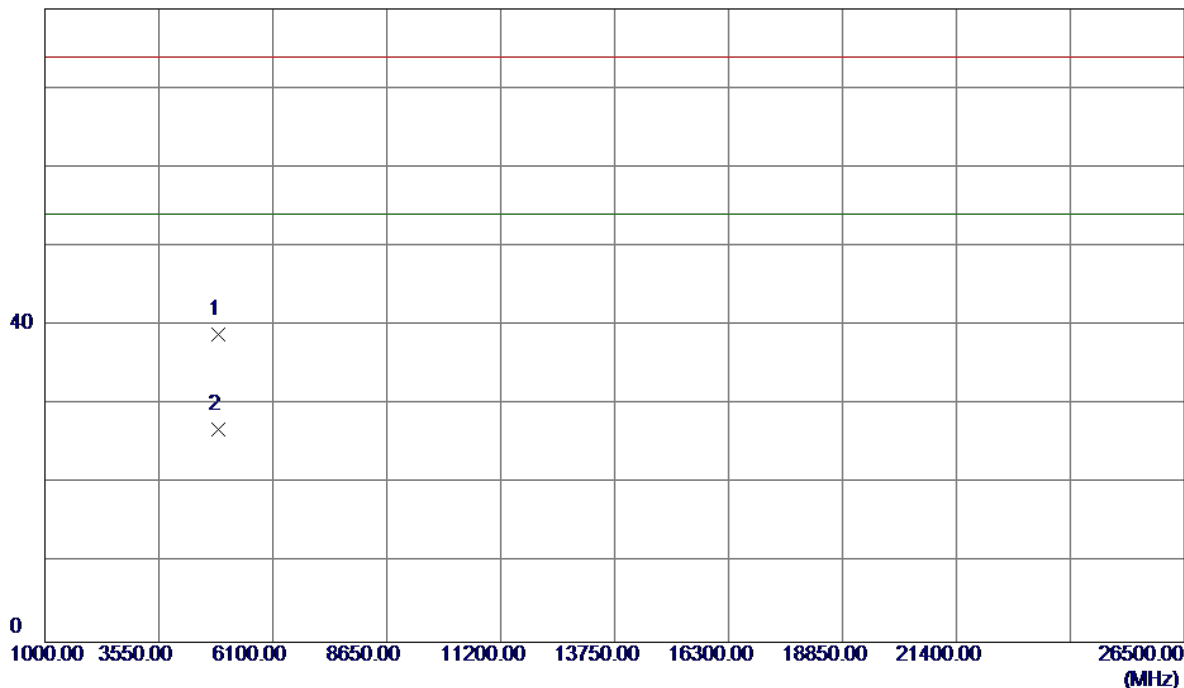

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4873.8900	33.74	5.07	38.81	74.00	-35.19	Peak	
2 *	4875.5050	21.86	5.07	26.93	54.00	-27.07	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

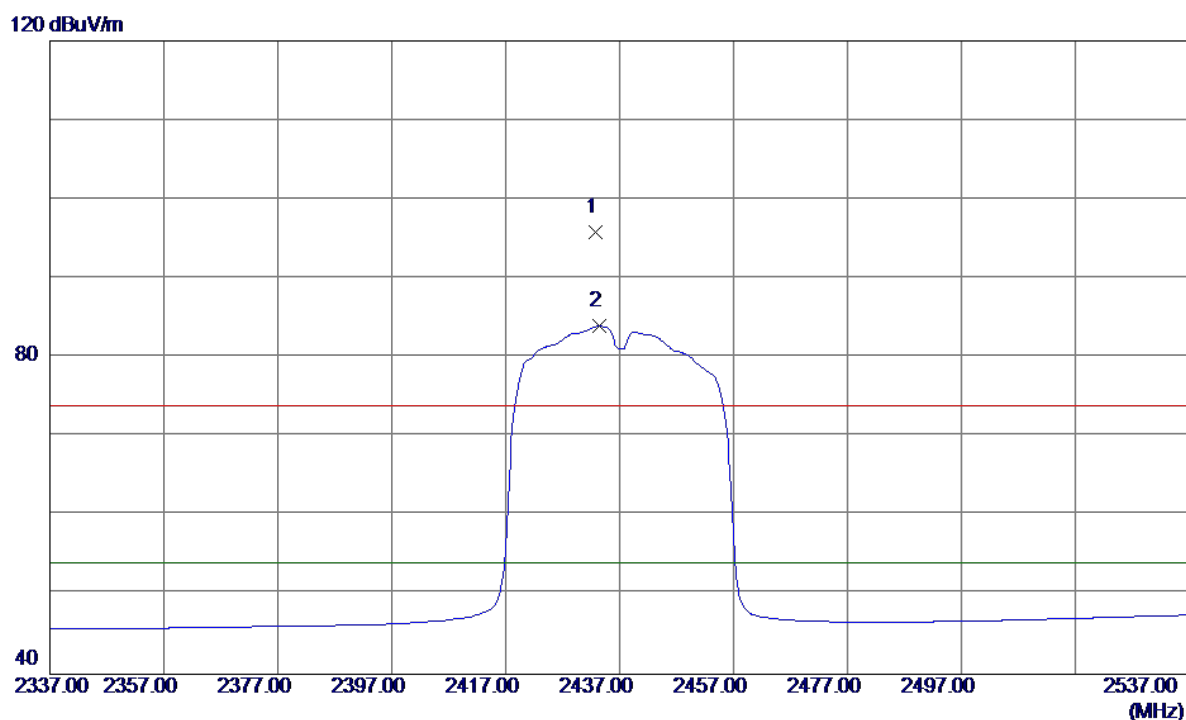


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2432.8000	62.59	33.19	95.78	74.00	21.78	Peak	No Limit
2 *	2433.4000	50.78	33.19	83.97	54.00	29.97	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal


80 dBuV/m

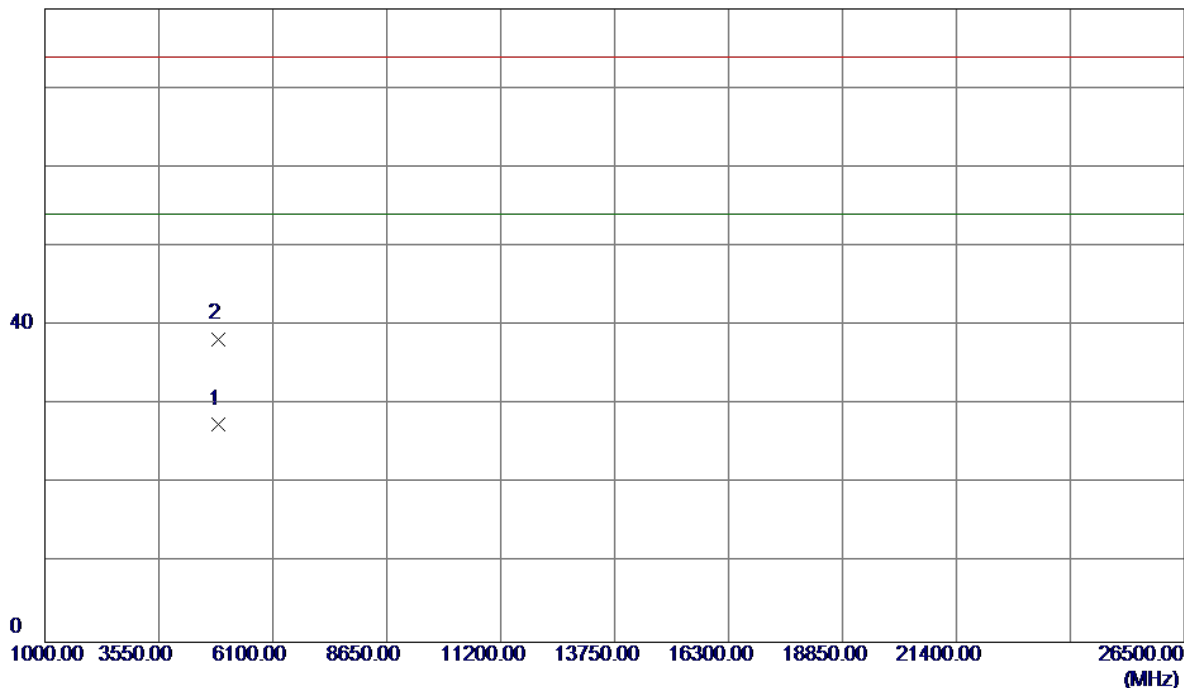

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.8100	22.39	5.06	27.45	54.00	-26.55	AVG	
2	4873.9350	33.25	5.07	38.32	74.00	-35.68	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

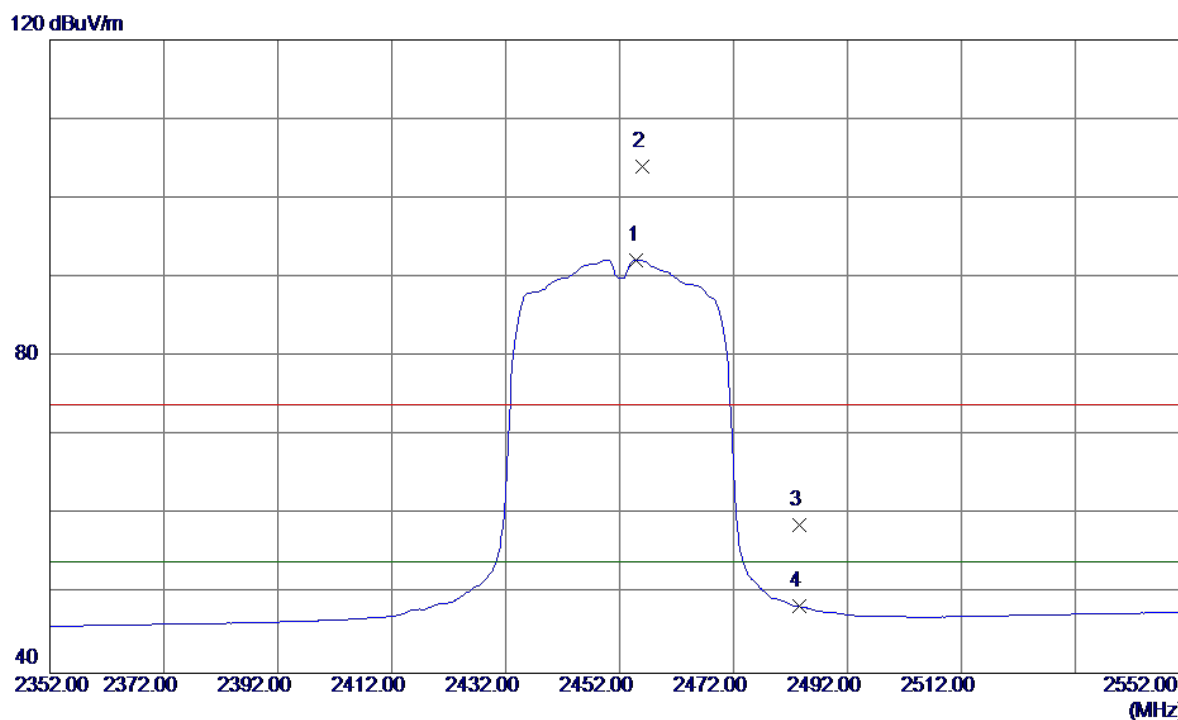


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2455.0000	58.94	33.28	92.22	54.00	38.22	AVG	No Limit
2	2456.0000	70.67	33.29	103.96	74.00	29.96	Peak	No Limit
3	2483.5000	25.25	33.40	58.65	74.00	-15.35	Peak	
4	2483.5000	15.01	33.40	48.41	54.00	-5.59	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical


80 dBuV/m

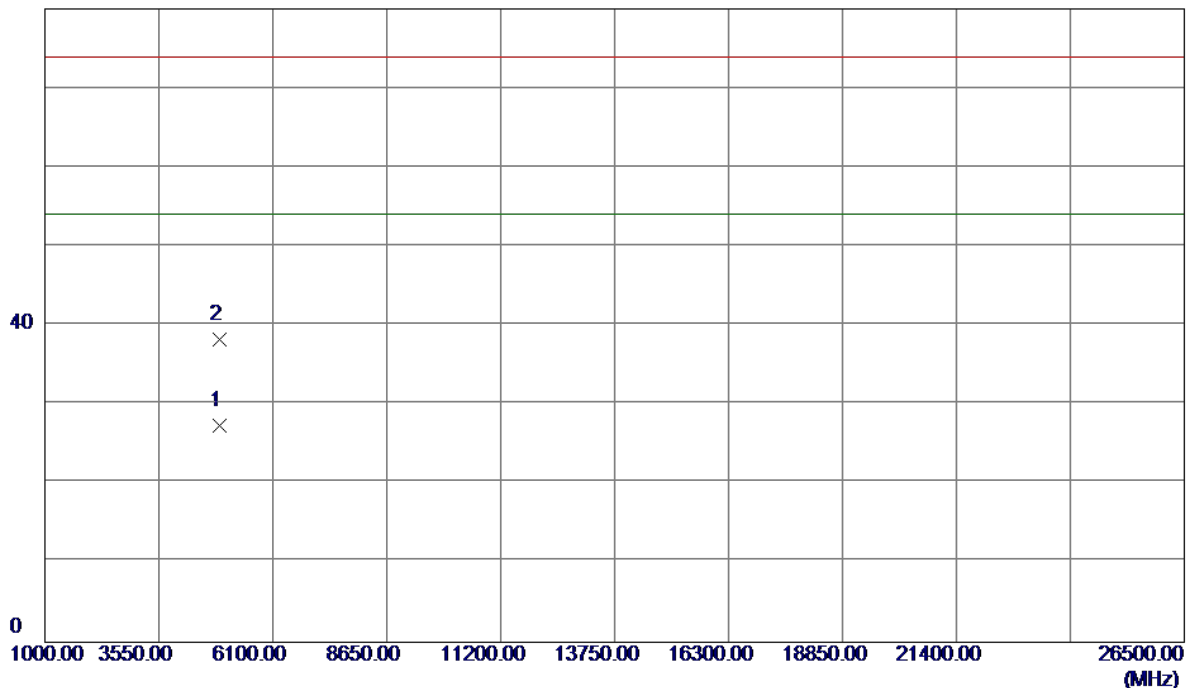

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.4350	22.19	5.19	27.38	54.00	-26.62	AVG	
2	4903.5850	33.11	5.19	38.30	74.00	-35.70	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

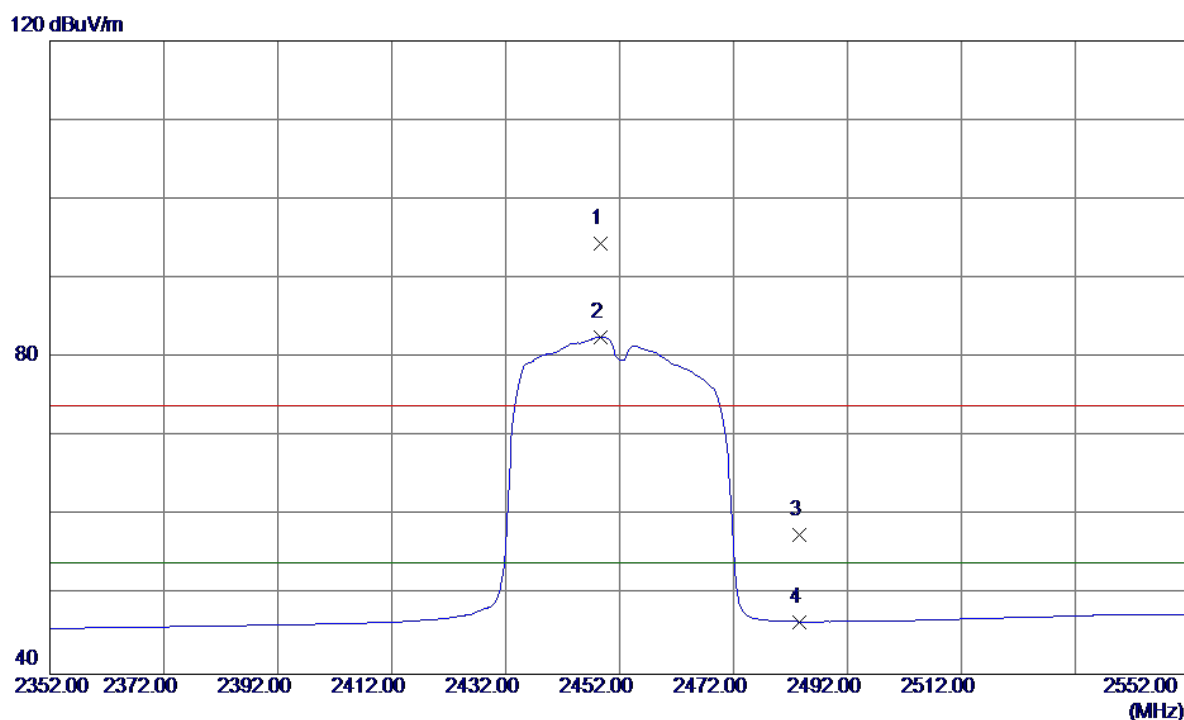


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2448.6000	61.13	33.26	94.39	74.00	20.39	Peak	No Limit
2 *	2448.6000	49.34	33.26	82.60	54.00	28.60	AVG	No Limit
3	2483.5000	24.15	33.40	57.55	74.00	-16.45	Peak	
4	2483.5000	13.23	33.40	46.63	54.00	-7.37	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

80 dBuV/m

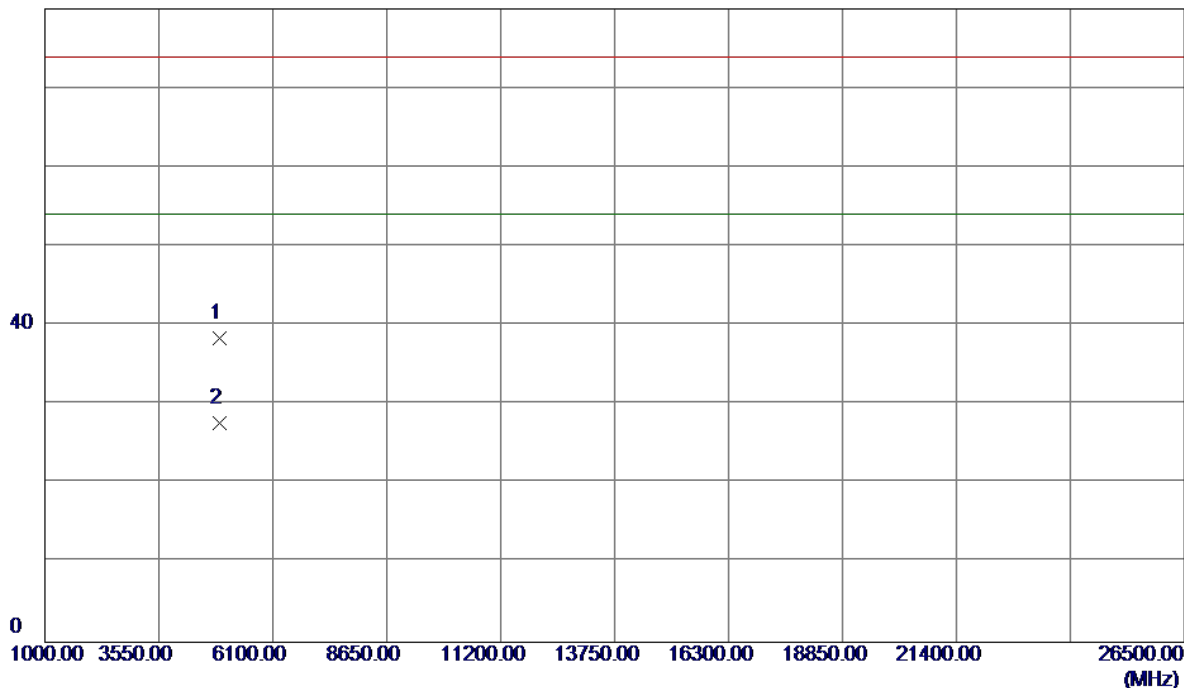


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4902.4650	33.21	5.19	38.40	74.00	-35.60	Peak	
2 *	4905.4750	22.46	5.20	27.66	54.00	-26.34	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	9.84	14.20	500	Complies
2437	10.06	14.24	500	Complies
2462	10.10	14.24	500	Complies

TX CH01

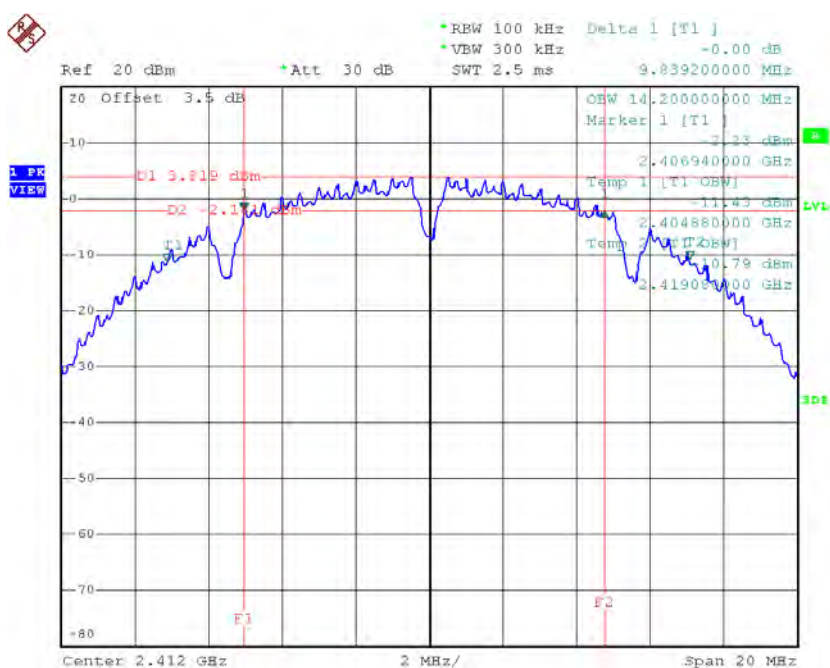


Date: 25.DEC.2016 13:13:23

TX CH06

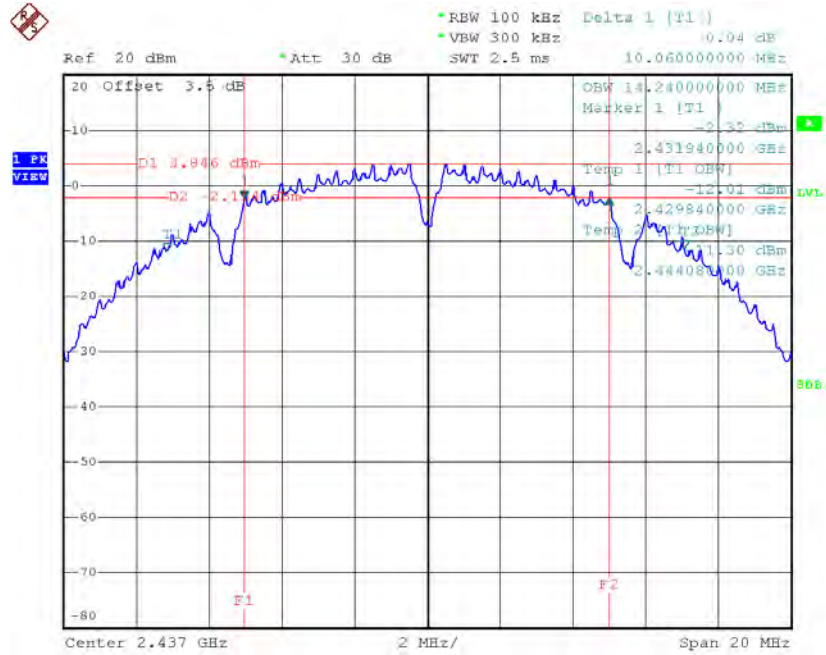

Date: 25.DEC.2016 13:15:25

TX CH11

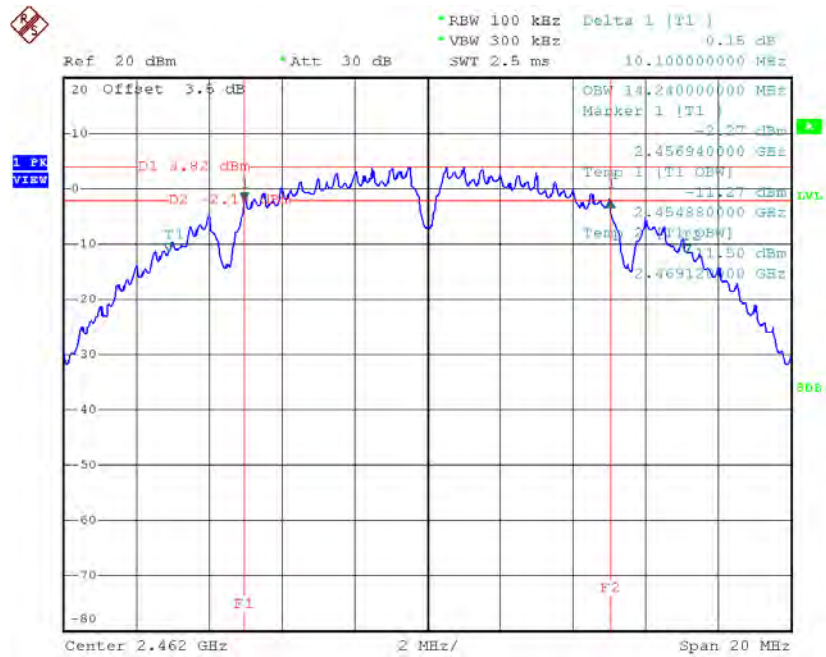


Date: 25.DEC.2016 13:18:59

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.06	16.32	500	Complies
2437	14.48	16.32	500	Complies
2462	15.11	16.36	500	Complies

TX CH01

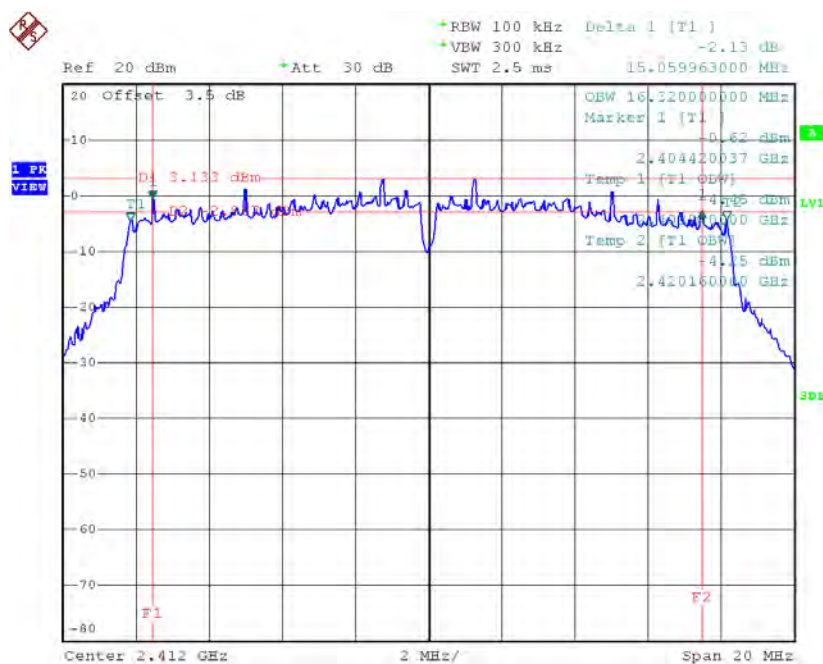


Date: 25.DEC.2016 13:28:04

TX CH06

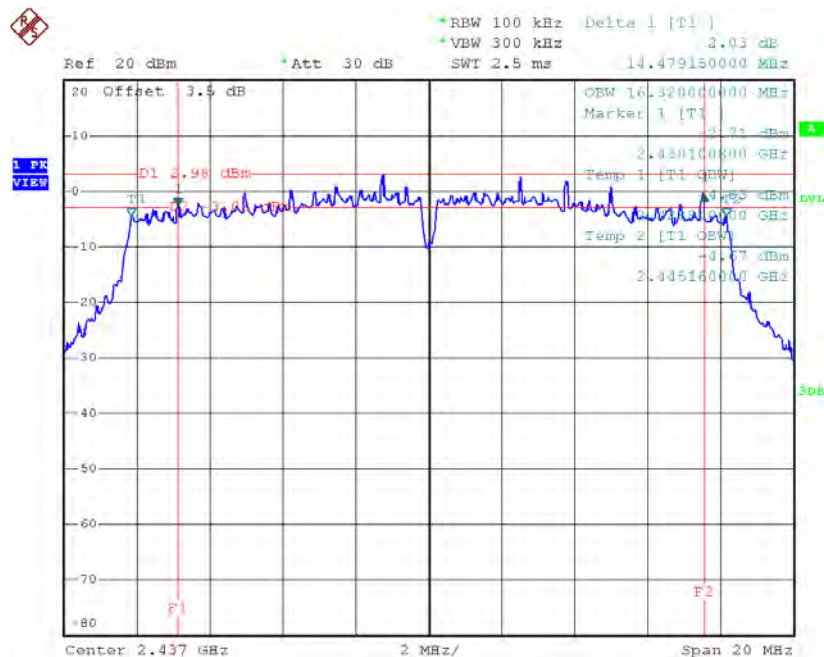

Date: 25.DEC.2016 13:32:09

TX CH11

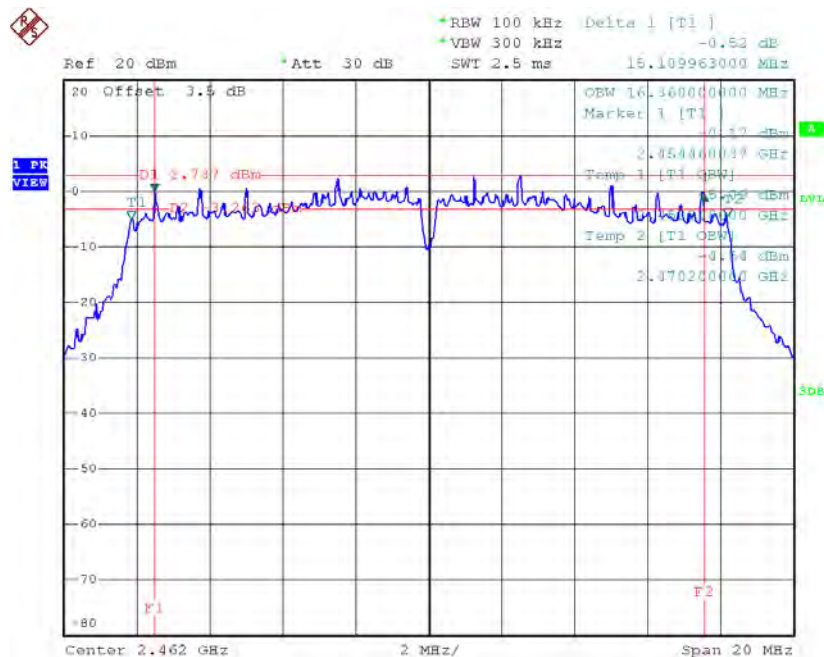


Date: 25.DEC.2016 13:33:38

Test Mode : TX N-20MHz Mode_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.11	17.52	500	Complies
2437	15.14	17.52	500	Complies
2462	15.16	17.52	500	Complies

TX CH01

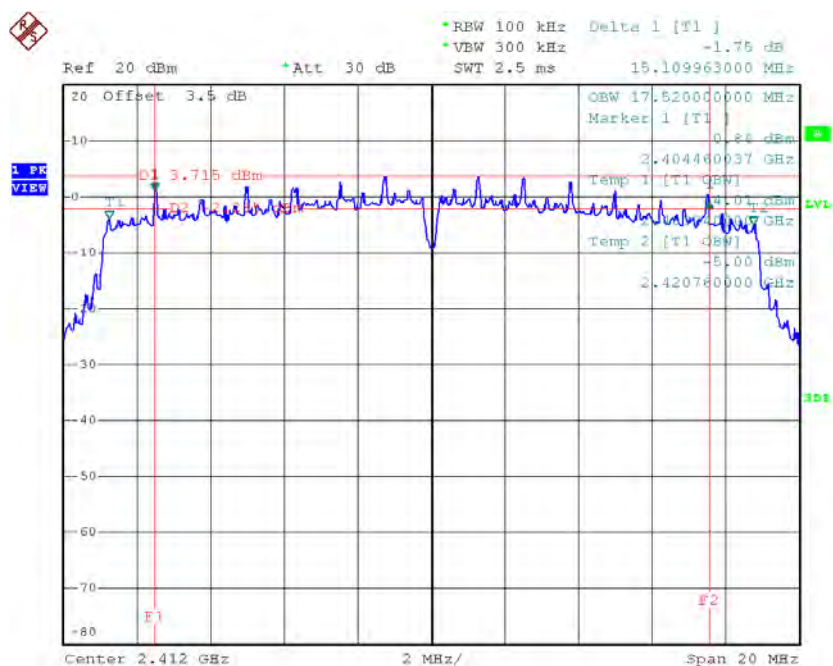


Date: 25.DEC.2016 13:35:10


Date: 25.DEC.2016 13:44:34

Date: 25-DEC-2016 13:45:50

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	35.16	35.76	500	Complies
2437	35.16	35.76	500	Complies
2452	35.16	35.84	500	Complies




TX CH06

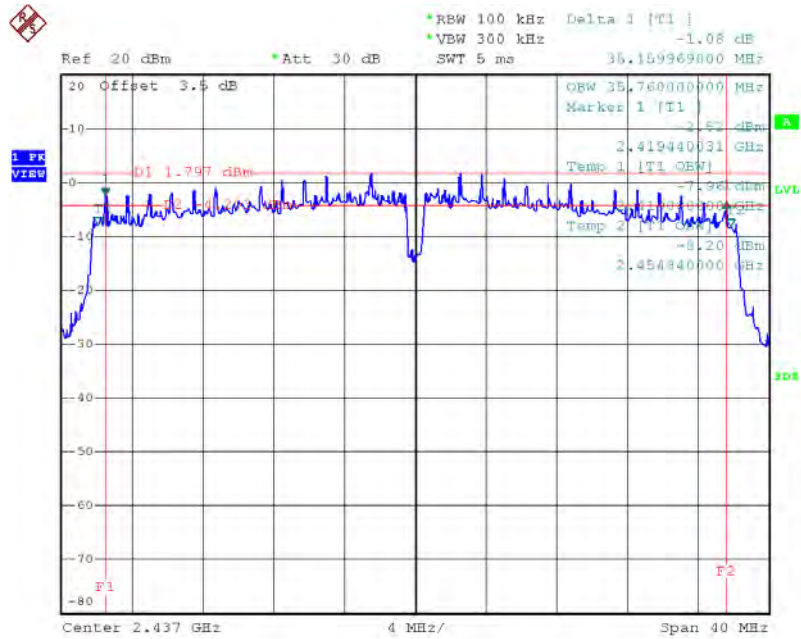

Date: 25.DEC.2016 13:49:15

TX CH09

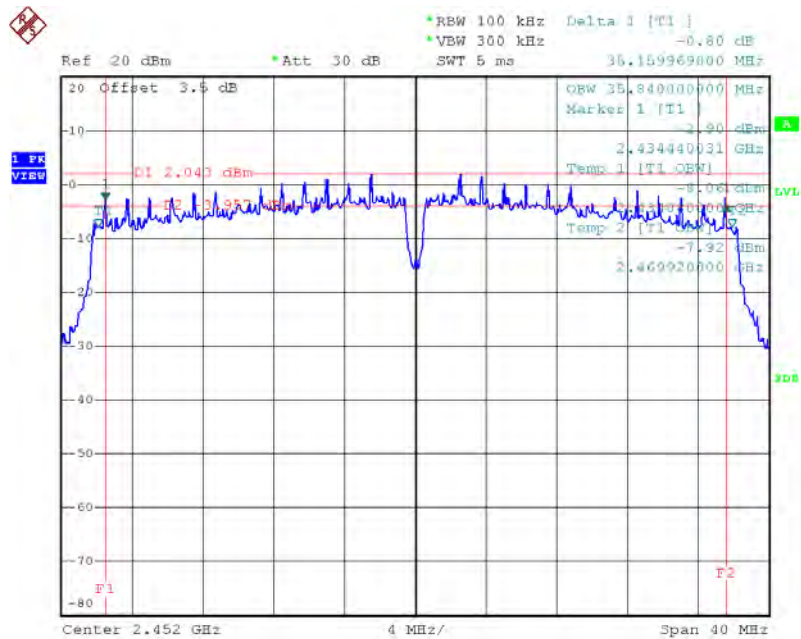

Date: 25.DEC.2016 13:50:35

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.08	0.05	30.00	1.00	Complies
2437	16.87	0.05	30.00	1.00	Complies
2462	16.92	0.05	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.53	0.04	30.00	1.00	Complies
2437	16.43	0.04	30.00	1.00	Complies
2462	16.38	0.04	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.82	0.10	30.00	1.00	Complies
2437	19.67	0.09	30.00	1.00	Complies
2462	19.67	0.09	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.51	0.28	30.00	1.00	Complies
2437	24.39	0.27	30.00	1.00	Complies
2462	24.26	0.27	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.13	0.26	30.00	1.00	Complies
2437	23.89	0.24	30.00	1.00	Complies
2462	23.84	0.24	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	27.33	0.54	30.00	1.00	Complies
2437	27.16	0.52	30.00	1.00	Complies
2462	27.07	0.51	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.98	0.31	30.00	1.00	Complies
2437	24.92	0.31	30.00	1.00	Complies
2462	25.04	0.32	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.64	0.23	30.00	1.00	Complies
2437	23.74	0.24	30.00	1.00	Complies
2462	23.80	0.24	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	27.37	0.55	30.00	1.00	Complies
2437	27.38	0.55	30.00	1.00	Complies
2462	27.47	0.56	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	24.76	0.30	30.00	1.00	Complies
2437	24.50	0.28	30.00	1.00	Complies
2452	24.54	0.28	30.00	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	24.17	0.26	30.00	1.00	Complies
2437	24.01	0.25	30.00	1.00	Complies
2452	24.09	0.26	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	27.49	0.56	30.00	1.00	Complies
2437	27.27	0.53	30.00	1.00	Complies
2452	27.33	0.54	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : TX B Mode_ANT 1

TX B mode CH01

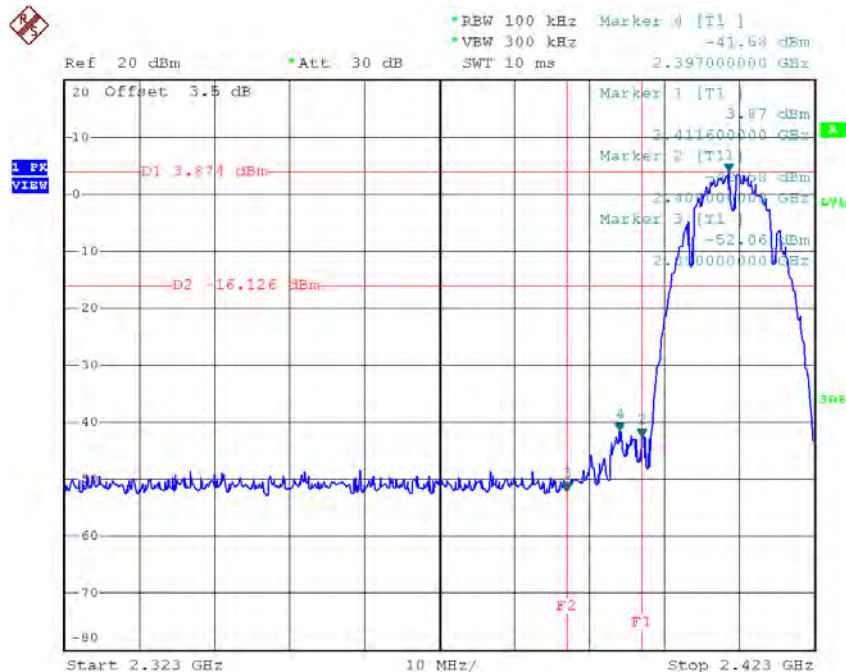


Date: 25.DEC.2016 13:14:02

TX B mode CH11

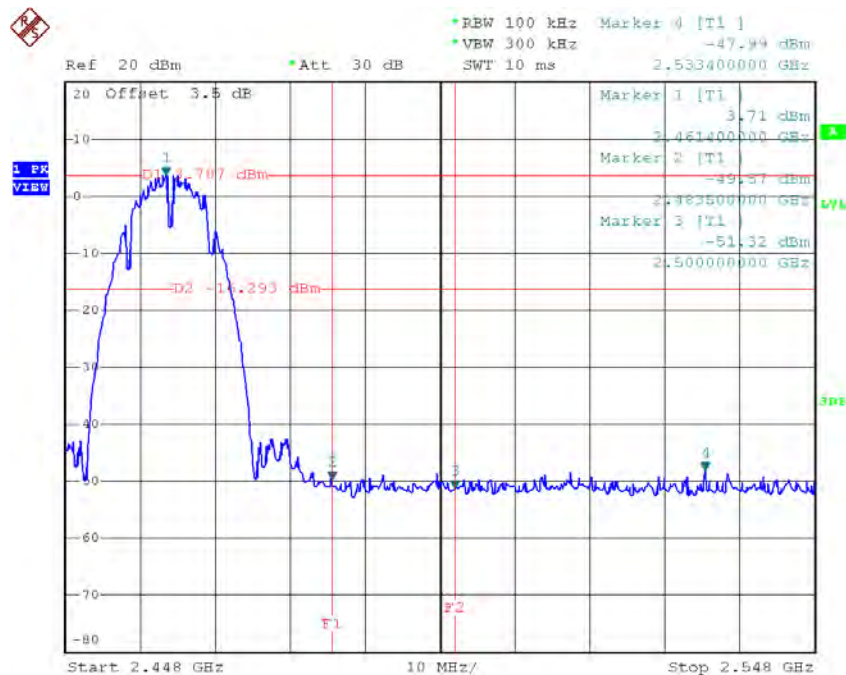


Date: 25.DEC.2016 13:19:37


TX B mode CH01 (10 Harmonic of the frequency)

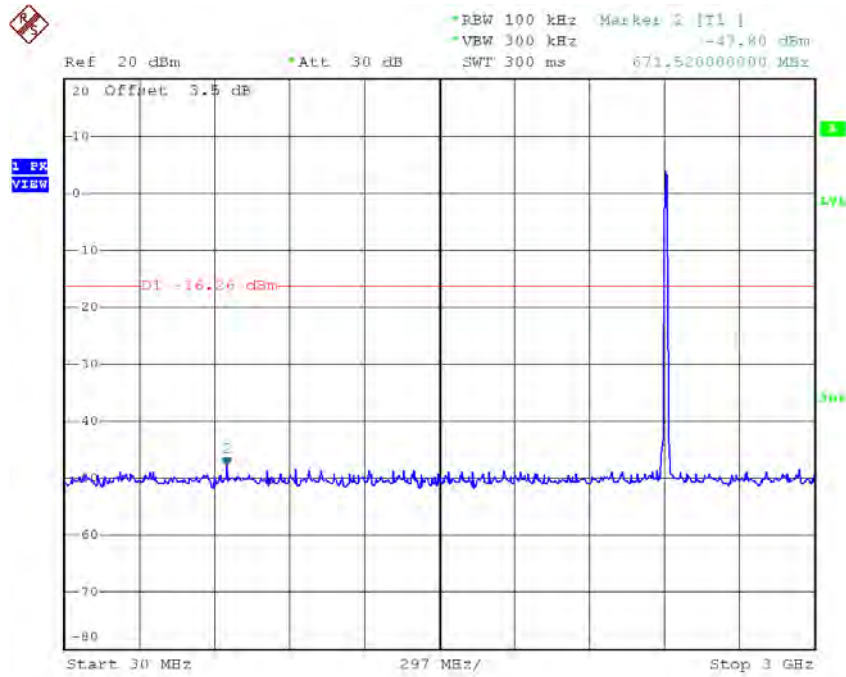

Date: 25.DEC.2016 13:13:37

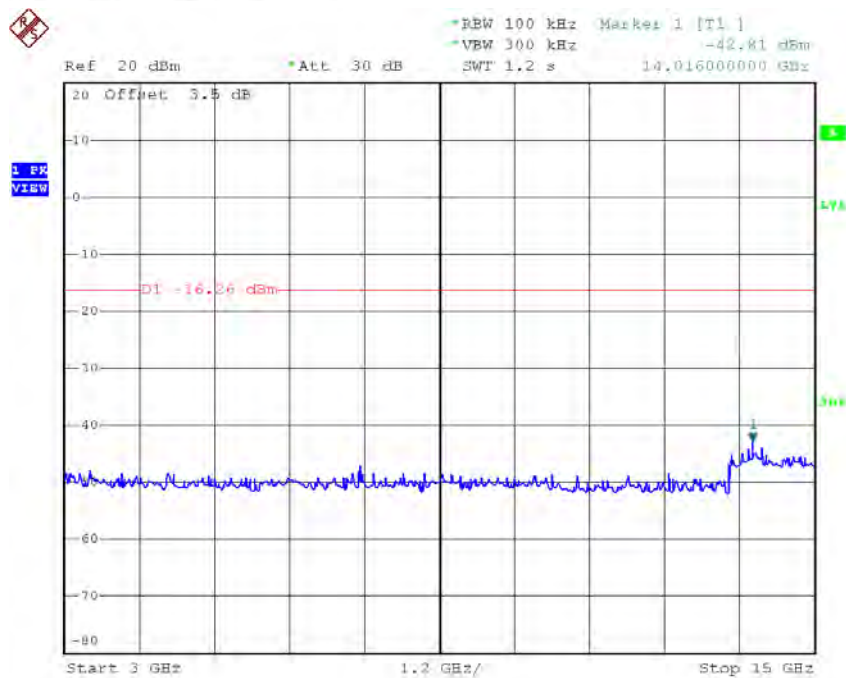


Date: 25.DEC.2016 13:13:46

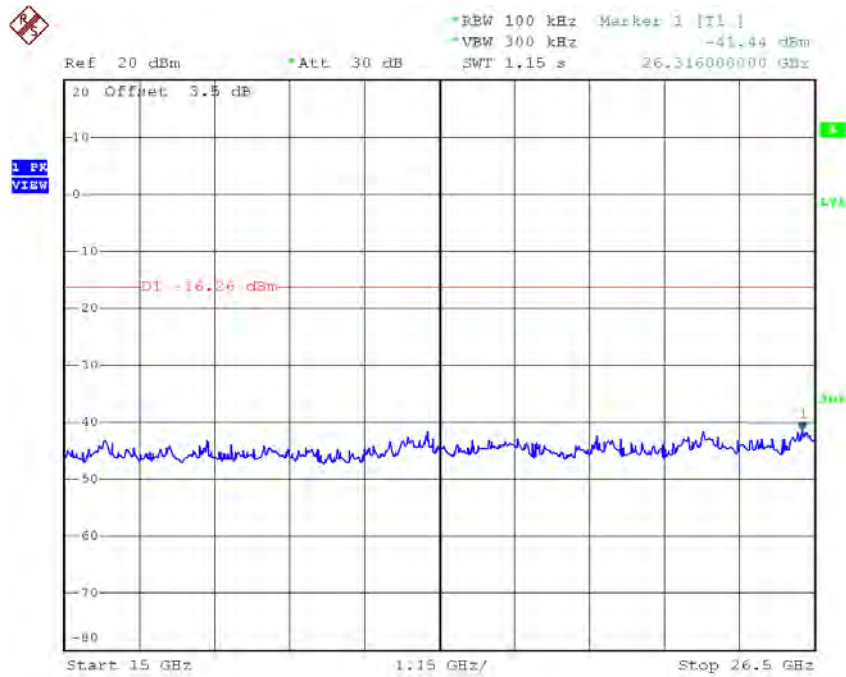


Date: 25.DEC.2016 13:13:54


TX B mode CH06 (10 Harmonic of the frequency)

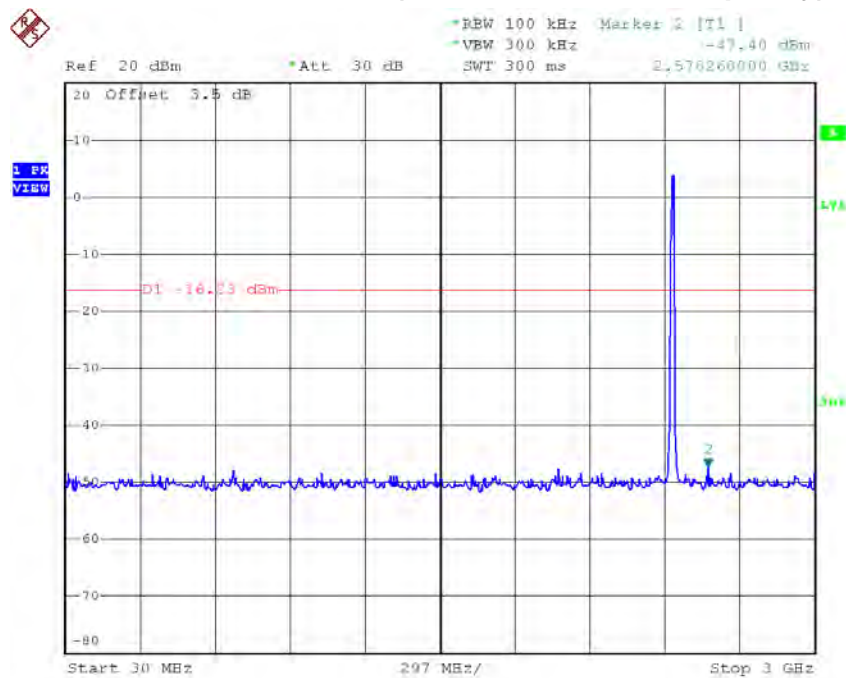

Date: 25.DEC.2016 13:15:39

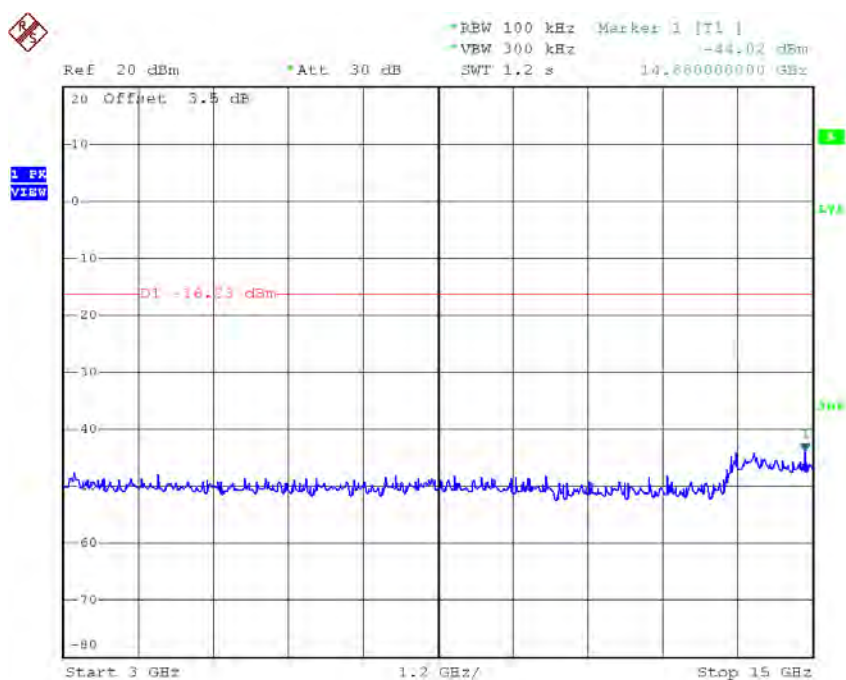


Date: 25.DEC.2016 13:15:47

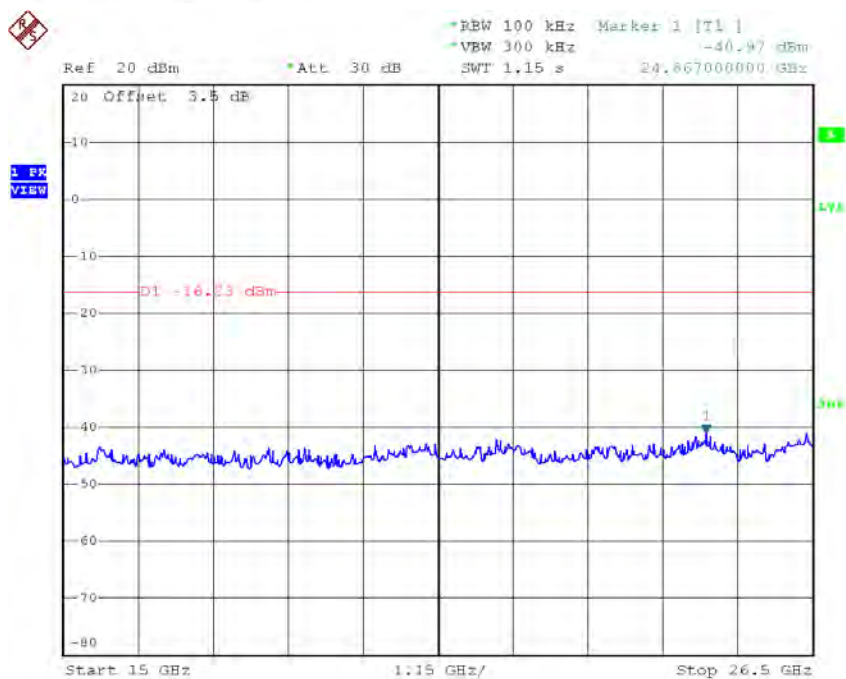


Date: 25.DEC.2016 13:15:56


TX B mode CH11 (10 Harmonic of the frequency)

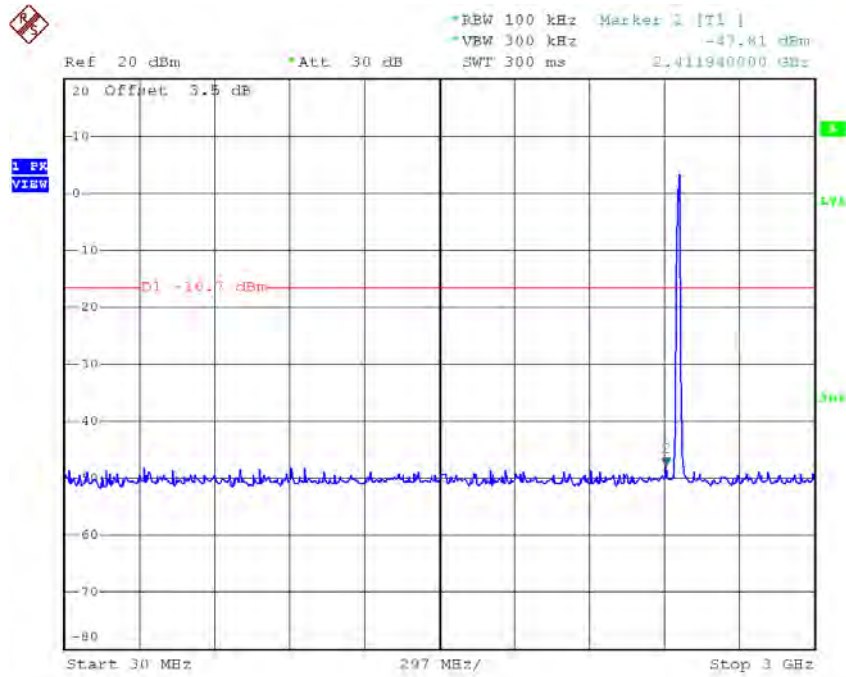

Date: 25.DEC.2016 13:19:13

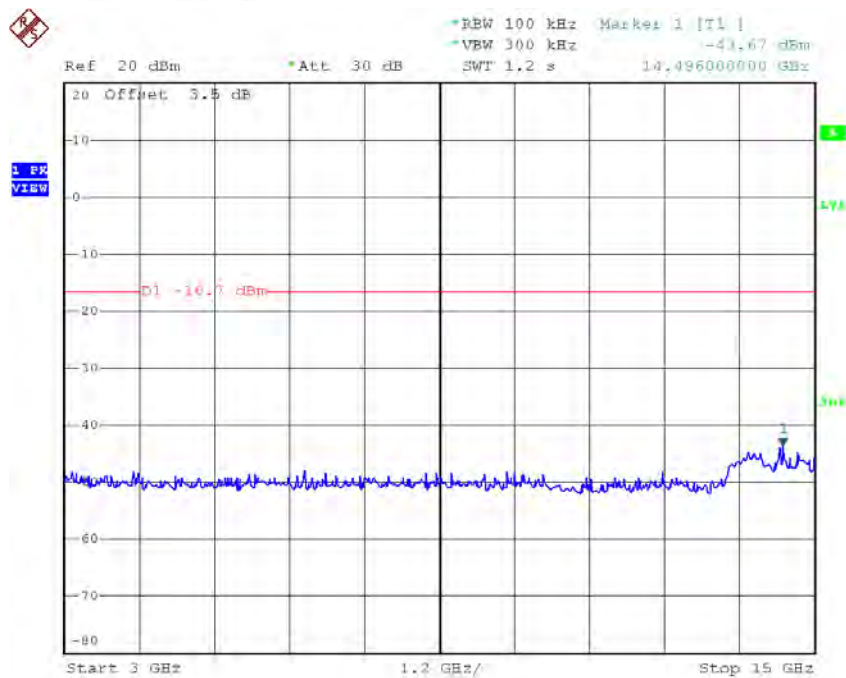


Date: 25.DEC.2016 13:19:21

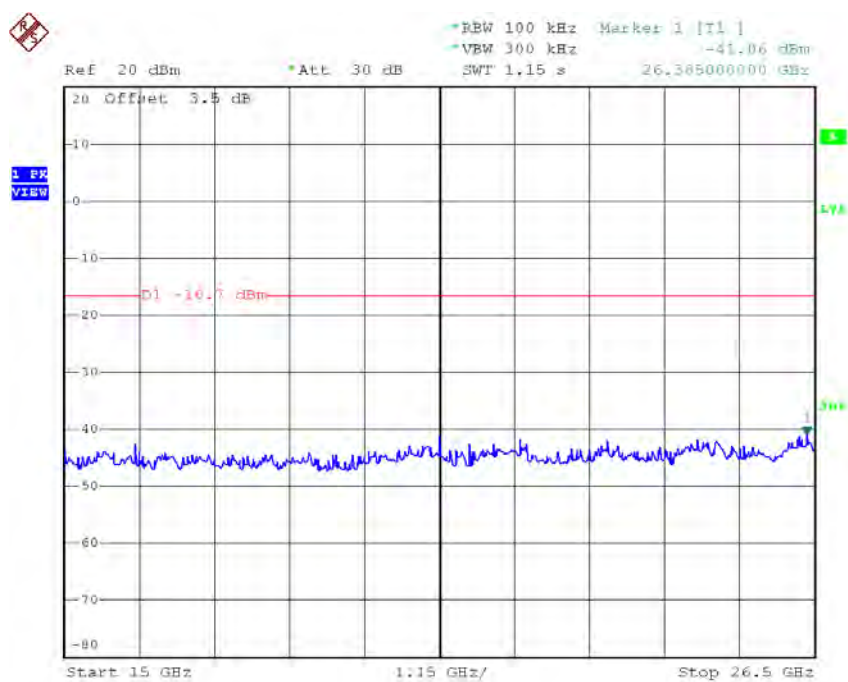

Date: 25.DEC.2016 13:19:30


Test Mode : TX B Mode_ANT 2

TX B mode CH01

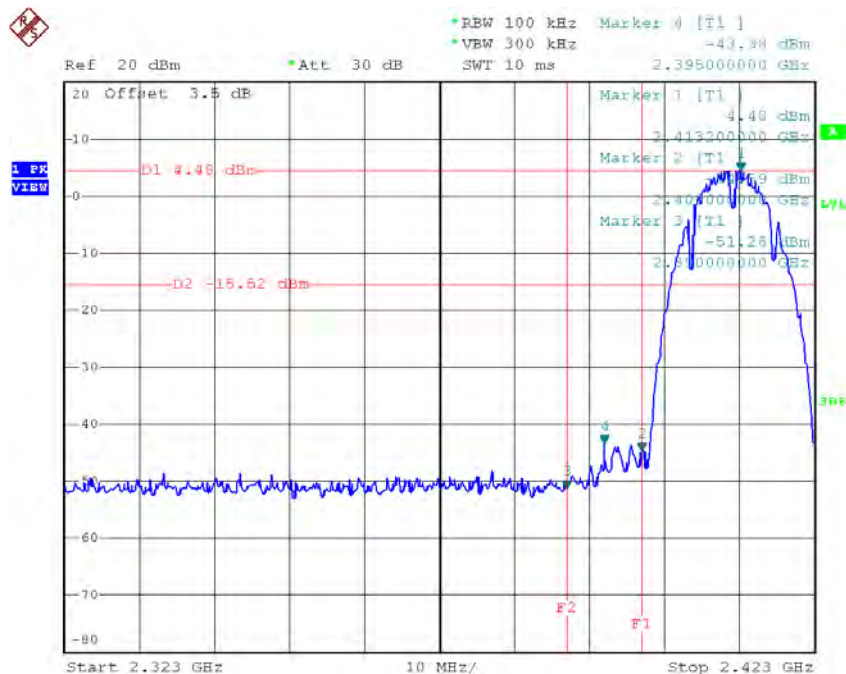


Date: 10.JAN.2017 10:12:46

TX B mode CH11

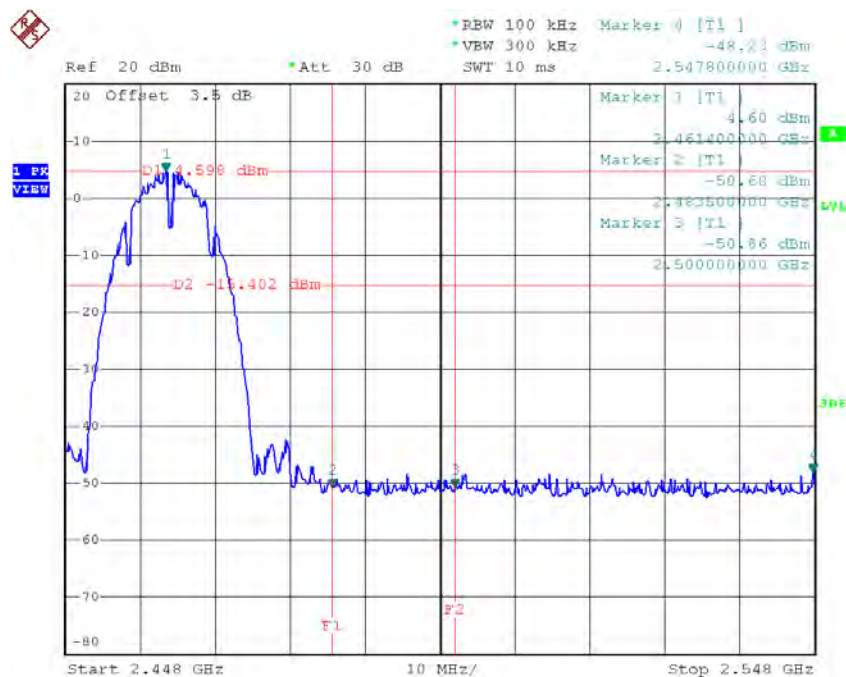


Date: 10.JAN.2017 10:17:02


TX B mode CH01 (10 Harmonic of the frequency)

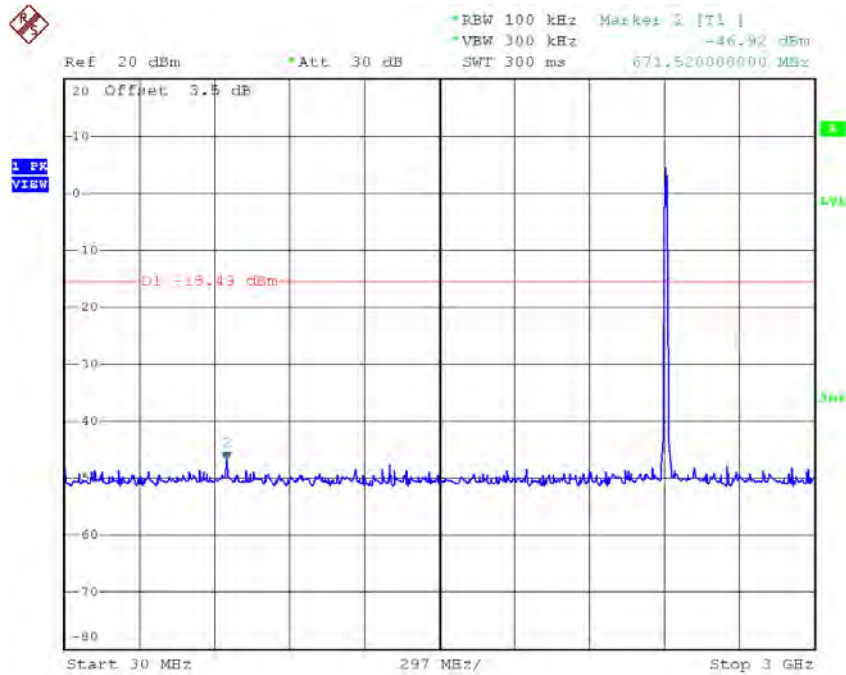

Date: 10.JAN.2017 10:12:21

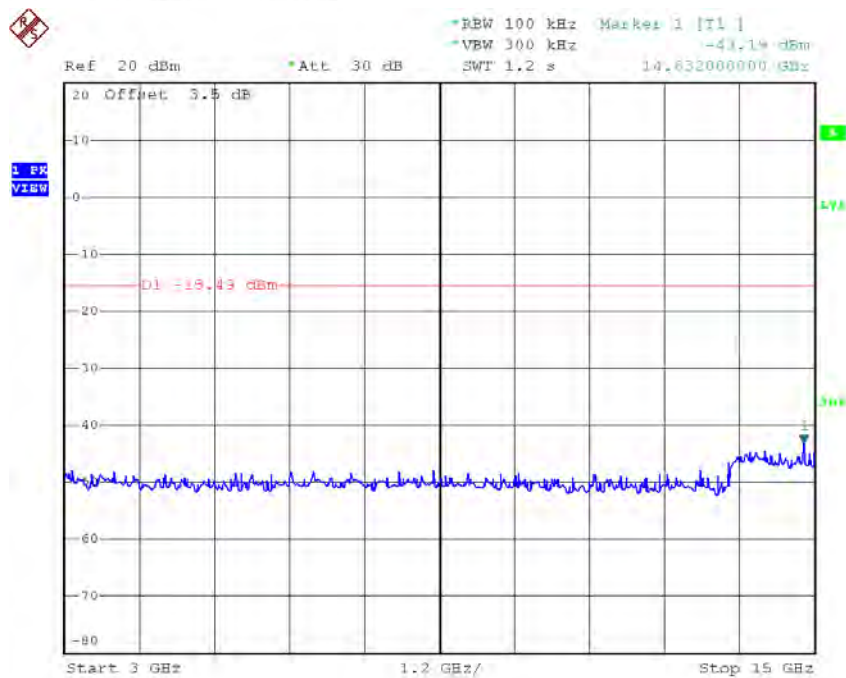


Date: 10.JAN.2017 10:12:30

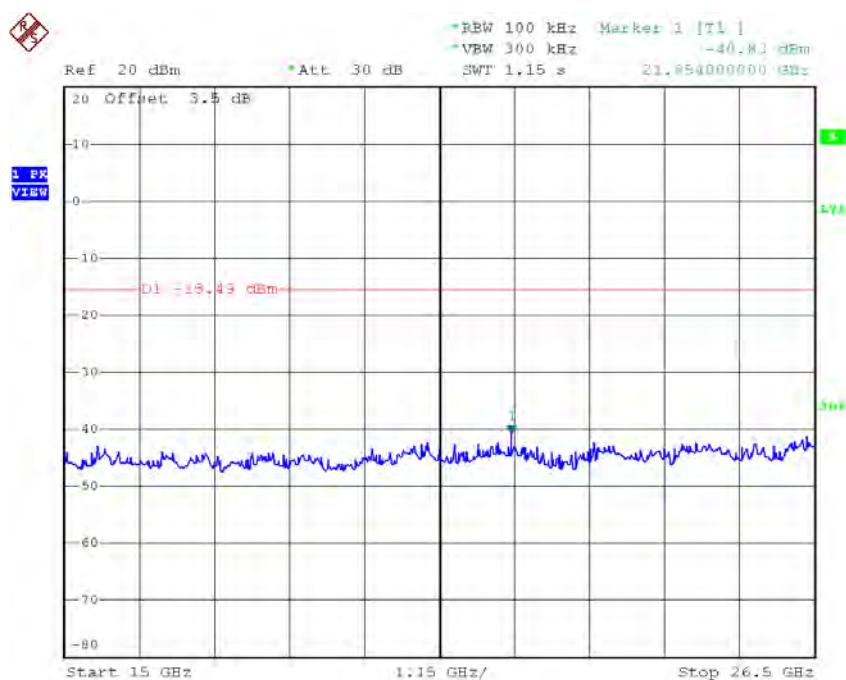


Date: 10.JAN.2017 10:12:38


TX B mode CH06 (10 Harmonic of the frequency)

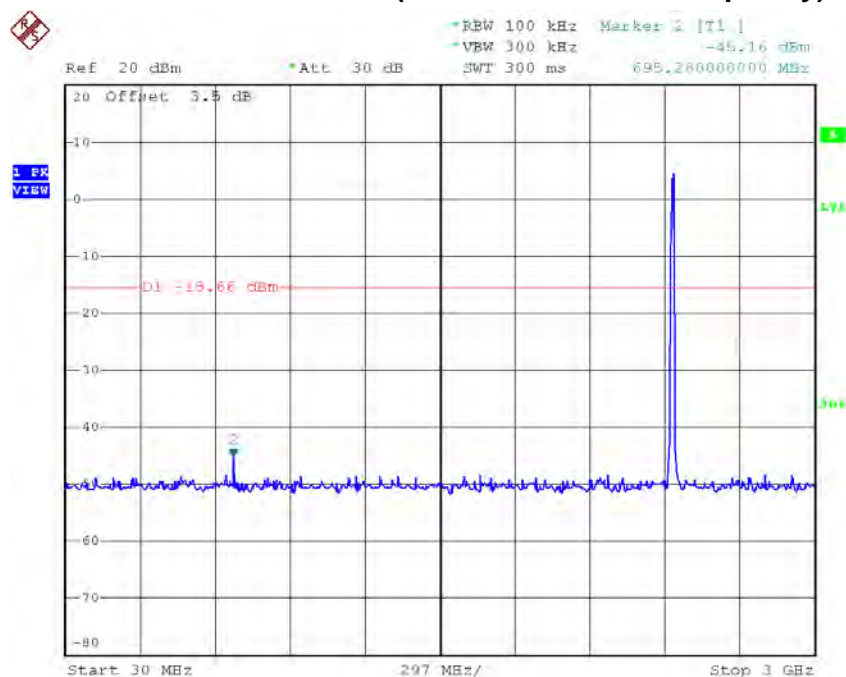

Date: 10.JAN.2017 10:14:51

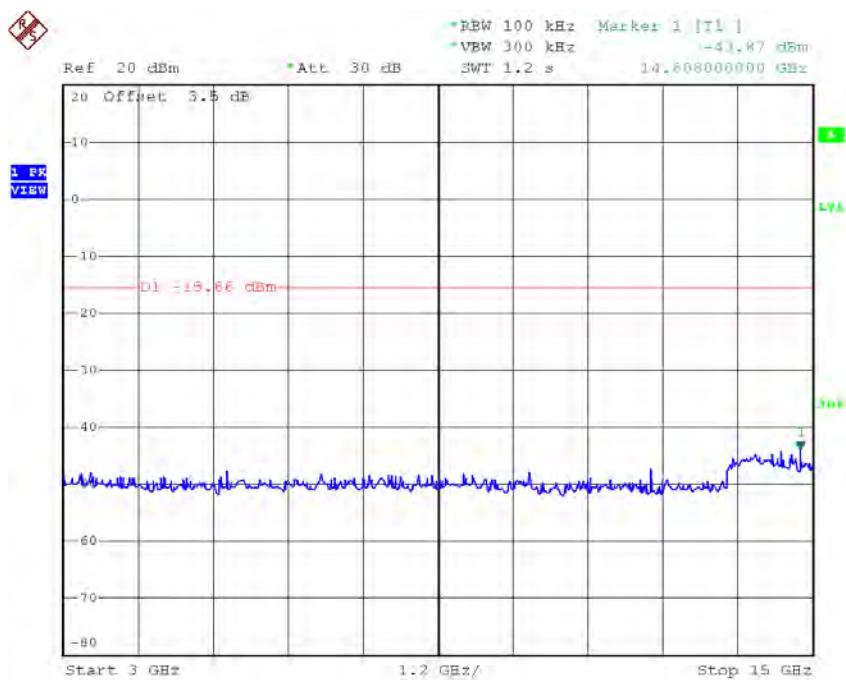


Date: 10.JAN.2017 10:14:59

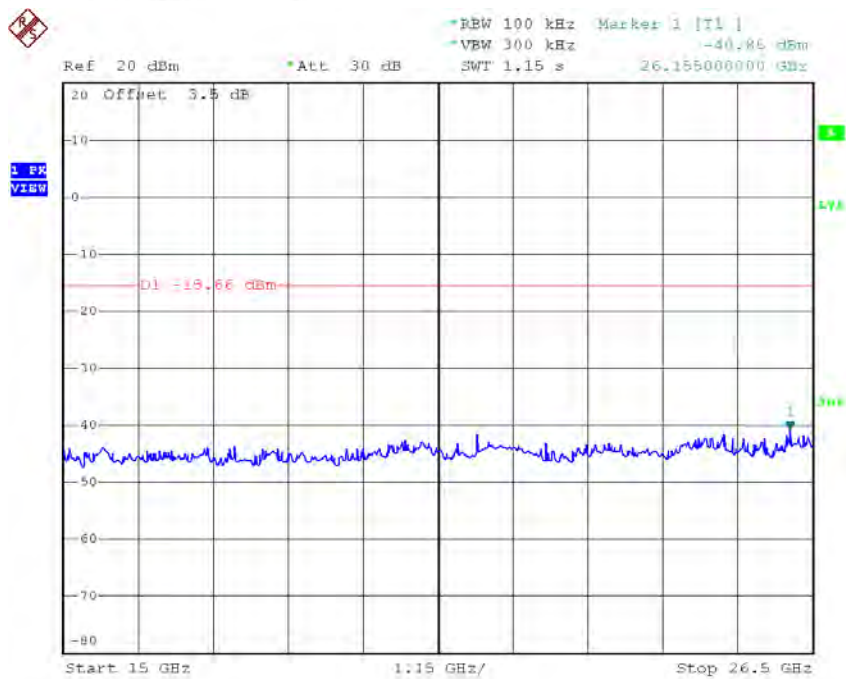


Date: 10.JAN.2017 10:15:08


TX B mode CH11 (10 Harmonic of the frequency)

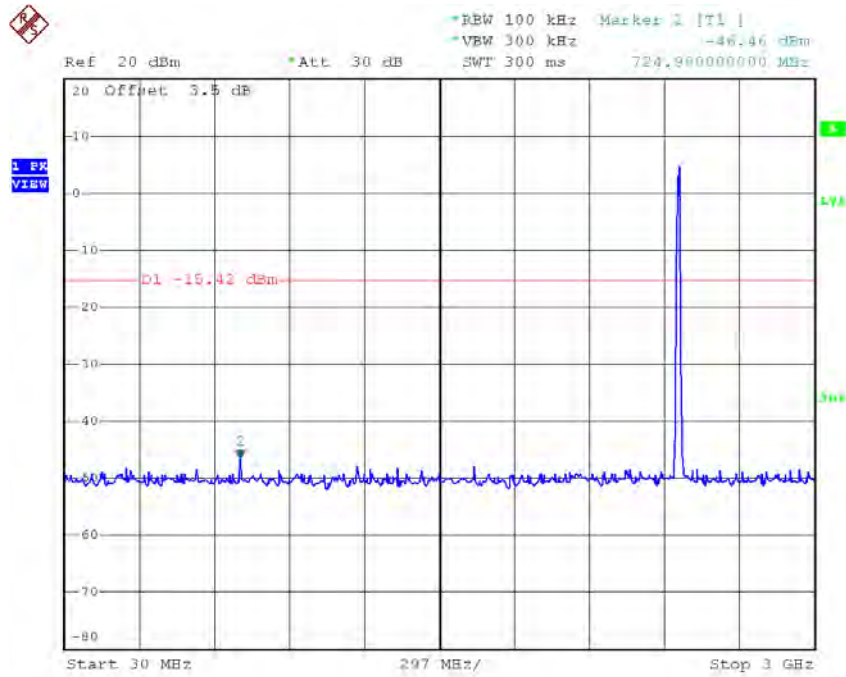

Date: 10.JAN.2017 10:16:37

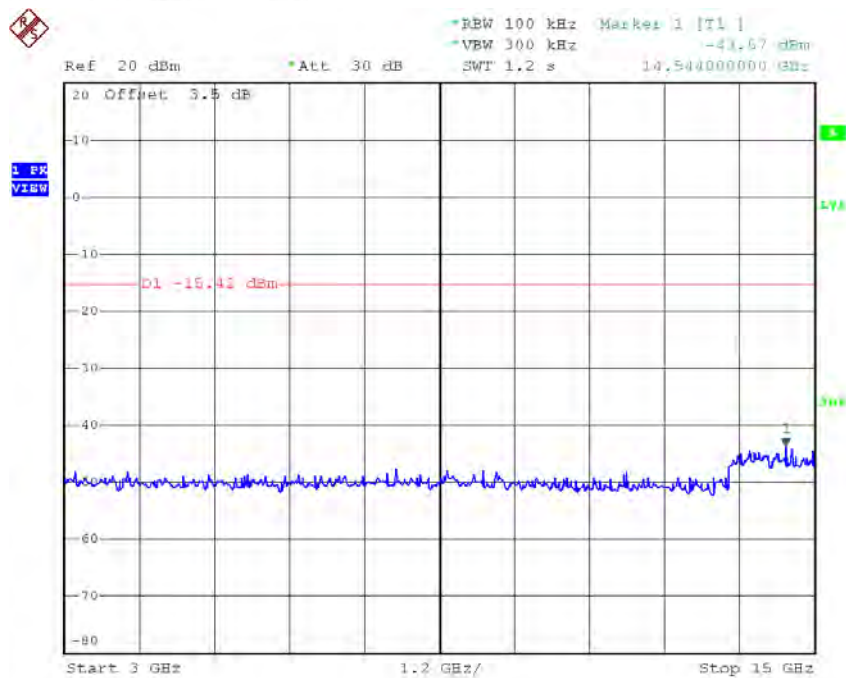


Date: 10.JAN.2017 10:16:45

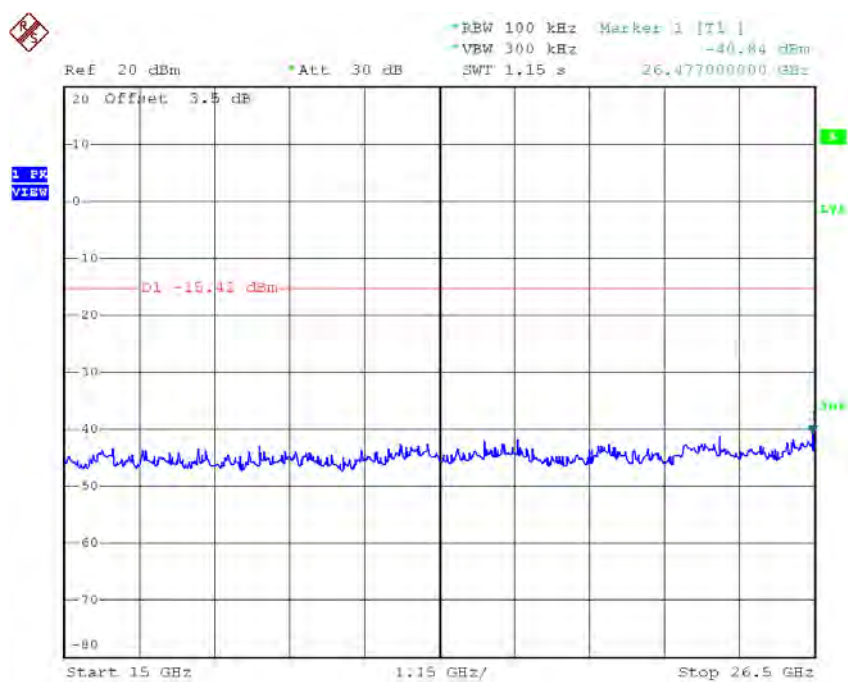

Date: 10.JAN.2017 10:16:54


Test Mode : TX G Mode_ANT 1

TX G mode CH01

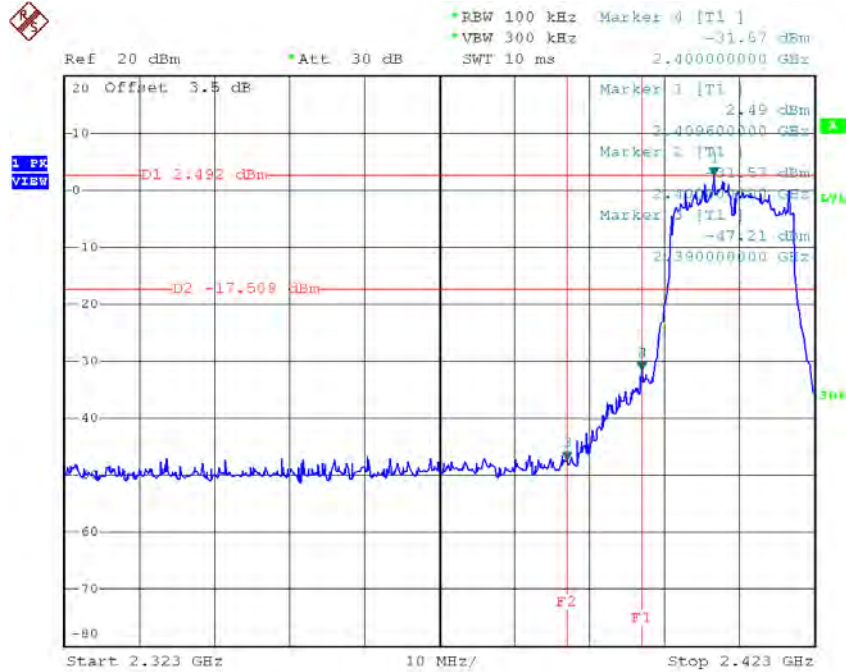


Date: 25.DEC.2016 13:28:43

TX G mode CH11

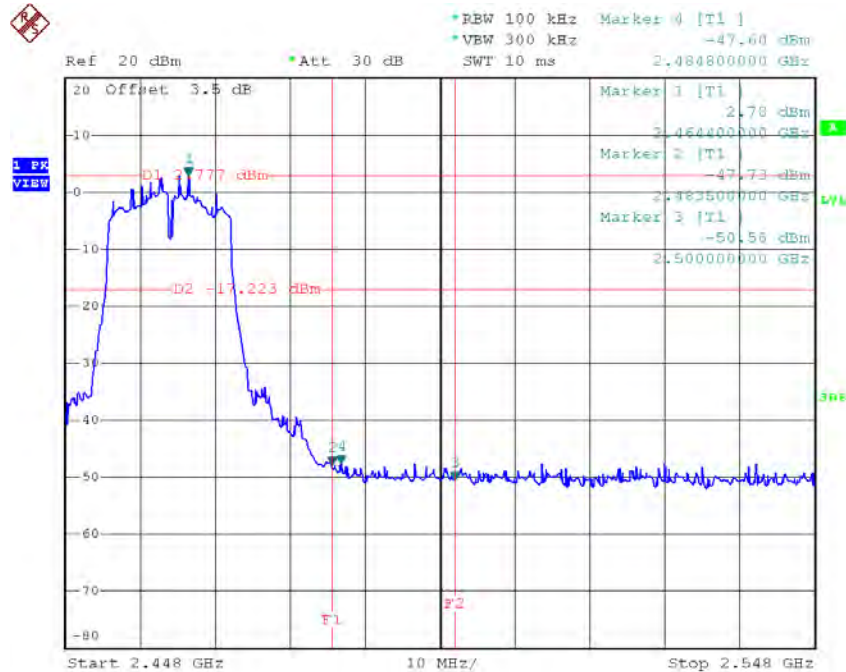


Date: 25.DEC.2016 13:34:17


TX G mode CH01 (10 Harmonic of the frequency)

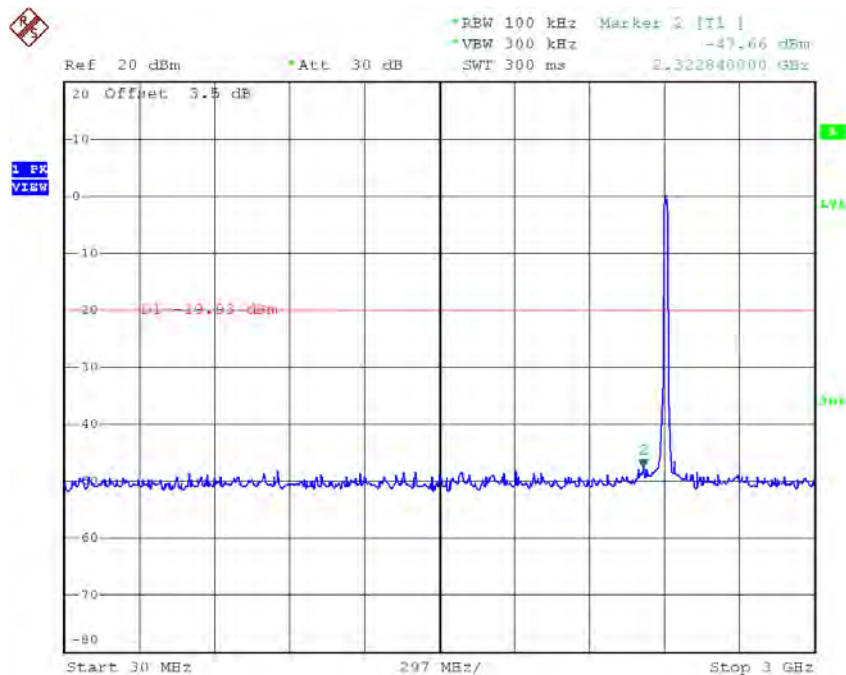

Date: 25.DEC.2016 13:28:18

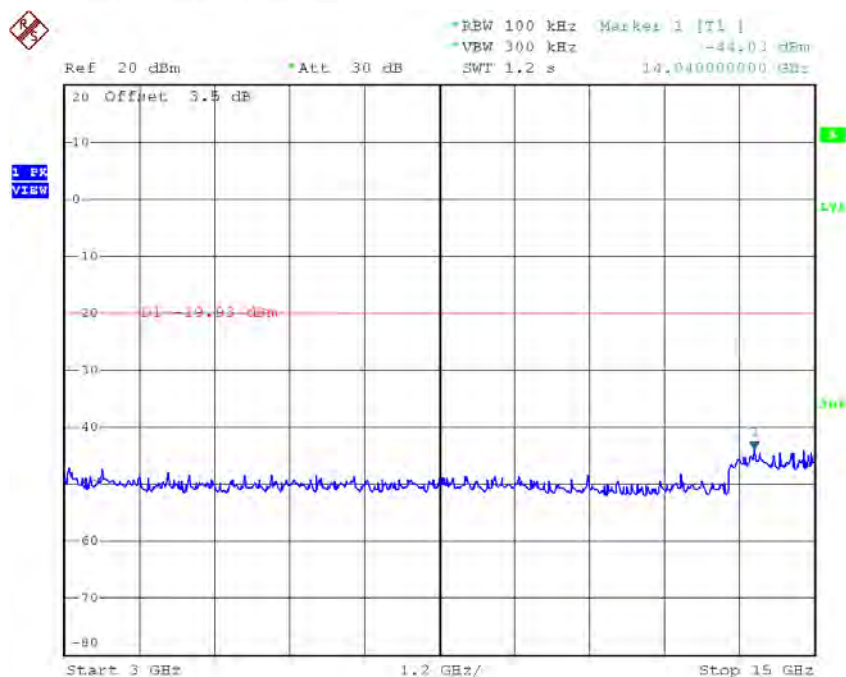


Date: 25.DEC.2016 13:28:27

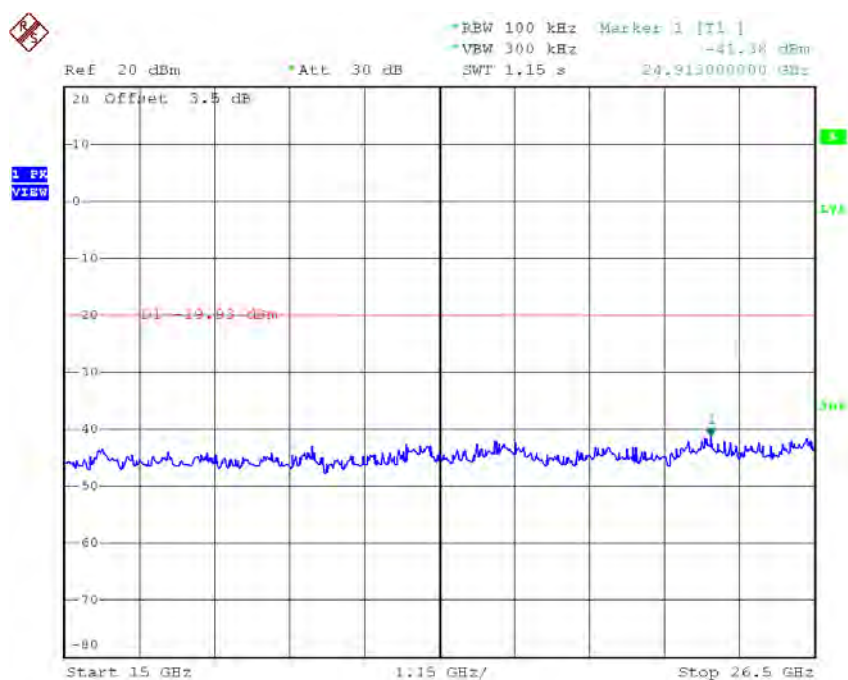


Date: 25.DEC.2016 13:28:35


TX G mode CH06 (10 Harmonic of the frequency)

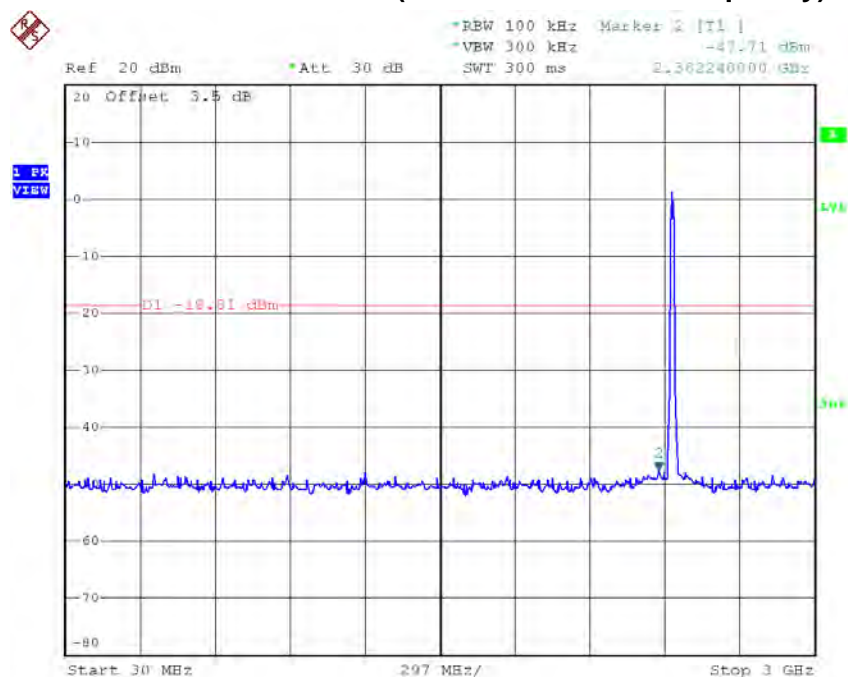

Date: 25.DEC.2016 13:32:23

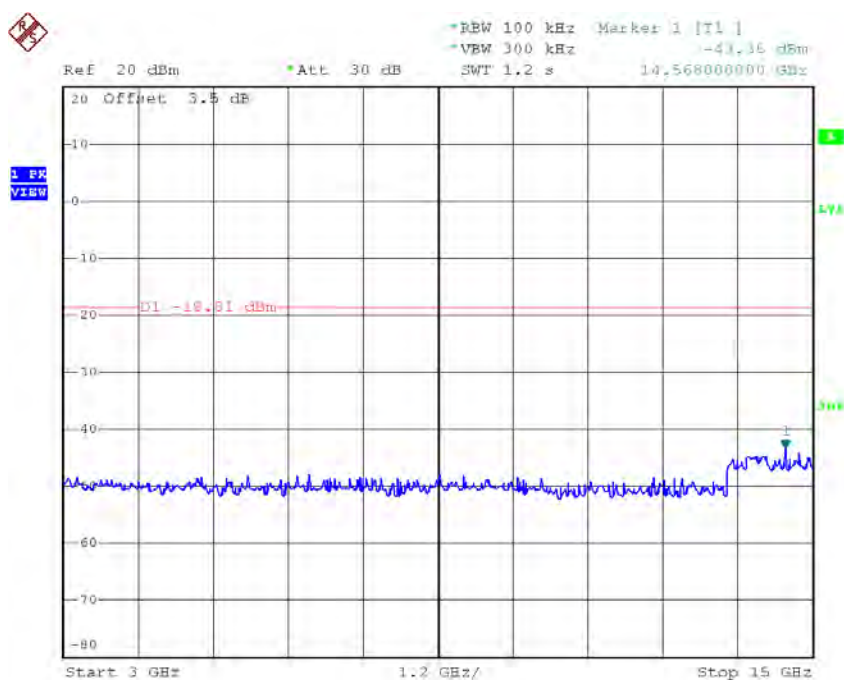


Date: 25.DEC.2016 13:32:32

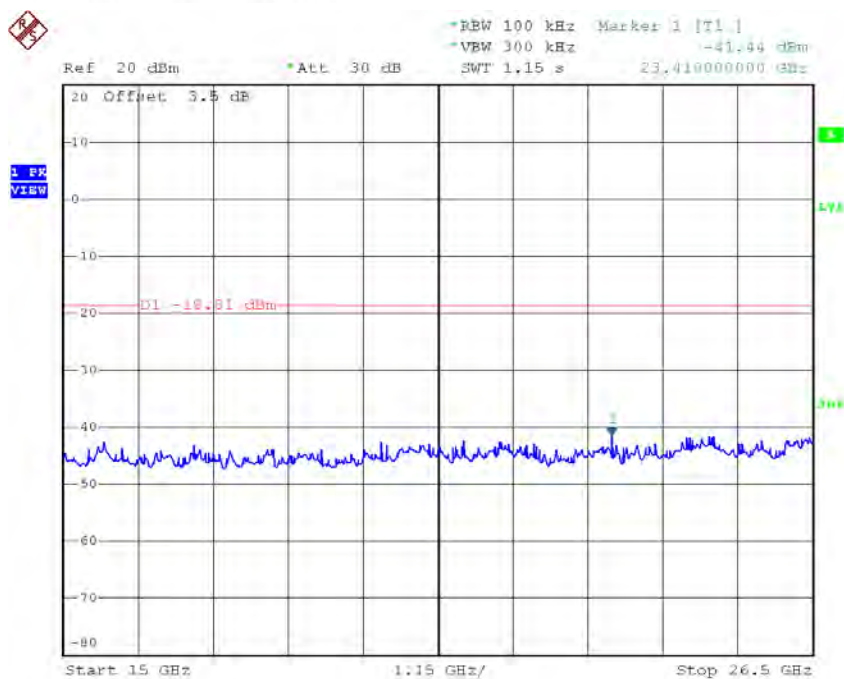


Date: 25.DEC.2016 13:32:40


TX G mode CH11 (10 Harmonic of the frequency)

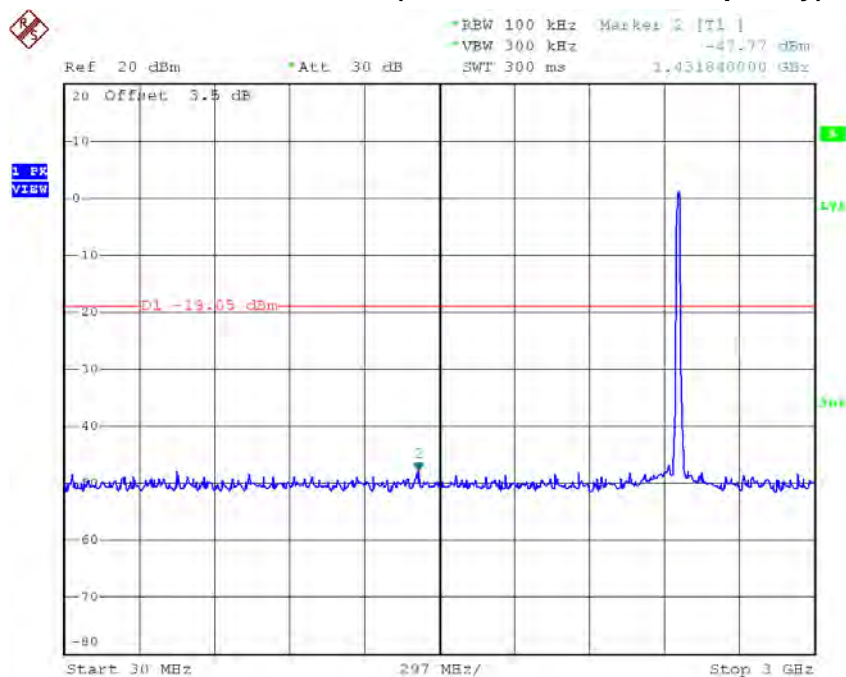

Date: 25.DEC.2016 13:33:52

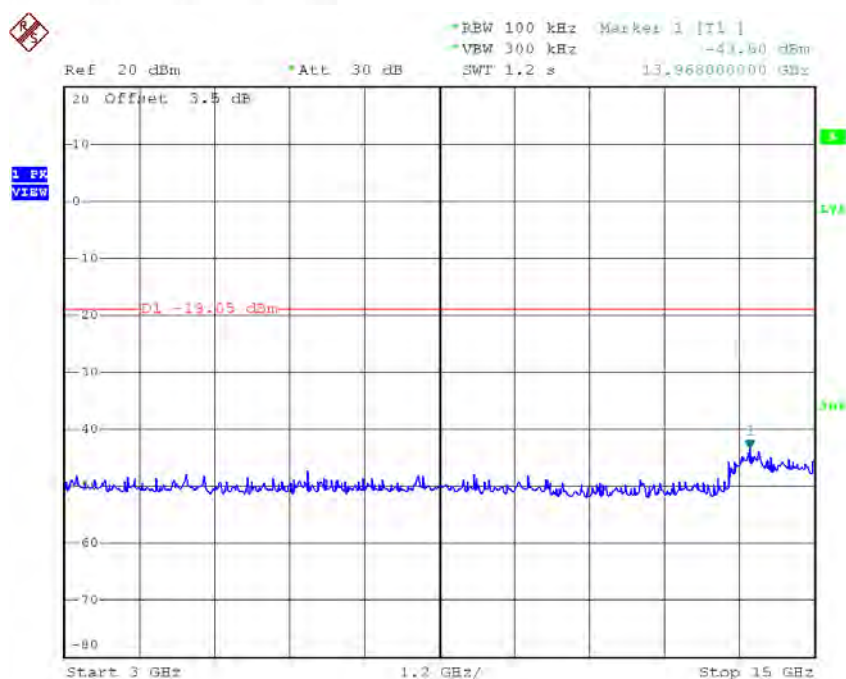


Date: 25.DEC.2016 13:34:01

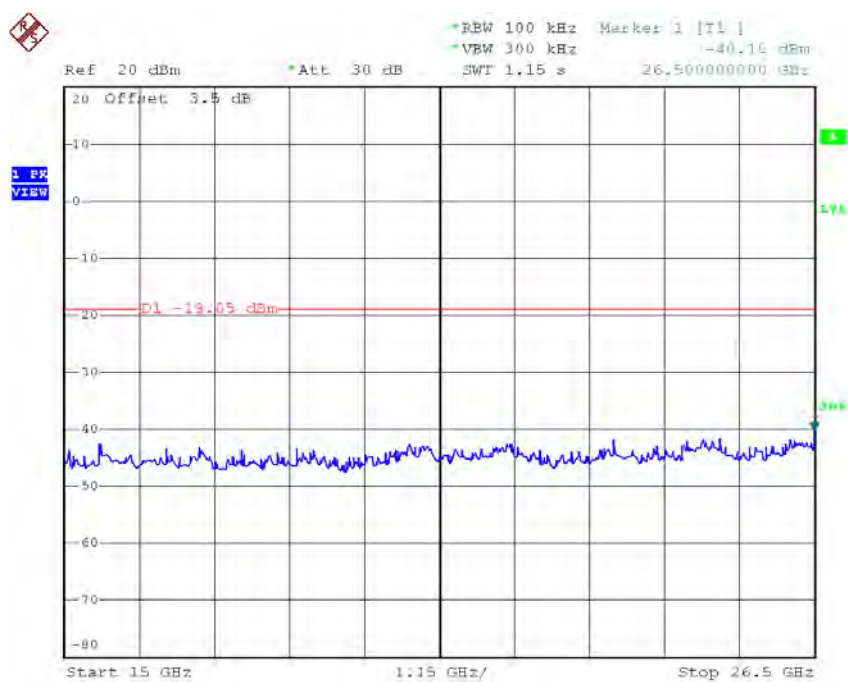

Date: 25.DEC.2016 13:34:09


Test Mode : TX G Mode_ANT 2

TX G mode CH01

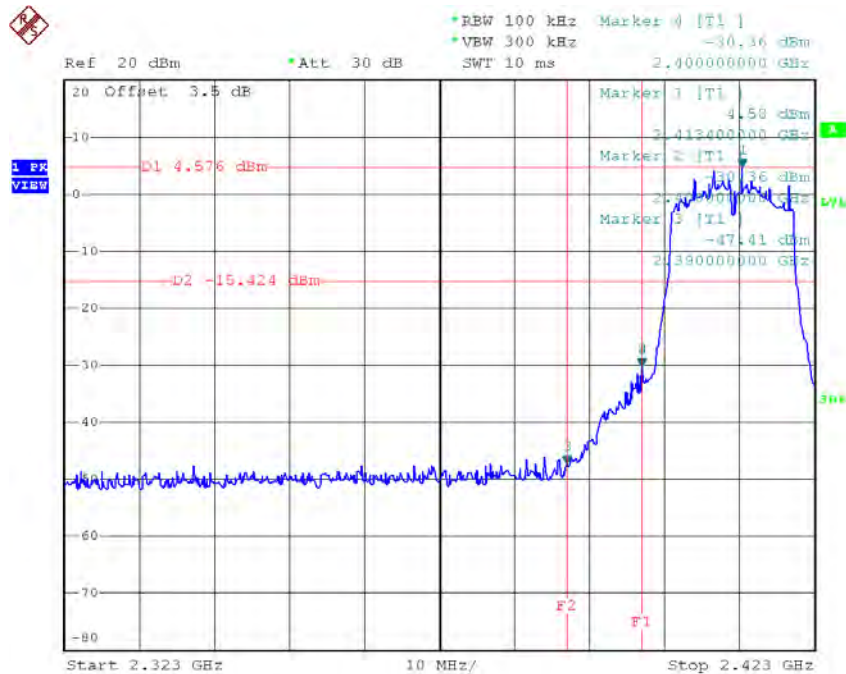


Date: 10.JAN.2017 10:20:01

TX G mode CH11

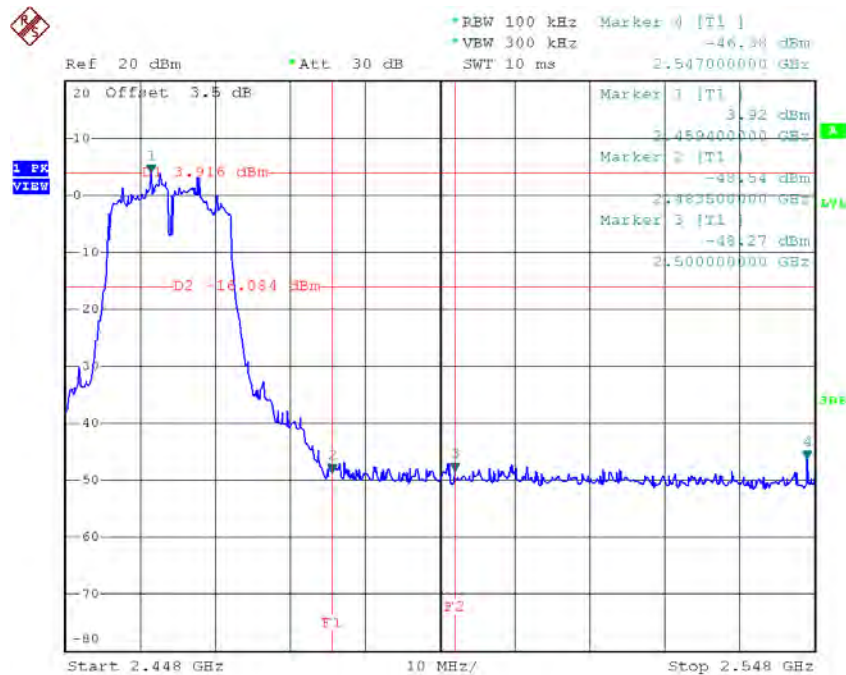


Date: 10.JAN.2017 10:23:42


TX G mode CH01 (10 Harmonic of the frequency)

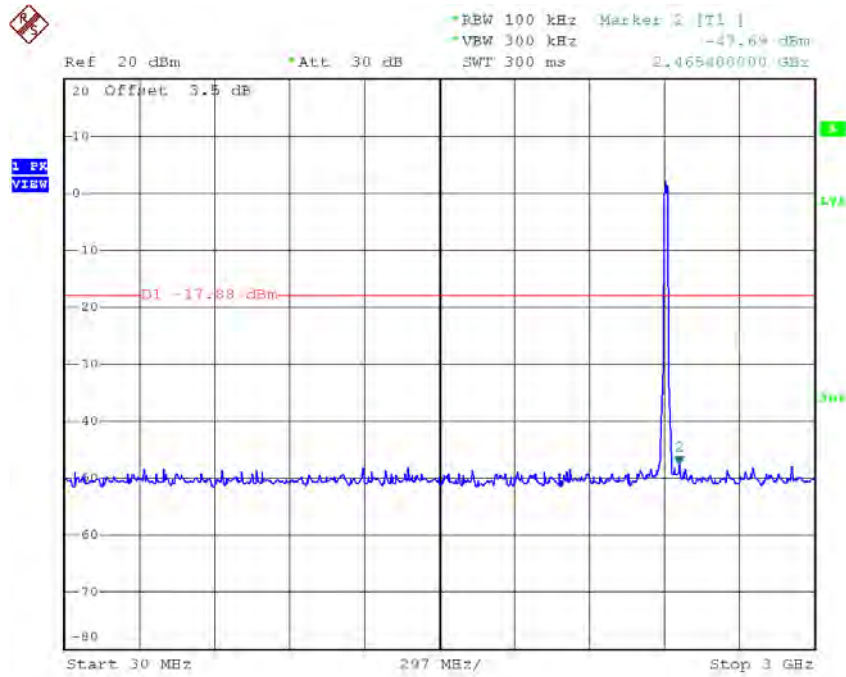

Date: 10.JAN.2017 10:19:37

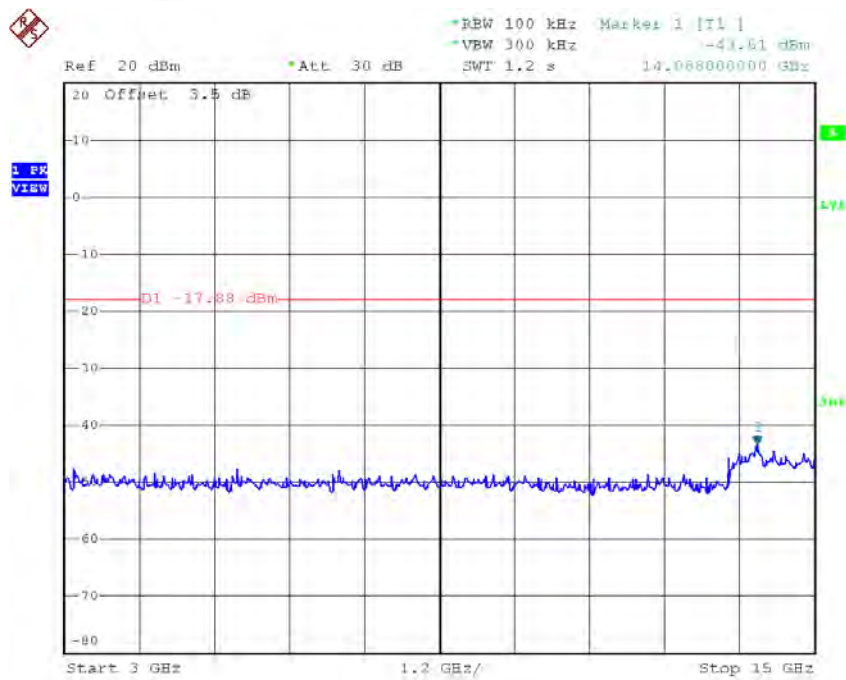


Date: 10.JAN.2017 10:19:45

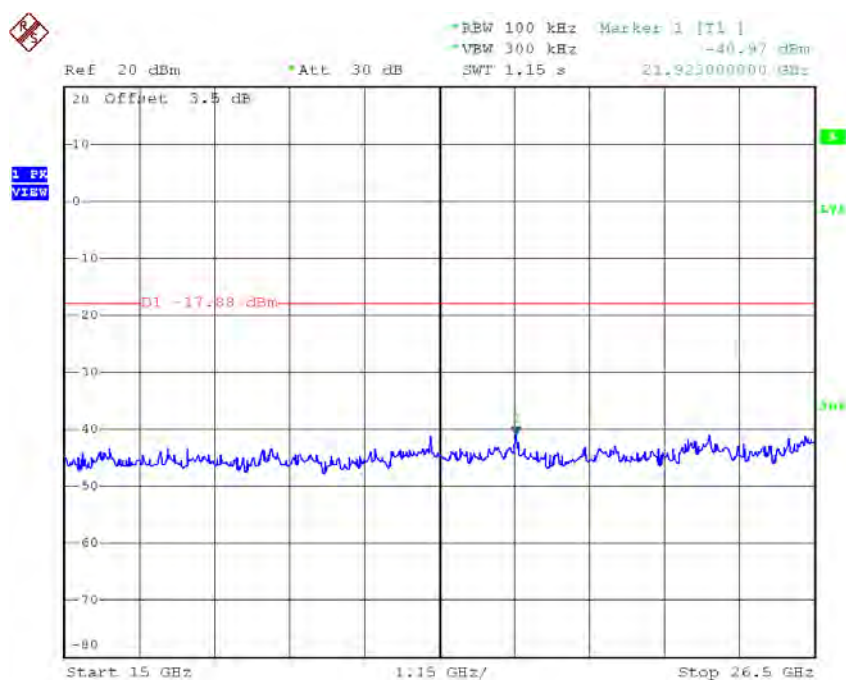


Date: 10.JAN.2017 10:19:53


TX G mode CH06 (10 Harmonic of the frequency)

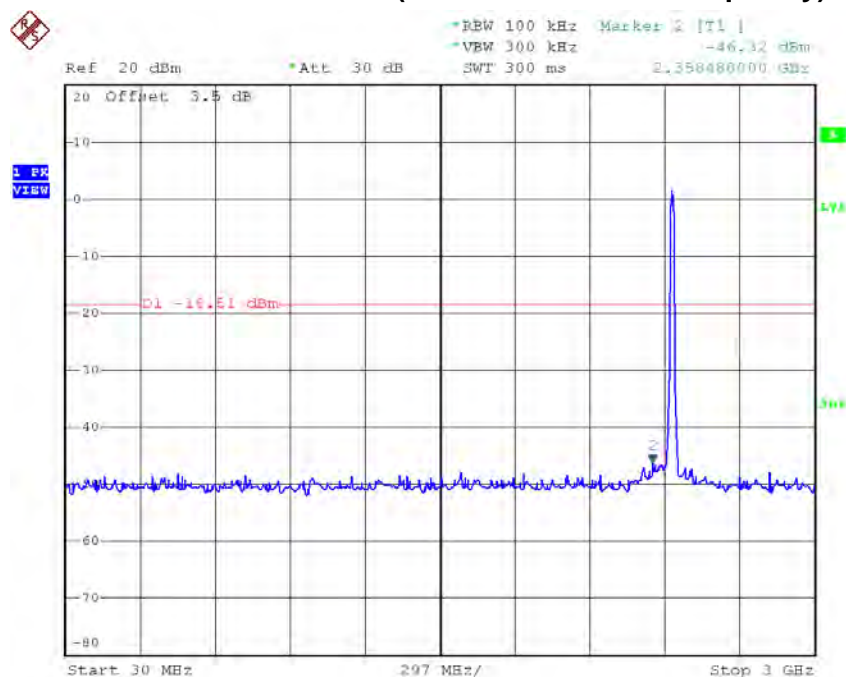

Date: 10.JAN.2017 10:21:38

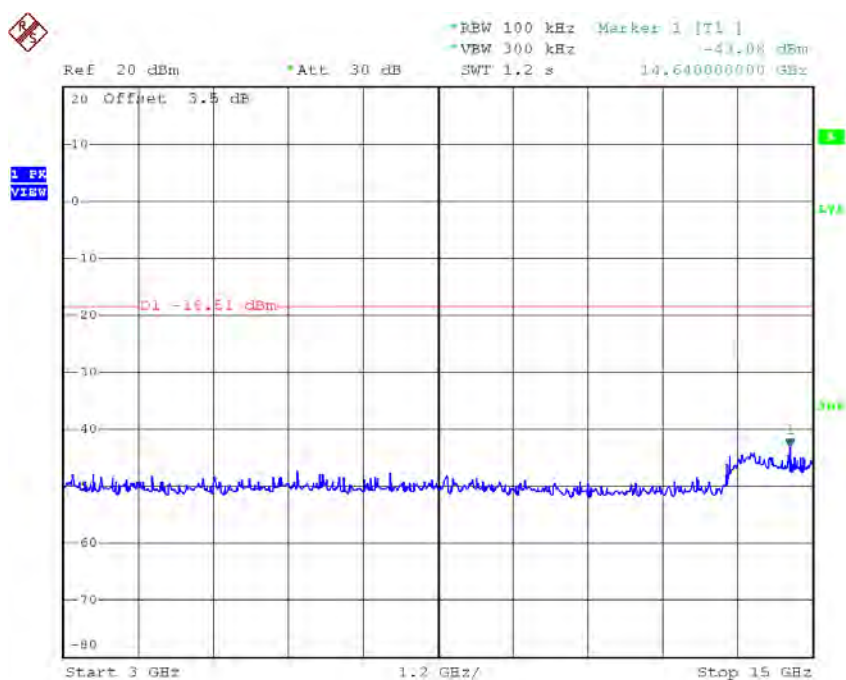


Date: 10.JAN.2017 10:21:46

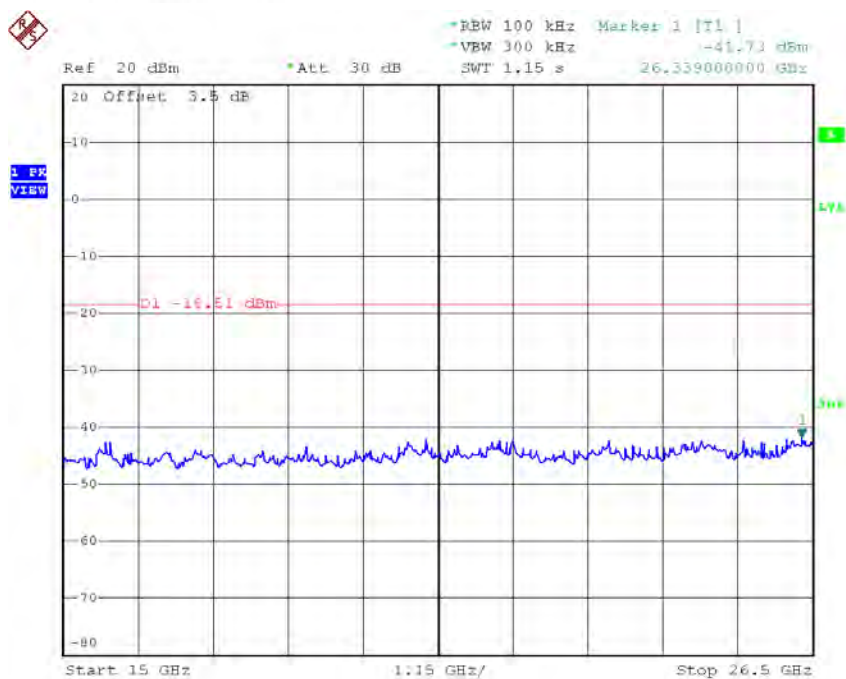


Date: 10.JAN.2017 10:21:54


TX G mode CH11 (10 Harmonic of the frequency)

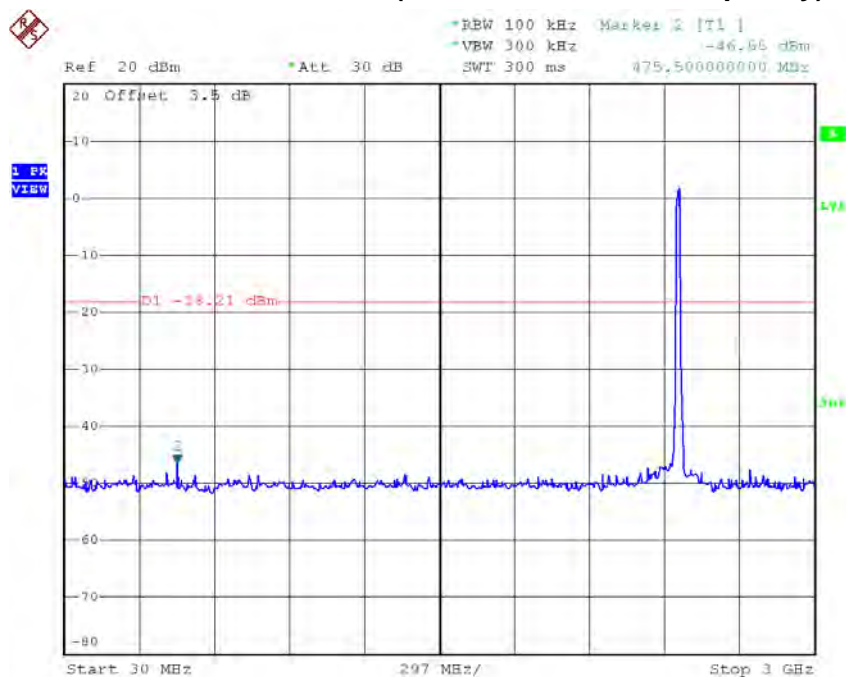

Date: 10.JAN.2017 10:23:18

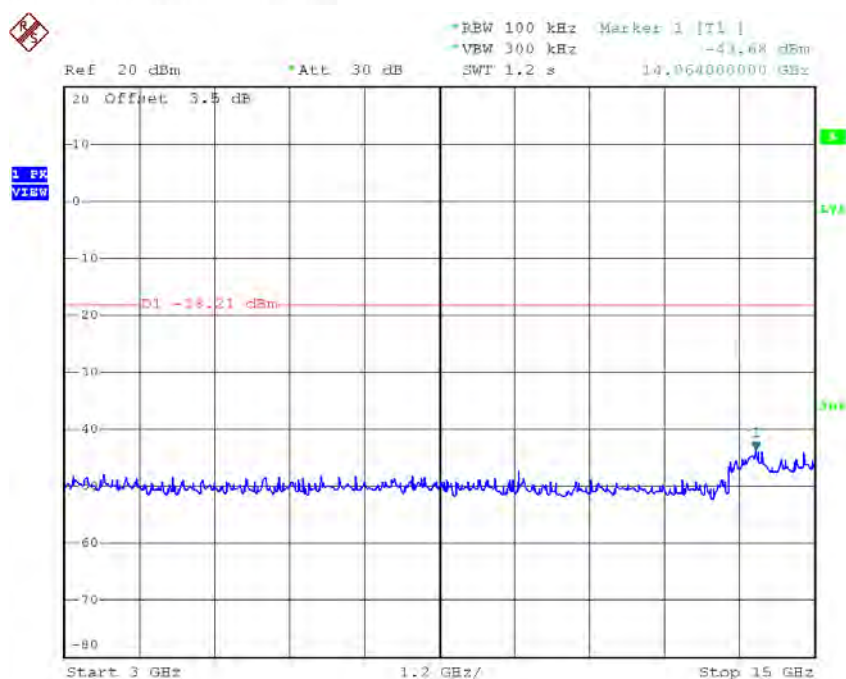


Date: 10.JAN.2017 10:23:26

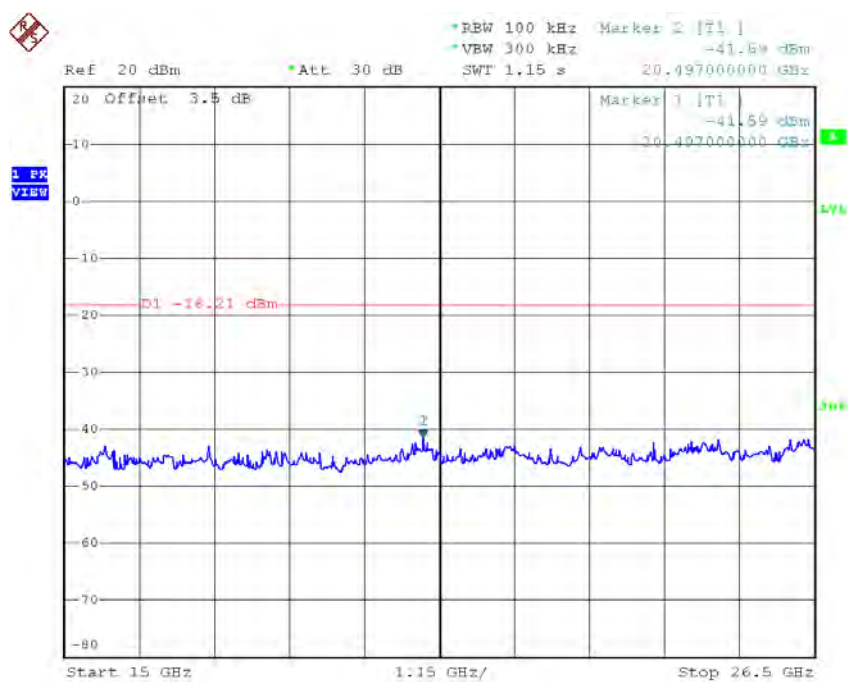

Date: 10.JAN.2017 10:23:35


Test Mode : TX N-20M Mode_ANT 1

TX HT20 mode CH01

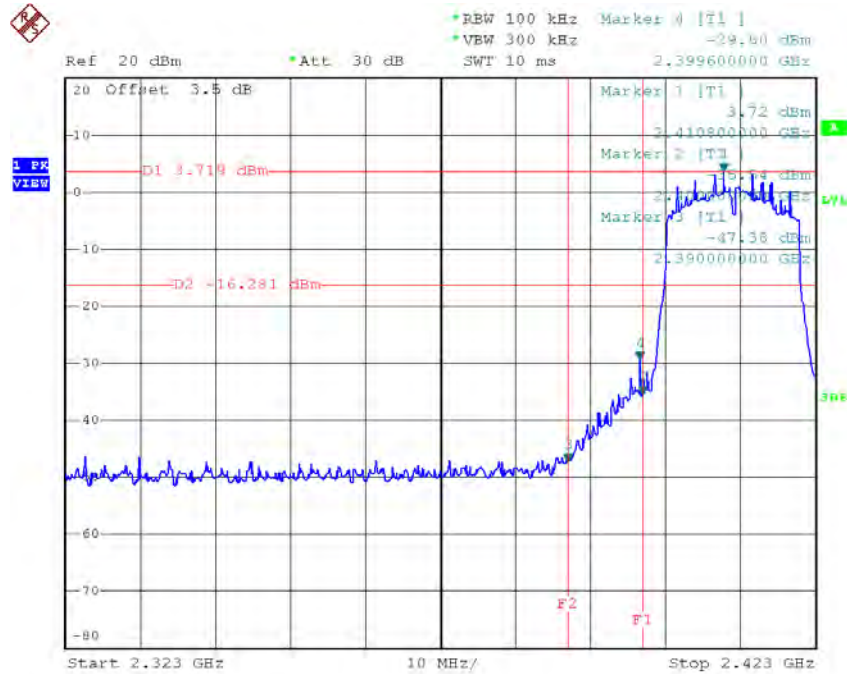


Date: 25.DEC.2016 13:35:49

TX HT20 mode CH11

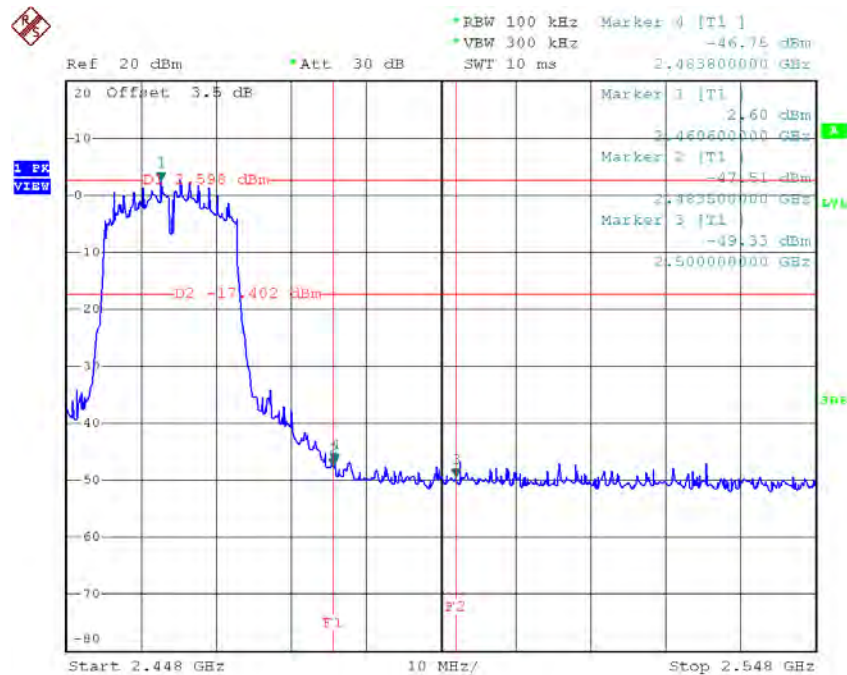


Date: 25.DEC.2016 13:46:28


TX HT20 mode CH01 (10 Harmonic of the frequency)

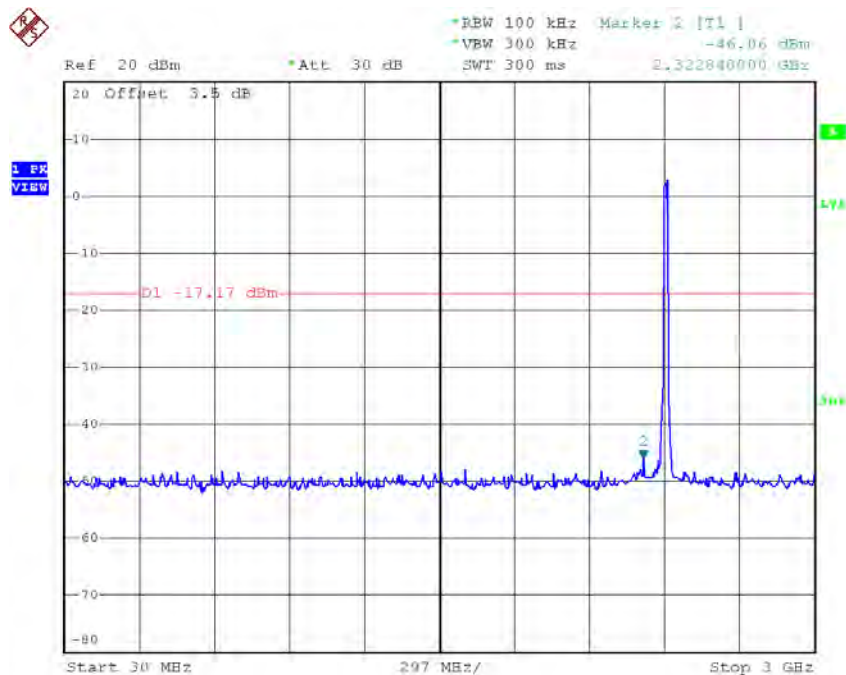

Date: 25.DEC.2016 13:35:24

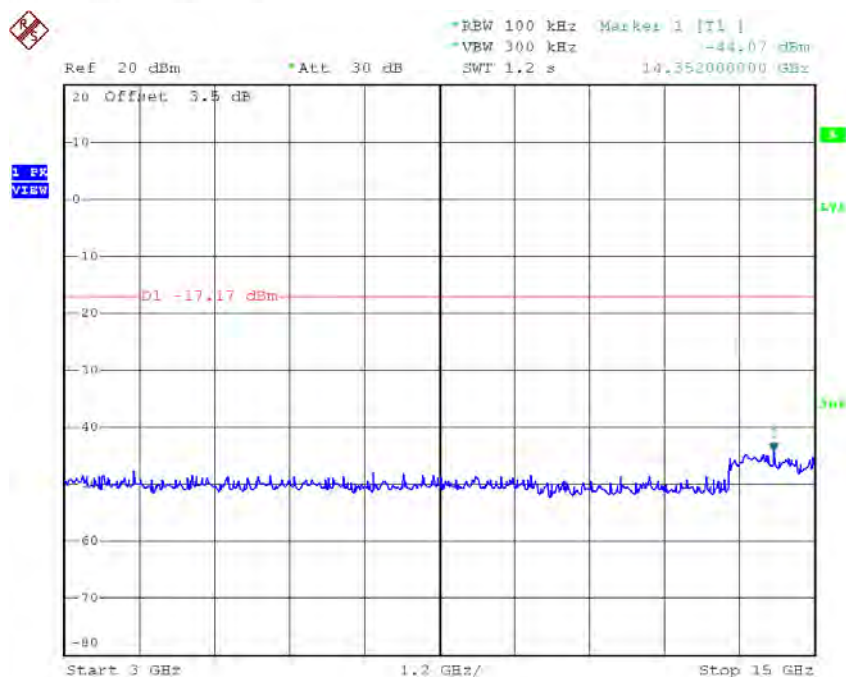


Date: 25.DEC.2016 13:35:33

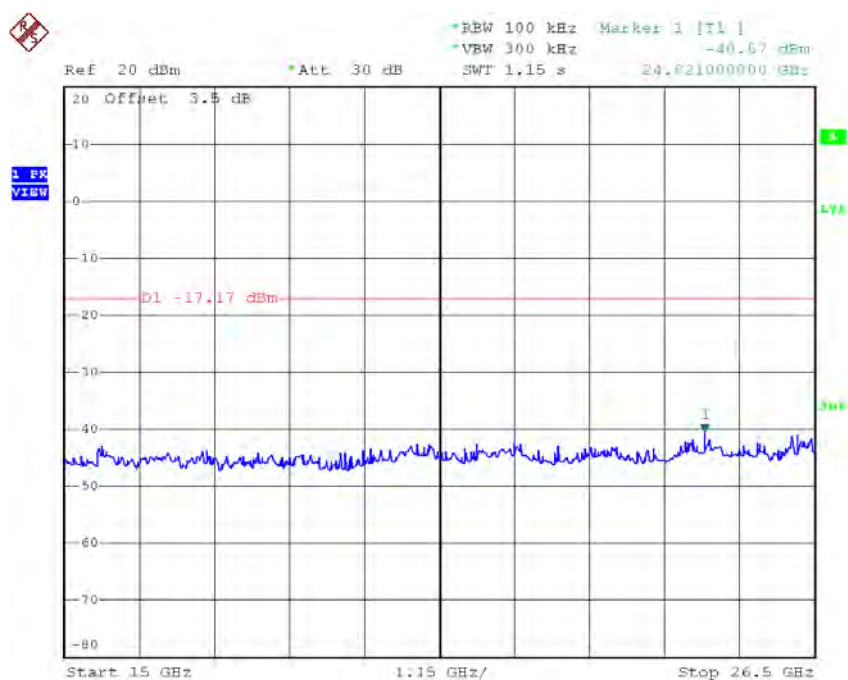


Date: 25.DEC.2016 13:35:41


TX HT20 mode CH06 (10 Harmonic of the frequency)

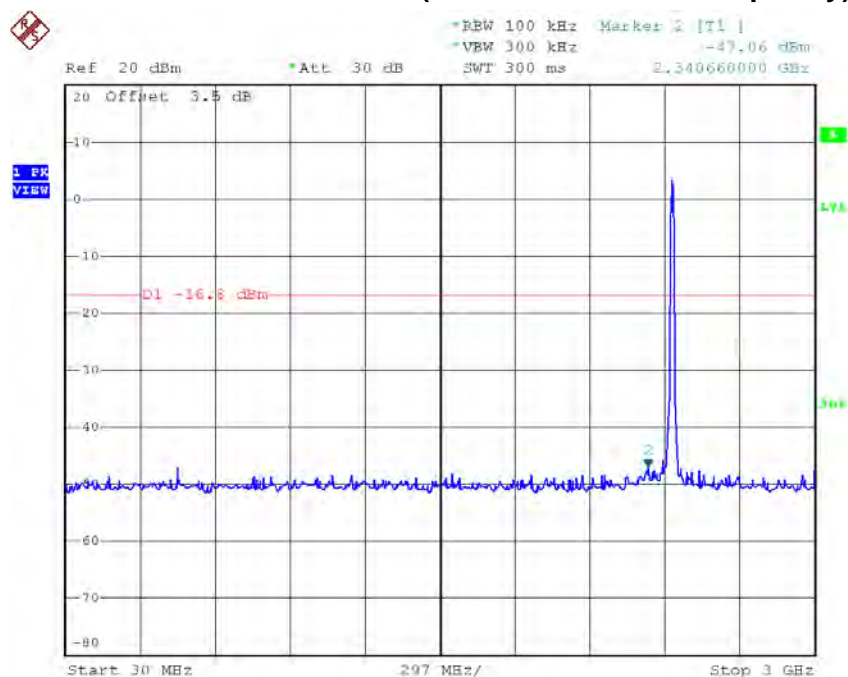

Date: 25.DEC.2016 13:44:49

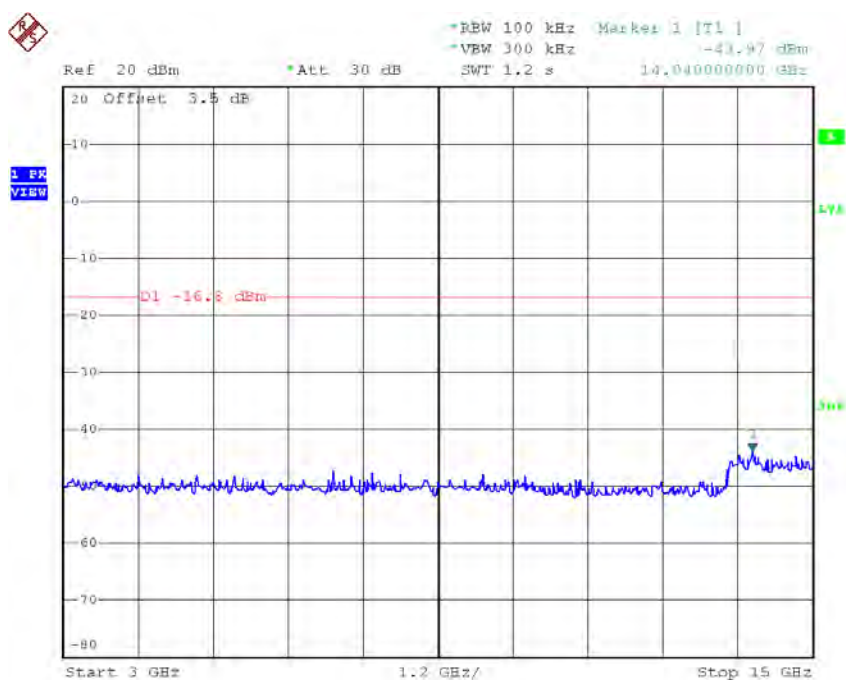


Date: 25.DEC.2016 13:44:57

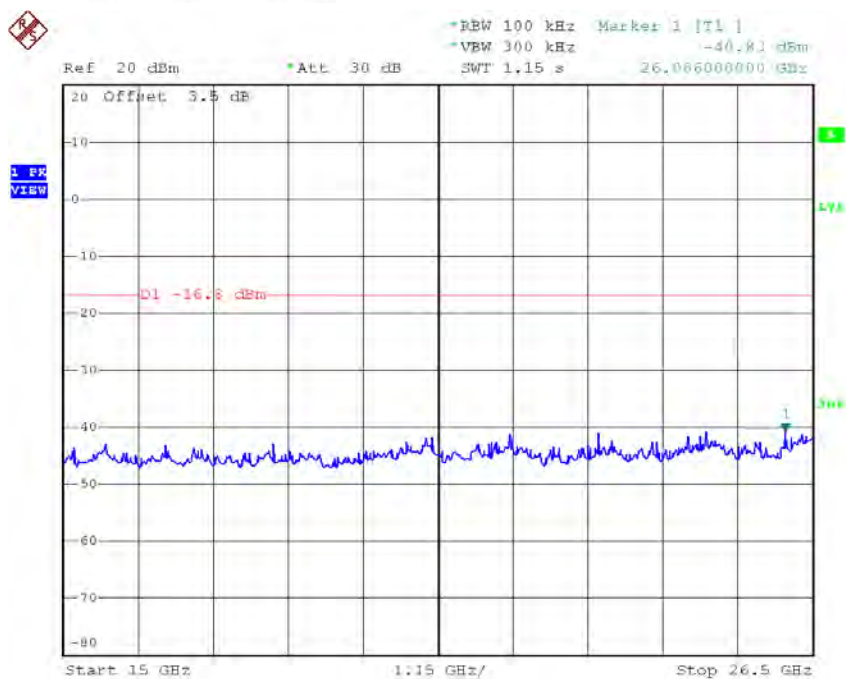


Date: 25.DEC.2016 13:45:05


TX HT20 mode CH11 (10 Harmonic of the frequency)

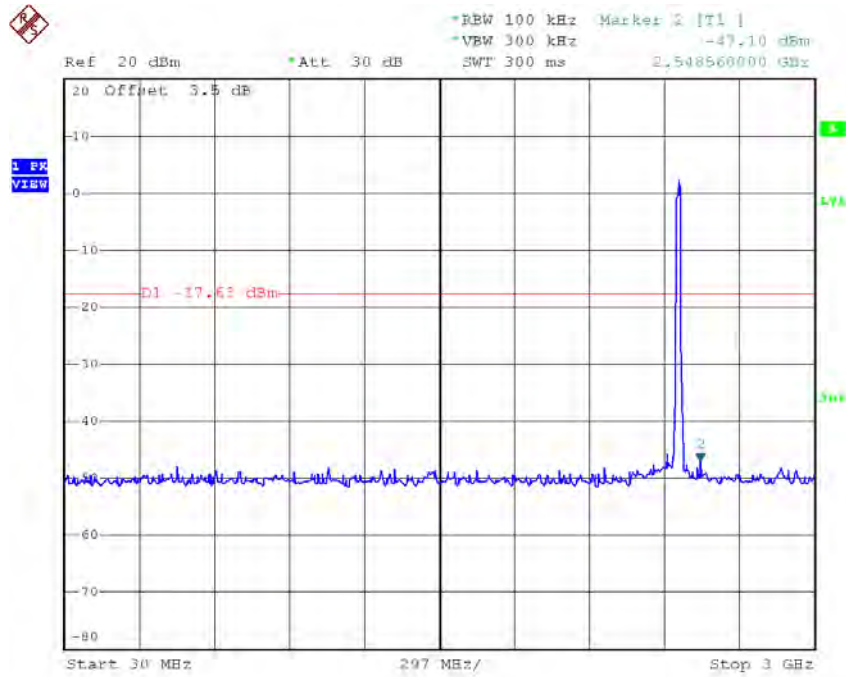

Date: 25.DEC.2016 13:46:04

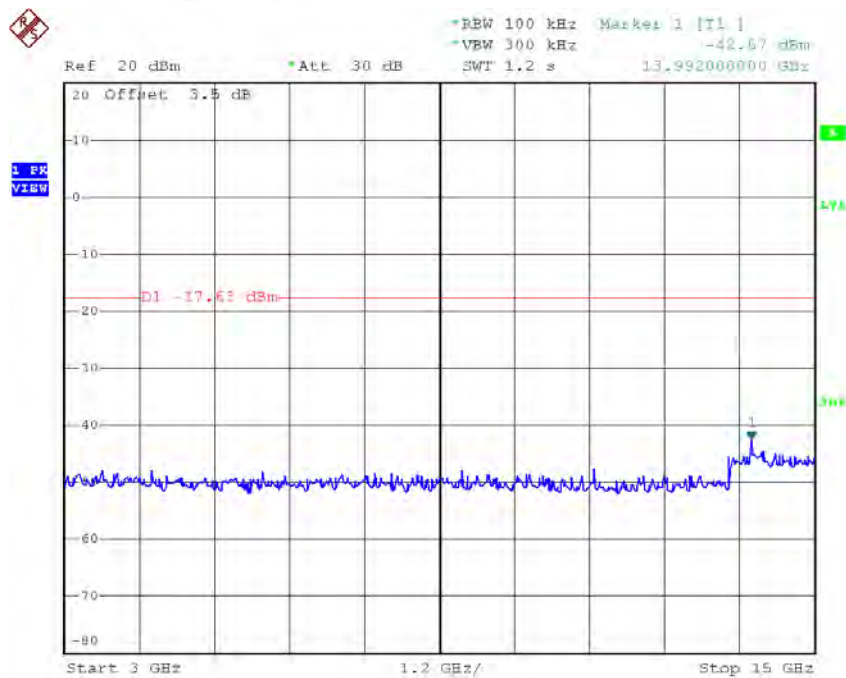


Date: 25.DEC.2016 13:46:12

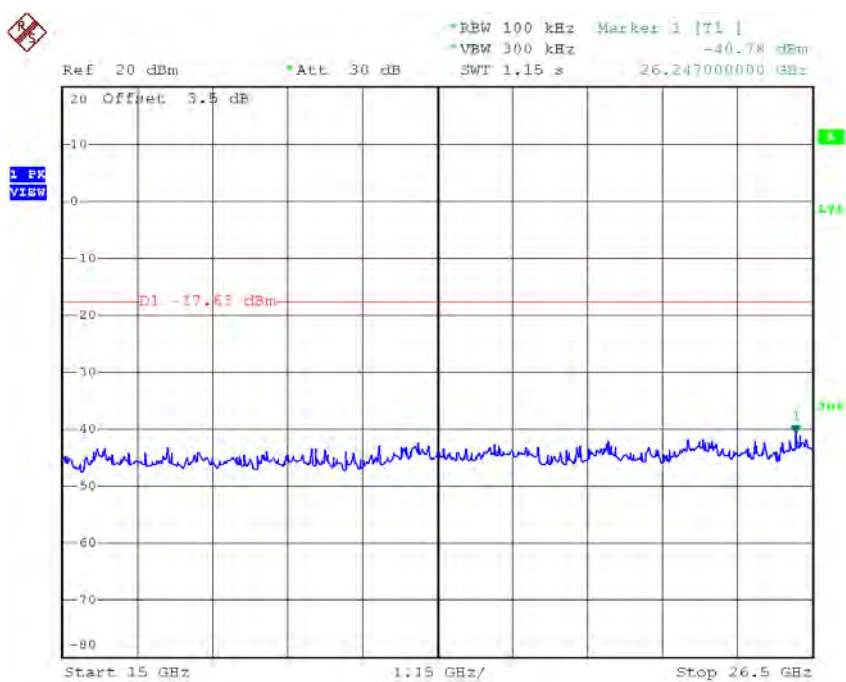

Date: 25.DEC.2016 13:46:20


Test Mode : TX N-20M Mode_ANT 2

TX HT20 mode CH01

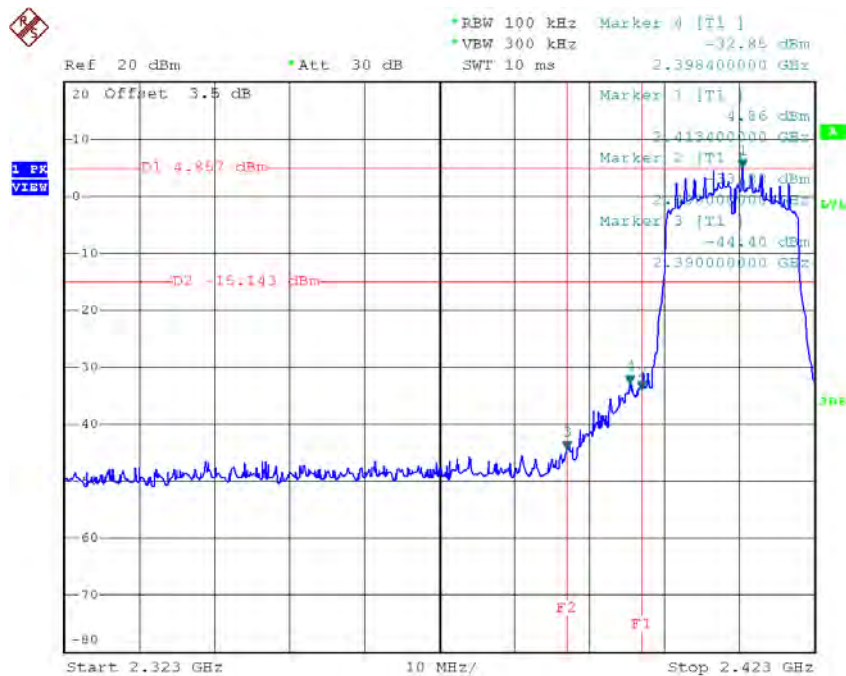


Date: 10.JAN.2017 10:26:09

TX HT20 mode CH11

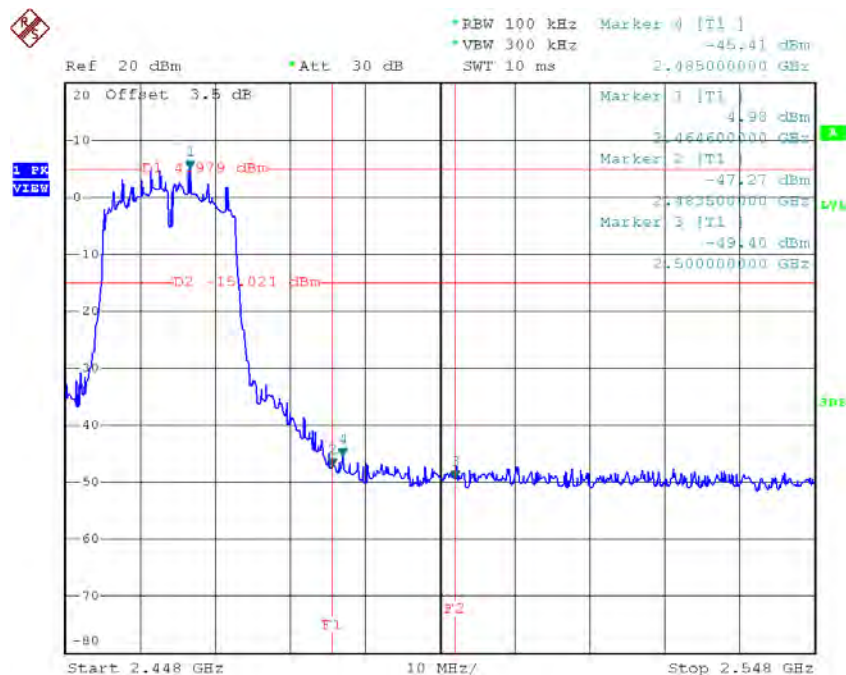


Date: 10.JAN.2017 10:29:16


TX HT20 mode CH01 (10 Harmonic of the frequency)

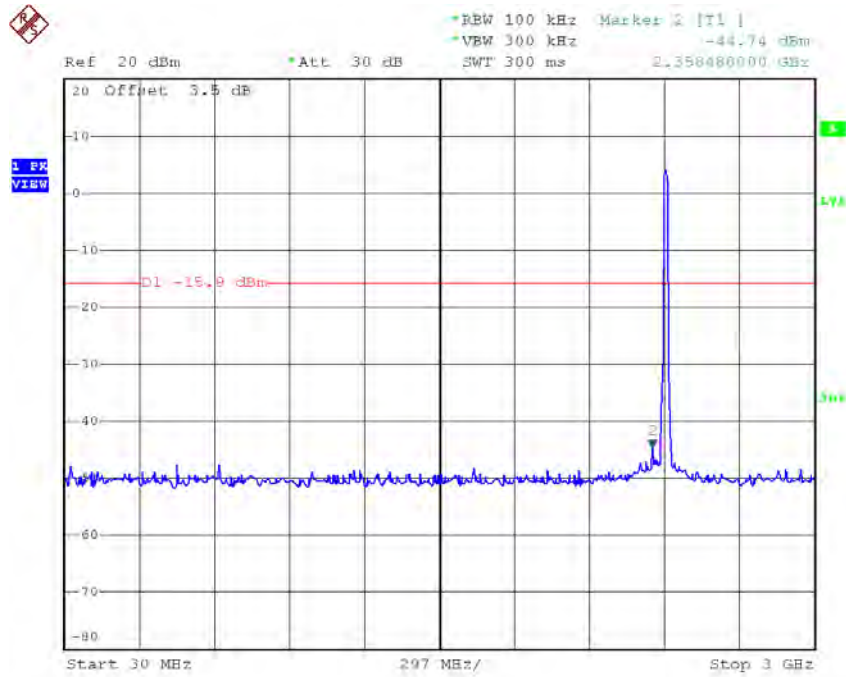

Date: 10.JAN.2017 10:25:44

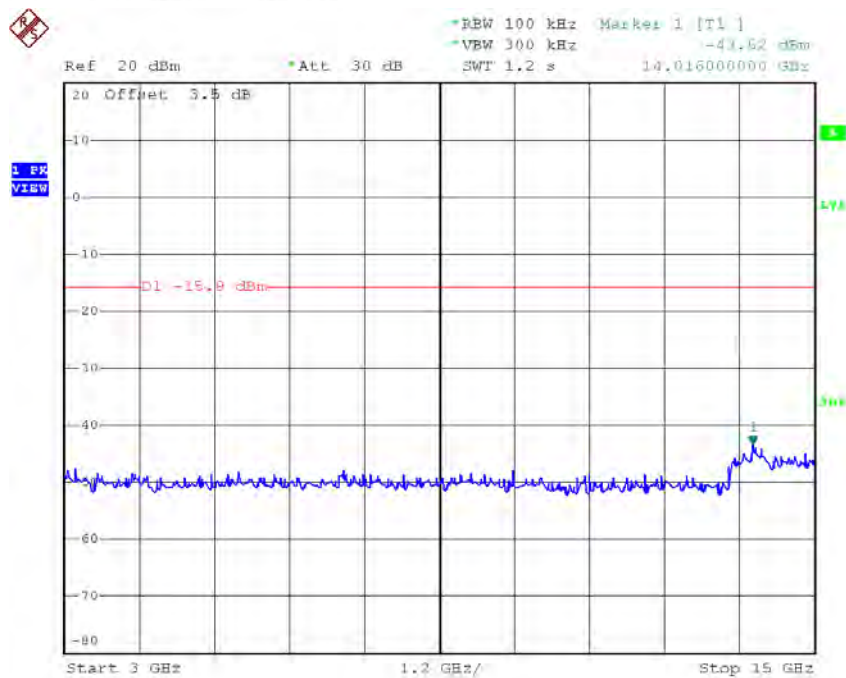


Date: 10.JAN.2017 10:25:53


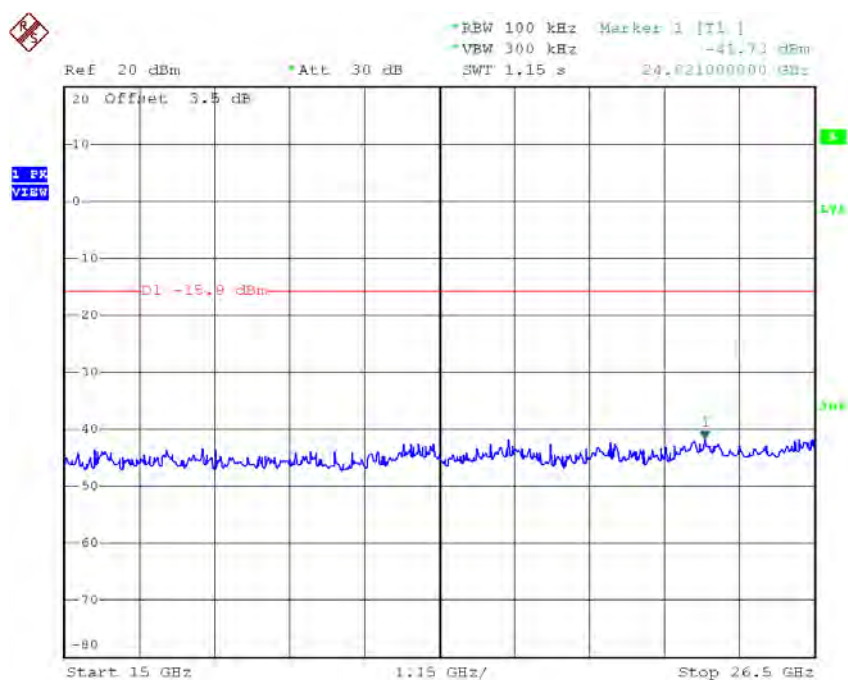


Date: 10.JAN.2017 10:26:01


TX HT20 mode CH06 (10 Harmonic of the frequency)

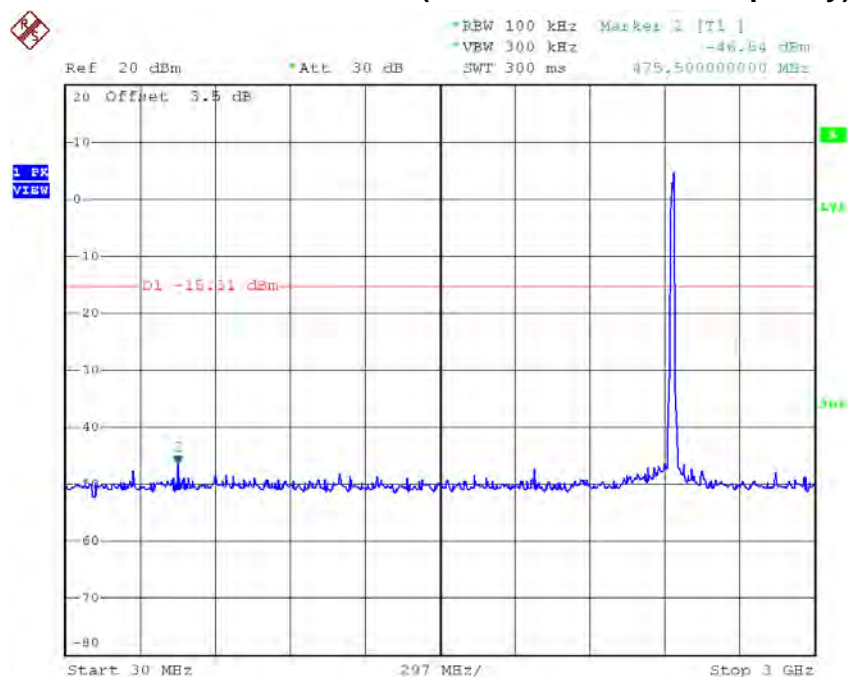


Date: 10.JAN.2017 10:27:15




TX HT20 mode CH11 (10 Harmonic of the frequency)

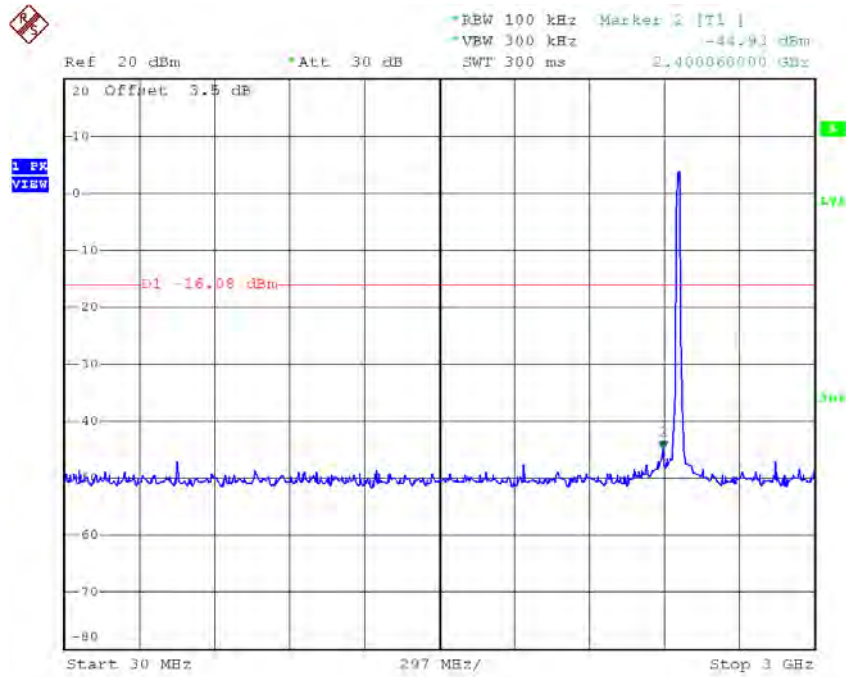

Date: 10.JAN.2017 10:28:51

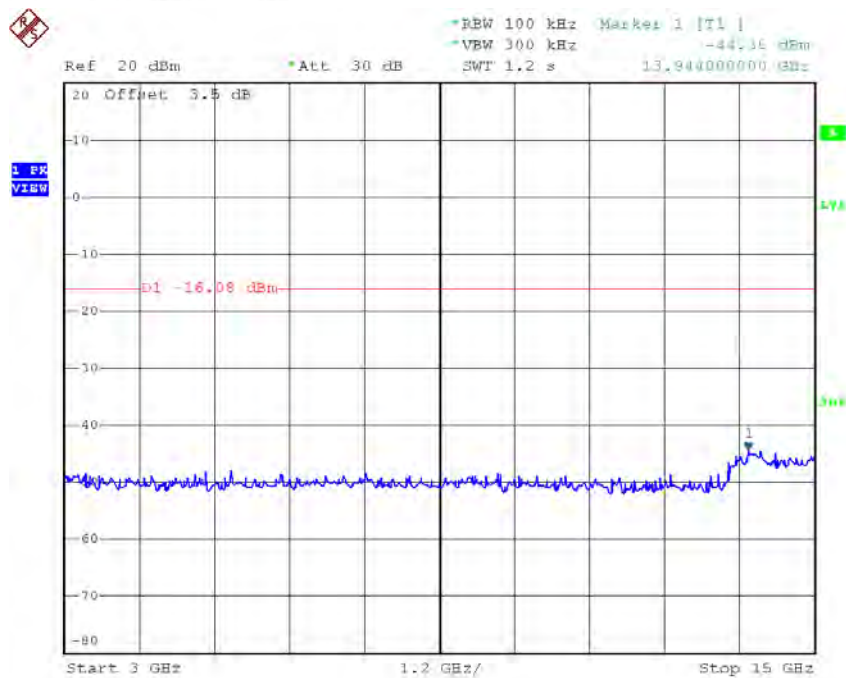


Date: 10.JAN.2017 10:29:00

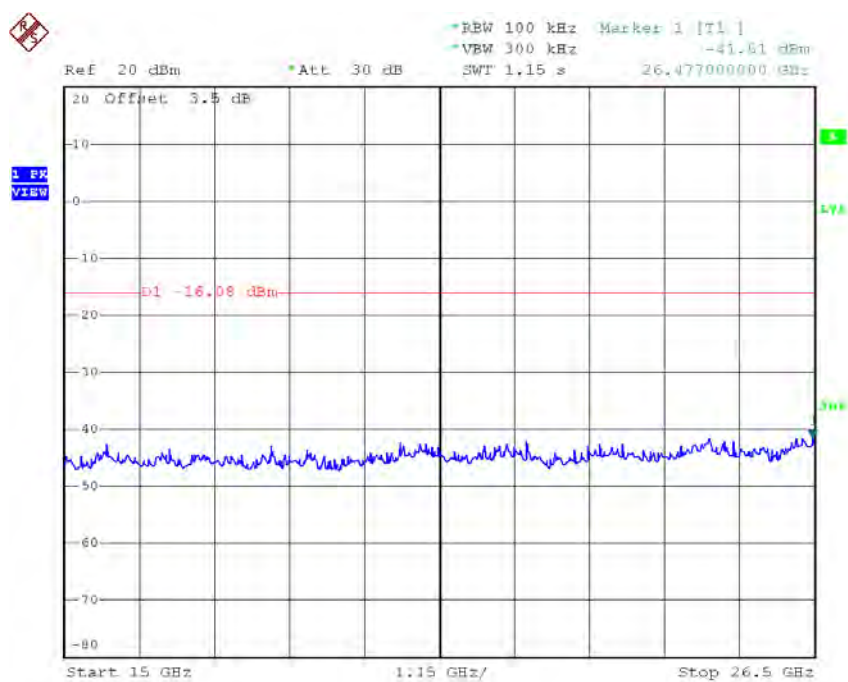

Date: 10.JAN.2017 10:29:08


Test Mode : TX N-40M Mode_ANT 1

TX HT40 mode CH03

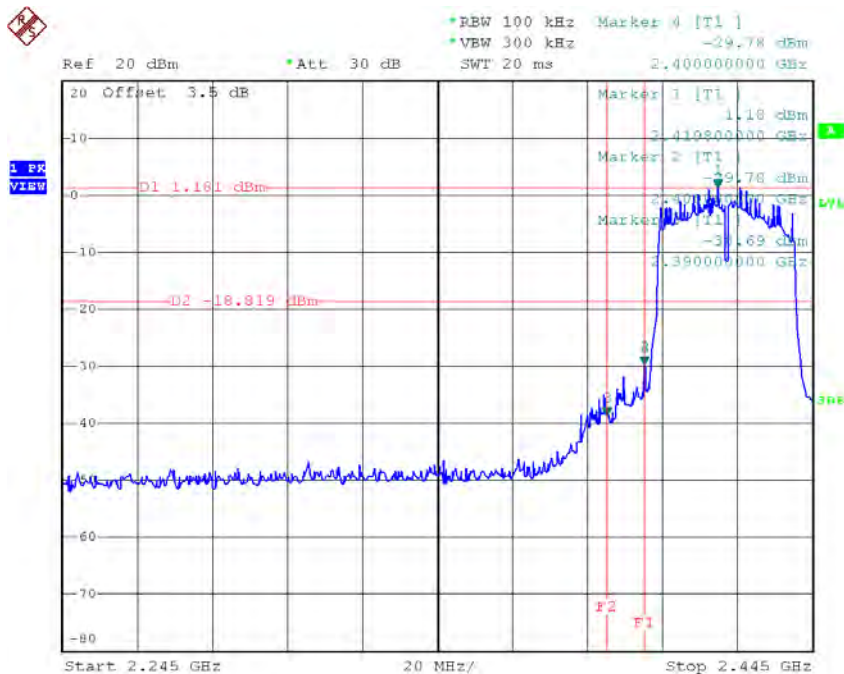


Date: 25.DEC.2016 13:48:27

TX HT40 mode CH09

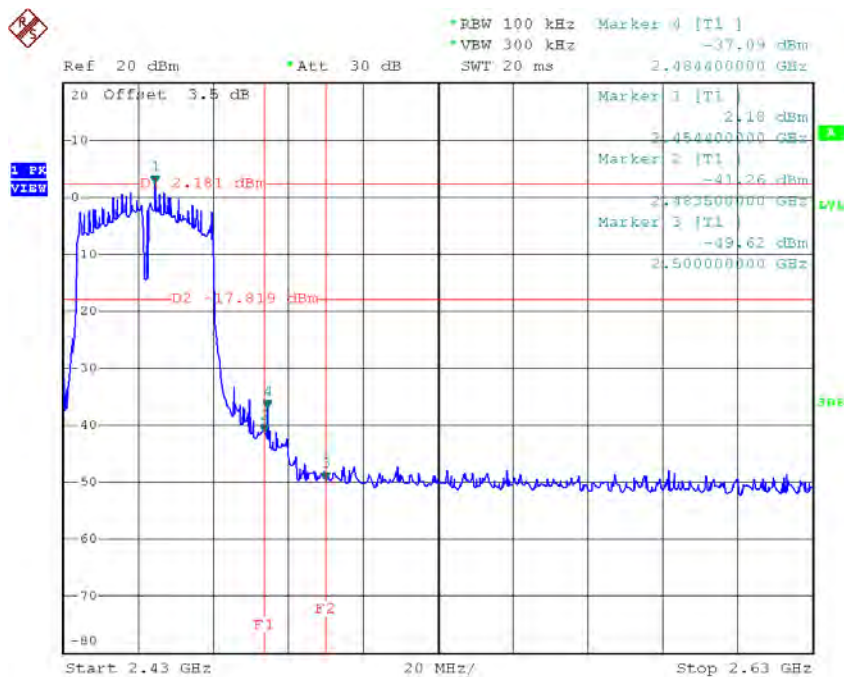


Date: 25.DEC.2016 13:51:13


TX HT40 mode CH03 (10 Harmonic of the frequency)

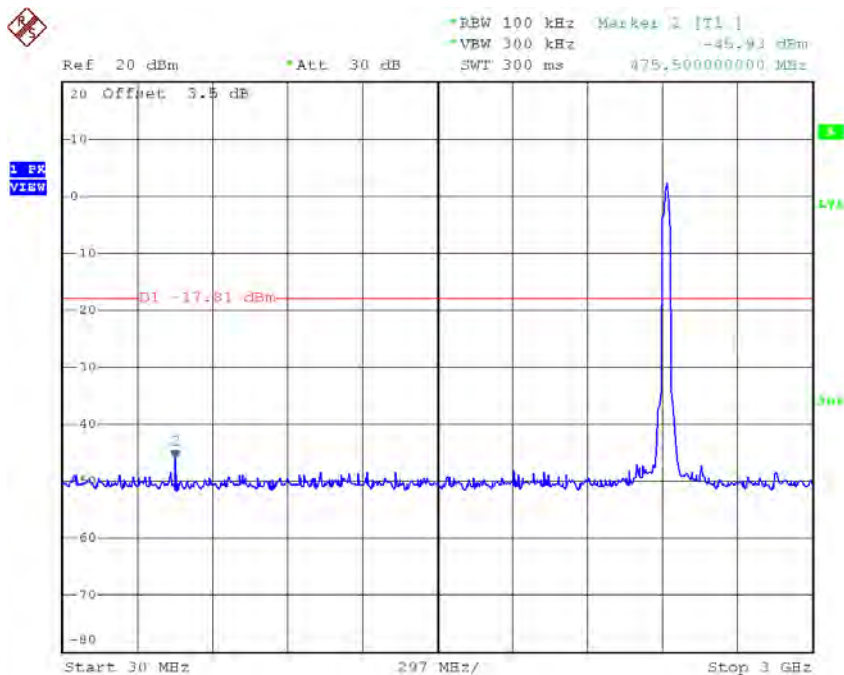

Date: 25.DEC.2016 13:48:01

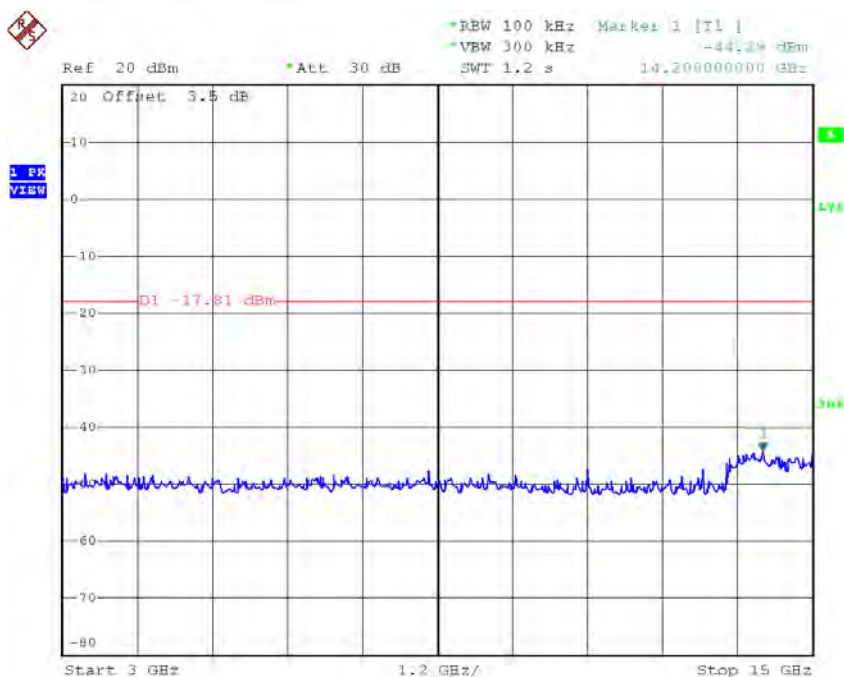


Date: 25.DEC.2016 13:48:10

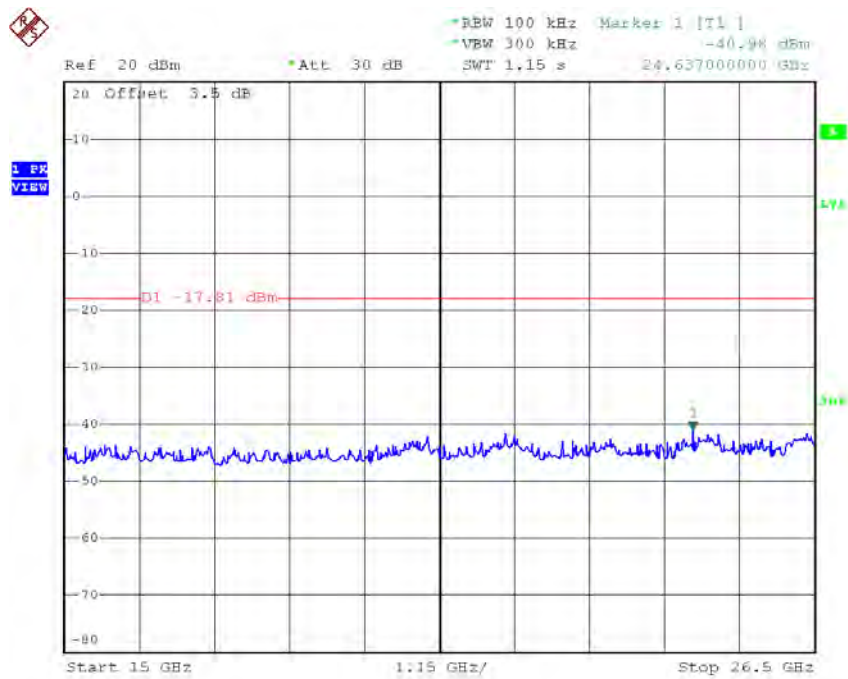


Date: 25.DEC.2016 13:48:19


TX HT40 mode CH06 (10 Harmonic of the frequency)

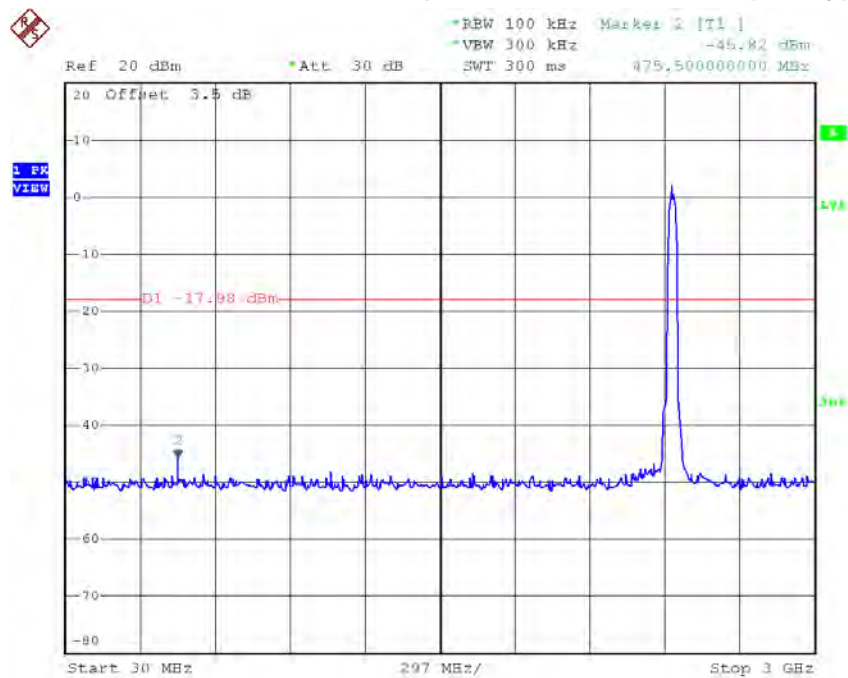

Date: 25.DEC.2016 13:49:29

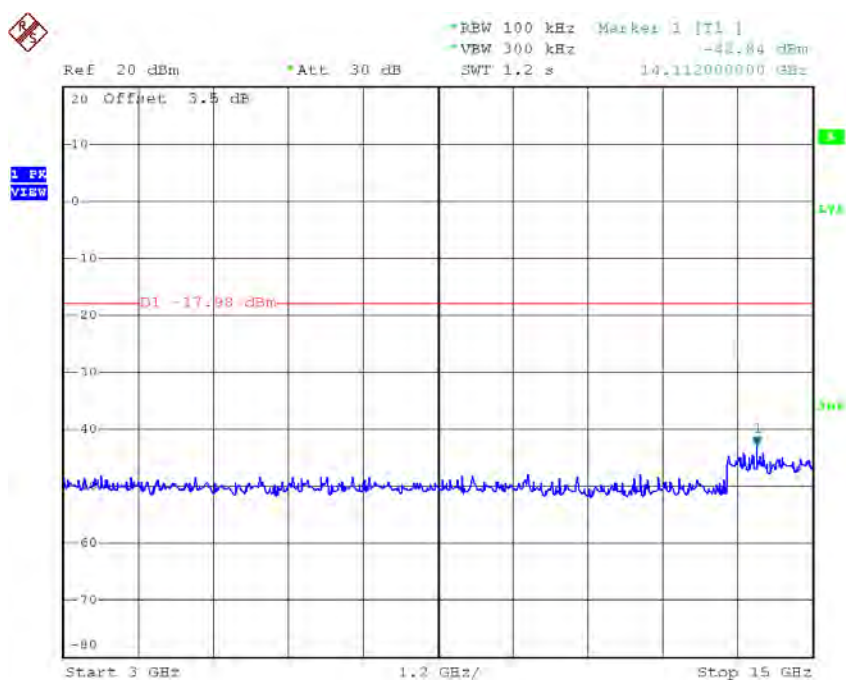


Date: 25.DEC.2016 13:49:37

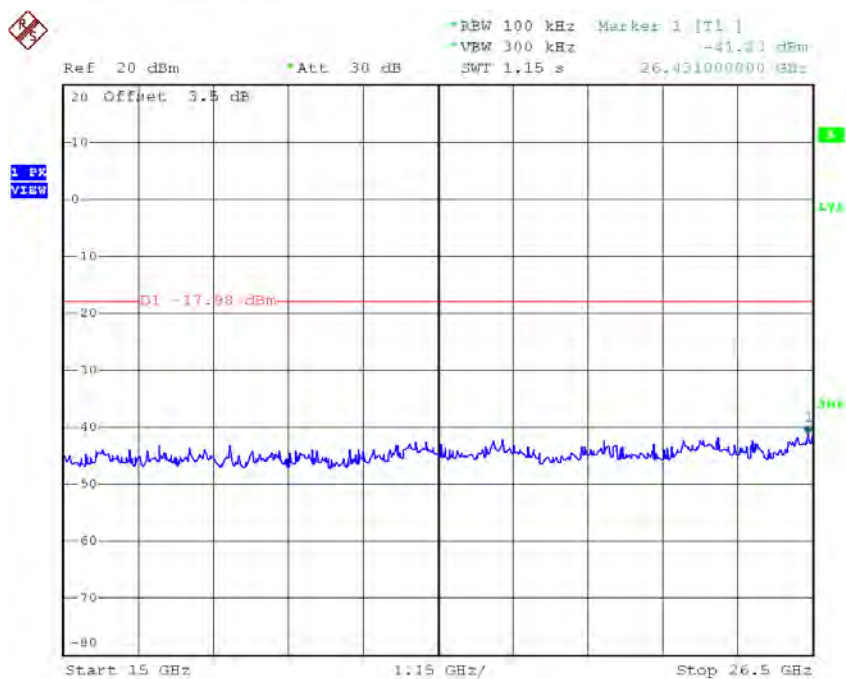


Date: 25.DEC.2016 13:49:46


TX HT40 mode CH09 (10 Harmonic of the frequency)

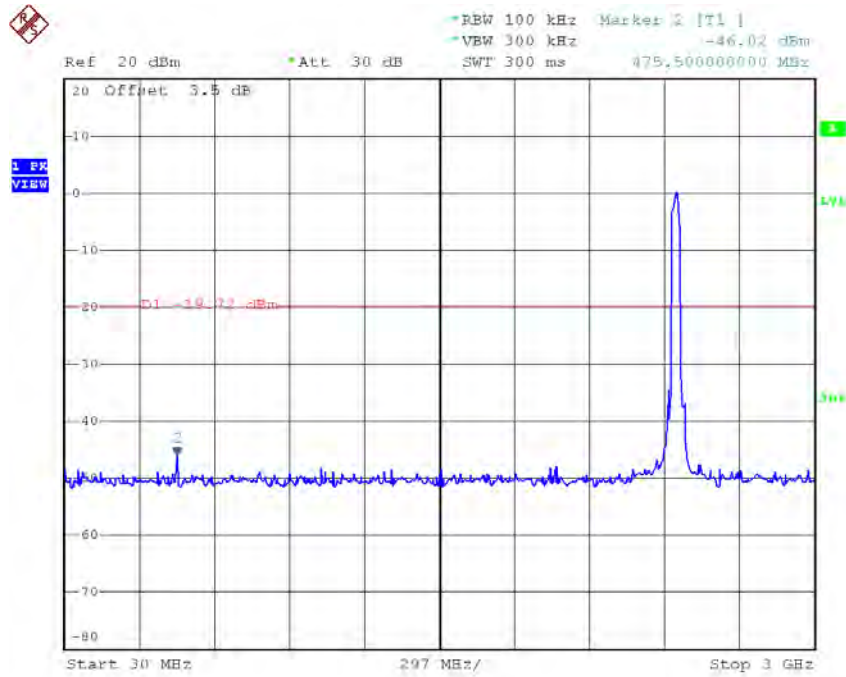

Date: 25.DEC.2016 13:50:49

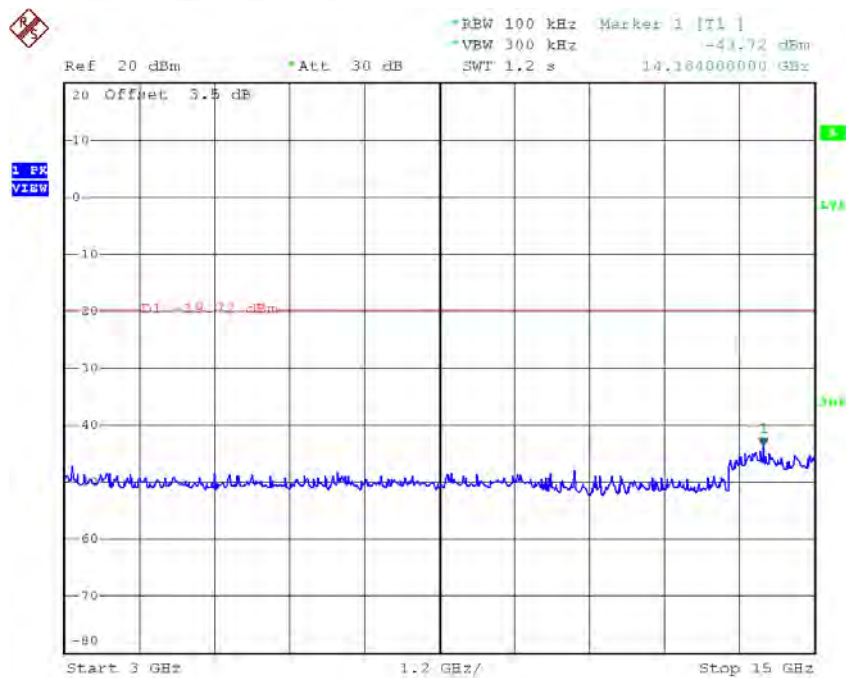


Date: 25.DEC.2016 13:50:57

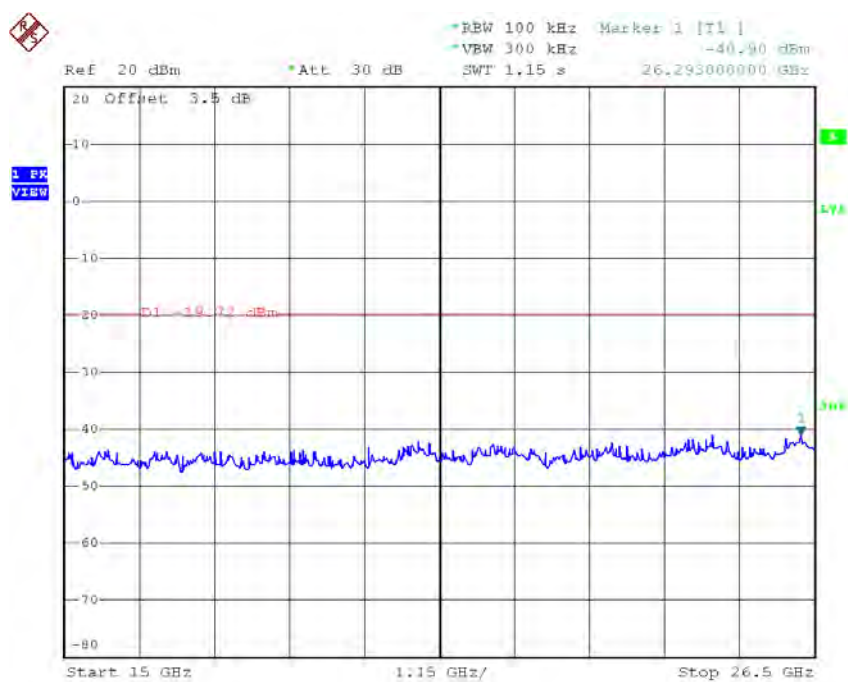

Date: 25.DEC.2016 13:51:06


Test Mode : TX N-40M Mode_ANT 2

TX HT40 mode CH03

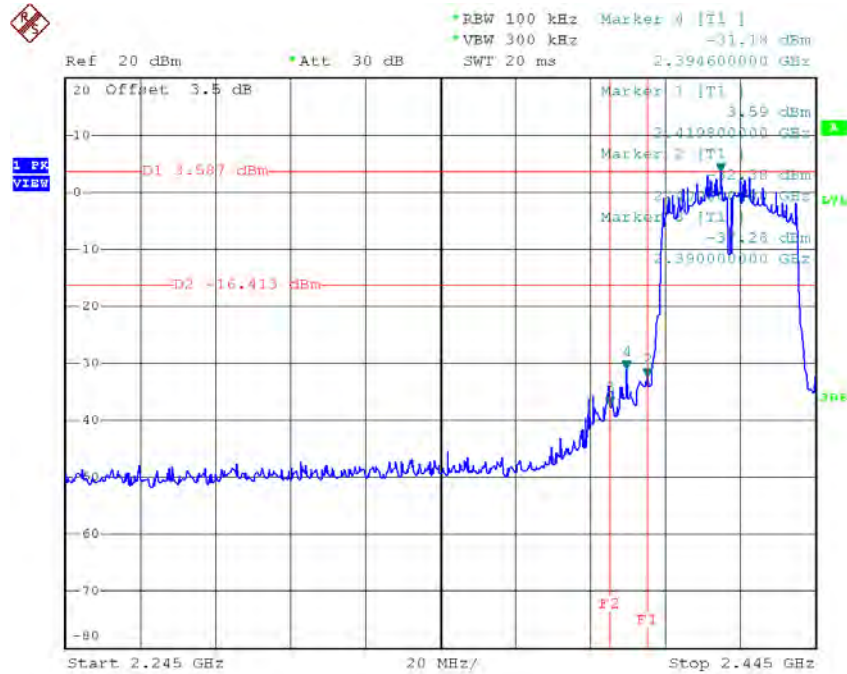


Date: 10.JAN.2017 10:31:09

TX HT40 mode CH09

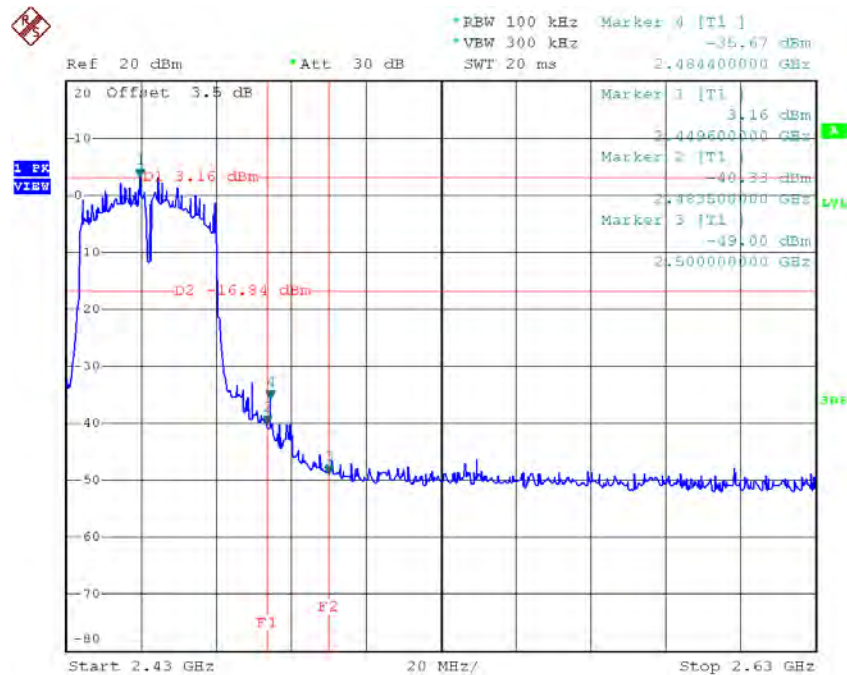


Date: 10.JAN.2017 10:33:32


TX HT40 mode CH03 (10 Harmonic of the frequency)

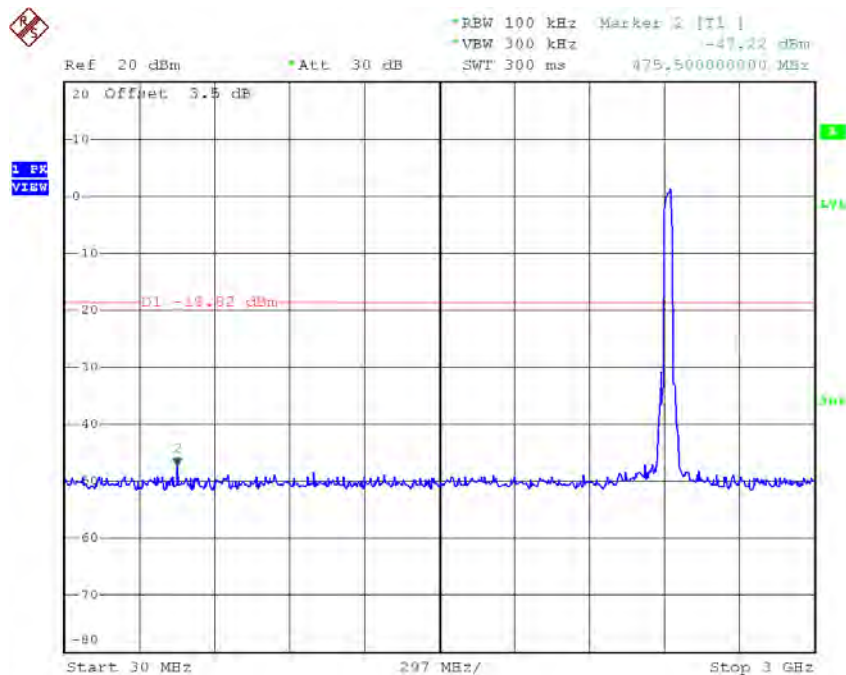

Date: 10.JAN.2017 10:30:45

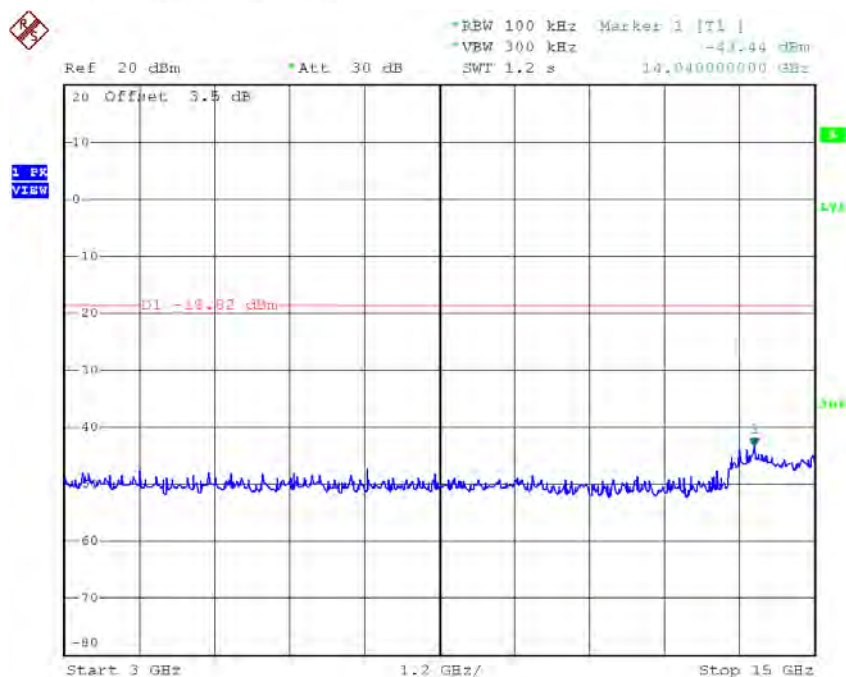


Date: 10.JAN.2017 10:30:53

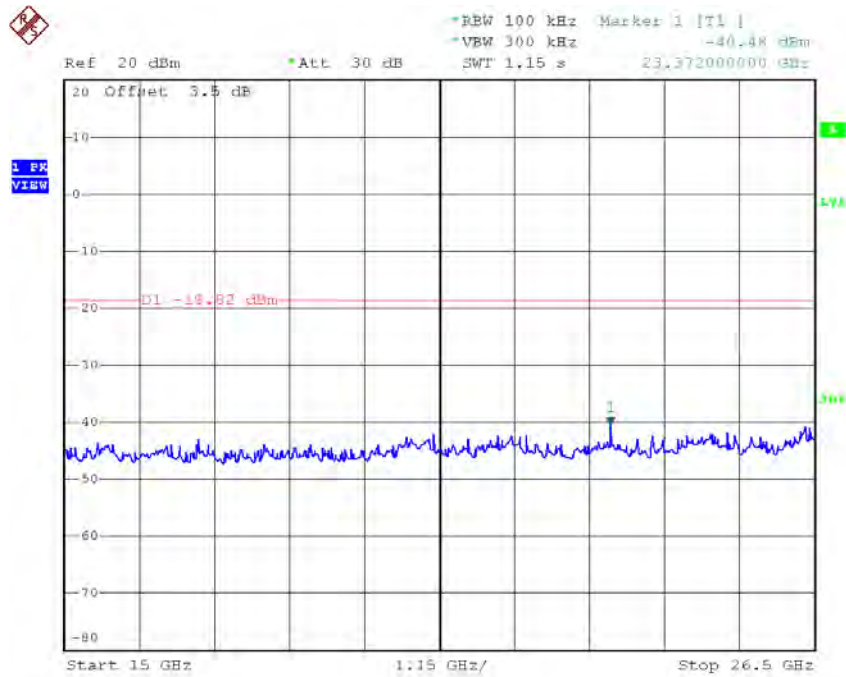


Date: 10.JAN.2017 10:31:01


TX HT40 mode CH06 (10 Harmonic of the frequency)

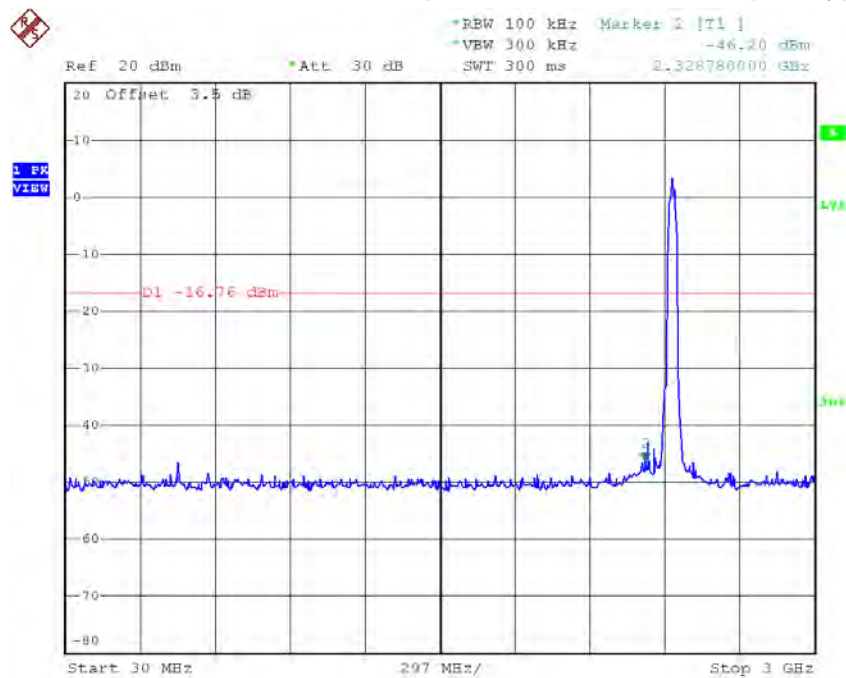

Date: 10.JAN.2017 10:31:59

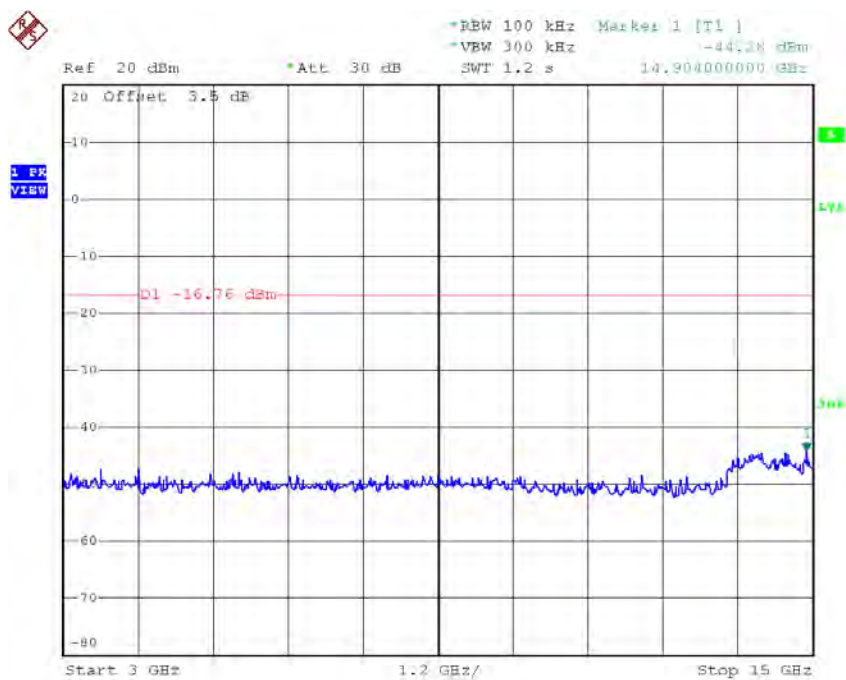


Date: 10.JAN.2017 10:32:07

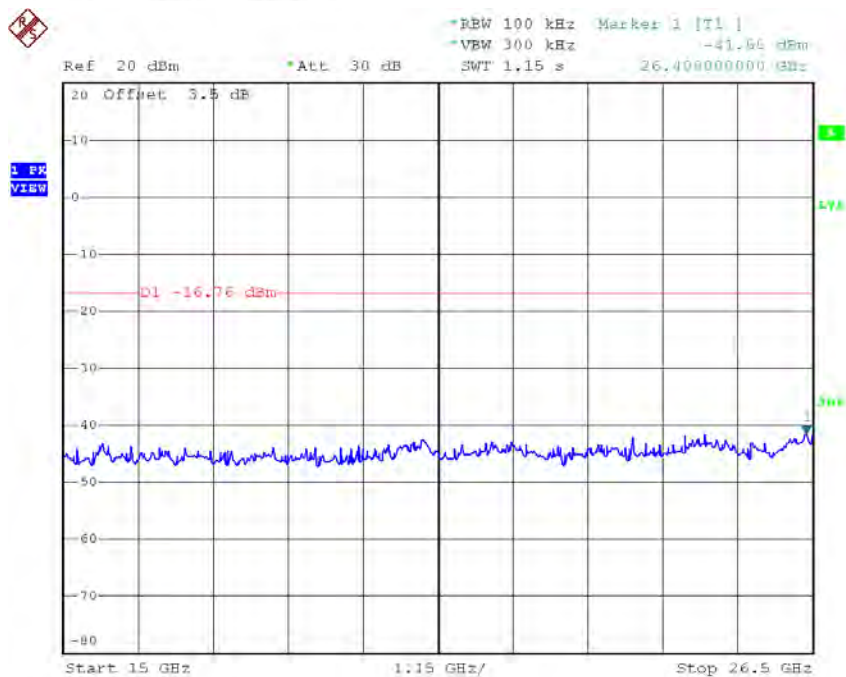


Date: 10.JAN.2017 10:32:15


TX HT40 mode CH09 (10 Harmonic of the frequency)

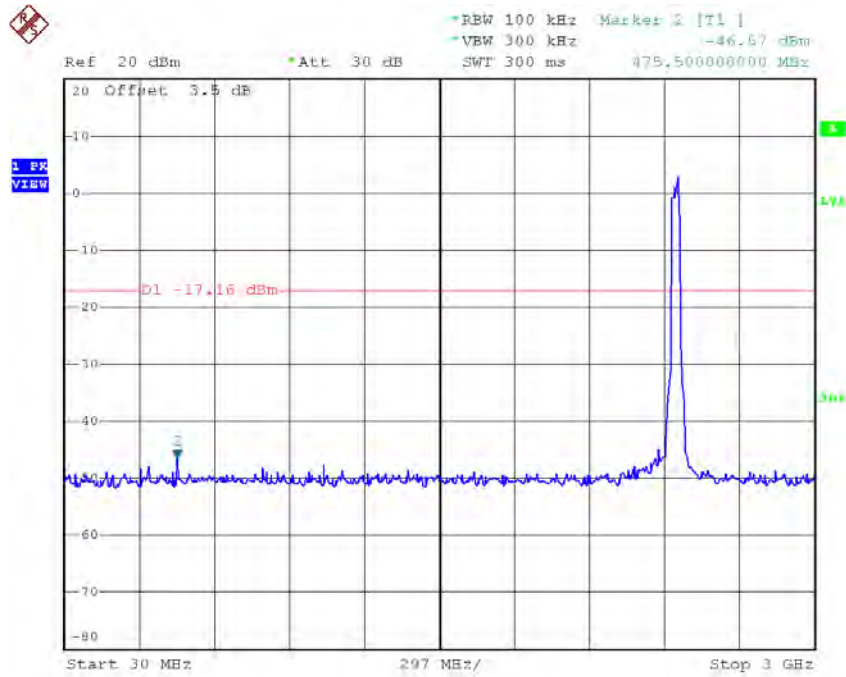

Date: 10.JAN.2017 10:33:08

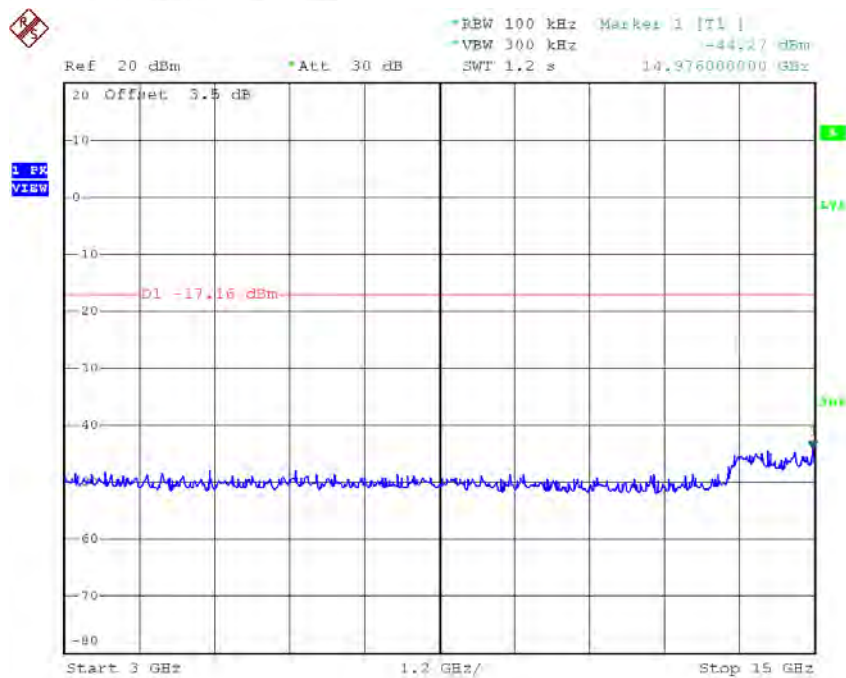

Date: 10.JAN.2017 10:33:16

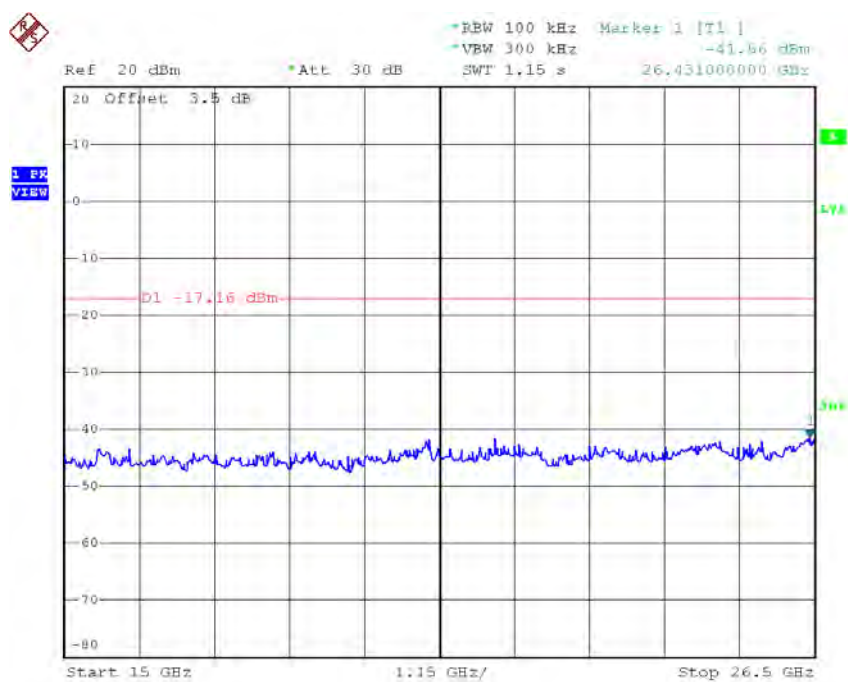


Date: 10.JAN.2017 10:33:24

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.69	0.0678	8.00	Complies
2437	-12.35	0.0582	8.00	Complies
2462	-12.40	0.0575	8.00	Complies

TX CH01

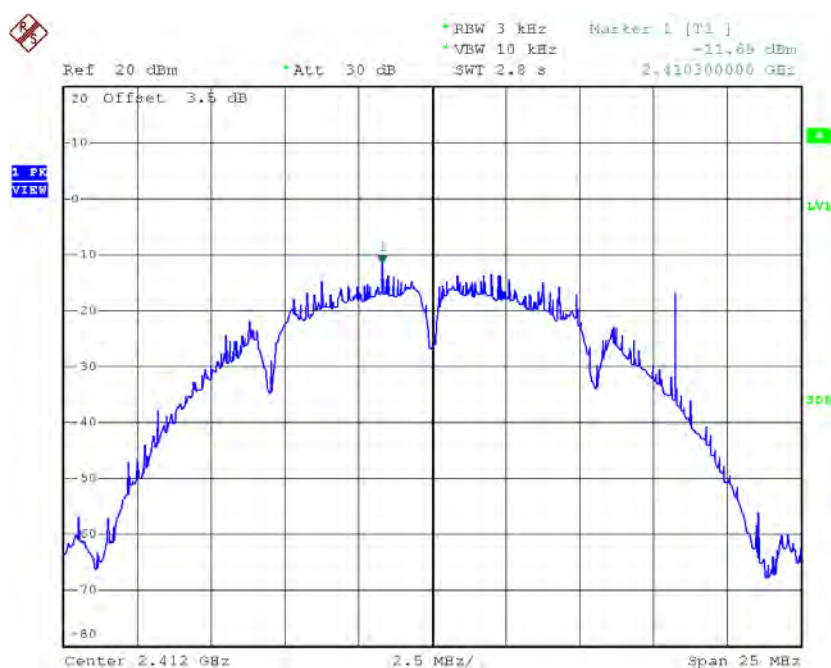


Date: 25.DEC.2016 13:14:11

TX CH06

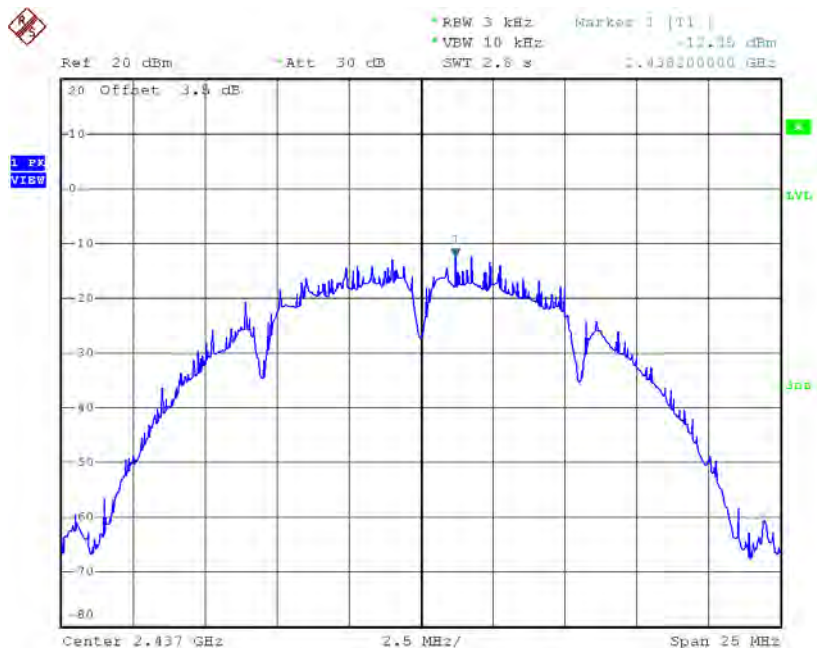

Date: 25.DEC.2016 13:16:05

TX CH11

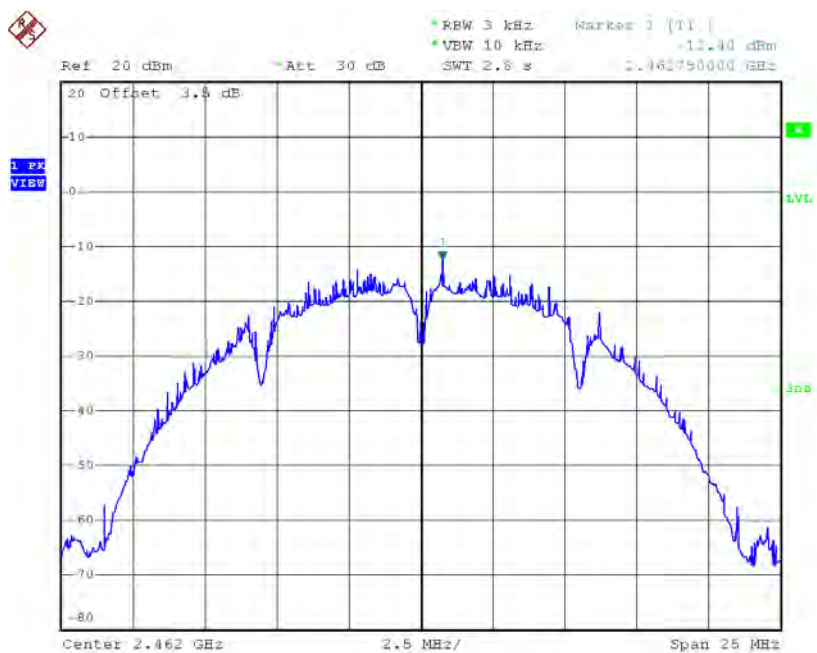


Date: 25.DEC.2016 13:24:20

Test Mode :TX B Mode_CH01/06/11_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.70	0.0678	8.00	Complies
2437	-10.84	0.0582	8.00	Complies
2462	-11.61	0.0575	8.00	Complies

TX CH01

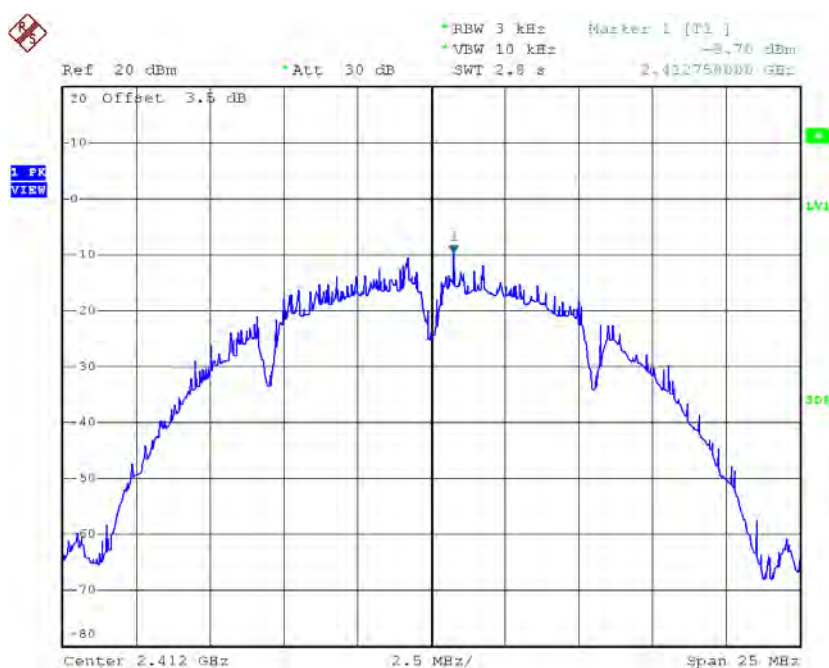


Date: 10.JAN.2017 10:13:41

TX CH06

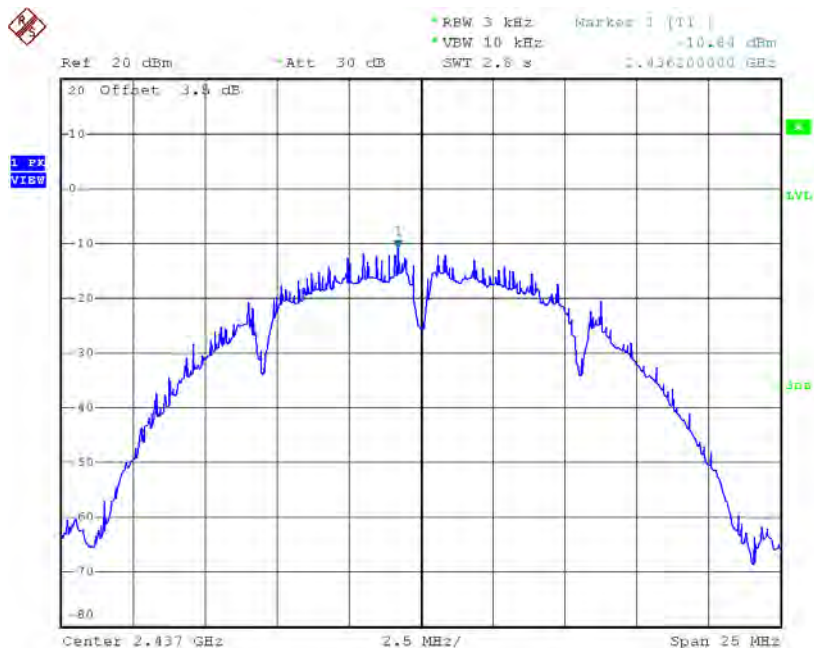

Date: 10.JAN.2017 10:15:17

TX CH11

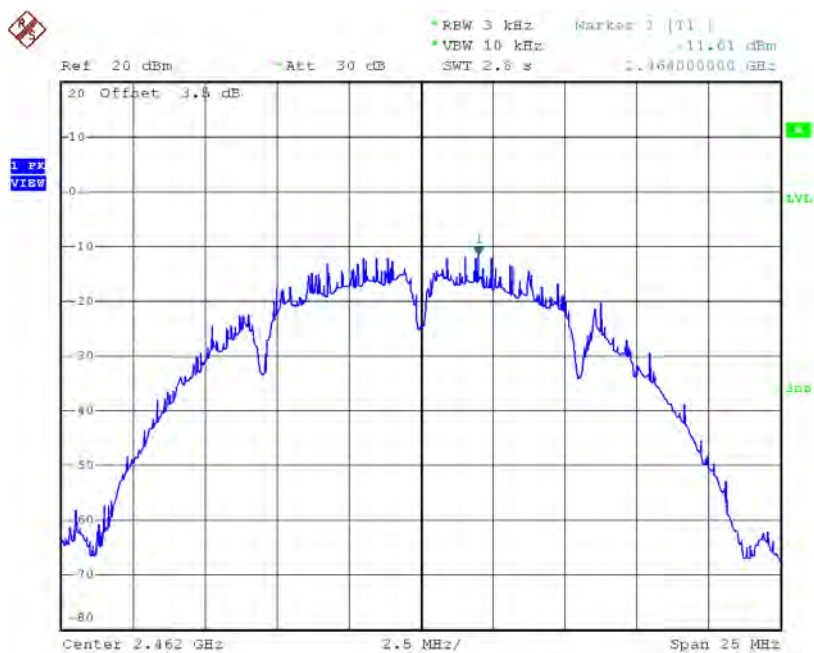

Date: 10.JAN.2017 10:18:00


Test Mode :TX B Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-8.68	0.1355	8.00	Complies
2437	-9.34	0.1164	8.00	Complies
2462	-9.39	0.1151	8.00	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.41	0.0456	8.00	Complies
2437	-13.66	0.0431	8.00	Complies
2462	-13.33	0.0465	8.00	Complies

TX CH01

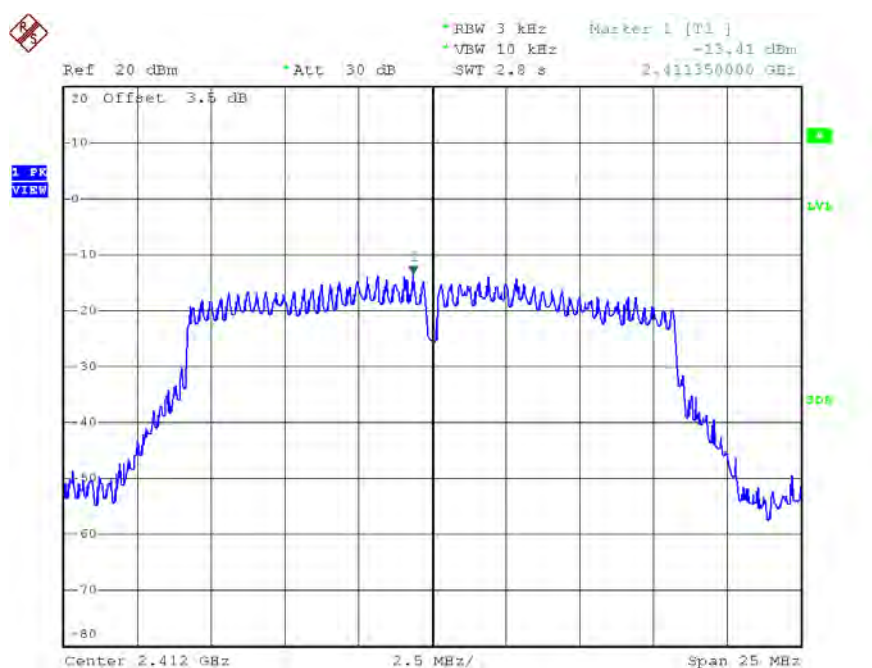


Date: 25.DEC.2016 13:28:52

TX CH06

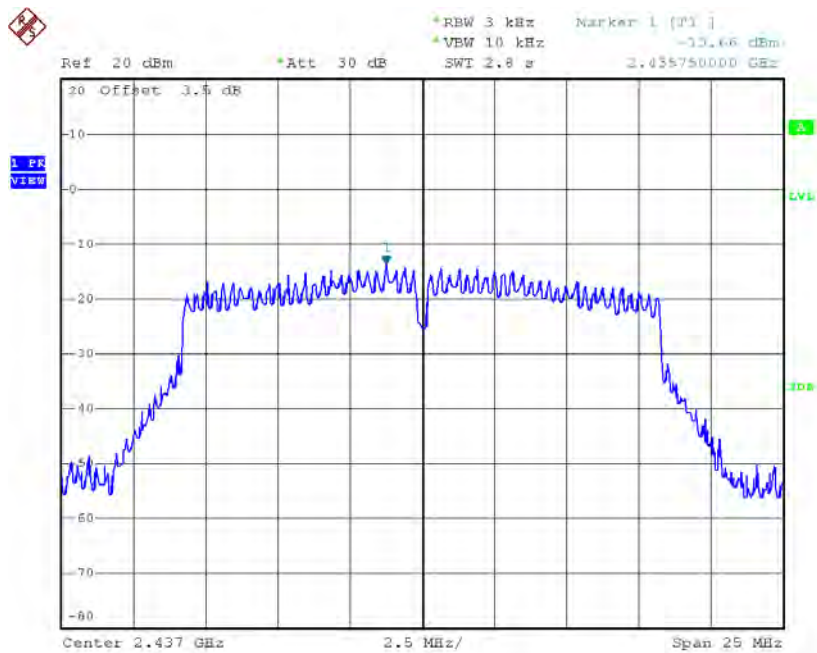

Date: 25.DEC.2016 13:32:49

TX CH11

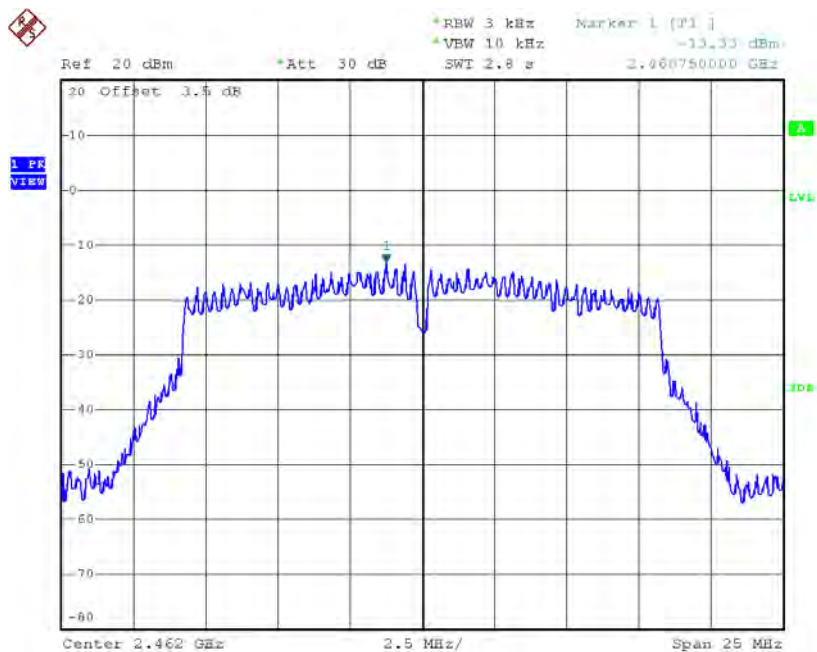


Date: 25.DEC.2016 13:34:26

Test Mode :TX G Mode_CH01/06/11_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.46	0.0714	8.00	Complies
2437	-12.92	0.0511	8.00	Complies
2462	-12.25	0.0596	8.00	Complies

TX CH01

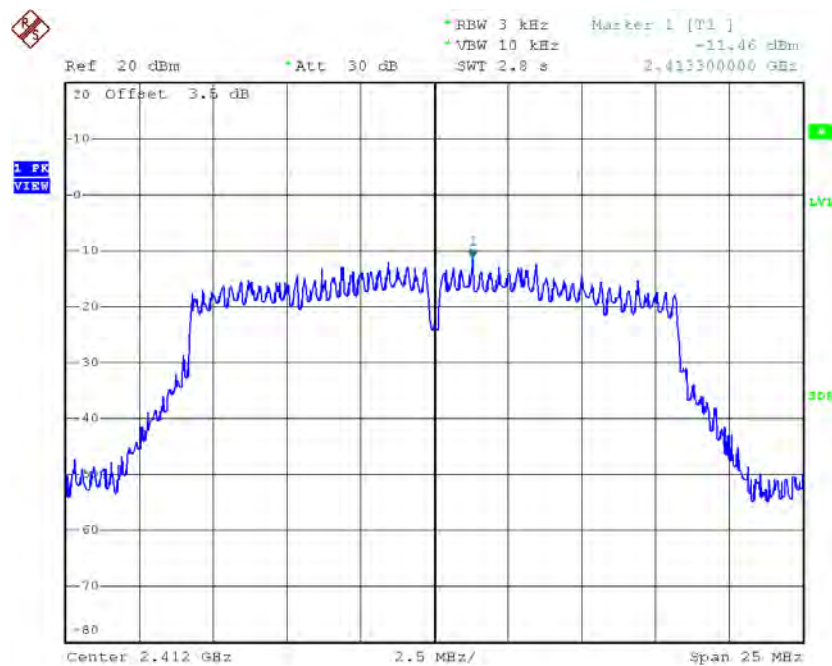


Date: 10.JAN.2017 10:20:10

TX CH06

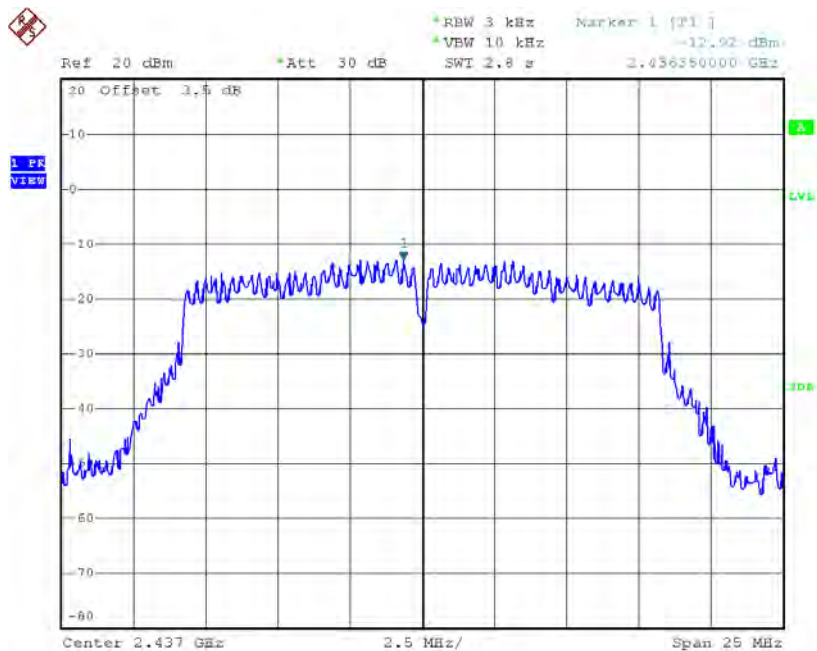

Date: 10.JAN.2017 10:22:04

TX CH11

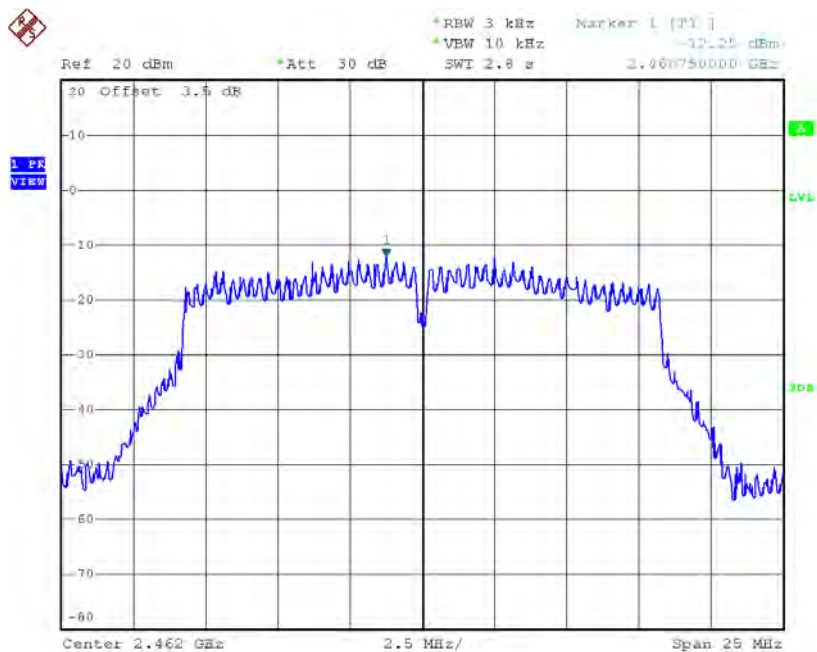

Date: 10.JAN.2017 10:23:52


Test Mode :TX G Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.32	0.1171	8.00	Complies
2437	-10.26	0.0941	8.00	Complies
2462	-9.75	0.1060	8.00	Complies

Test Mode : TX N-20M Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-12.78	0.0527	8.00	Complies
2437	-12.56	0.0555	8.00	Complies
2462	-13.24	0.0474	8.00	Complies

TX CH01

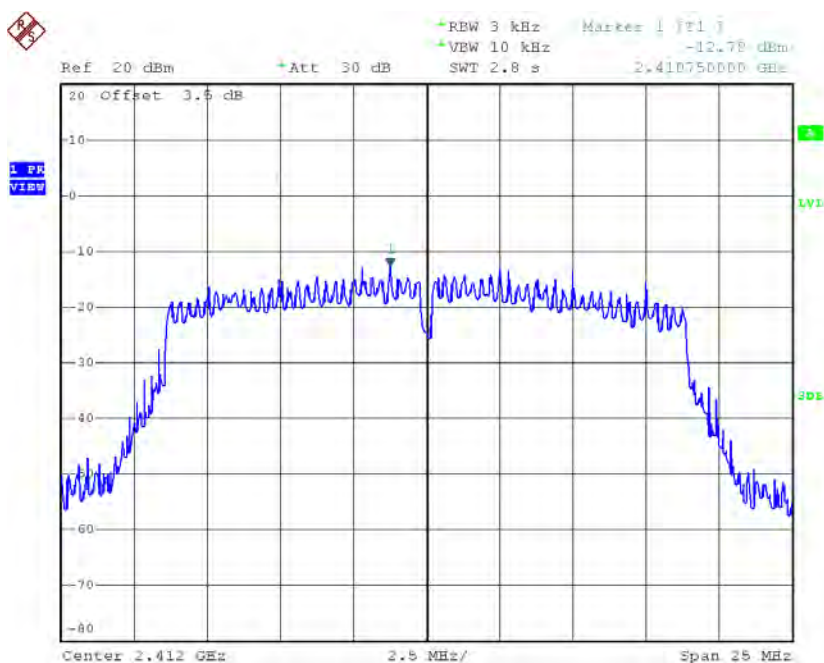


Date: 25-DEC-2016 13:35:58

TX CH06

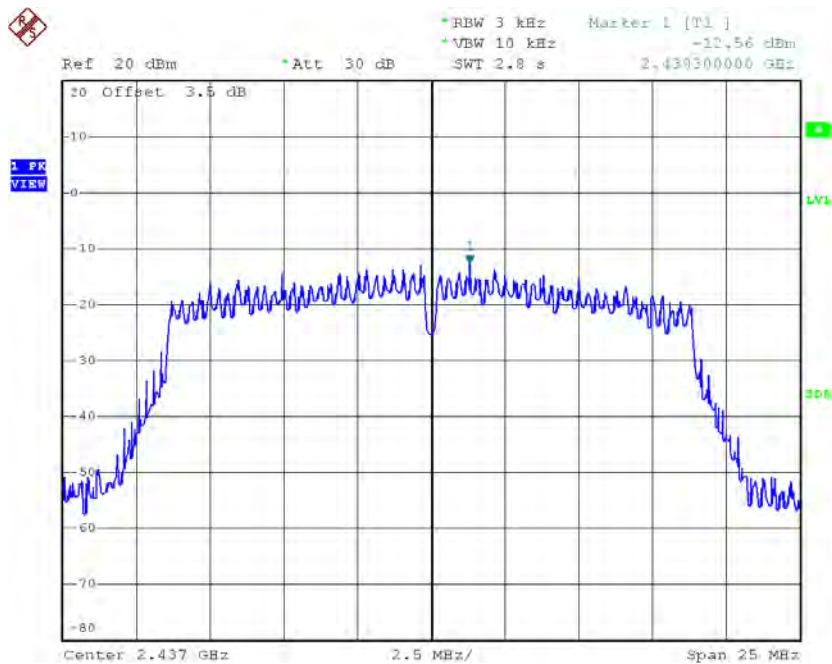

Date: 25.DEC.2016 13:45:15

TX CH11

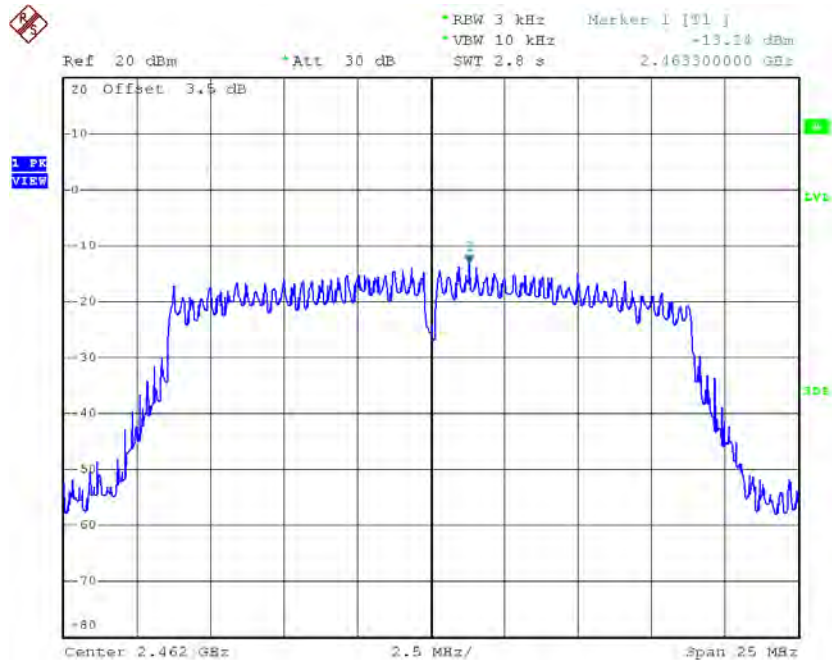


Date: 25.DEC.2016 13:46:37

Test Mode : TX N-20M Mode_CH01/06/11_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-10.64	0.0863	8.00	Complies
2437	-10.78	0.0836	8.00	Complies
2462	-11.71	0.0675	8.00	Complies

TX CH01

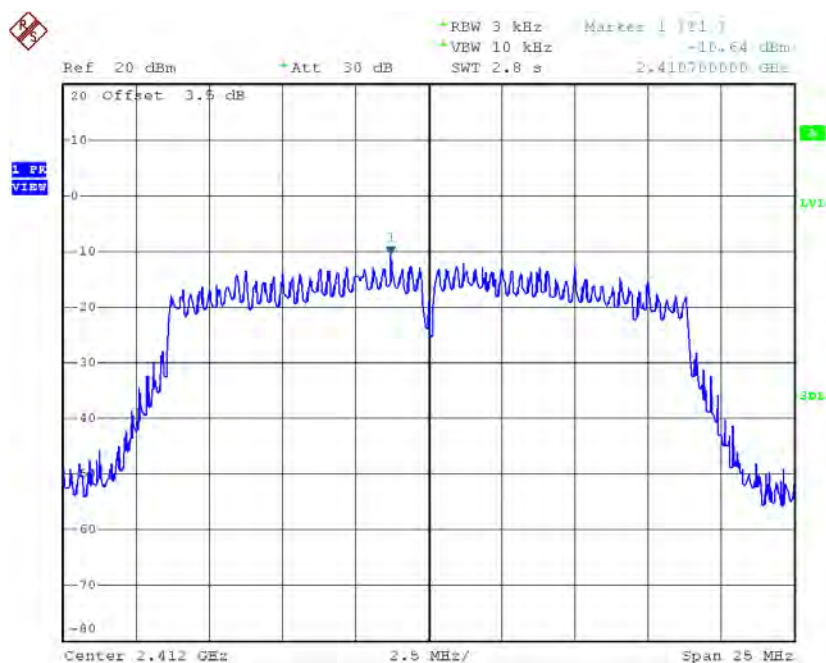


Date: 10.JAN.2017 10:26:18

TX CH06

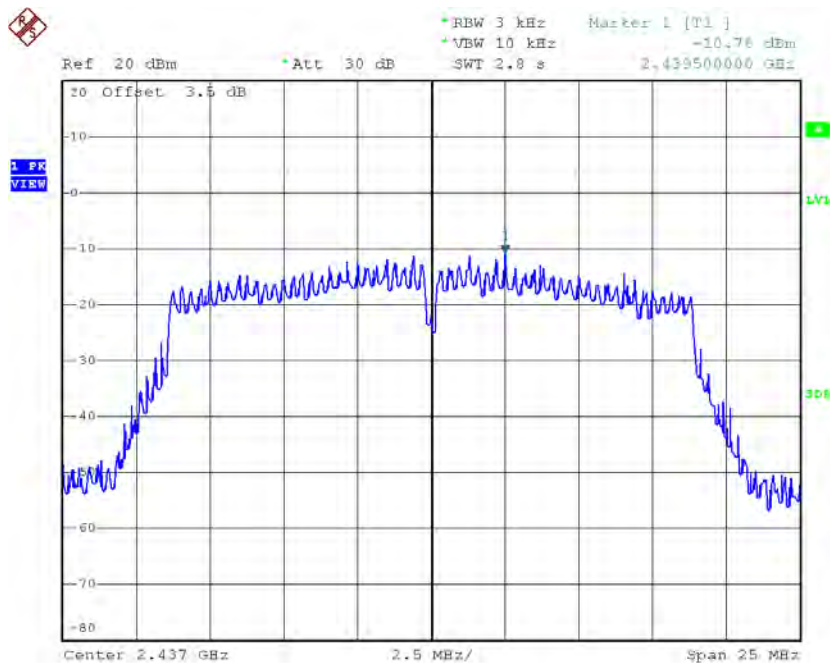

Date: 10.JAN.2017 10:27:42

TX CH11

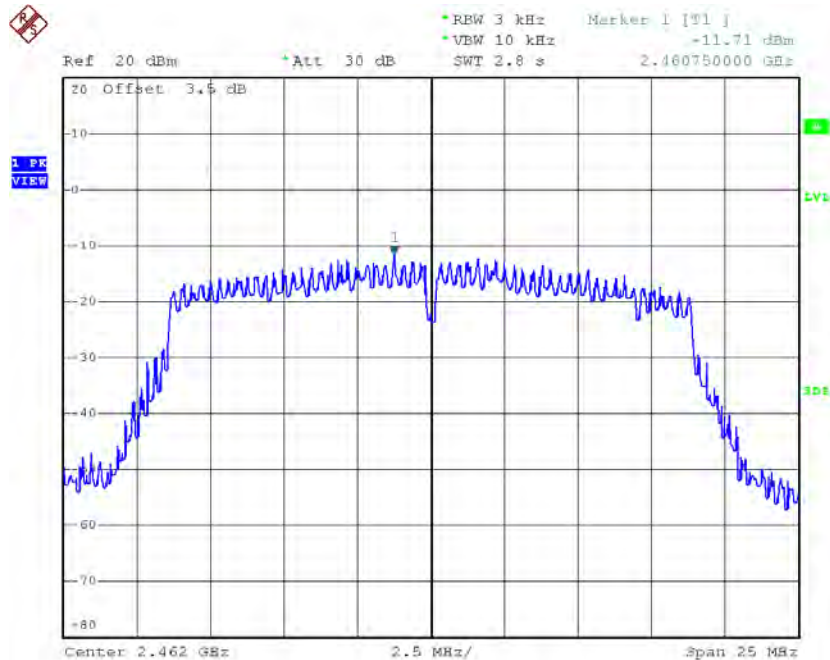

Date: 10.JAN.2017 10:29:25


Test Mode : TX N-20M Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-8.57	0.1390	8.00	Complies
2437	-8.57	0.1390	8.00	Complies
2462	-9.40	0.1149	8.00	Complies

Test Mode : TX N-40M Mode_CH03/06/09_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-14.77	0.0333	8.00	Complies
2437	-15.01	0.0316	8.00	Complies
2452	-14.74	0.0336	8.00	Complies

TX CH03

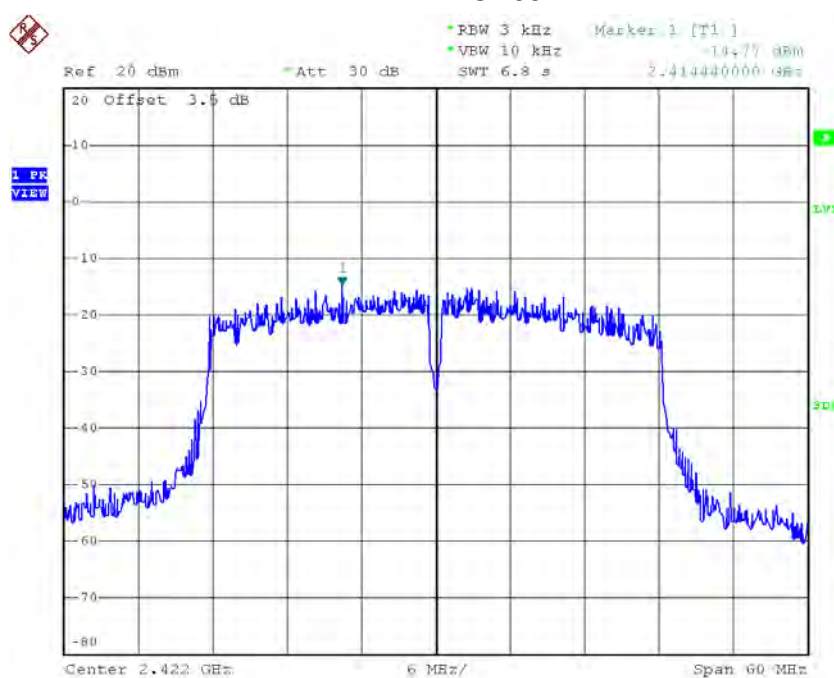


Date: 25.DEC.2016 13:48:39

TX CH06

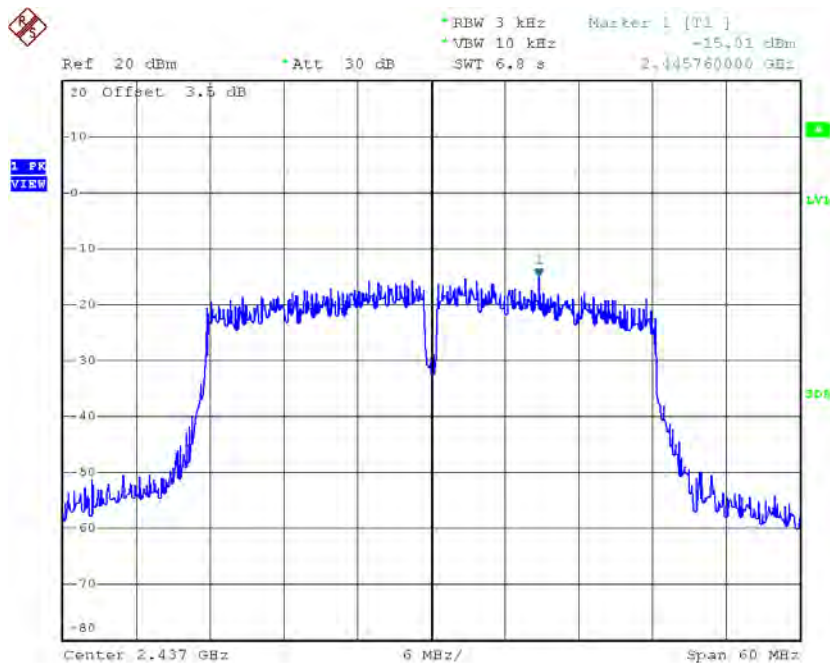

Date: 25.DEC.2016 13:49:58

TX CH09

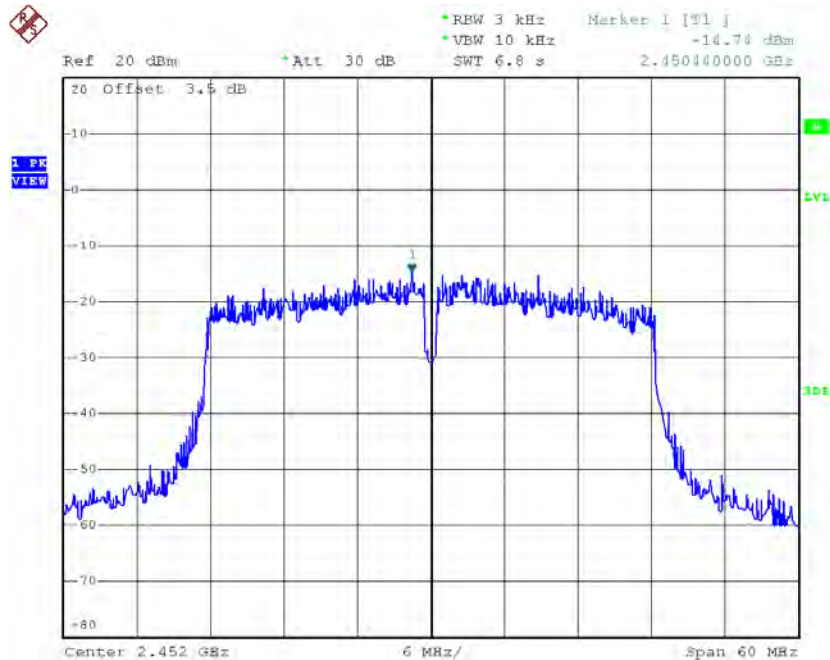


Date: 25.DEC.2016 13:51:25

Test Mode : TX N-40M Mode_CH03/06/09_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-13.42	0.0455	8.00	Complies
2437	-13.14	0.0485	8.00	Complies
2452	-13.35	0.0462	8.00	Complies

TX CH03

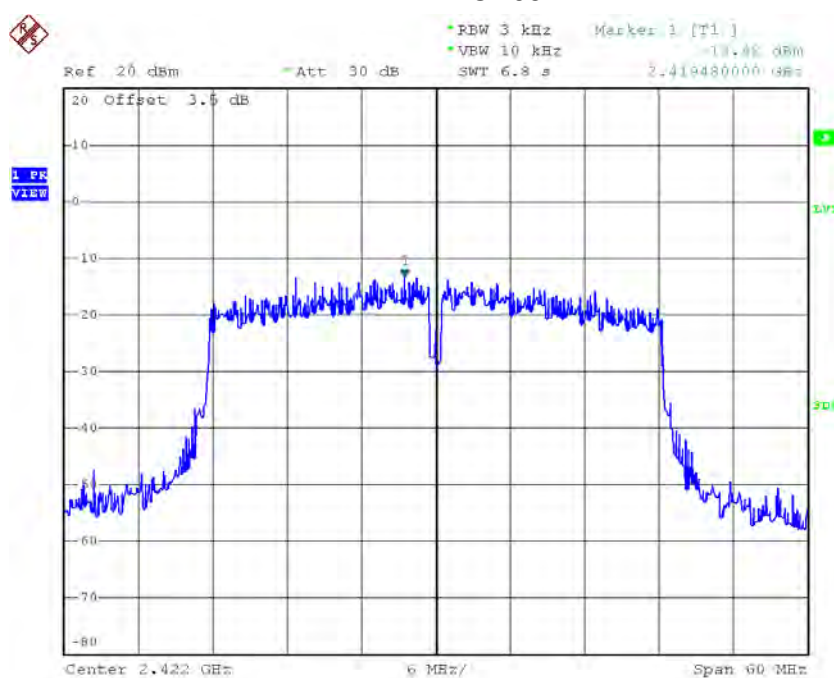


Date: 10.JAN.2017 10:31:21

TX CH06

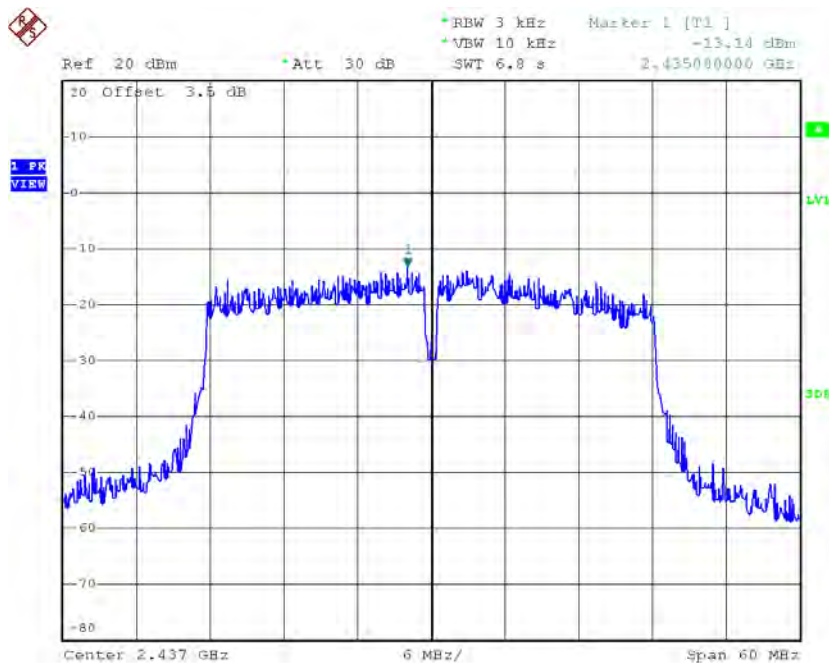

Date: 10.JAN.2017 10:32:28

TX CH09

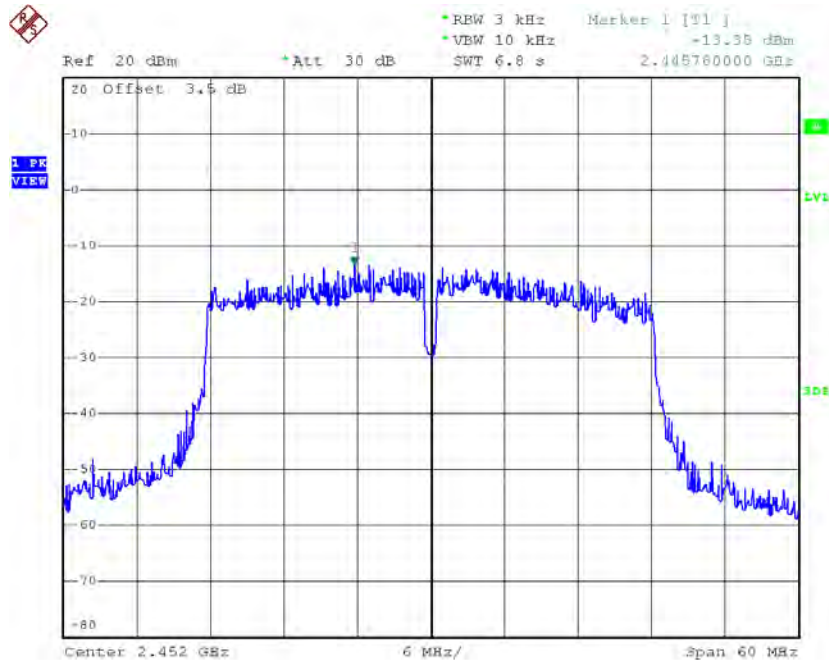

Date: 10.JAN.2017 10:33:45

Test Mode : TX N-40M Mode_CH03/06/09_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-11.03	0.0788	8.00	Complies
2437	-10.96	0.0801	8.00	Complies
2452	-10.98	0.0798	8.00	Complies