


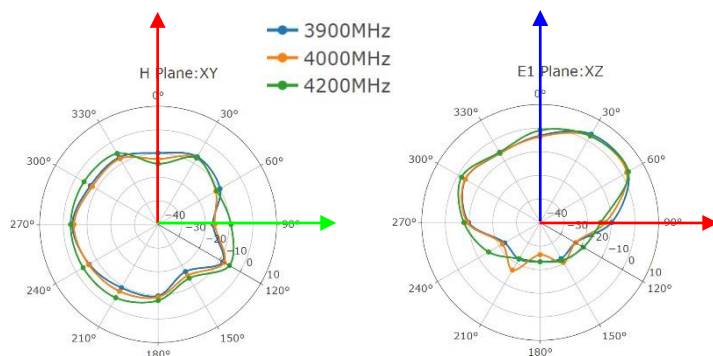


● **MH4**


3600 MHz

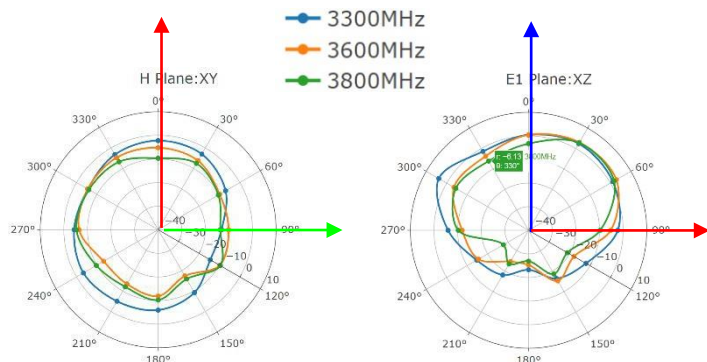




4000 MHz



4700 MHz




5500 MHz

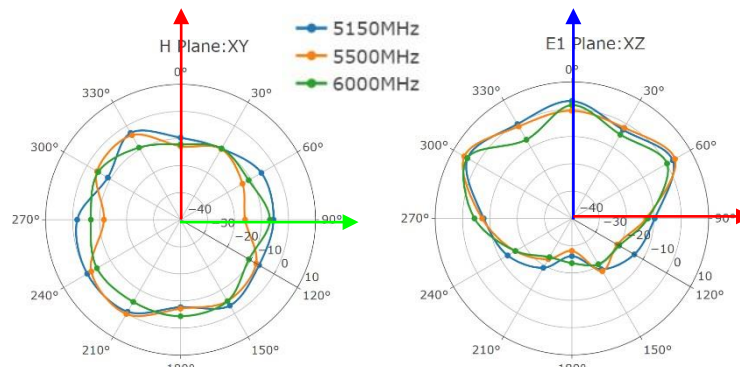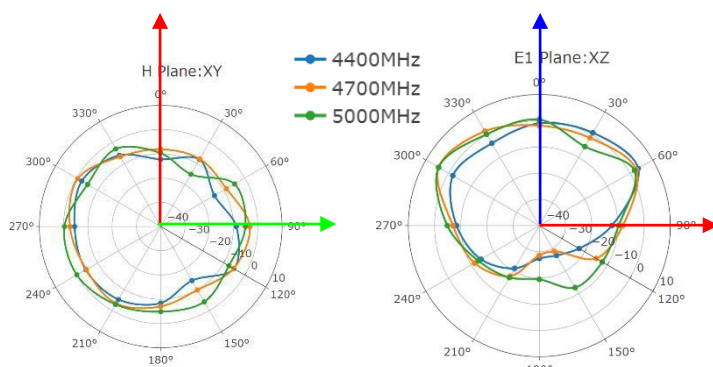


● **GNSS**


1176 MHz

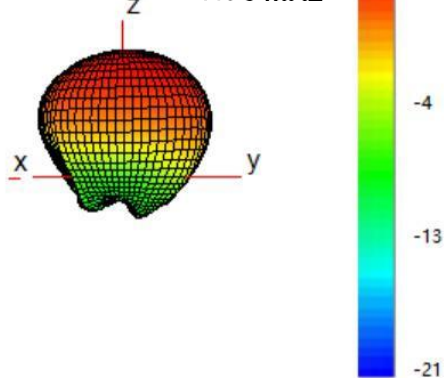


1561 MHz

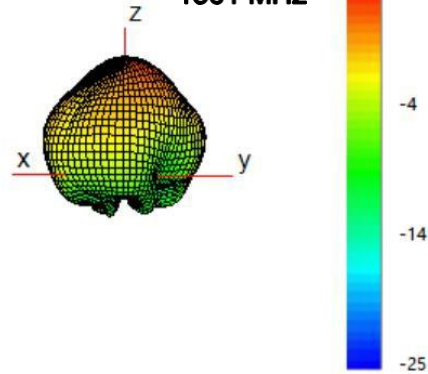


— 1176MHz

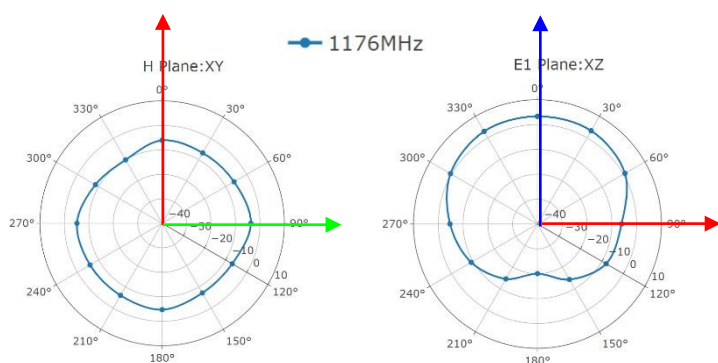


— 1561MHz

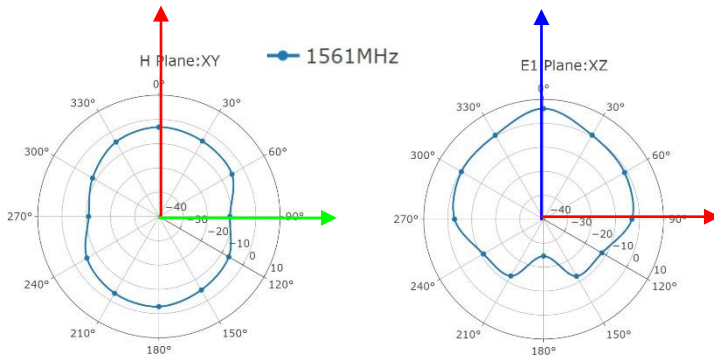


1575 MHz

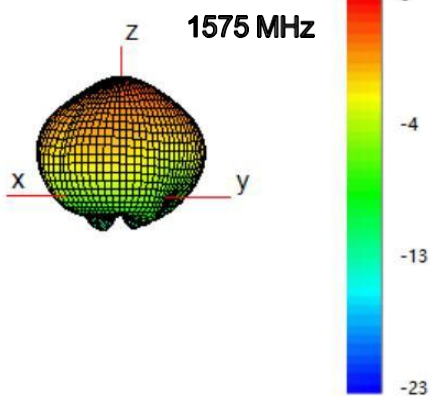


1602 MHz

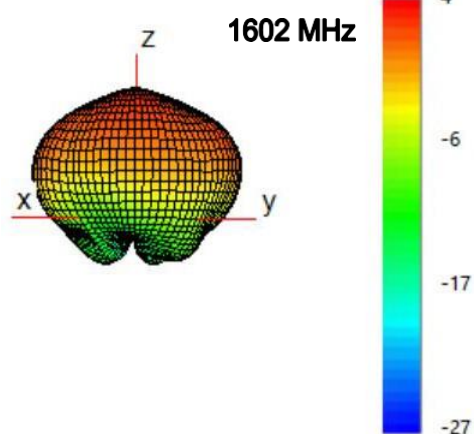

— 1575MHz

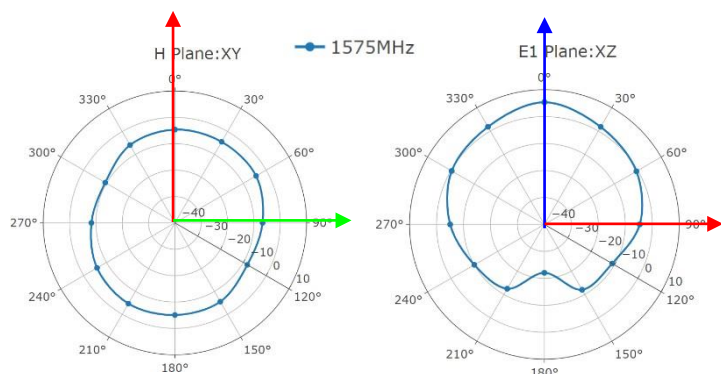

— 1602MHz

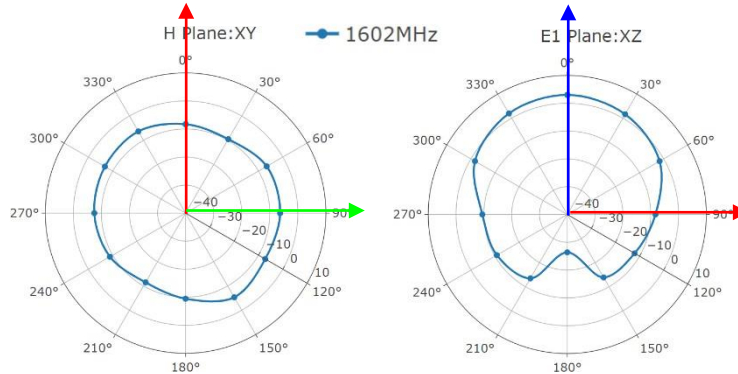

3.3. Active OTA Test

- Based on Module: RG502Q-EA & RG500L-NA
- Test Status: In Free Space.


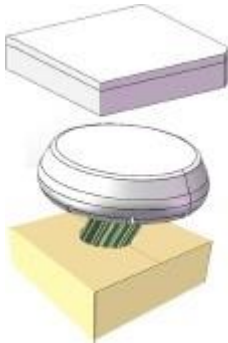

Band		Channel	TRP (dBm)	Channel	TIS (dBm)
LTE	B1 (10 M)	18050	20.2	50	-102.7
		18350	19.9	350	-101.7
		18550	19.6	550	-102.1
	B2 (10 M)	18650	19.0	650	-101.4
		18900	19.6	900	-101.8
		19150	19.8	1150	-101.4
	B3 (10 M)	19250	21.1	1250	-100.4
		19575	20.1	1575	-100.9
		19900	20.7	1900	-100.1
	B4 (10 M)	20000	20.5	2000	-102.7
		20175	20.6	2175	-102.6
		20350	20.9	2350	-102.0
	B5 (10 M)	20450	19.3	2450	-96.8
		20525	19.4	2525	-96.6
		20600	19.2	2600	-96.9
	B7 (10 M)	20800	19.1	2800	-98.3
		21100	20.0	3100	-99.8
		21400	20.7	3400	-100.8
	B8 (10 M)	21500	20.0	3500	-97.4
		21625	20.3	3625	-97.7
		21750	20.2	3750	-98.2
	B12 (5 M)	23035	19.0	5035	-98.5




Band		Channel	TRP (dBm)	Channel	TIS (dBm)
		23095	19.2	5095	-97.3
		23155	19.9	5155	-96.1
	B13 (10 M)	-	-	-	-
		23230	19.3	5230	-96.2
		-	-	-	-
		-	-	-	-
	B14 (10 M)	-	-	-	-
		23330	19.0	5330	-95.0
		-	-	-	-
	B17 (10 M)	23780	18.4	5780	-95.9
		23790	18.6	5790	-95.7
		23800	18.6	5800	-95.3
	B18 (10 M)	23900	20.4	5900	-97.9
		23925	19.7	5925	-97.8
		23950	19.1	5950	-97.7
	B19 (10 M)	24050	19.7	6050	-97.0
		24075	20.4	6075	-97.3
		24100	20.2	6100	-97.3
	B20 (10 M)	24200	20.0	6200	-96.9
		24300	19.6	6300	-97.2
		24400	19.7	6400	-97.3
	B25 (10 M)	26090	19.4	8090	-100.2
		26365	19.7	8365	-99.8
		26640	19.0	8640	-99.4
	B26 (10 M)	26740	18.9	8740	-99.1
		26865	19.3	8865	-97.6

Band		Channel	TRP (dBm)	Channel	TIS (dBm)
	B28 (10 M)	26990	20.6	8990	-98.9
		27260	19.2	9260	-96.1
		27335	19.6	9335	-96.6
		27410	18.8	9410	-97.1
	B38 (20 M)	37850	20.1	37850	-97.6
		38000	21.7	38000	-97.5
		38150	22.3	38150	-97.6
	B39 (20 M)	38350	20.1	38350	-98.3
		38450	20.2	38450	-98.3
		38550	20.2	38550	-98.6
	B40 (20 M)	38750	21.4	38750	-97.9
		39150	21.0	39150	-98.4
		39550	20.3	39550	-98.2
	B41 (20 M)	40340	20.5	40340	-97.3
		40620	20.9	40620	-97.4
		41140	20.1	41140	-97.2
	B66 (10 M)	132022	20.4	66486	-101.8
		132322	20.1	66886	-102.1
		132622	19.5	67086	-101.7
	B71 (10 M)	133172	19.9	68636	-96.0
		133297	19.5	68761	-95.1
		133422	19.3	68886	-95.5
5G	N41 (100 M)	509202	21.77	509202	-90.18
		518598	21.46	518598	-89.72
		528000	22.00	528000	-90.44

Band		Channel	TRP (dBm)	Channel	TIS (dBm)
	N77 (100 M)	623334	22.03	623334	-89.77
		650000	22.60	650000	-90.89
		676666	22.48	676666	-90.11
	N78 (100 M)	623334	22.20	623334	-90.01
		636666	22.41	636666	-90.59
		650000	22.58	650000	-91.25
	N79 (100 M)	697094	20.67	697094	-89.76
		713990	20.23	713990	-89.48
		729468	19.78	729468	-89.10

4 Packaging

Step	Packaging Picture - 2D Picture	Description
1	 <p>Lined with cardboard</p>	<p>1 PCS: Antenna 1 PCS: Lined with Cardboard Size: 185 × 185 × 60 mm</p> <p>Arrange the antenna and put it in the lined cardboard.</p>
2	 <p>EPE Pearl Foam</p> <p>Lined with cardboard</p>	<p>1 PCS: EPE Pearl Foam Size: 186 × 186 × 40 mm</p> <p>After placing the product, use EPE Pearl Foam on the upper layer.</p>
3	 <p>Inner Box</p>	<p>1 PCS: Inner Box Size: 191 × 191 × 135 mm</p> <p>Place the antenna and lining cardboard in Inner Box.</p>

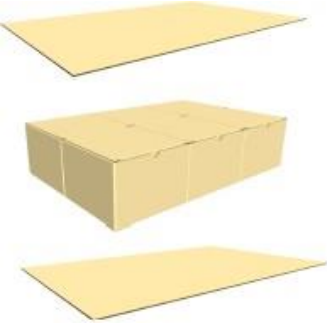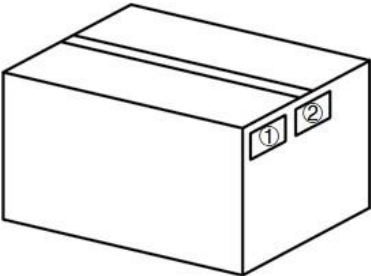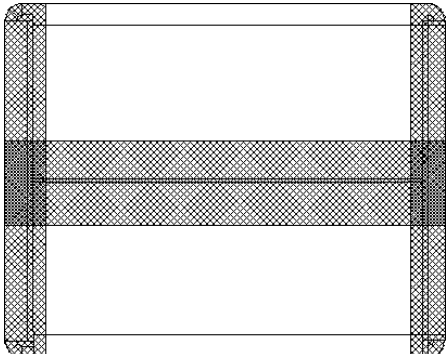4	 <p>Clapboard</p> <p>Inner Box</p> <p>Clapboard</p>	<p>1 PCS: Carton Size: 600 × 404 × 164 mm Antenna: 6 PCS/Carton 2 PCS: Clapboard Size: 588 × 392 mm</p> <p>Place 1 Clapboard on the bottom. Then 6 PCS Antennas in the middle. Then 1 PCS Clapboard on the top.</p>
5		<p>Labeling</p> <p>① Carton Label ② Quality Label</p>
6		<p>Sealing Cartons "I" type sealing cartons</p>

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

[http: www.quectel.com-support-sales.htm](http://www.quectel.com-support-sales.htm)

For technical support, or to report documentation errors, please visit:

[http: www.quectel.com-support-technical.htm](http://www.quectel.com-support-technical.htm)

Or email us at: support@quectel.com

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and-or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under
- d) development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- e) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2023. All rights reserved.

NOTE



This product must not be disposed of as normal household waste, in accordance with EU directive for waste electrical and electronic equipment (WEEE- 2012/19/EU). Instead, it should be disposed of by returning it to the point of sale, or to a municipal recycling collection point.

Revision History

Version	Date	Author	Note
-	2022-04-08	Boris WANG/ Kenny YIN	Creation of the document
1.0	2022-05-26	Boris WANG/ Kenny YIN	First official release
1.1	2022-06-07	Boris WANG	Updated the data (Chapter 3)
1.2	2022-09-13	Boris WANG	Updated the electrical performance data.
2.0	2022-11-11	Wilson BAO	Updated the whole content based on the new datasheet format.
2.1	2023-05-23	Wilson BAO	Updated the cover, the second page and some other small points.



www.quectel.com