

**Test Report**  
**AIR-CAP3702P-B-K9**

**Cisco Aironet 802.11ac Dual Band Access Points**

**FCC ID: LDK102087P**


**5150-5250 MHz**

**Antenna Gain 7 dBi**

**Against the following Specifications:**

**CFR47 Part 15.407**

**Cisco Systems**  
170 West Tasman Drive  
San Jose, CA 95134

|                                                                                     |                                                                                                        |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|  |                    |
| <b>Author:</b> Jose Aguirre<br><b>Tested By</b>                                     | <b>Approved By:</b> Jim Nicholson<br><b>Title:</b> Technical Leader, Engineering<br><b>Revision:</b> 3 |

This report replaces any previously entered test report under EDCS – **1518133**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| <b>SECTION 1: OVERVIEW .....</b>                                          | <b>3</b>  |
| <b>SECTION 2: ASSESSMENT INFORMATION .....</b>                            | <b>4</b>  |
| 2.1 GENERAL .....                                                         | 4         |
| 2.2 DATE OF TESTING.....                                                  | 6         |
| 2.3 REPORT ISSUE DATE .....                                               | 6         |
| 2.4 TESTING FACILITIES .....                                              | 6         |
| 2.5 EQUIPMENT ASSESSED (EUT).....                                         | 6         |
| 2.6 EUT DESCRIPTION .....                                                 | 7         |
| <b>SECTION 3: RESULT SUMMARY .....</b>                                    | <b>9</b>  |
| 3.1 RESULTS SUMMARY TABLE .....                                           | 9         |
| <b>SECTION 4: SAMPLE DETAILS.....</b>                                     | <b>11</b> |
| <b>APPENDIX A: EMISSION TEST RESULTS.....</b>                             | <b>12</b> |
| CONDUCTED TEST SETUP DIAGRAM.....                                         | 12        |
| TARGET MAXIMUM CHANNEL POWER .....                                        | 12        |
| A.1 99% AND 26dB BANDWIDTH .....                                          | 13        |
| A.2 MAXIMUM CONDUCTED OUTPUT POWER/ POWER SPECTRAL DENSITY .....          | 20        |
| A.3 CONDUCTED SPURIOUS EMISSIONS .....                                    | 35        |
| A.4 CONDUCTED BANDEDGE.....                                               | 47        |
| <b>APPENDIX B: EMISSION TEST RESULTS.....</b>                             | <b>55</b> |
| RADIATED EMISSION SETUP DIAGRAM-BELOW 1G .....                            | 55        |
| B.1 RADIATED SPURIOUS EMISSIONS .....                                     | 56        |
| B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ .....                                | 68        |
| B.3 AC CONDUCTED EMISSIONS .....                                          | 70        |
| <b>APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST .....</b> | <b>72</b> |
| <b>APPENDIX E: ABBREVIATION KEY AND DEFINITIONS .....</b>                 | <b>77</b> |

## Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

|                        |
|------------------------|
| <b>Specifications:</b> |
| CFR47 Part 15.407      |

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

|                      |                                      |
|----------------------|--------------------------------------|
| Temperature          | 15°C to 35°C (54°F to 95°F)          |
| Atmospheric Pressure | 860mbar to 1060mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                          |
- e) All AC testing was performed at one or more of the following supply voltages:

|                     |
|---------------------|
| 110V 60 Hz (+/-20%) |
|---------------------|

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

## Measurement Uncertainty Values

|                                   |                         |
|-----------------------------------|-------------------------|
| voltage and power measurements    | $\pm 2$ dB              |
| conducted EIRP measurements       | $\pm 1.4$ dB            |
| radiated measurements             | $\pm 3.2$ dB            |
| frequency measurements            | $\pm 2.4 \cdot 10^{-7}$ |
| temperature measurements          | $\pm 0.54^\circ$        |
| humidity measurements             | $\pm 2.3\%$             |
| DC and low frequency measurements | $\pm 2.5\%$             |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

|                    |            |
|--------------------|------------|
| 30 MHz - 300 MHz   | +/- 3.8 dB |
| 300 MHz - 1000 MHz | +/- 4.3 dB |
| 1 GHz - 10 GHz     | +/- 4.0 dB |
| 10 GHz - 18GHz     | +/- 8.2 dB |
| 18GHz - 26.5GHz    | +/- 4.1 dB |
| 26.5GHz - 40GHz    | +/- 3.9 dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

|                |             |
|----------------|-------------|
| 30 MHz – 40GHz | +/- 0.38 dB |
|----------------|-------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

07-Jul-15 - 08-Aug-15

**2.3 Report Issue Date**

02-November-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.,  
125 West Tasman Drive  
San Jose, CA 95134, USA

**Registration Numbers for Industry Canada**

| <b>Cisco System Site</b> | <b>Address</b>                                    | <b>Site Identifier</b> |
|--------------------------|---------------------------------------------------|------------------------|
| Building P, 10m Chamber  | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-2     |
| Building P, 5m Chamber   | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-1     |
| Building I, 5m Chamber   | 285 W. Tasman Drive<br>San Jose, California 95134 | Company #: 2461M-1     |

**Test Engineers**

Jose Aguirre

**2.5 Equipment Assessed (EUT)**

AIR-CAP3702P-B-K9

## 2.6 EUT Description

The AIR-CAP3702P-B-K9 Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT/VHT20, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Four Antennas, 6 to 54 Mbps

802.11n/ac - Non HT/VHT20 Beam Forming, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20 Beam Forming, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20 Beam Forming, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT/VHT40 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15

802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT/VHT80 Duplicate, One Antenna, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Two Antennas, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Three Antennas, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT80, One Antenna, M0 to M7  
 802.11n/ac - HT/VHT80, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Two Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Three Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Three Antennas, M16 to M23  
 802.11n/ac - HT/VHT80, Four Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Four Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M16 to M23  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 STBC, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 STBC, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 STBC, Four Antennas, M0 to M7

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

| Frequency        | Part Number       | Antenna Type                                           | Antenna Gain (dBi) | Antenna Gain >30 degrees (dBi) |
|------------------|-------------------|--------------------------------------------------------|--------------------|--------------------------------|
| <b>2.4/5 GHz</b> | AIR-ANT2524DB-R   | Dual-resonant black dipole                             | 2 / 4              | NA                             |
|                  | AIR-ANT2524DW-R   | Dual-resonant white dipole                             | 2 / 4              | NA                             |
|                  | AIR-ANT2524DG-R   | Dual-resonant gray dipole                              | 2 / 4              | NA                             |
|                  | AIR-ANT2524V4C-R  | Dual-resonant ceiling mount omni (4-pack)              | 2 / 4              | NA                             |
|                  | AIR-ANT2544V4M-R8 | Dual-resonant omni (4-pack)                            | 3 / 2              | 1                              |
|                  | AIR-ANT2544V4M-R  | Dual-resonant omni (4-pack)                            | 4 / 4              | 1                              |
|                  | AIR-ANT2566P4W-R  | Dual-resonant "directional" antenna (4-pack)           | 6 / 6              | 3                              |
|                  | AIR-ANT2566D4M-R  | Dual-Band Polarization-Diverse Directional Array       | 6 / 6              | 3                              |
|                  | AIR-ANT2547V-N    | Dual Band Omni                                         | 4 / 7              | -7                             |
|                  | AIR-ANT2513P4M-N  | Dual-resonant cross-pol "directional" antenna (4-pack) | 13 / 13            | -7                             |



## Section 3: Result Summary

### 3.1 Results Summary Table

#### Conducted emissions

| Basic Standard                         | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Result |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| FCC 15.407                             | <b>99% &amp; 26 dB Bandwidth:</b><br>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.<br><br>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Pass   |
| FCC 15.407                             | <b>Output Power:</b><br><b>15.407:</b> (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).<br><br>(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. | Pass   |
| FCC 15.407                             | <b>Power Spectral Density:</b><br><b>15.407</b> The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Pass   |
| FCC 15.407                             | <b>Conducted Spurious Emissions / Band-Edge:</b><br>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27dBm/MHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Pass   |
| FCC 15.407<br>FCC 15.209<br>FCC 152.05 | <b>Restricted band:</b><br>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Pass   |

**Radiated Emissions (General requirements)**

| Basic Standard           | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Result |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| FCC 15.209<br>FCC 15.205 | <b>TX Spurious Emissions:</b><br>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.                                                                                                                                                                                                                                                                                                   | Pass   |
| FCC 15.207               | <b>AC conducted Emissions:</b><br>Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries. | Pass   |

\* MPE calculation is recorded in a separate report

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

| Sample No. | Equipment Details | Manufacturer  | Hardware Rev. | Firmware Rev. | Software Rev. | Serial Number |
|------------|-------------------|---------------|---------------|---------------|---------------|---------------|
| S01        | AIR-CAP3702P-B-K9 | Cisco Systems | V02           | AP3G2-K9W7-M  | IOS 15.3      | FTX1850R0F5   |
| S02*       | AIR-PWR-C         | Meanwell      | A0            | NA            | NA            | EB46E93226    |

(\*) S02 and S04 are support equipment Power supplies for EUT S01 and S03

### 4.2 System Details

| System # | Description                      | Samples |
|----------|----------------------------------|---------|
| 1        | AIR-SAP3702P-B-K9 (EUT)          | S01     |
| 2        | AIR-PWR-C (Support power supply) | S02     |

### 4.3 Mode of Operation Details

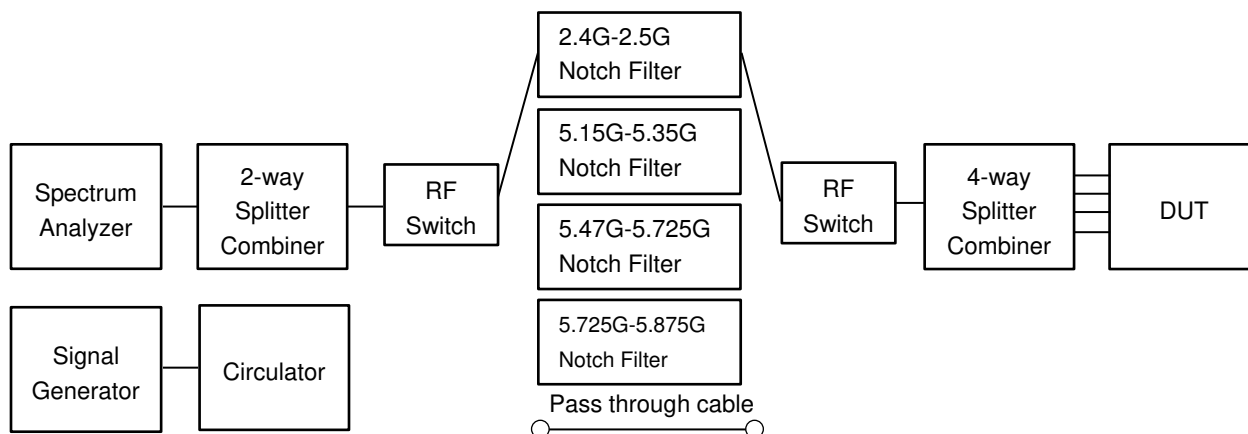
| Mode# | Description             | Comments                |
|-------|-------------------------|-------------------------|
| 1     | Continuous Transmitting | Continuous Transmitting |

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram



### Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

| Operating Mode                                   | Maximum Channel Power (dBm) |      |
|--------------------------------------------------|-----------------------------|------|
|                                                  | Frequency (MHz)             |      |
|                                                  | 5180                        | 5240 |
| Non HT/VHT20, 6 to 54 Mbps                       | 20                          | 20   |
| Non HT/VHT20 Beam Forming, 6 to 54 Mbps          | 18                          | 20   |
| HT/VHT20, M0 to M23, M0 to M9 1-0ss              | 20                          | 22   |
| HT/VHT20 Beam Forming, M0 to M23, M0 to M9 1-0ss | 20                          | 22   |
| HT/VHT20 STBC, M0 to M7                          | 20                          | 22   |
|                                                  | 5190                        | 5230 |
| Non HT/VHT40, 6 to 54 Mbps                       | 16                          | 20   |
| HT/VHT40, M0 to M23, M0 to M9 1-0ss              | 18                          | 21   |
| HT/VHT40 Beam Forming, M0 to M23, M0 to M9 1-0ss | 18                          | 21   |
| HT/VHT40 STBC, M0 to M7                          | 18                          | 21   |
|                                                  | 5210                        |      |
| Non HT/VHT80, 6 to 54 Mbps                       | 13                          |      |
| HT/VHT80, M0 to M23, M0 to M9 1-0ss              | 17                          |      |
| HT/VHT80 Beam Forming, M0 to M23, M0 to M9 1-0ss | 17                          |      |
| HT/VHT80 STBC, M0 to M7                          | 17                          |      |

## A.1 99% and 26dB Bandwidth

**FCC 15.407** The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

### Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW  $\geq$  3 x RBW

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**Tested By :**

Jose Aguirre

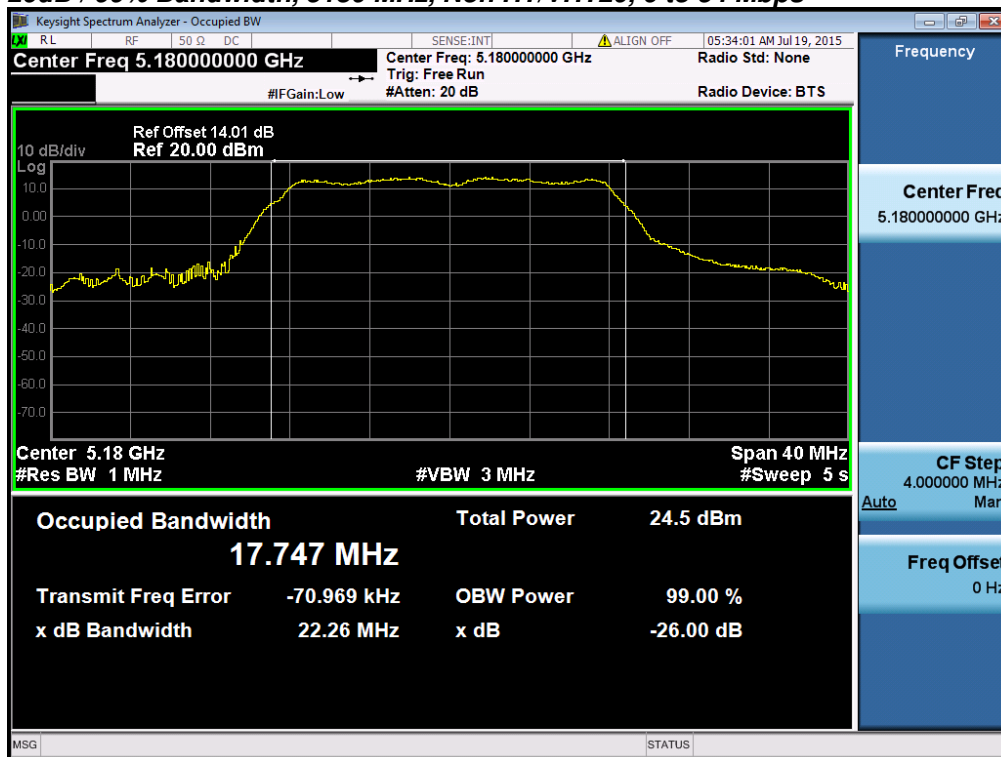
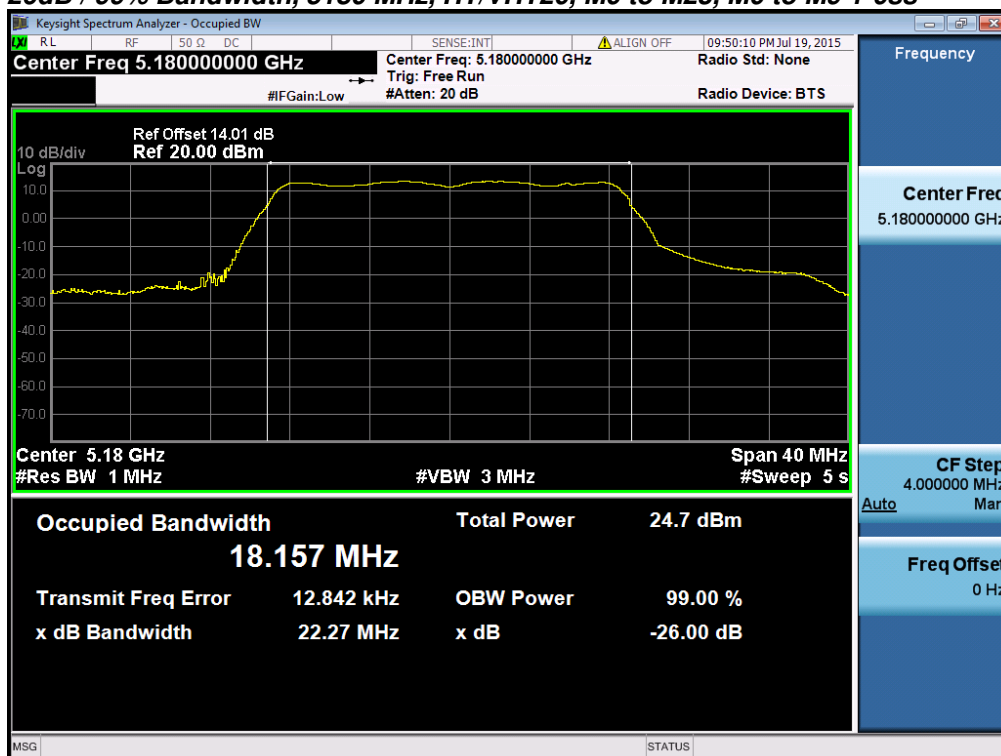
**Date of testing:**

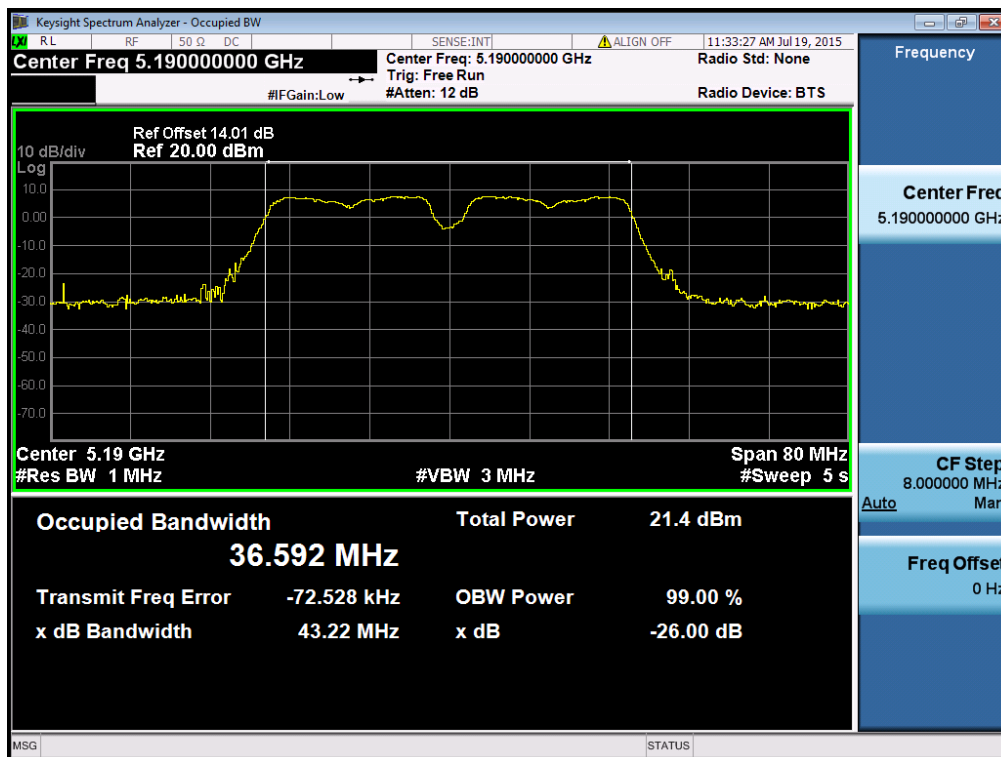
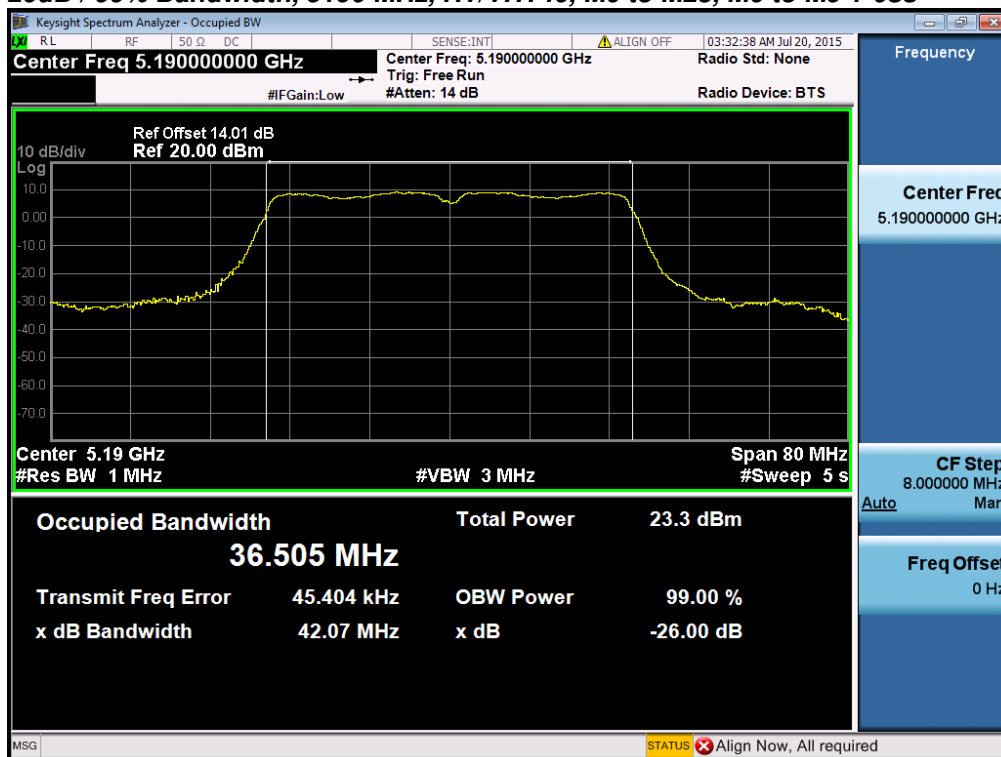
07-Jul-15 - 08-Aug-15

**Test Result : PASS**

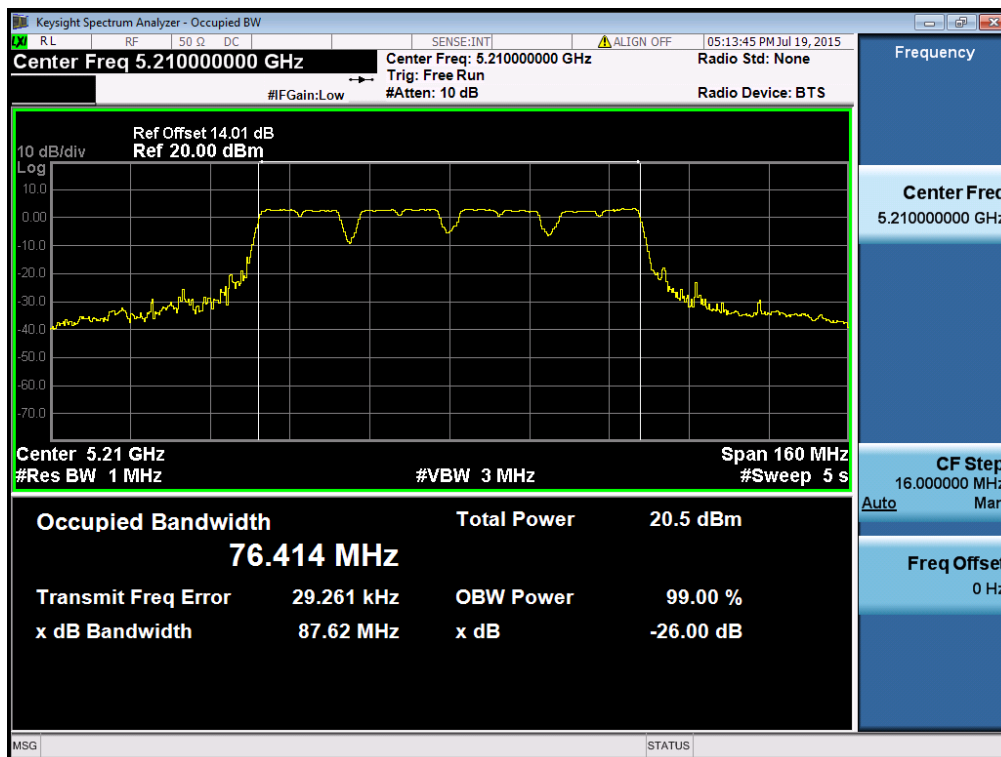
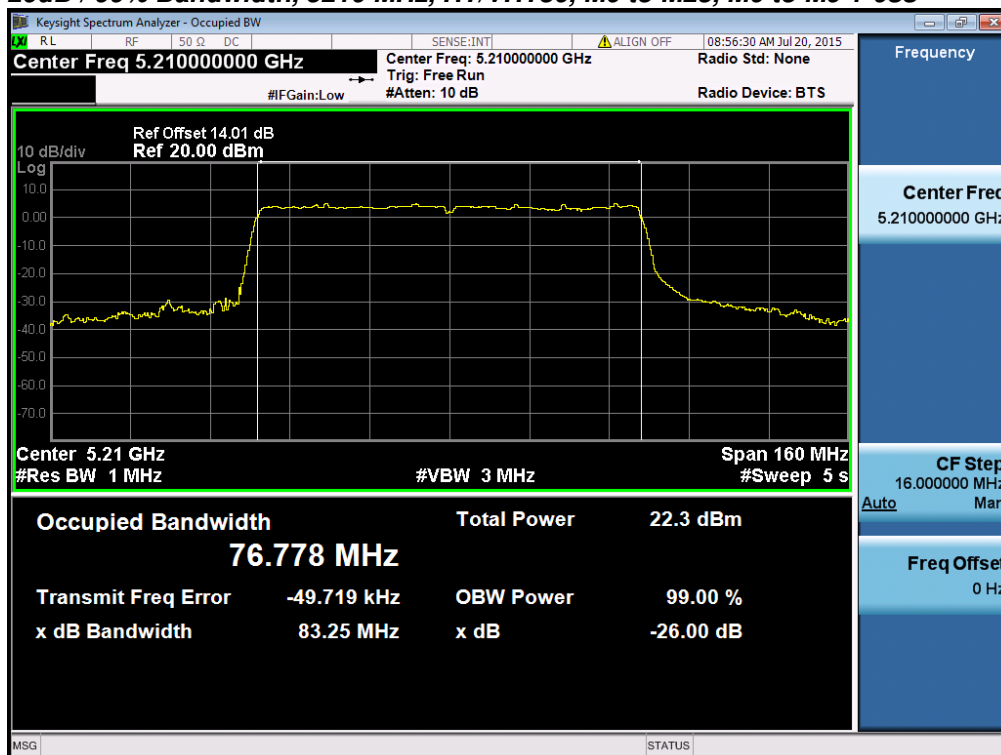
See Appendix C for list of test equipment

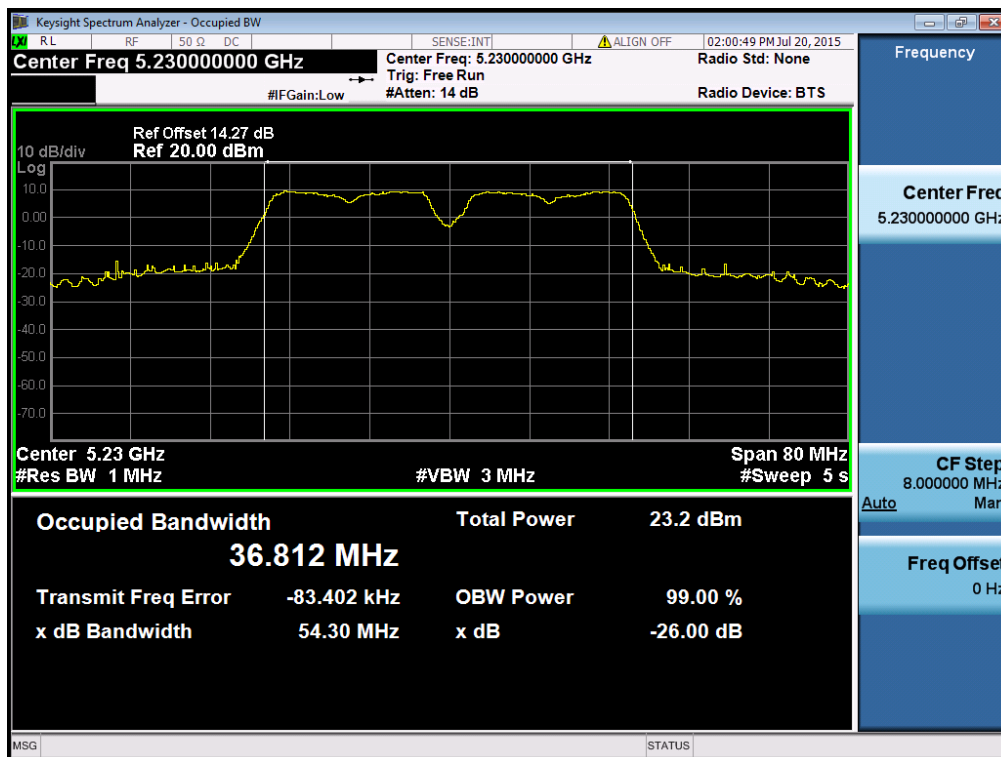
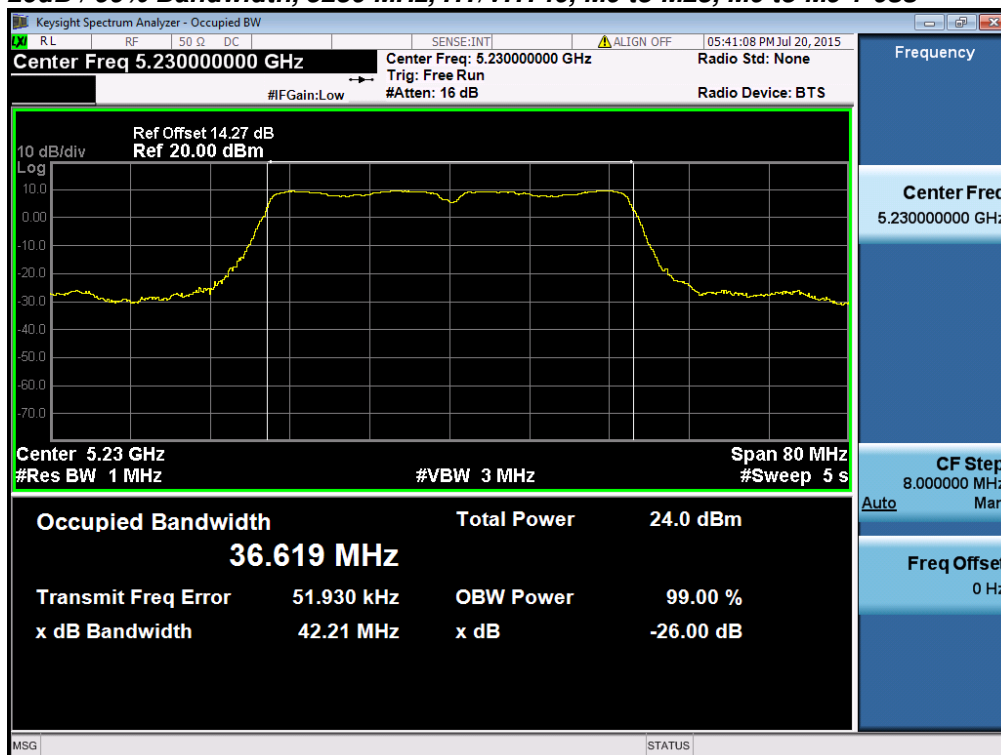
| Frequency (MHz) | Mode                                | Data Rate (Mbps) | 26dB BW (MHz) | 99% BW (MHz) |
|-----------------|-------------------------------------|------------------|---------------|--------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps          | 6                | 22.2          | 17.7         |
|                 | HT/VHT20, M0 to M23, M0 to M9 1-0ss | m0               | 22.5          | 18.2         |
|                 |                                     |                  |               |              |
| 5190            | Non HT/VHT40, 6 to 54 Mbps          | 6                | 43.2          | 36.6         |
|                 | HT/VHT40, M0 to M23, M0 to M9 1-0ss | m0               | 42.1          | 36.5         |
|                 |                                     |                  |               |              |
| 5210            | Non HT/VHT80, 6 to 54 Mbps          | 6                | 87.6          | 76.4         |
|                 | HT/VHT80, M0 to M23, M0 to M9 1-0ss | m0x1             | 83.2          | 76.8         |
|                 |                                     |                  |               |              |
| 5230            | Non HT/VHT40, 6 to 54 Mbps          | 6                | 42.9          | 36.8         |
|                 | HT/VHT40, M0 to M23, M0 to M9 1-0ss | m0               | 42.0          | 36.6         |
|                 |                                     |                  |               |              |
| 5240            | Non HT/VHT20, 6 to 54 Mbps          | 6                | 22.5          | 17.8         |
|                 | HT/VHT20, M0 to M23, M0 to M9 1-0ss | m0               | 22.6          | 18.2         |

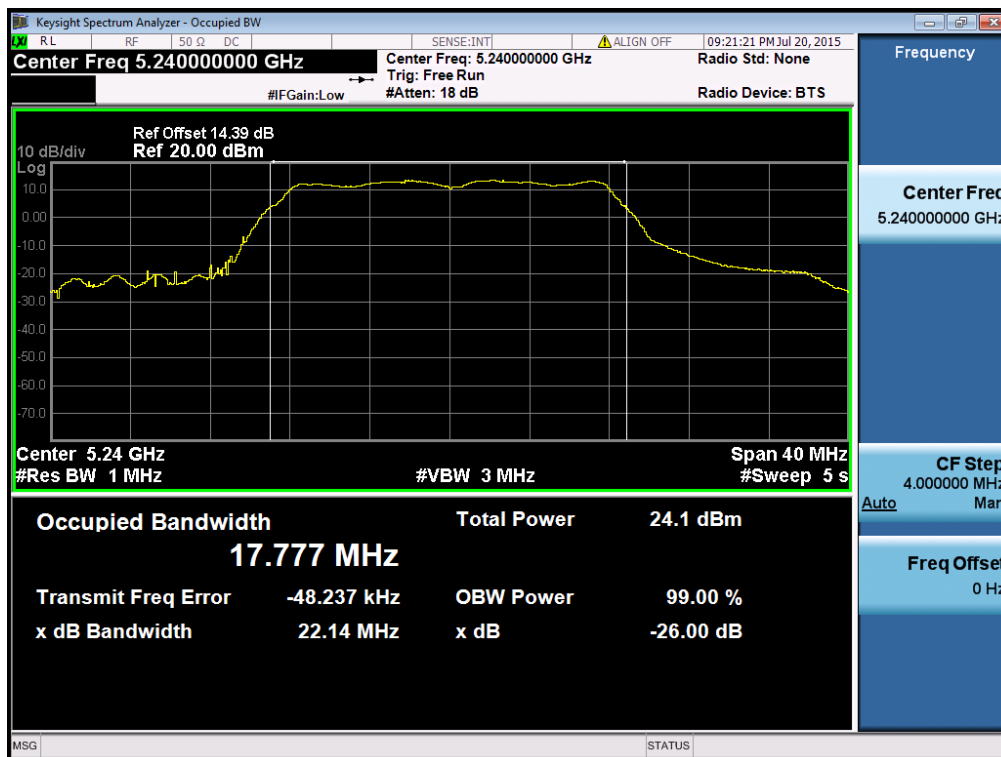
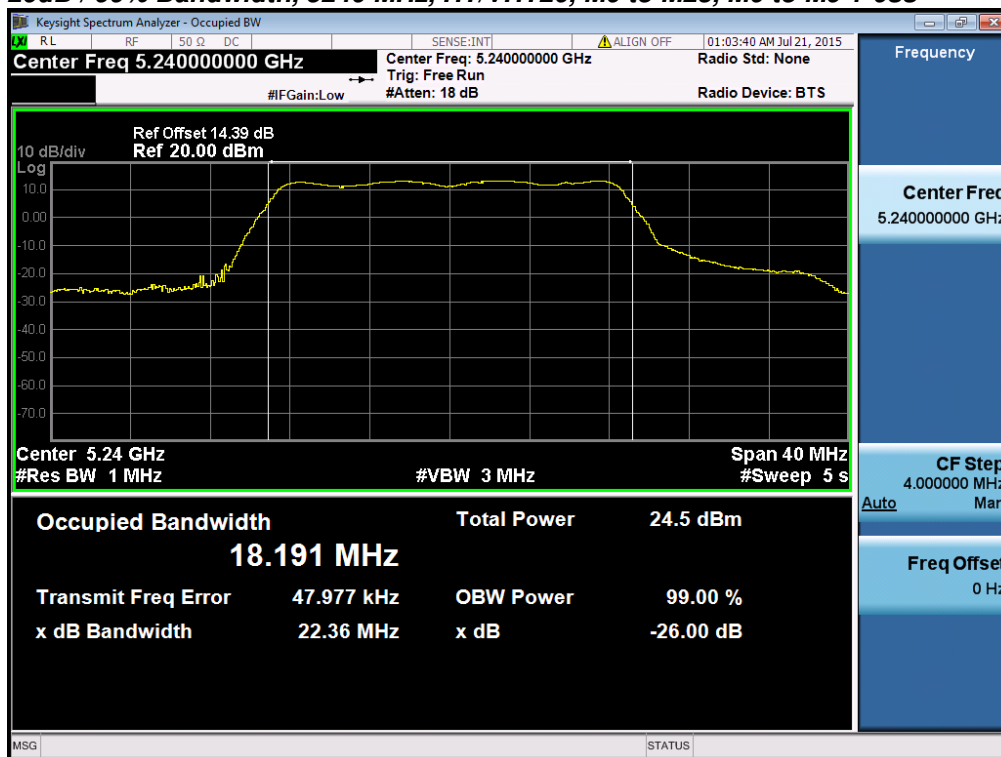
**26dB / 99% Bandwidth, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5180 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss****26dB / 99% Bandwidth, 5190 MHz, Non HT/VHT40, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5190 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss****26dB / 99% Bandwidth, 5210 MHz, Non HT/VHT80, 6 to 54 Mbps**



**26dB / 99% Bandwidth, 5210 MHz, HT/VHT80, M0 to M23, M0 to M9 1-0ss****26dB / 99% Bandwidth, 5230 MHz, Non HT/VHT40, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5230 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss****26dB / 99% Bandwidth, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps**

**26dB / 99% Bandwidth, 5240 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss**

## A.2 Maximum Conducted Output Power/ Power Spectral Density

**15.407** (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output Power</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode at full power</li> <li>2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol> |

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

|                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Output Power</b>                                                                                                               |
| Test parameters                                                                                                                   |
| Span = >1.5 times the OBW<br>RBW = 1MHz<br>VBW ≥ 3 x RBW<br>Sweep = Auto couple<br>Detector = sample<br>Trace = Trace Average 100 |

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                    |                                                  |
|------------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Jose Aguirre | <b>Date of testing:</b><br>07-Jul-15 - 08-Aug-15 |
| <b>Test Result : PASS</b>          |                                                  |

See Appendix C for list of test equipment

| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Tx 3 Max Power (dBm) | Tx 4 Max Power (dBm) | Total Tx Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|----------------------|----------------------|----------------------|----------------------|------------------------------|-------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | 16.3                 |                      |                      |                      | 16.3                         | 29.0        | 12.7        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | 16.3                 | 15.4                 |                      |                      | 18.9                         | 29.0        | 10.1        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | 16.3                 | 15.4                 | 15.0                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | 15.0                 | 14.2                 | 13.7                 | 14.1                 | 20.3                         | 29.0        | 8.7         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | 15.0                 | 14.2                 |                      |                      | 17.6                         | 26.0        | 8.4         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | 12.9                 | 12.0                 | 11.4                 |                      | 16.9                         | 24.2        | 7.3         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | 11.7                 | 10.9                 | 10.3                 | 10.8                 | 17.0                         | 23.0        | 6.0         |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | 16.3                 |                      |                      |                      | 16.3                         | 29.0        | 12.7        |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | 16.3                 | 15.4                 |                      |                      | 18.9                         | 29.0        | 10.1        |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | 16.3                 | 15.4                 |                      |                      | 18.9                         | 29.0        | 10.1        |
|                 | HT/VHT20, M0 to M7                      | 3        | 7                             | 16.3                 | 15.4                 | 15.1                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | 16.3                 | 15.4                 | 15.1                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | 16.3                 | 15.4                 | 15.1                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 20.3                         | 29.0        | 8.7         |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 20.3                         | 29.0        | 8.7         |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 20.3                         | 29.0        | 8.7         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | 15.1                 | 14.1                 |                      |                      | 17.6                         | 26.0        | 8.4         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | 16.3                 | 15.4                 |                      |                      | 18.9                         | 29.0        | 10.1        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | 13.1                 | 12.3                 | 11.6                 |                      | 17.1                         | 24.2        | 7.1         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | 15.1                 | 14.1                 | 13.8                 |                      | 19.1                         | 27.2        | 8.1         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | 16.3                 | 15.4                 | 15.1                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | 12.1                 | 11.3                 | 10.4                 | 11.2                 | 17.3                         | 23.0        | 5.7         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | 13.9                 | 12.9                 | 12.7                 | 13.1                 | 19.2                         | 26.0        | 6.8         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 20.3                         | 27.8        | 7.5         |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | 16.3                 | 15.4                 |                      |                      | 18.9                         | 29.0        | 10.1        |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | 16.3                 | 15.4                 | 15.1                 |                      | 20.4                         | 29.0        | 8.6         |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 20.3                         | 29.0        | 8.7         |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | 13.0                 |                      |                      |                      | 13.0                         | 29.0        | 16.0        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | 12.0                 | 11.3                 |                      |                      | 14.7                         | 29.0        | 14.3        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | 11.1                 | 10.3                 | 9.6                  |                      | 15.1                         | 29.0        | 13.9        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | 11.1                 | 10.3                 | 9.6                  | 10.3                 | 16.4                         | 29.0        | 12.6        |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | 15.2                 |                      |                      |                      | 15.2                         | 29.0        | 13.8        |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | 14.0                 | 13.0                 |                      |                      | 16.5                         | 29.0        | 12.5        |
|                 | HT/VHT40, M8 to M15                     | 2        | 7                             | 14.0                 | 13.0                 |                      |                      | 16.5                         | 29.0        | 12.5        |

|      |                                   |   |    |      |      |      |      |      |      |      |
|------|-----------------------------------|---|----|------|------|------|------|------|------|------|
|      | HT/VHT40, M0 to M7                | 3 | 7  | 12.9 | 12.2 | 11.3 |      | 17.0 | 29.0 | 12.0 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | 12.9 | 12.2 | 11.3 |      | 17.0 | 29.0 | 12.0 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | 12.9 | 12.2 | 11.3 |      | 17.0 | 29.0 | 12.0 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | 12.9 | 12.2 | 11.3 | 12.2 | 18.2 | 29.0 | 10.8 |
|      | HT/VHT40, M8 to M15               | 4 | 7  | 12.9 | 12.2 | 11.3 | 12.2 | 18.2 | 29.0 | 10.8 |
|      | HT/VHT40, M16 to M23              | 4 | 7  | 12.9 | 12.2 | 11.3 | 12.2 | 18.2 | 29.0 | 10.8 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | 12.9 | 12.2 |      |      | 15.6 | 26.0 | 10.4 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | 14.0 | 13.0 |      |      | 16.5 | 29.0 | 12.5 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | 10.8 | 9.9  | 9.3  |      | 14.8 | 24.2 | 9.4  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | 12.9 | 12.2 | 11.3 |      | 17.0 | 27.2 | 10.2 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | 12.9 | 12.2 | 11.3 |      | 17.0 | 29.0 | 12.0 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | 8.9  | 7.7  | 7.1  | 8.1  | 14.0 | 23.0 | 9.0  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | 11.9 | 11.2 | 10.3 | 11.0 | 17.2 | 26.0 | 8.8  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | 12.9 | 12.2 | 11.3 | 12.2 | 18.2 | 27.8 | 9.6  |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | 14.0 | 13.0 |      |      | 16.5 | 29.0 | 12.5 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | 12.9 | 12.2 | 11.3 |      | 17.0 | 29.0 | 12.0 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | 12.9 | 12.2 | 11.3 | 12.2 | 18.2 | 29.0 | 10.8 |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | 12.4 |      |      |      | 12.4 | 29.0 | 16.6 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | 10.5 | 9.9  |      |      | 13.2 | 29.0 | 15.8 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | 8.6  | 7.8  | 7.2  |      | 12.7 | 29.0 | 16.3 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | 7.4  | 6.6  | 6.2  | 7.4  | 13.0 | 29.0 | 16.0 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | 13.9 |      |      |      | 13.9 | 29.0 | 15.1 |
|      | HT/VHT80, M0 to M7                | 2 | 7  | 12.7 | 12.2 |      |      | 15.5 | 29.0 | 13.5 |
|      | HT/VHT80, M8 to M15               | 2 | 7  | 12.7 | 12.2 |      |      | 15.5 | 29.0 | 13.5 |
|      | HT/VHT80, M0 to M7                | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | 12.7 | 12.2 |      |      | 15.5 | 29.0 | 13.5 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | 12.7 | 12.2 |      |      | 15.5 | 29.0 | 13.5 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | 12.7 | 12.2 |      |      | 15.5 | 29.0 | 13.5 |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | 11.6 | 11.1 | 10.4 |      | 15.8 | 29.0 | 13.2 |
|      | HT/VHT80 STBC, M0 to M7           | 4 | 7  | 11.6 | 11.1 | 10.4 | 11.0 | 17.1 | 29.0 | 11.9 |

|      |                                                |          |           |             |             |             |             |             |             |            |
|------|------------------------------------------------|----------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|------------|
| 5230 | Non HT/VHT40, 6 to 54 Mbps                     | 1        | 7         | 15.0        |             |             |             | 15.0        | 29.0        | 14.0       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 2        | 7         | 15.0        | 14.4        |             |             | 17.7        | 29.0        | 11.3       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 3        | 7         | 15.0        | 14.4        | 14.1        |             | 19.3        | 29.0        | 9.7        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 4        | 7         | 15.0        | 14.4        | 14.1        | 14.3        | 20.5        | 29.0        | 8.5        |
|      | HT/VHT40, M0 to M7                             | 1        | 7         | 15.8        |             |             |             | 15.8        | 29.0        | 13.2       |
|      | HT/VHT40, M0 to M7                             | 2        | 7         | 15.8        | 15.3        |             |             | 18.6        | 29.0        | 10.4       |
|      | HT/VHT40, M8 to M15                            | 2        | 7         | 15.8        | 15.3        |             |             | 18.6        | 29.0        | 10.4       |
|      | HT/VHT40, M0 to M7                             | 3        | 7         | 15.8        | 15.3        | 14.8        |             | 20.1        | 29.0        | 8.9        |
|      | HT/VHT40, M8 to M15                            | 3        | 7         | 15.8        | 15.3        | 14.8        |             | 20.1        | 29.0        | 8.9        |
|      | HT/VHT40, M16 to M23                           | 3        | 7         | 15.8        | 15.3        | 14.8        |             | 20.1        | 29.0        | 8.9        |
|      | HT/VHT40, M0 to M7                             | 4        | 7         | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 29.0        | 7.7        |
|      | HT/VHT40, M8 to M15                            | 4        | 7         | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 29.0        | 7.7        |
|      | HT/VHT40, M16 to M23                           | 4        | 7         | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 29.0        | 7.7        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 2        | 10        | 15.8        | 15.3        |             |             | 18.6        | 26.0        | 7.4        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 2        | 7         | 15.8        | 15.3        |             |             | 18.6        | 29.0        | 10.4       |
|      | HT/VHT40 Beam Forming, M0 to M7                | 3        | 12        | 15.8        | 15.3        | 14.8        |             | 20.1        | 24.2        | 4.1        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 3        | 9         | 15.8        | 15.3        | 14.8        |             | 20.1        | 27.2        | 7.1        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 3        | 7         | 15.8        | 15.3        | 14.8        |             | 20.1        | 29.0        | 8.9        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 4        | 13        | 14.2        | 13.3        | 12.7        | 13.4        | 19.5        | 23.0        | 3.5        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 4        | 10        | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 26.0        | 4.7        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 4        | 8         | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 27.8        | 6.5        |
|      | HT/VHT40 STBC, M0 to M7                        | 2        | 7         | 15.8        | 15.3        |             |             | 18.6        | 29.0        | 10.4       |
|      | HT/VHT40 STBC, M0 to M7                        | 3        | 7         | 15.8        | 15.3        | 14.8        |             | 20.1        | 29.0        | 8.9        |
|      | HT/VHT40 STBC, M0 to M7                        | 4        | 7         | 15.8        | 15.3        | 14.8        | 15.3        | 21.3        | 29.0        | 7.7        |
| 5240 | Non HT/VHT20, 6 to 54 Mbps                     | 1        | 7         | 16.0        |             |             |             | 16.0        | 29.0        | 13.0       |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 2        | 7         | 16.0        | 15.6        |             |             | 18.8        | 29.0        | 10.2       |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 3        | 7         | 16.0        | 15.6        | 15.3        |             | 20.4        | 29.0        | 8.6        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 4        | 7         | 14.8        | 14.5        | 14.0        | 14.2        | 20.4        | 29.0        | 8.6        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 2        | 10        | 16.0        | 15.6        |             |             | 18.8        | 26.0        | 7.2        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 3        | 12        | 16.0        | 15.6        | 15.3        |             | 20.4        | 24.2        | 3.8        |
|      | <b>Non HT/VHT20 Beam Forming, 6 to 54 Mbps</b> | <b>4</b> | <b>13</b> | <b>14.8</b> | <b>14.5</b> | <b>14.0</b> | <b>14.2</b> | <b>20.4</b> | <b>23.0</b> | <b>2.6</b> |
|      | HT/VHT20, M0 to M7                             | 1        | 7         | 16.0        |             |             |             | 16.0        | 29.0        | 13.0       |
|      | HT/VHT20, M0 to M7                             | 2        | 7         | 16.0        | 15.3        |             |             | 18.7        | 29.0        | 10.3       |
|      | HT/VHT20, M8 to M15                            | 2        | 7         | 16.0        | 15.3        |             |             | 18.7        | 29.0        | 10.3       |
|      | HT/VHT20, M0 to M7                             | 3        | 7         | 16.0        | 15.3        | 15.4        |             | 20.3        | 29.0        | 8.7        |
|      | HT/VHT20, M8 to M15                            | 3        | 7         | 16.0        | 15.3        | 15.4        |             | 20.3        | 29.0        | 8.7        |
|      | HT/VHT20, M16 to M23                           | 3        | 7         | 16.0        | 15.3        | 15.4        |             | 20.3        | 29.0        | 8.7        |
|      | HT/VHT20, M0 to M7                             | 4        | 7         | 14.6        | 14.4        | 14.0        | 14.3        | 20.4        | 29.0        | 8.6        |
|      | HT/VHT20, M8 to M15                            | 4        | 7         | 16.0        | 15.3        | 15.4        | 15.4        | 21.6        | 29.0        | 7.4        |
|      | HT/VHT20, M16 to M23                           | 4        | 7         | 16.0        | 15.3        | 15.4        | 15.4        | 21.6        | 29.0        | 7.4        |

|                                   |   |    |      |      |      |      |      |      |      |
|-----------------------------------|---|----|------|------|------|------|------|------|------|
| HT/VHT20 Beam Forming, M0 to M7   | 2 | 10 | 16.0 | 15.3 |      |      | 18.7 | 26.0 | 7.3  |
| HT/VHT20 Beam Forming, M8 to M15  | 2 | 7  | 16.0 | 15.3 |      |      | 18.7 | 29.0 | 10.3 |
| HT/VHT20 Beam Forming, M0 to M7   | 3 | 12 | 16.0 | 15.3 | 15.4 |      | 20.3 | 24.2 | 3.9  |
| HT/VHT20 Beam Forming, M8 to M15  | 3 | 9  | 16.0 | 15.3 | 15.4 |      | 20.3 | 27.2 | 6.9  |
| HT/VHT20 Beam Forming, M16 to M23 | 3 | 7  | 16.0 | 15.3 | 15.4 |      | 20.3 | 29.0 | 8.7  |
| HT/VHT20 Beam Forming, M0 to M7   | 4 | 13 | 14.6 | 14.4 | 14.0 | 14.3 | 20.4 | 23.0 | 2.6  |
| HT/VHT20 Beam Forming, M8 to M15  | 4 | 10 | 16.0 | 15.3 | 15.4 | 15.4 | 21.6 | 26.0 | 4.4  |
| HT/VHT20 Beam Forming, M16 to M23 | 4 | 8  | 16.0 | 15.3 | 15.4 | 15.4 | 21.6 | 27.8 | 6.2  |
| HT/VHT20 STBC, M0 to M7           | 2 | 7  | 16.0 | 15.3 |      |      | 18.7 | 29.0 | 10.3 |
| HT/VHT20 STBC, M0 to M7           | 3 | 7  | 16.0 | 15.3 | 15.4 |      | 20.3 | 29.0 | 8.7  |
| HT/VHT20 STBC, M0 to M7           | 4 | 7  | 16.0 | 15.3 | 15.4 | 15.4 | 21.6 | 29.0 | 7.4  |



| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Tx 3 PSD (dBm/MHz) | Tx 4 PSD (dBm/MHz) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|--------------------|--------------------|--------------------|--------------------|---------------------|-----------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | 5.9                |                    |                    |                    | 5.9                 | 16.0            | 10.1        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | 5.9                | 5.1                |                    |                    | 8.5                 | 16.0            | 7.5         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | 5.9                | 5.1                | 4.5                |                    | 10.0                | 16.0            | 6.0         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | 4.7                | 4.1                | 3.3                | 3.7                | 10.0                | 16.0            | 6.0         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | 4.7                | 4.1                |                    |                    | 7.4                 | 13.0            | 5.6         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | 2.6                | 1.8                | 1.3                |                    | 6.7                 | 11.2            | 4.5         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | 1.3                | 0.6                | -0.2               | 0.1                | 6.5                 | 10.0            | 3.5         |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | 5.4                |                    |                    |                    | 5.4                 | 16.0            | 10.6        |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | 5.4                | 4.6                |                    |                    | 8.0                 | 16.0            | 8.0         |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | 5.4                | 4.6                |                    |                    | 8.0                 | 16.0            | 8.0         |
|                 | HT/VHT20, M0 to M7                      | 3        | 7                             | 5.4                | 4.6                | 4.5                |                    | 9.6                 | 16.0            | 6.4         |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | 5.4                | 4.6                | 4.5                |                    | 9.6                 | 16.0            | 6.4         |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | 5.4                | 4.6                | 4.5                |                    | 9.6                 | 16.0            | 6.4         |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | 4.5                | 3.4                | 3.2                | 3.7                | 9.7                 | 16.0            | 6.3         |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | 4.5                | 3.4                | 3.2                | 3.7                | 9.7                 | 16.0            | 6.3         |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | 4.5                | 3.4                | 3.2                | 3.7                | 9.7                 | 16.0            | 6.3         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | 4.5                | 3.4                |                    |                    | 7.0                 | 13.0            | 6.0         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | 5.4                | 4.6                |                    |                    | 8.0                 | 16.0            | 8.0         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | 2.2                | 1.6                | 1.0                |                    | 6.4                 | 11.2            | 4.8         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | 4.5                | 3.4                | 3.2                |                    | 8.5                 | 14.2            | 5.7         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | 5.4                | 4.6                | 4.5                |                    | 9.6                 | 16.0            | 6.4         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | 1.2                | 0.7                | -0.2               | 0.7                | 6.6                 | 10.0            | 3.4         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | 3.1                | 2.1                | 2.1                | 2.2                | 8.4                 | 13.0            | 4.6         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | 4.5                | 3.4                | 3.2                | 3.7                | 9.7                 | 14.8            | 5.1         |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | 5.4                | 4.6                |                    |                    | 8.0                 | 16.0            | 8.0         |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | 5.4                | 4.6                | 4.5                |                    | 9.6                 | 16.0            | 6.4         |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | 4.5                | 3.4                | 3.2                | 3.7                | 9.7                 | 16.0            | 6.3         |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | -0.1               |                    |                    |                    | -0.1                | 16.0            | 16.1        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | -1.3               | -2.3               |                    |                    | 1.2                 | 16.0            | 14.8        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | -2.4               | -2.7               | -3.8               |                    | 1.8                 | 16.0            | 14.2        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | -2.4               | -2.7               | -3.8               | -3.0               | 3.1                 | 16.0            | 12.9        |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | 1.7                |                    |                    |                    | 1.7                 | 16.0            | 14.3        |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | 0.4                | -0.5               |                    |                    | 3.0                 | 16.0            | 13.0        |
|                 | HT/VHT40, M8 to M15                     | 2        | 7                             | 0.4                | -0.5               |                    |                    | 3.0                 | 16.0            | 13.0        |

|      |                                   |   |    |      |       |       |      |      |      |      |
|------|-----------------------------------|---|----|------|-------|-------|------|------|------|------|
|      | HT/VHT40, M0 to M7                | 3 | 7  | -0.7 | -1.3  | -2.0  |      | 3.5  | 16.0 | 12.5 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | -0.7 | -1.3  | -2.0  |      | 3.5  | 16.0 | 12.5 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | -0.7 | -1.3  | -2.0  |      | 3.5  | 16.0 | 12.5 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | -0.7 | -1.3  | -2.0  | -1.4 | 4.7  | 16.0 | 11.3 |
|      | HT/VHT40, M8 to M15               | 4 | 7  | -0.7 | -1.3  | -2.0  | -1.4 | 4.7  | 16.0 | 11.3 |
|      | HT/VHT40, M16 to M23              | 4 | 7  | -0.7 | -1.3  | -2.0  | -1.4 | 4.7  | 16.0 | 11.3 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | -0.7 | -1.3  |       |      | 2.0  | 13.0 | 11.0 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | 0.4  | -0.5  |       |      | 3.0  | 16.0 | 13.0 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | -2.6 | -3.8  | -4.3  |      | 1.3  | 11.2 | 9.9  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | -0.7 | -1.3  | -2.0  |      | 3.5  | 14.2 | 10.7 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | -0.7 | -1.3  | -2.0  |      | 3.5  | 16.0 | 12.5 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | -4.8 | -5.9  | -6.7  | -5.4 | 0.4  | 10.0 | 9.6  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | -1.8 | -2.3  | -3.3  | -2.7 | 3.5  | 13.0 | 9.5  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | -0.7 | -1.3  | -2.0  | -1.4 | 4.7  | 14.8 | 10.1 |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | 0.4  | -0.5  |       |      | 3.0  | 16.0 | 13.0 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | -0.7 | -1.3  | -2.0  |      | 3.5  | 16.0 | 12.5 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | -0.7 | -1.3  | -2.0  | -1.4 | 4.7  | 16.0 | 11.3 |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | -4.4 |       |       |      | -4.4 | 16.0 | 20.4 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | -6.0 | -6.5  |       |      | -3.2 | 16.0 | 19.2 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | -8.4 | -8.6  | -9.4  |      | -4.0 | 16.0 | 20.0 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | -9.4 | -10.0 | -10.4 | -8.9 | -3.6 | 16.0 | 19.6 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | -3.6 |       |       |      | -3.6 | 16.0 | 19.6 |
|      | HT/VHT80, M0 to M7                | 2 | 7  | -4.5 | -5.0  |       |      | -1.7 | 16.0 | 17.7 |
|      | HT/VHT80, M8 to M15               | 2 | 7  | -4.5 | -5.0  |       |      | -1.7 | 16.0 | 17.7 |
|      | HT/VHT80, M0 to M7                | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | -4.5 | -5.0  |       |      | -1.7 | 16.0 | 17.7 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | -4.5 | -5.0  |       |      | -1.7 | 16.0 | 17.7 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | -4.5 | -5.0  |       |      | -1.7 | 16.0 | 17.7 |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | -5.9 | -6.0  | -6.9  |      | -1.5 | 16.0 | 17.5 |
|      | HT/VHT80 STBC, M0 to M7           | 4 | 7  | -5.9 | -6.0  | -6.9  | -6.0 | -0.2 | 16.0 | 16.2 |

|      |                                                |          |           |            |            |            |            |             |             |            |
|------|------------------------------------------------|----------|-----------|------------|------------|------------|------------|-------------|-------------|------------|
| 5230 | Non HT/VHT40, 6 to 54 Mbps                     | 1        | 7         | 2.1        |            |            |            | 2.1         | 16.0        | 13.9       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 2        | 7         | 2.1        | 1.3        |            |            | 4.7         | 16.0        | 11.3       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 3        | 7         | 2.1        | 1.3        | 0.9        |            | 6.2         | 16.0        | 9.8        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 4        | 7         | 2.1        | 1.3        | 0.9        | 0.9        | 7.3         | 16.0        | 8.7        |
|      | HT/VHT40, M0 to M7                             | 1        | 7         | 2.0        |            |            |            | 2.0         | 16.0        | 14.0       |
|      | HT/VHT40, M0 to M7                             | 2        | 7         | 2.0        | 1.7        |            |            | 4.9         | 16.0        | 11.1       |
|      | HT/VHT40, M8 to M15                            | 2        | 7         | 2.0        | 1.7        |            |            | 4.9         | 16.0        | 11.1       |
|      | HT/VHT40, M0 to M7                             | 3        | 7         | 2.0        | 1.7        | 1.6        |            | 6.5         | 16.0        | 9.5        |
|      | HT/VHT40, M8 to M15                            | 3        | 7         | 2.0        | 1.7        | 1.6        |            | 6.5         | 16.0        | 9.5        |
|      | HT/VHT40, M16 to M23                           | 3        | 7         | 2.0        | 1.7        | 1.6        |            | 6.5         | 16.0        | 9.5        |
|      | HT/VHT40, M0 to M7                             | 4        | 7         | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 16.0        | 8.2        |
|      | HT/VHT40, M8 to M15                            | 4        | 7         | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 16.0        | 8.2        |
|      | HT/VHT40, M16 to M23                           | 4        | 7         | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 16.0        | 8.2        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 2        | 10        | 2.0        | 1.7        |            |            | 4.9         | 13.0        | 8.1        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 2        | 7         | 2.0        | 1.7        |            |            | 4.9         | 16.0        | 11.1       |
|      | HT/VHT40 Beam Forming, M0 to M7                | 3        | 12        | 2.0        | 1.7        | 1.6        |            | 6.5         | 11.2        | 4.7        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 3        | 9         | 2.0        | 1.7        | 1.6        |            | 6.5         | 14.2        | 7.7        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 3        | 7         | 2.0        | 1.7        | 1.6        |            | 6.5         | 16.0        | 9.5        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 4        | 13        | 0.4        | -0.4       | -1.0       | -0.3       | 5.7         | 10.0        | 4.3        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 4        | 10        | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 13.0        | 5.2        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 4        | 8         | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 14.8        | 7.0        |
|      | HT/VHT40 STBC, M0 to M7                        | 2        | 7         | 2.0        | 1.7        |            |            | 4.9         | 16.0        | 11.1       |
|      | HT/VHT40 STBC, M0 to M7                        | 3        | 7         | 2.0        | 1.7        | 1.6        |            | 6.5         | 16.0        | 9.5        |
|      | HT/VHT40 STBC, M0 to M7                        | 4        | 7         | 2.0        | 1.7        | 1.6        | 1.7        | 7.8         | 16.0        | 8.2        |
| 5240 | Non HT/VHT20, 6 to 54 Mbps                     | 1        | 7         | 5.6        |            |            |            | 5.6         | 16.0        | 10.4       |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 2        | 7         | 5.6        | 5.3        |            |            | 8.5         | 16.0        | 7.5        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 3        | 7         | 5.6        | 5.3        | 5.1        |            | 10.1        | 16.0        | 5.9        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 4        | 7         | 4.3        | 4.0        | 3.6        | 3.8        | 10.0        | 16.0        | 6.0        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 2        | 10        | 5.6        | 5.3        |            |            | 8.5         | 13.0        | 4.5        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 3        | 12        | 5.6        | 5.3        | 5.1        |            | 10.1        | 11.2        | 1.1        |
|      | <b>Non HT/VHT20 Beam Forming, 6 to 54 Mbps</b> | <b>4</b> | <b>13</b> | <b>4.3</b> | <b>4.0</b> | <b>3.6</b> | <b>3.8</b> | <b>10.0</b> | <b>10.0</b> | <b>0.0</b> |
|      | HT/VHT20, M0 to M7                             | 1        | 7         | 5.3        |            |            |            | 5.3         | 16.0        | 10.7       |
|      | HT/VHT20, M0 to M7                             | 2        | 7         | 5.3        | 4.5        |            |            | 7.9         | 16.0        | 8.1        |
|      | HT/VHT20, M8 to M15                            | 2        | 7         | 5.3        | 4.5        |            |            | 7.9         | 16.0        | 8.1        |
|      | HT/VHT20, M0 to M7                             | 3        | 7         | 5.3        | 4.5        | 4.7        |            | 9.6         | 16.0        | 6.4        |
|      | HT/VHT20, M8 to M15                            | 3        | 7         | 5.3        | 4.5        | 4.7        |            | 9.6         | 16.0        | 6.4        |
|      | HT/VHT20, M16 to M23                           | 3        | 7         | 5.3        | 4.5        | 4.7        |            | 9.6         | 16.0        | 6.4        |
|      | HT/VHT20, M0 to M7                             | 4        | 7         | 4.3        | 3.7        | 3.7        | 3.7        | 9.9         | 16.0        | 6.1        |
|      | HT/VHT20, M8 to M15                            | 4        | 7         | 5.3        | 4.5        | 4.7        | 4.9        | 10.9        | 16.0        | 5.1        |
|      | HT/VHT20, M16 to M23                           | 4        | 7         | 5.3        | 4.5        | 4.7        | 4.9        | 10.9        | 16.0        | 5.1        |

|                                   |   |    |     |     |     |     |      |      |     |
|-----------------------------------|---|----|-----|-----|-----|-----|------|------|-----|
| HT/VHT20 Beam Forming, M0 to M7   | 2 | 10 | 5.3 | 4.5 |     |     | 7.9  | 13.0 | 5.1 |
| HT/VHT20 Beam Forming, M8 to M15  | 2 | 7  | 5.3 | 4.5 |     |     | 7.9  | 16.0 | 8.1 |
| HT/VHT20 Beam Forming, M0 to M7   | 3 | 12 | 5.3 | 4.5 | 4.7 |     | 9.6  | 11.2 | 1.6 |
| HT/VHT20 Beam Forming, M8 to M15  | 3 | 9  | 5.3 | 4.5 | 4.7 |     | 9.6  | 14.2 | 4.6 |
| HT/VHT20 Beam Forming, M16 to M23 | 3 | 7  | 5.3 | 4.5 | 4.7 |     | 9.6  | 16.0 | 6.4 |
| HT/VHT20 Beam Forming, M0 to M7   | 4 | 13 | 4.3 | 3.7 | 3.7 | 3.7 | 9.9  | 10.0 | 0.1 |
| HT/VHT20 Beam Forming, M8 to M15  | 4 | 10 | 5.3 | 4.5 | 4.7 | 4.9 | 10.9 | 13.0 | 2.1 |
| HT/VHT20 Beam Forming, M16 to M23 | 4 | 8  | 5.3 | 4.5 | 4.7 | 4.9 | 10.9 | 14.8 | 3.9 |
| HT/VHT20 STBC, M0 to M7           | 2 | 7  | 5.3 | 4.5 |     |     | 7.9  | 16.0 | 8.1 |
| HT/VHT20 STBC, M0 to M7           | 3 | 7  | 5.3 | 4.5 | 4.7 |     | 9.6  | 16.0 | 6.4 |
| HT/VHT20 STBC, M0 to M7           | 4 | 7  | 5.3 | 4.5 | 4.7 | 4.9 | 10.9 | 16.0 | 5.1 |

15.407 (i) The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

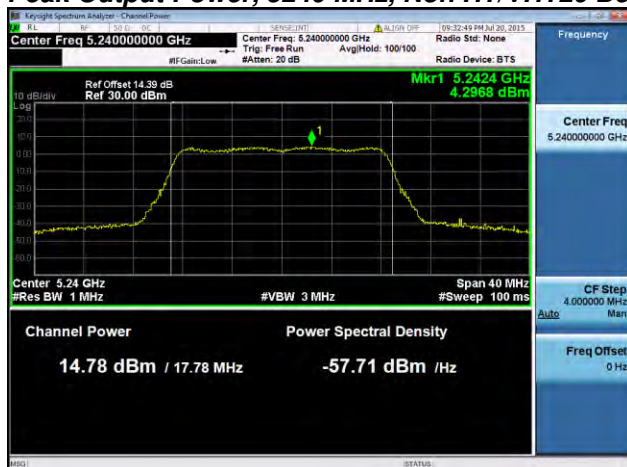
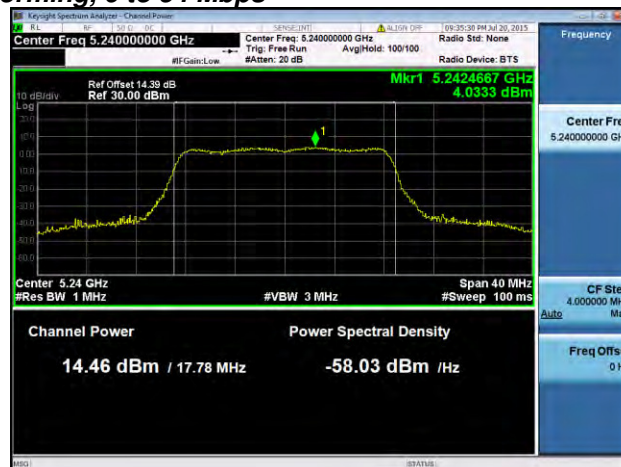
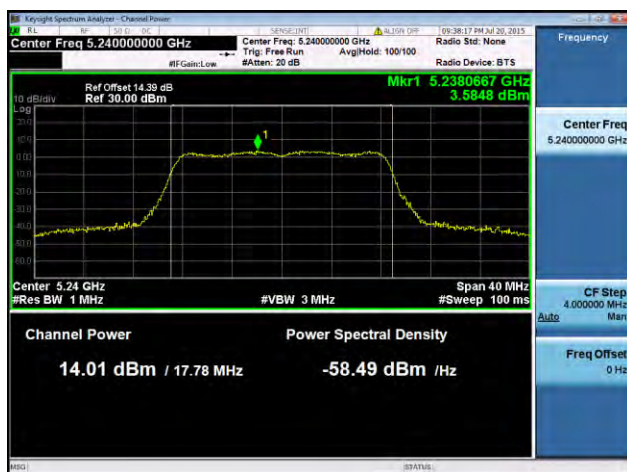
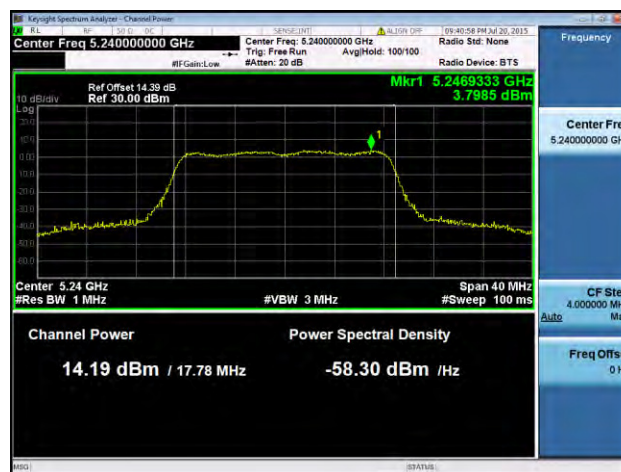
| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Tx 3 Max Power (dBm) | Tx 4 Max Power (dBm) | Total Radiated Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|----------------------|----------------------|----------------------|----------------------|------------------------------------|-------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | -7                            | 16.3                 |                      |                      |                      | 9.3                                | 21.0        | 11.7        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | -7                            | 16.3                 | 15.4                 |                      |                      | 11.9                               | 21.0        | 9.1         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | -7                            | 16.3                 | 15.4                 | 15.0                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | -7                            | 15.0                 | 14.2                 | 13.7                 | 14.1                 | 13.3                               | 21.0        | 7.7         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | -4                            | 15.0                 | 14.2                 |                      |                      | 13.6                               | 21.0        | 7.4         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | -2                            | 12.9                 | 12.0                 | 11.4                 |                      | 14.7                               | 21.0        | 6.3         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | -1                            | 11.7                 | 10.9                 | 10.3                 | 10.8                 | 16.0                               | 21.0        | 5.0         |
|                 | HT/VHT20, M0 to M7                      | 1        | -7                            | 16.3                 |                      |                      |                      | 9.3                                | 21.0        | 11.7        |
|                 | HT/VHT20, M0 to M7                      | 2        | -7                            | 16.3                 | 15.4                 |                      |                      | 11.9                               | 21.0        | 9.1         |
|                 | HT/VHT20, M8 to M15                     | 2        | -7                            | 16.3                 | 15.4                 |                      |                      | 11.9                               | 21.0        | 9.1         |
|                 | HT/VHT20, M0 to M7                      | 3        | -7                            | 16.3                 | 15.4                 | 15.1                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | HT/VHT20, M8 to M15                     | 3        | -7                            | 16.3                 | 15.4                 | 15.1                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | HT/VHT20, M16 to M23                    | 3        | -7                            | 16.3                 | 15.4                 | 15.1                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | HT/VHT20, M0 to M7                      | 4        | -7                            | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 13.3                               | 21.0        | 7.7         |
|                 | HT/VHT20, M8 to M15                     | 4        | -7                            | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 13.3                               | 21.0        | 7.7         |
|                 | HT/VHT20, M16 to M23                    | 4        | -7                            | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 13.3                               | 21.0        | 7.7         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | -4                            | 15.1                 | 14.1                 |                      |                      | 13.6                               | 21.0        | 7.4         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | -7                            | 16.3                 | 15.4                 |                      |                      | 11.9                               | 21.0        | 9.1         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | -2                            | 13.1                 | 12.3                 | 11.6                 |                      | 14.9                               | 21.0        | 6.1         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | -5                            | 15.1                 | 14.1                 | 13.8                 |                      | 13.9                               | 21.0        | 7.1         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | -7                            | 16.3                 | 15.4                 | 15.1                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | -1                            | 12.1                 | 11.3                 | 10.4                 | 11.2                 | 16.3                               | 21.0        | 4.7         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | -4                            | 13.9                 | 12.9                 | 12.7                 | 13.1                 | 15.2                               | 21.0        | 5.8         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | -6                            | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 14.5                               | 21.0        | 6.5         |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | -7                            | 16.3                 | 15.4                 |                      |                      | 11.9                               | 21.0        | 9.1         |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | -7                            | 16.3                 | 15.4                 | 15.1                 |                      | 13.4                               | 21.0        | 7.6         |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | -7                            | 15.1                 | 14.1                 | 13.8                 | 14.2                 | 13.3                               | 21.0        | 7.7         |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | -7                            | 13.0                 |                      |                      |                      | 6.0                                | 21.0        | 15.0        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | -7                            | 12.0                 | 11.3                 |                      |                      | 7.7                                | 21.0        | 13.3        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | -7                            | 11.1                 | 10.3                 | 9.6                  |                      | 8.1                                | 21.0        | 12.9        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | -7                            | 11.1                 | 10.3                 | 9.6                  | 10.3                 | 9.4                                | 21.0        | 11.6        |
|                 | HT/VHT40, M0 to M7                      | 1        | -7                            | 15.2                 |                      |                      |                      | 8.2                                | 21.0        | 12.8        |

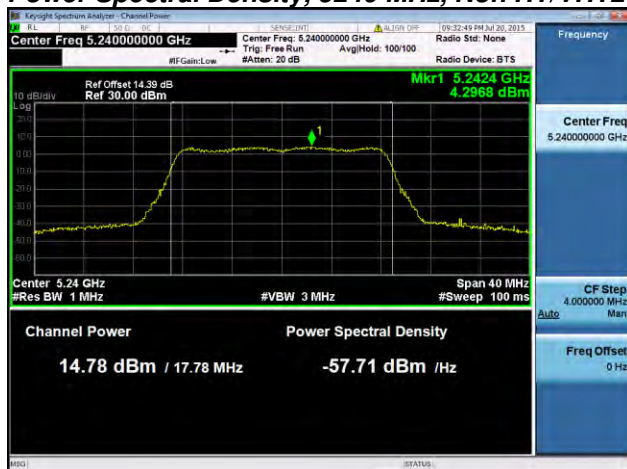
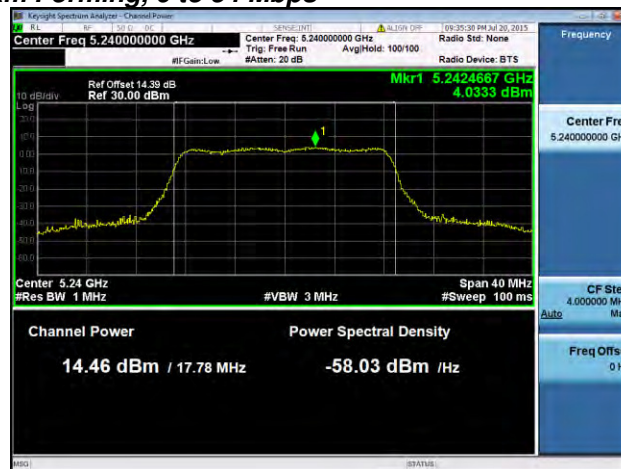
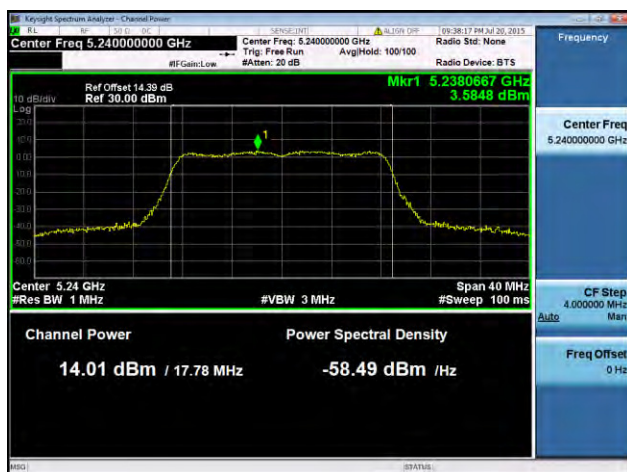
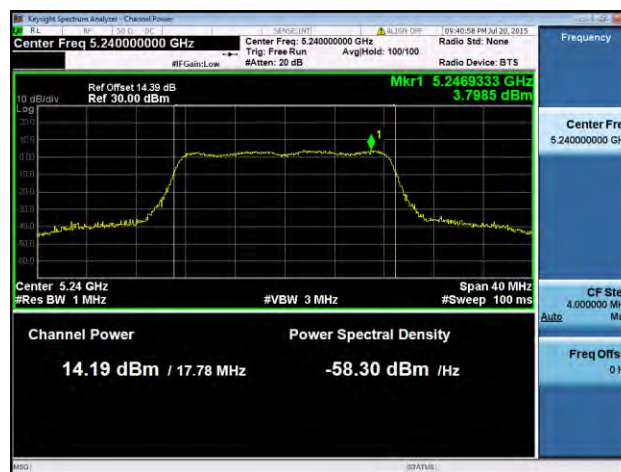
|      |                                   |   |    |      |      |      |      |      |      |      |
|------|-----------------------------------|---|----|------|------|------|------|------|------|------|
|      | HT/VHT40, M0 to M7                | 2 | -7 | 14.0 | 13.0 |      |      | 9.5  | 21.0 | 11.5 |
|      | HT/VHT40, M8 to M15               | 2 | -7 | 14.0 | 13.0 |      |      | 9.5  | 21.0 | 11.5 |
|      | HT/VHT40, M0 to M7                | 3 | -7 | 12.9 | 12.2 | 11.3 |      | 10.0 | 21.0 | 11.0 |
|      | HT/VHT40, M8 to M15               | 3 | -7 | 12.9 | 12.2 | 11.3 |      | 10.0 | 21.0 | 11.0 |
|      | HT/VHT40, M16 to M23              | 3 | -7 | 12.9 | 12.2 | 11.3 |      | 10.0 | 21.0 | 11.0 |
|      | HT/VHT40, M0 to M7                | 4 | -7 | 12.9 | 12.2 | 11.3 | 12.2 | 11.2 | 21.0 | 9.8  |
|      | HT/VHT40, M8 to M15               | 4 | -7 | 12.9 | 12.2 | 11.3 | 12.2 | 11.2 | 21.0 | 9.8  |
|      | HT/VHT40, M16 to M23              | 4 | -7 | 12.9 | 12.2 | 11.3 | 12.2 | 11.2 | 21.0 | 9.8  |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | -4 | 12.9 | 12.2 |      |      | 11.6 | 21.0 | 9.4  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | -7 | 14.0 | 13.0 |      |      | 9.5  | 21.0 | 11.5 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | -2 | 10.8 | 9.9  | 9.3  |      | 12.6 | 21.0 | 8.4  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | -5 | 12.9 | 12.2 | 11.3 |      | 11.8 | 21.0 | 9.2  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | -7 | 12.9 | 12.2 | 11.3 |      | 10.0 | 21.0 | 11.0 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | -1 | 8.9  | 7.7  | 7.1  | 8.1  | 13.0 | 21.0 | 8.0  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | -4 | 11.9 | 11.2 | 10.3 | 11.0 | 13.2 | 21.0 | 7.8  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | -6 | 12.9 | 12.2 | 11.3 | 12.2 | 12.4 | 21.0 | 8.6  |
|      | HT/VHT40 STBC, M0 to M7           | 2 | -7 | 14.0 | 13.0 |      |      | 9.5  | 21.0 | 11.5 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | -7 | 12.9 | 12.2 | 11.3 |      | 10.0 | 21.0 | 11.0 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | -7 | 12.9 | 12.2 | 11.3 | 12.2 | 11.2 | 21.0 | 9.8  |
|      |                                   |   |    |      |      |      |      |      |      |      |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | -7 | 12.4 |      |      |      | 5.4  | 21.0 | 15.6 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | -7 | 10.5 | 9.9  |      |      | 6.2  | 21.0 | 14.8 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | -7 | 8.6  | 7.8  | 7.2  |      | 5.7  | 21.0 | 15.3 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | -7 | 7.4  | 6.6  | 6.2  | 7.4  | 6.0  | 21.0 | 15.0 |
|      | HT/VHT80, M0 to M7                | 1 | -7 | 13.9 |      |      |      | 6.9  | 21.0 | 14.1 |
|      | HT/VHT80, M0 to M7                | 2 | -7 | 12.7 | 12.2 |      |      | 8.5  | 21.0 | 12.5 |
|      | HT/VHT80, M8 to M15               | 2 | -7 | 12.7 | 12.2 |      |      | 8.5  | 21.0 | 12.5 |
|      | HT/VHT80, M0 to M7                | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80, M8 to M15               | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80, M16 to M23              | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80, M0 to M7                | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80, M8 to M15               | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80, M16 to M23              | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | -7 | 12.7 | 12.2 |      |      | 8.5  | 21.0 | 12.5 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | -7 | 12.7 | 12.2 |      |      | 8.5  | 21.0 | 12.5 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | -7 | 11.6 | 11.1 | 10.4 |      | 8.8  | 21.0 | 12.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | -7 | 11.6 | 11.1 | 10.4 | 11.0 | 10.1 | 21.0 | 10.9 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | -7 | 12.7 | 12.2 |      |      | 8.5  | 21.0 | 12.5 |

|      |                                                |          |           |             |             |             |             |             |             |            |
|------|------------------------------------------------|----------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|------------|
|      | HT/VHT80 STBC, M0 to M7                        | 3        | -7        | 11.6        | 11.1        | 10.4        |             | 8.8         | 21.0        | 12.2       |
|      | HT/VHT80 STBC, M0 to M7                        | 4        | -7        | 11.6        | 11.1        | 10.4        | 11.0        | 10.1        | 21.0        | 10.9       |
| 5230 | Non HT/VHT40, 6 to 54 Mbps                     | 1        | -7        | 15.0        |             |             |             | 8.0         | 21.0        | 13.0       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 2        | -7        | 15.0        | 14.4        |             |             | 10.7        | 21.0        | 10.3       |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 3        | -7        | 15.0        | 14.4        | 14.1        |             | 12.3        | 21.0        | 8.7        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 4        | -7        | 15.0        | 14.4        | 14.1        | 14.3        | 13.5        | 21.0        | 7.5        |
|      | HT/VHT40, M0 to M7                             | 1        | -7        | 15.8        |             |             |             | 8.8         | 21.0        | 12.2       |
|      | HT/VHT40, M0 to M7                             | 2        | -7        | 15.8        | 15.3        |             |             | 11.6        | 21.0        | 9.4        |
|      | HT/VHT40, M8 to M15                            | 2        | -7        | 15.8        | 15.3        |             |             | 11.6        | 21.0        | 9.4        |
|      | HT/VHT40, M0 to M7                             | 3        | -7        | 15.8        | 15.3        | 14.8        |             | 13.1        | 21.0        | 7.9        |
|      | HT/VHT40, M8 to M15                            | 3        | -7        | 15.8        | 15.3        | 14.8        |             | 13.1        | 21.0        | 7.9        |
|      | HT/VHT40, M16 to M23                           | 3        | -7        | 15.8        | 15.3        | 14.8        |             | 13.1        | 21.0        | 7.9        |
|      | HT/VHT40, M0 to M7                             | 4        | -7        | 15.8        | 15.3        | 14.8        | 15.3        | 14.3        | 21.0        | 6.7        |
|      | HT/VHT40, M8 to M15                            | 4        | -7        | 15.8        | 15.3        | 14.8        | 15.3        | 14.3        | 21.0        | 6.7        |
|      | HT/VHT40, M16 to M23                           | 4        | -7        | 15.8        | 15.3        | 14.8        | 15.3        | 14.3        | 21.0        | 6.7        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 2        | -4        | 15.8        | 15.3        |             |             | 14.6        | 21.0        | 6.4        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 2        | -7        | 15.8        | 15.3        |             |             | 11.6        | 21.0        | 9.4        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 3        | -2        | 15.8        | 15.3        | 14.8        |             | 17.9        | 21.0        | 3.1        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 3        | -5        | 15.8        | 15.3        | 14.8        |             | 14.9        | 21.0        | 6.1        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 3        | -7        | 15.8        | 15.3        | 14.8        |             | 13.1        | 21.0        | 7.9        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 4        | -1        | 14.2        | 13.3        | 12.7        | 13.4        | 18.5        | 21.0        | 2.5        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 4        | -4        | 15.8        | 15.3        | 14.8        | 15.3        | 17.3        | 21.0        | 3.7        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 4        | -6        | 15.8        | 15.3        | 14.8        | 15.3        | 15.5        | 21.0        | 5.5        |
|      | HT/VHT40 STBC, M0 to M7                        | 2        | -7        | 15.8        | 15.3        |             |             | 11.6        | 21.0        | 9.4        |
|      | HT/VHT40 STBC, M0 to M7                        | 3        | -7        | 15.8        | 15.3        | 14.8        |             | 13.1        | 21.0        | 7.9        |
|      | HT/VHT40 STBC, M0 to M7                        | 4        | -7        | 15.8        | 15.3        | 14.8        | 15.3        | 14.3        | 21.0        | 6.7        |
| 5240 | Non HT/VHT20, 6 to 54 Mbps                     | 1        | -7        | 16.0        |             |             |             | 9.0         | 21.0        | 12.0       |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 2        | -7        | 16.0        | 15.6        |             |             | 11.8        | 21.0        | 9.2        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 3        | -7        | 16.0        | 15.6        | 15.3        |             | 13.4        | 21.0        | 7.6        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 4        | -7        | 14.8        | 14.5        | 14.0        | 14.2        | 13.4        | 21.0        | 7.6        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 2        | -4        | 16.0        | 15.6        |             |             | 14.8        | 21.0        | 6.2        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 3        | -2        | 16.0        | 15.6        | 15.3        |             | 18.2        | 21.0        | 2.8        |
|      | <b>Non HT/VHT20 Beam Forming, 6 to 54 Mbps</b> | <b>4</b> | <b>-1</b> | <b>14.8</b> | <b>14.5</b> | <b>14.0</b> | <b>14.2</b> | <b>19.4</b> | <b>21.0</b> | <b>1.6</b> |
|      | HT/VHT20, M0 to M7                             | 1        | -7        | 16.0        |             |             |             | 9.0         | 21.0        | 12.0       |
|      | HT/VHT20, M0 to M7                             | 2        | -7        | 16.0        | 15.3        |             |             | 11.7        | 21.0        | 9.3        |
|      | HT/VHT20, M8 to M15                            | 2        | -7        | 16.0        | 15.3        |             |             | 11.7        | 21.0        | 9.3        |
|      | HT/VHT20, M0 to M7                             | 3        | -7        | 16.0        | 15.3        | 15.4        |             | 13.3        | 21.0        | 7.7        |
|      | HT/VHT20, M8 to M15                            | 3        | -7        | 16.0        | 15.3        | 15.4        |             | 13.3        | 21.0        | 7.7        |
|      | HT/VHT20, M16 to M23                           | 3        | -7        | 16.0        | 15.3        | 15.4        |             | 13.3        | 21.0        | 7.7        |
|      | HT/VHT20, M0 to M7                             | 4        | -7        | 14.6        | 14.4        | 14.0        | 14.3        | 13.4        | 21.0        | 7.6        |

|                                   |   |    |      |      |      |      |      |      |     |
|-----------------------------------|---|----|------|------|------|------|------|------|-----|
| HT/VHT20, M8 to M15               | 4 | -7 | 16.0 | 15.3 | 15.4 | 15.4 | 14.6 | 21.0 | 6.4 |
| HT/VHT20, M16 to M23              | 4 | -7 | 16.0 | 15.3 | 15.4 | 15.4 | 14.6 | 21.0 | 6.4 |
| HT/VHT20 Beam Forming, M0 to M7   | 2 | -4 | 16.0 | 15.3 |      |      | 14.7 | 21.0 | 6.3 |
| HT/VHT20 Beam Forming, M8 to M15  | 2 | -7 | 16.0 | 15.3 |      |      | 11.7 | 21.0 | 9.3 |
| HT/VHT20 Beam Forming, M0 to M7   | 3 | -2 | 16.0 | 15.3 | 15.4 |      | 18.1 | 21.0 | 2.9 |
| HT/VHT20 Beam Forming, M8 to M15  | 3 | -5 | 16.0 | 15.3 | 15.4 |      | 15.1 | 21.0 | 5.9 |
| HT/VHT20 Beam Forming, M16 to M23 | 3 | -7 | 16.0 | 15.3 | 15.4 |      | 13.3 | 21.0 | 7.7 |
| HT/VHT20 Beam Forming, M0 to M7   | 4 | -1 | 14.6 | 14.4 | 14.0 | 14.3 | 19.4 | 21.0 | 1.6 |
| HT/VHT20 Beam Forming, M8 to M15  | 4 | -4 | 16.0 | 15.3 | 15.4 | 15.4 | 17.6 | 21.0 | 3.4 |
| HT/VHT20 Beam Forming, M16 to M23 | 4 | -6 | 16.0 | 15.3 | 15.4 | 15.4 | 15.8 | 21.0 | 5.2 |
| HT/VHT20 STBC, M0 to M7           | 2 | -7 | 16.0 | 15.3 |      |      | 11.7 | 21.0 | 9.3 |
| HT/VHT20 STBC, M0 to M7           | 3 | -7 | 16.0 | 15.3 | 15.4 |      | 13.3 | 21.0 | 7.7 |
| HT/VHT20 STBC, M0 to M7           | 4 | -7 | 16.0 | 15.3 | 15.4 | 15.4 | 14.6 | 21.0 | 6.4 |



**Peak Output Power, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

**Power Spectral Density, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

### A.3 Conducted Spurious Emissions

**15.407 b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### Test Procedure

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013

#### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Capture graphs and record pertinent measurement data.

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01  
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

#### Conducted Spurious Emissions

##### Test parameters

Span = 30MHz to 18GHz / 18GHz to 40GHz  
RBW = 1 MHz  
VBW  $\geq 3 \times$  RBW for Peak, 1kHz for Average  
Sweep = Auto couple  
Detector = Peak  
Trace = Max Hold.

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

#### Tested By :

Jose Aguirre

#### Date of testing:

07-Jul-15 - 08-Aug-15

#### Test Result : PASS

See Appendix C for list of test equipment

| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm) | Tx 2 Spur Power (dBm) | Tx 3 Spur Power (dBm) | Tx 4 Spur Power (dBm) | Total Conducted Spur (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------------|-------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | -66.6                 |                       |                       |                       | -59.6                      | -41.25      | 18.4        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | -66.6                 | -66.6                 |                       |                       | -56.6                      | -41.25      | 15.3        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | -66.6                 | -66.6                 | -66.7                 |                       | -54.9                      | -41.25      | 13.6        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | -66.8                 | -66.3                 | -66.7                 | -66.6                 | -53.6                      | -41.25      | 12.3        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -66.8                 | -66.3                 |                       |                       | -53.5                      | -41.25      | 12.3        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | -66.4                 | -66.3                 | -66.6                 |                       | -49.9                      | -41.25      | 8.6         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | -66.3                 | -66.4                 | -66.6                 | -66.3                 | -47.4                      | -41.25      | 6.1         |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | -66.3                 |                       |                       |                       | -59.3                      | -41.25      | 18.1        |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | -66.3                 | -66.3                 |                       |                       | -56.3                      | -41.25      | 15.0        |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | -66.3                 | -66.3                 |                       |                       | -56.3                      | -41.25      | 15.0        |
|                 | HT/VHT20, M0 to M7                      | 3        | 7                             | -66.3                 | -66.3                 | -66.5                 |                       | -54.6                      | -41.25      | 13.3        |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | -66.3                 | -66.3                 | -66.5                 |                       | -54.6                      | -41.25      | 13.3        |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | -66.3                 | -66.3                 | -66.5                 |                       | -54.6                      | -41.25      | 13.3        |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | -66.4                 | -66.4                 | -66.5                 | -66.4                 | -53.4                      | -41.25      | 12.2        |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | -66.4                 | -66.4                 | -66.5                 | -66.4                 | -53.4                      | -41.25      | 12.2        |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | -66.4                 | -66.4                 | -66.5                 | -66.4                 | -53.4                      | -41.25      | 12.2        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | -66.4                 | -66.4                 |                       |                       | -53.4                      | -41.25      | 12.1        |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | -66.3                 | -66.3                 |                       |                       | -56.3                      | -41.25      | 15.0        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | -66.4                 | -66.1                 | -66.7                 |                       | -49.8                      | -41.25      | 8.6         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | -66.4                 | -66.4                 | -66.5                 |                       | -52.9                      | -41.25      | 11.6        |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | -66.3                 | -66.3                 | -66.5                 |                       | -54.6                      | -41.25      | 13.3        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | -66.2                 | -66.2                 | -66.5                 | -66.4                 | -47.3                      | -41.25      | 6.1         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | -66.3                 | -66.4                 | -66.7                 | -66.7                 | -50.5                      | -41.25      | 9.3         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | -66.4                 | -66.4                 | -66.5                 | -66.4                 | -52.2                      | -41.25      | 11.0        |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | -66.3                 | -66.3                 |                       |                       | -56.3                      | -41.25      | 15.0        |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | -66.3                 | -66.3                 | -66.5                 |                       | -54.6                      | -41.25      | 13.3        |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | -66.4                 | -66.4                 | -66.5                 | -66.4                 | -53.4                      | -41.25      | 12.2        |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | -66.5                 |                       |                       |                       | -59.5                      | -41.25      | 18.3        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | -66.1                 | -66.4                 |                       |                       | -56.2                      | -41.25      | 15.0        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | -66.4                 | -65.9                 | -66.5                 |                       | -54.5                      | -41.25      | 13.2        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | -66.4                 | -65.9                 | -66.5                 | -66.4                 | -53.3                      | -41.25      | 12.0        |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | -66.4                 |                       |                       |                       | -59.4                      | -41.25      | 18.2        |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | -66.4                 | -66.0                 |                       |                       | -56.2                      | -41.25      | 14.9        |
|                 | HT/VHT40, M8 to M15                     | 2        | 7                             | -66.4                 | -66.0                 |                       |                       | -56.2                      | -41.25      | 14.9        |

|      |                                   |   |    |       |       |       |       |       |        |      |
|------|-----------------------------------|---|----|-------|-------|-------|-------|-------|--------|------|
|      | HT/VHT40, M0 to M7                | 3 | 7  | -66.4 | -66.5 | -66.9 |       | -54.8 | -41.25 | 13.6 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | -66.4 | -66.5 | -66.9 |       | -54.8 | -41.25 | 13.6 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | -66.4 | -66.5 | -66.9 |       | -54.8 | -41.25 | 13.6 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | -66.4 | -66.5 | -66.9 | -66.4 | -53.5 | -41.25 | 12.3 |
|      | HT/VHT40, M8 to M15               | 4 | 7  | -66.4 | -66.5 | -66.9 | -66.4 | -53.5 | -41.25 | 12.3 |
|      | HT/VHT40, M16 to M23              | 4 | 7  | -66.4 | -66.5 | -66.9 | -66.4 | -53.5 | -41.25 | 12.3 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | -66.4 | -66.5 |       |       | -53.4 | -41.25 | 12.2 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | -66.4 | -66.0 |       |       | -56.2 | -41.25 | 14.9 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | -66.7 | -66.6 | -66.6 |       | -50.1 | -41.25 | 8.8  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | -66.4 | -66.5 | -66.9 |       | -53.0 | -41.25 | 11.8 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | -66.4 | -66.5 | -66.9 |       | -54.8 | -41.25 | 13.6 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | -66.4 | -66.3 | -66.5 | -66.4 | -47.4 | -41.25 | 6.1  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | -66.2 | -66.4 | -66.3 | -66.5 | -50.3 | -41.25 | 9.1  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | -66.4 | -66.5 | -66.9 | -66.4 | -52.3 | -41.25 | 11.1 |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | -66.4 | -66.0 |       |       | -56.2 | -41.25 | 14.9 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | -66.4 | -66.5 | -66.9 |       | -54.8 | -41.25 | 13.6 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | -66.4 | -66.5 | -66.9 | -66.4 | -53.5 | -41.25 | 12.3 |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | -66.3 |       |       |       | -59.3 | -41.25 | 18.1 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | -66.1 | -66.2 | -66.4 |       | -54.5 | -41.25 | 13.2 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | -66.2 | -66.4 | -66.6 | -66.2 | -53.3 | -41.25 | 12.1 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | -66.4 |       |       |       | -59.4 | -41.25 | 18.2 |
|      | HT/VHT80, M0 to M7                | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | HT/VHT80, M8 to M15               | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | HT/VHT80, M0 to M7                | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | -66.4 | -66.2 |       |       | -56.3 | -41.25 | 15.0 |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | -66.3 | -66.3 | -66.8 |       | -54.7 | -41.25 | 13.4 |
|      | HT/VHT80 STBC, M0 to M7           | 4 | 7  | -66.3 | -66.3 | -66.8 | -66.2 | -53.4 | -41.25 | 12.1 |



|      |                                         |   |    |       |       |       |       |       |        |      |
|------|-----------------------------------------|---|----|-------|-------|-------|-------|-------|--------|------|
| 5230 | Non HT/VHT40, 6 to 54 Mbps              | 1 | 7  | -65.9 |       |       |       | -58.9 | -41.25 | 17.7 |
|      | Non HT/VHT40, 6 to 54 Mbps              | 2 | 7  | -65.9 | -66.2 |       |       | -56.0 | -41.25 | 14.8 |
|      | Non HT/VHT40, 6 to 54 Mbps              | 3 | 7  | -65.9 | -66.2 | -66.3 |       | -54.4 | -41.25 | 13.1 |
|      | Non HT/VHT40, 6 to 54 Mbps              | 4 | 7  | -65.9 | -66.2 | -66.3 | -65.9 | -53.1 | -41.25 | 11.8 |
|      | HT/VHT40, M0 to M7                      | 1 | 7  | -66.1 |       |       |       | -59.1 | -41.25 | 17.9 |
|      | HT/VHT40, M0 to M7                      | 2 | 7  | -66.1 | -66.0 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT40, M8 to M15                     | 2 | 7  | -66.1 | -66.0 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT40, M0 to M7                      | 3 | 7  | -66.1 | -66.0 | -66.6 |       | -54.5 | -41.25 | 13.2 |
|      | HT/VHT40, M8 to M15                     | 3 | 7  | -66.1 | -66.0 | -66.6 |       | -54.5 | -41.25 | 13.2 |
|      | HT/VHT40, M16 to M23                    | 3 | 7  | -66.1 | -66.0 | -66.6 |       | -54.5 | -41.25 | 13.2 |
|      | HT/VHT40, M0 to M7                      | 4 | 7  | -66.1 | -66.0 | -66.6 | -66.2 | -53.2 | -41.25 | 11.9 |
|      | HT/VHT40, M8 to M15                     | 4 | 7  | -66.1 | -66.0 | -66.6 | -66.2 | -53.2 | -41.25 | 11.9 |
|      | HT/VHT40, M16 to M23                    | 4 | 7  | -66.1 | -66.0 | -66.6 | -66.2 | -53.2 | -41.25 | 11.9 |
|      | HT/VHT40 Beam Forming, M0 to M7         | 2 | 10 | -66.1 | -66.0 |       |       | -53.0 | -41.25 | 11.8 |
|      | HT/VHT40 Beam Forming, M8 to M15        | 2 | 7  | -66.1 | -66.0 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT40 Beam Forming, M0 to M7         | 3 | 12 | -66.1 | -66.0 | -66.6 |       | -49.7 | -41.25 | 8.4  |
|      | HT/VHT40 Beam Forming, M8 to M15        | 3 | 9  | -66.1 | -66.0 | -66.6 |       | -52.7 | -41.25 | 11.4 |
|      | HT/VHT40 Beam Forming, M16 to M23       | 3 | 7  | -66.1 | -66.0 | -66.6 |       | -54.5 | -41.25 | 13.2 |
|      | HT/VHT40 Beam Forming, M0 to M7         | 4 | 13 | -66.4 | -66.2 | -66.6 | -66.3 | -47.4 | -41.25 | 6.1  |
|      | HT/VHT40 Beam Forming, M8 to M15        | 4 | 10 | -66.1 | -66.0 | -66.6 | -66.2 | -50.2 | -41.25 | 8.9  |
|      | HT/VHT40 Beam Forming, M16 to M23       | 4 | 8  | -66.1 | -66.0 | -66.6 | -66.2 | -52.0 | -41.25 | 10.7 |
|      | HT/VHT40 STBC, M0 to M7                 | 2 | 7  | -66.1 | -66.0 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT40 STBC, M0 to M7                 | 3 | 7  | -66.1 | -66.0 | -66.6 |       | -54.5 | -41.25 | 13.2 |
|      | HT/VHT40 STBC, M0 to M7                 | 4 | 7  | -66.1 | -66.0 | -66.6 | -66.2 | -53.2 | -41.25 | 11.9 |
| 5240 | Non HT/VHT20, 6 to 54 Mbps              | 1 | 7  | -65.8 |       |       |       | -58.8 | -41.25 | 17.6 |
|      | Non HT/VHT20, 6 to 54 Mbps              | 2 | 7  | -65.8 | -65.6 |       |       | -55.7 | -41.25 | 14.4 |
|      | Non HT/VHT20, 6 to 54 Mbps              | 3 | 7  | -65.8 | -65.6 | -66.0 |       | -54.0 | -41.25 | 12.8 |
|      | Non HT/VHT20, 6 to 54 Mbps              | 4 | 7  | -65.9 | -66.0 | -66.1 | -65.8 | -52.9 | -41.25 | 11.7 |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2 | 10 | -65.8 | -65.6 |       |       | -52.7 | -41.25 | 11.4 |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3 | 12 | -65.8 | -65.6 | -66.0 |       | -49.2 | -41.25 | 8.0  |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4 | 13 | -65.9 | -66.0 | -66.1 | -65.8 | -46.9 | -41.25 | 5.7  |
|      | HT/VHT20, M0 to M7                      | 1 | 7  | -66.0 |       |       |       | -59.0 | -41.25 | 17.8 |
|      | HT/VHT20, M0 to M7                      | 2 | 7  | -66.0 | -66.1 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT20, M8 to M15                     | 2 | 7  | -66.0 | -66.1 |       |       | -56.0 | -41.25 | 14.8 |
|      | HT/VHT20, M0 to M7                      | 3 | 7  | -66.0 | -66.1 | -66.1 |       | -54.3 | -41.25 | 13.0 |
|      | HT/VHT20, M8 to M15                     | 3 | 7  | -66.0 | -66.1 | -66.1 |       | -54.3 | -41.25 | 13.0 |
|      | HT/VHT20, M16 to M23                    | 3 | 7  | -66.0 | -66.1 | -66.1 |       | -54.3 | -41.25 | 13.0 |
|      | HT/VHT20, M0 to M7                      | 4 | 7  | -65.5 | -65.6 | -66.3 | -66.2 | -52.9 | -41.25 | 11.6 |
|      | HT/VHT20, M8 to M15                     | 4 | 7  | -66.0 | -66.1 | -66.1 | -65.6 | -52.9 | -41.25 | 11.7 |
|      | HT/VHT20, M16 to M23                    | 4 | 7  | -66.0 | -66.1 | -66.1 | -65.6 | -52.9 | -41.25 | 11.7 |

|                                        |          |           |              |              |              |              |              |               |            |
|----------------------------------------|----------|-----------|--------------|--------------|--------------|--------------|--------------|---------------|------------|
| HT/VHT20 Beam Forming, M0 to M7        | 2        | 10        | -66.0        | -66.1        |              |              | -53.0        | -41.25        | 11.8       |
| HT/VHT20 Beam Forming, M8 to M15       | 2        | 7         | -66.0        | -66.1        |              |              | -56.0        | -41.25        | 14.8       |
| HT/VHT20 Beam Forming, M0 to M7        | 3        | 12        | -66.0        | -66.1        | -66.1        |              | -49.5        | -41.25        | 8.2        |
| HT/VHT20 Beam Forming, M8 to M15       | 3        | 9         | -66.0        | -66.1        | -66.1        |              | -52.5        | -41.25        | 11.2       |
| HT/VHT20 Beam Forming, M16 to M23      | 3        | 7         | -66.0        | -66.1        | -66.1        |              | -54.3        | -41.25        | 13.0       |
| <b>HT/VHT20 Beam Forming, M0 to M7</b> | <b>4</b> | <b>13</b> | <b>-65.5</b> | <b>-65.6</b> | <b>-66.3</b> | <b>-66.2</b> | <b>-46.9</b> | <b>-41.25</b> | <b>5.6</b> |
| HT/VHT20 Beam Forming, M8 to M15       | 4        | 10        | -66.0        | -66.1        | -66.1        | -65.6        | -49.9        | -41.25        | 8.7        |
| HT/VHT20 Beam Forming, M16 to M23      | 4        | 8         | -66.0        | -66.1        | -66.1        | -65.6        | -51.7        | -41.25        | 10.5       |
| HT/VHT20 STBC, M0 to M7                | 2        | 7         | -66.0        | -66.1        |              |              | -56.0        | -41.25        | 14.8       |
| HT/VHT20 STBC, M0 to M7                | 3        | 7         | -66.0        | -66.1        | -66.1        |              | -54.3        | -41.25        | 13.0       |
| HT/VHT20 STBC, M0 to M7                | 4        | 7         | -66.0        | -66.1        | -66.1        | -65.6        | -52.9        | -41.25        | 11.7       |

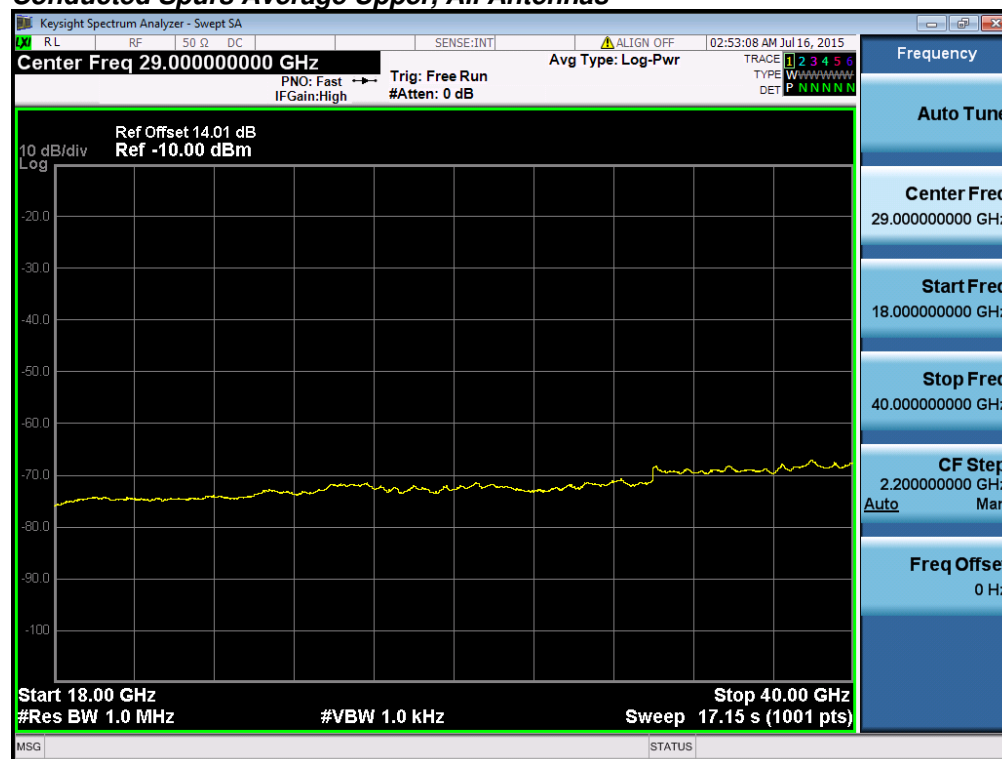
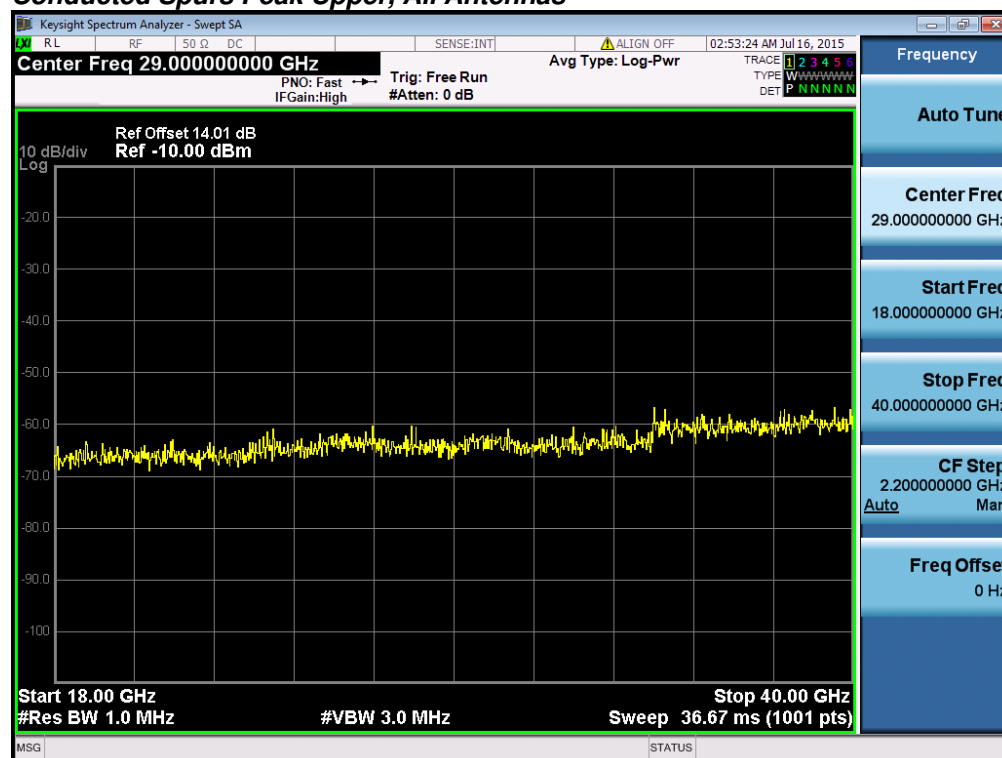
| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm) | Tx 2 Spur Power (dBm) | Tx 3 Spur Power (dBm) | Tx 4 Spur Power (dBm) | Total Conducted Spur (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------------|-------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | -63.7                 |                       |                       |                       | -56.7                      | -21.25      | 35.5        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | -63.7                 | -62.2                 |                       |                       | -52.9                      | -21.25      | 31.6        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | -63.7                 | -62.2                 | -64.2                 |                       | -51.5                      | -21.25      | 30.3        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | -62.8                 | -63.6                 | -63.5                 | -61.8                 | -49.8                      | -21.25      | 28.6        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -62.8                 | -63.6                 |                       |                       | -50.2                      | -21.25      | 28.9        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | -63.1                 | -63.6                 | -63.9                 |                       | -46.9                      | -21.25      | 25.7        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | -63.9                 | -64.0                 | -64.3                 | -61.6                 | -44.3                      | -21.25      | 23.0        |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | -63.3                 |                       |                       |                       | -56.3                      | -21.25      | 35.1        |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | -63.3                 | -63.8                 |                       |                       | -53.5                      | -21.25      | 32.3        |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | -63.3                 | -63.8                 |                       |                       | -53.5                      | -21.25      | 32.3        |
|                 | HT/VHT20, M0 to M7                      | 3        | 7                             | -63.3                 | -63.8                 | -61.6                 |                       | -51.0                      | -21.25      | 29.8        |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | -63.3                 | -63.8                 | -61.6                 |                       | -51.0                      | -21.25      | 29.8        |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | -63.3                 | -63.8                 | -61.6                 |                       | -51.0                      | -21.25      | 29.8        |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | -62.2                 | -63.7                 | -62.3                 | -62.6                 | -49.6                      | -21.25      | 28.4        |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | -62.2                 | -63.7                 | -62.3                 | -62.6                 | -49.6                      | -21.25      | 28.4        |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | -62.2                 | -63.7                 | -62.3                 | -62.6                 | -49.6                      | -21.25      | 28.4        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | -62.2                 | -63.7                 |                       |                       | -49.9                      | -21.25      | 28.6        |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | -63.3                 | -63.8                 |                       |                       | -53.5                      | -21.25      | 32.3        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | -63.8                 | -62.6                 | -63.8                 |                       | -46.8                      | -21.25      | 25.5        |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | -62.2                 | -63.7                 | -62.3                 |                       | -49.1                      | -21.25      | 27.9        |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | -63.3                 | -63.8                 | -61.6                 |                       | -51.0                      | -21.25      | 29.8        |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | -62.9                 | -64.6                 | -61.9                 | -65.2                 | -44.4                      | -21.25      | 23.2        |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | -63.7                 | -63.1                 | -63.7                 | -62.1                 | -47.1                      | -21.25      | 25.8        |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | -62.2                 | -63.7                 | -62.3                 | -62.6                 | -48.4                      | -21.25      | 27.2        |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | -63.3                 | -63.8                 |                       |                       | -53.5                      | -21.25      | 32.3        |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | -63.3                 | -63.8                 | -61.6                 |                       | -51.0                      | -21.25      | 29.8        |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | -62.2                 | -63.7                 | -62.3                 | -62.6                 | -49.6                      | -21.25      | 28.4        |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | -66.5                 |                       |                       |                       | -59.5                      | -21.25      | 38.3        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | -64.2                 | -64.7                 |                       |                       | -54.4                      | -21.25      | 33.2        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | -64.2                 | -63.9                 | -64.3                 |                       | -52.4                      | -21.25      | 31.1        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | -64.2                 | -63.9                 | -64.3                 | -63.3                 | -50.9                      | -21.25      | 29.6        |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | -62.6                 |                       |                       |                       | -55.6                      | -21.25      | 34.4        |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | -64.7                 | -64.0                 |                       |                       | -54.3                      | -21.25      | 33.1        |
|                 | HT/VHT40, M8 to M15                     | 2        | 7                             | -64.7                 | -64.0                 |                       |                       | -54.3                      | -21.25      | 33.1        |



|      |                                   |   |    |       |       |       |       |       |        |      |
|------|-----------------------------------|---|----|-------|-------|-------|-------|-------|--------|------|
|      | HT/VHT40, M0 to M7                | 3 | 7  | -62.8 | -63.3 | -62.4 |       | -51.0 | -21.25 | 29.8 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | -62.8 | -63.3 | -62.4 |       | -51.0 | -21.25 | 29.8 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | -62.8 | -63.3 | -62.4 |       | -51.0 | -21.25 | 29.8 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | -62.8 | -63.3 | -62.4 | -62.8 | -49.8 | -21.25 | 28.5 |
|      | HT/VHT40, M8 to M15               | 4 | 7  | -62.8 | -63.3 | -62.4 | -62.8 | -49.8 | -21.25 | 28.5 |
|      | HT/VHT40, M16 to M23              | 4 | 7  | -62.8 | -63.3 | -62.4 | -62.8 | -49.8 | -21.25 | 28.5 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | -62.8 | -63.3 |       |       | -50.0 | -21.25 | 28.8 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | -64.7 | -64.0 |       |       | -54.3 | -21.25 | 33.1 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | -65.2 | -62.4 | -63.7 |       | -47.0 | -21.25 | 25.8 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | -62.8 | -63.3 | -62.4 |       | -49.2 | -21.25 | 28.0 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | -62.8 | -63.3 | -62.4 |       | -51.0 | -21.25 | 29.8 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | -63.8 | -63.5 | -63.2 | -62.7 | -44.3 | -21.25 | 23.0 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | -64.1 | -63.9 | -64.0 | -64.1 | -48.0 | -21.25 | 26.8 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | -62.8 | -63.3 | -62.4 | -62.8 | -48.6 | -21.25 | 27.3 |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | -64.7 | -64.0 |       |       | -54.3 | -21.25 | 33.1 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | -62.8 | -63.3 | -62.4 |       | -51.0 | -21.25 | 29.8 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | -62.8 | -63.3 | -62.4 | -62.8 | -49.8 | -21.25 | 28.5 |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | -61.0 |       |       |       | -54.0 | -21.25 | 32.8 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | -64.2 | -63.4 |       |       | -53.8 | -21.25 | 32.5 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | -60.5 | -64.0 | -64.8 |       | -50.9 | -21.25 | 29.7 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | -63.0 | -62.2 | -63.1 | -64.2 | -50.0 | -21.25 | 28.8 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | -64.4 |       |       |       | -57.4 | -21.25 | 36.2 |
|      | HT/VHT80, M0 to M7                | 2 | 7  | -65.2 | -64.4 |       |       | -54.8 | -21.25 | 33.5 |
|      | HT/VHT80, M8 to M15               | 2 | 7  | -65.2 | -64.4 |       |       | -54.8 | -21.25 | 33.5 |
|      | HT/VHT80, M0 to M7                | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | -65.2 | -64.4 |       |       | -54.8 | -21.25 | 33.5 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | -65.2 | -64.4 |       |       | -54.8 | -21.25 | 33.5 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | -65.2 | -64.4 |       |       | -54.8 | -21.25 | 33.5 |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | -61.8 | -64.4 | -64.0 |       | -51.5 | -21.25 | 30.2 |
|      | HT/VHT80 STBC, M0 to M7           | 4 | 7  | -61.8 | -64.4 | -64.0 | -62.6 | -50.1 | -21.25 | 28.8 |

|      |                                                |          |           |              |              |              |              |              |               |             |
|------|------------------------------------------------|----------|-----------|--------------|--------------|--------------|--------------|--------------|---------------|-------------|
| 5230 | Non HT/VHT40, 6 to 54 Mbps                     | 1        | 7         | -63.5        |              |              |              | -56.5        | -21.25        | 35.3        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 2        | 7         | -63.5        | -63.0        |              |              | -53.2        | -21.25        | 32.0        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 3        | 7         | -63.5        | -63.0        | -62.6        |              | -51.2        | -21.25        | 30.0        |
|      | Non HT/VHT40, 6 to 54 Mbps                     | 4        | 7         | -63.5        | -63.0        | -62.6        | -63.0        | -50.0        | -21.25        | 28.7        |
|      | HT/VHT40, M0 to M7                             | 1        | 7         | -62.8        |              |              |              | -55.8        | -21.25        | 34.6        |
|      | HT/VHT40, M0 to M7                             | 2        | 7         | -62.8        | -64.6        |              |              | -53.6        | -21.25        | 32.3        |
|      | HT/VHT40, M8 to M15                            | 2        | 7         | -62.8        | -64.6        |              |              | -53.6        | -21.25        | 32.3        |
|      | HT/VHT40, M0 to M7                             | 3        | 7         | -62.8        | -64.6        | -64.4        |              | -52.1        | -21.25        | 30.8        |
|      | HT/VHT40, M8 to M15                            | 3        | 7         | -62.8        | -64.6        | -64.4        |              | -52.1        | -21.25        | 30.8        |
|      | HT/VHT40, M16 to M23                           | 3        | 7         | -62.8        | -64.6        | -64.4        |              | -52.1        | -21.25        | 30.8        |
|      | HT/VHT40, M0 to M7                             | 4        | 7         | -62.8        | -64.6        | -64.4        | -61.2        | -50.0        | -21.25        | 28.8        |
|      | HT/VHT40, M8 to M15                            | 4        | 7         | -62.8        | -64.6        | -64.4        | -61.2        | -50.0        | -21.25        | 28.8        |
|      | HT/VHT40, M16 to M23                           | 4        | 7         | -62.8        | -64.6        | -64.4        | -61.2        | -50.0        | -21.25        | 28.8        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 2        | 10        | -62.8        | -64.6        |              |              | -50.6        | -21.25        | 29.3        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 2        | 7         | -62.8        | -64.6        |              |              | -53.6        | -21.25        | 32.3        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 3        | 12        | -62.8        | -64.6        | -64.4        |              | -47.3        | -21.25        | 26.0        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 3        | 9         | -62.8        | -64.6        | -64.4        |              | -50.3        | -21.25        | 29.0        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 3        | 7         | -62.8        | -64.6        | -64.4        |              | -52.1        | -21.25        | 30.8        |
|      | HT/VHT40 Beam Forming, M0 to M7                | 4        | 13        | -64.2        | -62.9        | -63.5        | -62.8        | -44.3        | -21.25        | 23.0        |
|      | HT/VHT40 Beam Forming, M8 to M15               | 4        | 10        | -62.8        | -64.6        | -64.4        | -61.2        | -47.0        | -21.25        | 25.8        |
|      | HT/VHT40 Beam Forming, M16 to M23              | 4        | 8         | -62.8        | -64.6        | -64.4        | -61.2        | -48.8        | -21.25        | 27.6        |
|      | HT/VHT40 STBC, M0 to M7                        | 2        | 7         | -62.8        | -64.6        |              |              | -53.6        | -21.25        | 32.3        |
|      | HT/VHT40 STBC, M0 to M7                        | 3        | 7         | -62.8        | -64.6        | -64.4        |              | -52.1        | -21.25        | 30.8        |
|      | HT/VHT40 STBC, M0 to M7                        | 4        | 7         | -62.8        | -64.6        | -64.4        | -61.2        | -50.0        | -21.25        | 28.8        |
| 5240 | Non HT/VHT20, 6 to 54 Mbps                     | 1        | 7         | -63.5        |              |              |              | -56.5        | -21.25        | 35.3        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 2        | 7         | -63.5        | -61.7        |              |              | -52.5        | -21.25        | 31.2        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 3        | 7         | -63.5        | -61.7        | -62.1        |              | -50.6        | -21.25        | 29.3        |
|      | Non HT/VHT20, 6 to 54 Mbps                     | 4        | 7         | -63.0        | -62.2        | -63.1        | -64.0        | -50.0        | -21.25        | 28.8        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 2        | 10        | -63.5        | -61.7        |              |              | -49.5        | -21.25        | 28.2        |
|      | Non HT/VHT20 Beam Forming, 6 to 54 Mbps        | 3        | 12        | -63.5        | -61.7        | -62.1        |              | -45.8        | -21.25        | 24.5        |
|      | <b>Non HT/VHT20 Beam Forming, 6 to 54 Mbps</b> | <b>4</b> | <b>13</b> | <b>-63.0</b> | <b>-62.2</b> | <b>-63.1</b> | <b>-64.0</b> | <b>-44.0</b> | <b>-21.25</b> | <b>22.8</b> |
|      | HT/VHT20, M0 to M7                             | 1        | 7         | -64.1        |              |              |              | -57.1        | -21.25        | 35.9        |
|      | HT/VHT20, M0 to M7                             | 2        | 7         | -64.1        | -62.5        |              |              | -53.2        | -21.25        | 32.0        |
|      | HT/VHT20, M8 to M15                            | 2        | 7         | -64.1        | -62.5        |              |              | -53.2        | -21.25        | 32.0        |
|      | HT/VHT20, M0 to M7                             | 3        | 7         | -64.1        | -62.5        | -62.3        |              | -51.1        | -21.25        | 29.9        |
|      | HT/VHT20, M8 to M15                            | 3        | 7         | -64.1        | -62.5        | -62.3        |              | -51.1        | -21.25        | 29.9        |
|      | HT/VHT20, M16 to M23                           | 3        | 7         | -64.1        | -62.5        | -62.3        |              | -51.1        | -21.25        | 29.9        |
|      | HT/VHT20, M0 to M7                             | 4        | 7         | -63.1        | -62.2        | -63.0        | -64.3        | -50.1        | -21.25        | 28.8        |
|      | HT/VHT20, M8 to M15                            | 4        | 7         | -64.1        | -62.5        | -62.3        | -62.9        | -49.9        | -21.25        | 28.6        |
|      | HT/VHT20, M16 to M23                           | 4        | 7         | -64.1        | -62.5        | -62.3        | -62.9        | -49.9        | -21.25        | 28.6        |

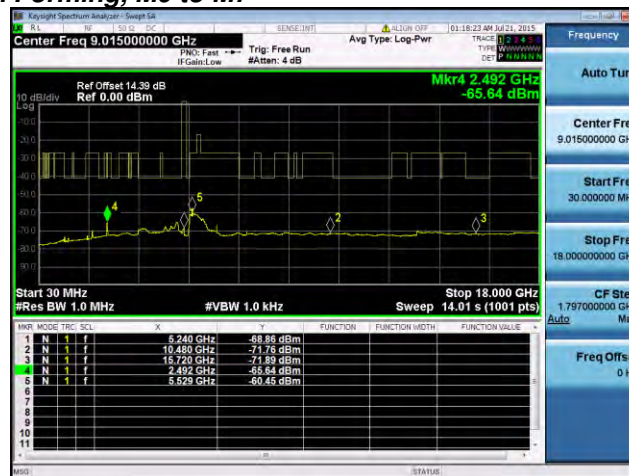
|                                   |   |    |       |       |       |       |       |        |      |
|-----------------------------------|---|----|-------|-------|-------|-------|-------|--------|------|
| HT/VHT20 Beam Forming, M0 to M7   | 2 | 10 | -64.1 | -62.5 |       |       | -50.2 | -21.25 | 29.0 |
| HT/VHT20 Beam Forming, M8 to M15  | 2 | 7  | -64.1 | -62.5 |       |       | -53.2 | -21.25 | 32.0 |
| HT/VHT20 Beam Forming, M0 to M7   | 3 | 12 | -64.1 | -62.5 | -62.3 |       | -46.3 | -21.25 | 25.1 |
| HT/VHT20 Beam Forming, M8 to M15  | 3 | 9  | -64.1 | -62.5 | -62.3 |       | -49.3 | -21.25 | 28.1 |
| HT/VHT20 Beam Forming, M16 to M23 | 3 | 7  | -64.1 | -62.5 | -62.3 |       | -51.1 | -21.25 | 29.9 |
| HT/VHT20 Beam Forming, M0 to M7   | 4 | 13 | -63.1 | -62.2 | -63.0 | -64.3 | -44.1 | -21.25 | 22.8 |
| HT/VHT20 Beam Forming, M8 to M15  | 4 | 10 | -64.1 | -62.5 | -62.3 | -62.9 | -46.9 | -21.25 | 25.6 |
| HT/VHT20 Beam Forming, M16 to M23 | 4 | 8  | -64.1 | -62.5 | -62.3 | -62.9 | -48.7 | -21.25 | 27.4 |
| HT/VHT20 STBC, M0 to M7           | 2 | 7  | -64.1 | -62.5 |       |       | -53.2 | -21.25 | 32.0 |
| HT/VHT20 STBC, M0 to M7           | 3 | 7  | -64.1 | -62.5 | -62.3 |       | -51.1 | -21.25 | 29.9 |
| HT/VHT20 STBC, M0 to M7           | 4 | 7  | -64.1 | -62.5 | -62.3 | -62.9 | -49.9 | -21.25 | 28.6 |

**Conducted Spurs Average Upper, All Antennas****Conducted Spurs Peak Upper, All Antennas**

### Conducted Spurs Average, 5240 MHz, HT/VHT20 Beam Forming, M0 to M7



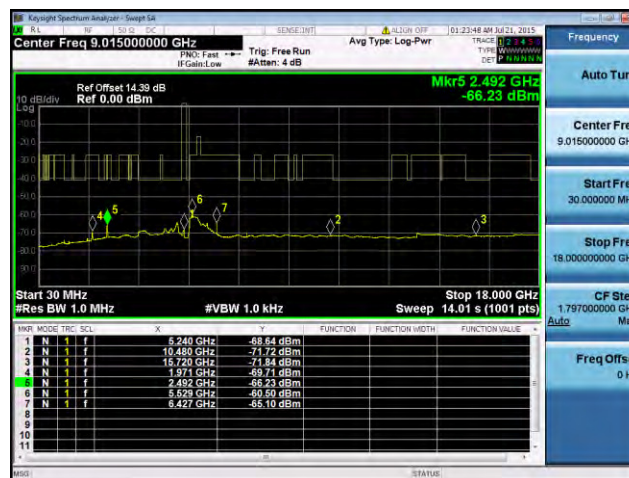
Antenna A



Antenna B



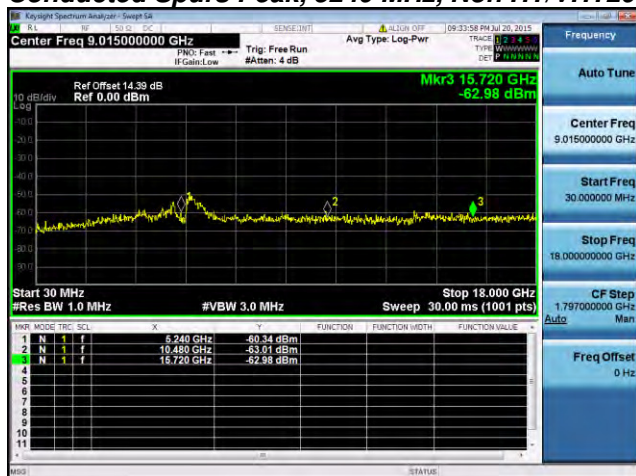
Antenna C



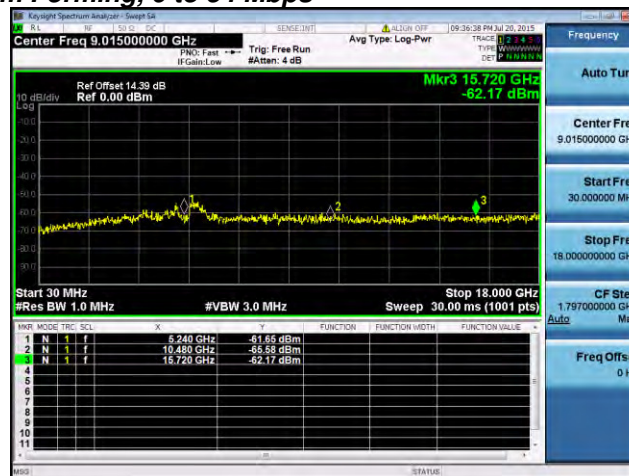
Antenna D



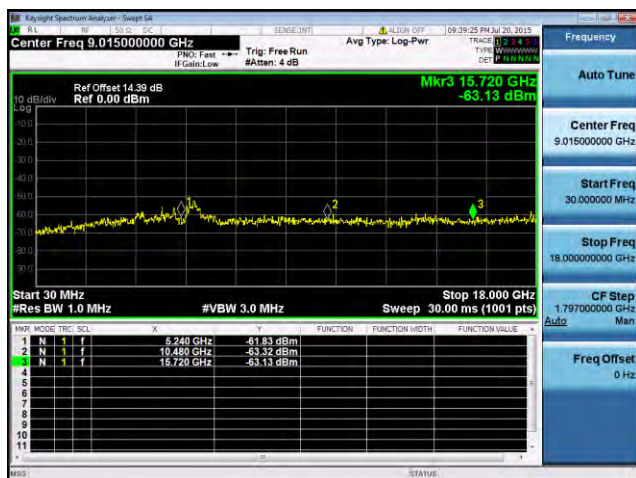
### Conducted Spurs Peak, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



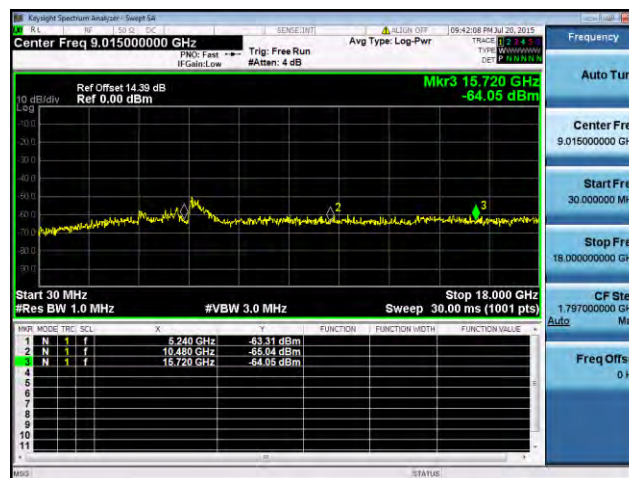
Antenna A



Antenna B



Antenna C



Antenna D

## A.4 Conducted Band Edge

**15.407 (b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). **However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz maximum emission limit.**

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

1) Average Plot, Limit= -41.25 dBm eirp

2) Peak plot, Limit = -21.25 dBm eirp

### Test Procedure

Ref. ANSI C63.10: 2013

#### Conducted Bandedge

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

#### Conducted Bandedge

##### Test parameters restricted Band

RBW = 1 MHz  
 VBW ≥ 3 x RBW for Peak, 100Hz for Average  
 Sweep = Auto couple  
 Detector = Peak  
 Trace = Max Hold.

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

Tested By :

Jose Aguirre

Date of testing:

07-Jul-15 - 08-Aug-15

Test Result : **PASS**

See Appendix C for list of test equipment

| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Bandedge Level (dBm) | Tx 2 Bandedge Level (dBm) | Tx 3 Bandedge Level (dBm) | Tx 4 Bandedge Level (dBm) | Total Tx Bandedge Level (dBm) | Limit (dBm)   | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-------------------------------|---------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | -51.6                     |                           |                           |                           | -44.6                         | -41.25        | 3.4         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | -51.6                     | -54.6                     |                           |                           | -42.8                         | -41.25        | 1.6         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | -51.6                     | -54.6                     | -54.1                     |                           | -41.5                         | -41.25        | 0.2         |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | -55.5                     | -56.6                     | -56.4                     | -57.0                     | -43.3                         | -41.25        | 2.1         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -55.5                     | -56.6                     |                           |                           | -43.0                         | -41.25        | 1.8         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | -57.9                     | -60.5                     | -60.7                     |                           | -42.9                         | -41.25        | 1.7         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | -59.5                     | -62.2                     | -61.5                     | -62.4                     | -42.2                         | -41.25        | 1.0         |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | -52.3                     |                           |                           |                           | -45.3                         | -41.25        | 4.1         |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | -52.3                     | -53.7                     |                           |                           | -42.9                         | -41.25        | 1.7         |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | -52.3                     | -53.7                     |                           |                           | -42.9                         | -41.25        | 1.7         |
|                 | <b>HT/VHT20, M0 to M7</b>               | <b>3</b> | <b>7</b>                      | <b>-52.3</b>              | <b>-53.7</b>              | <b>-53.4</b>              |                           | <b>-41.3</b>                  | <b>-41.25</b> | <b>0.1</b>  |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | -52.3                     | -53.7                     | -53.4                     |                           | -41.3                         | -41.25        | 0.1         |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | -52.3                     | -53.7                     | -53.4                     |                           | -41.3                         | -41.25        | 0.1         |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | -54.3                     | -56.5                     | -56.0                     | -56.9                     | -42.8                         | -41.25        | 1.5         |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | -54.3                     | -56.5                     | -56.0                     | -56.9                     | -42.8                         | -41.25        | 1.5         |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | -54.3                     | -56.5                     | -56.0                     | -56.9                     | -42.8                         | -41.25        | 1.5         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | -54.3                     | -56.5                     |                           |                           | -42.3                         | -41.25        | 1.0         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | -52.3                     | -53.7                     |                           |                           | -42.9                         | -41.25        | 1.7         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | -57.6                     | -59.7                     | -59.3                     |                           | -42.2                         | -41.25        | 0.9         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | -54.3                     | -56.5                     | -56.0                     |                           | -41.9                         | -41.25        | 0.7         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | -52.3                     | -53.7                     | -53.4                     |                           | -41.3                         | -41.25        | 0.1         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | -59.6                     | -61.4                     | -60.3                     | -61.5                     | -41.6                         | -41.25        | 0.4         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | -55.5                     | -59.3                     | -58.7                     | -58.3                     | -41.7                         | -41.25        | 0.4         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | -54.3                     | -56.5                     | -56.0                     | -56.9                     | -41.6                         | -41.25        | 0.3         |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | -52.3                     | -53.7                     |                           |                           | -42.9                         | -41.25        | 1.7         |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | -52.3                     | -53.7                     | -53.4                     |                           | -41.3                         | -41.25        | 0.1         |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | -54.3                     | -56.5                     | -56.0                     | -56.9                     | -42.8                         | -41.25        | 1.5         |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | -49.6                     |                           |                           |                           | -42.6                         | -41.25        | 1.4         |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | -51.5                     | -54.0                     |                           |                           | -42.6                         | -41.25        | 1.3         |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | -53.1                     | -56.6                     | -56.2                     |                           | -43.2                         | -41.25        | 2.0         |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | -53.1                     | -56.6                     | -56.2                     | -56.9                     | -42.4                         | -41.25        | 1.1         |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | -49.3                     |                           |                           |                           | -42.3                         | -41.25        | 1.1         |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | -52.3                     | -51.6                     |                           |                           | -41.9                         | -41.25        | 0.7         |



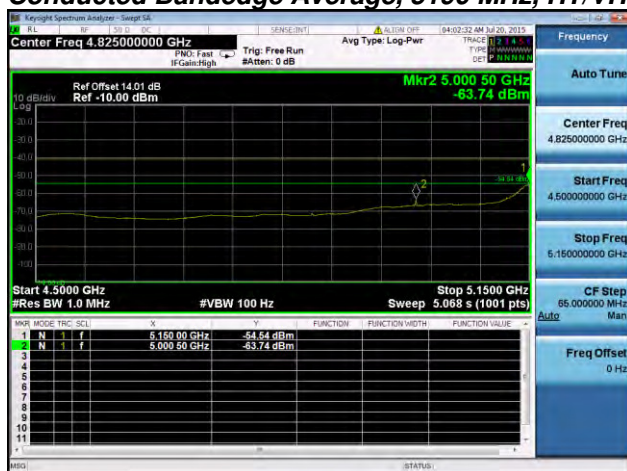
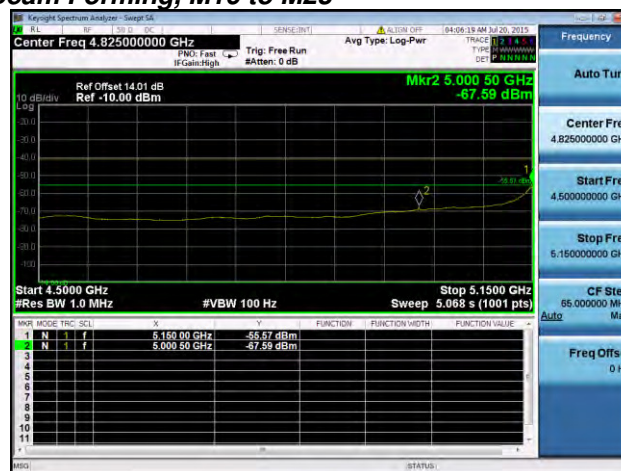
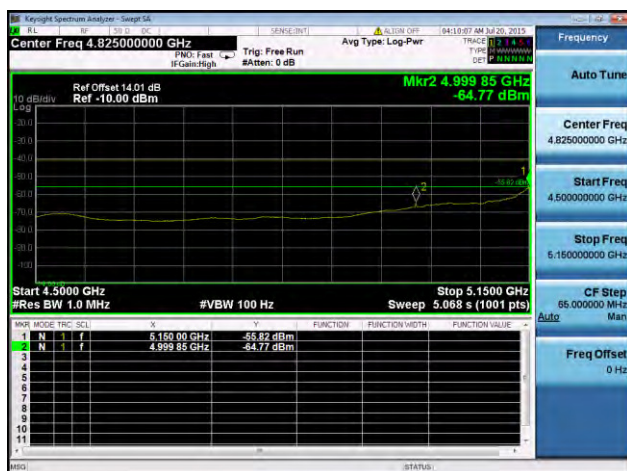
|      |                                   |   |    |       |       |       |       |       |        |     |
|------|-----------------------------------|---|----|-------|-------|-------|-------|-------|--------|-----|
|      | HT/VHT40, M8 to M15               | 2 | 7  | -52.3 | -51.6 |       |       | -41.9 | -41.25 | 0.7 |
|      | HT/VHT40, M0 to M7                | 3 | 7  | -54.5 | -55.6 | -55.8 |       | -43.5 | -41.25 | 2.2 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | -54.5 | -55.6 | -55.8 |       | -43.5 | -41.25 | 2.2 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | -54.5 | -55.6 | -55.8 |       | -43.5 | -41.25 | 2.2 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | -54.5 | -55.6 | -55.8 | -56.5 | -42.5 | -41.25 | 1.3 |
|      | HT/VHT40, M8 to M15               | 4 | 7  | -54.5 | -55.6 | -55.8 | -56.5 | -42.5 | -41.25 | 1.3 |
|      | HT/VHT40, M16 to M23              | 4 | 7  | -54.5 | -55.6 | -55.8 | -56.5 | -42.5 | -41.25 | 1.3 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | -54.5 | -55.6 |       |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | -52.3 | -51.6 |       |       | -41.9 | -41.25 | 0.7 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | -57.3 | -58.5 | -58.6 |       | -41.5 | -41.25 | 0.3 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | -54.5 | -55.6 | -55.8 |       | -41.7 | -41.25 | 0.4 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | -54.5 | -55.6 | -55.8 |       | -43.5 | -41.25 | 2.2 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | -58.8 | -61.0 | -61.9 | -62.3 | -41.8 | -41.25 | 0.5 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | -56.2 | -57.1 | -57.3 | -59.6 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | -54.5 | -55.6 | -55.8 | -56.5 | -41.3 | -41.25 | 0.1 |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | -52.3 | -51.6 |       |       | -41.9 | -41.25 | 0.7 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | -54.5 | -55.6 | -55.8 |       | -43.5 | -41.25 | 2.2 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | -54.5 | -55.6 | -55.8 | -56.5 | -42.5 | -41.25 | 1.3 |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | -49.1 |       |       |       | -42.1 | -41.25 | 0.9 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | -51.4 | -51.7 |       |       | -41.5 | -41.25 | 0.3 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | -52.6 | -53.4 | -56.0 |       | -42.0 | -41.25 | 0.8 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | -53.2 | -53.9 | -56.6 | -54.7 | -41.4 | -41.25 | 0.2 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | -48.8 |       |       |       | -41.8 | -41.25 | 0.6 |
|      | HT/VHT80, M0 to M7                | 2 | 7  | -51.9 | -53.2 |       |       | -42.5 | -41.25 | 1.2 |
|      | HT/VHT80, M8 to M15               | 2 | 7  | -51.9 | -53.2 |       |       | -42.5 | -41.25 | 1.2 |
|      | HT/VHT80, M0 to M7                | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | -51.9 | -53.2 |       |       | -42.5 | -41.25 | 1.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | -51.9 | -53.2 |       |       | -42.5 | -41.25 | 1.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | -51.9 | -53.2 |       |       | -42.5 | -41.25 | 1.2 |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | -53.3 | -54.0 | -54.1 |       | -42.0 | -41.25 | 0.8 |

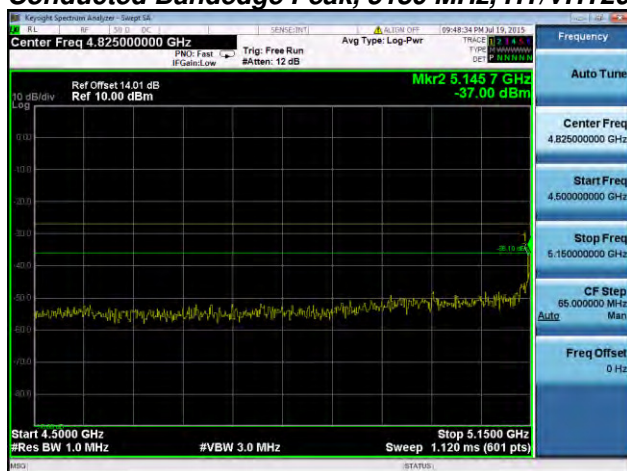
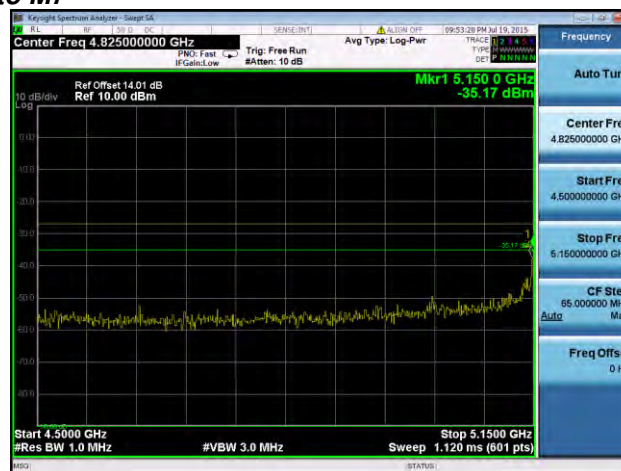
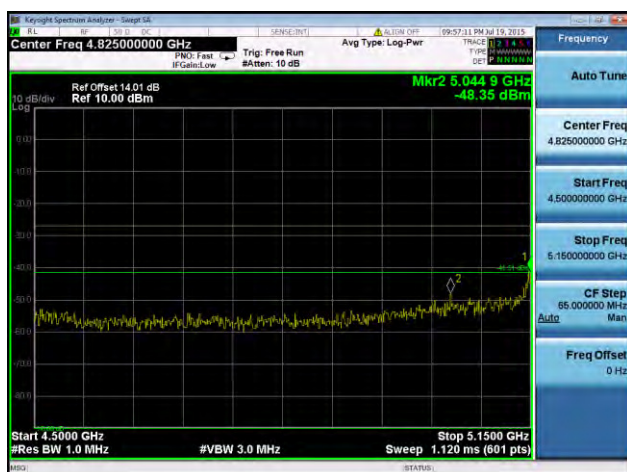


|  |                         |   |   |       |       |       |       |       |        |     |
|--|-------------------------|---|---|-------|-------|-------|-------|-------|--------|-----|
|  | HT/VHT80 STBC, M0 to M7 | 4 | 7 | -53.3 | -54.0 | -54.1 | -56.9 | -41.4 | -41.25 | 0.1 |
|--|-------------------------|---|---|-------|-------|-------|-------|-------|--------|-----|

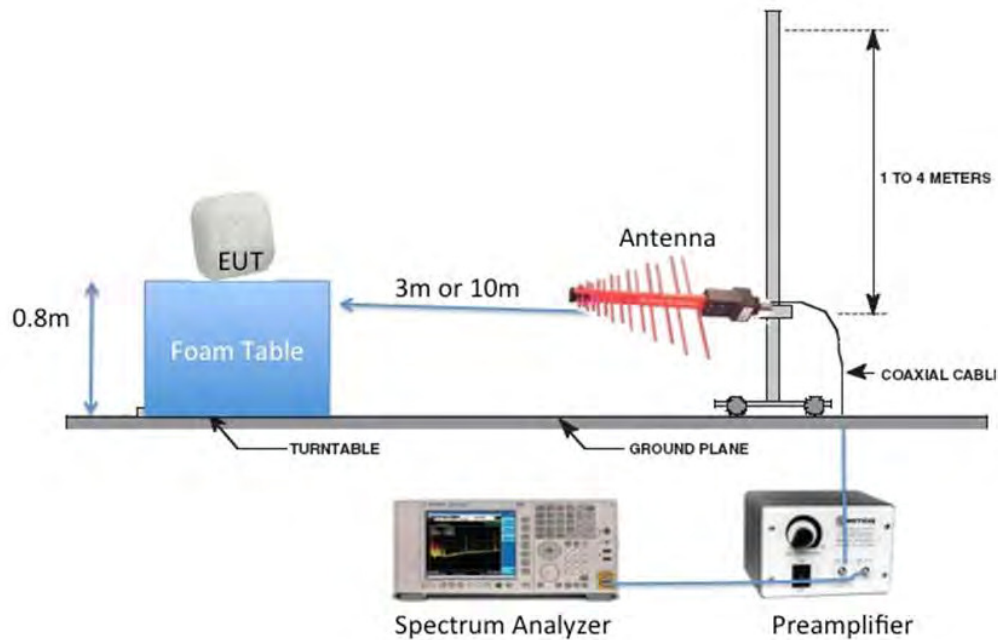
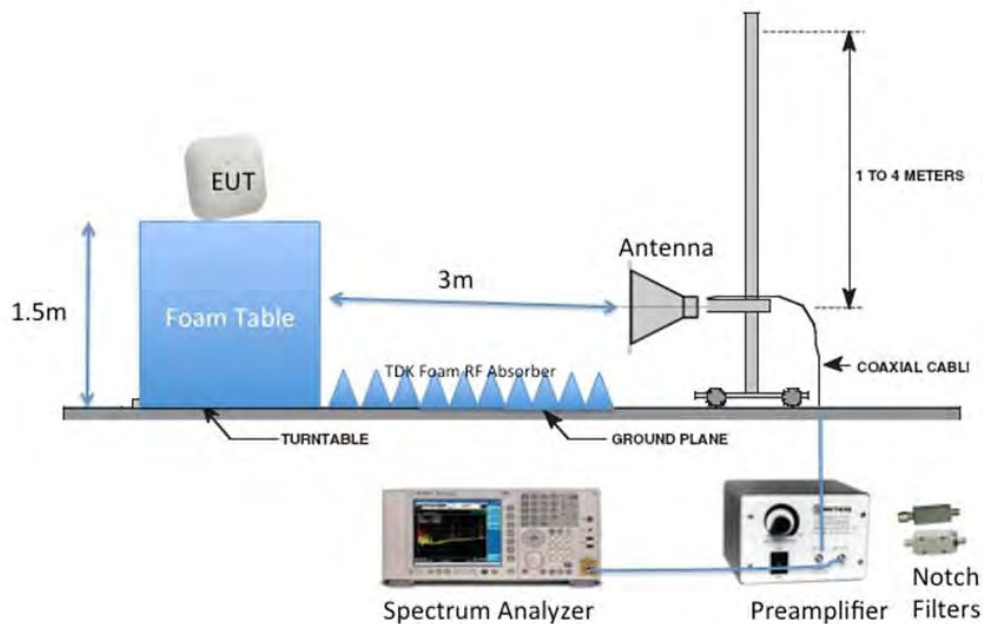
| Frequency (MHz) | Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Bandedge Level (dBm) | Tx 2 Bandedge Level (dBm) | Tx 3 Bandedge Level (dBm) | Tx 4 Bandedge Level (dBm) | Total Tx Bandedge Level (dBm) | Limit (dBm)   | Margin (dB) |
|-----------------|-----------------------------------------|----------|-------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-------------------------------|---------------|-------------|
| 5180            | Non HT/VHT20, 6 to 54 Mbps              | 1        | 7                             | -40.5                     |                           |                           |                           | -33.5                         | -21.25        | 12.3        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 2        | 7                             | -40.5                     | -45.5                     |                           |                           | -32.3                         | -21.25        | 11.1        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 3        | 7                             | -40.5                     | -45.5                     | -47.5                     |                           | -31.7                         | -21.25        | 10.4        |
|                 | Non HT/VHT20, 6 to 54 Mbps              | 4        | 7                             | -42.1                     | -47.0                     | -44.2                     | -50.3                     | -31.9                         | -21.25        | 10.6        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -42.1                     | -47.0                     |                           |                           | -30.9                         | -21.25        | 9.6         |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 3        | 12                            | -49.1                     | -53.5                     | -50.3                     |                           | -34.0                         | -21.25        | 12.8        |
|                 | Non HT/VHT20 Beam Forming, 6 to 54 Mbps | 4        | 13                            | -49.3                     | -51.0                     | -52.4                     | -54.2                     | -32.3                         | -21.25        | 11.1        |
|                 | HT/VHT20, M0 to M7                      | 1        | 7                             | -36.1                     |                           |                           |                           | -29.1                         | -21.25        | 7.9         |
|                 | HT/VHT20, M0 to M7                      | 2        | 7                             | -36.1                     | -35.2                     |                           |                           | -25.6                         | -21.25        | 4.4         |
|                 | HT/VHT20, M8 to M15                     | 2        | 7                             | -36.1                     | -35.2                     |                           |                           | -25.6                         | -21.25        | 4.4         |
|                 | <b>HT/VHT20, M0 to M7</b>               | <b>3</b> | <b>7</b>                      | <b>-36.1</b>              | <b>-35.2</b>              | <b>-41.5</b>              |                           | <b>-25.1</b>                  | <b>-21.25</b> | <b>3.8</b>  |
|                 | HT/VHT20, M8 to M15                     | 3        | 7                             | -36.1                     | -35.2                     | -41.5                     |                           | -25.1                         | -21.25        | 3.8         |
|                 | HT/VHT20, M16 to M23                    | 3        | 7                             | -36.1                     | -35.2                     | -41.5                     |                           | -25.1                         | -21.25        | 3.8         |
|                 | HT/VHT20, M0 to M7                      | 4        | 7                             | -43.4                     | -40.8                     | -46.5                     | -46.6                     | -30.6                         | -21.25        | 9.4         |
|                 | HT/VHT20, M8 to M15                     | 4        | 7                             | -43.4                     | -40.8                     | -46.5                     | -46.6                     | -30.6                         | -21.25        | 9.4         |
|                 | HT/VHT20, M16 to M23                    | 4        | 7                             | -43.4                     | -40.8                     | -46.5                     | -46.6                     | -30.6                         | -21.25        | 9.4         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 2        | 10                            | -43.4                     | -40.8                     |                           |                           | -28.9                         | -21.25        | 7.6         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 2        | 7                             | -36.1                     | -35.2                     |                           |                           | -25.6                         | -21.25        | 4.4         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 3        | 12                            | -47.5                     | -48.0                     | -47.3                     |                           | -31.0                         | -21.25        | 9.8         |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 3        | 9                             | -43.4                     | -40.8                     | -46.5                     |                           | -29.4                         | -21.25        | 8.2         |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 3        | 7                             | -36.1                     | -35.2                     | -41.5                     |                           | -25.1                         | -21.25        | 3.8         |
|                 | HT/VHT20 Beam Forming, M0 to M7         | 4        | 13                            | -51.2                     | -51.4                     | -52.9                     | -53.8                     | -33.2                         | -21.25        | 11.9        |
|                 | HT/VHT20 Beam Forming, M8 to M15        | 4        | 10                            | -47.2                     | -47.0                     | -48.4                     | -50.1                     | -32.0                         | -21.25        | 10.7        |
|                 | HT/VHT20 Beam Forming, M16 to M23       | 4        | 8                             | -43.4                     | -40.8                     | -46.5                     | -46.6                     | -29.4                         | -21.25        | 8.2         |
|                 | HT/VHT20 STBC, M0 to M7                 | 2        | 7                             | -36.1                     | -35.2                     |                           |                           | -25.6                         | -21.25        | 4.4         |
|                 | HT/VHT20 STBC, M0 to M7                 | 3        | 7                             | -36.1                     | -35.2                     | -41.5                     |                           | -25.1                         | -21.25        | 3.8         |
|                 | HT/VHT20 STBC, M0 to M7                 | 4        | 7                             | -43.4                     | -40.8                     | -46.5                     | -46.6                     | -30.6                         | -21.25        | 9.4         |
| 5190            | Non HT/VHT40, 6 to 54 Mbps              | 1        | 7                             | -36.5                     |                           |                           |                           | -29.5                         | -21.25        | 8.3         |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 2        | 7                             | -36.9                     | -36.7                     |                           |                           | -26.8                         | -21.25        | 5.5         |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 3        | 7                             | -45.0                     | -41.3                     | -45.7                     |                           | -31.8                         | -21.25        | 10.5        |
|                 | Non HT/VHT40, 6 to 54 Mbps              | 4        | 7                             | -45.0                     | -41.3                     | -45.7                     | -47.3                     | -31.2                         | -21.25        | 10.0        |
|                 | HT/VHT40, M0 to M7                      | 1        | 7                             | -34.8                     |                           |                           |                           | -27.8                         | -21.25        | 6.6         |
|                 | HT/VHT40, M0 to M7                      | 2        | 7                             | -40.7                     | -41.8                     |                           |                           | -31.2                         | -21.25        | 10.0        |
|                 | HT/VHT40, M8 to M15                     | 2        | 7                             | -40.7                     | -41.8                     |                           |                           | -31.2                         | -21.25        | 10.0        |

|      |                                   |   |    |       |       |       |       |       |        |      |
|------|-----------------------------------|---|----|-------|-------|-------|-------|-------|--------|------|
|      | HT/VHT40, M0 to M7                | 3 | 7  | -40.9 | -46.1 | -43.8 |       | -31.3 | -21.25 | 10.1 |
|      | HT/VHT40, M8 to M15               | 3 | 7  | -40.9 | -46.1 | -43.8 |       | -31.3 | -21.25 | 10.1 |
|      | HT/VHT40, M16 to M23              | 3 | 7  | -40.9 | -46.1 | -43.8 |       | -31.3 | -21.25 | 10.1 |
|      | HT/VHT40, M0 to M7                | 4 | 7  | -40.9 | -46.1 | -43.8 | -44.4 | -30.4 | -21.25 | 9.1  |
|      | HT/VHT40, M8 to M15               | 4 | 7  | -40.9 | -46.1 | -43.8 | -44.4 | -30.4 | -21.25 | 9.1  |
|      | HT/VHT40, M16 to M23              | 4 | 7  | -40.9 | -46.1 | -43.8 | -44.4 | -30.4 | -21.25 | 9.1  |
|      | HT/VHT40 Beam Forming, M0 to M7   | 2 | 10 | -40.9 | -46.1 |       |       | -29.8 | -21.25 | 8.5  |
|      | HT/VHT40 Beam Forming, M8 to M15  | 2 | 7  | -40.7 | -41.8 |       |       | -31.2 | -21.25 | 10.0 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 3 | 12 | -48.3 | -49.1 | -48.7 |       | -32.1 | -21.25 | 10.9 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 3 | 9  | -40.9 | -46.1 | -43.8 |       | -29.5 | -21.25 | 8.3  |
|      | HT/VHT40 Beam Forming, M16 to M23 | 3 | 7  | -40.9 | -46.1 | -43.8 |       | -31.3 | -21.25 | 10.1 |
|      | HT/VHT40 Beam Forming, M0 to M7   | 4 | 13 | -50.4 | -51.4 | -51.7 | -53.7 | -32.6 | -21.25 | 11.4 |
|      | HT/VHT40 Beam Forming, M8 to M15  | 4 | 10 | -45.4 | -48.1 | -48.9 | -51.9 | -32.0 | -21.25 | 10.7 |
|      | HT/VHT40 Beam Forming, M16 to M23 | 4 | 8  | -40.9 | -46.1 | -43.8 | -44.4 | -29.2 | -21.25 | 7.9  |
|      | HT/VHT40 STBC, M0 to M7           | 2 | 7  | -40.7 | -41.8 |       |       | -31.2 | -21.25 | 10.0 |
|      | HT/VHT40 STBC, M0 to M7           | 3 | 7  | -40.9 | -46.1 | -43.8 |       | -31.3 | -21.25 | 10.1 |
|      | HT/VHT40 STBC, M0 to M7           | 4 | 7  | -40.9 | -46.1 | -43.8 | -44.4 | -30.4 | -21.25 | 9.1  |
| 5210 | Non HT/VHT80, 6 to 54 Mbps        | 1 | 7  | -37.5 |       |       |       | -30.5 | -21.25 | 9.3  |
|      | Non HT/VHT80, 6 to 54 Mbps        | 2 | 7  | -40.1 | -43.1 |       |       | -31.3 | -21.25 | 10.1 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 3 | 7  | -45.0 | -43.2 | -49.9 |       | -33.5 | -21.25 | 12.2 |
|      | Non HT/VHT80, 6 to 54 Mbps        | 4 | 7  | -45.1 | -44.3 | -47.4 | -47.2 | -32.8 | -21.25 | 11.5 |
|      | HT/VHT80, M0 to M7                | 1 | 7  | -36.8 |       |       |       | -29.8 | -21.25 | 8.6  |
|      | HT/VHT80, M0 to M7                | 2 | 7  | -41.3 | -40.9 |       |       | -31.1 | -21.25 | 9.8  |
|      | HT/VHT80, M8 to M15               | 2 | 7  | -41.3 | -40.9 |       |       | -31.1 | -21.25 | 9.8  |
|      | HT/VHT80, M0 to M7                | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80, M8 to M15               | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80, M16 to M23              | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80, M0 to M7                | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80, M8 to M15               | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80, M16 to M23              | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 2 | 7  | -41.3 | -40.9 |       |       | -31.1 | -21.25 | 9.8  |
|      | HT/VHT80 Beam Forming, M8 to M15  | 2 | 7  | -41.3 | -40.9 |       |       | -31.1 | -21.25 | 9.8  |
|      | HT/VHT80 Beam Forming, M0 to M7   | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80 Beam Forming, M0 to M7   | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80 Beam Forming, M8 to M15  | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80 Beam Forming, M16 to M23 | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |
|      | HT/VHT80 STBC, M0 to M7           | 2 | 7  | -41.3 | -40.9 |       |       | -31.1 | -21.25 | 9.8  |
|      | HT/VHT80 STBC, M0 to M7           | 3 | 7  | -45.3 | -45.5 | -44.8 |       | -33.4 | -21.25 | 12.2 |
|      | HT/VHT80 STBC, M0 to M7           | 4 | 7  | -45.3 | -45.5 | -44.8 | -46.2 | -32.4 | -21.25 | 11.2 |

**Conducted Bandedge Average, 5190 MHz, HT/VHT40 Beam Forming, M16 to M23****Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Peak, 5180 MHz, HT/VHT20, M0 to M7****Antenna A****Antenna B****Antenna C**



**Appendix B: Emission Test Results****Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA**Radiated Emission Setup Diagram-Below 1G****Radiated Emission Setup Diagram-Above 1G**

## B.1 Radiated Spurious Emissions

**FCC 15.205 / 15.407** Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Ref.** ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

|                       |                                     |
|-----------------------|-------------------------------------|
| Span:                 | 1GHz – 18 GHz/18GHz-26G/26GHz-40GHz |
| Reference Level:      | 80 dBuV                             |
| Attenuation:          | 10 dB                               |
| Sweep Time:           | Coupled                             |
| Resolution Bandwidth: | 1MHz                                |
| Video Bandwidth:      | 3 MHz for peak, 1 KHz for average   |
| Detector:             | Peak                                |

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:     1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
                      2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 2             | EUT         | S03     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S04     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**Tested By :**

Jose Aguirre

**Date of testing:**

07-Jul-15 - 08-Aug-15

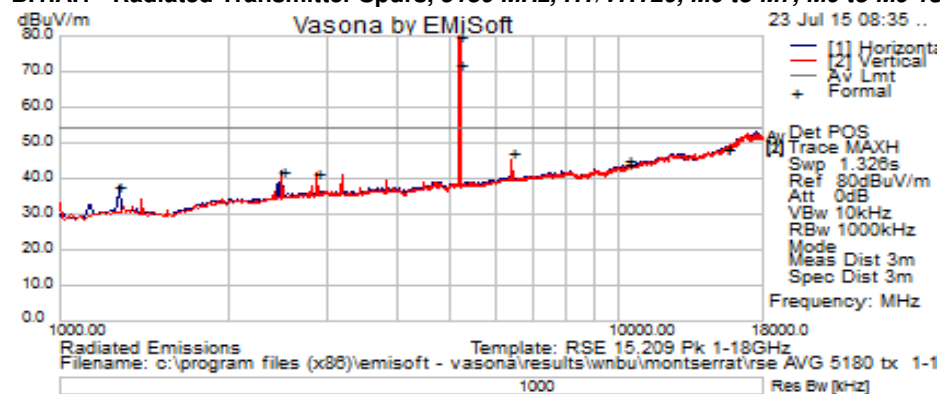
**Test Result : PASS**

See Appendix C for list of test equipment

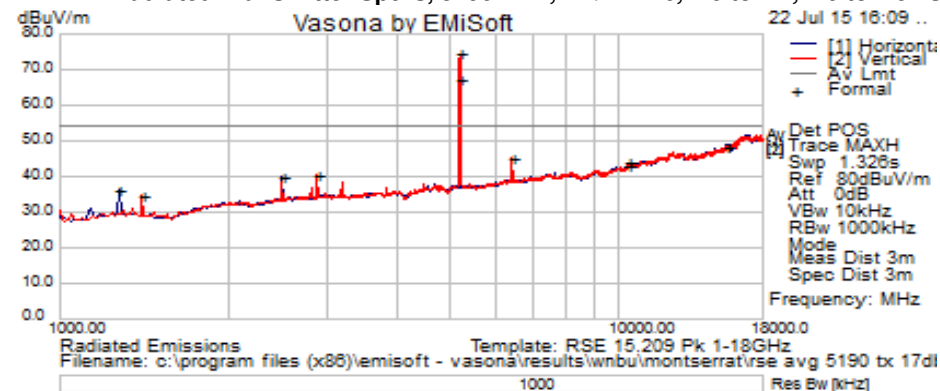


**B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case**

| Frequency<br>(MHz) | Mode                             | Data Rate<br>(Mbps) | Spurious<br>Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(MHz) |
|--------------------|----------------------------------|---------------------|-------------------------------------------|-------------------|-----------------|
| 5180               | HT/VHT20, M0 to M7, M0 to M9 1ss | m0                  | 45.4                                      | 54                | 8.6             |
| 5190               | HT/VHT40, M0 to M7, M0 to M9 1ss | m0                  | 48.6                                      | 54                | 5.4             |
| 5210               | HT/VHT80, M0 to M7, M0 to M9 1ss | m0x1                | 46.6                                      | 54                | 7.4             |
| 5230               | HT/VHT40, M0 to M7, M0 to M9 1ss | m0                  | 49.2                                      | 54                | 4.8             |
| 5240               | HT/VHT20, M0 to M7, M0 to M9 1ss | m0                  | 48.7                                      | 54                | 5.3             |

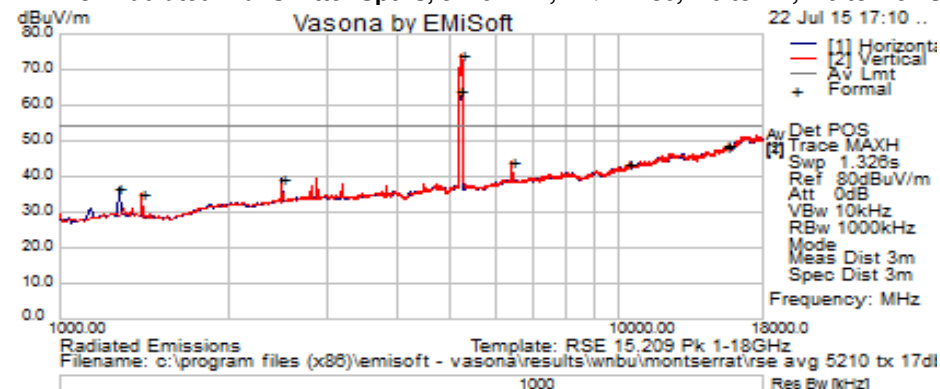
**B.1.A.1 Radiated Transmitter Spurs, 5180 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5186.25       | 72.2     | 8.6        | -3.6  | 77.3         | Average.         | V    | 223    | 20      | --           | --        | --         |
| 5187.5        | 64.2     | 8.7        | -3.6  | 69.3         | Average.         | H    | 114    | 90      | --           | --        | --         |
| 10360.208     | 25.51    | 12.7       | 4.99  | 43.21        | Average.         |      | 115    | 90      | 54           | -10.79    | Pass       |
| 10360.887     | 25.4     | 12.7       | 5     | 43.1         | Average.         | V    | 222    | 20      | 54           | -10.9     | Pass       |
| 15539.244     | 26.7     | 16.15      | 2.22  | 45.07        | Average.         | V    | 222    | 20      | 54           | -8.93     | Pass       |
| 15539.578     | 26.99    | 16.15      | 2.22  | 45.36        | Average.         | H    | 115    | 90      | 54           | -8.64     | Pass       |
| 2880.625      | 35.49    | 6.46       | -4.96 | 36.99        | Average.         | V    | 200    | 359     | 54           | -17.01    | Pass       |
| 2498.125      | 35.02    | 6          | -5.29 | 35.73        | Average.         | V    | 150    | 342     | 54           | -18.27    | Pass       |

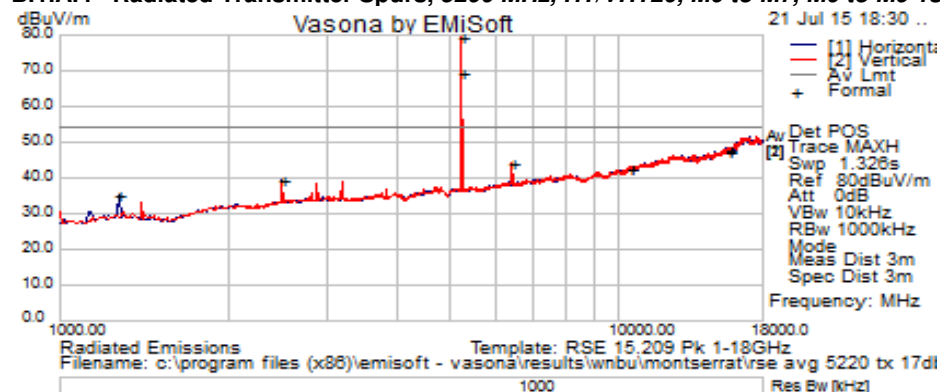
**B.1.A.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 1276.25       | 35.77    | 4.24       | -3.79 | 36.23        | Average.         | H    | 200    | 111     | 54           | -17.77    | Pass       |
| 1403.75       | 34.83    | 4.44       | -4.41 | 34.85        | Average.         | V    | 100    | 18      | 54           | -19.15    | Pass       |
| 2498.125      | 35.7     | 6          | -1.54 | 40.16        | Average.         | H    | 150    | 110     | 54           | -13.84    | Pass       |
| 2880.625      | 35.68    | 6.46       | -1.65 | 40.48        | Average.         | V    | 200    | 18      | 54           | -13.52    | Pass       |
| 5183.375      | 61.5     | 8.6        | -3    | 67.2         | Average.         | H    | 122    | 245     | --           | --        | --         |
| 5196.875      | 68.81    | 8.66       | -2.97 | 74.5         | Average.         | V    | 170    | 356     | --           | --        | --         |
| 6429.375      | 37.24    | 9.7        | -1.92 | 45.03        | Average.         | V    | 150    | 342     | 54           | -8.97     | Pass       |
| 10380.103     | 27.3     | 12.7       | 4     | 44           | Average.         | H    | 124    | 245     | 54           | -10       | Pass       |

|           |      |      |     |      |          |   |     |     |    |      |      |
|-----------|------|------|-----|------|----------|---|-----|-----|----|------|------|
| 10380.724 | 26.3 | 12.7 | 4   | 43   | Average. | V | 169 | 357 | 54 | -11  | Pass |
| 15570.415 | 27.8 | 16.1 | 4.4 | 48.3 | Average. | V | 169 | 357 | 54 | -5.7 | Pass |
| 15571.272 | 28.1 | 16.1 | 4.4 | 48.6 | Average. | H | 124 | 245 | 54 | -5.4 | Pass |

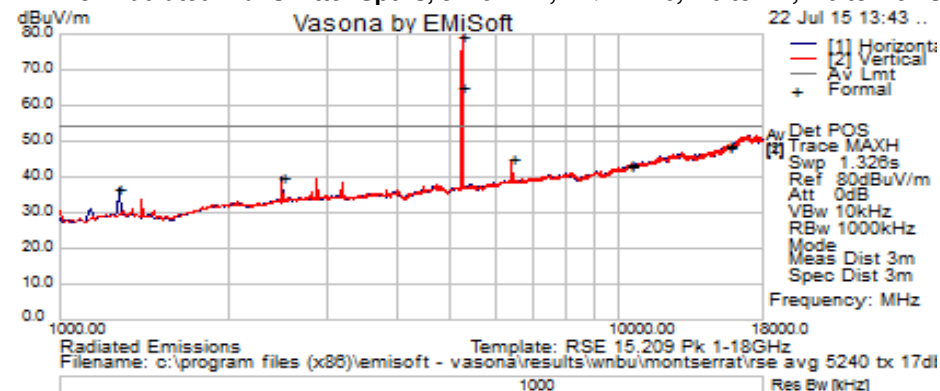
**B.1.A.3 Radiated Transmitter Spurs, 5210 MHz, HT/VHT80, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5182.875      | 56.1     | 8.6        | -3.6  | 61.2         | Average.         | H    | 125    | 48      | --           | --        | --         |
| 5245          | 61.2     | 8.7        | -3.4  | 66.5         | Average.         | V    | 180    | 352     | --           | --        | --         |
| 10416.848     | 28.9     | 12.7       | 5     | 46.6         | Average.         | V    | 179    | 352     | 54           | -7.4      | Pass       |
| 10418.213     | 25.2     | 12.7       | 5     | 42.9         | Average.         | H    | 125    | 48      | 54           | -11.1     | Pass       |
| 15627.568     | 26.5     | 16.2       | 1.9   | 44.6         | Average.         | V    | 179    | 352     | 54           | -9.4      | Pass       |
| 15629.387     | 26.2     | 16.3       | 1.9   | 44.3         | Average.         | H    | 125    | 48      | 54           | -9.7      | Pass       |
| 6429.375      | 36.87    | 9.7        | -3.19 | 43.39        | Average.         | V    | 150    | 342     | 54           | -10.61    | Pass       |
| 2498.125      | 34.89    | 6          | -5.29 | 35.59        | Average.         | H    | 200    | 83      | 54           | -18.41    | Pass       |
| 3199.572      | 34.21    | 6.76       | -4.01 | 36.96        | Average.         | V    | 102    | 360     | 54           | -17.04    | Pass       |

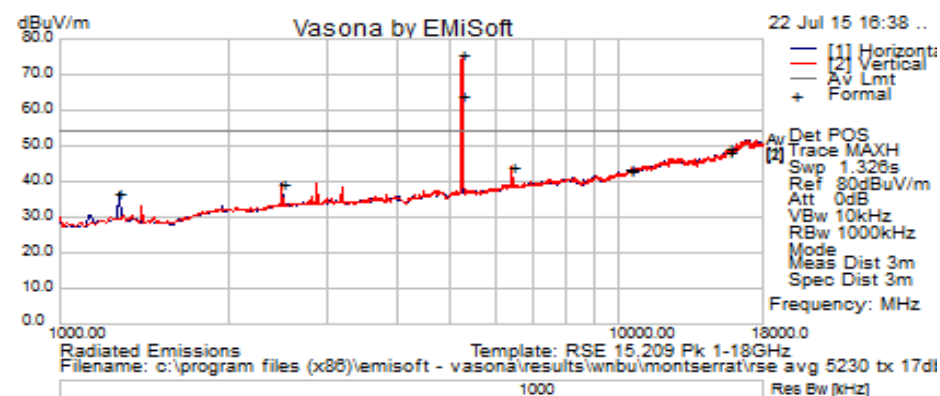
**B.1.A.4 Radiated Transmitter Spurs, 5220 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5218.125      | 73.8     | 8.7        | -2.9  | 79.58        | Average.         | V    | 184    | 358     | --           | --        | --         |
| 5227.25       | 63.7     | 8.7        | -2.8  | 69.5         | Average.         | H    | 105    | 134     | --           | --        | --         |
| 10440.22      | 25.22    | 12.75      | 4.42  | 42.39        | Average.         | V    | 183    | 358     | 54           | -11.61    | Pass       |
| 10440.739     | 25.29    | 12.75      | 4.42  | 42.46        | Average.         | H    | 105    | 134     | 54           | -11.54    | Pass       |
| 15659.57      | 26.92    | 16.25      | 4.39  | 47.56        | Average.         | H    | 105    | 134     | 54           | -6.44     | Pass       |

|           |       |       |       |       |          |   |     |     |    |       |      |
|-----------|-------|-------|-------|-------|----------|---|-----|-----|----|-------|------|
| 15660.146 | 26.8  | 16.25 | 4.38  | 47.43 | Average. | V | 183 | 358 | 54 | -6.57 | Pass |
| 6429.375  | 36.42 | 9.7   | -1.92 | 44.2  | Average. | V | 200 | 342 | 54 | -9.8  | Pass |
| 2498.125  | 34.85 | 6     | -1.54 | 39.3  | Average. | H | 200 | 100 | 54 | -14.7 | Pass |
| 1276.25   | 34.84 | 4.24  | -3.79 | 35.3  | Average. | H | 200 | 123 | 54 | -18.7 | Pass |

**B.1.A.5 Radiated Transmitter Spurs, 5240 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 1276.25       | 36.38    | 4.24       | -3.79 | 36.84        | Average.         | H    | 200    | 122     | 54           | -17.16    | Pass       |
| 2498.125      | 35.5     | 6          | -1.54 | 39.96        | Average.         | H    | 150    | 110     | 54           | -14.04    | Pass       |
| 5239.375      | 73.4     | 8.7        | -2.8  | 79.3         | Average.         | V    | 175    | 358     | --           | --        | --         |
| 5247.188      | 59.7     | 8.7        | -2.8  | 65.5         | Average.         | H    | 109    | 87      | --           | --        | --         |
| 6428.104      | 37.5     | 9.7        | -1.9  | 45.3         | Average.         | V    | 175    | 358     | 54           | -8.7      | Pass       |
| 10480.117     | 26.5     | 12.8       | 4.5   | 43.8         | Average.         | V    | 174    | 360     | 54           | -10.2     | Pass       |
| 10480.4       | 25.75    | 12.78      | 4.49  | 43.02        | Average.         | H    | 111    | 88      | 54           | -10.98    | Pass       |
| 15719.033     | 27.7     | 16.3       | 4.7   | 48.7         | Average.         | H    | 111    | 88      | 54           | -5.3      | Pass       |
| 15719.878     | 27.6     | 16.3       | 4.7   | 48.6         | Average.         | V    | 174    | 360     | 54           | -5.4      | Pass       |

**B.1.A.6 Radiated Transmitter Spurs, 5230 MHz, , HT/VHT40, M0 to M7, M0 to M9 1ss, Average (1-18GHz)**


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 1276.25       | 36.43    | 4.24       | -3.79 | 36.89        | Average.         | H    | 150    | 134     | 54           | -17.11    | Pass       |
| 2498.125      | 35.07    | 6          | -1.54 | 39.53        | Average.         | H    | 150    | 110     | 54           | -14.48    | Pass       |
| 5235.938      | 58.3     | 8.7        | -2.8  | 64.2         | Average.         | H    | 114    | 42      | --           | --        | --         |

|           |       |      |       |       |          |   |     |     |    |       |      |
|-----------|-------|------|-------|-------|----------|---|-----|-----|----|-------|------|
| 5247.125  | 69.9  | 8.7  | -2.8  | 75.7  | Average. | V | 192 | 353 | -- | --    | --   |
| 6429.375  | 36.46 | 9.7  | -1.92 | 44.24 | Average. | V | 200 | 342 | 54 | -9.76 | Pass |
| 10458.174 | 25.8  | 12.8 | 4.5   | 43.1  | Average. | V | 190 | 353 | 54 | -10.9 | Pass |
| 10458.53  | 26.2  | 12.8 | 4.5   | 43.5  | Average. | H | 113 | 42  | 54 | -10.5 | Pass |
| 15688.609 | 27.5  | 16.2 | 4.4   | 48.1  | Average. | V | 190 | 353 | 54 | -5.9  | Pass |
| 15688.865 | 28.6  | 16.2 | 4.4   | 49.2  | Average. | H | 113 | 42  | 54 | -4.8  | Pass |

### B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz)

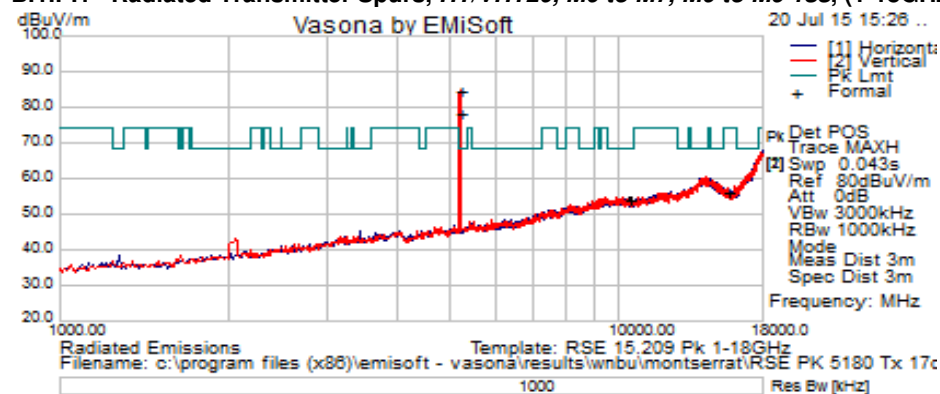


**B.1.A.9 Radiated Transmitter Spurs, All rate, All modes, Average (26.5- 40GHz)**

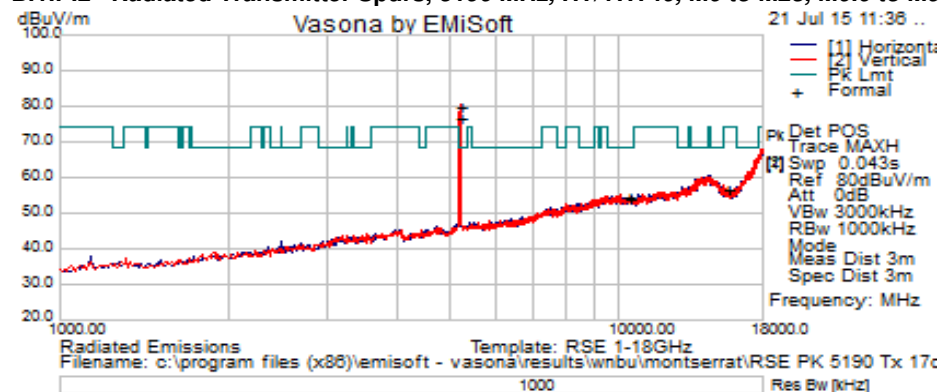
**B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case**

| Frequency (MHz) | Mode                             | Data Rate (Mbps) | Spurious Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (MHz) |
|-----------------|----------------------------------|------------------|----------------------------------|----------------|--------------|
| 5180            | HT/VHT20, M0 to M7, M0 to M9 1ss | m0               | 56.5                             | 74             | 17.5         |
| 5190            | HT/VHT40, M0 to M7, M0 to M9 1ss | m0               | 56.6                             | 74             | 17.4         |
| 5210            | HT/VHT80, M0 to M7, M0 to M9 1ss | m0x1             | 57.0                             | 74             | 17.0         |
| 5230            | HT/VHT40, M0 to M7, M0 to M9 1ss | m0               | 55.9                             | 74             | 18.1         |
| 5240            | HT/VHT20, M0 to M7, M0 to M9 1ss | m0               | 55.9                             | 74             | 18.1         |

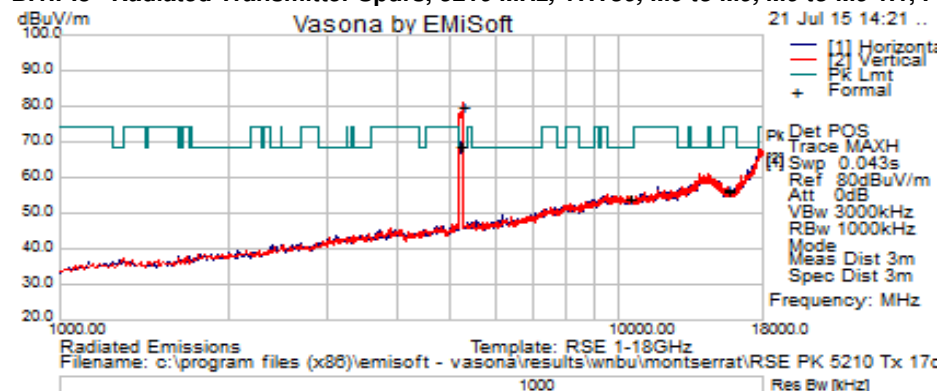


**B.1.P.1 Radiated Transmitter Spurs, HT/VHT20, M0 to M7, M0 to M9 1ss, (1-18GHz)**

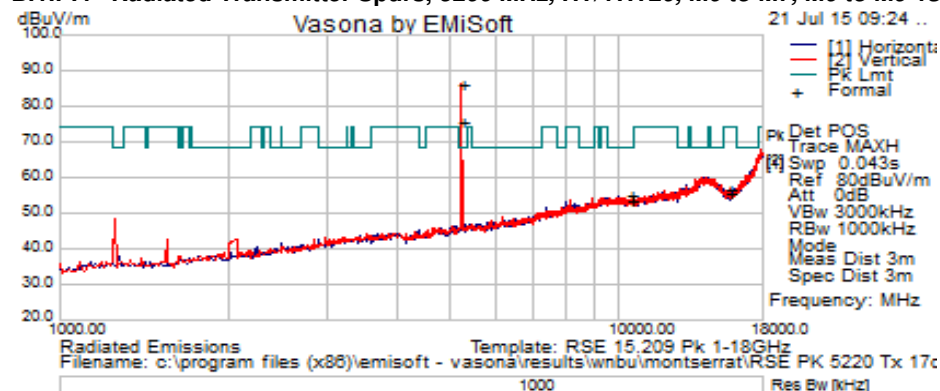
| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5186.25       | 79.8     | 8.6        | -3.6  | 84.9         | Peak.            | V    | 223    | 20      | --           | --        | --         |
| 5187.5        | 73.1     | 8.7        | -3.6  | 78.2         | Peak.            | H    | 114    | 90      | --           | --        | --         |
| 10360.055     | 36.58    | 12.7       | 4.99  | 54.27        | Peak.            | H    | 113    | 90      | 68.2         | -13.93    | Pass       |
| 15540.476     | 38.08    | 16.15      | 2.22  | 56.45        | Peak.            | H    | 113    | 90      | 74           | -17.55    | Pass       |
| 10359.208     | 36.47    | 12.7       | 4.99  | 54.16        | Peak.            | V    | 221    | 20      | 68.2         | -14.04    | Pass       |
| 15539.828     | 37.85    | 16.15      | 2.22  | 56.22        | Peak.            | V    | 221    | 20      | 74           | -17.78    | Pass       |

**B.1.P.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)**

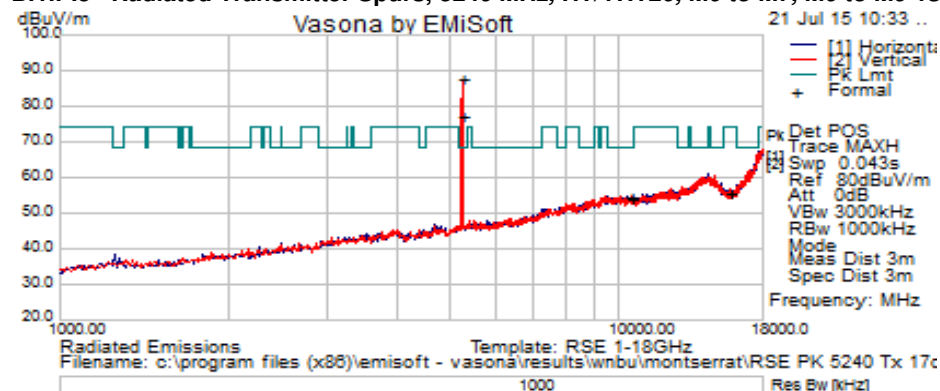
| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5183.375      | 71.8     | 8.6        | -3.6  | 76.9         | Peak.            | H    | 122    | 245     | --           | --        | --         |
| 5196.875      | 74.9     | 8.7        | -3.5  | 80           | Peak.            | V    | 170    | 356     | --           | --        | --         |
| 10379.902     | 36.37    | 12.71      | 4.99  | 54.07        | Peak.            | H    | 122    | 245     | 68.2         | -14.13    | Pass       |
| 10380.648     | 36.73    | 12.71      | 4.99  | 54.42        | Peak.            | V    | 169    | 356     | 68.2         | -13.78    | Pass       |
| 15568.798     | 38.42    | 16.12      | 1.99  | 56.53        | Peak.            | V    | 169    | 356     | 74           | -17.47    | Pass       |
| 15569.084     | 38.36    | 16.12      | 1.99  | 56.47        | Peak.            | H    | 122    | 245     | 74           | -17.53    | Pass       |

**B.1.P.3 Radiated Transmitter Spurs, 5210 MHz, VHT80, M0 to M9, M0 to M9 1.1, Peak (1-18GHz)**

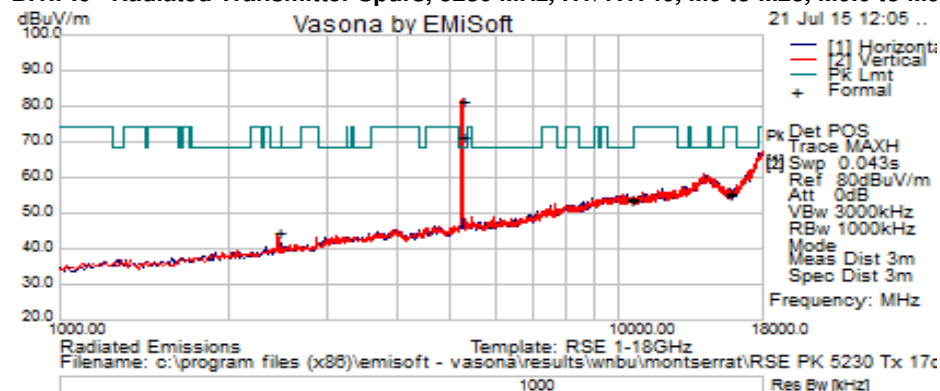
| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5182.875      | 63.9     | 8.6        | -3.6  | 69           | Peak.            | H    | 125    | 48      | --           | --        | --         |
| 5245          | 74.6     | 8.7        | -3.4  | 79.9         | Peak.            | V    | 180    | 352     | --           | --        | --         |
| 10416.848     | 36.5     | 12.72      | 5     | 54.22        | Peak.            | V    | 179    | 352     | 68.2         | -13.98    | Pass       |
| 10418.213     | 36.41    | 12.72      | 5.01  | 54.15        | Peak.            | H    | 125    | 48      | 68.2         | -14.05    | Pass       |
| 15627.568     | 38.84    | 16.24      | 1.87  | 56.96        | Peak.            | V    | 179    | 352     | 74           | -17.04    | Pass       |
| 15629.387     | 38.19    | 16.25      | 1.88  | 56.32        | Peak.            | H    | 125    | 48      | 74           | -17.68    | Pass       |

**B.1.P.4 Radiated Transmitter Spurs, 5200 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Peak (1-18GHz)**

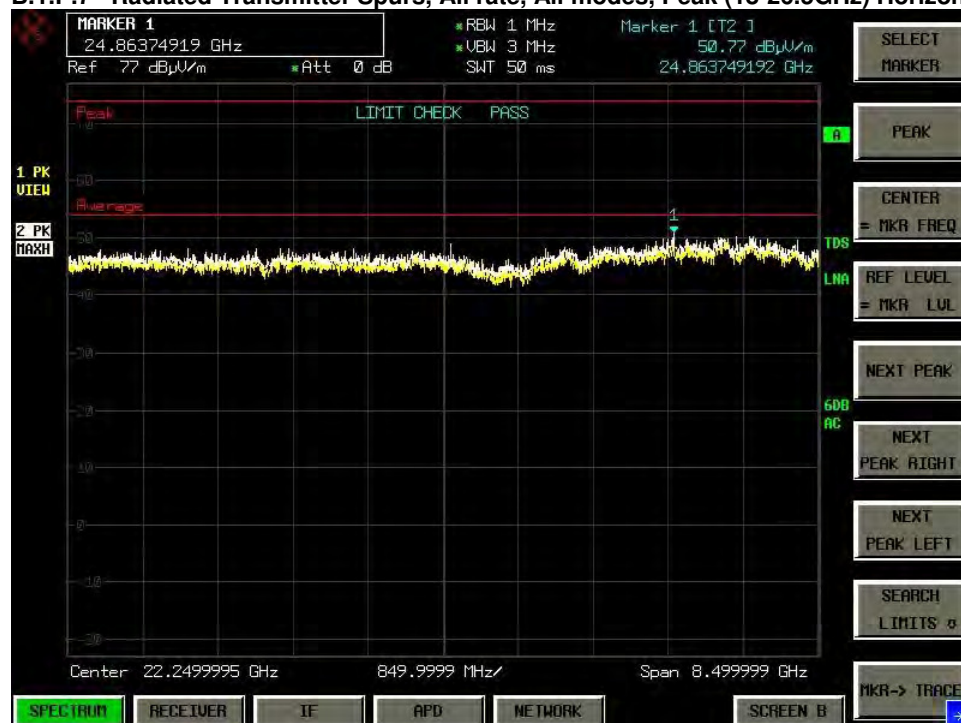
| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5218.125      | 80.83    | 8.67       | -3.43 | 86.07        | Peak.            | V    | 184    | 358     | --           | --        | --         |
| 5227.063      | 70.4     | 8.7        | -3.4  | 75.7         | Peak.            | H    | 105    | 134     | --           | --        | --         |
| 10439.045     | 35.7     | 12.75      | 5.25  | 53.7         | Peak.            | V    | 183    | 358     | 68.2         | -14.5     | Pass       |
| 10439.709     | 36.96    | 12.75      | 5.25  | 54.96        | Peak.            | H    | 107    | 134     | 68.2         | -13.24    | Pass       |
| 15659.47      | 37.68    | 16.25      | 1.64  | 55.57        | Peak.            | V    | 183    | 358     | 74           | -18.43    | Pass       |
| 15659.826     | 38.6     | 16.25      | 1.64  | 56.49        | Peak.            | H    | 107    | 134     | 74           | -17.51    | Pass       |

**B.1.P.5 Radiated Transmitter Spurs, 5240 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Peak (1-18GHz)**

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5239.375      | 82.67    | 8.68       | -3.4  | 87.95        | Peak.            | V    | 175    | 358     | --           | --        | --         |
| 5247.188      | 72.2     | 8.7        | -3.4  | 77.5         | Peak.            | H    | 109    | 87      | --           | --        | --         |
| 10479.976     | 36.37    | 12.78      | 5.26  | 54.41        | Peak.            | H    | 109    | 87      | 68.2         | -13.79    | Pass       |
| 15721.504     | 37.78    | 16.3       | 1.8   | 55.88        | Peak.            | H    | 109    | 87      | 74           | -18.12    | Pass       |
| 10480.782     | 35.86    | 12.78      | 5.25  | 53.89        | Peak.            | V    | 173    | 358     | 68.2         | -14.31    | Pass       |
| 15720.892     | 37.5     | 16.3       | 1.8   | 55.6         | Peak.            | V    | 173    | 358     | 74           | -18.4     | Pass       |

**B.1.P.6 Radiated Transmitter Spurs, 5230 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)**

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | P ol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 5247.125      | 76.52    | 8.68       | -3.41 | 81.79        | Peak.            | V    | 192    | 360     | --           | --        | --         |
| 5235.938      | 66       | 8.7        | -3.4  | 71.3         | Peak.            | H    | 114    | 42      | --           | --        | --         |
| 10459.188     | 35.28    | 12.76      | 5.31  | 53.34        | Peak.            | H    | 114    | 42      | 68.2         | -14.86    | Pass       |
| 15690.372     | 38.03    | 16.2       | 1.61  | 55.84        | Peak.            | H    | 114    | 42      | 74           | -18.16    | Pass       |
| 10460.108     | 36.16    | 12.76      | 5.31  | 54.22        | Peak.            | V    | 192    | 360     | 68.2         | -13.98    | Pass       |
| 15690.429     | 37.12    | 16.2       | 1.61  | 54.93        | Peak.            | V    | 192    | 360     | 74           | -19.07    | Pass       |
| 2457.583      | 44.2     | 6          | -5.4  | 44.7         | Peak.            | V    | 192    | 360     | 68.2         | -23.5     | Pass       |

**B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical****B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical**

## B.2 Radiated Emissions 30MHz to 1GHz

**FCC 15.209 / 15.205 / 15.407** Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Ref.** ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

|                       |                               |
|-----------------------|-------------------------------|
| Span:                 | 30MHz – 1GHz                  |
| Reference Level:      | 80 dBuV                       |
| Attenuation:          | 10 dB                         |
| Sweep Time:           | Coupled                       |
| Resolution Bandwidth: | 100kHz                        |
| Video Bandwidth:      | 300kHz                        |
| Detector:             | Peak for Pre-scan, Quasi-Peak |

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

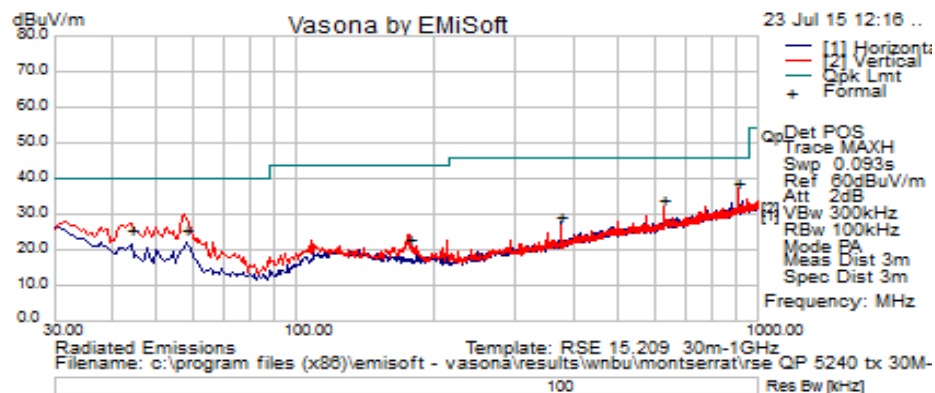
Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 2             | EUT         | S03     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S04     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                    |                                                  |
|------------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Jose Aguirre | <b>Date of testing:</b><br>07-Jul-15 - 08-Aug-15 |
| <b>Test Result : PASS</b>          |                                                  |

See Appendix C for list of test equipment



| Frequency<br>MHz | Raw<br>dBuV | Cable<br>Loss | AF<br>dB | Level<br>dBuV/m | Measurement<br>Type | P<br>ol | Hgt<br>cm | Azt<br>Deg | Limit<br>dBuV/m | Margin<br>dB | Pass<br>/Fail |
|------------------|-------------|---------------|----------|-----------------|---------------------|---------|-----------|------------|-----------------|--------------|---------------|
| 907.24375        | 12.67       | 3.54          | 22.4     | 38.61           | Quasi Max           | V       | 130       | 256        | 46              | -7.39        | Pass          |
| 57.506           | 17.32       | 0.8           | 7.35     | 25.46           | Quasi Max           | V       | 132       | 142        | 40              | -14.54       | Pass          |
| 43.826           | 14.18       | 0.66          | 10.99    | 25.83           | Quasi Max           | V       | 114       | 246        | 40              | -14.18       | Pass          |
| 625.025          | 11.7        | 2.86          | 19.4     | 33.97           | Quasi Max           | V       | 108       | 197        | 46              | -12.03       | Pass          |
| 375.035          | 12.29       | 2.19          | 15.1     | 29.58           | Quasi Max           | H       | 112       | 115        | 46              | -16.42       | Pass          |
| 174.981          | 10.25       | 1.43          | 11.5     | 23.19           | Quasi Max           | V       | 115       | 254        | 43.5            | -20.31       | Pass          |

## B.3 AC Conducted Emissions

**FCC 15.207** Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

### Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

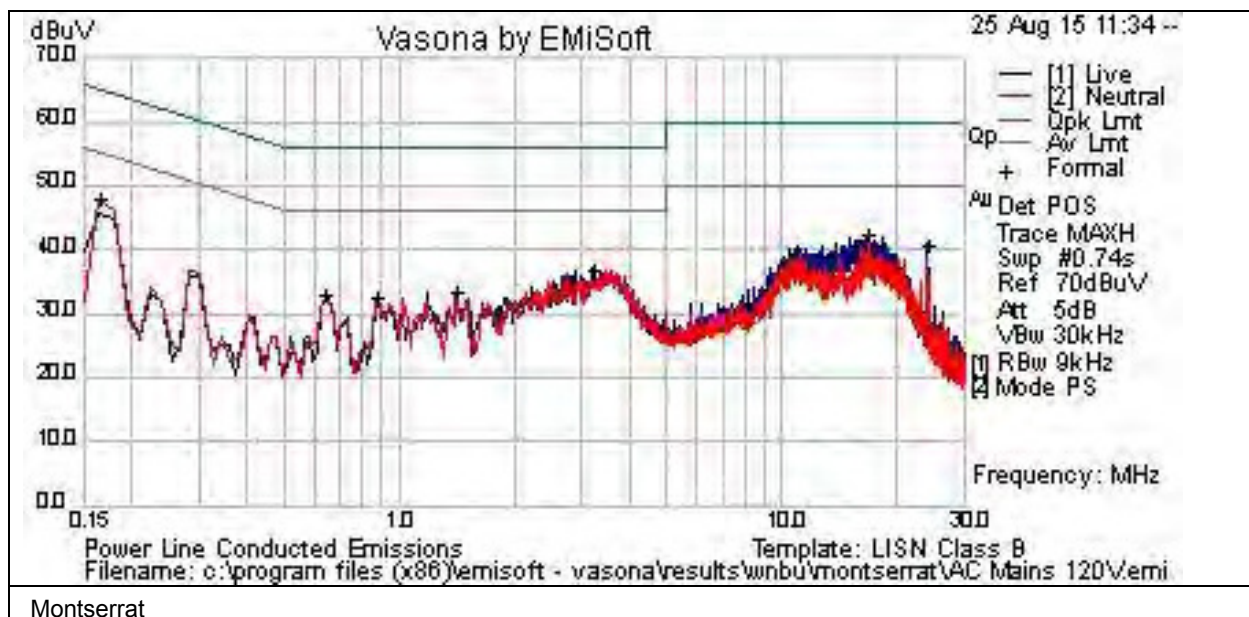
|                       |                      |
|-----------------------|----------------------|
| Span:                 | 150 KHz – 30 MHz     |
| Attenuation:          | 10 dB                |
| Sweep Time:           | Coupled              |
| Resolution Bandwidth: | 9 KHz                |
| Video Bandwidth:      | 30 KHz               |
| Detector:             | Quasi-Peak / Average |

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 2             | EUT         | S03     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S04     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                    |                                                  |
|------------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Jose Aguirre | <b>Date of testing:</b><br>07-Jul-15 - 08-Aug-15 |
| <b>Test Result : PASS</b>          |                                                  |

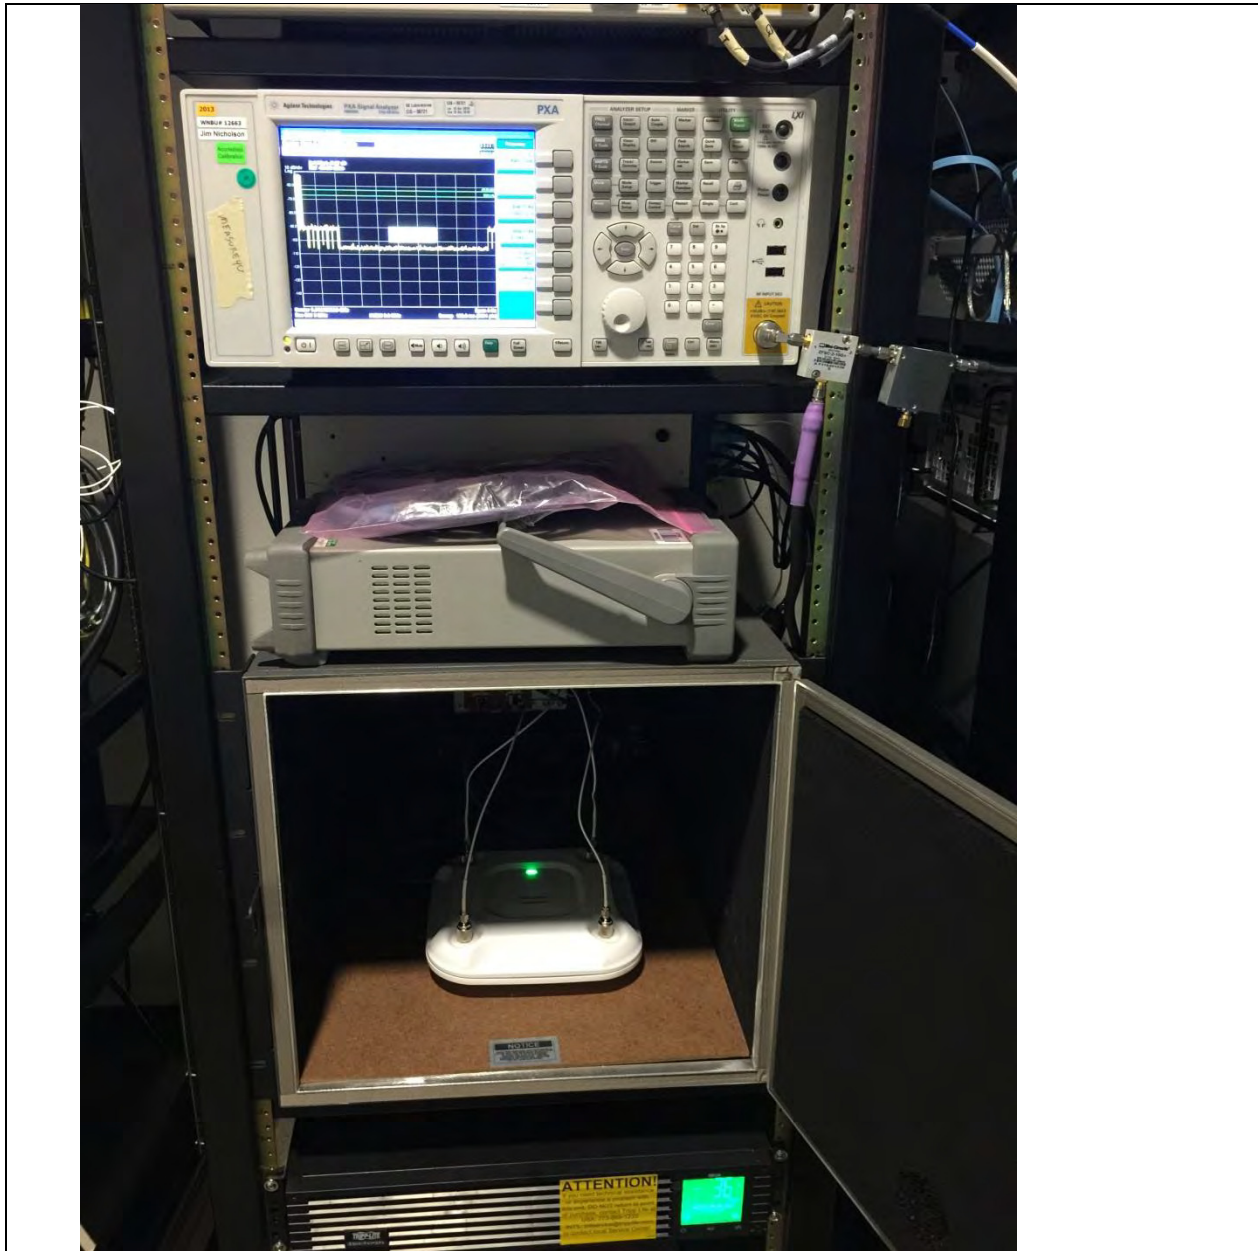
See Appendix C for list of test equipment





Test Results Table

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|------------|------------|------------------|------|------------|-----------|------------|----------|
| 0.164925      | 26.9     | 21         | 0.1        | 48         | Peak             | L    | 55.2       | -7.2      | Pass       |          |
| 16.896        | 22       | 20.3       | 0.1        | 42.4       | Peak             | L    | 50         | -7.6      | Pass       |          |
| 3.21          | 17       | 20         | 0          | 37.1       | Peak             | L    | 46         | -8.9      | Pass       |          |
| 24.015        | 19.8     | 20.9       | 0.2        | 40.9       | Peak             | L    | 50         | -9.1      | Pass       |          |
| 1.419         | 13.3     | 20         | 0          | 33.3       | Peak             | L    | 46         | -12.7     | Pass       |          |
| 0.881325      | 12.8     | 20         | 0          | 32.8       | Peak             | L    | 46         | -13.2     | Pass       |          |
| 0.164925      | 26.9     | 21         | 0          | 48         | Peak             | N    | 55.2       | -7.2      | Pass       |          |
| 16.896        | 22.1     | 20.3       | 0.1        | 42.4       | Peak             | N    | 50         | -7.6      | Pass       |          |
| 3.21          | 17.1     | 20         | 0          | 37.1       | Peak             | N    | 46         | -8.9      | Pass       |          |
| 24.015        | 19.8     | 20.9       | 0.2        | 40.9       | Peak             | N    | 50         | -9.1      | Pass       |          |
| 1.419         | 13.3     | 20         | 0          | 33.3       | Peak             | N    | 46         | -12.7     | Pass       |          |
| 0.642525      | 12.8     | 20         | 0          | 32.8       | Peak             | N    | 46         | -13.2     | Pass       |          |
| 0.881325      | 12.8     | 20         | 0          | 32.8       | Peak             | N    | 46         | -13.2     | Pass       |          |

**Photographs of setup****Title: RF Conducted Test Setup**

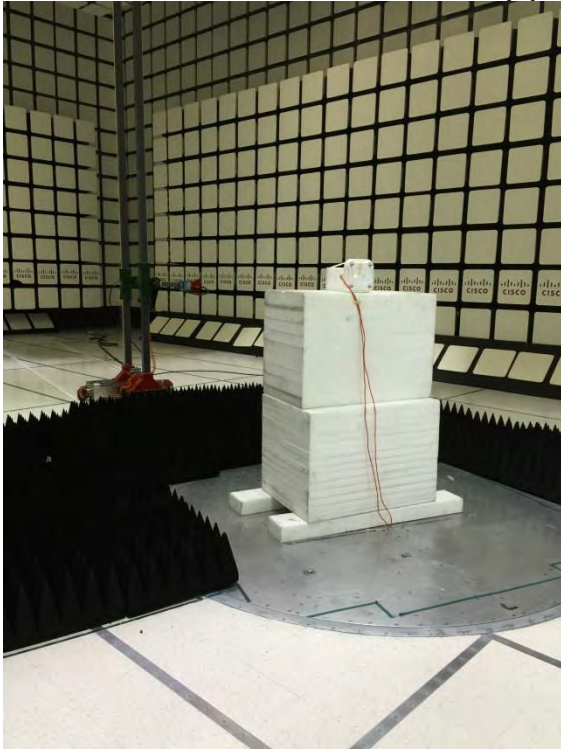
This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

AIR-CAP3702P-B-K9 Radiated Test setup photo 30MHz to 1GHz





**AIR-CAP3702P-B-K9 Radiated Test setup photo above 1GHz**



**AIR-CAP3702P-B-K9 AC Conducted Emissions setup photo**



## Appendix C: List of Test Equipment Used to perform the test

| Equip#                                                      | Manufacturer/ Model                                   | Description                                 | Last Cal         | Next Due    | Test Item  |
|-------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------|------------------|-------------|------------|
| <b>Test Equipment used for Radiated Emissions</b>           |                                                       |                                             |                  |             |            |
| CIS008447                                                   | Cisco / NSA 10m Chamber                               | NSA 10m Chamber                             | 14-Oct-14        | 14-Oct-15   | B.2        |
| CIS030652                                                   | Sunol Sciences / JB1                                  | Combination Antenna, 30MHz-2GHz             | 5-Nov-14         | 5-Nov-15    | B.2        |
| CIS033988                                                   | Agilent /E4446A                                       | PSA Spectrum Analyzer                       | 9-Dec-14         | 9-Dec-15    | B.1        |
| CIS044940                                                   | ROHDE & SCHWARZ / ESU40                               | EMI RECEIVER, 40GHZ                         | 27-May-15        | 27-May-16   | B.1        |
| CIS041929                                                   | Newport /iBTHP-5-DB9                                  | 5 inch Temp/RH/Press Sensor w/20ft cable    | 20-Dec-14        | 20-Dec-15   | B.1, B.2   |
| CIS024998                                                   | MICRO-COAX / UFB197C-1-0240-504504                    | Coaxial RF Cable, 26.5 GHz                  | 11-Mar-15        | 11-Mar-16   | B.1, B.2   |
| CIS035284                                                   | ETS Lindgren / 3117                                   | Double Ridged Horn Antenna                  | 16-Sep-14        | 16-Sep-15   | B.1        |
| CIS049516                                                   | Keysight / N9030A                                     | PXA Spectrum Analyzer                       | 12-Nov-14        | 12-Nov-15   | B.1, B.2   |
| CIS043124                                                   | Cisco /Above 1GHz Site Cal                            | Above 1GHz Cspr Site Verification           | 15-Jan-15        | 15-Jan-16   | B.1        |
| CIS008166                                                   | HP / 8491B Opt 010                                    | 10dB Attenuator                             | 2-Feb-15         | 2-Feb-16    | B.1        |
| CIS020975                                                   | Micro-Coax / UFB311A-0-1344-520520                    | RF Coaxial Cable, to 18GHz, 134.4 in        | 18-Feb-15        | 18-Feb-16   | B.1, B.2   |
| CIS030559                                                   | Micro-Coax / UFB311A-1-0950-504504                    | RF Coaxial Cable, to 18GHz, 95 in           | 20-Feb-15        | 20-Feb-16   | B.1, B.2   |
| CIS003003                                                   | HP / 83731B                                           | Synthesized Signal Generator                | 13-Mar-15        | 13-Mar-16   | B.1        |
| CIS005691                                                   | Miteq / NSP1800-25-S1                                 | Broadband Preamplifier (1-18GHz)            | 25-Jun-15        | 25-Jun-16   | B.1        |
| CIS041979                                                   | Cisco / 1840                                          | 18-40GHz EMI Test Head/Verification Fixture | 13-Jul-15        | 13-Jul-16   | B.1        |
| CIS047410                                                   | Agilent / N9038A                                      | EMI Receiver                                | 17-Feb-15        | 17-Feb-16   | B.1, B.2   |
| CIS051642                                                   | Huber+Suhner / Sucoflex 106PA                         | RF N Type Cable 8.5m                        | 10-Feb-15        | 10-Feb-16   | B.1, B.2   |
| <b>Test Equipment used for AC Mains Conducted Emissions</b> |                                                       |                                             |                  |             |            |
| CIS008192                                                   | Fischer Custom Communications FCC-450B-2.4-N          | Instrumentation Limiter                     | 28-JUL-15        | 28-JUL-16   | B.3        |
| CIS008197                                                   | TTE /H613-150K-50-21378                               | Hi Pass Filter - 150KHz cutoff              | 16-APR-15        | 16-APR-16   | B.3        |
| CIS008471                                                   | Bird / 5-T-MB                                         | 50 Ohm, 5W Terminator, Type BNC             | 18-SEP-14        | 18-SEP-15   | B.3        |
| CIS019337                                                   | Fischer Custom Communications FCC-LISN-50/250-50-2-01 | LISN                                        | 08-SEP-14        | 08-SEP-15   | B.3        |
| CIS019136                                                   | Fischer Custom Communications FCC-801-M3-32A          | Power Line Coupling/Decoupling Network      | 12-NOV-14        | 12-NOV-15   | B.3        |
| CIS023874                                                   | Fischer Custom Communications FCC-LISN-PA-NEMA-5-15   | Power Adaptor, Polarized 120VAC             | 08-SEP-14        | 08-SEP-15   | B.3        |
| CIS035235                                                   | Lufkin / HY1035CME                                    | 5 Meter Tape Measure                        | Cal Not Required | N/A         | B.3        |
| CIS036031                                                   | York / CNE V                                          | Comparison Noise Emitter                    | Cal Not Required | N/A         | B.3        |
| CIS039110                                                   | Coleman /RG-223                                       | 25 ft BNC cable                             | 24-NOV-14        | 24-NOV-15   | B.3        |
| CIS045050                                                   | ROHDE & SCHWARZ/ ESCI                                 | EMI Test Receiver                           | 31-Oct-2014      | 31 Oct 2015 | B.3        |
|                                                             |                                                       |                                             |                  |             |            |
| <b>RF Conducted at output antenna port</b>                  |                                                       |                                             |                  |             |            |
| CIS050721                                                   | N9030A/ Keysight                                      | PXA Signal Analyzer                         | 13-Apr-16        | 13-Apr-16   | A1 thru A4 |
| CIS054609                                                   | ZFSC-2-10G /Mini-Circuits                             | Splitter                                    | 01-June-15       | 01-June-16  | A1 thru A4 |

|           |                             |                     |            |            |            |
|-----------|-----------------------------|---------------------|------------|------------|------------|
| CIS054608 | D3C2060 / Ditom             | Splitter            | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054607 | PS4-09-452/4S/ Pulsar       | Splitter            | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054606 | BRC50705-02/ Micro-Tronics  | Notch Filter        | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054605 | BRC50703-02 / Micro-Tronics | Notch Filter        | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054604 | BRC50704-02/ Micro-Tronics  | Notch Filter        | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054603 | BRM50702-02/ Micro-Tronics  | Notch Filter        | 01-June-15 | 01-June-16 | A1 thru A4 |
| CIS054637 | BWS30-W2/ Aeroflex          | SMA 30dB Attenuator | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054636 | BWS20-W2/ Aeroflex          | 20dB SMA Attenuator | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054625 | RA08-S1S1-24/Megaphase      | SMA cable 24"       | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054624 | RA08-S1S1-18/Megaphase      | SMA cable 18"       | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054623 | RA08-S1S1-18/Megaphase      | SMA cable 18"       | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054622 | RA08-S1S1-18/Megaphase      | SMA cable 18"       | 02-June-15 | 02-June-16 | A1 thru A4 |
| CIS054621 | RA08-S1S1-18/Megaphase      | SMA cable 18"       | 02-June-15 | 02-June-16 | A1 thru A4 |

**Appendix E: Abbreviation Key and Definitions**

The following table defines abbreviations used within this test report.

| Abbreviation | Description                                                          | Abbreviation | Description                         |
|--------------|----------------------------------------------------------------------|--------------|-------------------------------------|
| EMC          | Electro Magnetic Compatibility                                       | °F           | Degrees Fahrenheit                  |
| EMI          | Electro Magnetic Interference                                        | °C           | Degrees Celsius                     |
| EUT          | Equipment Under Test                                                 | Temp         | Temperature                         |
| ITE          | Information Technology Equipment                                     | S/N          | Serial Number                       |
| TAP          | Test Assessment Schedule                                             | Qty          | Quantity                            |
| ESD          | Electro Static Discharge                                             | emf          | Electromotive force                 |
| EFT          | Electric Fast Transient                                              | RMS          | Root mean square                    |
| EDCS         | Engineering Document Control System                                  | Qp           | Quasi Peak                          |
| Config       | Configuration                                                        | Av           | Average                             |
| CIS#         | Cisco Number (unique identification number for Cisco test equipment) | Pk           | Peak                                |
| Cal          | Calibration                                                          | kHz          | Kilohertz ( $1 \times 10^3$ )       |
| EN           | European Norm                                                        | MHz          | MegaHertz ( $1 \times 10^6$ )       |
| IEC          | International Electro technical Commission                           | GHz          | Gigahertz ( $1 \times 10^9$ )       |
| CISPR        | International Special Committee on Radio Interference                | H            | Horizontal                          |
| CDN          | Coupling/Decoupling Network                                          | V            | Vertical                            |
| LISN         | Line Impedance Stabilization Network                                 | dB           | decibel                             |
| PE           | Protective Earth                                                     | V            | Volt                                |
| GND          | Ground                                                               | kV           | Kilovolt ( $1 \times 10^3$ )        |
| L1           | Line 1                                                               | $\mu$ V      | Microvolt ( $1 \times 10^{-6}$ )    |
| L2           | Line2                                                                | A            | Amp                                 |
| L3           | Line 3                                                               | $\mu$ A      | Micro Amp ( $1 \times 10^{-6}$ )    |
| DC           | Direct Current                                                       | mS           | Milli Second ( $1 \times 10^{-3}$ ) |
| RAW          | Uncorrected measurement value, as indicated by the measuring device  | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| RF           | Radio Frequency                                                      | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| SLCE         | Signal Line Conducted Emissions                                      | m            | Meter                               |
| Meas dist    | Measurement distance                                                 | Spec dist    | Specification distance              |
| N/A or NA    | Not Applicable                                                       | SL           | Signal Line (or Telecom Line)       |
| P            | Power Line                                                           | L            | Live Line                           |
| N            | Neutral Line                                                         | R            | Return                              |
| S            | Supply                                                               | AC           | Alternating Current                 |



**End**