


Test Mode: TX AX-20M Mode 2462 MHz

Horizontal

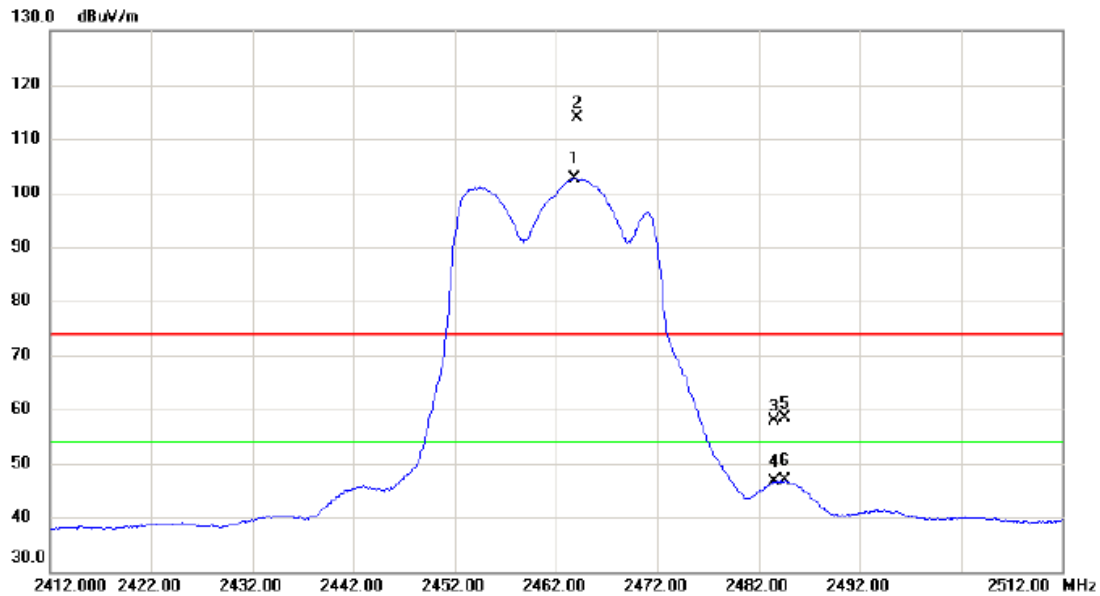

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2463.800	94.76	7.81	102.57	54.00	48.57	AVG	No Limit
2	X	2464.100	106.08	7.81	113.89	74.00	39.89	peak	No Limit
3		2483.500	49.98	7.87	57.85	74.00	-16.15	peak	
4		2483.500	38.70	7.87	46.57	54.00	-7.43	AVG	
5		2484.650	50.48	7.88	58.36	74.00	-15.64	peak	
6		2484.650	38.95	7.88	46.83	54.00	-7.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-20M Mode 2462 MHz
------------	-------------------------

Horizontal

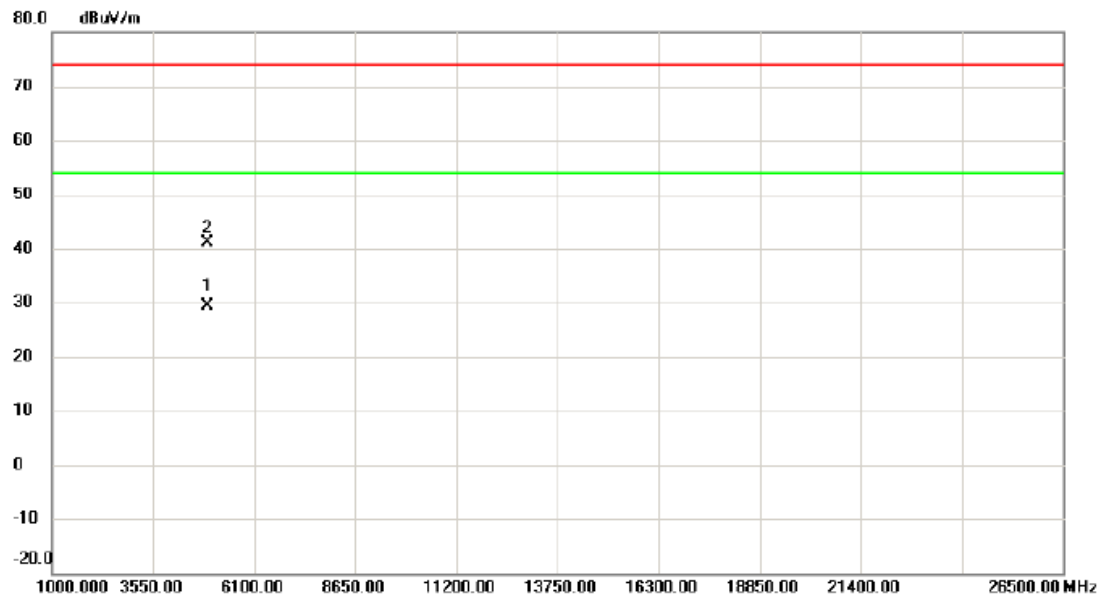


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4919.050	24.80	4.61	29.41	54.00	-24.59	AVG	
2		4936.375	36.51	4.67	41.18	74.00	-32.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz

Vertical

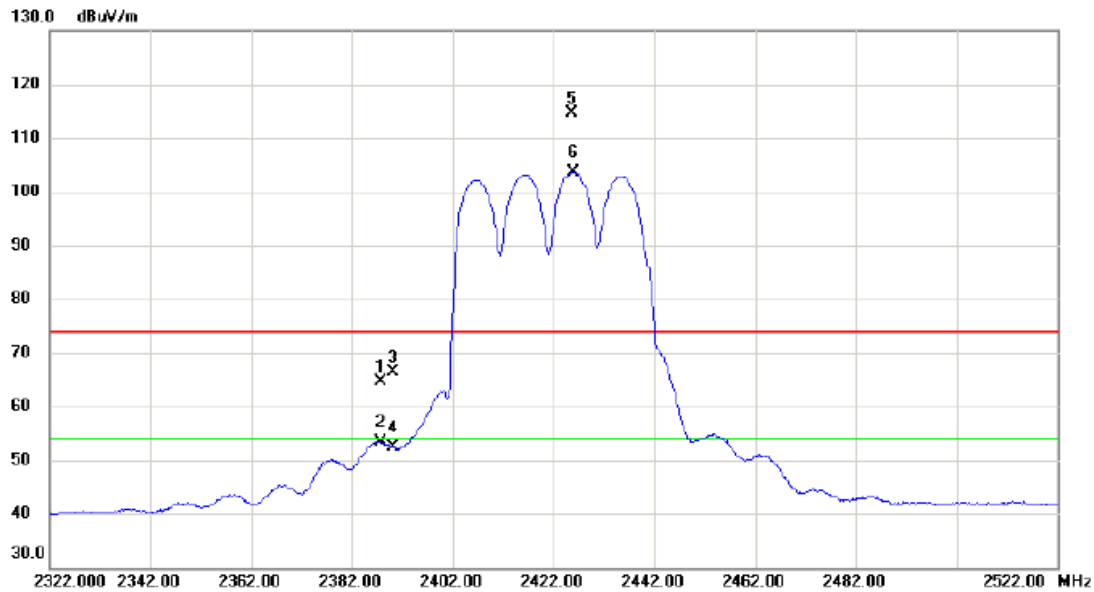

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2387.700	57.19	7.56	64.75	74.00	-9.25	peak	
2		2387.700	45.93	7.56	53.49	54.00	-0.51	AVG	
3		2390.000	58.84	7.57	66.41	74.00	-7.59	peak	
4		2390.000	44.74	7.57	52.31	54.00	-1.69	AVG	
5	X	2425.500	107.02	7.69	114.71	74.00	40.71	peak	No Limit
6	*	2425.900	96.04	7.69	103.73	54.00	49.73	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz

Vertical

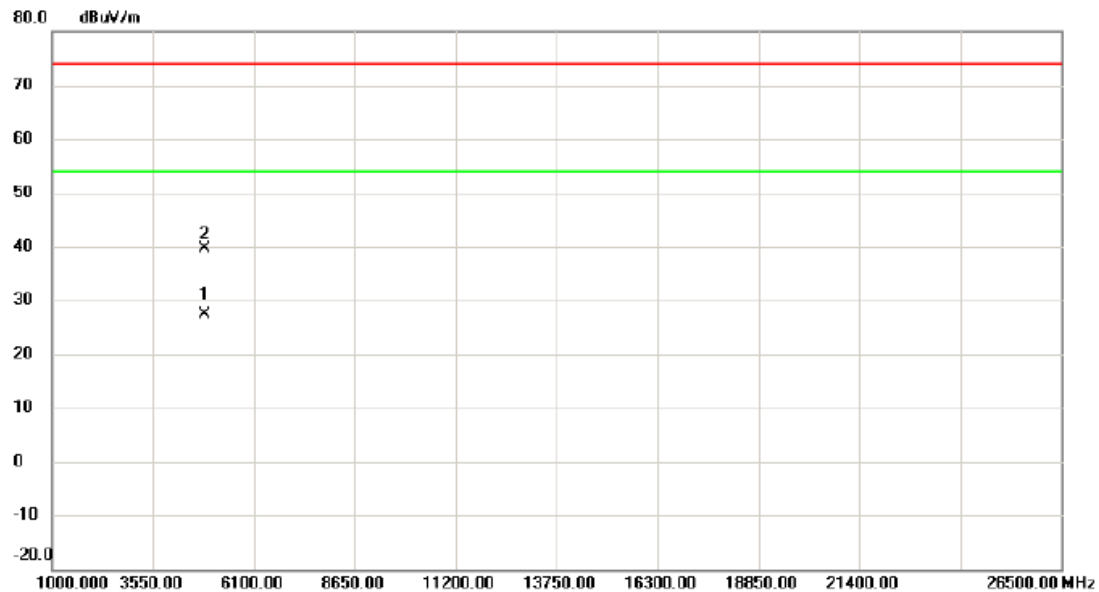


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4843.054	22.94	4.32	27.26	54.00	-26.74	AVG	
2		4843.896	35.35	4.32	39.67	74.00	-34.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422MHz

Horizontal

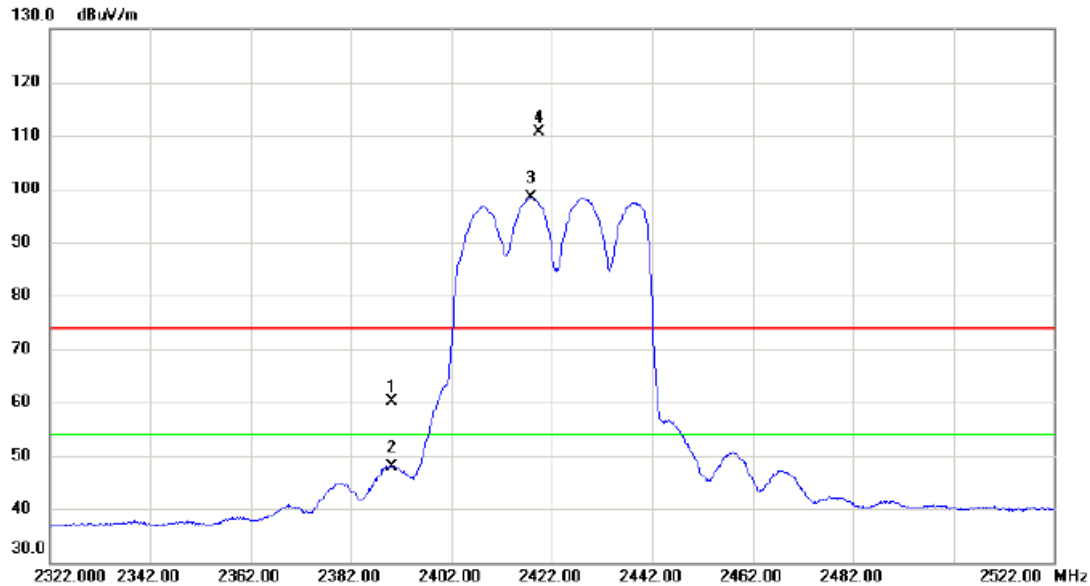


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.53	7.57	60.10	74.00	-13.90	peak	
2		2390.000	40.25	7.57	47.82	54.00	-6.18	AVG	
3	*	2417.800	90.74	7.66	98.40	54.00	44.40	AVG	No Limit
4	X	2419.400	102.94	7.66	110.60	74.00	36.60	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2422MHz
------------	------------------------

Horizontal

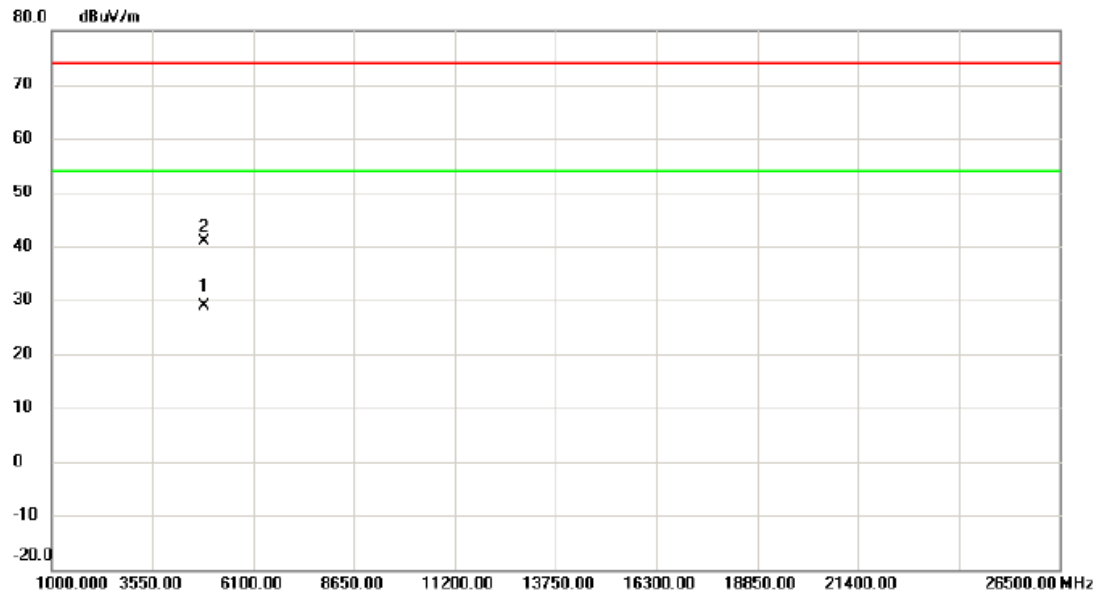


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4843.123	24.66	4.32	28.98	54.00	-25.02	AVG	
2		4843.145	36.47	4.32	40.79	74.00	-33.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

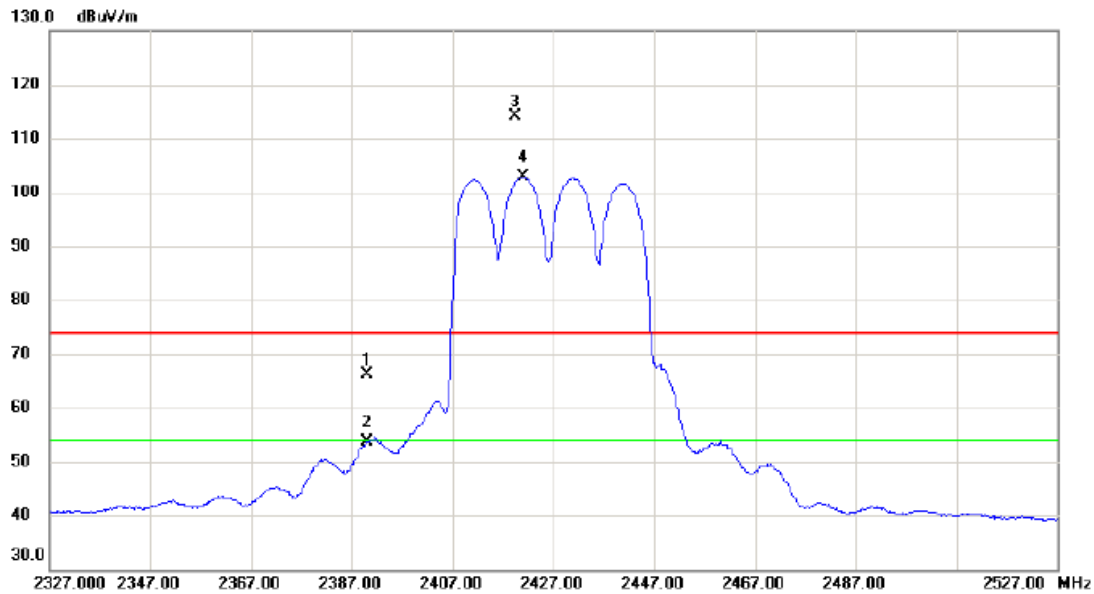

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.53	7.57	66.10	74.00	-7.90	peak	
2		2390.000	46.07	7.57	53.64	54.00	-0.36	AVG	
3	X	2419.500	106.53	7.66	114.19	74.00	40.19	peak	No Limit
4	*	2420.900	95.23	7.67	102.90	54.00	48.90	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

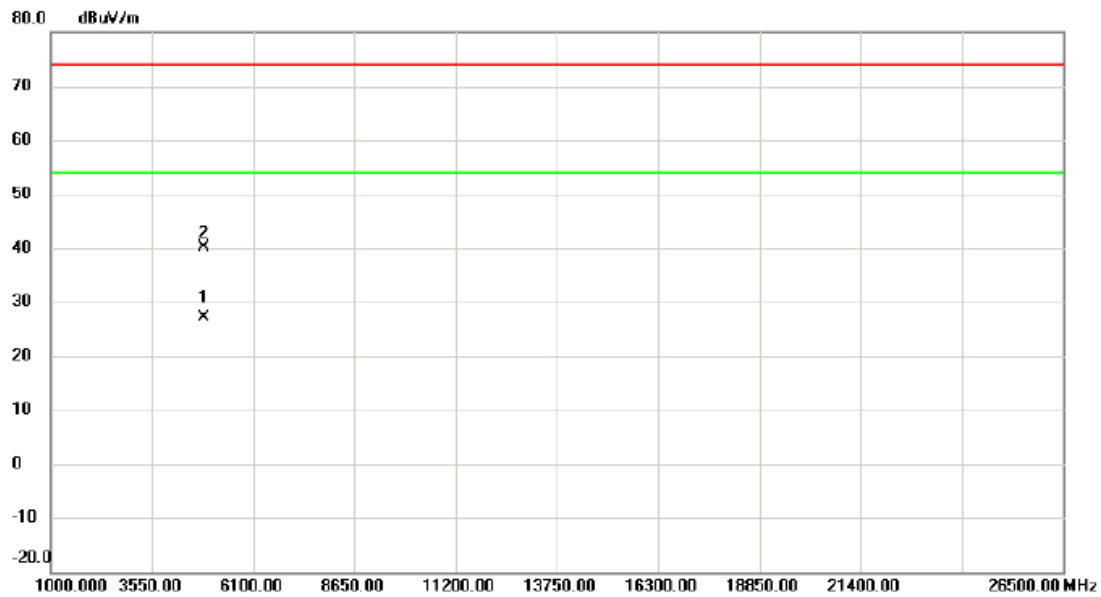


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4853.539	22.88	4.37	27.25	54.00	-26.75	AVG	
2		4853.882	35.66	4.37	40.03	74.00	-33.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Horizontal

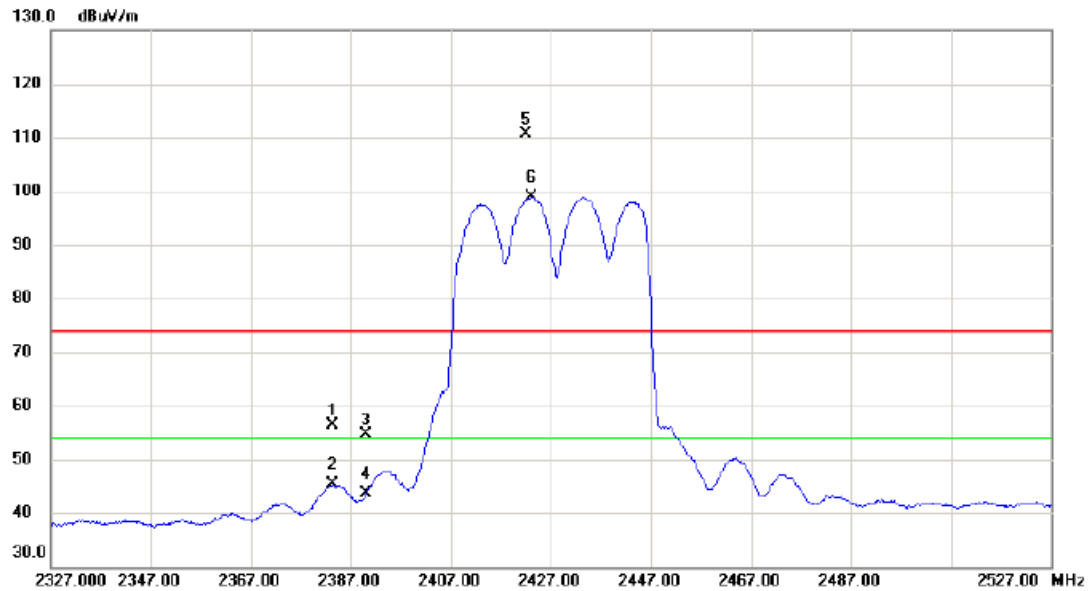


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
1		2383.500	48.85	7.54	56.39	74.00	-17.61	peak	
2		2383.500	37.75	7.54	45.29	54.00	-8.71	AVG	
3		2390.000	46.98	7.57	54.55	74.00	-19.45	peak	
4		2390.000	36.08	7.57	43.65	54.00	-10.35	AVG	
5	X	2422.000	102.87	7.67	110.54	74.00	36.54	peak	No Limit
6	*	2423.100	91.21	7.67	98.88	54.00	44.88	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2427 MHz
------------	-------------------------

Horizontal

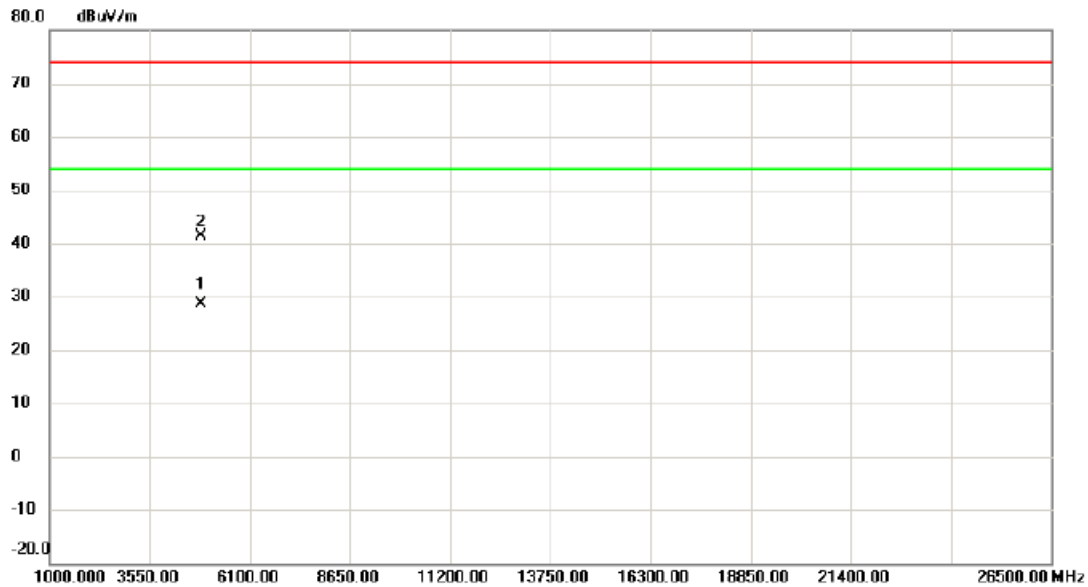


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4853.908	24.33	4.37	28.70	54.00	-25.30	AVG	
2		4854.901	36.94	4.37	41.31	74.00	-32.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Vertical

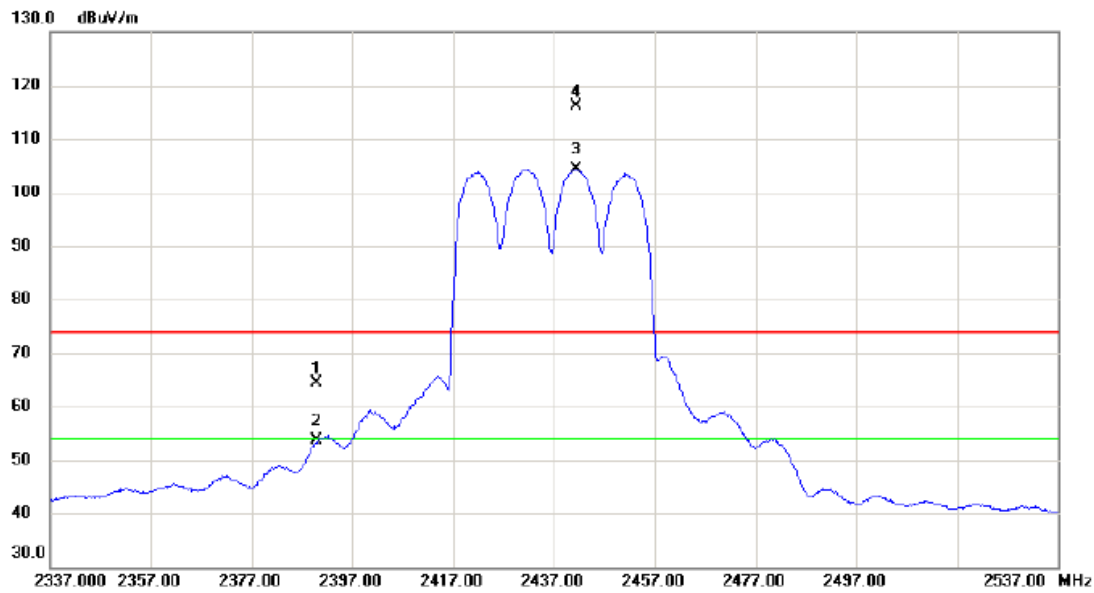

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	56.81	7.57	64.38	74.00	-9.62	peak	
2		2390.000	46.10	7.57	53.67	54.00	-0.33	AVG	
3	*	2441.300	96.72	7.74	104.46	54.00	50.46	AVG	No Limit
4	X	2441.400	108.51	7.74	116.25	74.00	42.25	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Vertical

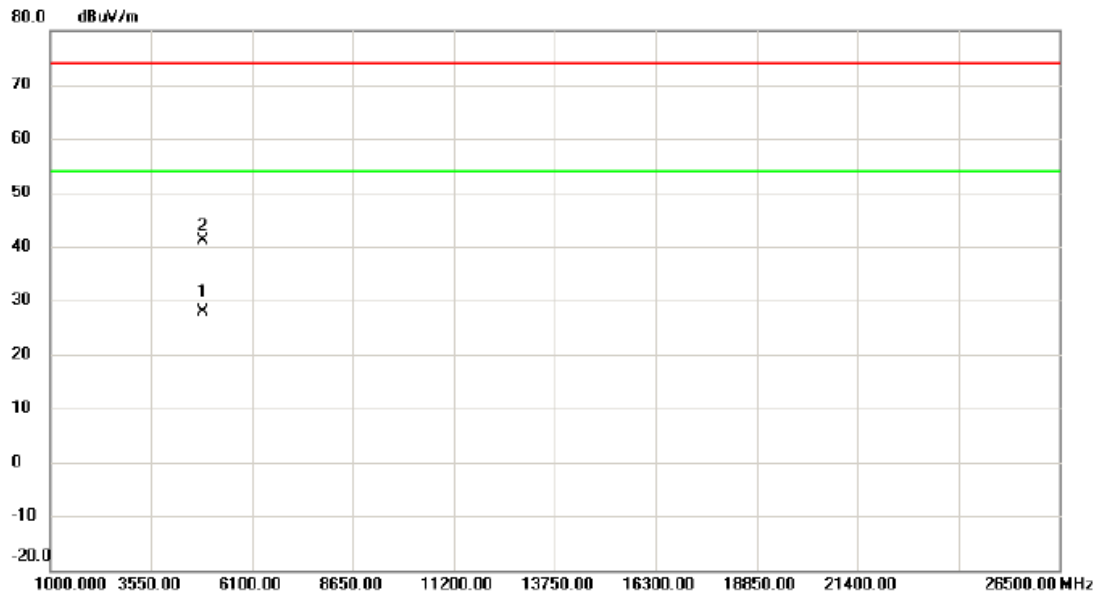


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4873.138	23.36	4.44	27.80	54.00	-26.20	AVG	
2		4873.320	36.62	4.44	41.06	74.00	-32.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

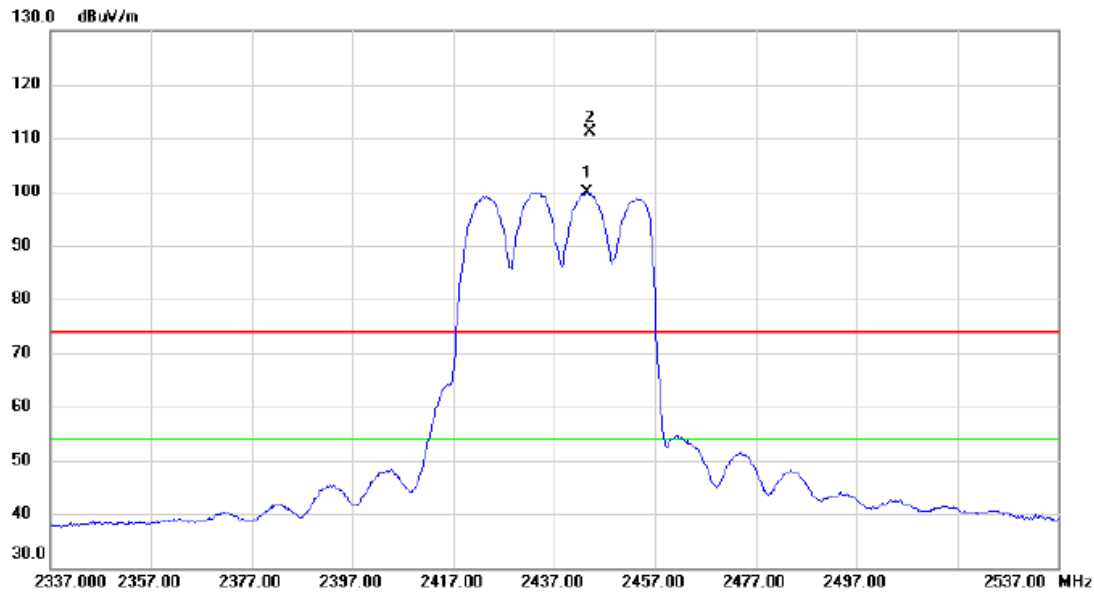


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2443.400	92.15	7.75	99.90	54.00	45.90	AVG	No Limit
2	X	2444.200	103.41	7.75	111.16	74.00	37.16	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

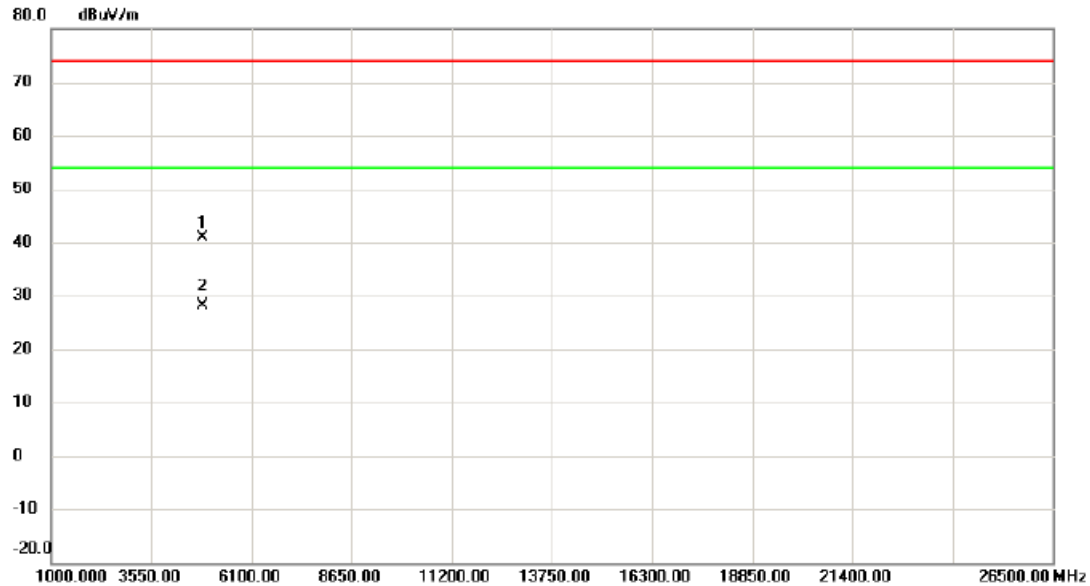


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4873.089	36.36	4.44	40.80	74.00	-33.20	peak	
2	*	4873.344	23.79	4.44	28.23	54.00	-25.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Vertical

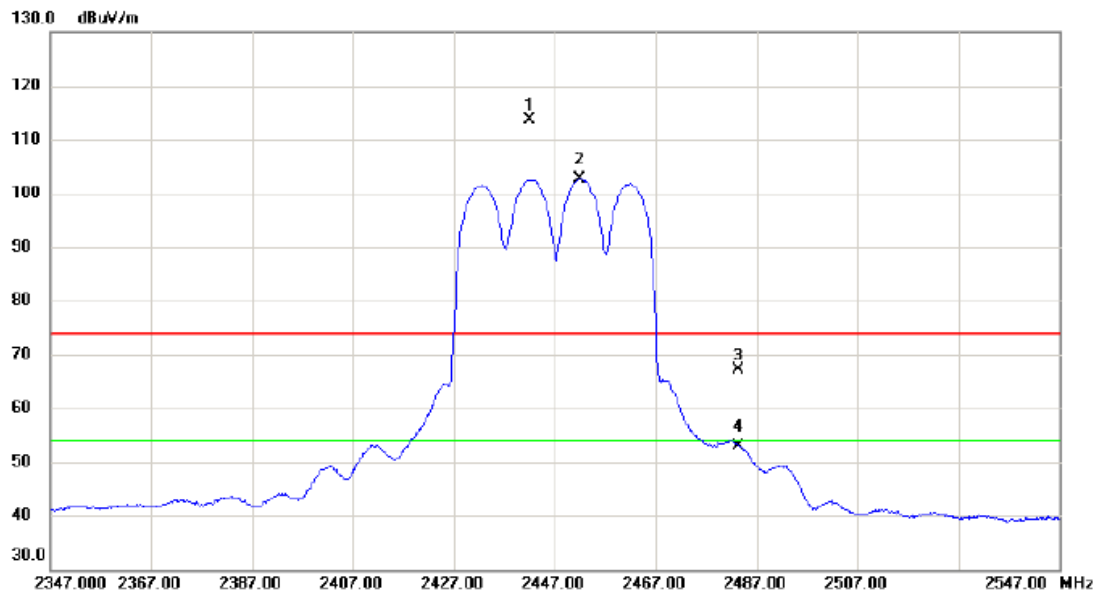


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2442.000	105.80	7.74	113.54	74.00	39.54	peak	No Limit
2	*	2451.800	94.93	7.77	102.70	54.00	48.70	AVG	No Limit
3		2483.500	59.18	7.87	67.05	74.00	-6.95	peak	
4		2483.500	45.10	7.87	52.97	54.00	-1.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Vertical

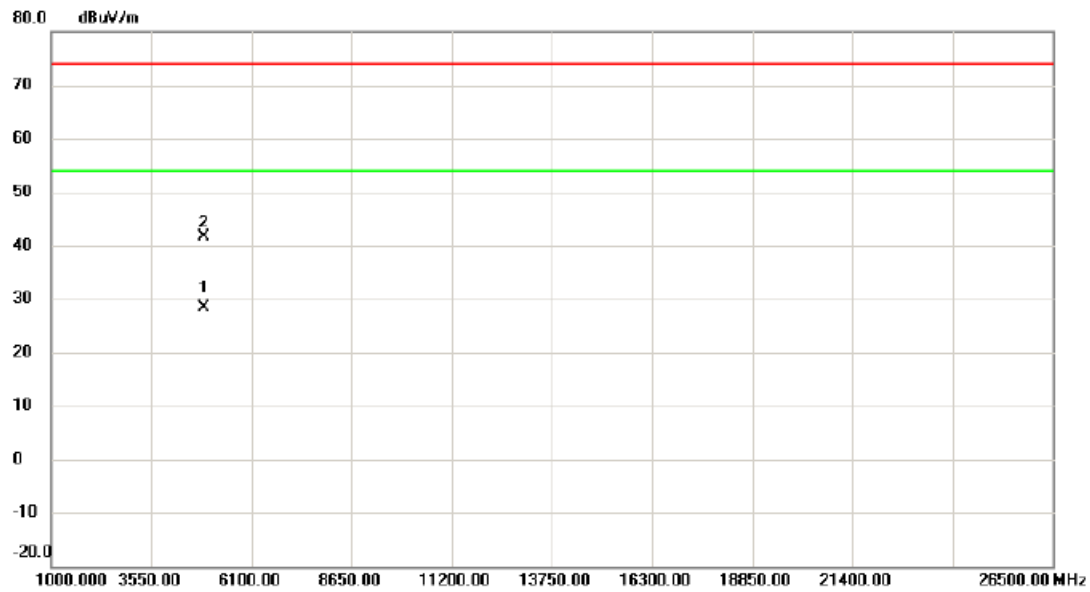


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4891.745	23.83	4.51	28.34	54.00	-25.66	AVG	
2		4893.415	37.17	4.52	41.69	74.00	-32.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Horizontal

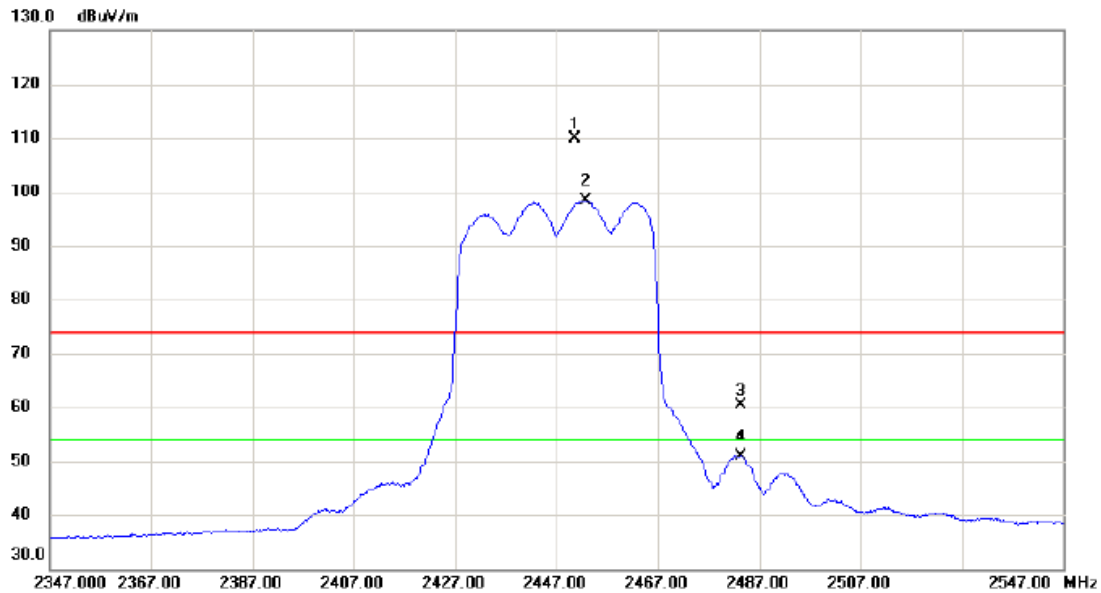

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2450.600	102.01	7.76	109.77	74.00	35.77	peak	No Limit
2	*	2452.700	90.70	7.78	98.48	54.00	44.48	AVG	No Limit
3		2483.500	52.46	7.87	60.33	74.00	-13.67	peak	
4		2483.500	42.96	7.87	50.83	54.00	-3.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2447 MHz
------------	-------------------------

Horizontal

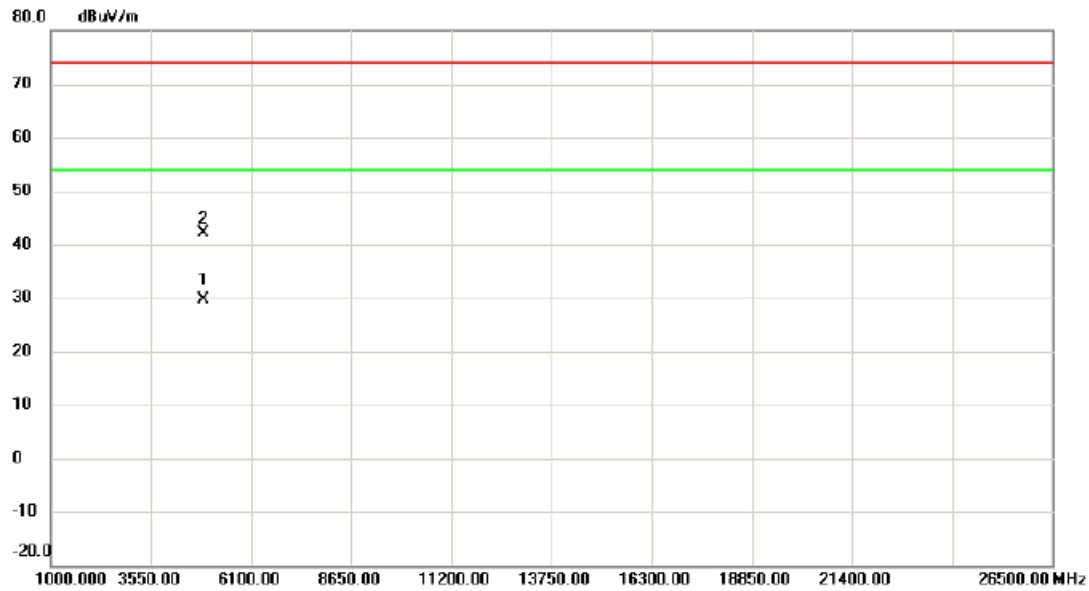


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4894.245	25.13	4.52	29.65	54.00	-24.35	AVG	
2		4894.368	37.55	4.52	42.07	74.00	-31.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Vertical

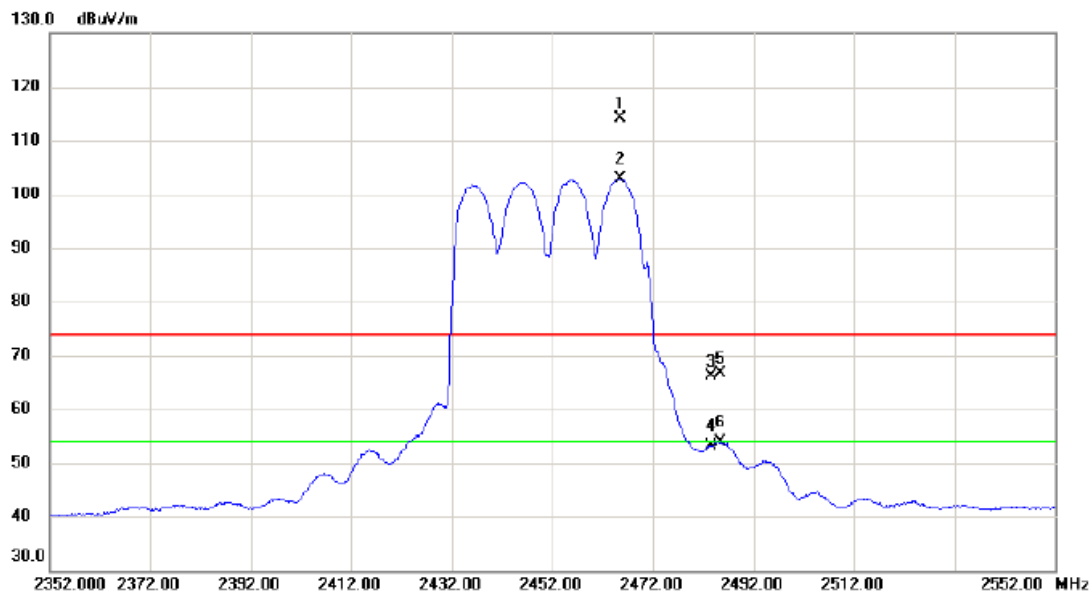


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2465.500	106.24	7.82	114.06	74.00	40.06	peak	No Limit
2	*	2465.500	95.05	7.82	102.87	54.00	48.87	AVG	No Limit
3		2483.500	58.20	7.87	66.07	74.00	-7.93	peak	
4		2483.500	45.17	7.87	53.04	54.00	-0.96	AVG	
5		2485.600	58.73	7.88	66.61	74.00	-7.39	peak	
6		2485.600	45.94	7.88	53.82	54.00	-0.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Vertical

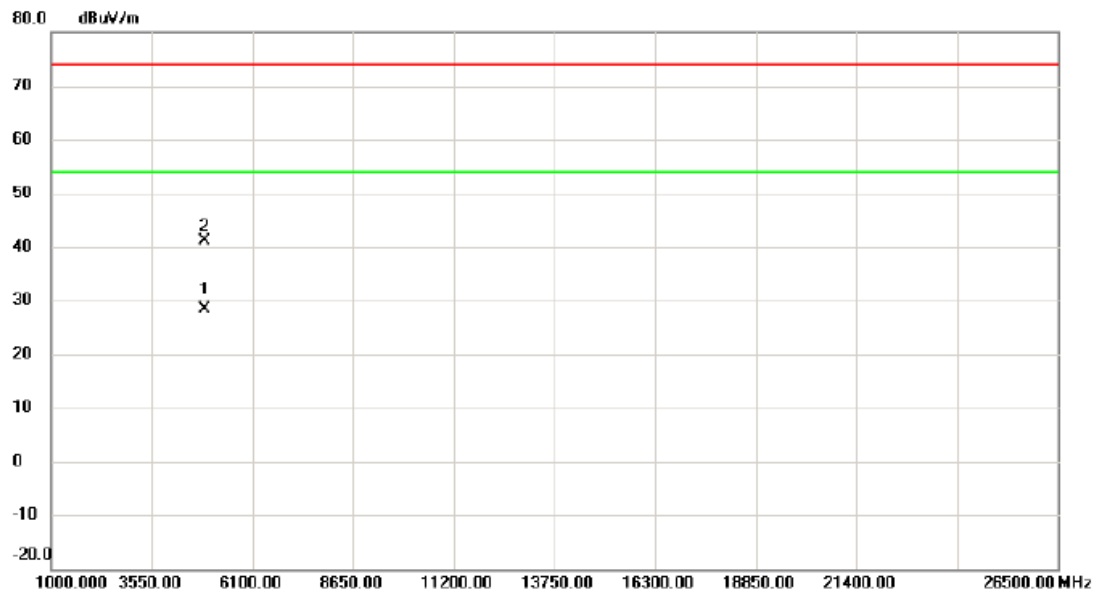


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4902.108	23.88	4.54	28.42	54.00	-25.58	AVG	
2		4904.080	36.66	4.56	41.22	74.00	-32.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Horizontal

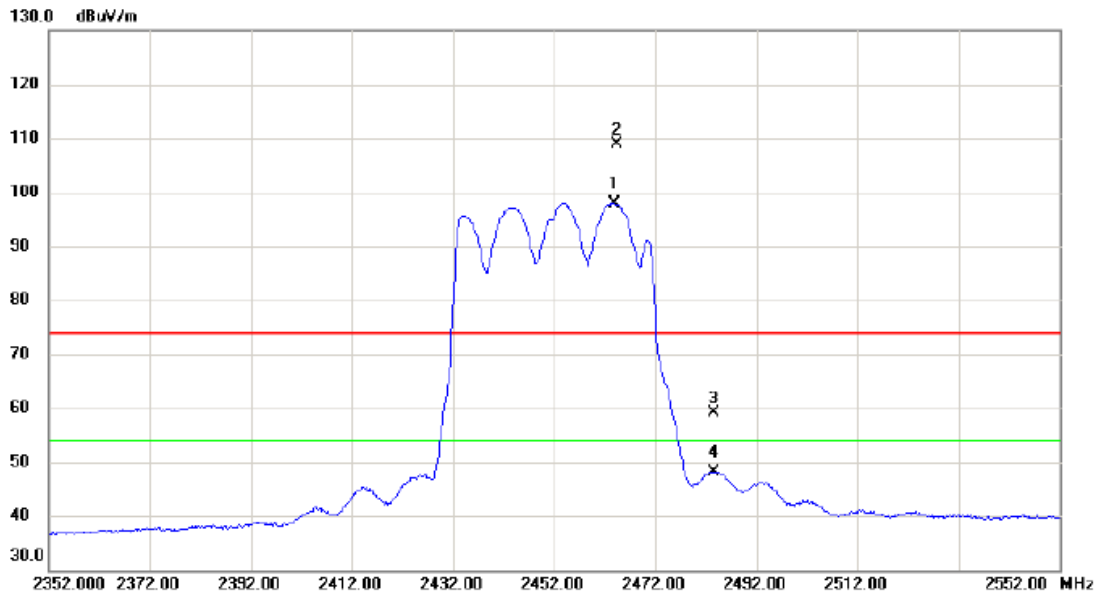


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2463.800	90.11	7.81	97.92	54.00	43.92	AVG	No Limit
2	X	2464.300	101.14	7.81	108.95	74.00	34.95	peak	No Limit
3		2483.500	51.28	7.87	59.15	74.00	-14.85	peak	
4		2483.500	40.28	7.87	48.15	54.00	-5.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX-40M Mode 2452 MHz
------------	-------------------------

Horizontal

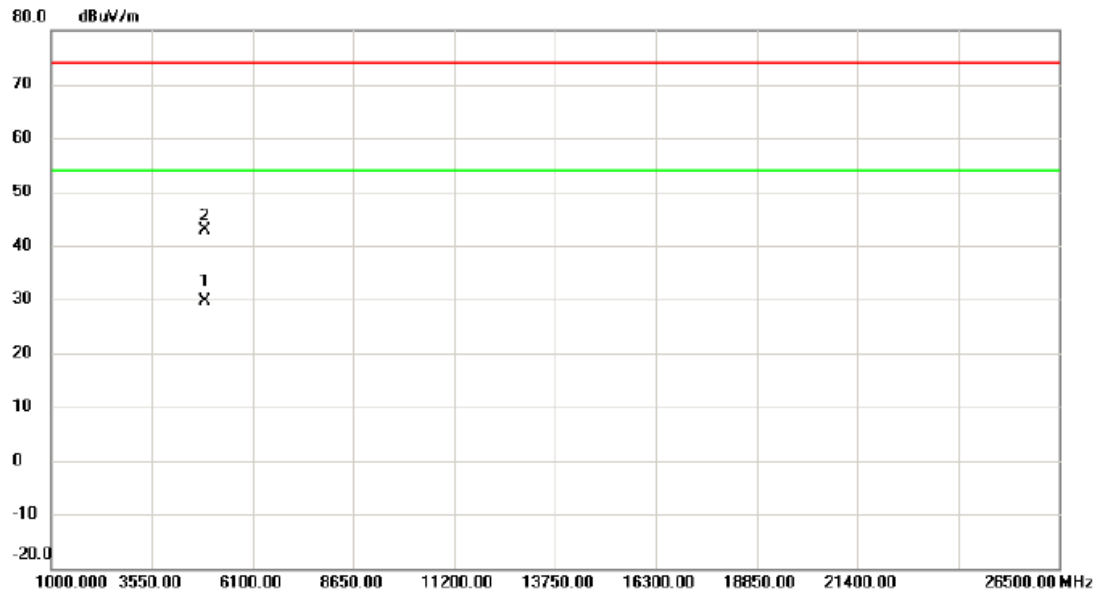

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4902.273	25.08	4.54	29.62	54.00	-24.38	AVG	
2		4902.815	38.26	4.54	42.80	74.00	-31.20	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	8.10	500	Complies
06	2437	7.15	500	Complies
11	2462	8.10	500	Complies

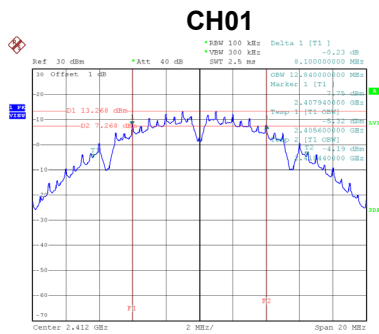

Date: 24.OCT.2019 11:45:19

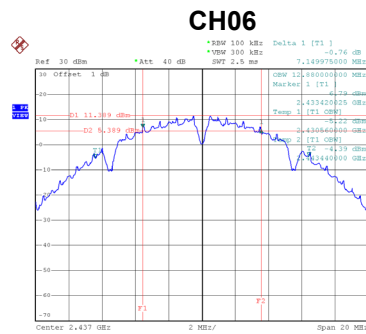


Date: 24.OCT.2019 11:48:23

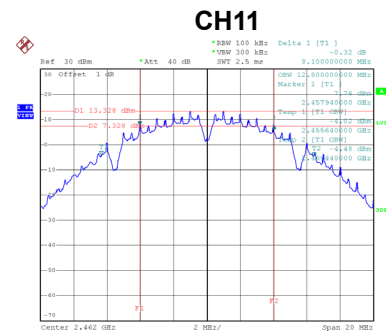


Date: 24.OCT.2019 11:50:42

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	12.90	Complies
06	2437	12.90	Complies
11	2462	12.90	Complies

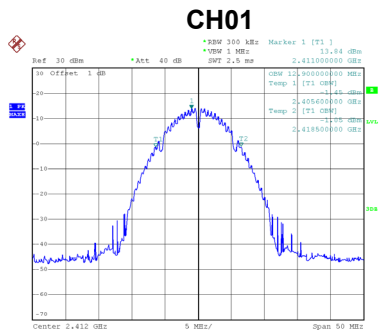

Date: 24.OCT.2019 14:49:34

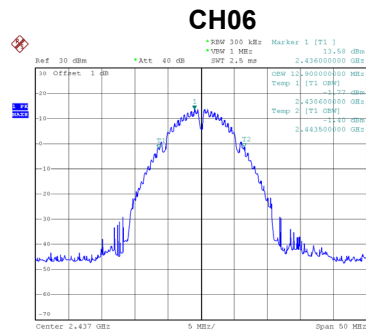


Date: 24.OCT.2019 14:54:26

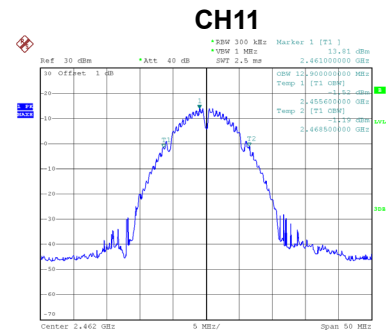


Date: 24.OCT.2019 14:55:45

Test Mode	TX N-20M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.36	500	Complies
06	2437	16.97	500	Complies
11	2462	17.58	500	Complies

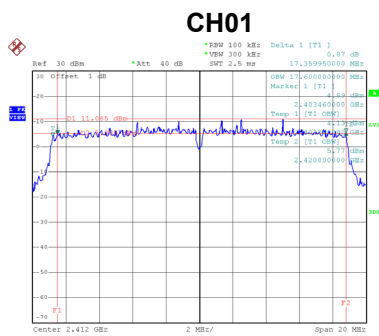

Date: 24.OCT.2019 13:54:03

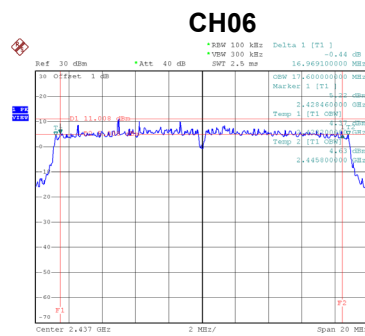


Date: 24.OCT.2019 13:56:15

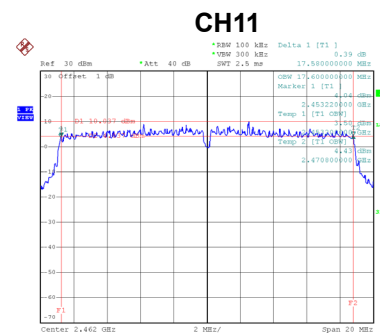


Date: 24.OCT.2019 13:58:08

Test Mode	TX N-20M Mode
-----------	---------------


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.70	Complies
06	2437	17.70	Complies
11	2462	17.70	Complies

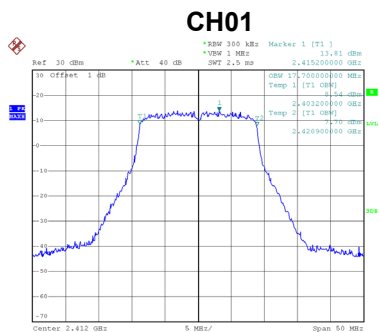

Date: 24.OCT.2019 15:08:43

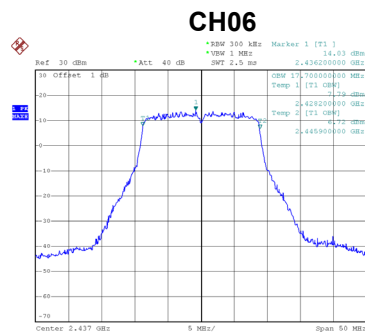




Date: 24.OCT.2019 15:16:38

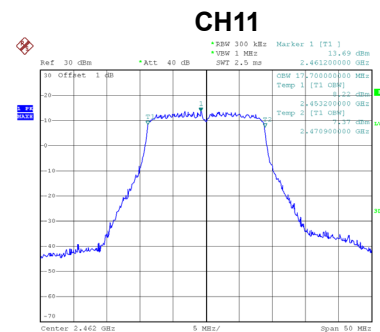

Date: 24.OCT.2019 15:17:44




Test Mode	TX N-40M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.39	500	Complies
06	2437	36.40	500	Complies
09	2452	35.67	500	Complies

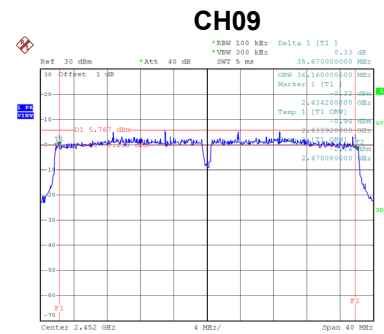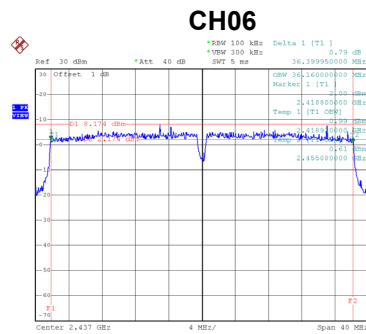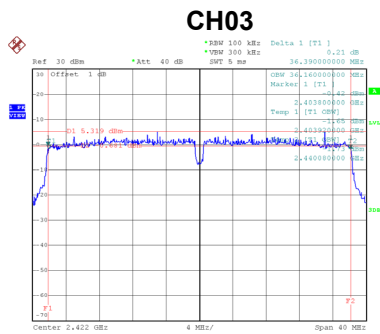


Test Mode	TX N-40M Mode
-----------	---------------

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.40	Complies
06	2437	36.40	Complies
09	2452	36.40	Complies

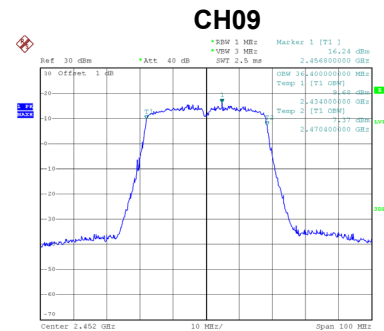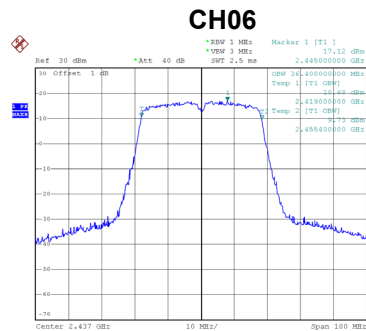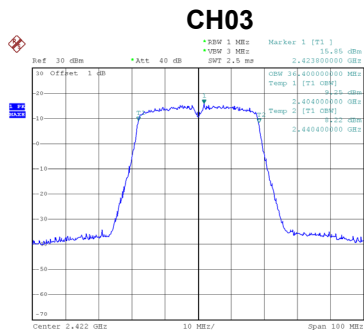


Test Mode	TX AC-20M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.30	500	Complies
06	2437	17.62	500	Complies
11	2462	16.60	500	Complies

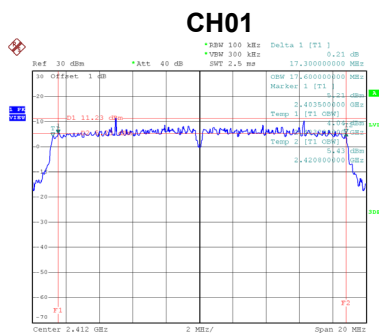

Date: 24.OCT.2019 14:10:21

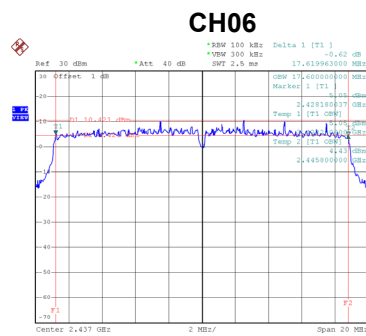


Date: 24.OCT.2019 14:12:46

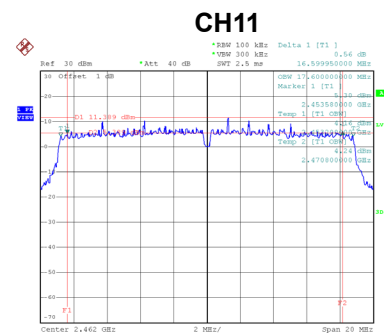


Date: 24.OCT.2019 14:14:57

Test Mode	TX AC-20M Mode
-----------	----------------


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.70	Complies
06	2437	17.70	Complies
11	2462	17.70	Complies

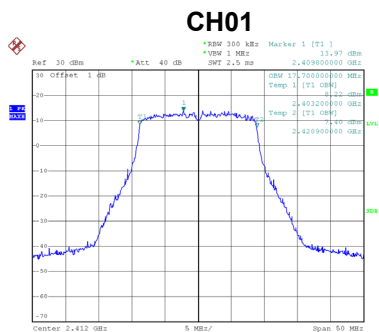

Date: 24.OCT.2019 16:20:39

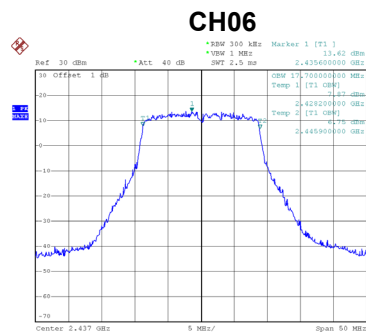




Date: 24.OCT.2019 16:19:56

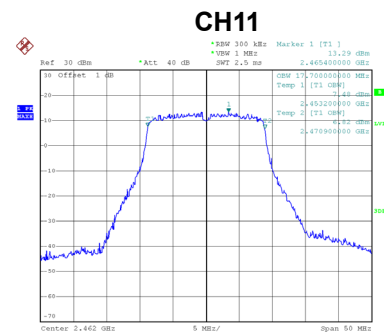

Date: 24.OCT.2019 16:19:07




Test Mode	TX AC-40M Mode
-----------	----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.40	500	Complies
06	2437	35.80	500	Complies
09	2452	35.44	500	Complies

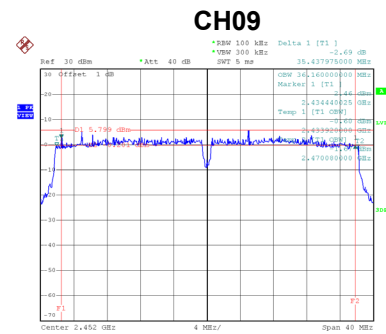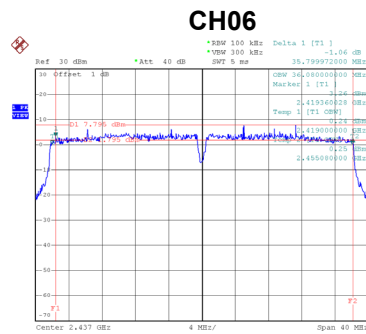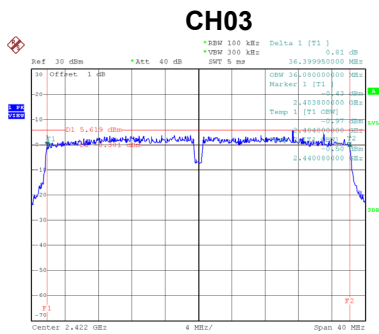


Test Mode	TX AC-40M Mode
-----------	----------------

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.40	Complies
06	2437	36.60	Complies
09	2452	36.40	Complies

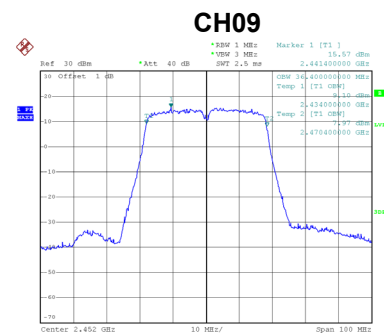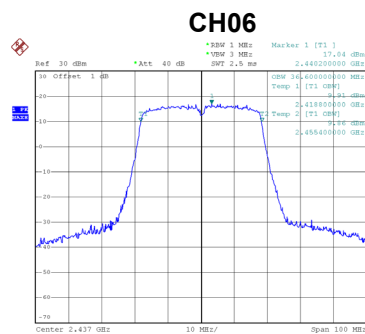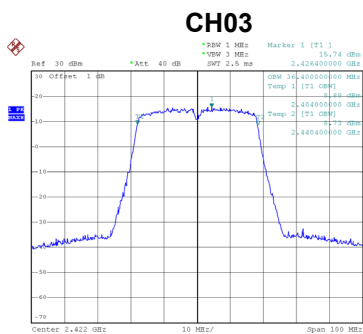


Test Mode	TX AX-20M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	18.75	500	Complies
06	2437	17.64	500	Complies
11	2462	18.43	500	Complies

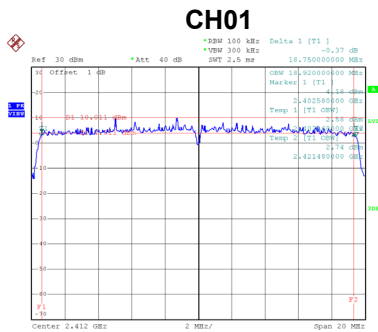

Date: 24.OCT.2019 14:25:25

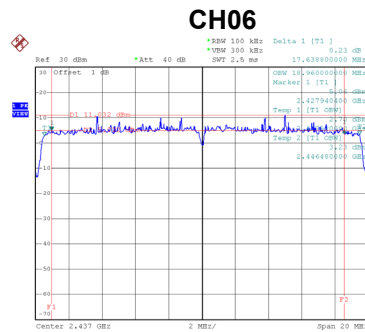


Date: 24.OCT.2019 14:27:51

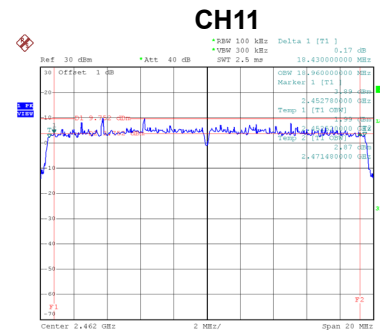


Date: 24.OCT.2019 14:30:09

Test Mode	TX AX-20M Mode
-----------	----------------


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	19.00	Complies
06	2437	19.00	Complies
11	2462	19.00	Complies

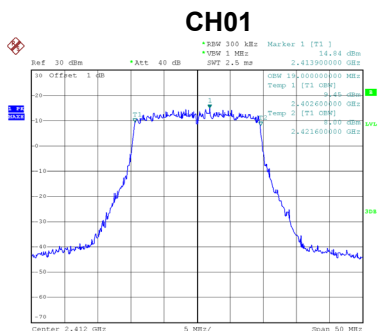

Date: 24.OCT.2019 16:18:03

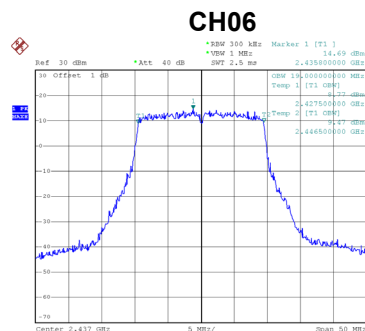


Date: 24.OCT.2019 16:17:12

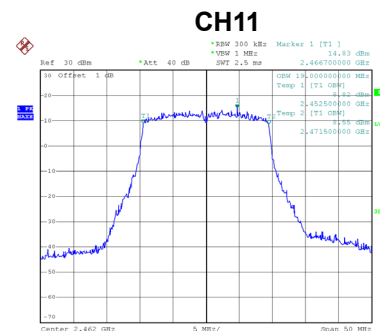


Date: 24.OCT.2019 16:16:08

Test Mode	TX AX-40M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	38.04	500	Complies
06	2437	37.93	500	Complies
09	2452	37.88	500	Complies

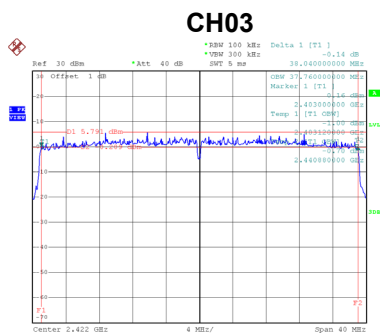

Date: 24.OCT.2019 14:32:14

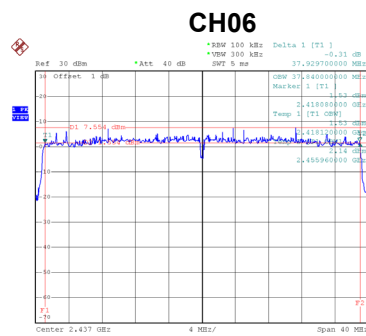


Date: 24.OCT.2019 14:34:44

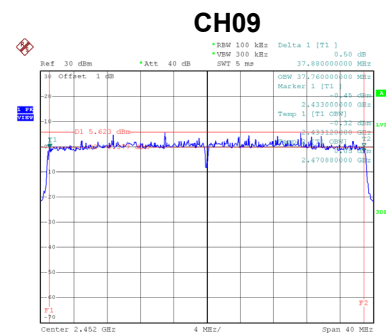


Date: 24.OCT.2019 14:36:43

Test Mode	TX AX-40M Mode
-----------	----------------


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	38.20	Complies
06	2437	38.20	Complies
09	2452	38.00	Complies

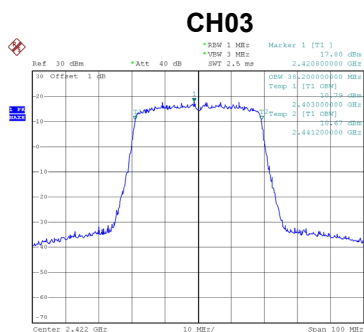

Date: 24.OCT.2019 16:13:37

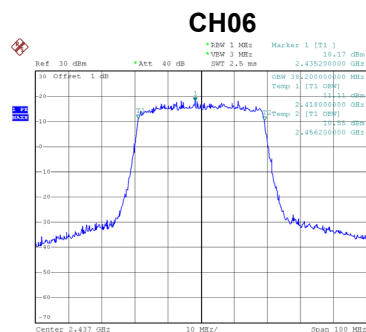

Date: 24.OCT.2019 16:11:41

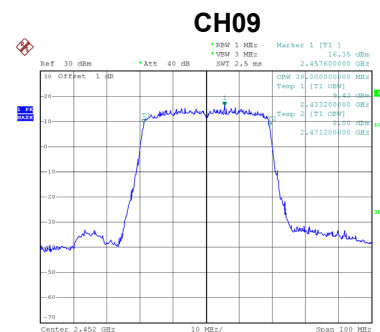

Date: 24.OCT.2019 16:10:40

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.53	0.2835	30.00	1.0000	Complies
06	2437	24.64	0.2907	30.00	1.0000	Complies
11	2462	24.78	0.3003	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.79	0.3010	30.00	1.0000	Complies
06	2437	24.90	0.3087	30.00	1.0000	Complies
11	2462	24.98	0.3144	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	27.67	0.5844	30.00	1.0000	Complies
06	2437	27.78	0.5994	30.00	1.0000	Complies
11	2462	27.89	0.6147	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.50	0.1123	30.00	1.0000	Complies
06	2437	23.90	0.2457	30.00	1.0000	Complies
11	2462	20.47	0.1115	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.84	0.1214	30.00	1.0000	Complies
06	2437	24.12	0.2585	30.00	1.0000	Complies
11	2462	20.59	0.1147	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.69	0.2338	30.00	1.0000	Complies
06	2437	27.03	0.5042	30.00	1.0000	Complies
11	2462	23.54	0.2262	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.91	0.1553	30.00	1.0000	Complies
06	2437	22.85	0.1929	30.00	1.0000	Complies
11	2462	21.44	0.1394	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.03	0.1597	30.00	1.0000	Complies
06	2437	23.08	0.2034	30.00	1.0000	Complies
11	2462	21.47	0.1404	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.98	0.3150	30.00	1.0000	Complies
06	2437	25.98	0.3963	30.00	1.0000	Complies
11	2462	24.47	0.2798	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.90	0.0978	30.00	1.0000	Complies
06	2437	22.41	0.1742	30.00	1.0000	Complies
09	2452	19.48	0.0887	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.09	0.1021	30.00	1.0000	Complies
06	2437	22.60	0.1820	30.00	1.0000	Complies
09	2452	19.66	0.0925	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	23.01	0.1999	30.00	1.0000	Complies
06	2437	25.52	0.3563	30.00	1.0000	Complies
09	2452	22.58	0.1812	30.00	1.0000	Complies

Test Mode	TX AC-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.99	0.1581	30.00	1.0000	Complies
06	2437	23.09	0.2037	30.00	1.0000	Complies
11	2462	21.34	0.1361	30.00	1.0000	Complies

Test Mode	TX AC-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.10	0.1622	30.00	1.0000	Complies
06	2437	23.52	0.2249	30.00	1.0000	Complies
11	2462	21.50	0.1412	30.00	1.0000	Complies

Test Mode	TX AC-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.06	0.3203	30.00	1.0000	Complies
06	2437	26.32	0.4286	30.00	1.0000	Complies
11	2462	24.43	0.2774	30.00	1.0000	Complies

Test Mode	TX AC-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.87	0.0970	30.00	1.0000	Complies
06	2437	22.37	0.1725	30.00	1.0000	Complies
09	2452	19.97	0.0993	30.00	1.0000	Complies

Test Mode	TX AC-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.08	0.1018	30.00	1.0000	Complies
06	2437	22.53	0.1790	30.00	1.0000	Complies
09	2452	20.04	0.1009	30.00	1.0000	Complies

Test Mode	TX AC-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.99	0.1989	30.00	1.0000	Complies
06	2437	25.46	0.3516	30.00	1.0000	Complies
09	2452	23.01	0.2002	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.47	0.1402	30.00	1.0000	Complies
06	2437	22.68	0.1853	30.00	1.0000	Complies
11	2462	20.62	0.1153	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.58	0.1438	30.00	1.0000	Complies
06	2437	22.91	0.1954	30.00	1.0000	Complies
11	2462	20.77	0.1194	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.53	0.2841	30.00	1.0000	Complies
06	2437	25.81	0.3806	30.00	1.0000	Complies
11	2462	23.70	0.2347	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.67	0.1166	30.00	1.0000	Complies
06	2437	22.55	0.1798	30.00	1.0000	Complies
09	2452	19.86	0.0968	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.89	0.1227	30.00	1.0000	Complies
06	2437	22.78	0.1896	30.00	1.0000	Complies
09	2452	19.95	0.0988	30.00	1.0000	Complies


Test Mode	TX AX-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	23.79	0.2393	30.00	1.0000	Complies
06	2437	25.67	0.3694	30.00	1.0000	Complies
09	2452	22.91	0.1956	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

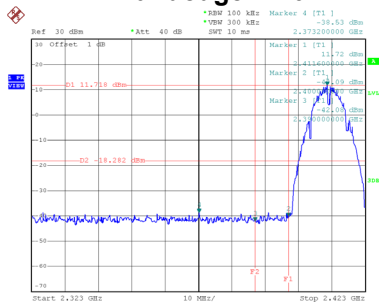


Date: 24.OCT.2019 11:45:27

Bandedge-CH11

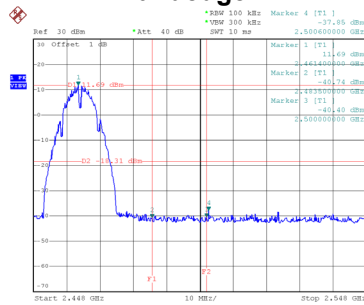


Date: 24.OCT.2019 11:50:50


CH01 – 10th Harmonic of the fundamental frequency

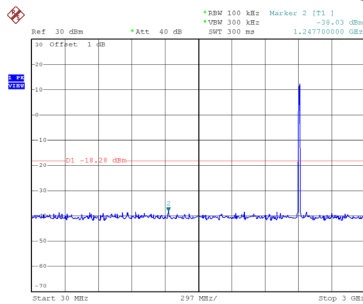

Date: 24.OCT.2019 11:45:41

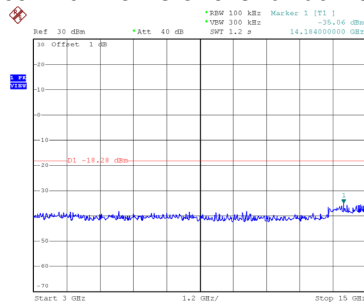


Date: 24.OCT.2019 11:45:50

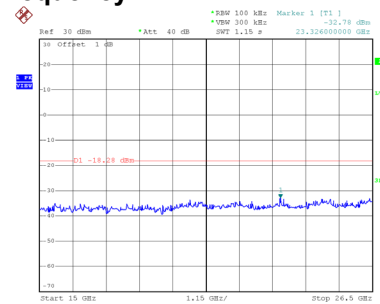


Date: 24.OCT.2019 11:45:58


CH06 – 10th Harmonic of the fundamental frequency

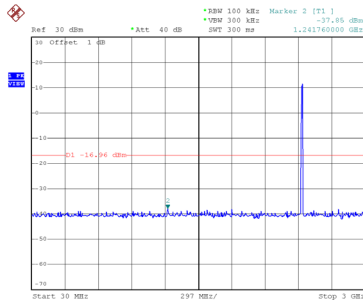

Date: 24.OCT.2019 11:48:46

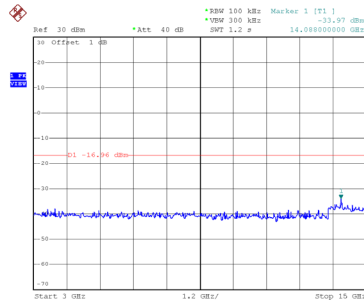


Date: 24.OCT.2019 11:48:54

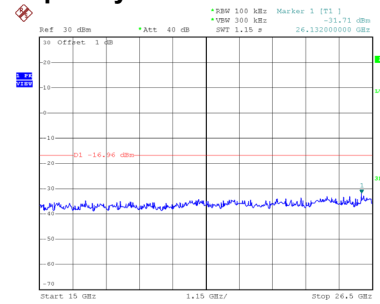


Date: 24.OCT.2019 11:49:03


CH11 – 10th Harmonic of the fundamental frequency

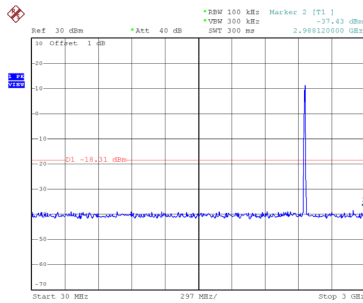

Date: 24.OCT.2019 11:51:04

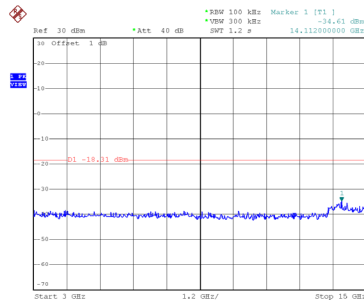


Date: 24.OCT.2019 11:51:13

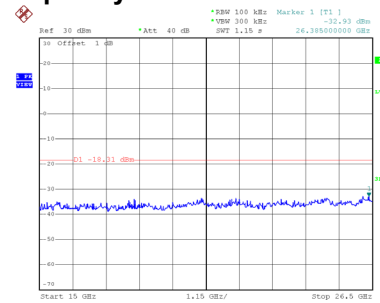

Date: 24.OCT.2019 11:51:22


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

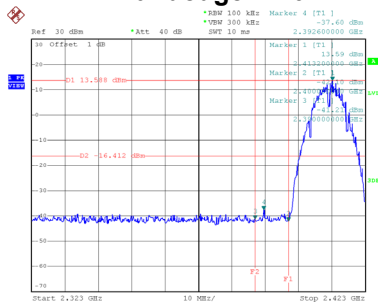


Date: 24.OCT.2019 14:45:55

Bandedge-CH11

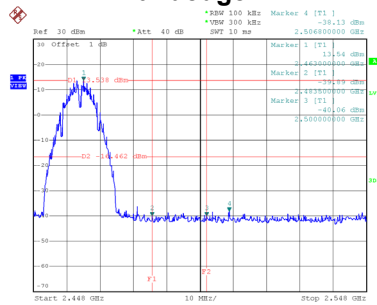


Date: 24.OCT.2019 14:58:12


CH01 – 10th Harmonic of the fundamental frequency

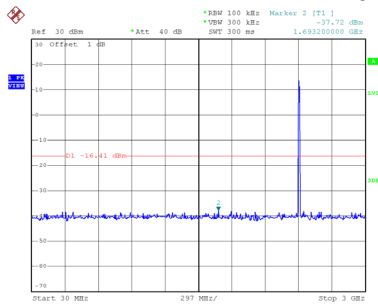

Date: 24.OCT.2019 14:46:09

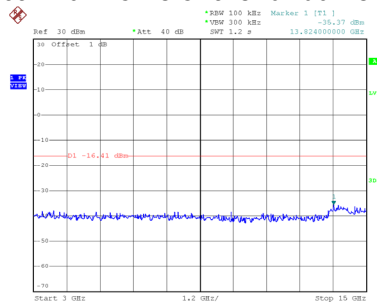


Date: 24.OCT.2019 14:46:17

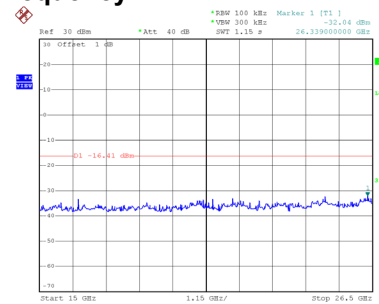


Date: 24.OCT.2019 14:46:26


CH06 – 10th Harmonic of the fundamental frequency

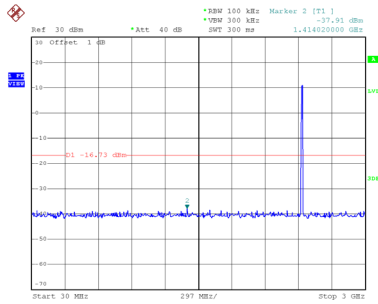

Date: 24.OCT.2019 14:53:11

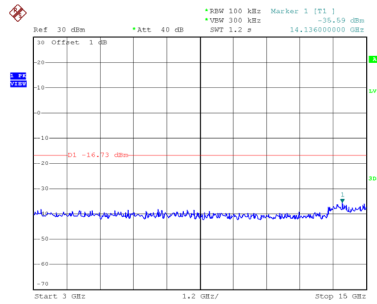


Date: 24.OCT.2019 14:53:20

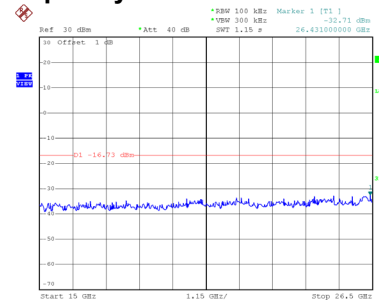


Date: 24.OCT.2019 14:53:29


CH11 – 10th Harmonic of the fundamental frequency

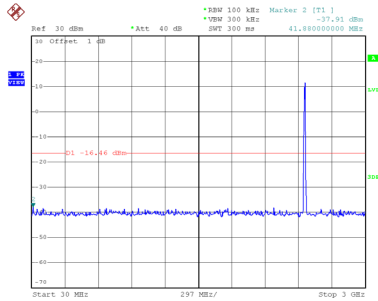

Date: 24.OCT.2019 14:58:27

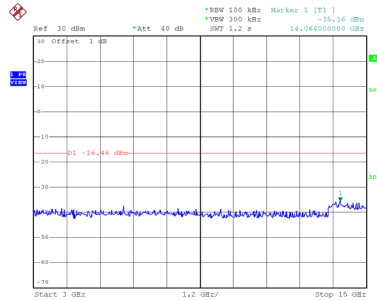


Date: 24.OCT.2019 14:58:36

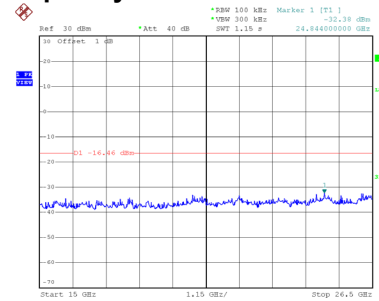

Date: 24.OCT.2019 14:58:45


Test Mode TX G Mode_Ant. 1

Bandedge-CH01

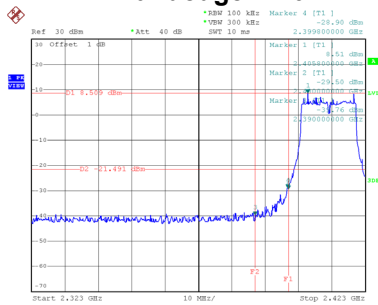


Date: 24.OCT.2019 11:53:38

Bandedge-CH11

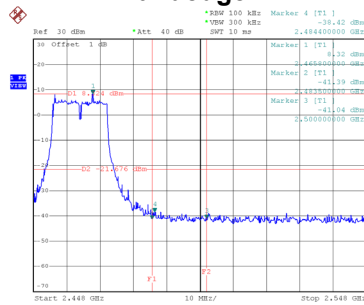


Date: 24.OCT.2019 13:50:15


CH01 – 10th Harmonic of the fundamental frequency

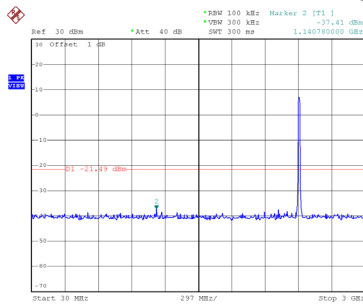

Date: 24.OCT.2019 11:53:52

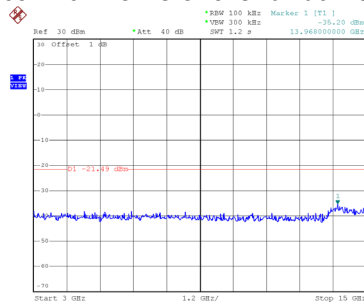


Date: 24.OCT.2019 11:54:00

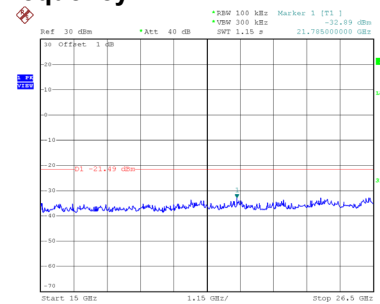


Date: 24.OCT.2019 11:54:09


CH06 – 10th Harmonic of the fundamental frequency

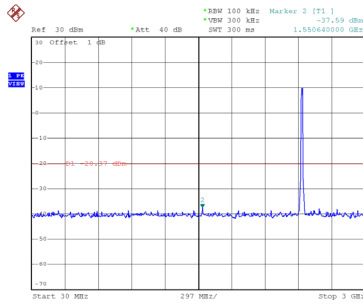

Date: 24.OCT.2019 11:56:10

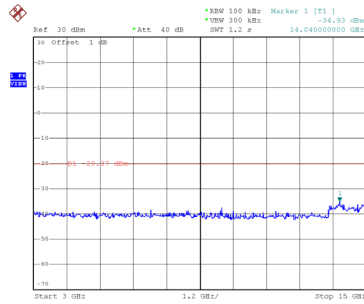


Date: 24.OCT.2019 11:56:18

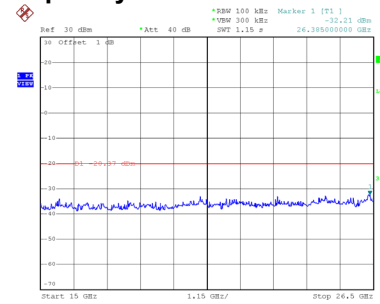


Date: 24.OCT.2019 11:56:27


CH11 – 10th Harmonic of the fundamental frequency

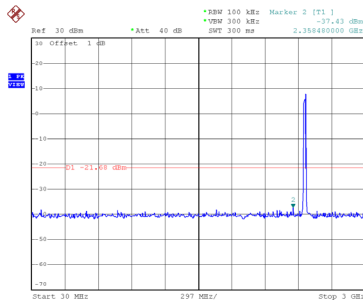

Date: 24.OCT.2019 13:50:29

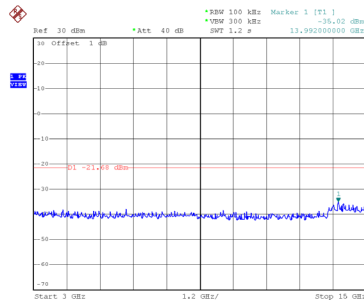


Date: 24.OCT.2019 13:50:38

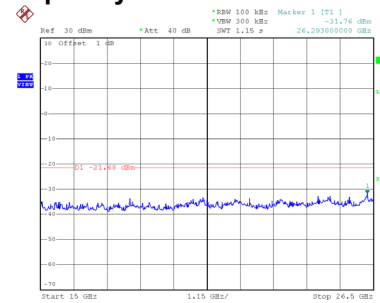

Date: 24.OCT.2019 13:50:46


Test Mode TX G Mode_Ant. 2

Bandedge-CH01

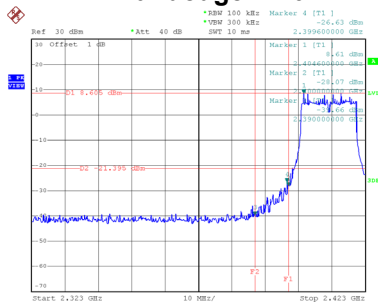


Date: 24.OCT.2019 15:00:56

Bandedge-CH11

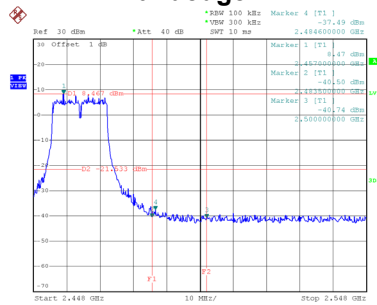


Date: 24.OCT.2019 15:06:23


CH01 – 10th Harmonic of the fundamental frequency

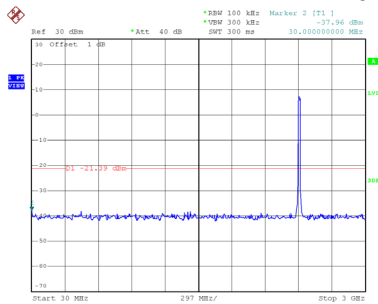

Date: 24.OCT.2019 15:01:11

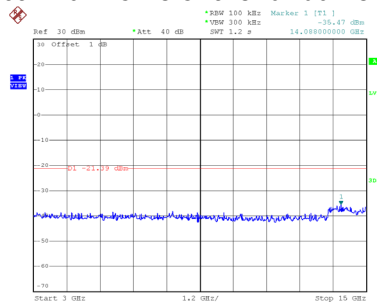


Date: 24.OCT.2019 15:01:20

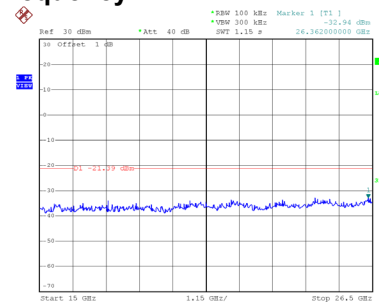


Date: 24.OCT.2019 15:01:29


CH06 – 10th Harmonic of the fundamental frequency

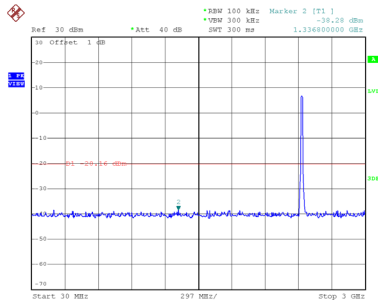

Date: 24.OCT.2019 15:04:44

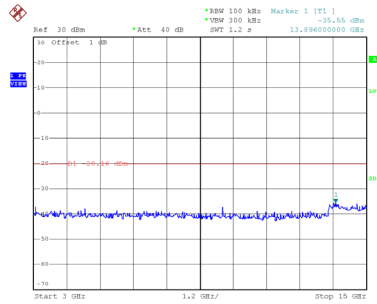


Date: 24.OCT.2019 15:04:53

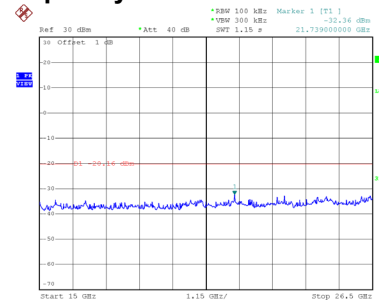


Date: 24.OCT.2019 15:05:02


CH11 – 10th Harmonic of the fundamental frequency

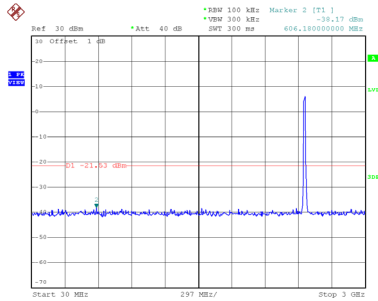

Date: 24.OCT.2019 15:06:38

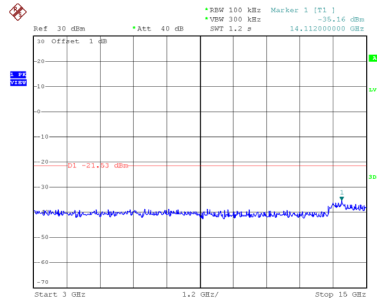


Date: 24.OCT.2019 15:06:47

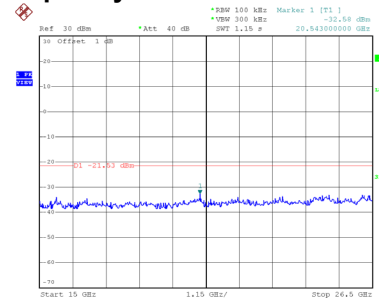

Date: 24.OCT.2019 15:06:56


Test Mode TX N-20M Mode_Ant. 1

Bandedge-CH01

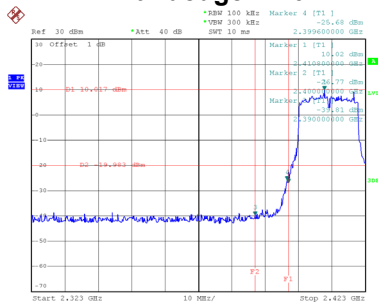


Date: 24.OCT.2019 13:54:12

Bandedge-CH11

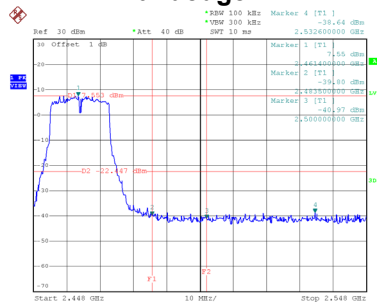


Date: 24.OCT.2019 13:58:16


CH01 – 10th Harmonic of the fundamental frequency

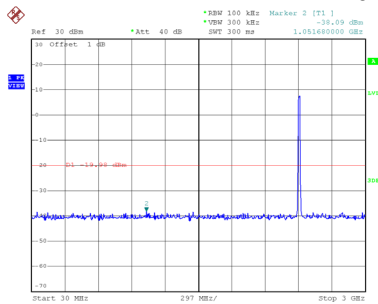

Date: 24.OCT.2019 13:54:26

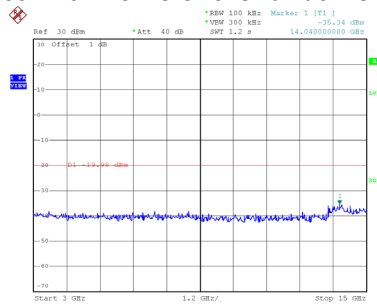


Date: 24.OCT.2019 13:54:35

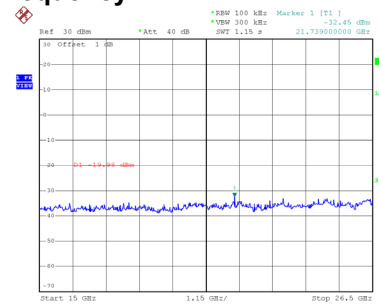


Date: 24.OCT.2019 13:54:43


CH06 – 10th Harmonic of the fundamental frequency

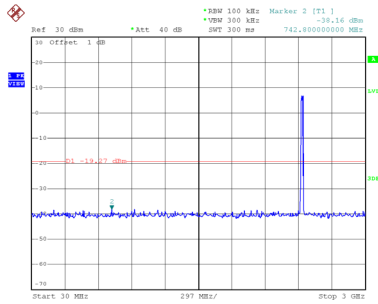

Date: 24.OCT.2019 13:56:37

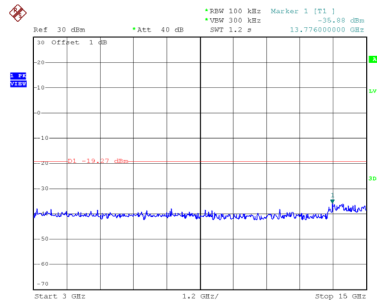


Date: 24.OCT.2019 13:56:46

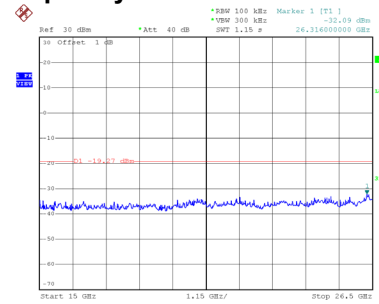


Date: 24.OCT.2019 13:56:54


CH11 – 10th Harmonic of the fundamental frequency

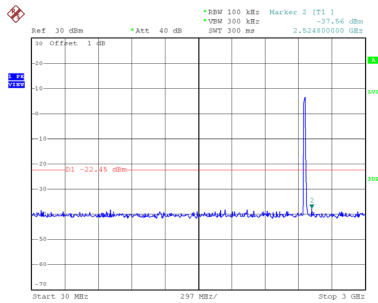

Date: 24.OCT.2019 13:58:30

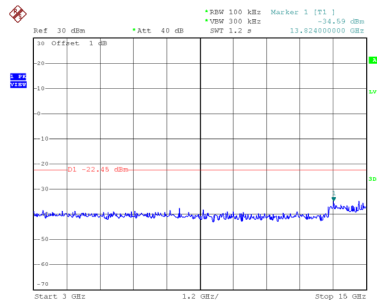

Date: 24.OCT.2019 13:58:39

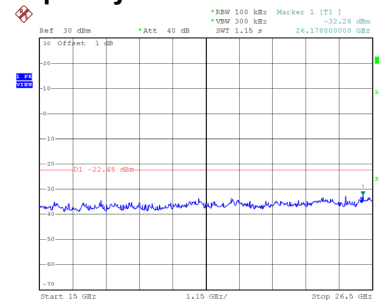

Date: 24.OCT.2019 13:58:47