

Appendix A. Test Result of AC Power Line Conducted Emission

Owing to the battery operation of EUT, this test item is not performed.


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.68	>0.50	Pass
	2440	0.68	>0.50	Pass
	2480	0.66	>0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

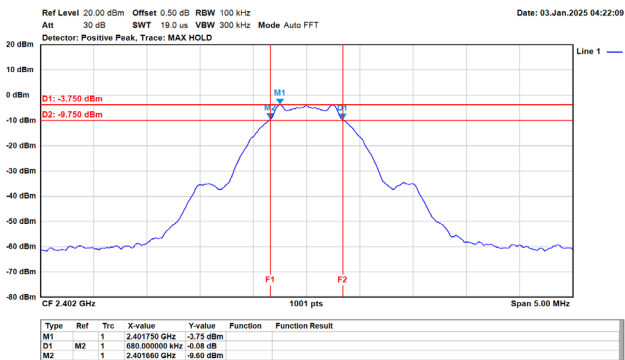

GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

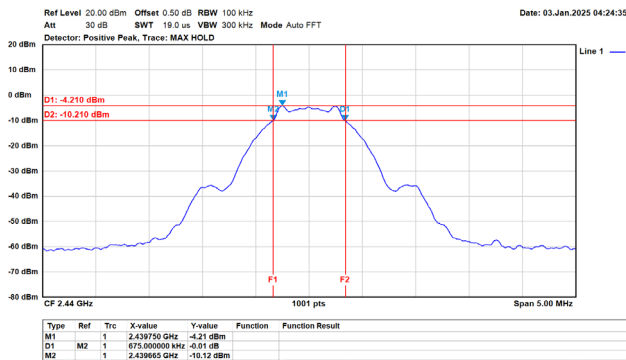

GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

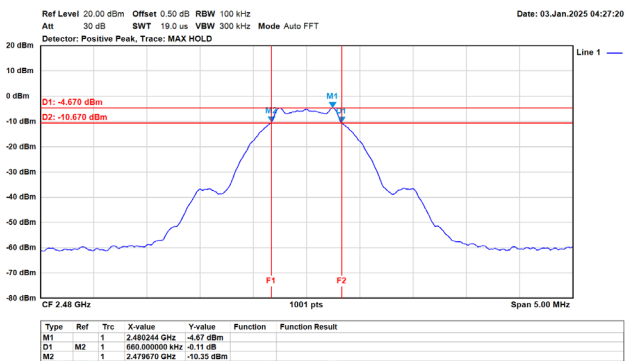


Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1Mbps)	2402	-0.53	30.00	Pass
	2440	-0.73	30.00	Pass
	2480	-1.18	30.00	Pass

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	-11.93	8.00	Pass
	2440	-13.58	8.00	Pass
	2480	-14.09	8.00	Pass

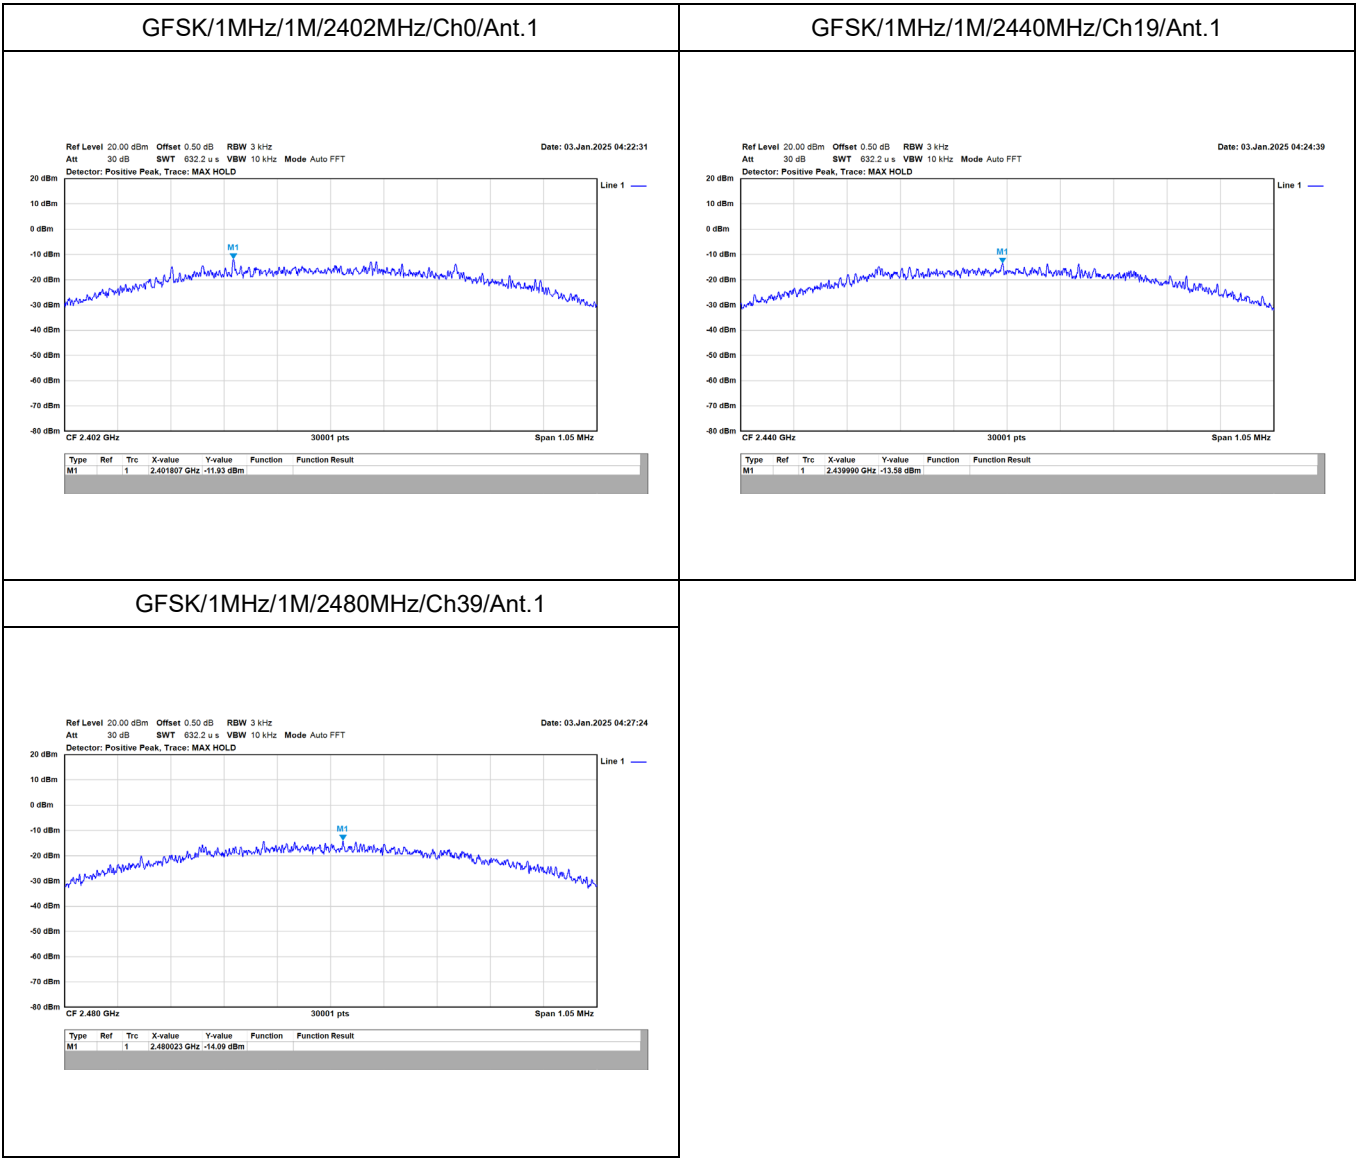

Appendix E. Test Result of Antenna Port Conducted Emission

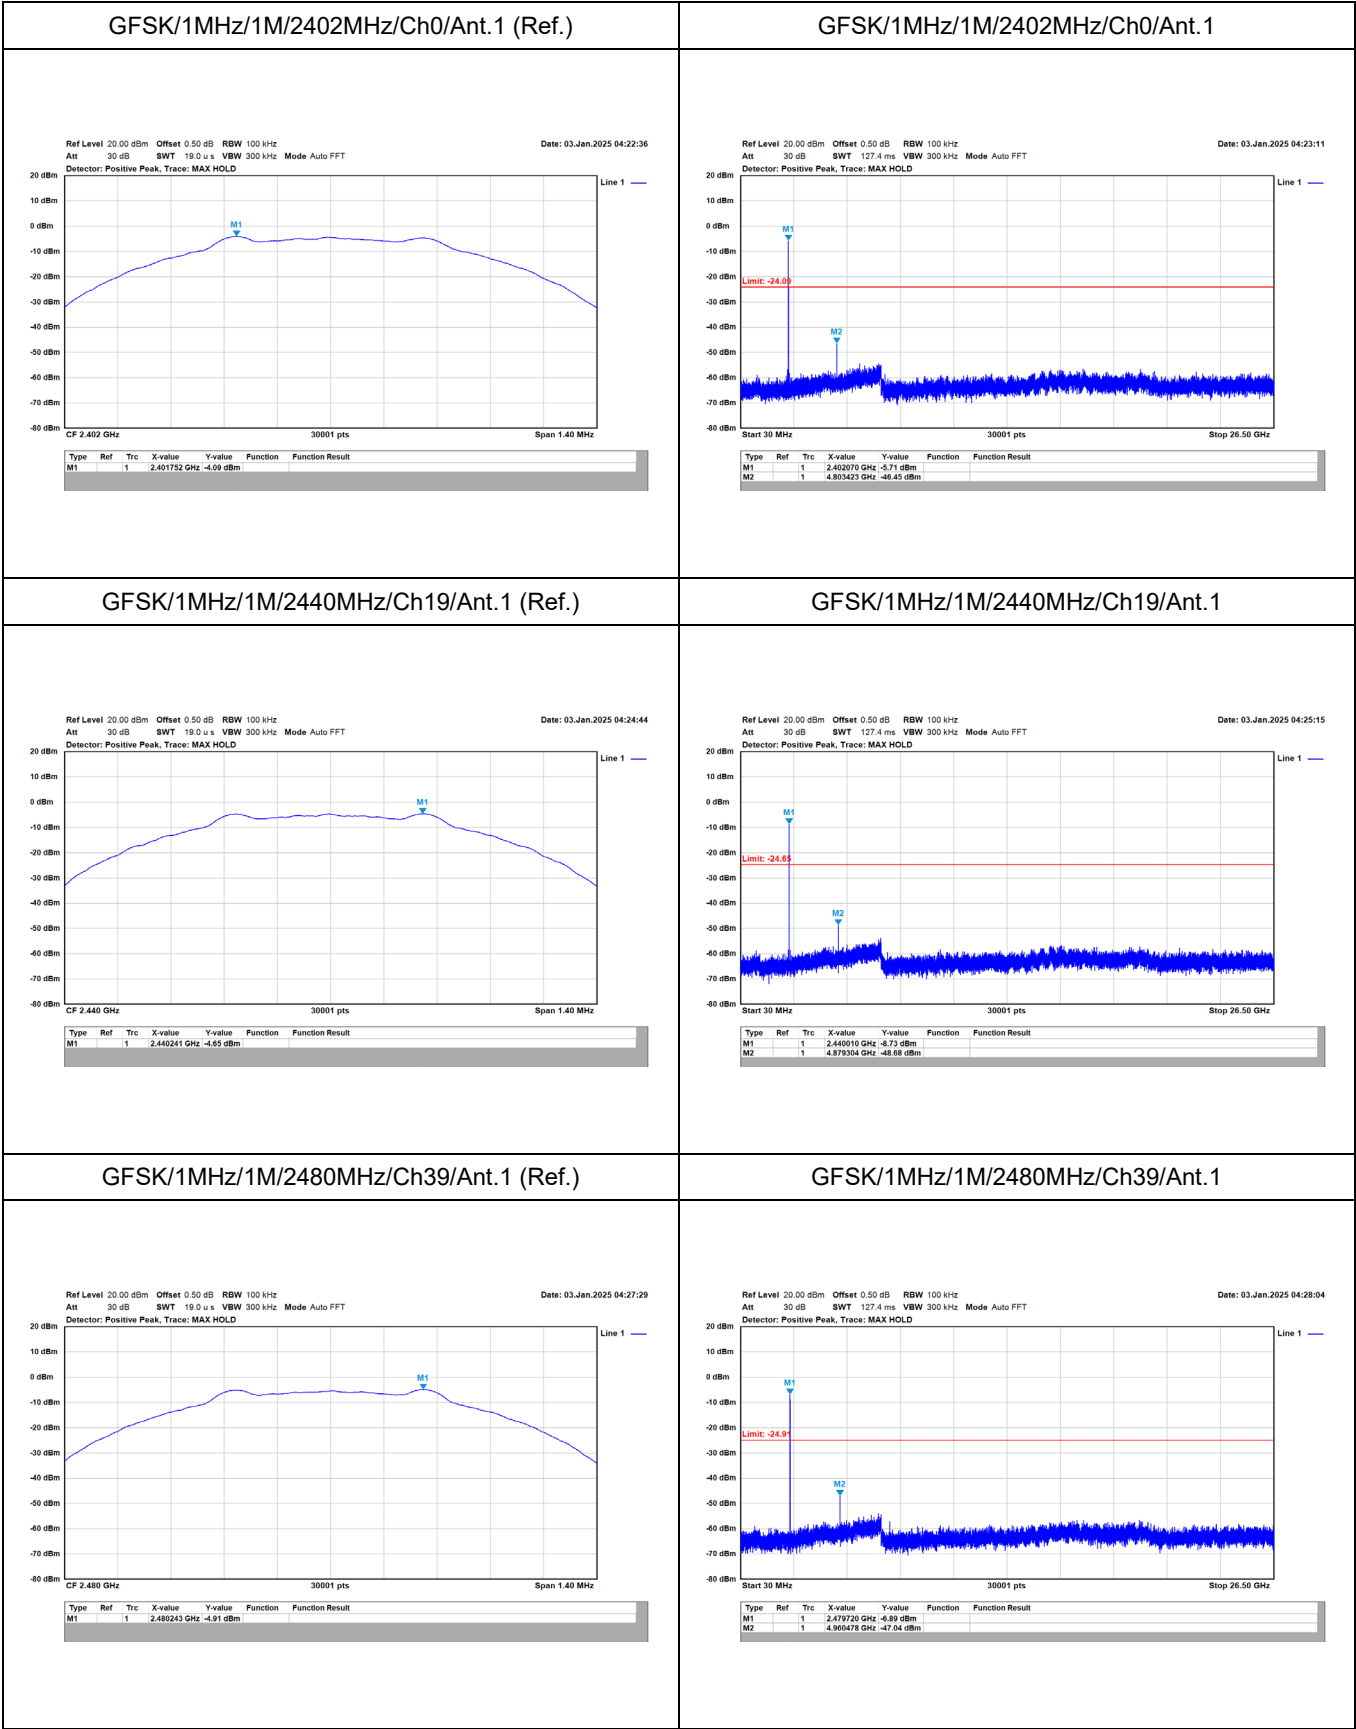


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS

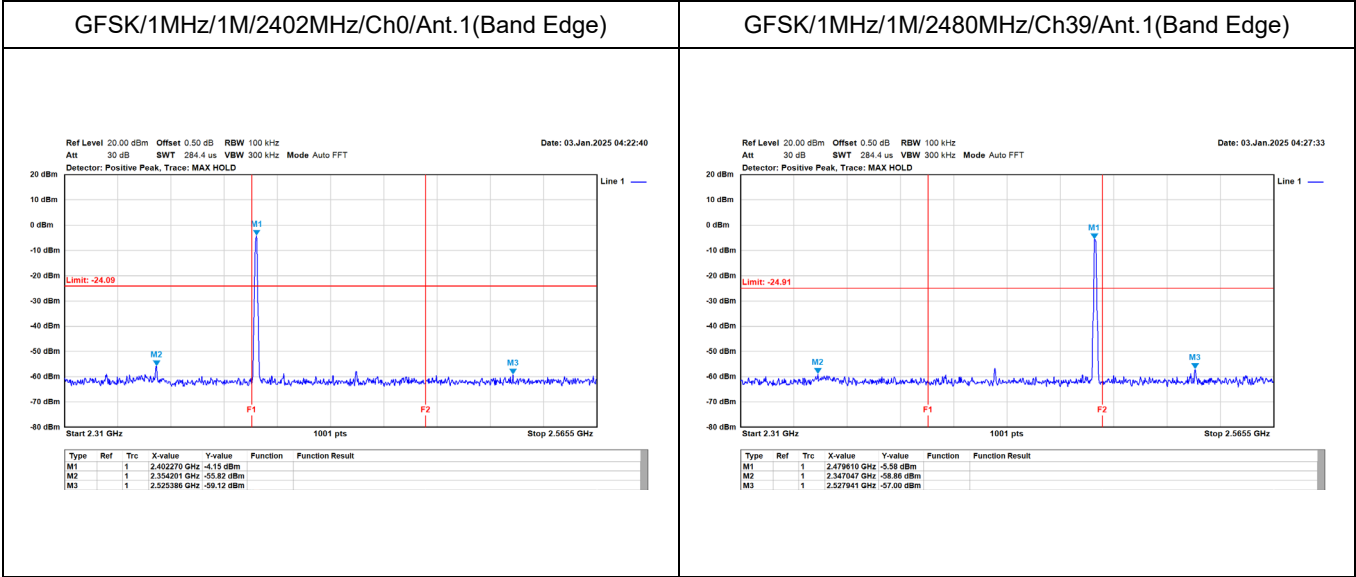

Appendix F. Test Result of Radiated Emission

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

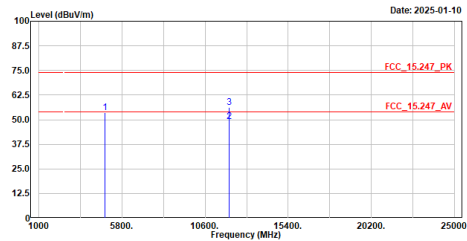


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	53.58	74.00	-20.42	68.21	-14.63	Peak
2	12010.000	48.95	54.00	-5.05	49.88	-0.85	Average
3	12010.000	56.20	74.00	-17.80	57.05	-0.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

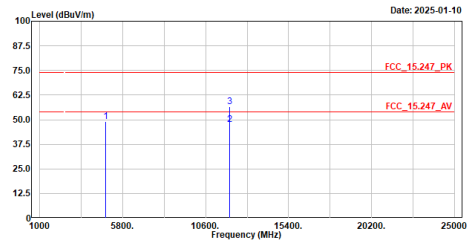


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	49.16	74.00	-24.84	63.79	-14.63	Peak
2	12010.000	47.55	54.00	-6.45	48.40	-0.85	Average
3	12010.000	56.66	74.00	-17.34	57.51	-0.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2440MHz
Test BY :Bob

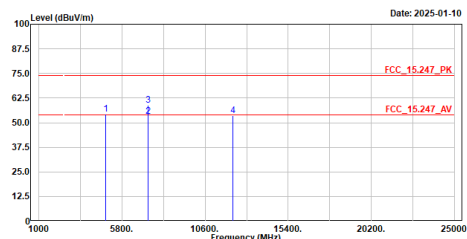


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	54.42	74.00	-19.58	68.69	-14.27	Peak
2	7320.000	53.23	54.00	-0.77	59.79	-6.56	Average
3	7320.000	58.84	74.00	-15.16	65.40	-6.56	Peak
4	12200.000	53.51	74.00	-20.49	54.32	-0.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2440MHz
Test BY :Bob

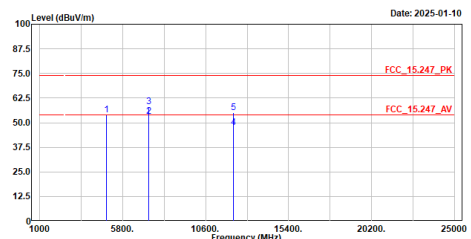


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	53.85	74.00	-20.15	68.12	-14.27	Peak
2	7320.000	53.17	54.00	-0.83	59.73	-6.56	Average
3	7320.000	58.20	74.00	-15.80	64.76	-6.56	Peak
4	12200.000	47.52	54.00	-6.48	48.33	-0.81	Average
5	12200.000	55.27	74.00	-18.73	56.08	-0.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Bob

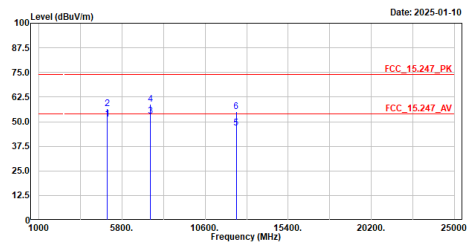


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	51.34	54.00	-2.66	65.24	-13.90	Average
2	4960.000	56.51	74.00	-17.49	70.41	-13.90	Peak
3	7440.000	52.84	54.00	-1.16	59.50	-6.66	Average
4	7440.000	58.89	74.00	-15.11	65.55	-6.66	Peak
5	12400.000	46.81	54.00	-7.19	47.23	-0.42	Average
6	12400.000	55.13	74.00	-18.87	55.55	-0.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Bob

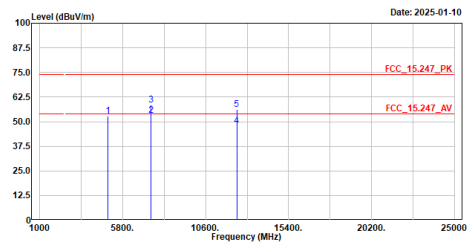


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	53.01	74.00	-20.99	66.91	-13.90	Peak
2	7440.000	53.39	54.00	-0.61	60.85	-6.66	Average
3	7440.000	58.33	74.00	-15.67	64.99	-6.66	Peak
4	12400.000	47.92	54.00	-6.08	48.34	-0.42	Average
5	12400.000	56.21	74.00	-17.79	56.63	-0.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2440MHz
Test BY :Ashton

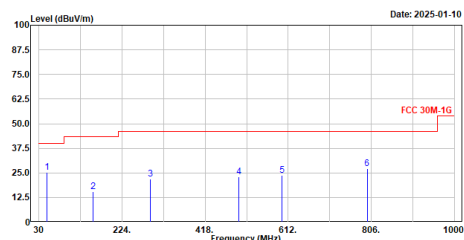


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	25.17	40.00	-14.83	48.51	-23.34	QP
2	156.100	15.48	43.50	-28.02	39.37	-23.89	QP
3	289.960	21.85	46.00	-24.15	45.21	-23.36	QP
4	437.540	23.20	46.00	-22.80	41.26	-18.06	QP
5	597.450	23.69	46.00	-22.31	39.21	-15.52	QP
6	796.300	27.04	46.00	-18.96	39.53	-12.49	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2440MHz
Test BY :Ashton

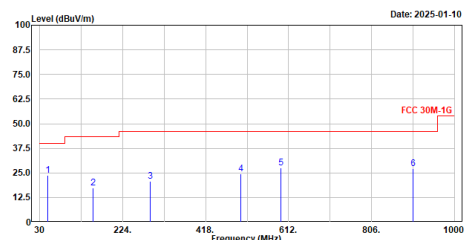


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	23.82	40.00	-16.18	47.16	-23.34	QP
2	156.100	17.43	43.50	-26.07	41.24	-23.81	QP
3	289.960	20.89	46.00	-25.11	44.25	-23.36	QP
4	437.540	24.67	46.00	-21.33	42.67	-18.00	QP
5	597.450	27.48	46.00	-18.52	43.14	-15.66	QP
6	796.300	27.31	46.00	-18.69	38.72	-11.41	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Ashton

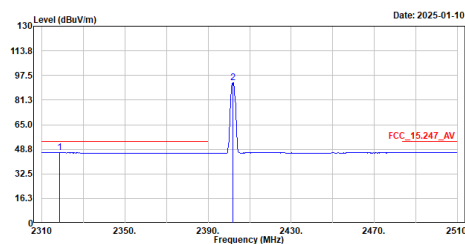


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2318.600	46.45	54.00	-7.55	15.61	30.84	Average
2	2402.000	92.72	-----	-----	62.03	30.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Ashton

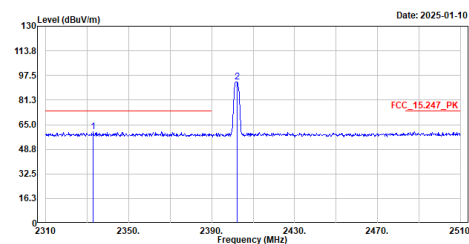


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2333.000	60.29	74.00	-13.71	29.58	30.71	Peak
2	2402.200	93.33	-----	-----	62.64	30.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Ashton

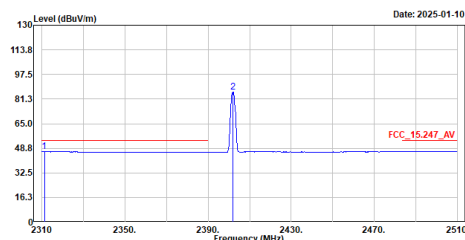


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2311.200	46.45	54.00	-7.55	15.62	30.83	Average
2	2402.000	85.86	-----	-----	55.17	30.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Ashton

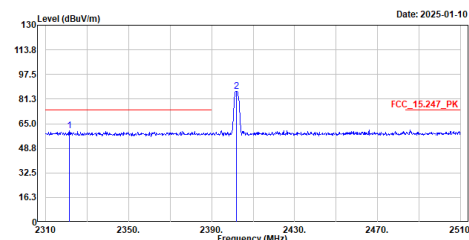


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2321.400	60.37	74.00	-13.63	29.54	30.83	Peak
2	2401.800	86.57	-----	-----	55.88	30.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Ashton

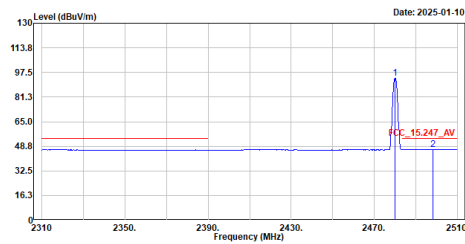

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	93.70	-----	-----	63.08	30.62	Average
2	2498.200	46.57	54.00	-7.43	15.83	30.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Ashton

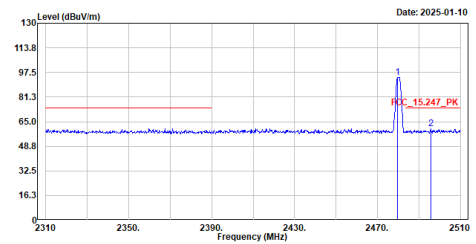

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2479.800	94.34	-----	-----	63.72	30.62	Peak
2	2495.600	60.53	74.00	-13.47	29.79	30.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Ashton

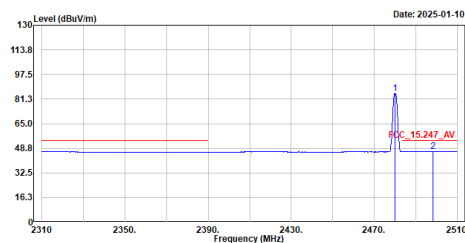

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	85.00	-----	-----	54.38	30.62	Average
2	2498.200	46.57	54.00	-7.43	15.83	30.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Ashton

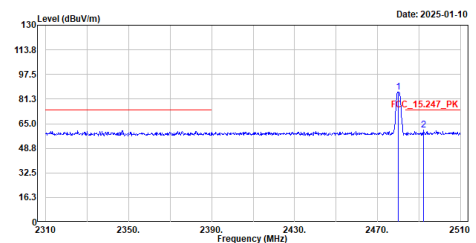

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	85.81	-----	-----	55.19	30.62	Peak
2	2492.200	60.61	74.00	-13.39	29.88	30.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.