




## Appendix A: DTS Bandwidth

### Test Result


| TestMode  | Antenna | Frequency[MHz] | DTS BW<br>[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------------|---------|---------|------------|---------|
| 11B       | Ant1    | 2412           | 8.08            | 2407.96 | 2416.04 | 0.5        | PASS    |
| 11B       | Ant1    | 2437           | 8.04            | 2432.96 | 2441.00 | 0.5        | PASS    |
| 11B       | Ant1    | 2462           | 8.08            | 2457.96 | 2466.04 | 0.5        | PASS    |
| 11G       | Ant1    | 2412           | 16.32           | 2403.84 | 2420.16 | 0.5        | PASS    |
| 11G       | Ant1    | 2437           | 16.36           | 2428.80 | 2445.16 | 0.5        | PASS    |
| 11G       | Ant1    | 2462           | 16.32           | 2453.84 | 2470.16 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2412           | 17.60           | 2403.20 | 2420.80 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2437           | 17.60           | 2428.20 | 2445.80 | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2462           | 17.60           | 2453.20 | 2470.80 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2422           | 36.32           | 2403.84 | 2440.16 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2437           | 36.00           | 2418.84 | 2454.84 | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2452           | 36.32           | 2433.84 | 2470.16 | 0.5        | PASS    |



## Test Graphs

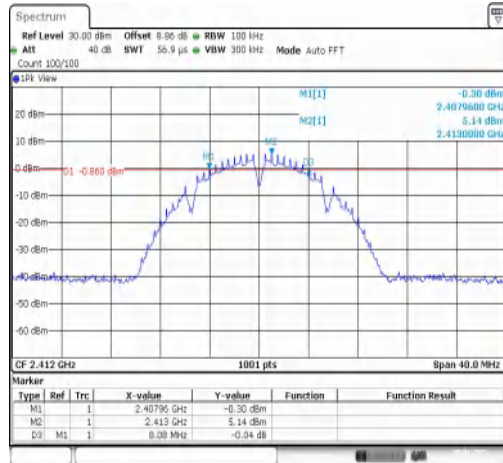


Date: 5-JAN-2025 13:06:26

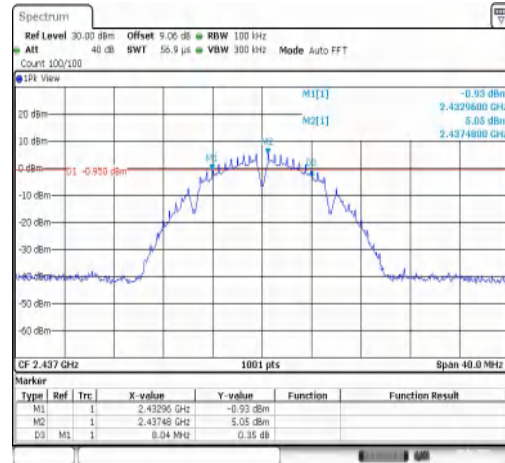


Date: 5-JAN-2025 13:51:26

11B-Ant1-2412-PASS

11B-Ant1-2437-PASS

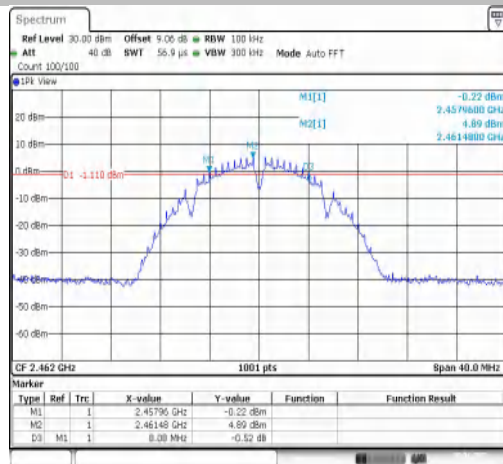


Date: 5-JAN-2025 13:54:45

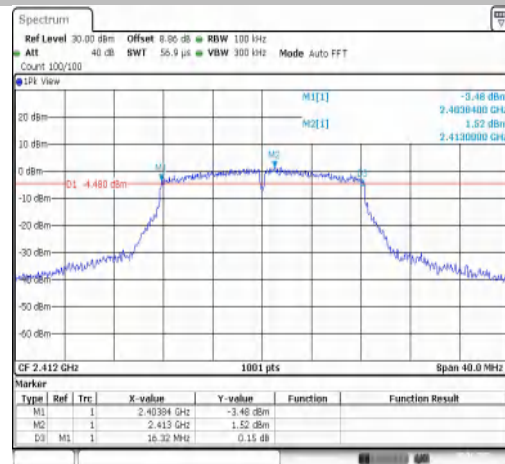


Date: 5-JAN-2025 13:02:35

11B-Ant1-2462-PASS

11G-Ant1-2412-PASS

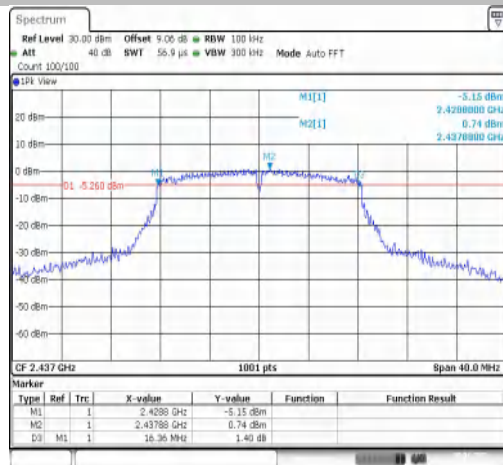


Date: 5-JAN-2025 13:06:35

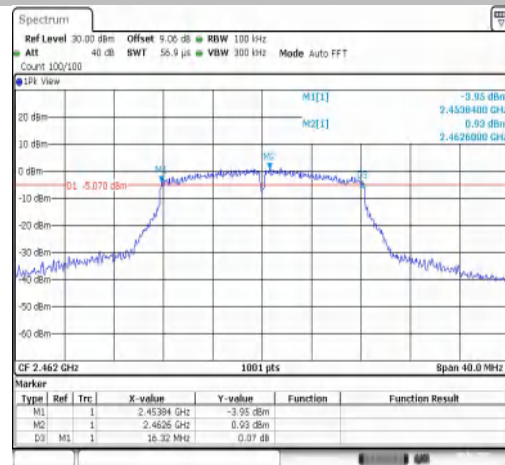


Date: 5-JAN-2025 13:10:04

11G-Ant1-2437-PASS


11G-Ant1-2462-PASS

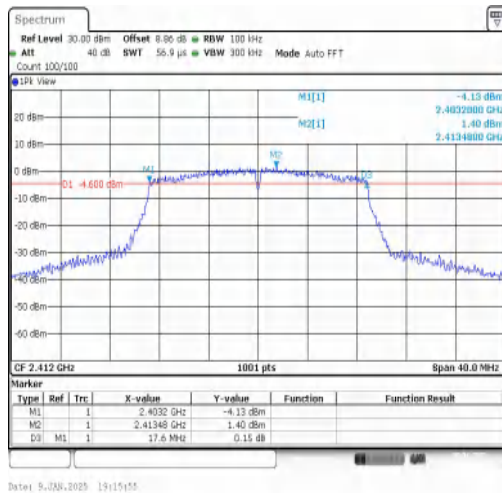


11N20SISO-Ant1-2412-PASS

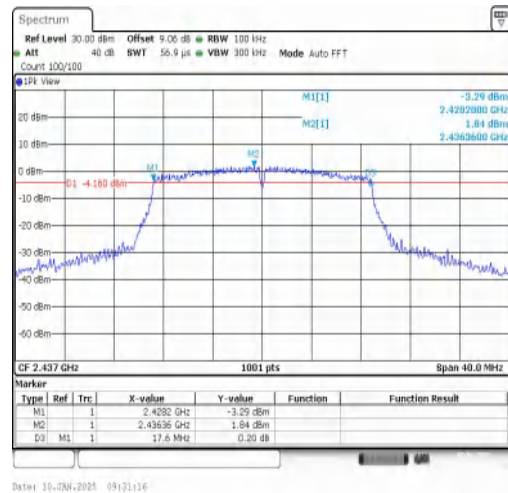


11N20SISO-Ant1-2437-PASS

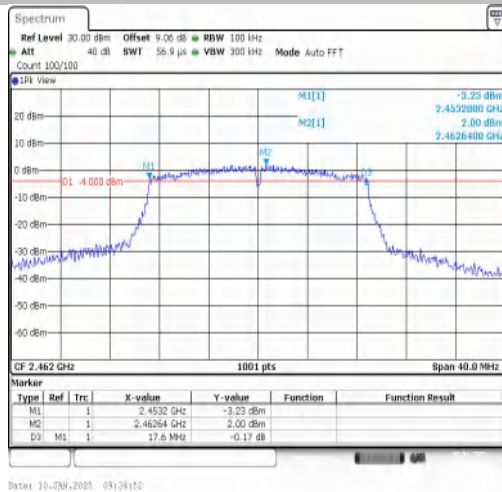


11N20SISO-Ant1-2462-PASS

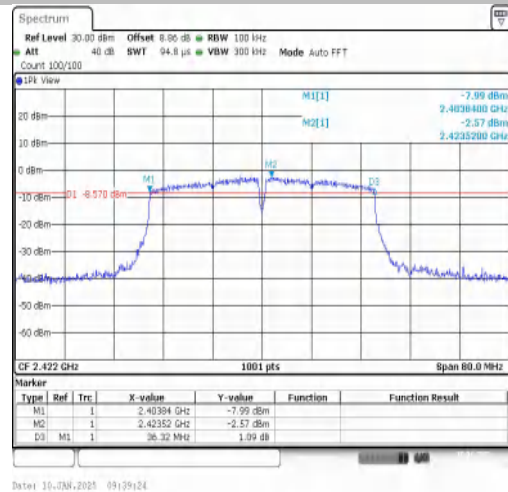

11N40SISO-Ant1-2422-PASS

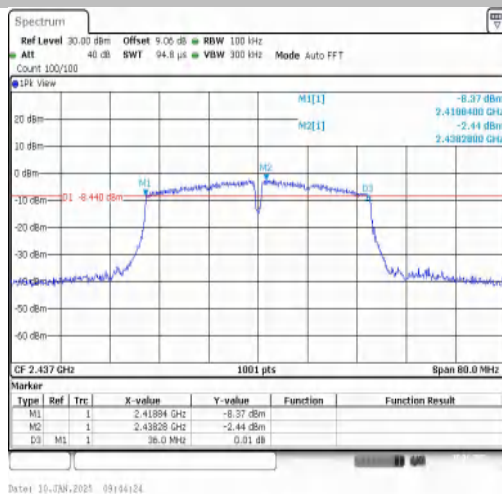

11N40SISO-Ant1-2437-PASS

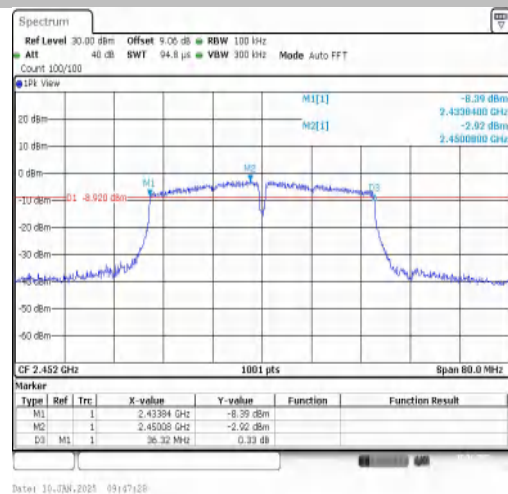

11N40SISO-Ant1-2452-PASS




## Appendix B: Occupied Channel Bandwidth

### Test Result

| Test Mode | Antenna | Channel Frequency[MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|-----------|---------|------------------------|-----------|-----------|-----------|------------|---------|
| 11B       | Ant1    | 2412                   | 12.867    | 2405.6064 | 2418.4735 | ---        | ---     |
| 11B       | Ant1    | 2437                   | 12.827    | 2430.6064 | 2443.4336 | ---        | ---     |
| 11B       | Ant1    | 2462                   | 12.907    | 2455.5265 | 2468.4336 | ---        | ---     |
| 11G       | Ant1    | 2412                   | 17.103    | 2403.5684 | 2420.6713 | ---        | ---     |
| 11G       | Ant1    | 2437                   | 17.383    | 2428.1688 | 2445.5514 | ---        | ---     |
| 11G       | Ant1    | 2462                   | 17.063    | 2453.4885 | 2470.5514 | ---        | ---     |
| 11N20SISO | Ant1    | 2412                   | 18.022    | 2403.0090 | 2421.0310 | ---        | ---     |
| 11N20SISO | Ant1    | 2437                   | 18.062    | 2428.0490 | 2446.1109 | ---        | ---     |
| 11N20SISO | Ant1    | 2462                   | 17.982    | 2452.9690 | 2470.9510 | ---        | ---     |
| 11N40SISO | Ant1    | 2422                   | 36.284    | 2403.8581 | 2440.1419 | ---        | ---     |
| 11N40SISO | Ant1    | 2437                   | 36.204    | 2418.9381 | 2455.1419 | ---        | ---     |
| 11N40SISO | Ant1    | 2452                   | 36.204    | 2434.0180 | 2470.2218 | ---        | ---     |




## Test Graphs

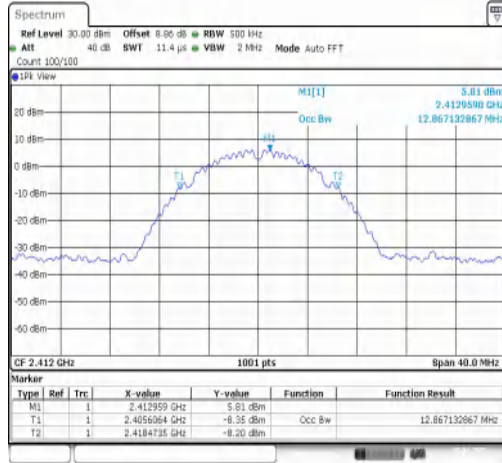


Date: 9-JAN-2025 13:06:54

11B-Ant1-2412

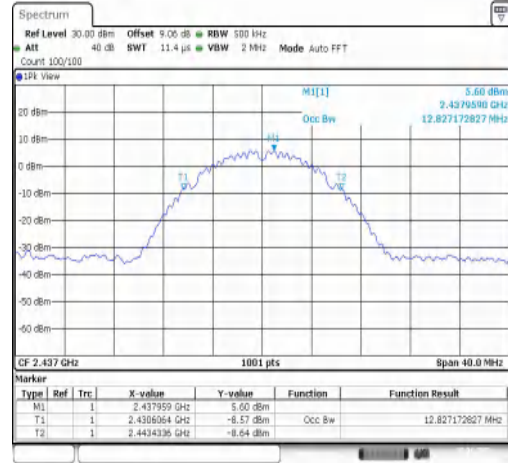


Date: 9-JAN-2025 13:51:54

11B-Ant1-2437

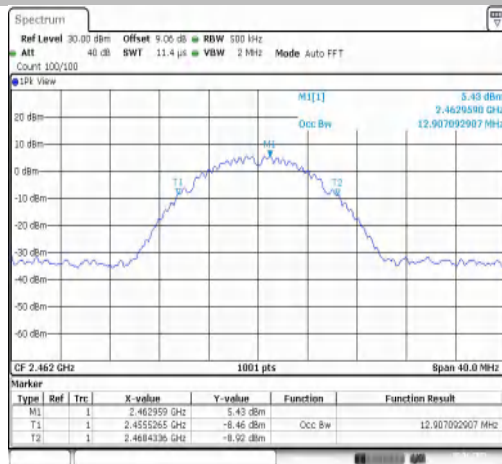


Date: 9-JAN-2025 13:54:51

11B-Ant1-2462

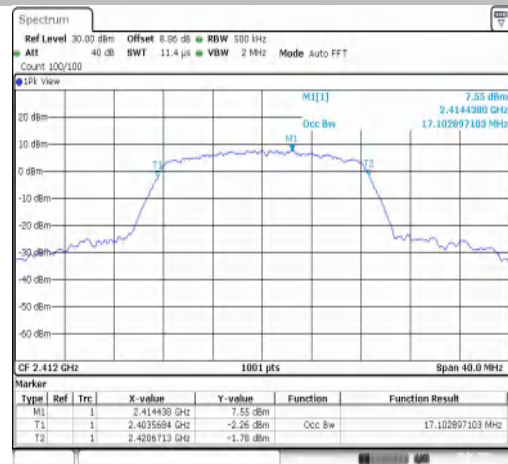


Date: 9-JAN-2025 19:02:14

11G-Ant1-2412

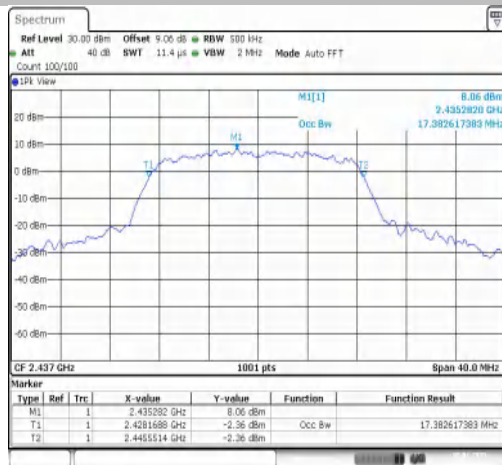


Date: 9-JAN-2025 19:06:39

11G-Ant1-2437

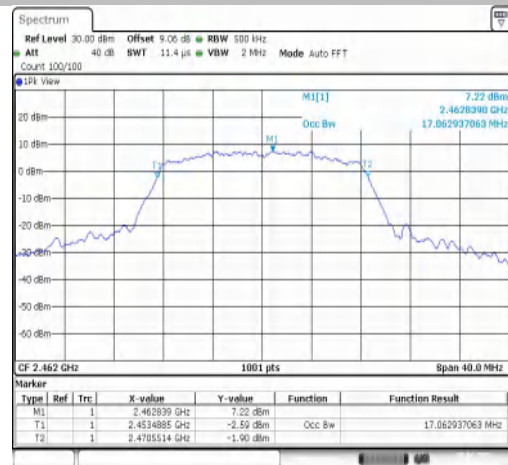


Date: 9-JAN-2025 19:10:10

11G-Ant1-2462

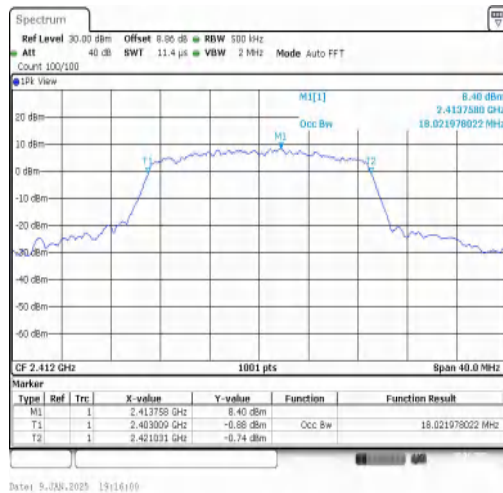

11N20SISO-Ant1-2412

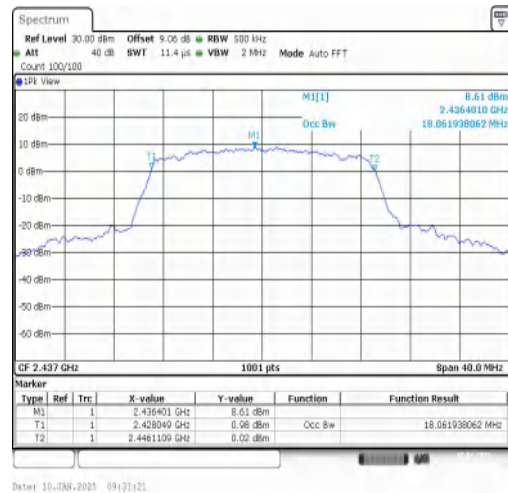


11N20SISO-Ant1-2437



11N20SISO-Ant1-2462



11N40SISO-Ant1-2422

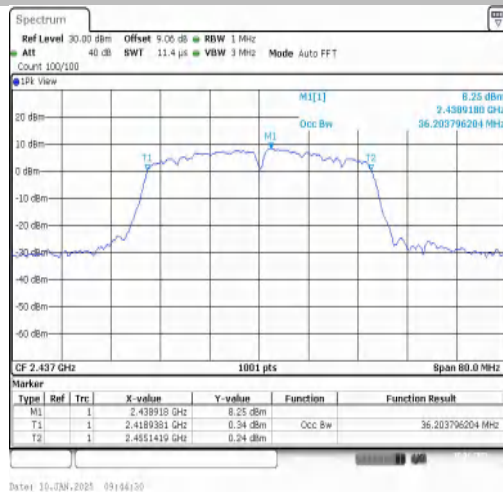

11N40SISO-Ant1-2437



11N40SISO-Ant1-2452



## Appendix C: Maximum conducted output power

### Test Result Peak

| Test Mode | Antenna | Frequency [MHz] | Peak Power [dBm] | Peak Powe Limit [dBm] | Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Verdict |
|-----------|---------|-----------------|------------------|-----------------------|------------|------------|------------------|---------|
| 11B       | Ant1    | 2412            | 13.44            | ≤30.00                | 0.11       | 13.55      | -                | PASS    |
| 11B       | Ant1    | 2437            | 13.19            | ≤30.00                | 0.11       | 13.30      | -                | PASS    |
| 11B       | Ant1    | 2462            | 13.08            | ≤30.00                | 0.11       | 13.19      | -                | PASS    |
| 11G       | Ant1    | 2412            | 14.20            | ≤30.00                | 0.11       | 14.31      | -                | PASS    |
| 11G       | Ant1    | 2437            | 13.94            | ≤30.00                | 0.11       | 14.05      | -                | PASS    |
| 11G       | Ant1    | 2462            | 13.80            | ≤30.00                | 0.11       | 13.91      | -                | PASS    |
| 11N20SISO | Ant1    | 2412            | 14.53            | ≤30.00                | 0.11       | 14.64      | -                | PASS    |
| 11N20SISO | Ant1    | 2437            | 15.30            | ≤30.00                | 0.11       | 15.41      | -                | PASS    |
| 11N20SISO | Ant1    | 2462            | 15.08            | ≤30.00                | 0.11       | 15.19      | -                | PASS    |
| 11N40SISO | Ant1    | 2422            | 13.80            | ≤30.00                | 0.11       | 13.91      | -                | PASS    |
| 11N40SISO | Ant1    | 2437            | 13.66            | ≤30.00                | 0.11       | 13.77      | -                | PASS    |
| 11N40SISO | Ant1    | 2452            | 13.37            | ≤30.00                | 0.11       | 13.48      | -                | PASS    |



## Test Result Average

| Test Mode | Antenna | Frequency [MHz] | Reading Power [dBm] | DC Factor [dB] | AV Power [dBm] | AV Power Limit [dBm] | Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Verdict |
|-----------|---------|-----------------|---------------------|----------------|----------------|----------------------|------------|------------|------------------|---------|
| 11B       | Ant1    | 2412            | 12.38               | 0.00           | 12.38          | ≤30.00               | 0.11       | 12.49      | -                | PASS    |
| 11B       | Ant1    | 2437            | 12.32               | 0.00           | 12.32          | ≤30.00               | 0.11       | 12.43      | -                | PASS    |
| 11B       | Ant1    | 2462            | 12.62               | 0.00           | 12.62          | ≤30.00               | 0.11       | 12.73      | -                | PASS    |
| 11G       | Ant1    | 2412            | 12.94               | 0.00           | 12.94          | ≤30.00               | 0.11       | 13.05      | -                | PASS    |
| 11G       | Ant1    | 2437            | 12.88               | 0.00           | 12.88          | ≤30.00               | 0.11       | 12.99      | -                | PASS    |
| 11G       | Ant1    | 2462            | 13.11               | 0.00           | 13.11          | ≤30.00               | 0.11       | 13.22      | -                | PASS    |
| 11N20SISO | Ant1    | 2412            | 13.26               | 0.00           | 13.26          | ≤30.00               | 0.11       | 13.37      | -                | PASS    |
| 11N20SISO | Ant1    | 2437            | 13.58               | 0.00           | 13.58          | ≤30.00               | 0.11       | 13.69      | -                | PASS    |
| 11N20SISO | Ant1    | 2462            | 13.69               | 0.00           | 13.69          | ≤30.00               | 0.11       | 13.80      | -                | PASS    |
| 11N40SISO | Ant1    | 2422            | 12.43               | 0.00           | 12.43          | ≤30.00               | 0.11       | 12.54      | -                | PASS    |
| 11N40SISO | Ant1    | 2437            | 12.31               | 0.00           | 12.31          | ≤30.00               | 0.11       | 12.42      | -                | PASS    |
| 11N40SISO | Ant1    | 2452            | 12.32               | 0.00           | 12.32          | ≤30.00               | 0.11       | 12.43      | -                | PASS    |

AV Power [dBm]= Reading power +DC Factor




## Appendix D: Maximum power spectral density

### Test Result


| TestMode  | Antenna | Frequency[MHz] | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|----------------|------------------|-----------------|---------|
| 11B       | Ant1    | 2412           | -7.72            | ≤8.00           | PASS    |
| 11B       | Ant1    | 2437           | -8.13            | ≤8.00           | PASS    |
| 11B       | Ant1    | 2462           | -7.73            | ≤8.00           | PASS    |
| 11G       | Ant1    | 2412           | -10.76           | ≤8.00           | PASS    |
| 11G       | Ant1    | 2437           | -9.64            | ≤8.00           | PASS    |
| 11G       | Ant1    | 2462           | -9.01            | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2412           | -8.99            | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2437           | -9.11            | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2462           | -8.83            | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2422           | -13.20           | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2437           | -12.52           | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2452           | -21.94           | ≤8.00           | PASS    |




## Test Graphs

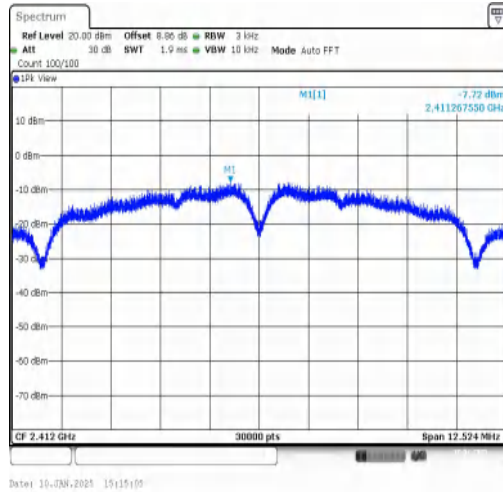


11B-Ant1-2412-PASS

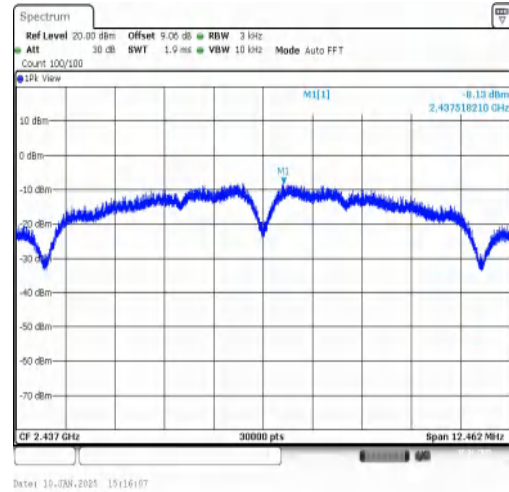


11B-Ant1-2437-PASS

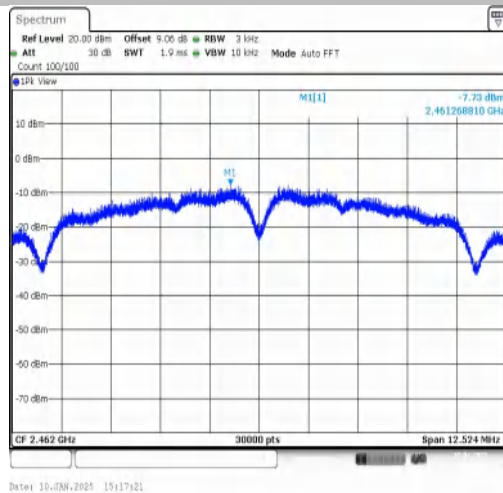


11B-Ant1-2462-PASS

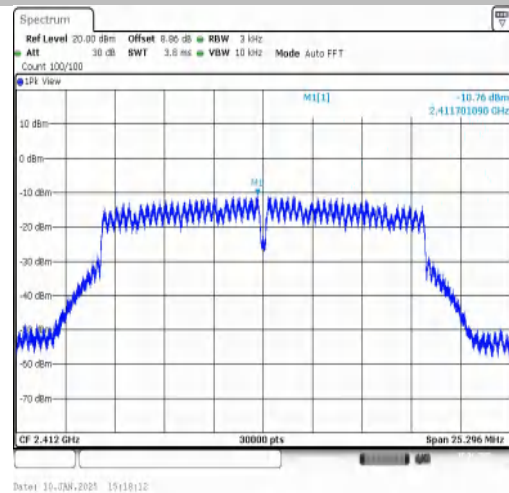


11G-Ant1-2412-PASS

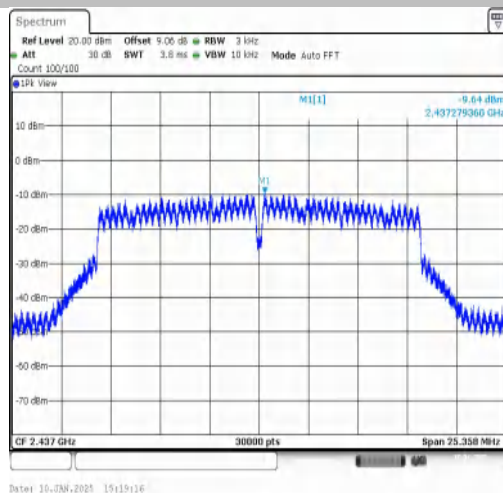


11G-Ant1-2437-PASS

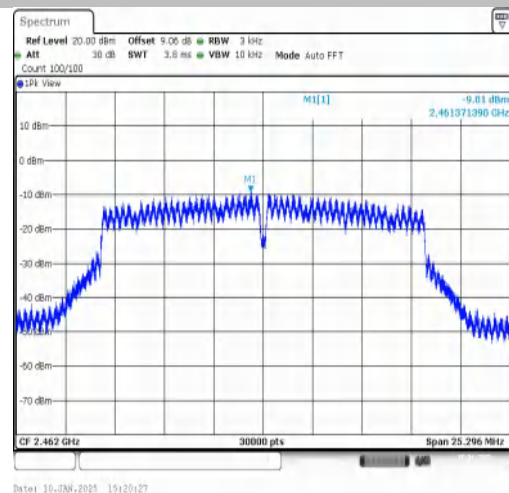


11G-Ant1-2462-PASS

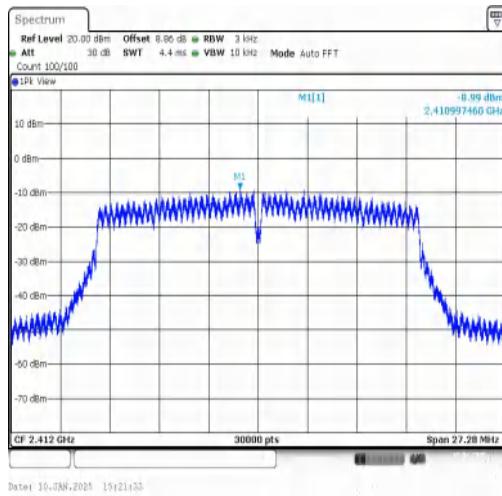


11N20SISO-Ant1-2412-PASS

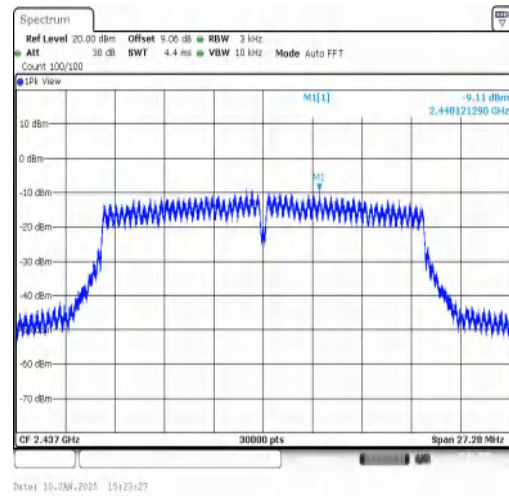


11N20SISO-Ant1-2437-PASS

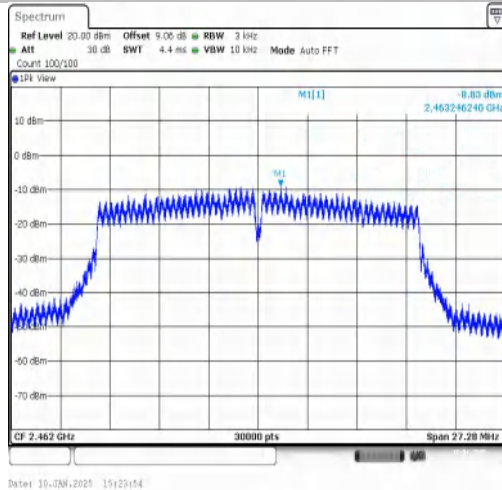


11N20SISO-Ant1-2462-PASS

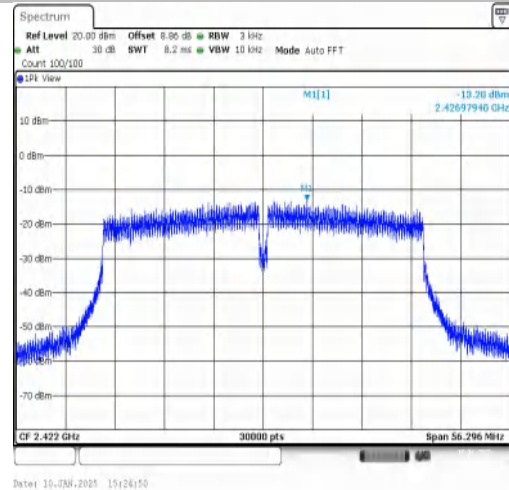

11N40SISO-Ant1-2422-PASS

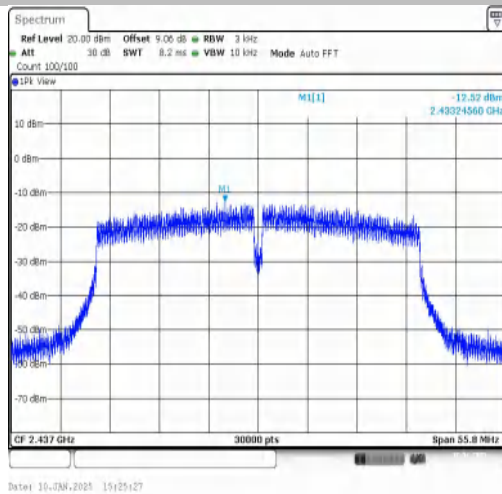

11N40SISO-Ant1-2437-PASS

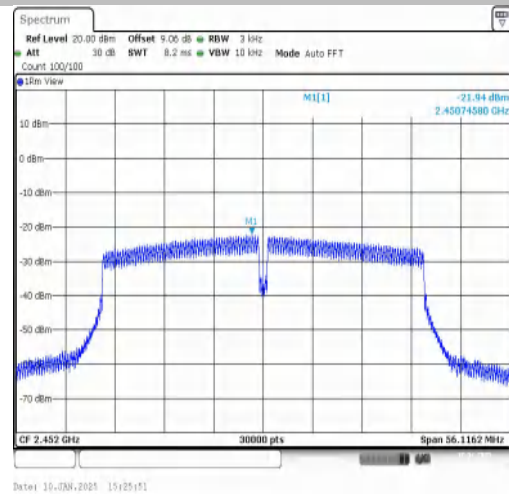

11N40SISO-Ant1-2452-PASS




## Appendix E: Conducted Spurious Emission

### Test Result


| TestMode  | Antenna | Frequency[MHz] | Freq Range [Mhz] | Ref Level [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|----------------|------------------|-----------------|--------------|-------------|---------|
| 11B       | Ant1    | 2412           | 0~Reference      | 5.61            | 5.61         | ---         | PASS    |
| 11B       | Ant1    | 2412           | 30~1000          | 5.61            | -55.16       | ≤-14.39     | PASS    |
| 11B       | Ant1    | 2412           | 1000~26500       | 5.61            | -47.73       | ≤-14.39     | PASS    |
| 11B       | Ant1    | 2437           | 0~Reference      | 5.38            | 5.38         | ---         | PASS    |
| 11B       | Ant1    | 2437           | 30~1000          | 5.38            | -48.43       | ≤-14.62     | PASS    |
| 11B       | Ant1    | 2437           | 1000~26500       | 5.38            | -37.85       | ≤-14.62     | PASS    |
| 11B       | Ant1    | 2462           | 0~Reference      | 5.31            | 5.31         | ---         | PASS    |
| 11B       | Ant1    | 2462           | 30~1000          | 5.31            | -33.02       | ≤-14.69     | PASS    |
| 11B       | Ant1    | 2462           | 1000~26500       | 5.31            | -44.38       | ≤-14.69     | PASS    |
| 11G       | Ant1    | 2412           | 0~Reference      | 1.38            | 1.38         | ---         | PASS    |
| 11G       | Ant1    | 2412           | 30~1000          | 1.38            | -51.94       | ≤-18.62     | PASS    |
| 11G       | Ant1    | 2412           | 1000~26500       | 1.38            | -47.73       | ≤-18.62     | PASS    |
| 11G       | Ant1    | 2437           | 0~Reference      | 1.22            | 1.22         | ---         | PASS    |
| 11G       | Ant1    | 2437           | 30~1000          | 1.22            | -36.4        | ≤-18.78     | PASS    |
| 11G       | Ant1    | 2437           | 1000~26500       | 1.22            | -47.32       | ≤-18.78     | PASS    |
| 11G       | Ant1    | 2462           | 0~Reference      | 1.64            | 1.64         | ---         | PASS    |
| 11G       | Ant1    | 2462           | 30~1000          | 1.64            | -36.07       | ≤-18.36     | PASS    |
| 11G       | Ant1    | 2462           | 1000~26500       | 1.64            | -46.67       | ≤-18.36     | PASS    |
| 11N20SISO | Ant1    | 2412           | 0~Reference      | 1.91            | 1.91         | ---         | PASS    |
| 11N20SISO | Ant1    | 2412           | 30~1000          | 1.91            | -36.73       | ≤-18.09     | PASS    |
| 11N20SISO | Ant1    | 2412           | 1000~26500       | 1.91            | -46.69       | ≤-18.09     | PASS    |
| 11N20SISO | Ant1    | 2437           | 0~Reference      | 2.37            | 2.37         | ---         | PASS    |
| 11N20SISO | Ant1    | 2437           | 30~1000          | 2.37            | -36.49       | ≤-17.63     | PASS    |
| 11N20SISO | Ant1    | 2437           | 1000~26500       | 2.37            | -39.5        | ≤-17.63     | PASS    |
| 11N20SISO | Ant1    | 2462           | 0~Reference      | 1.97            | 1.97         | ---         | PASS    |
| 11N20SISO | Ant1    | 2462           | 30~1000          | 1.97            | -36.59       | ≤-18.03     | PASS    |
| 11N20SISO | Ant1    | 2462           | 1000~26500       | 1.97            | -38.48       | ≤-18.03     | PASS    |
| 11N40SISO | Ant1    | 2422           | 0~Reference      | -2.23           | -2.23        | ---         | PASS    |
| 11N40SISO | Ant1    | 2422           | 30~1000          | -2.23           | -41.03       | ≤-22.23     | PASS    |
| 11N40SISO | Ant1    | 2422           | 1000~26500       | -2.23           | -45.66       | ≤-22.23     | PASS    |
| 11N40SISO | Ant1    | 2437           | 0~Reference      | -2.01           | -2.01        | ---         | PASS    |
| 11N40SISO | Ant1    | 2437           | 30~1000          | -2.01           | -52.03       | ≤-22.01     | PASS    |
| 11N40SISO | Ant1    | 2437           | 1000~26500       | -2.01           | -43.96       | ≤-22.01     | PASS    |
| 11N40SISO | Ant1    | 2452           | 0~Reference      | -2.62           | -2.62        | ---         | PASS    |
| 11N40SISO | Ant1    | 2452           | 30~1000          | -2.62           | -40.67       | ≤-22.62     | PASS    |
| 11N40SISO | Ant1    | 2452           | 1000~26500       | -2.62           | -47.41       | ≤-22.62     | PASS    |




## Test Graphs

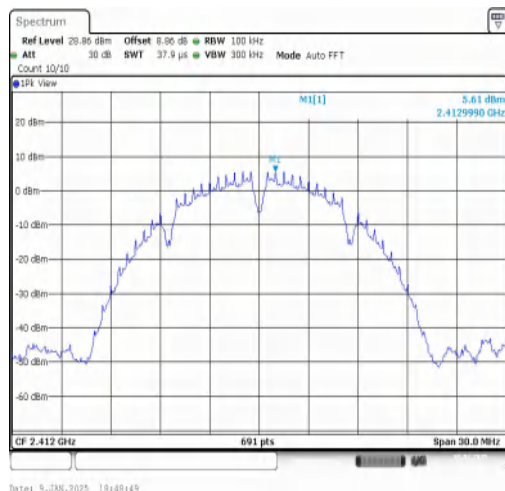


11B-Ant1-2412-0~Reference-PASS

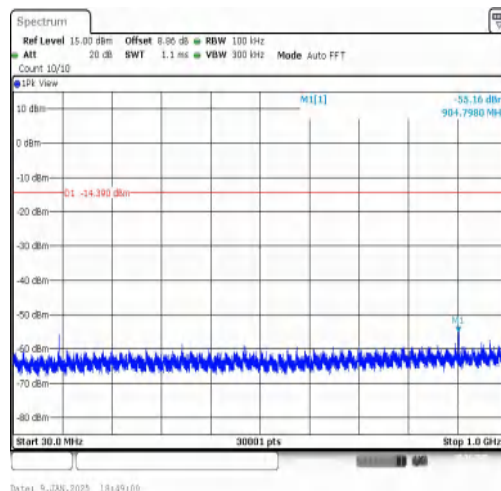


11B-Ant1-2412-30~1000-PASS

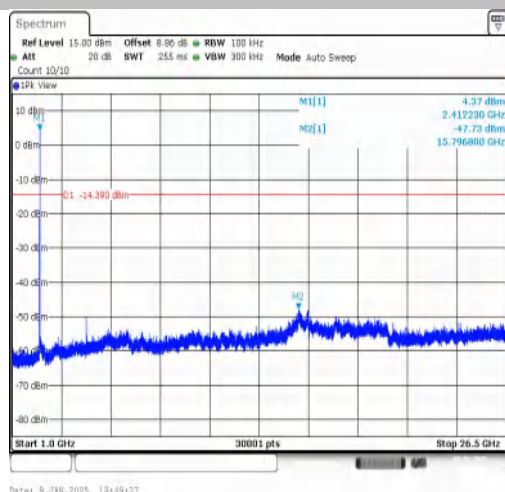


11B-Ant1-2412-1000~26500-PASS

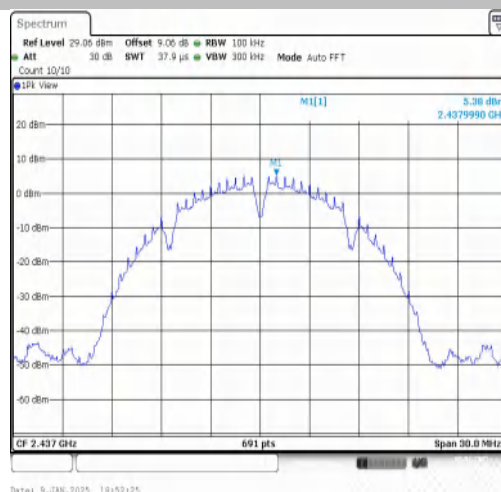


11B-Ant1-2437-0~Reference-PASS

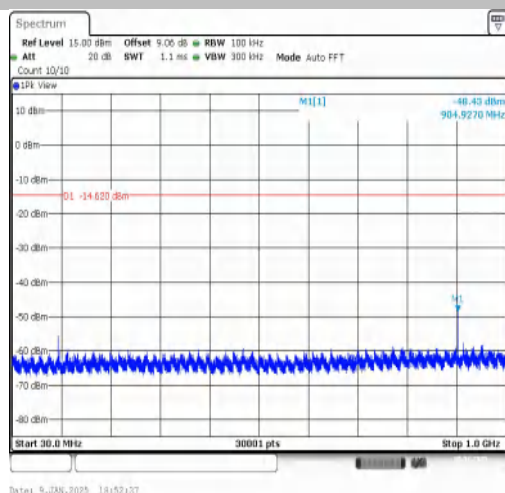


11B-Ant1-2437-30~1000-PASS

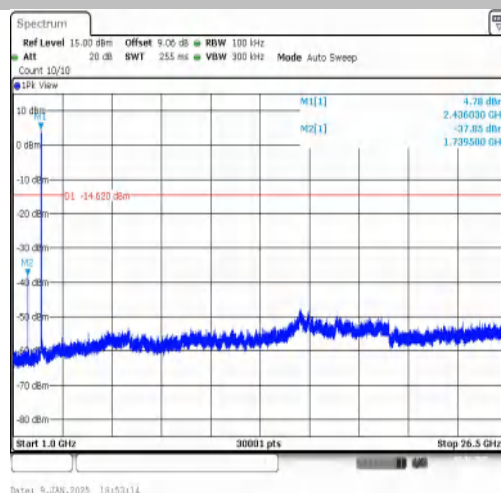


11B-Ant1-2437-1000~26500-PASS

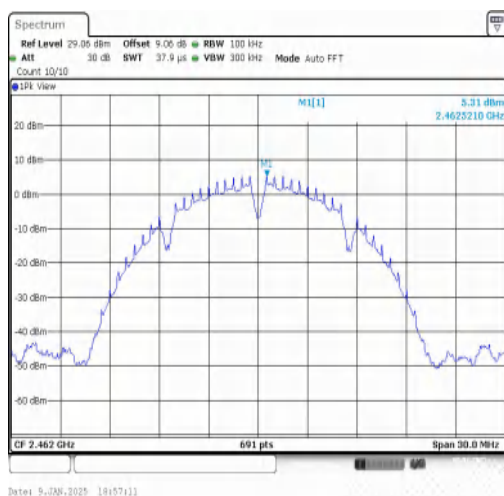


11B-Ant1-2462-0~Reference-PASS

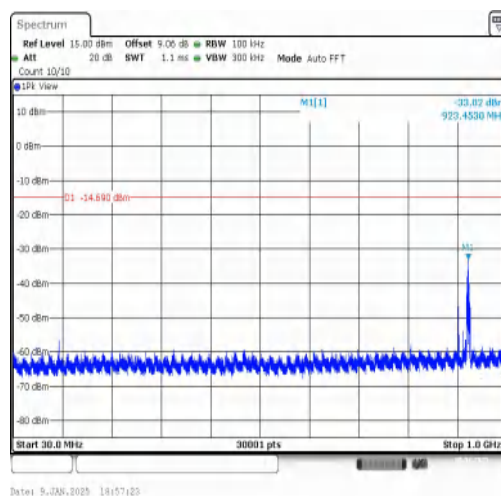


11B-Ant1-2462-30~1000-PASS

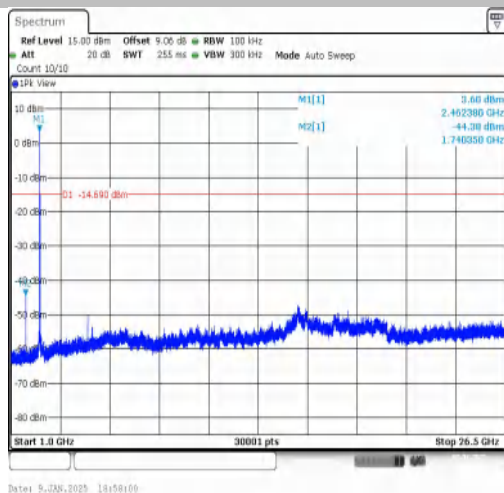


11B-Ant1-2462-1000~26500-PASS

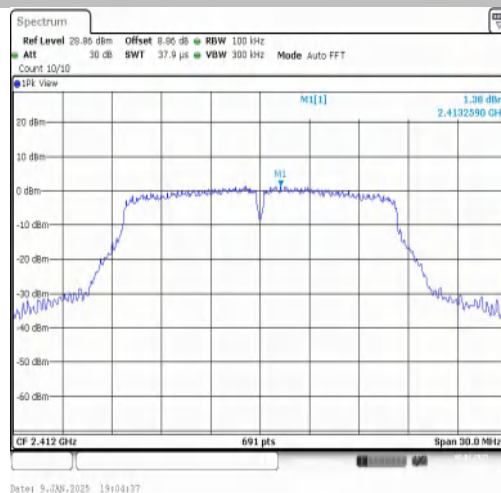


11G-Ant1-2412-0~Reference-PASS

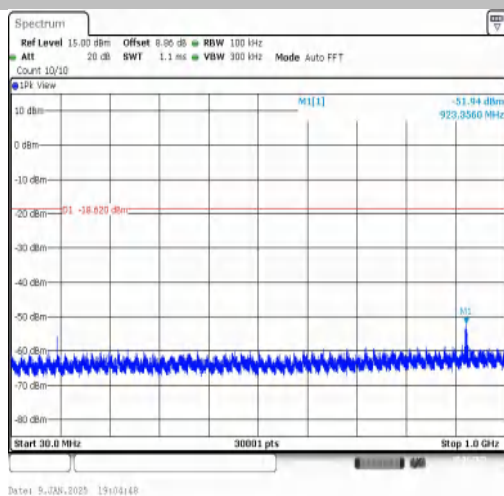


11G-Ant1-2412-30~1000-PASS

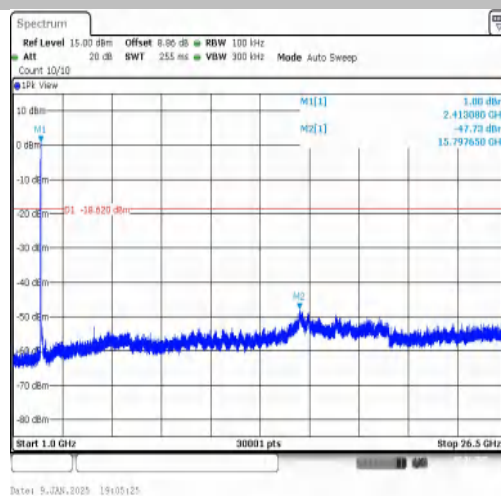


11G-Ant1-2412-1000~26500-PASS

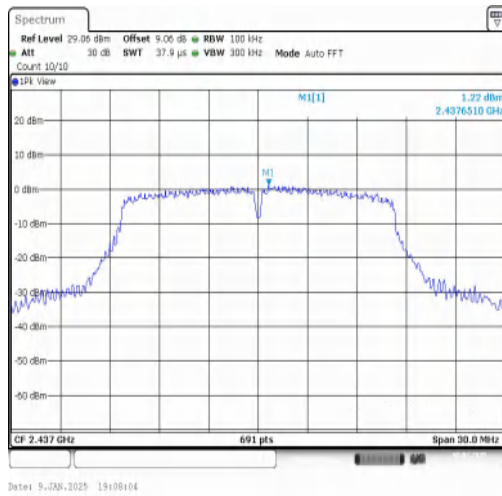


11G-Ant1-2437-0~Reference-PASS

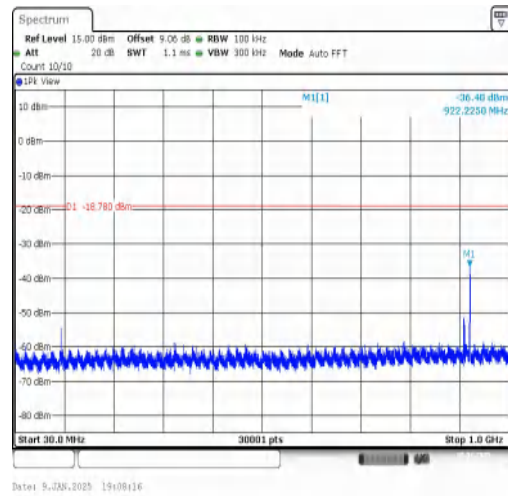


11G-Ant1-2437-30~1000-PASS

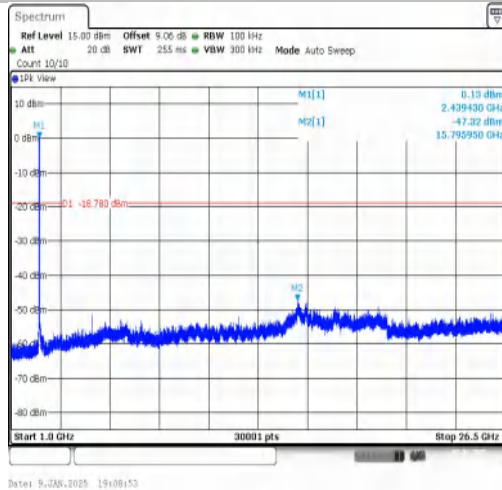


11G-Ant1-2437-1000~26500-PASS

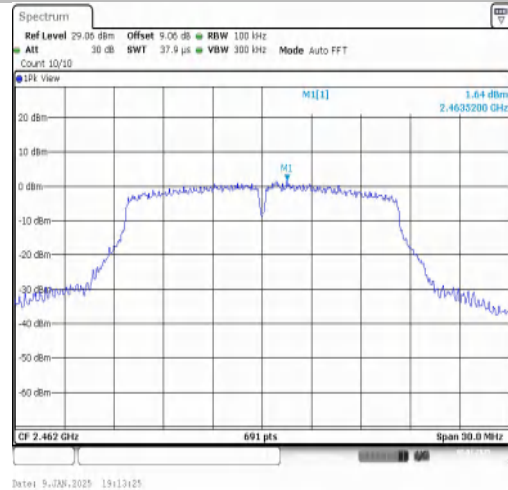


11G-Ant1-2462-0~Reference-PASS

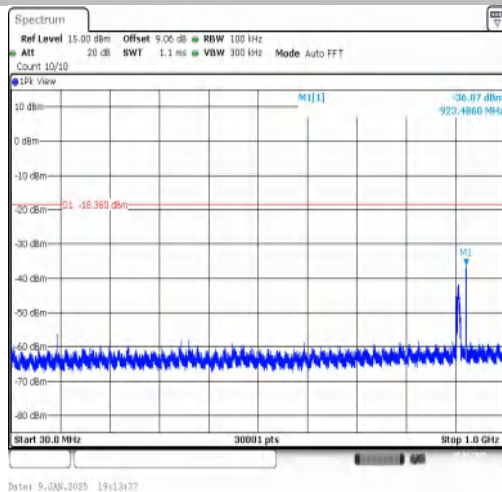


11G-Ant1-2462-30~1000-PASS

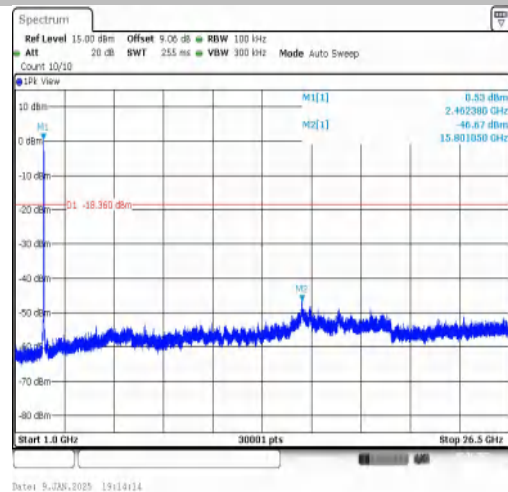


11G-Ant1-2462-1000~26500-PASS

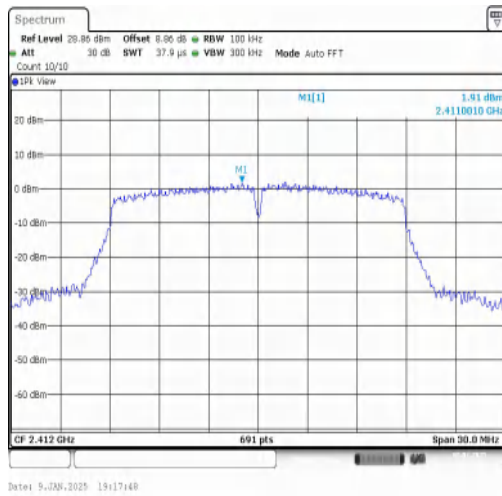


11N20SISO-Ant1-2412-0~Reference-PASS

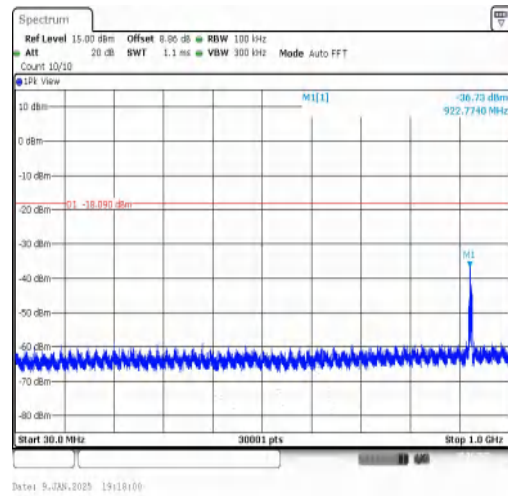


11N20SISO-Ant1-2412-30~1000-PASS

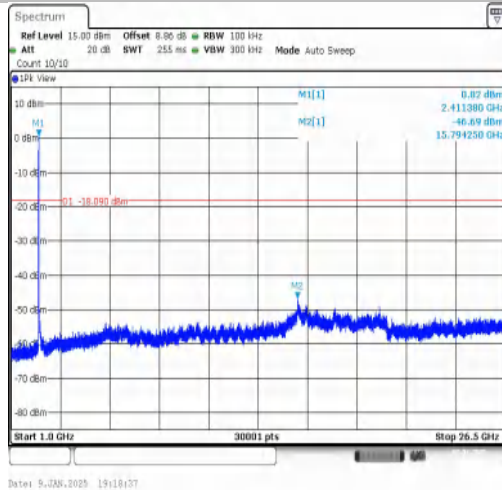


11N20SISO-Ant1-2412-1000~26500-PASS

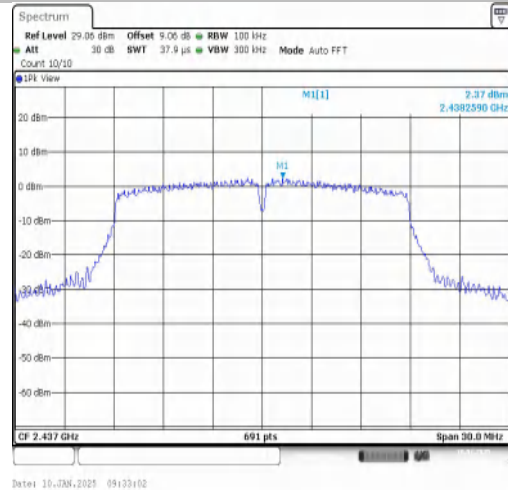



11N20SISO-Ant1-2437-0~Reference-PASS

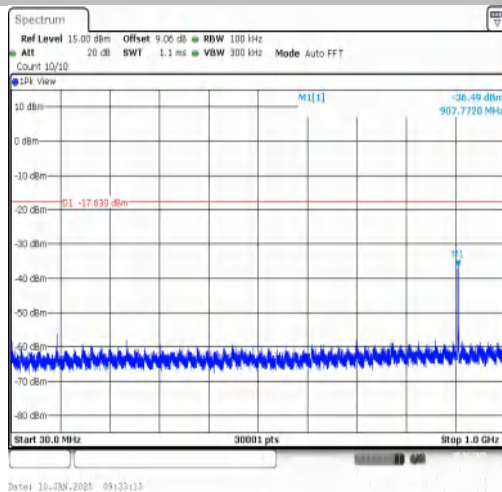

11N20SISO-Ant1-2437-30~1000-PASS


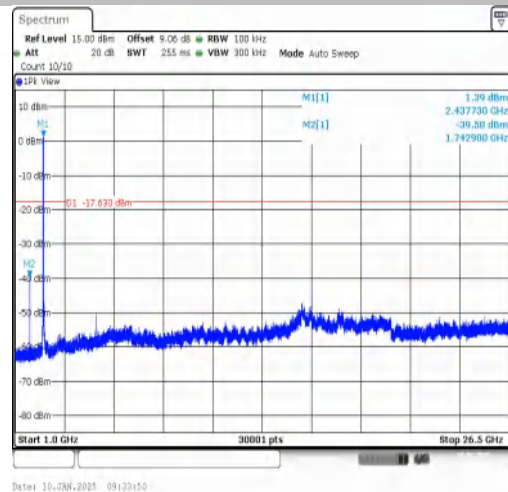


11N20SISO-Ant1-2437-1000~26500-PASS

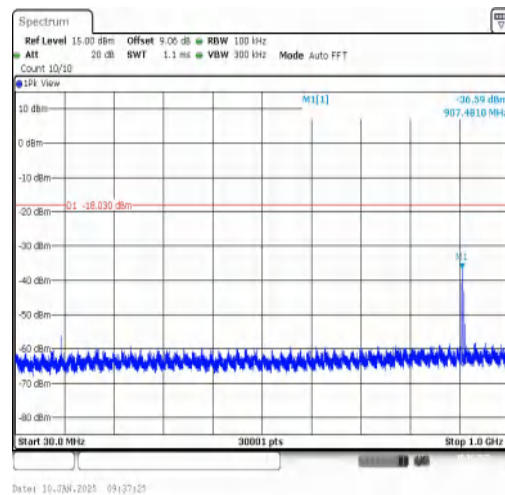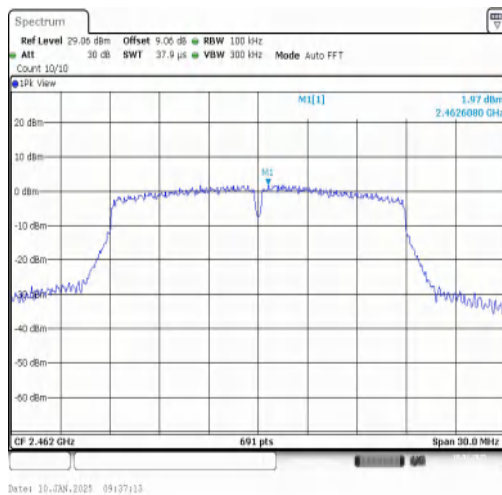



11N20SISO-Ant1-2462-0~Reference-PASS

11N20SISO-Ant1-2462-30~1000-PASS

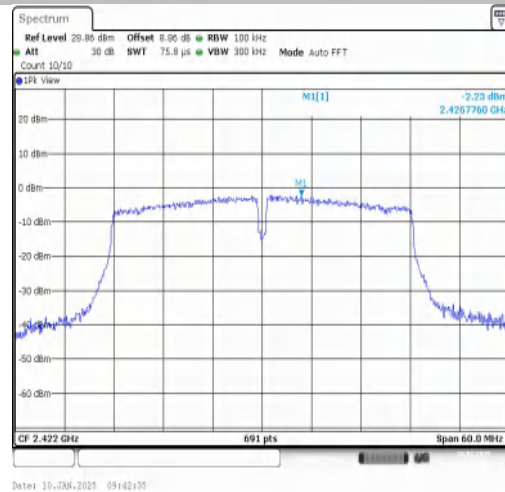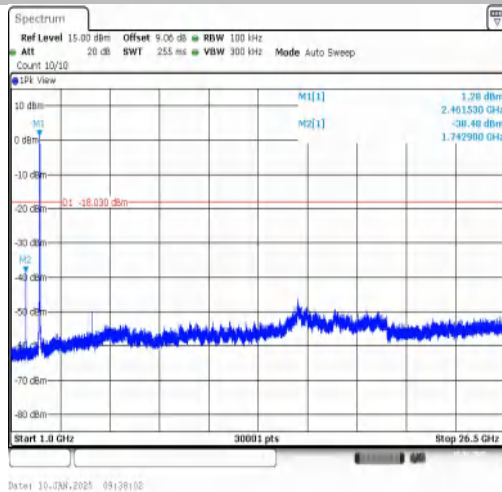


11N20SISO-Ant1-2462-1000~26500-PASS

11N40SISO-Ant1-2422-0~Reference-PASS

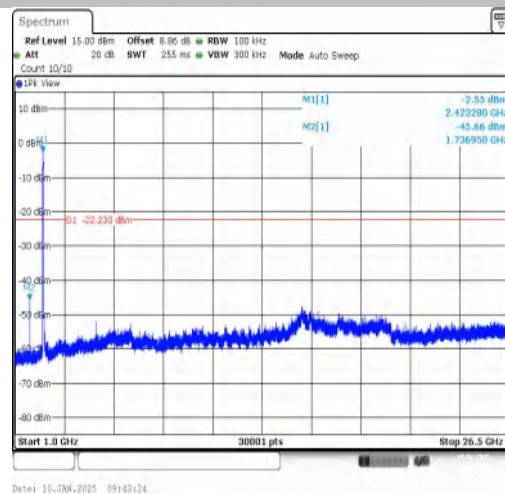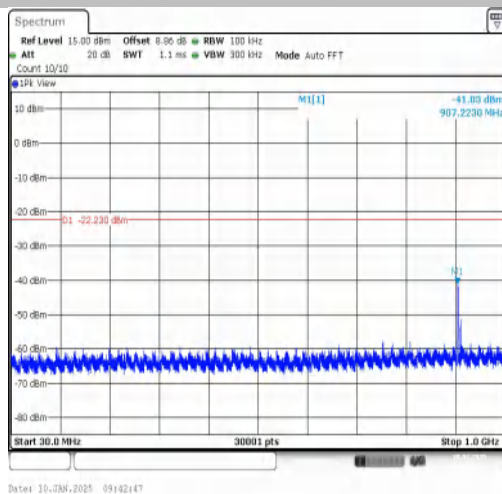


11N40SISO-Ant1-2422-30~1000-PASS


11N40SISO-Ant1-2422-1000~26500-PASS

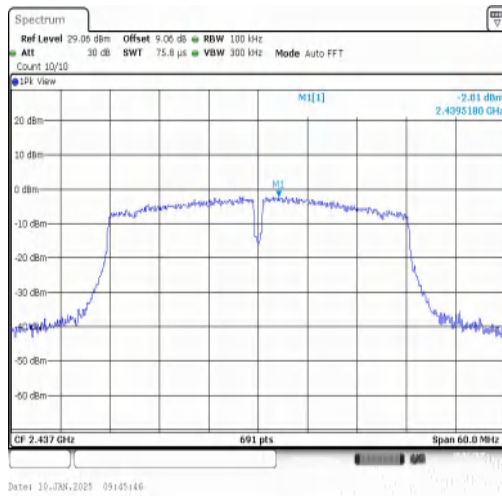


11N40SISO-Ant1-2437-0~Reference-PASS

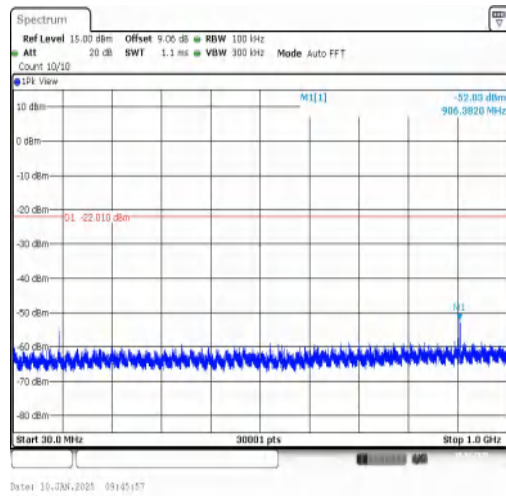


11N40SISO-Ant1-2437-30~1000-PASS

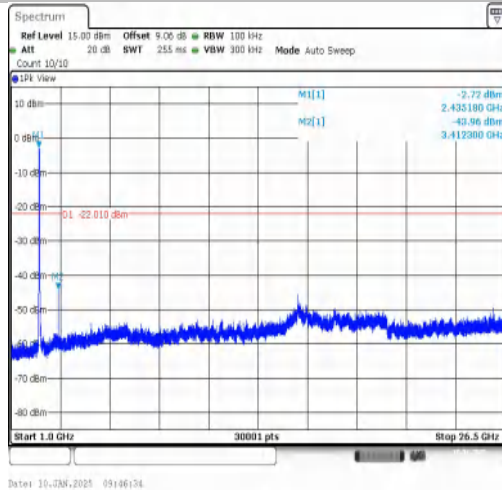


11N40SISO-Ant1-2437-1000~26500-PASS

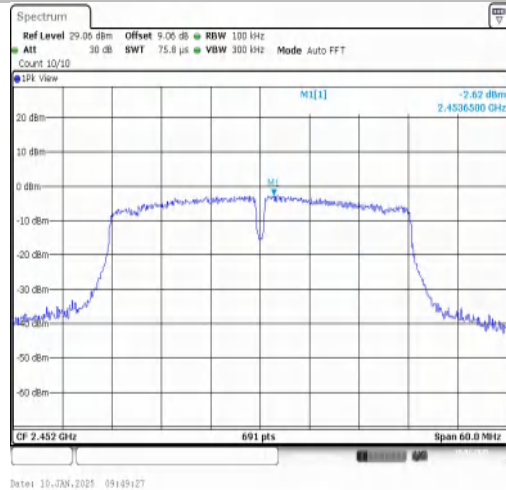

11N40SISO-Ant1-2452-0~Reference-PASS

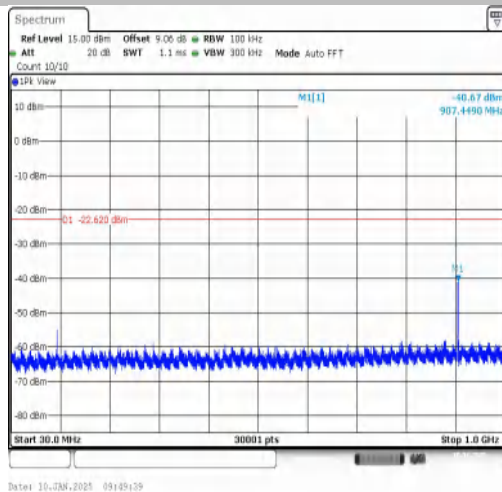

11N40SISO-Ant1-2452-30~1000-PASS

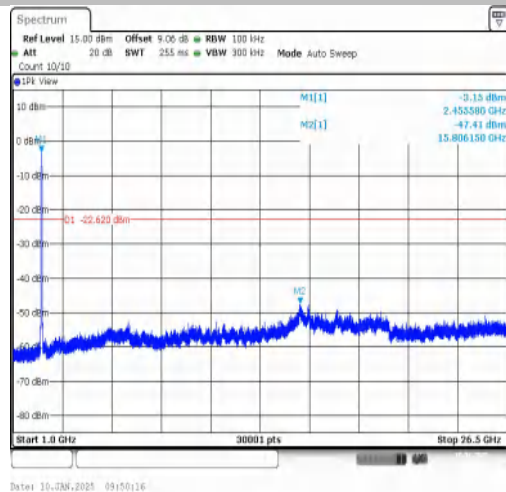

11N40SISO-Ant1-2452-1000~26500-PASS




## Appendix F: Band edge measurements

### Test Result


| TestMode  | Antenna | ChName | Frequency[MHz] | Ref Level[dBm] | Result[dBm] | Limit[dBm]    | Verdict |
|-----------|---------|--------|----------------|----------------|-------------|---------------|---------|
| 11B       | Ant1    | Low    | 2412           | 5.74           | -45.3       | $\leq -14.26$ | PASS    |
| 11B       | Ant1    | High   | 2462           | 5.39           | -46.17      | $\leq -14.61$ | PASS    |
| 11G       | Ant1    | Low    | 2412           | 0.18           | -33.72      | $\leq -19.82$ | PASS    |
| 11G       | Ant1    | High   | 2462           | 2.11           | -45.19      | $\leq -17.89$ | PASS    |
| 11N20SISO | Ant1    | Low    | 2412           | 1.55           | -29.6       | $\leq -18.45$ | PASS    |
| 11N20SISO | Ant1    | High   | 2462           | 1.41           | -44.56      | $\leq -18.59$ | PASS    |
| 11N40SISO | Ant1    | Low    | 2422           | -2.11          | -35.94      | $\leq -22.11$ | PASS    |
| 11N40SISO | Ant1    | High   | 2452           | -2.41          | -39.5       | $\leq -22.41$ | PASS    |



## Test Graphs

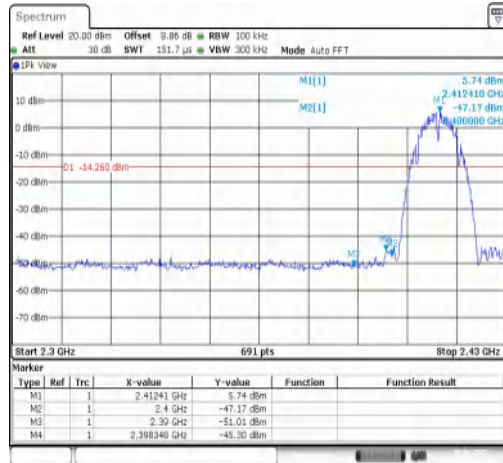


Date: 10-JUN-2025 15:15:13

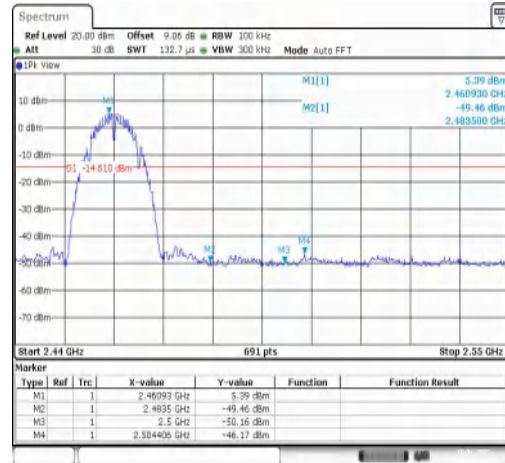


Date: 10-JUN-2025 15:17:30

11B-Ant1-2412-PASS

11B-Ant1-2462-PASS

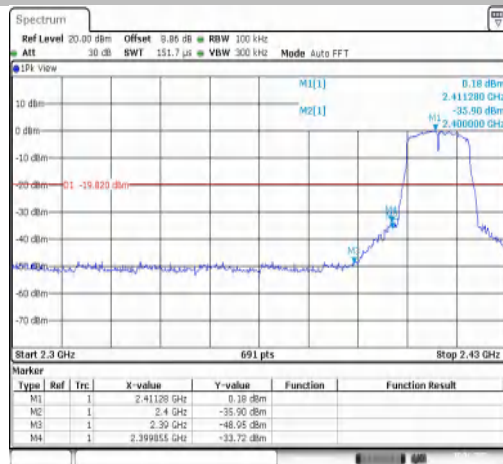


Date: 10-JUN-2025 15:18:20

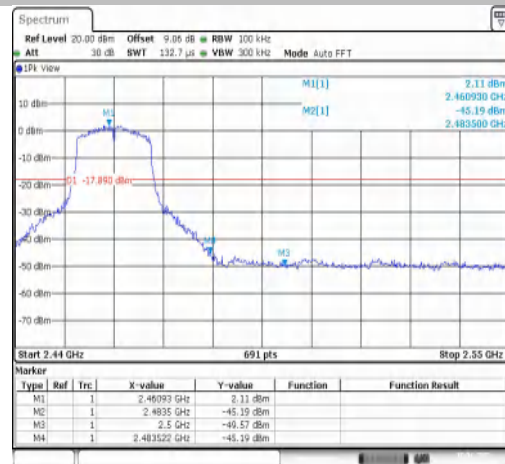


Date: 10-JUN-2025 15:20:30

11G-Ant1-2412-PASS

11G-Ant1-2462-PASS

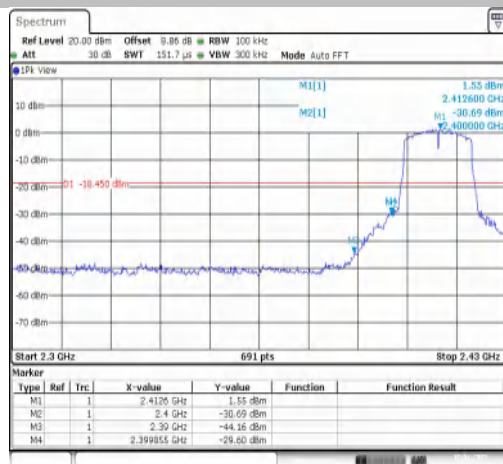


Date: 10-JUN-2025 15:21:40

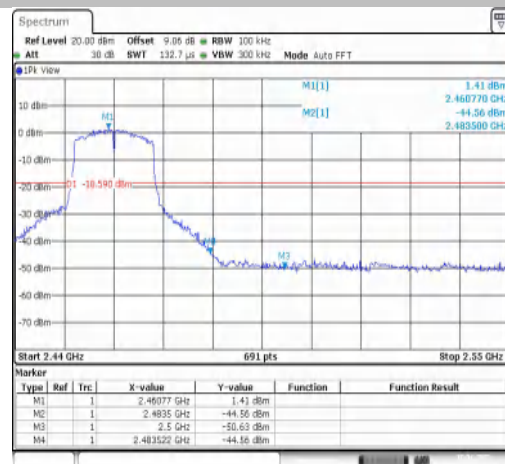


Date: 10-JUN-2025 15:24:03

11N20SISO-Ant1-2412-PASS

11N20SISO-Ant1-2462-PASS

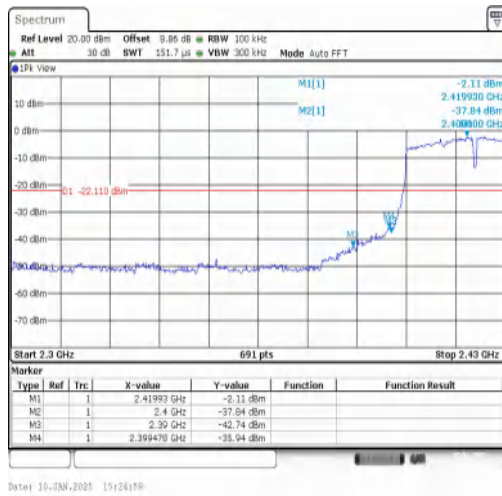

11N40SISO-Ant1-2422-PASS

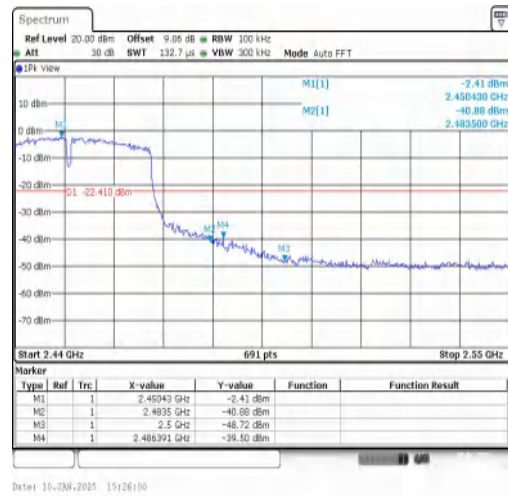

11N40SISO-Ant1-2452-PASS




## Appendix G: Duty Cycle

### Test Result


| TestMode  | Antenna | Frequency[MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle[%] | DC Factor [dB] |
|-----------|---------|----------------|----------------------------|--------------------------|---------------|----------------|
| 11B       | Ant1    | 2412           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11B       | Ant1    | 2437           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11B       | Ant1    | 2462           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11G       | Ant1    | 2412           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11G       | Ant1    | 2437           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11G       | Ant1    | 2462           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N20SISO | Ant1    | 2412           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N20SISO | Ant1    | 2437           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N20SISO | Ant1    | 2462           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N40SISO | Ant1    | 2422           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N40SISO | Ant1    | 2437           | 19.00                      | 19.00                    | 100.00        | 0.00           |
| 11N40SISO | Ant1    | 2452           | 19.00                      | 19.00                    | 100.00        | 0.00           |




## Test Graphs

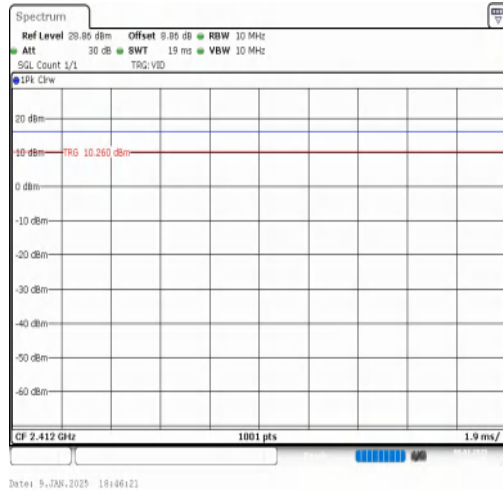


NTNV-11B-Ant1-2412

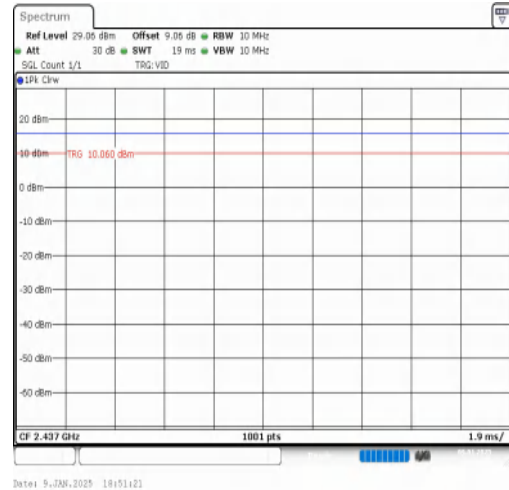


NTNV-11B-Ant1-2437

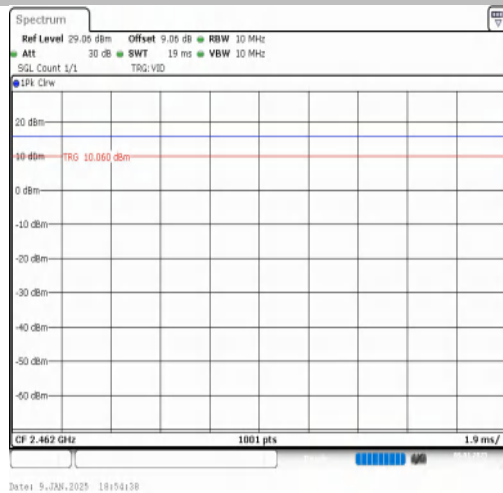


NTNV-11B-Ant1-2462

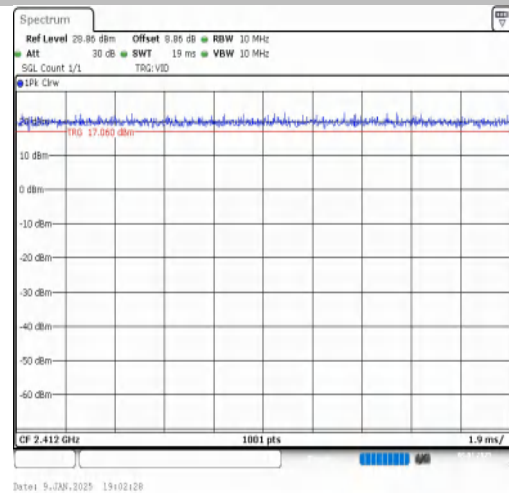


NTNV-11G-Ant1-2412

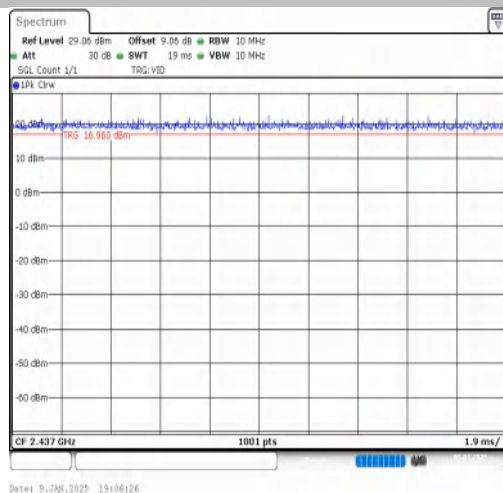


NTNV-11G-Ant1-2437

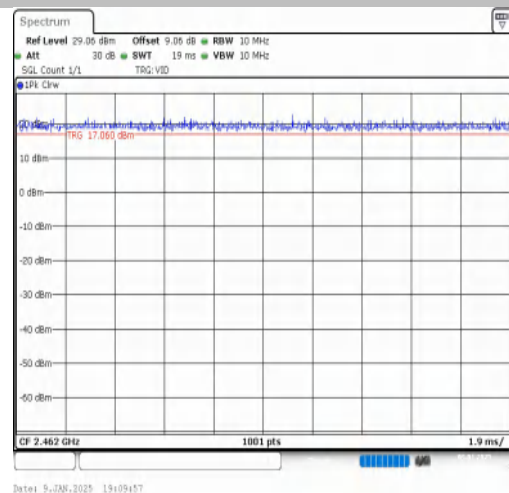

NTNV-11G-Ant1-2462

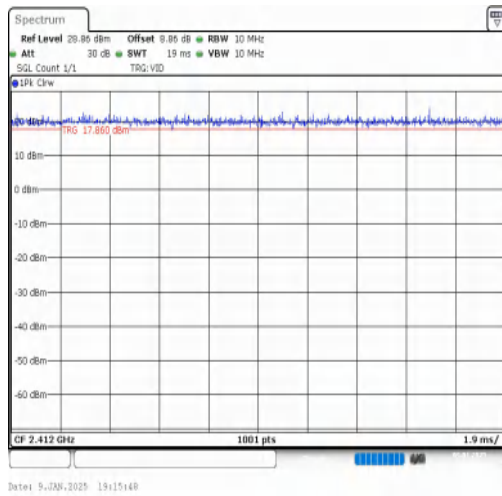


Date: 9/23/2025 19:15:48

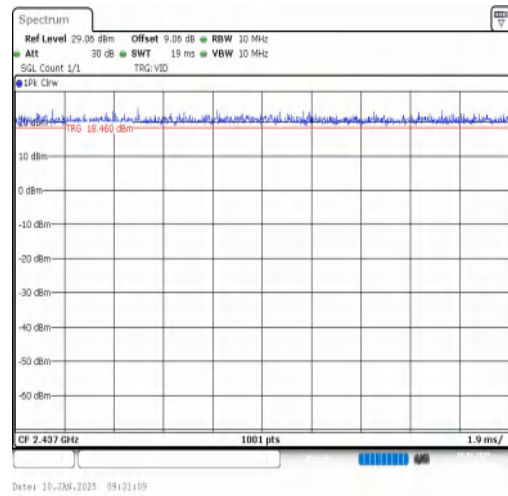


Date: 10/23/2025 09:11:09

NTNV-11N20SISO-Ant1-2412

NTNV-11N20SISO-Ant1-2437

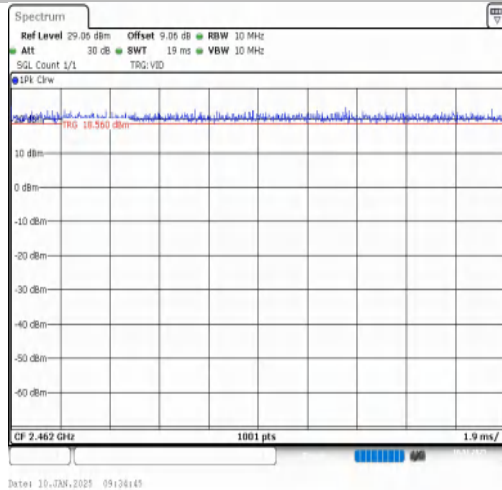


Date: 10/23/2025 09:16:45

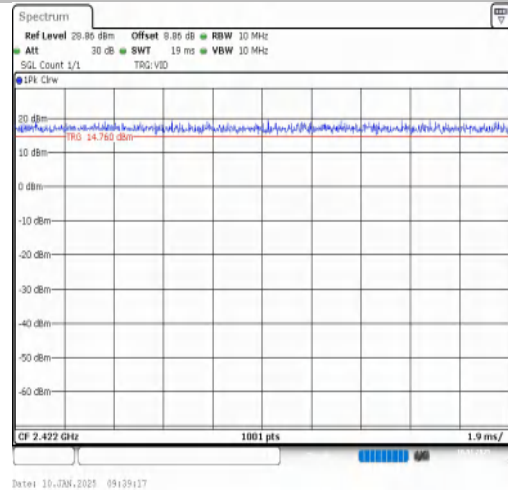


Date: 10/23/2025 09:19:17

NTNV-11N20SISO-Ant1-2462

NTNV-11N40SISO-Ant1-2422

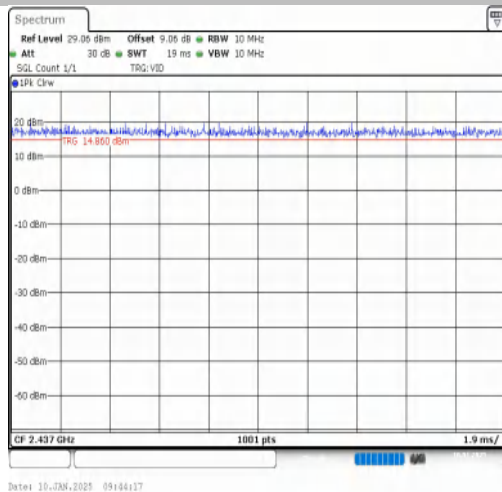

Date: 10/23/2025 09:16:17

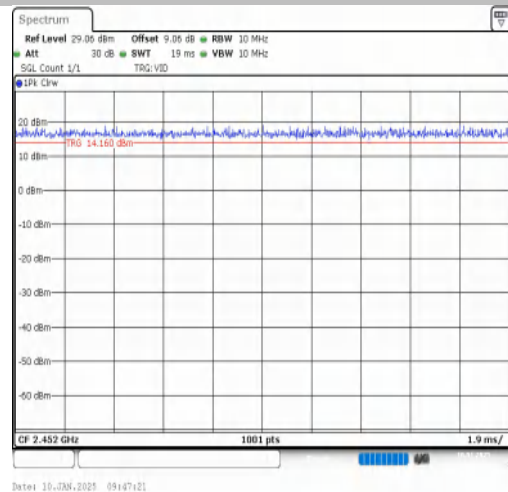

Date: 10/23/2025 09:17:21

NTNV-11N40SISO-Ant1-2437

NTNV-11N40SISO-Ant1-2452

-----END-----